

FCC PART 15, SUBPART C
TEST METHOD: ANSI C63.4-1992

for

2.4 GHz / 900 MHz CORDLESS PHONE

Model: CP-2575

Prepared for

CASIO COMMUNICATIONS, INC.
 PO BOX 2914
 TORRANCE, CALIFORNIA 90509-2914

COMPATIBLE ELECTRONICS INC.
 114 OLINDA DRIVE
 BREA, CALIFORNIA 92823
 (714) 579-0500

DATE: MARCH 23, 2000

	REPORT BODY	APPENDICES				TOTAL
		<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	
PAGES	16	2	3	14	30	64

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
1. PURPOSE	5
2. ADMINISTRATIVE DATA	6
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
3. APPLICABLE DOCUMENTS	7
4. Description of Test Configuration	8
4.1 Description of Test Configuration - EMI	8
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. Test Procedures	13
7.1 RF Emissions	13
7.1.1 Conducted Emissions Test	13
7.1.2 Radiated Emissions (Spurious and Harmonics) Test	14
7.2 RF Band Edges	15
8. CONCLUSIONS	16



LIST OF APPENDICES

APPENDIX	TITLE
A	Modifications to the EUT
B	Additional Models Covered Under this Report
C	Diagrams, Charts and Photos • Test Setup Diagrams • Radiated and Conducted Emissions Photos • Antenna and Effective Gain Factors
D	Data Sheets
E	Channel Number and Frequencies of the EUT

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Plot Map And Layout of Test Site
3	Processing Gain Setup



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product endorsement by NVLAP or any other agency of the U.S. Government.

Device Tested: 2.4 GHz / 900 MHz Cordless Phone
Model: CP-2575
S/N: N/A

Modifications: The EUT was not modified during the testing.

Manufacturer: Casio Communications, Inc.
P.O. Box 2914
Torrance, California 90509-9214

Test Date: March 10, 2000

Test Specifications: EMI requirements
FCC Title 47, Part 15 Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.249

Test Procedure: ANSI C63.4: 1992

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 450 kHz - 30 MHz	Complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.207
2	Radiated RF Emissions, 10 kHz - 25000 MHz	Complies with the limits of CFR Title 47, Part 15, Subpart C, sections 15.205 and 15.249



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Compatibility (EMC) tests performed on the 2.4 GHz / 900 MHz Cordless Phone Model: CP-2575. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4: 1992. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, and 15.249.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Casio Communications, Inc.

Lananh T. Tran Compliance Engineer

Compatible Electronics Inc.

Kyle Fujimoto Test Engineer

Scott McCutchan Lab Manager

2.4 Date Test Sample was Received

The test sample was received on March 10, 2000.

2.5 Disposition of the Test Sample

The test sample was returned to Casio Communications, Inc. on March 23, 2000.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
NCR	No Calibration Required
H/S	Handset Station
B/S	Base Station



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMC Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules - Radio frequency devices (including digital devices) – Intentional Radiators.
ANSI C63.4 1992	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
FCC Title 47, Part 15 Subpart B	FCC Rules - Radio frequency devices (including digital devices) – Unintentional Radiators.



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

Specifics of the EUT and Peripherals Tested

Handset being tested: The 2.4 GHz / 900 MHz Cordless Phone - Handset Model: CP-2575 (EUT) was connected to a headset via its headset port. The handset was placed on the wooden table and tested in three orthogonal axis. The low (channel 1), medium (channel 30), and high (channel 60) channels were tested. The handset was transmitting to and receiving from the base unit. The EUT was investigated for emissions while off hook. The radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix C. **The final radiated data was taken in the Y axis, which was the orthogonal axis that produced the highest emissions during the initial investigation.**

Base being tested: The 2.4 GHz / 900 MHz Cordless Phone - Base Model: CP-2575 (EUT) was placed on the wooden table. The low (channel 1), medium (channel 30), and high (channel 60) channels were tested. The base was connected to two different line simulators and an AC adapter via its line and power ports, respectively. The first line simulator was also connected to the Northern Telecom telephone. The second line simulator was also connected to the Conair telephone. The base was transmitting and receiving from the handset. The handset was also used to dial out a number on the first line simulator that caused the Northern Telecom telephone to ring. The Northern Telecom telephone was then taken off hook to allow for normal communications between the base unit and handset. The Conair telephone was used to dial out a number on the second line simulator to the EUT's second line. The conducted as well as radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix C. **The final radiated as well as conducted data was taken in the X axis, which was the orthogonal axis that produced the highest emissions during the initial investigation.**



4.1.1 Cable Construction and Termination

HANDSET BEING TESTED

Cable 1 This is a 6 foot unshielded round cable connecting the handset to the headset. It has a special headset connector at the EUT end and is hard wired into the headset.

BASE BEING TESTED

Cable 1 This is a 2 meter unshielded cable connecting the base to the test line simulator #2. It has an RJ-11 connector at each end. The cable was bundled to a length of 1 meter.

Cable 2 This is a 2 meter unshielded cable connecting the base to the test line simulator #1. It has an RJ-11 connector at each end. The cable was bundled to a length of 1 meter.

Cable 3 This is a 2 meter unshielded cable connecting the Northern Telecom phone to the test line simulator #2. It has an RJ-11 connector at each end. The cable was bundled to a length of 1 meter.

Cable 4 This is a 2 meter unshielded cable connecting the Conair phone to the test line simulator #1. It has an RJ-11 connector at each end. The cable was bundled to a length of 1 meter.

Cable 5 This is a 6 foot unshielded cable connecting the base to the AC Adapter. It has a 1/8 inch power connector at the base end and is hard wired into the AC Adapter.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
2.4 GHz / 900 MHz Cordless Phone - Base (EUT)	CASIO COMMUNICATIONS, INC.	CP-2575	N/A	AAL-CP-2575
2.4 GHz / 900 MHz Cordless Phone - Handset (EUT)	CASIO COMMUNICATIONS, INC.	CP-2575	N/A	AAL-CP-2575
AC ADAPTOR	CASIO COMMUNICATIONS, INC.	M/N 90	N/A	N/A
REGULAR TELEPHONE	NORTHERN TELECOM	N/A	N/A	N/A
HEADSET	N/A	N/A	N/A	N/A
TEST LINE SIMULATOR	TELTONE	TLS-3	N/A	N/A
TEST LINE SIMULATOR	TELTONE	TLS-5C-01	060661	N/A



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Spectrum Analyzer	Hewlett Packard	8566B	3638A08768	Dec. 14, 1999	Dec. 14, 2000
Preamplifier	Com Power	PA-102	1017	Jan. 11, 2000	Jan. 11, 2001
Quasi-Peak Adapter	Hewlett Packard	85650A	3303A01688	Nov. 10, 1999	Nov. 10, 2000
RF Attenuator	Sertek	412-10	N/A	Nov. 22, 1999	Nov. 22, 2000
LISN	Com Power	LI-215	12075	Nov. 13, 1999	Nov. 13, 2000
LISN	Com Power	LI-215	12078	Nov. 13, 1999	Nov. 13, 2000
Biconical Antenna	Com Power	AB-100	1548	Oct. 14, 1999	Oct. 14, 2000
Log Periodic Antenna	Com Power	AL-100	16039	Oct. 14, 1999	Oct. 14, 2000
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A
Turntable	Com Power	TT-100	N/A	N/A	N/A
Computer	Hewlett Packard	D5251A 888	US74458128	N/A	N/A
Printer	Hewlett Packard	C5886A	SG7CM1P090	N/A	N/A
Monitor	Hewlett Packard	D5258A	DK74889705	N/A	N/A
Loop Antenna	Com-Power	AL-130	25309	Apr. 13, 1999	Apr. 13, 2000
Horn Antenna	Antenna Research	DRG-118/A	1053	Dec. 8, 1995	N/A
Microwave Preamplifier	Com-Power	PA-122	25195	Jan. 13, 2000	Jan. 13, 2001
Amplifier	Hewlett Packard	11975A	2403A00202	Dec. 17, 1999	Dec. 17, 2000
Harmonic Mixer	Hewlett Packard	11970K	3003A05460	Jan. 5, 2000	Jan. 5, 2001
Horn Antenna	Antenna Research	MWH-1826/B	1004	Dec. 5, 1994	N.C.R.



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1.2 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.



7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 RF Emissions

7.1.1 Conducted Emissions Test

The spectrum analyzer was used as a measuring meter along with the quasi-peak adapter. The data was collected with the spectrum analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak detector was used only where indicated in the data sheets. A 10 dB attenuation pad was used for the protection of the spectrum analyzer input stage, and the spectrum analyzer offset was adjusted accordingly to read the actual data measured. The LISN output was read by the spectrum analyzer. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for the conducted emissions test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4: 1992. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The initial test data was taken in manual mode while scanning the frequency ranges of 0.45 MHz to 1.6 MHz, 1.6 MHz to 5 MHz and 5 MHz to 30 MHz. The conducted emissions from the EUT were maximized for operating mode as well as cable placement. Once a predominant frequency (within 12 dB of the limit) was found, it was more closely examined with the spectrum analyzer span adjusted to 1 MHz.

The final data was collected under program control by the HP 9000/300 in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave.



7.1.2 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer was used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifier Model: PA-102 was used for frequencies from 30 MHz to 1 GHz, and the Com-Power Microwave Amplifier Model: PA-122 was used for frequencies above 1 GHz. The spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. The quasi-peak adapter was used only for those readings which are marked accordingly on the data sheets. The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
10 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 25 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 1992. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.



Radiated Emissions (Spurious and Harmonics) Test (con't)

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain final test data.

For the 22 GHz – 25 GHz span, the Hewlett Packard 11970K Harmonic Mixer and the Hewlett Packard 11975A Amplifier were used to allow the spectrum analyzer to scan up to 25 GHz.

7.2 RF Band Edges

The RF band edges were taken at the edges of the ISM spectrum (2400 MHz when the EUT was on channel 1 and 2483.50 MHz when the EUT was on channel 60 for the base and 902 MHz when the EUT was on channel 1 and 928 MHz when the EUT was on channel 60 for the handset) using the spectrum analyzer. The RF band edges were measured at 3 meters using a preamplifier to easier see any emissions near the band edges. Both the handset and base were tested. A spectral plot of the band edges are included to prove the emissions at the band edges were below the requirements of 15.249 (c). Both the handset and base were tested.



8. CONCLUSIONS

The 2.4 GHz / 900 MHz Cordless Phone Model: CP-2575 meets all of the specification limits defined in FCC Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.249.





APPENDIX A

MODIFICATIONS TO THE EUT




MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B and C specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.

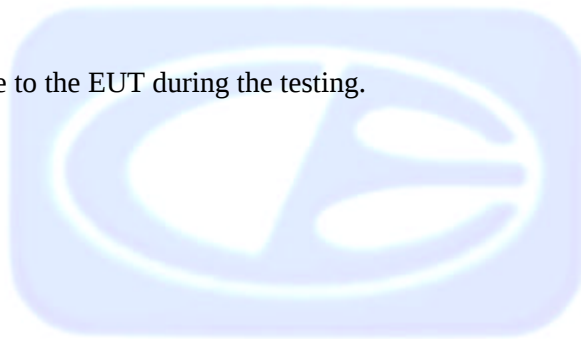



APPENDIX B

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***



ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

2.4 GHz / 900 MHz Cordless Phone
Model: CP-2575
S/N: N/A

ALSO APPROVED UNDER THIS REPORT: 2.4 GHz / 900 MHz Cordless Phone

Model: CP-2070
S/N: N/A

The CP-2070 is a degraded version of the model CP-2570. The differences are that the CP-2575 (which was the model that was tested) has:

1. Low Cost Routing feature
2. Data Port (additional RJ-11 port)
3. no Handset-in-Use base LED

Please see the next page for the official letter by the manufacturer stating the differences mentioned above.





APPENDIX C

DIAGRAMS, CHARTS AND PHOTOS






FIGURE 1: CONDUCTED EMISSIONS TEST SETUP




FIGURE 2: PLOT MAP AND LAYOUT OF RADIATED SITE

OPEN LAND > 15 METERS



OPEN LAND > 15 METERS

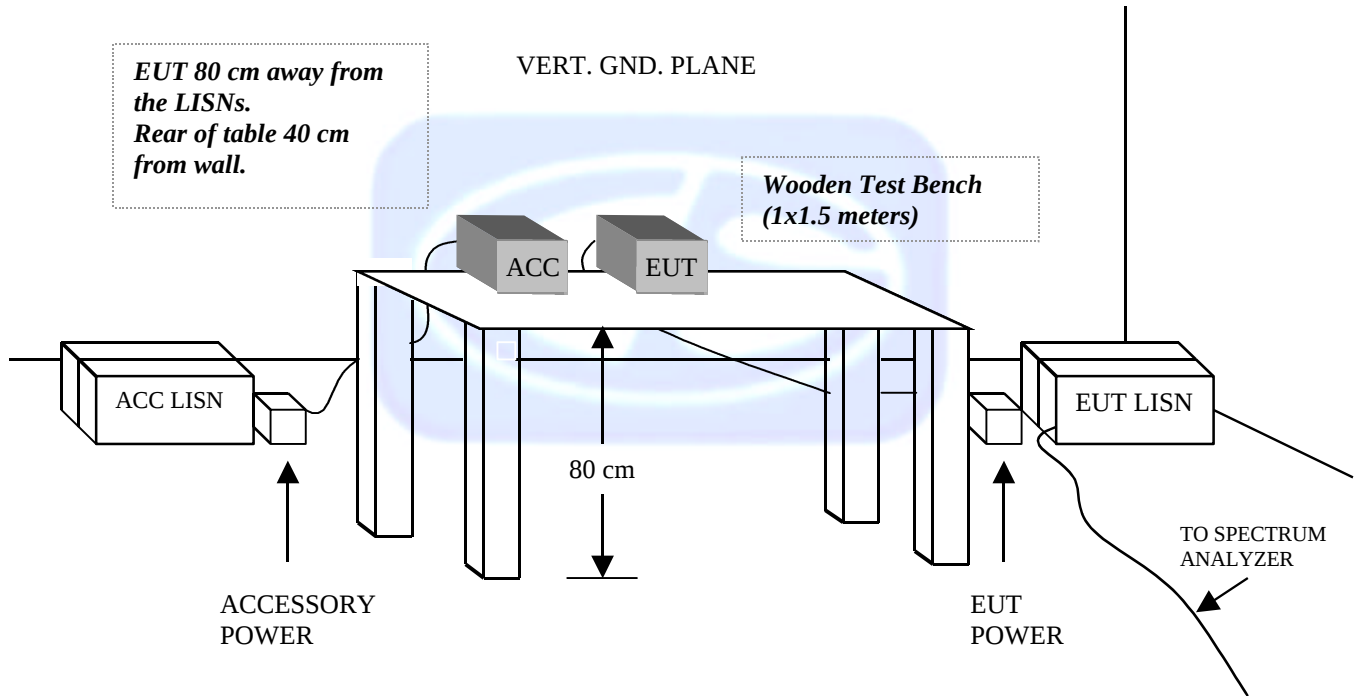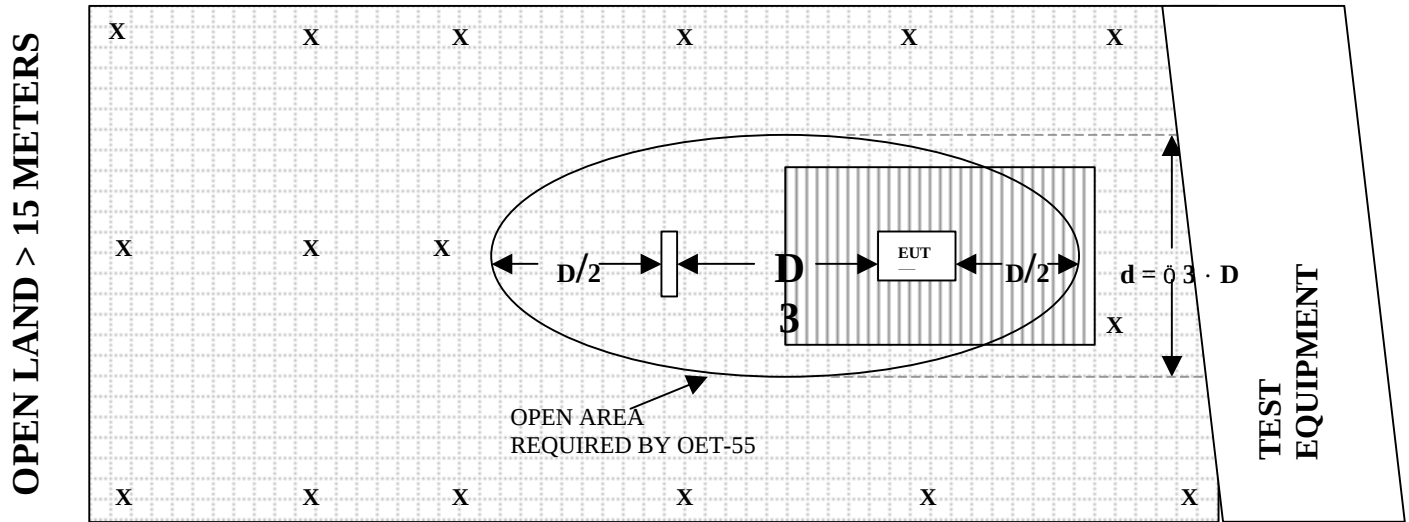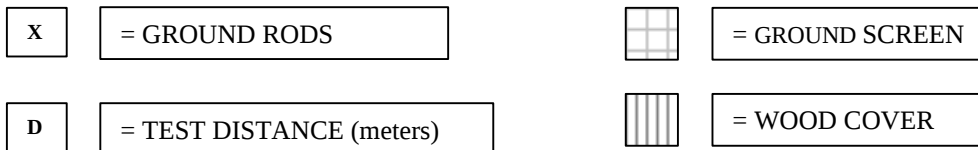

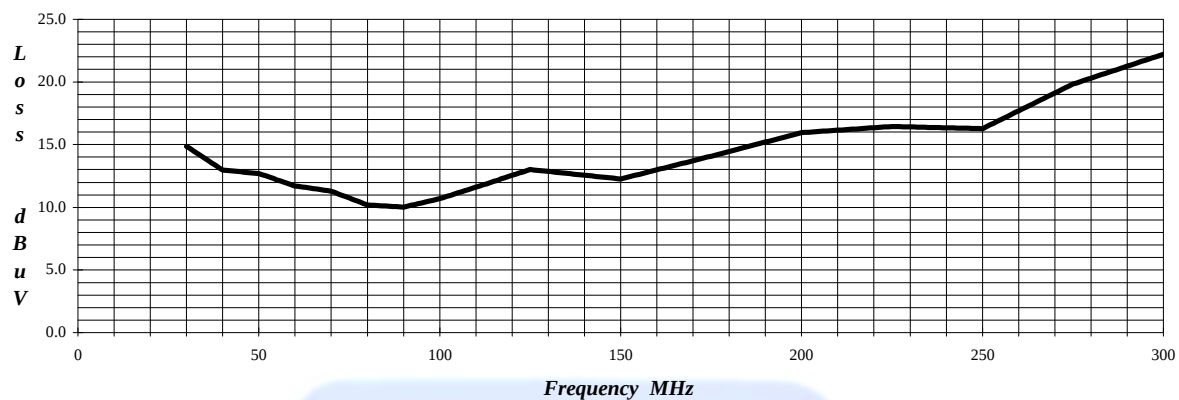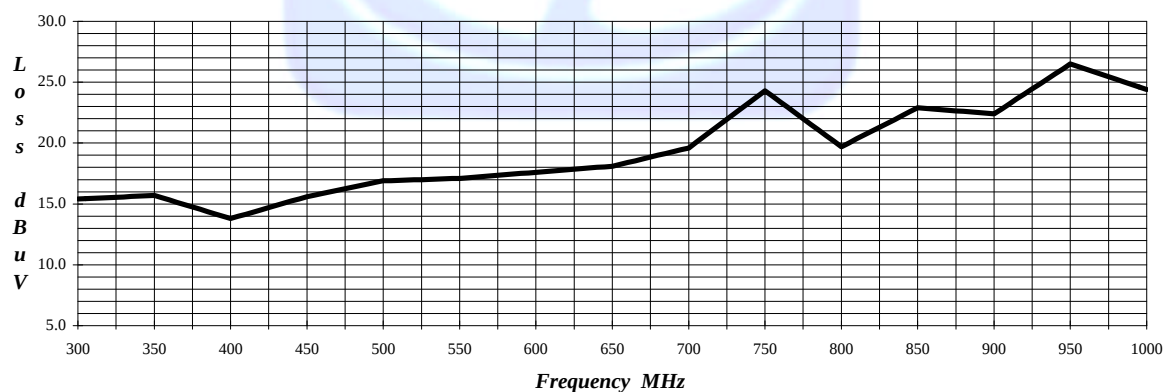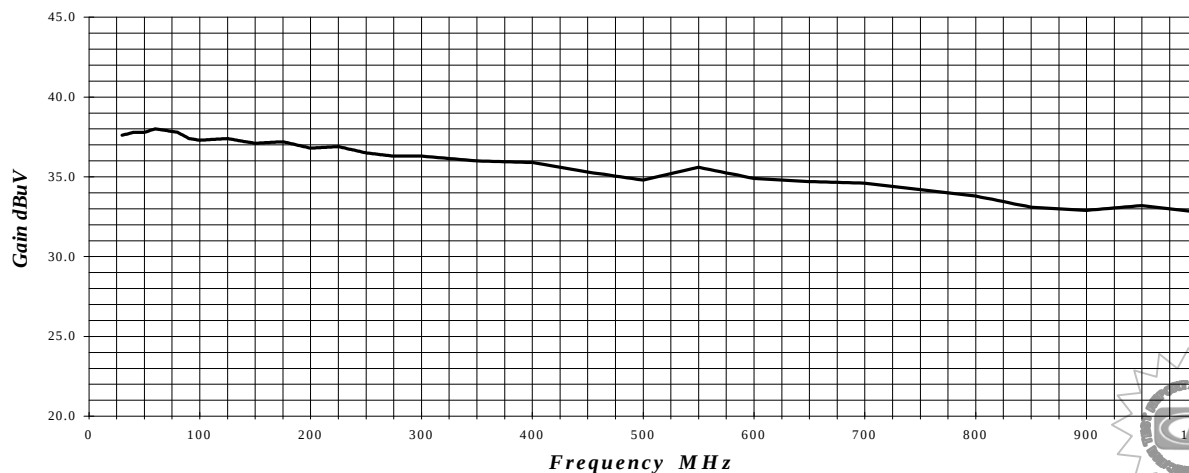LAB "D" BICONICAL ANTENNA AB-100 S/N 01548 Cal: 10-14-99**LAB "D" LOG PERIODIC ANTENNA AL-100 S/N 16039 Cal: 10-14-99****PREAMPLIFIER EFFECTIVE GAIN AT 3 METERS PA-102 S/N: 1017 Effective 1-13-00**


COM-POWER PA-122

MICROWAVE PREAMPLIFIER

S/N: 25195

CALIBRATION DATE: JANUARY 13, 2000

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	34.4	9.5	31.5
1.1	34.1	10.0	31.0
1.2	34.2	10.5	31.4
1.3	34.1	11.0	30.7
1.4	33.9	11.5	29.5
1.5	33.8	12.0	27.8
1.6	33.0	12.5	31.4
1.7	33.3	13.0	31.0
1.8	33.3	13.5	31.0
1.9	31.9	14.0	31.5
2.0	32.7	14.5	30.2
2.5	31.8	15.0	29.2
3.0	31.7	15.5	30.1
3.5	31.9	16.0	29.0
4.0	31.0	16.5	27.8
4.5	31.4	17.0	30.8
5.0	31.1	17.5	31.5
5.5	31.0	18.0	30.8
6.0	32.0	19.0	29.6
6.5	31.6	20.0	30.6
7.0	32.3	21.0	31.7
7.5	32.9	22.0	28.7
8.0	32.1	23.0	26.5
8.5	31.6	24.0	27.2
9.0	30.7	25.0	28.2
--	--	26.0	26.4



ANTENNA RESEARCH MWH-1826/B

HORN ANTENNA

S/N: 1004

CALIBRATION DATE: DECEMBER 5, 1994

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
18.0	23.1	18.85	23.2
19.7	23.6	20.55	23.5
21.4	23.7	22.25	24.0
23.10	24.0	23.95	24.1
24.80	24.1	25.65	24.3
26.5	24.4	--	--



COM-POWER CORPORATION

LOOP ANTENNA

S/N: 25309

CALIBRATION DATE: APRIL 13, 1999

FREQUENCY (MHz)	ELECTRIC FACTOR (dB/m)	FREQUENCY (MHz)	ELECTRIC FACTOR (dB/m)
0.01	10.9	1	10.3
0.02	10.0	2	11.0
0.03	11.6	3	10.7
0.04	11.3	4	10.5
0.05	10.0	5	11.0
0.06	10.4	6	11.0
0.07	10.2	7	10.8
0.08	9.9	8	10.7
0.09	9.8	9	11.4
0.1	9.8	10	11.1
0.2	7.5	12	10.5
0.3	9.9	14	9.4
0.4	9.9	15	9.2
0.5	9.8	16	8.8
0.6	10.0	18	10.5
0.7	10.1	20	10.4
0.8	10.0	25	8.1
0.9	9.9	30	6.2



ANTENNA RESEARCH DRG-118/A

HORN ANTENNA

S/N: 1053

CALIBRATION DATE: DECEMBER 8, 1995

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	22.3	2.0	26.7
3.0	29.7	4.0	29.5
5.0	32.3	6.0	32.4
7.0	36.1	8.0	37.4
9.0	36.8	10.0	39.5
11.0	39.6	12.0	39.8
13.0	39.7	14.0	41.8
15.0	41.9	16.0	38.1
17.0	41.0	18.0	46.5





FRONT VIEW

2.4 GHz / 900 MHz CORDLESS PHONE - BASE

MODEL: CP-2575

FCC SUBPART B and C - RADIATED EMISSIONS – 3-10-00

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW

2.4 GHz / 900 MHz CORDLESS PHONE - BASE

MODEL: CP-2575

FCC SUBPART B and C - RADIATED EMISSIONS – 3-10-00

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





FRONT VIEW

2.4 GHz / 900 MHz CORDLESS PHONE - HANDSET

MODEL: CP-2575

FCC SUBPART B and C - RADIATED EMISSIONS – 3-10-00

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW

2.4 GHz / 900 MHz CORDLESS PHONE - HANDSET
MODEL: CP-2575
FCC SUBPART B and C - RADIATED EMISSIONS – 3-10-00

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





FRONT VIEW

2.4 GHz / 900 MHz CORDLESS PHONE - BASE

MODEL: CP-2575

FCC SUBPART B and C - CONDUCTED EMISSIONS – 3-10-00

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW


2.4 GHz / 900 MHz CORDLESS PHONE - BASE

MODEL: CP-2575

FCC SUBPART B and C - CONDUCTED EMISSIONS – 3-10-00

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**




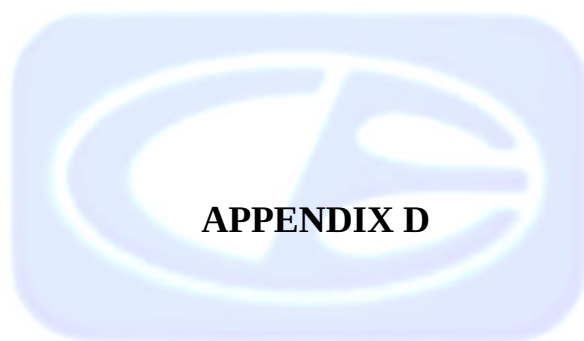

APPENDIX D

DATA SHEETS



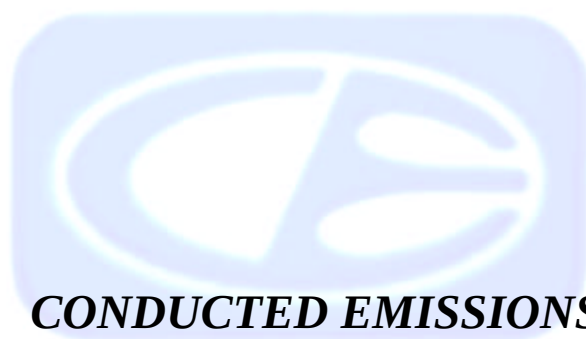

***CONDUCTED EMISSIONS
DATA SHEETS FOR THE BASE***



**COMPATIBLE
ELECTRONICS**

3/10/2000

17:25:31

CASIO COMMUNICATIONS, INC.

2.4 GHz / 900 MHz CORD. PHONE

MODEL: CP-2575

FCC B - BLACK LEAD


TEST ENGINEER : Kyle Fujimoto
KYLE FUJIMOTO-----
20 highest peaks above -50.00 dB of CLASS B limit line

Peak criteria : 0.30 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.472	39.80	48.00	-8.20
2	0.484	39.50	48.00	-8.50
3	0.492	39.50	48.00	-8.50
4	0.498	39.20	48.00	-8.80
5	0.513	39.20	48.00	-8.80
6	0.456	39.00	48.00	-9.00
7	0.476	38.50	48.00	-9.50
8	0.539	38.50	48.00	-9.50
9	0.507	38.40	48.00	-9.60
10	0.563	38.40	48.00	-9.60
11	0.530	38.30	48.00	-9.70
12	0.517	37.90	48.00	-10.10
13	0.577	37.90	48.00	-10.10
14	23.931	37.89	48.00	-10.11
15	0.546	37.70	48.00	-10.30
16	0.597	37.70	48.00	-10.30
17	0.646	37.70	48.00	-10.30
18	21.439	37.55	48.00	-10.45
19	0.572	37.40	48.00	-10.60
20	0.602	37.40	48.00	-10.60

EMISSION LEVEL [dBuV] PEAK
Graph for Peak

3/10/2000 17:25:31

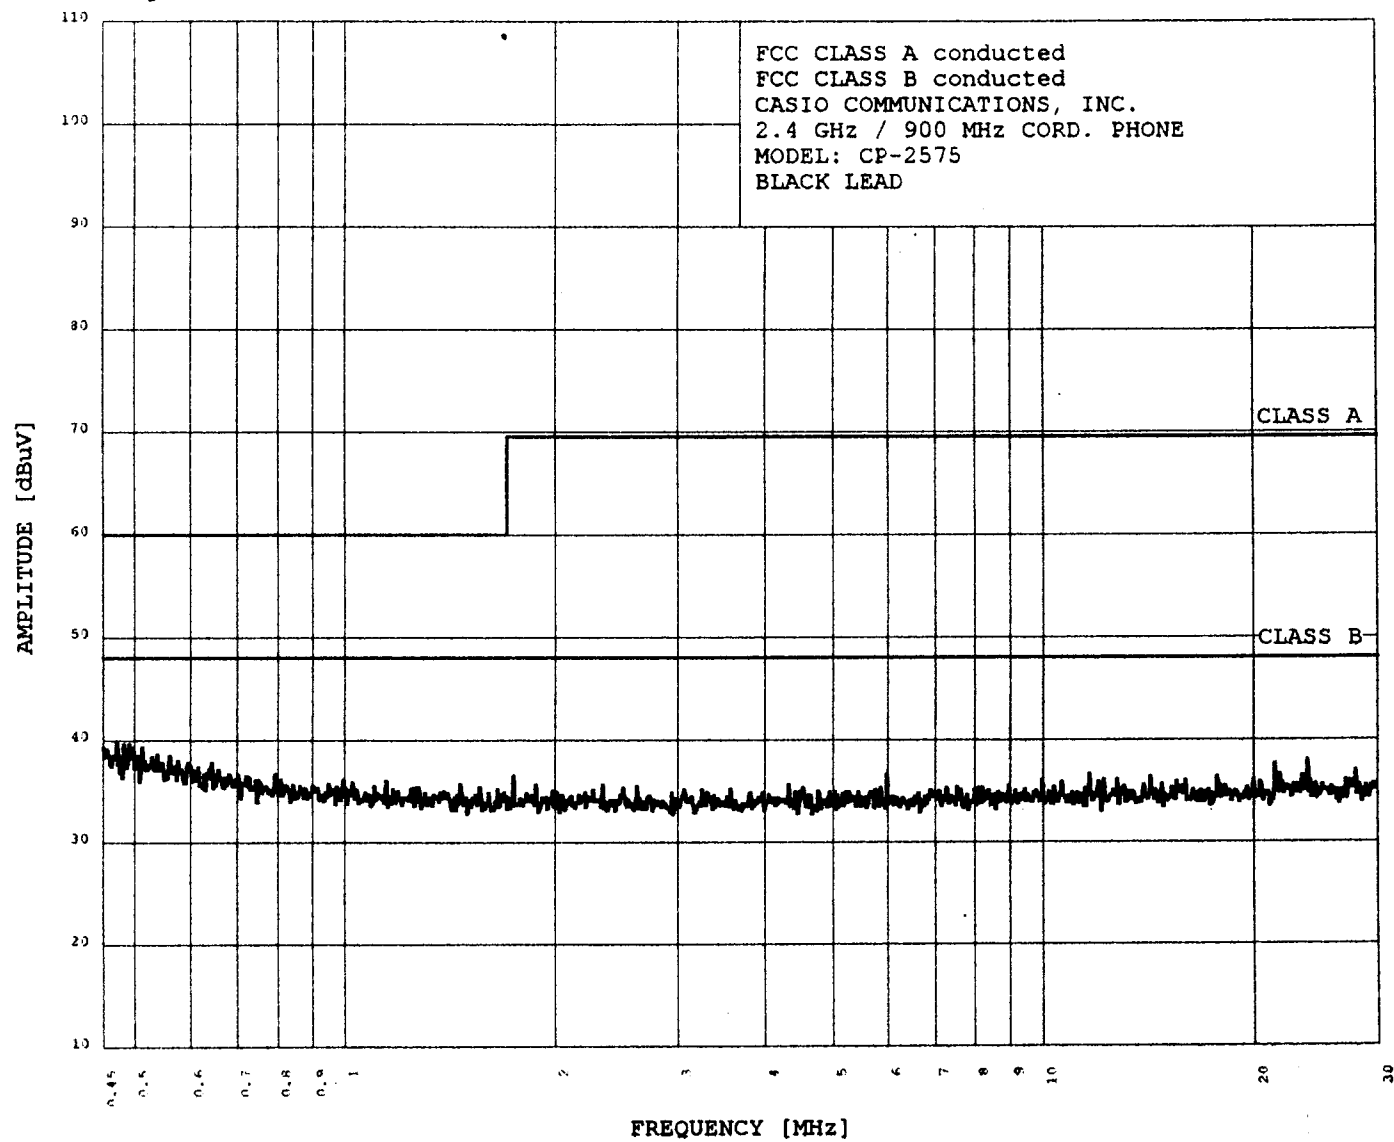

COMPATIBLE
ELECTRONICS

**COMPATIBLE
ELECTRONICS**

3/10/2000

17:36:17

CASIO COMMUNICATIONS, INC.

2.4 GHz / 900 MHz CORD. PHONE

MODEL: CP-2575

FCC B - WHITE LEAD


TEST ENGINEER : Kyle Fujimoto
KYLE FUJIMOTO-----
20 highest peaks above -50.00 dB of CLASS B limit line

Peak criteria : 0.30 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	21.439	38.47	48.00	-9.53
2	19.971	38.16	48.00	-9.84
3	15.993	37.93	48.00	-10.07
4	12.013	37.53	48.00	-10.47
5	9.905	37.48	48.00	-10.52
6	26.583	37.39	48.00	-10.61
7	22.003	37.07	48.00	-10.93
8	9.986	36.88	48.00	-11.12
9	22.942	36.73	48.00	-11.27
10	23.931	36.72	48.00	-11.28
11	26.028	36.69	48.00	-11.31
12	20.748	36.49	48.00	-11.51
13	23.318	36.42	48.00	-11.58
14	25.054	36.30	48.00	-11.70
15	20.230	36.17	48.00	-11.83
16	14.828	36.14	48.00	-11.86
17	17.467	36.14	48.00	-11.86
18	0.784	36.07	48.00	-11.93
19	28.066	36.07	48.00	-11.93
20	9.824	36.07	48.00	-11.93

EMISSION LEVEL [dBuV] PEAK
Graph for Peak

3/10/2000 17:36:17

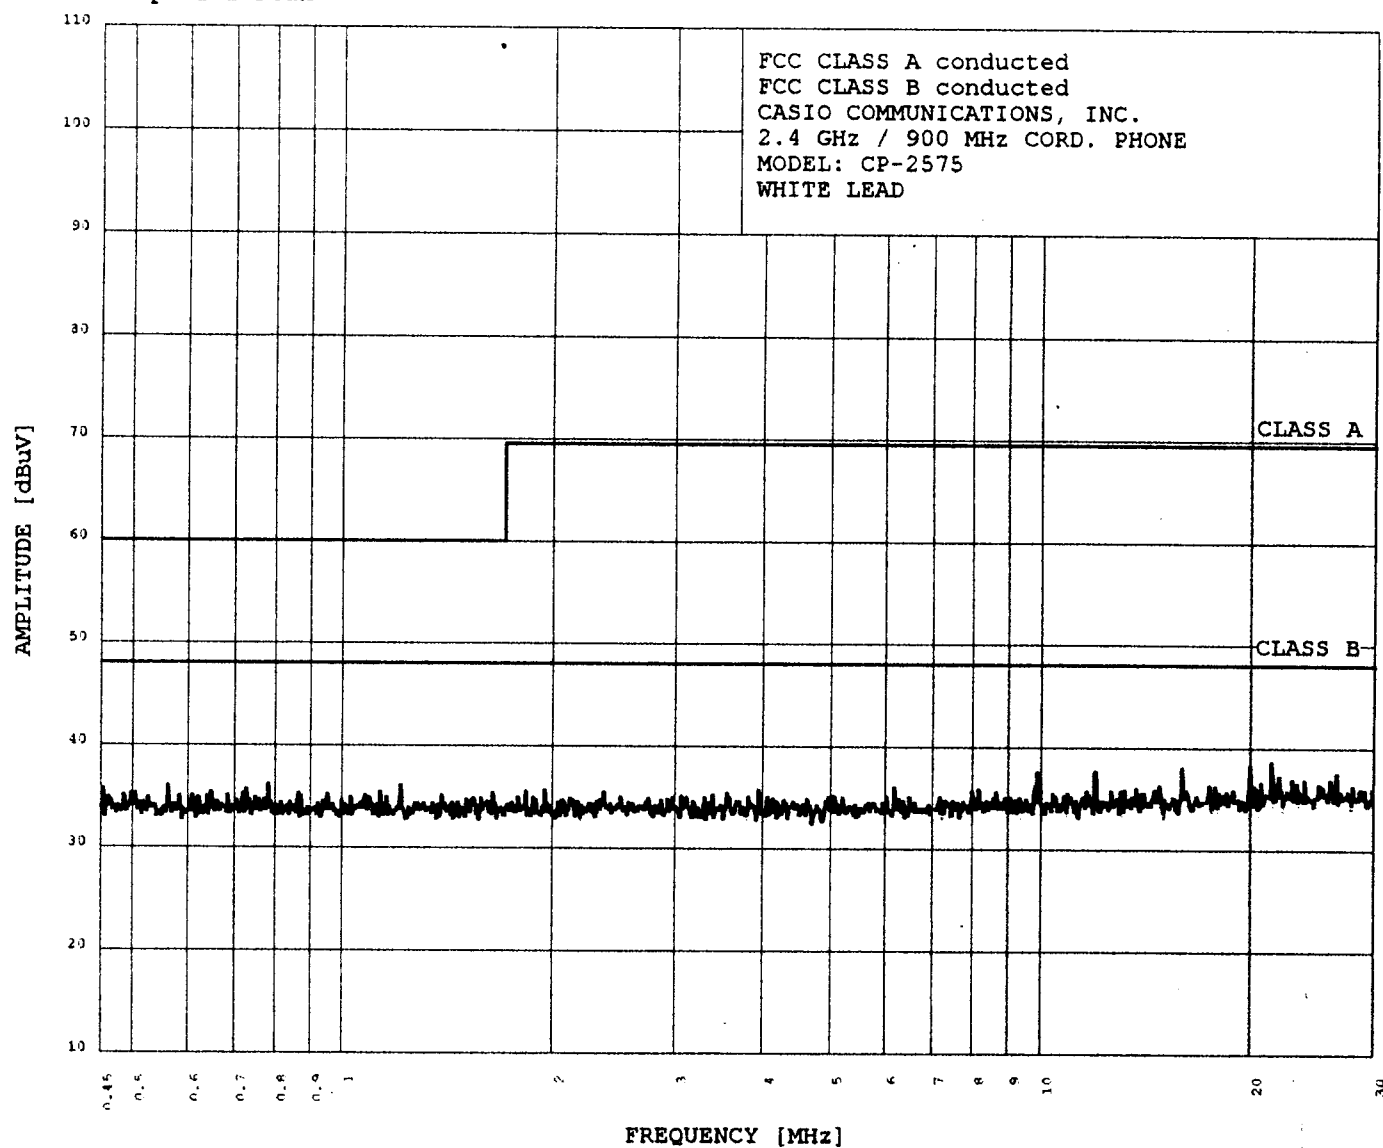



***RADIATED EMISSIONS
DATA SHEETS FOR THE BASE***



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	CASIO COMMUNICATIONS, INC.	DATE	3/10/00
EUT	2.4 GHz / 900 MHz CORDLESS PHONE - BASE UNIT	DUTY CYCLE	N/A
MODEL	CP-2575	PEAK TO AVG	N/A
S/N	N/A	TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO	LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Correcte Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
2402.1000	52.2	A	H	1.0	180	X	LOW	28.2	4.5	0.0	84.9	-9.1	94.0	
2402.1000	57.8	A	V	1.0	180	X	LOW	28.2	4.5	0.0	90.5	-3.5	94.0	
2405.0000	51.3	A	H	1.0	180	X	MID	28.2	4.5	0.0	84.0	-10.0	94.0	
2405.0000	58.3	A	V	1.0	180	X	MID	28.2	4.5	0.0	91.0	-3.0	94.0	
2406.5000	52.6	A	H	1.0	180	X	HIGH	28.2	4.5	0.0	85.3	-8.7	94.0	
2406.5000	58.4	A	V	1.0	180	X	HIGH	28.2	4.5	0.0	91.1	-2.9	94.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	CASIO COMMUNICATIONS, INC.	DATE	3/10/00
EUT	2.4 GHz / 900 MHz CORDLESS PHONE - BASE UNIT	DUTY CYCLE	N/A
MODEL	CP-2575	PEAK TO AVG	N/A
S/N	N/A	TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO	LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
4804.2000	41.5	A	H	1.0	90	X	LOW	32.3	5.7	34.3	45.2	-8.8	54.0	
4804.2000	42.6	A	V	1.0	180	X	LOW	32.3	5.7	34.3	46.3	-7.7	54.0	
4810.0000	40.4	A	H	1.0	90	X	MID	32.3	5.7	34.3	44.1	-9.9	54.0	
4810.0000	41.9	A	V	1.0	180	X	MID	32.3	5.7	34.3	45.6	-8.4	54.0	
4813.0000	39.8	A	H	1.0	180	X	HIGH	32.3	5.7	31.1	46.7	-7.3	54.0	
4813.0000	37.4	A	V	1.0	180	X	HIGH	32.3	5.7	31.1	44.3	-9.7	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	CASIO COMMUNICATIONS, INC.	DATE	3/10/00
EUT	2.4 GHz / 900 MHz CORDLESS PHONE - BASE UNIT	DUTY CYCLE	N/A
MODEL	CP-2575	PEAK TO AVG	N/A
S/N	N/A	TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO	LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
7026.3000	37.0	A	H	1.0	90	X	LOW	36.8	6.4	32.9	47.3	-6.7	54.0	
7206.3000	35.0	A	V	1.0	180	X	LOW	36.8	6.4	32.9	45.3	-8.7	54.0	
7215.0000	36.0	A	H	1.0	90	X	MID	36.8	6.4	32.9	46.3	-7.7	54.0	
7215.0000	36.7	A	V	1.0	90	X	MID	36.8	6.4	32.9	47.0	-7.0	54.0	
7219.4000	35.6	A	H	1.0	180	X	HIGH	36.8	6.4	32.9	45.9	-8.1	54.0	
7219.4000	36.7	A	V	1.0	270	X	HIGH	36.8	6.4	32.9	47.0	-7.0	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

Test location: Compatible Electronics
 Customer : CASIO COMMUNICATIONS, INC. Date : 3/10/2000
 Manufacturer : CASIO COMMUNICATIONS, INC. Time : 13.30
 EUT name : 2.4 GHz / 900 MHZ CORDLESS PHONE Model: CP-2575
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : BASE UNIT - VERTICAL POLARIZATION 30 TO 300 MHz
 TEMPERATURE 70 DEGREES F., RELATIVE HUMIDITY 50%
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1V	43.92	59.40	0.84	12.85	38.64	34.45	40.00	-5.55
2V	45.73	56.00	0.86	12.80	38.66	31.00	40.00	-9.00
3V	47.52	57.80	0.88	12.75	38.68	32.75	40.00	-7.25
4V	49.30	59.00	0.89	12.70	38.69	33.90	40.00	-6.10
5V	51.08	59.70	0.89	12.58	38.71	34.45	40.00	-5.55
6V	52.88	58.70	0.87	12.40	38.73	33.25	40.00	-6.75
7V	54.69	58.00	0.85	12.23	38.75	32.34	40.00	-7.66
8V	56.48	54.80	0.84	12.06	38.76	28.93	40.00	-11.07
9V	60.09	56.40	0.80	11.72	38.80	30.12	40.00	-9.88
10V	61.83	58.80	0.84	11.65	38.82	32.47	40.00	-7.53
11V	63.67	54.50	0.87	11.58	38.84	28.12	40.00	-11.88
12V	65.41	54.00	0.91	11.51	38.85	27.57	40.00	-12.43
13V	78.97	53.90	1.00	10.33	38.81	26.42	40.00	-13.58
14V	96.93	54.50	1.27	10.52	38.60	27.69	43.50	-15.81
15V	99.06	49.60	1.29	10.67	38.60	22.96	43.50	-20.54
16V	104.10	63.00	1.32	11.11	38.63	36.80	43.50	-6.70
17V	111.25	52.10	1.35	11.76	38.69	26.52	43.50	-16.98
18V	118.45	45.50	1.37	12.42	38.75	20.54	43.50	-22.96
19V	125.59	51.60	1.40	12.99	38.80	27.20	43.50	-16.30
20V	128.09	47.70	1.42	12.92	38.79	23.25	43.50	-20.25
21V	162.55	52.50	1.60	13.16	38.75	28.51	43.50	-14.99

Test location: Compatible Electronics
 Customer : CASIO COMMUNICATIONS, INC. Date : 3/10/2000
 Manufacturer : CASIO COMMUNICATIONS, INC. Time : 13.30
 EUT name : 2.4 GHz / 900 MHZ CORDLESS PHONE Model: CP-2575
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : BASE UNIT - HORIZONTAL POLARIZATION 30 TO 300 MHz
 TEMPERATURE 70 DEGREES F., RELATIVE HUMIDITY 50%
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1H	40.37	51.70	0.80	12.95	38.60	26.85	40.00	-13.15
2H	52.91	46.30	0.87	12.40	38.73	20.84	40.00	-19.16
3H	63.65	50.30	0.87	11.58	38.84	23.92	40.00	-16.08
4H	70.85	49.50	1.00	11.24	38.89	22.85	40.00	-17.15
5H	108.96	46.20	1.34	11.55	38.67	20.42	43.50	-23.08
6H	128.96	47.20	1.43	12.89	38.78	22.74	43.50	-20.76
7H	151.03	47.80	1.60	12.33	38.70	23.02	43.50	-20.48
8H	157.62	40.10	1.60	12.80	38.73	15.77	43.50	-27.73
9H	160.23	44.40	1.60	13.00	38.74	20.25	43.50	-23.25
10H	184.01	37.00	1.67	14.75	38.73	14.69	43.50	-28.81

Test location: Compatible Electronics
 Customer : CASIO COMMUNICATIONS, INC. Date : 3/10/2000
 Manufacturer : CASIO COMMUNICATIONS, INC. Time : 13.30
 EUT name : 2.4 GHz / 900 MHZ CORDLESS PHONE Model: CP-2575
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : BASE UNIT - VERTICAL POLARIZATION 300 TO 1000 MHz
 TEMPERATURE 70 DEGREES F., RELATIVE HUMIDITY 50%
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1V	312.07	54.40	2.37	15.48	38.60	33.65	46.00	-12.35
2V	315.06	50.10	2.39	15.49	38.60	29.38	46.00	-16.62
3V	316.06	52.70	2.40	15.50	38.60	31.99	46.00	-14.01
4V	318.05	48.90	2.41	15.51	38.60	28.22	46.00	-17.78
5V	320.06	48.90	2.42	15.52	38.60	28.24	46.00	-17.76
6V	321.06	49.50	2.43	15.52	38.60	28.85	46.00	-17.15
7V	324.02	46.60	2.44	15.54	38.60	25.98	46.00	-20.02
8V	326.09	50.40	2.46	15.55	38.60	29.81	46.00	-16.19
9V	329.05	46.80	2.47	15.57	38.60	26.24	46.00	-19.76
10V	333.05	45.20	2.50	15.59	38.60	24.69	46.00	-21.31
11V	338.07	43.90	2.53	15.62	38.60	23.44	46.00	-22.56
12V	342.04	43.90	2.55	15.64	38.60	23.49	46.00	-22.51
13V	350.07	46.90	2.60	15.68	38.60	26.58	46.00	-19.42
14V	352.04	44.20	2.60	15.60	38.60	23.81	46.00	-22.19
15V	356.05	46.50	2.61	15.45	38.60	25.96	46.00	-20.04
16V	372.08	46.70	2.64	14.83	38.60	25.58	46.00	-20.42
17V	406.08	46.10	2.71	13.98	38.54	24.26	46.00	-21.74
18V	412.05	46.60	2.72	14.20	38.48	25.05	46.00	-20.95
19V	438.03	41.40	2.78	15.16	38.22	21.12	46.00	-24.88
20V	449.92	41.50	2.80	15.60	38.10	21.80	46.00	-24.20
21V	480.11	42.70	2.98	16.37	37.98	24.07	46.00	-21.93

Test location: Compatible Electronics
 Customer : CASIO COMMUNICATIONS, INC. Date : 3/10/2000
 Manufacturer : CASIO COMMUNICATIONS, INC. Time : 13.30
 EUT name : 2.4 GHz / 900 MHZ CORDLESS PHONE Model: CP-2575
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : BASE UNIT - HORIZONTAL POLARIZATION 300 TO 1000 MHz
 TEMPERATURE 70 DEGREES F., RELATIVE HUMIDITY 50%
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1H	312.09	52.60	2.37	15.48	38.60	31.85	46.00	-14.15
2H	342.09	46.80	2.55	15.64	38.60	26.39	46.00	-19.61
3H	313.04	48.10	2.38	15.48	38.60	27.36	46.00	-18.64
4H	316.05	53.20	2.40	15.50	38.60	32.49	46.00	-13.51
5H	318.10	55.20	2.41	15.51	38.60	34.52	46.00	-11.48
6H	320.08	50.00	2.42	15.52	38.60	29.34	46.00	-16.66
7H	322.05	55.70	2.43	15.53	38.60	35.06	46.00	-10.94
8H	323.09	51.90	2.44	15.53	38.60	31.27	46.00	-14.73
9H	324.06	53.60	2.44	15.54	38.60	32.98	46.00	-13.02
10H	325.06	50.20	2.45	15.55	38.60	29.60	46.00	-16.40
11H	326.06	53.70	2.46	15.55	38.60	33.11	46.00	-12.89
12H	332.12	49.70	2.49	15.58	38.60	29.18	46.00	-16.82
13H	338.10	48.30	2.53	15.62	38.60	27.84	46.00	-18.16
14H	366.08	47.60	2.63	15.06	38.60	26.69	46.00	-19.31
15H	400.05	53.00	2.70	13.76	38.60	30.86	46.00	-15.14
16H	412.04	47.40	2.72	14.20	38.48	25.85	46.00	-20.15
17H	418.04	51.70	2.74	14.42	38.42	30.44	46.00	-15.56
18H	423.04	47.30	2.75	14.61	38.37	26.28	46.00	-19.72
19H	444.09	45.40	2.79	15.38	38.16	25.41	46.00	-20.59
20H	451.25	48.30	2.81	15.63	38.09	28.64	46.00	-17.36
21H	465.13	46.30	2.89	15.99	38.04	27.14	46.00	-18.86

Test location: Compatible Electronics
Customer : CASIO COMMUNICATIONS, INC. Date : 3/10/2000
Manufacturer : CASIO COMMUNICATIONS, INC. Time : 13.30
EUT name : 2.4 GHz / 900 MHZ CORDLESS PHONE Model: CP-2575
Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
Test Mode : BASE UNIT - HORIZONTAL POLARIZATION 300 TO 1000 MHz
TEMPERATURE 70 DEGREES F., RELATIVE HUMIDITY 50%
TESTED BY: Kyle Fujimoto
KYLE FUJIMOTO

NO EMISSIONS FOUND BETWEEN 10 kHz AND 30 MHz
FOR THE BASE UNIT IN EITHER POLARIZATION



***RADIATED EMISSIONS
DATA SHEETS FOR THE HANDSET***



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)



COMPATIBLE
ELECTRONICS

COMPANY	CASIO COMMUNICATIONS, INC.	DATE	3/10/00
EUT	2.4 GHz / 900 MHz CORDLESS PHONE - HANDSET UNIT	DUTY CYCLE	N/A
MODEL	CP-2575	PEAK TO AVG	N/A
S/N	N/A	TEST DIST.	3 METERS
TEST ENGINEER	Kyle Fujimoto	LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
915.0700	51.7	A	H	1.0	180	Y	LOW	24.5	4.6	0.0	80.7	-13.3	94.0	
915.0700	55.3	A	V	1.0	90	Y	LOW	24.5	4.6	0.0	84.3	-9.7	94.0	
916.4600	51.5	A	H	1.0	180		MID	24.5	4.6	0.0	80.6	-13.4	94.0	
916.4600	55.3	A	V	1.0	180	Y	MID	24.5	4.6	0.0	84.4	-9.6	94.0	
917.9500	52.5	A	H	1.0	180	Y	HI	24.6	4.6	0.0	81.7	-12.3	94.0	
917.9500	55.6	A	V	2.5	180	Y	HI	24.6	4.6	0.0	84.8	-9.2	94.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	CASIO COMMUNICATIONS, INC.	DATE	3/10/00
EUT	2.4 GHz / 900 MHz CORDLESS PHONE - HANDSET UNIT	DUTY CYCLE	N/A
MODEL	CP-2575	PEAK TO AVG	N/A
S/N	N/A	TEST DIST.	3 METERS
TEST ENGINEER	Kyle Fujimoto	LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
1830.1400	39.6	A	H	1.0	180	Y	LOW	24.5	3.7	31.9	35.9	-18.1	54.0	
1830.1400	40.4	A	V	1.0	180	Y	LOW	24.5	3.7	31.9	36.7	-17.3	54.0	
1832.9200	39.4	A	H	1.5	180	Y	MID	24.5	3.7	31.9	35.7	-18.3	54.0	
1832.9200	40.7	A	V	1.5	0	Y	MID	24.5	3.7	31.9	37.0	-17.0	54.0	
1835.9000	39.1	A	H	1.0	180	Y	HI	24.5	3.7	31.9	35.4	-18.6	54.0	
1835.9000	39.6	A	V	1.0	90	Y	HI	24.5	3.7	31.9	35.9	-18.1	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	CASIO COMMUNICATIONS, INC.	DATE	3/10/00
EUT	2.4 GHz / 900 MHz CORDLESS PHONE - HANDSET UNIT	DUTY CYCLE	N/A
MODEL	CP-2575	PEAK TO AVG	N/A
S/N	N/A	TEST DIST.	3 METERS
TEST ENGINEER	Kyle Fujimoto	LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
2745.2100	39.7	A	H	1.5	90	Y	LOW	29.7	4.6	31.7	42.3	-11.7	54.0	
2745.2100	39.6	A	V	1.0	90	Y	LOW	29.7	4.6	31.7	42.2	-11.8	54.0	
2749.3800	43.6	A	H	1.0	90	Y	MID	29.7	4.6	31.7	46.2	-7.8	54.0	
2749.3800	43.0	A	V	1.5	0	Y	MID	29.7	4.6	31.7	45.6	-8.4	54.0	
2753.8500	40.9	A	H	1.0	180	Y	HI	29.7	4.6	31.7	43.5	-10.5	54.0	
2753.8500	41.8	A	V	1.0	0	Y	HI	29.7	4.6	31.7	44.4	-9.6	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	CASIO COMMUNICATIONS, INC.	DATE	3/10/00
EUT	2.4 GHz / 900 MHz CORDLESS PHONE - HANDSET UNIT	DUTY CYCLE	N/A
MODEL	CP-2575	PEAK TO AVG	N/A
S/N	N/A	TEST DIST.	3 METERS
TEST ENGINEER	Kyle Fujimoto	LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
3660.2800	39.3	A	H	1.0	90	Y	LOW	29.6	5.0	31.9	42.0	-12.0	54.0	
3660.2800	40.7	A	V	1.0	90	Y	LOW	29.6	5.0	31.9	43.4	-10.6	54.0	
3665.8400	41.1	A	H	1.0	180	Y	MID	29.6	5.0	31.9	43.8	-10.2	54.0	
3665.8400	38.6	A	V	1.5	0	Y	MID	29.6	5.0	31.9	41.3	-12.7	54.0	
3671.8000	38.9	A	H	1.0	180	Y	HI	29.6	5.0	31.9	41.6	-12.4	54.0	
3671.8000	40.6	A	V	1.0	90	Y	HI	29.6	5.0	31.9	43.3	-10.7	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	CASIO COMMUNICATIONS, INC.	DATE	3/10/00
EUT	2.4 GHz / 900 MHz CORDLESS PHONE - HANDSET UNIT	DUTY CYCLE	N/A
MODEL	CP-2575	PEAK TO AVG	N/A
S/N	N/A	TEST DIST.	3 METERS
TEST ENGINEER	Kyle Fujimoto	LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
4575.3500	43.6	A	H	1.0	90	Y	LOW	30.9	5.6	31.4	48.7	-5.3	54.0	
4575.3500	42.4	A	V	1.0	90	Y	LOW	30.9	5.6	31.4	47.5	-6.5	54.0	
4582.3000	42.6	A	H	1.0	180	Y	MID	30.9	5.6	31.4	47.7	-6.3	54.0	
4582.3000	39.4	A	V	1.0	90	Y	MID	30.9	5.6	31.4	44.5	-9.5	54.0	
4589.7500	39.1	A	H	1.0	90	Y	HI	30.9	5.6	31.4	44.2	-9.8	54.0	
4589.7500	40.9	A	V	1.0	90	Y	HI	30.9	5.6	31.4	46.0	-8.0	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

Test location: Compatible Electronics
 Customer : CASIO COMMUNICATIONS, INC. Date : 3/10/2000
 Manufacturer : CASIO COMMUNICATIONS, INC. Time : 15.35
 EUT name : 2.4 GHz / 900 MHZ CORDLESS PHONE Model: CP-2575
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : VERTICAL POLARIZATION 300 TO 1000 MHZ - *HANDSET UNIT*
 TEMPERATURE 75 DEGREES F., RELATIVE HUMIDITY 39%
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1V	30.06	52.90	0.70	14.85	38.30	30.15	40.00	-9.85
2V	44.54	52.40	0.84	12.84	38.64	27.44	40.00	-12.56
3V	315.12	49.60	2.39	15.49	38.60	28.88	46.00	-17.12
4V	334.23	50.50	2.51	15.59	38.60	30.00	46.00	-16.00
5V	360.14	48.20	2.62	15.29	38.60	27.51	46.00	-18.49
6V	406.49	44.60	2.71	14.00	38.54	22.77	46.00	-23.23
7V	501.25	47.30	3.11	16.89	37.93	29.37	46.00	-16.63
8V	534.66	56.80	3.45	17.03	38.80	38.48	46.00	-7.52

Test location: Compatible Electronics
 Customer : CASIO COMMUNICATIONS, INC. Date : 3/10/2000
 Manufacturer : CASIO COMMUNICATIONS, INC. Time : 15.35
 EUT name : 2.4 GHz / 900 MHZ CORDLESS PHONE Model: CP-2575
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : HANDSET - HORIZONTAL POLARIZATION 30 TO 1000 MHz
 TEMPERATURE 70 DEGREES F., RELATIVE HUMIDITY 50%
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1H	30.04	46.60	0.70	14.85	38.30	23.85	40.00	-16.15
2H	44.39	42.20	0.84	12.84	38.64	17.24	40.00	-22.76
3H	315.04	44.10	2.39	15.49	38.60	23.38	46.00	-22.62
4H	334.21	47.20	2.51	15.59	38.60	26.70	46.00	-19.30
5H	360.12	45.10	2.62	15.29	38.60	24.41	46.00	-21.59
6H	406.47	46.50	2.71	14.00	38.54	24.68	46.00	-21.32
7H	501.26	45.40	3.11	16.89	37.93	27.47	46.00	-18.53
8H	534.60	55.80	3.45	17.03	38.80	37.47	46.00	-8.53

Test location: Compatible Electronics
Customer : CASIO COMMUNICATIONS, INC. Date : 3/10/2000
Manufacturer : CASIO COMMUNICATIONS, INC. Time : 16.27
EUT name : 2.4 GHz / 900 MHZ CORDLESS PHONE Model: CP-2575
Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
Test Mode : VERTICAL POLARIZATION 300 TO 1000 MHZ - *HANDSET UNIT*
TEMPERATURE 75 DEGREES F., RELATIVE HUMIDITY 39%
TESTED BY: *Kyle Fujimoto*
KYLE FUJIMOTO

NO EMISSIONS FOUND BETWEEN 10 kHz AND 30 MHz
FOR THE HANDSET IN EITHER POLARIZATION



RF BAND EDGES
FOR THE BASE AND HANDSET




BAND EDGE OF LOW CH. ~~8~~ASE - 1 MHz RBW
REF 97.0 dB μ V ATTN 0 dB

MKR 2.401 94 GHz
89.60 dB μ V

hp
10 dB/

DL
89.6
dB μ V

CORR'D

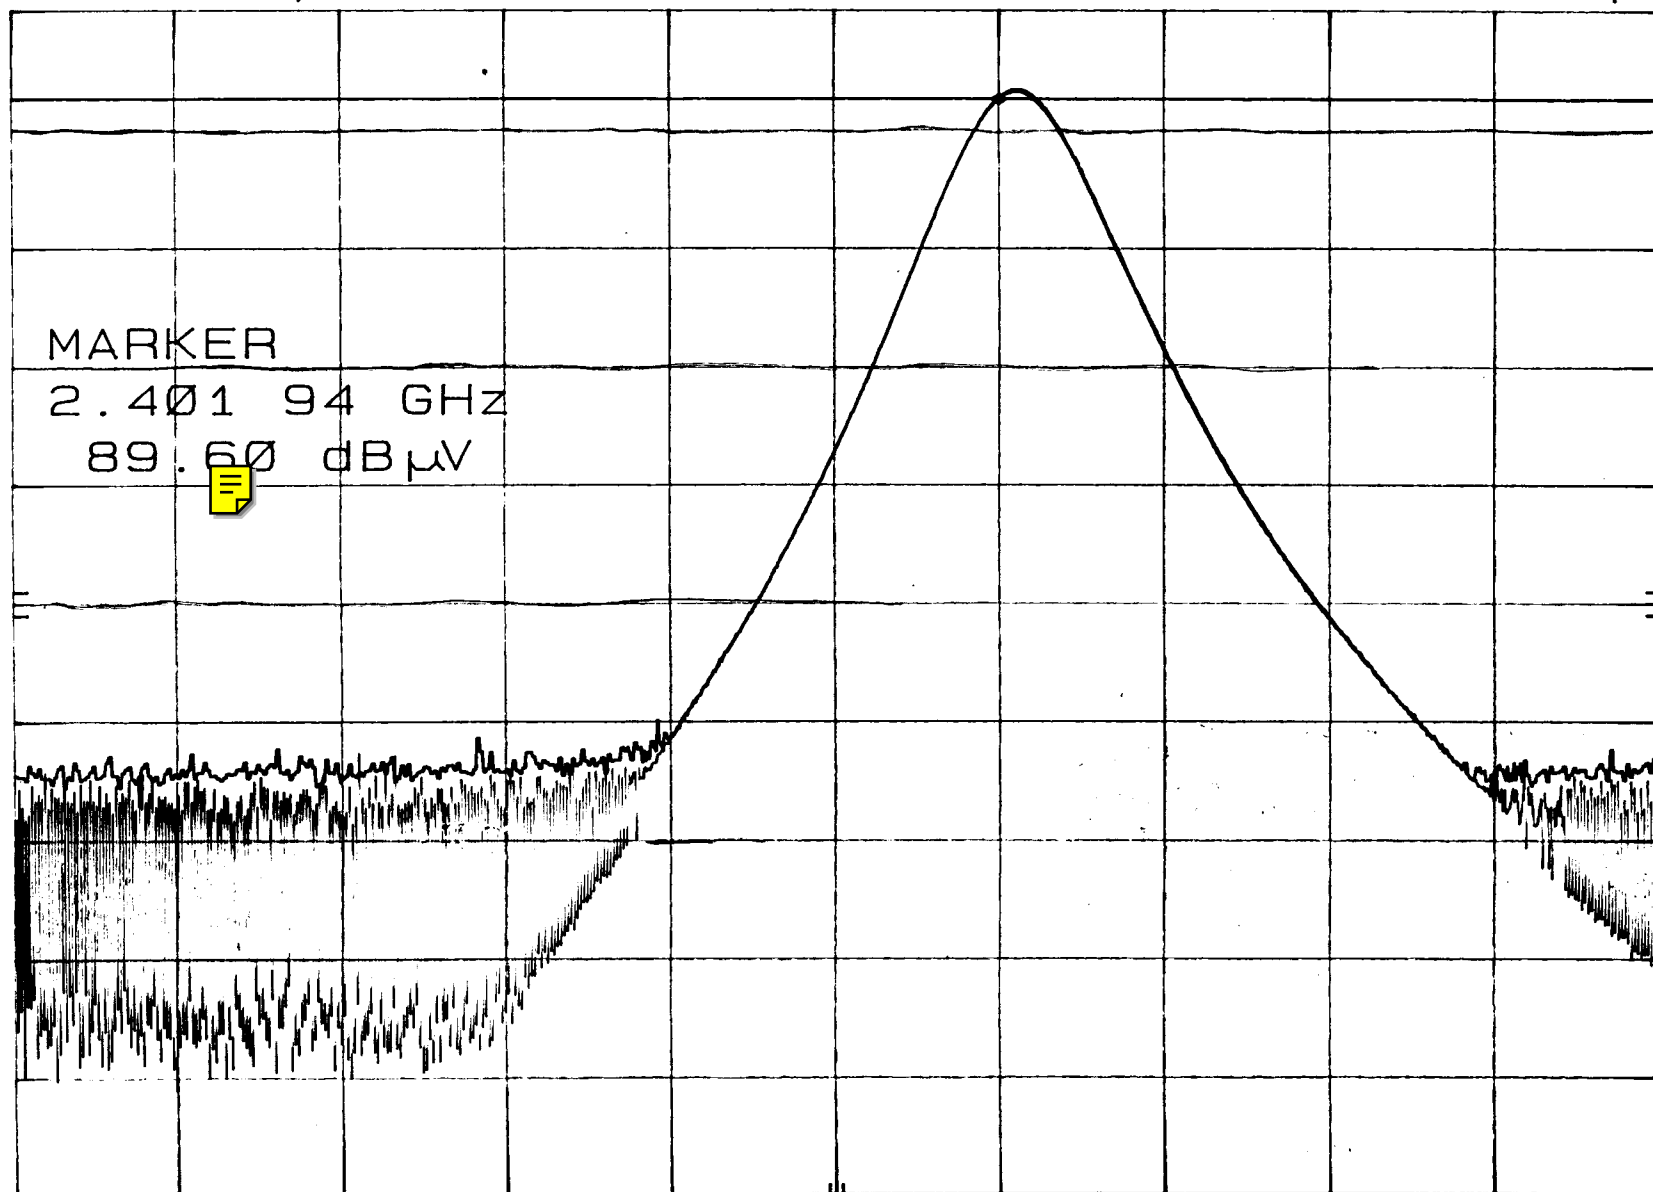


CENTER 2.399 9 GHz
RES BW 1 MHz

VBW 1 MHz

SPAN 20.0 MHz
SWP 20.0 msec

BAND EDGE OF LOW CHANNEL BASE - 30 KHz RBW MKR 2.400 02 GHz
REF 97.0 dB μ V ATTN 0 dB 17.70 dB μ V

hp
10 dB/

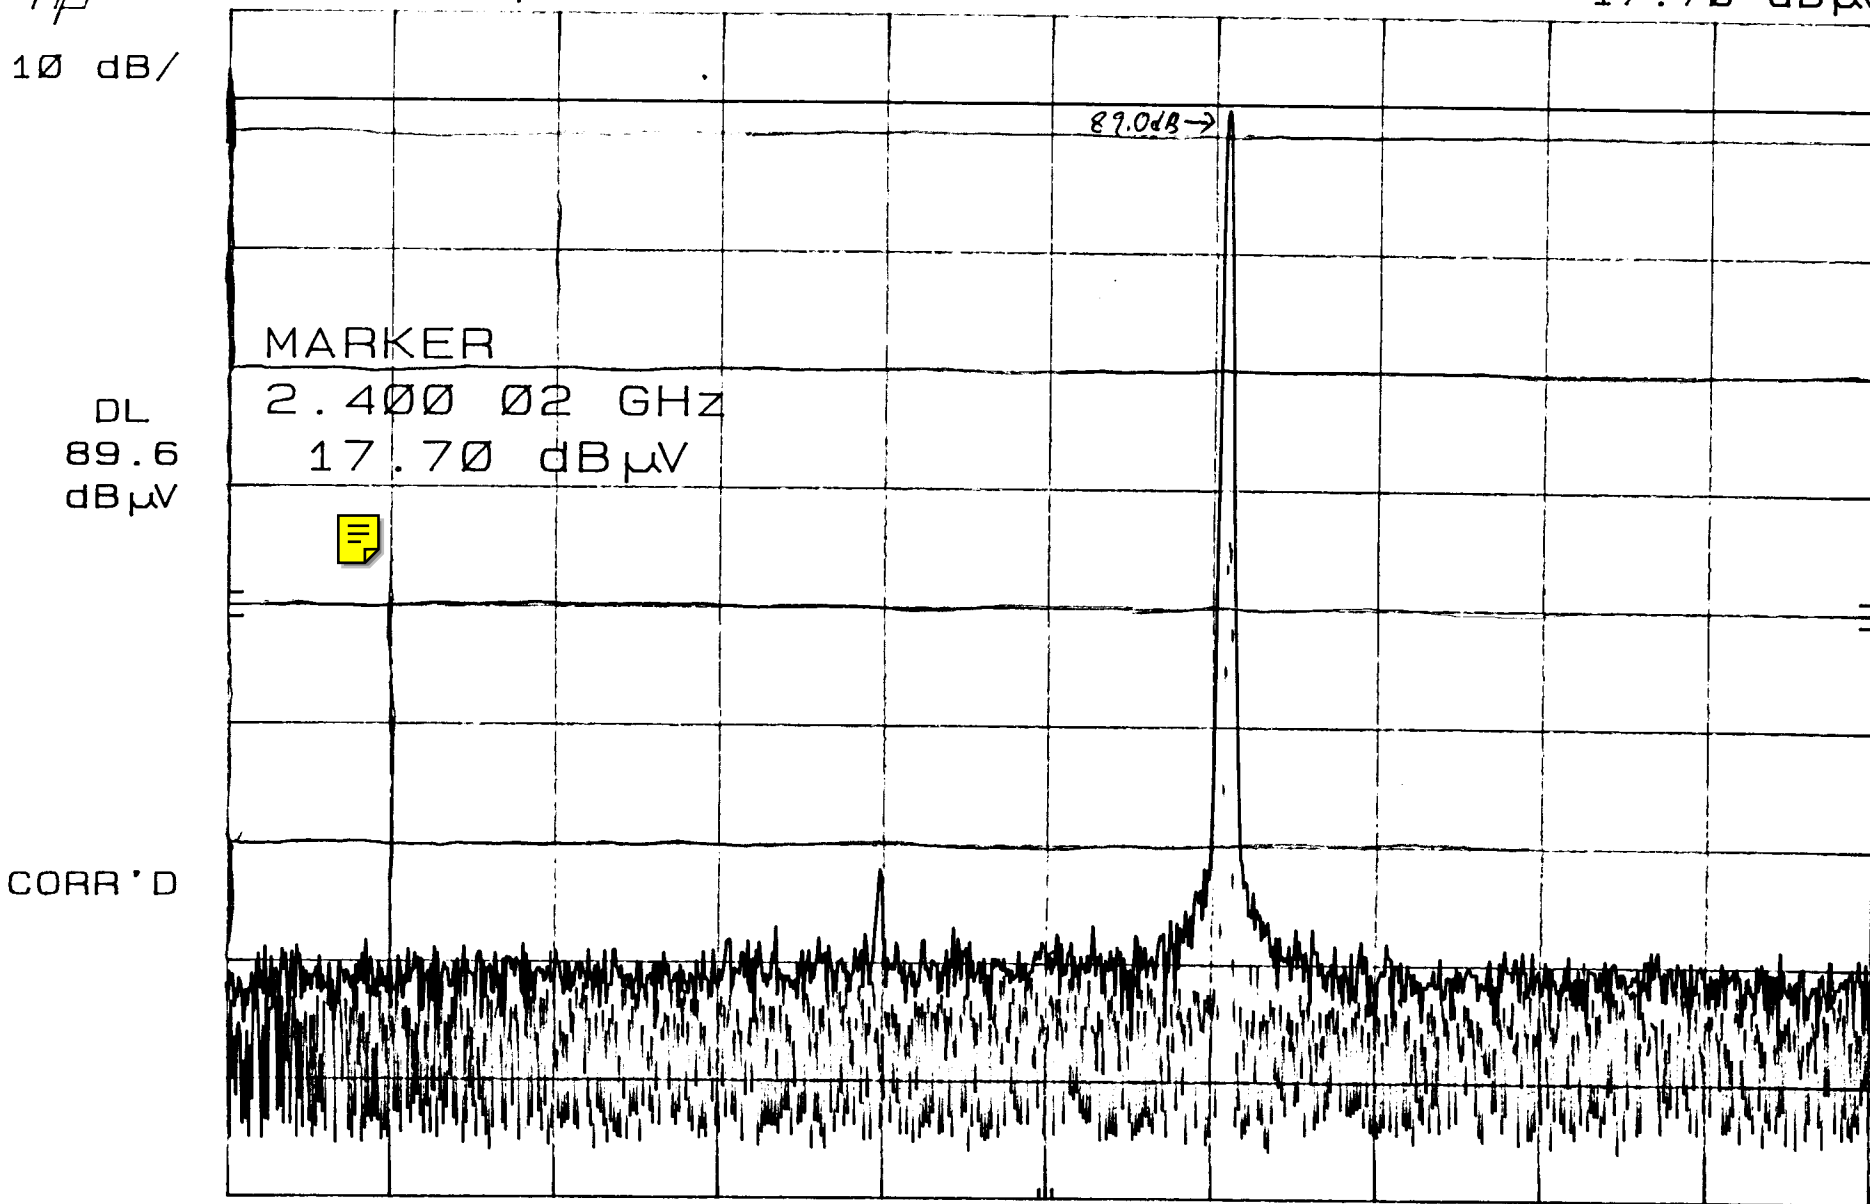

CENTER 2.399 9 GHz
RES BW 30 KHz

VBW 30 KHz

SPAN 20.0 MHz
SWP 60.0 msec

BAND EDGE OF HIGH CHANNEL - BASE
REF 97.0 dB μ V ATTN 0 dB

MKR 2.483 8 GHz
31.30 dB μ V

hp
10 dB/

DL
85.9
dB μ V


MARKER
2.483 8 GHz
31.30 dB μ V

CORR'D

CENTER 2.433 GHz
RES BW 1 MHz

VBW 1 MHz

SPAN 198 MHz
SWP 20.0 msec

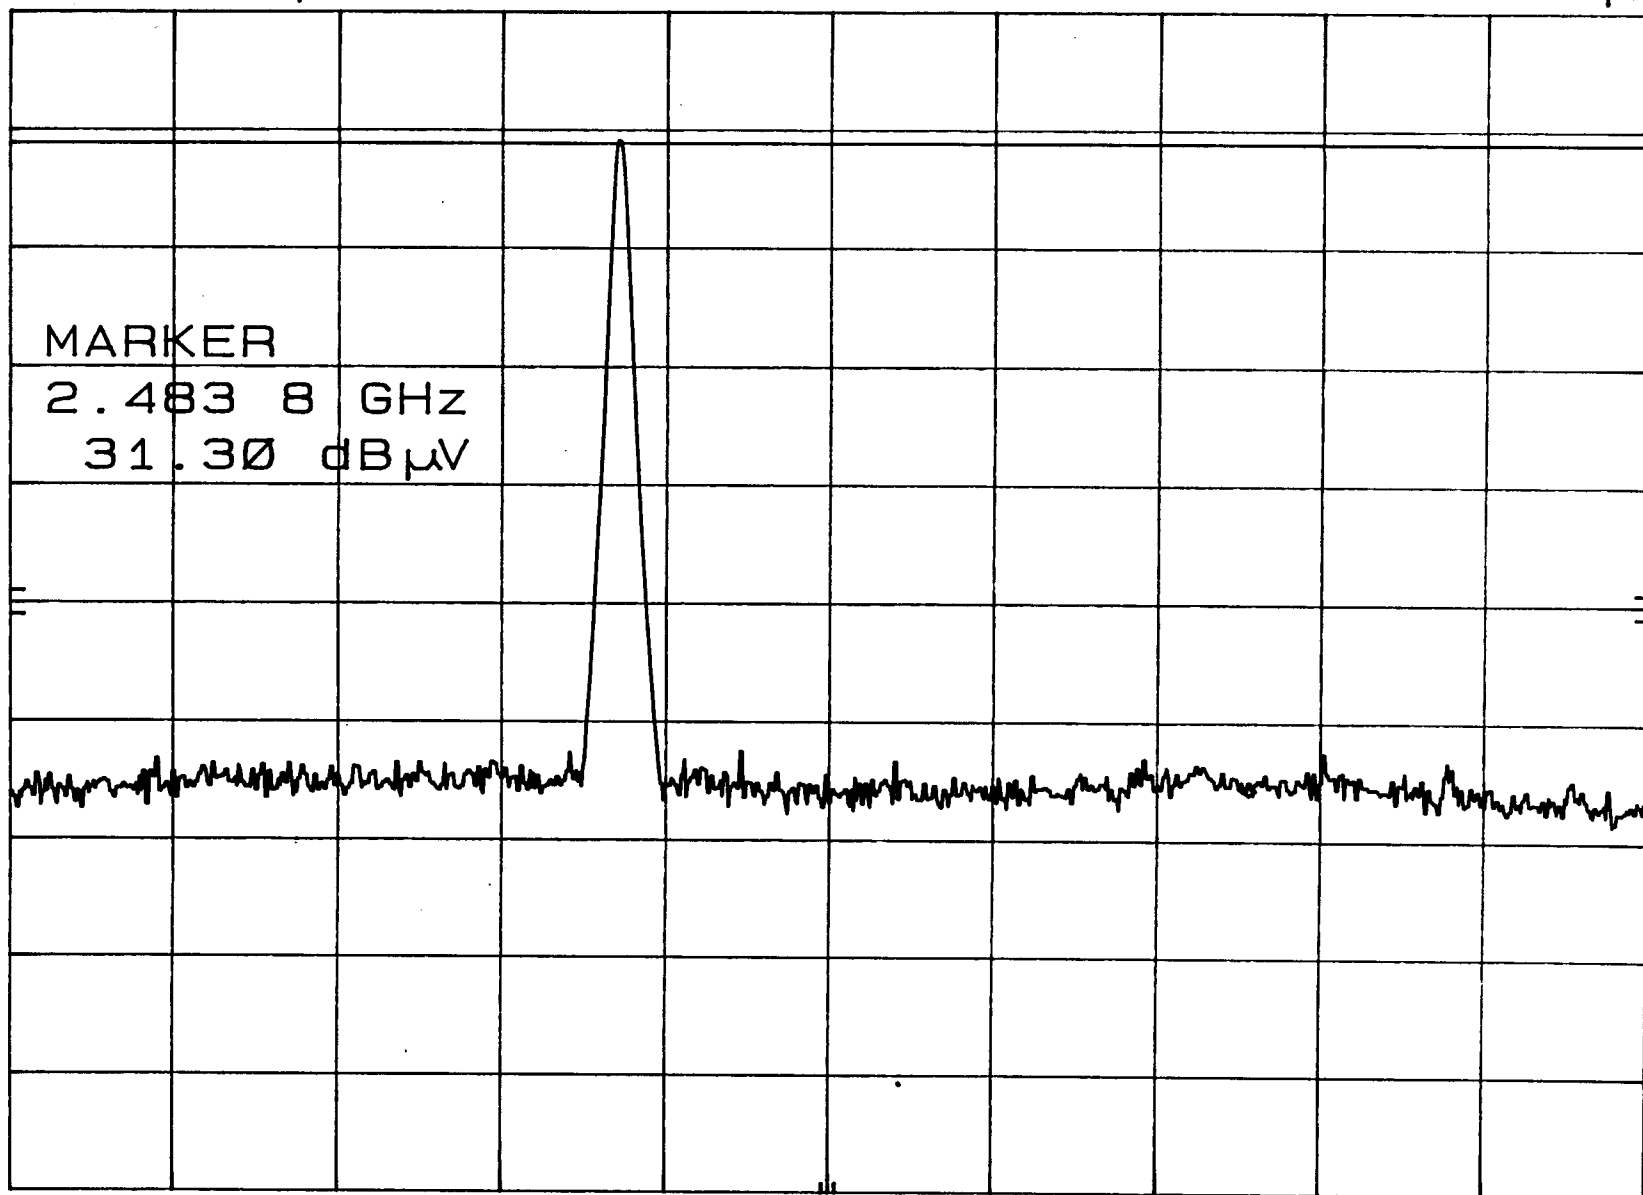

BAND EDGE OF LOWER CHANNEL - HANDSET
REF 100.0 dB μ V ATTEN 10 dB

MKR 902.00 MHz
34.90 dB μ V

hp
10 dB/

DL
92.8
dB μ V


MARKER
902.00 MHz
34.90 dB μ V

CORR'D

CENTER 902.0 MHz
RES BW 1 MHz

VBW 1 MHz

SPAN 30.0 MHz
SWP 20.0 msec

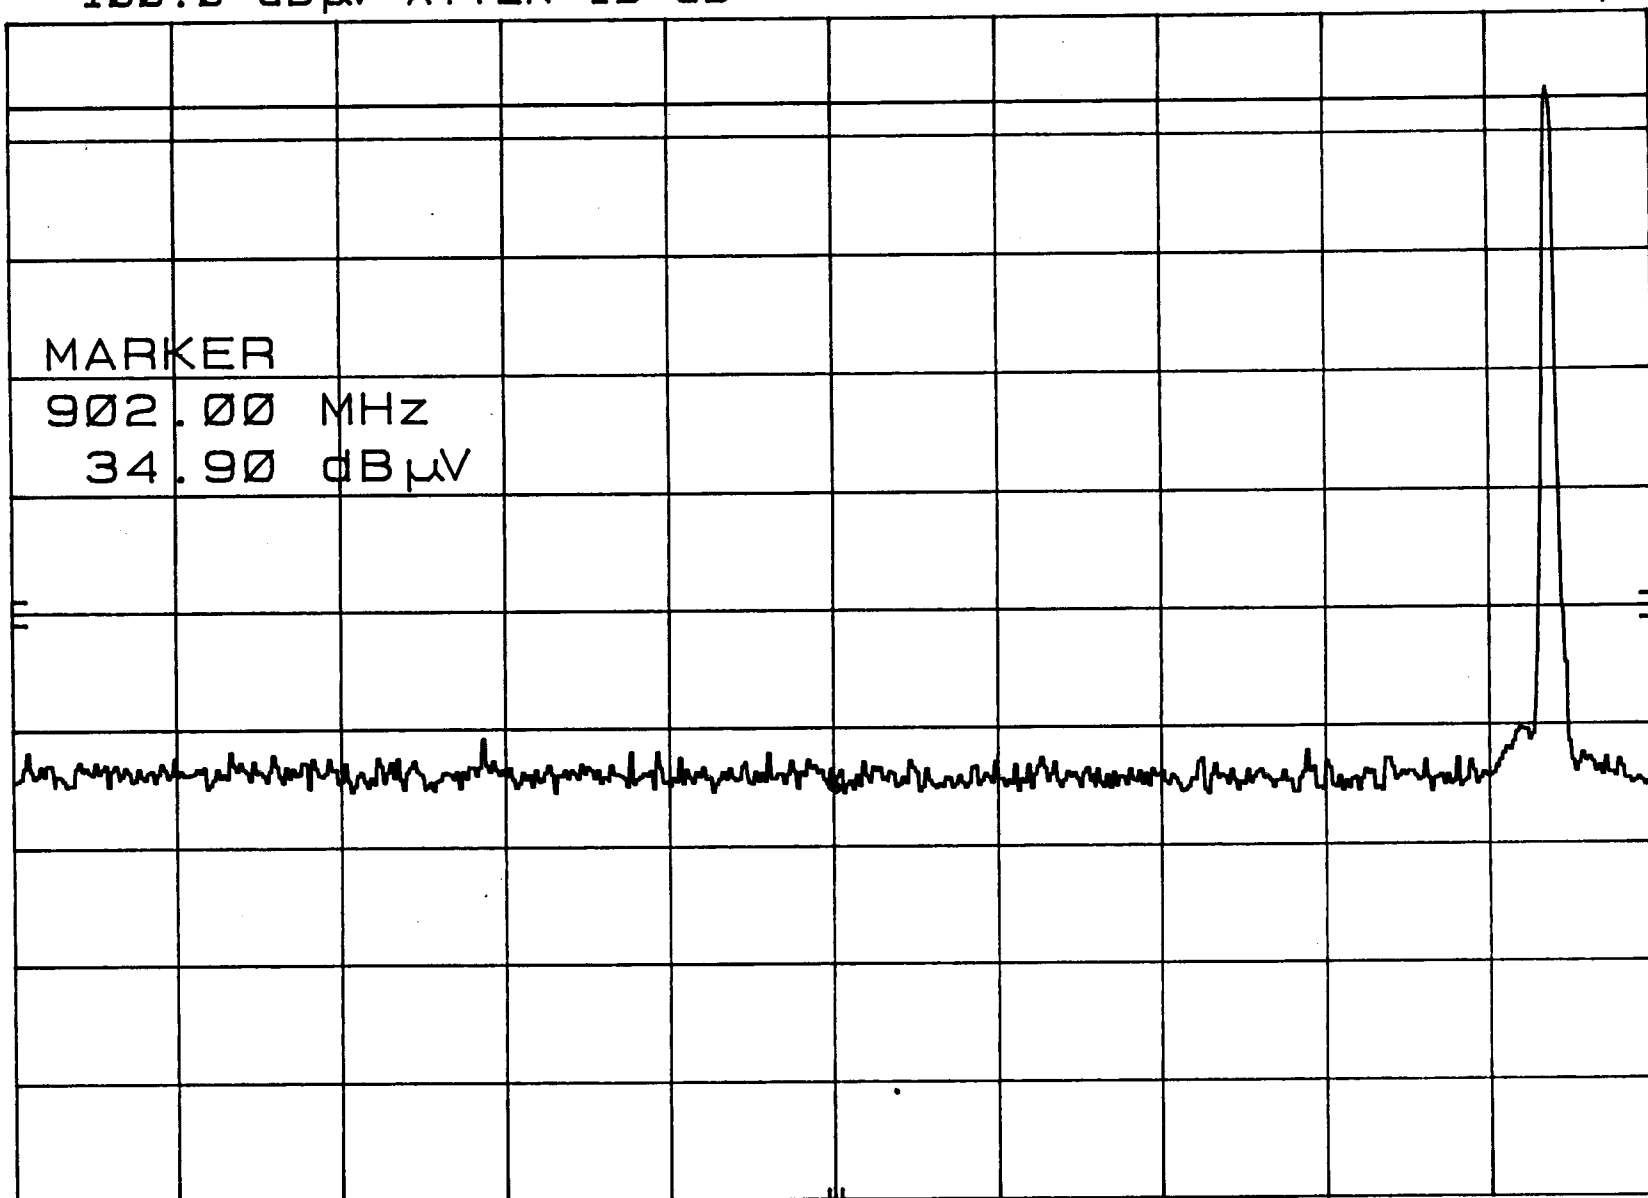

BAND EDGE OF HIGH CHANNEL - HANDSET
REF 100.0 dB μ V ATTEN 10 dB

MKR 928.01 MHz
35.00 dB μ V

hp
10 dB/

DL
92.8
dB μ V
MARKER
928.01 MHz
35.00 dB μ V

CORR'D

START 908.9 MHz
RES BW 1 MHz

VBW 1 MHz

STOP 938.9 MHz
SWP 20.0 msec

