

APPENDIX 9
PLL DATA SHEETS

FOURTEEN (14) PAGES LC7185 DATA SHEETS FOLLOW THIS SHEET

COPY OF PLL DATA SHEETS
FCC ID: AAO2101574

APPENDIX 9



LC7185-8xxx

CMOS LSI

CB TRANSCEIVER PLL FREQUENCY SYNTHESIZER
AND CONTROLLER

Overview


This 27MHz band, PLL frequency synthesizer LSI chip is designed specifically for CB transceivers. The internal ROM can be changed to suit the frequency specifications of various countries (hence the 8xxx designation). The LC7185-8xxx incorporates PLL circuitry and a controller for CB applications on a single CMOS chip. The controller handles the PLL circuitry, frequency data ROM, channel preset/recall RAM, and LED display drivers. It also supports channel scan, channel preset/recall, and emergency channel call.

Features

- A built-in programmable divider for the 16MHz VCO.
- Transmission is inhibited when the PLL is unlocked (digital lock monitor).
- Direct channel 9 or 19 selection (sliding switch)
- A 7-segment, 2-character LED display
- "PA" is displayed in public announcement mode.
- Output beep-tone control circuitry
- Up to 5 channel settings can be stored in memory.
- 4 x 3 key matrix implementation
- DIP30S (shrink) package

The application circuit diagrams and circuit constants herein are included as an example and provide no guarantee for designing equipment to be mass-produced.


The information herein is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use.

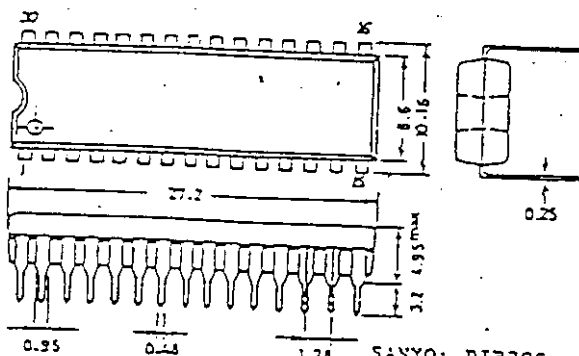Case Outline 3061-D30SNC
(unit:mm)

SANYO: DIP30S


Specifications and information herein are subject to change without notice.

Pin Assignment: DIP30S (shrink) package

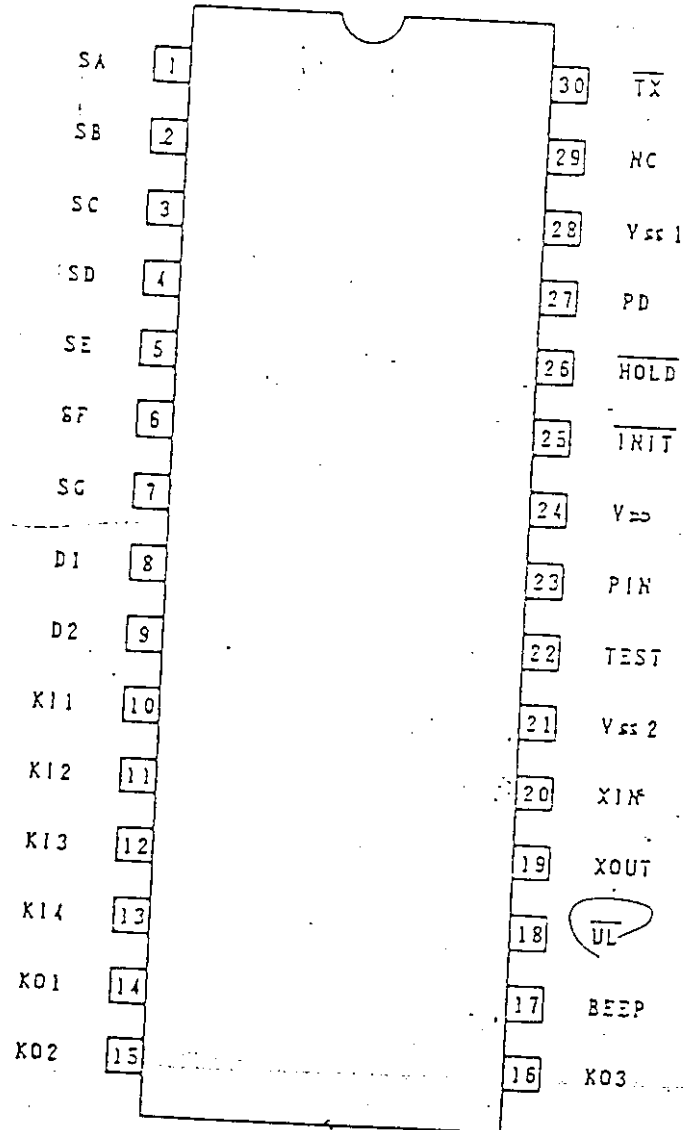


top view

Key Matrix

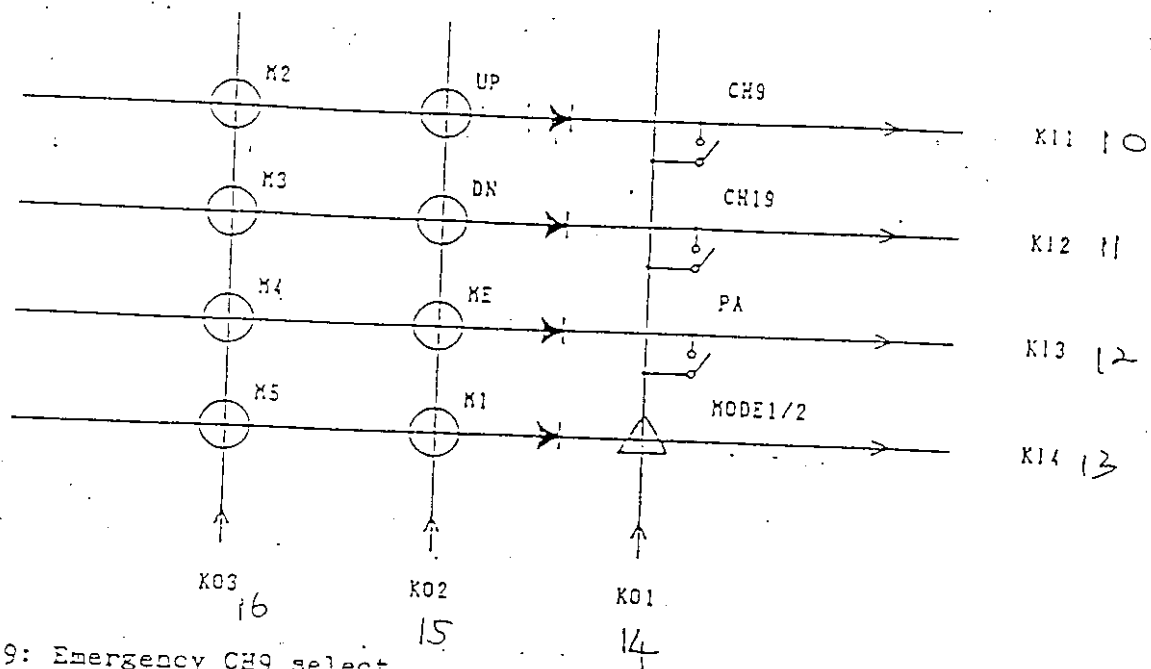


CH9: Emergency CH9 select
 CH19: Emergency CH19 select
 PA: Public announcement display
 MODE 1/2: Display mode
 UP: Channel up/scan
 DN: Channel down/scan
 ME: Channel memory enable
 M1 to M5: Channel memory recall
 UP/DN/ME/M1 to M5: Momentary switch
 CH9/CH19/PA: Sliding switch
 MODE 1/2: Diode

LED Display Configuration (Common anode/7 segment)









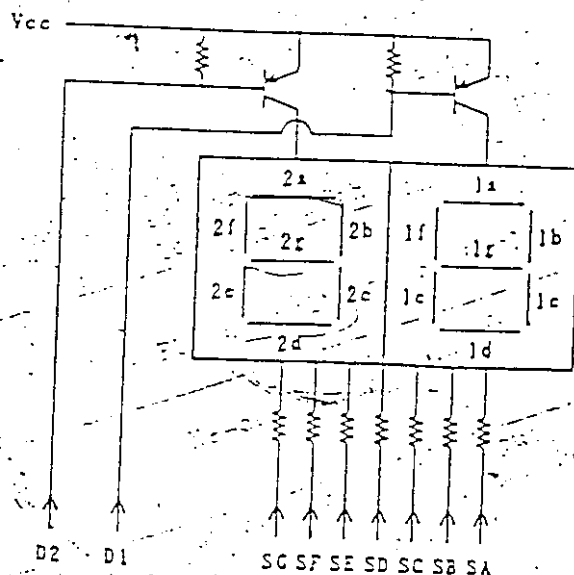


ANODE-



	SG	SF	SE	SD	SC	SB	SA
D1	1g	1f	1e	1d	1c	1b	1a
D2	2g	2f	2e	2d	2c	2b	2a

Pin Description

Pin Name	Pin No.	Type	Description
$\overline{TX}$	30		Transmit/receive select $\overline{TX}="0"$... Transmit, $\overline{TX}="1"$... Receive
$\overline{HOLD}$	26		Hold mode select $\overline{HOLD}="0"$... Hold mode select $= "1"$... Normal mode select
$\overline{INIT}$	25		Reset line $\overline{INIT}="0"$... Reset
TEST	22		Test point (input) Tie to ground or leave floating
V_{DD}	24		Power supply (+) Normal mode: 5.0 to 8.0V Hold mode: $\geq 3.0V$
V_{SS2}	21		Channel display LED driver Ground
PIN	23		Programmable divider input 150mVrms min Hold mode: Programmable divider is disabled.
XIN XOUT	20 19		Crystal oscillator Frequency: 10.24MHz Hold mode: Oscillator is disabled.
PD	27		Charge pump output from the phase comparator f_V is obtained by dividing the PIN frequency input by N (programmable divider value) f_R is the reference signal (reference divider output) $f_V > f_R$ or leading: Positive pulses $f_V < f_R$ or lagging: Negative pulses $f_V = f_R$ and phase matched: High impedance Hold mode: High impedance
V_{SS1}	28		PLL circuit and controller Ground
NC	29		No-connection
$\overline{UL}$	18		Unlock detected output Low level: See Unlock Detected Output ($\overline{UL}$) for detail. Open: Locked

Continued on next page.

Continued from preceding page.

Pin Name	Pin No.	Type	Description
BEEP	17		Beep-tone control output Open: See Beep-tone Control Output for detail. Low level: Hold mode
SA to SG	1 to 7		Segment drivers for the display (Common anode/7 segments)
D1 D2	8 9		Digit output (150Hz) for the display (Common anode/7 segments) Hold mode: Tr goes off.
II1 to II4	10 to 13		Key inputs Input from the key matrix
EO1 to EO3	14 to 16		Key scan output (75Hz) Output to the key matrix Hold mode: Low (scanning stops)

Operation

(1) Channel selection (up/down)


The unlock detected line (UL) is asserted (low) when the UP (or DN) key is pressed and deactivated 25ms after the key is released (see diagram below). The beep-tone control line (BEEP) is asserted (open) for 50msec after each new channel is selected (see diagram below).

1) Manual scanning (up/down)

Pressing the UP key increments by one channel and pressing the DN key decrements by one channel. When scanning reaches the end of the band, it automatically wraps around to the beginning.

2) Auto scanning (up/down)

Holding the UP (or DN) key down for 500msec or longer starts auto scanning. For both up and down scanning, each channel takes 100msec to scan.

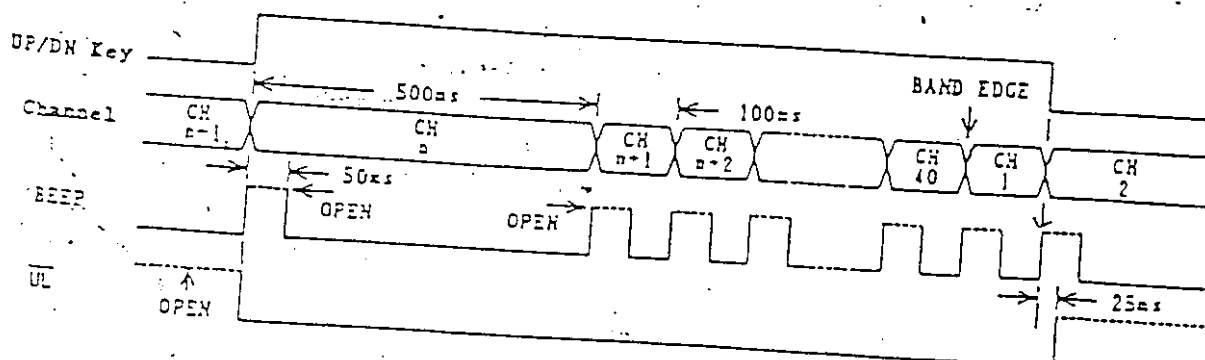

(2) Selecting an emergency channel (CH9/CH19)


If the CH9 or CH19 switch is turned on, the LC7185 does the following:

- Stores the value of the previous channel
- Asserts the beep-tone control line for 50msec
- Disables the UP/DN, M1 to M5, and ME switches
- Causes either "9" or "19" to blink on the display
- Keep the emergency channel open until the CH9 or CH19 switch is turned off.

After the CH9 or CH19 switch is turned back off the beep-tone control line is asserted for 50msec and the LC7185 reopens the previous channel.

Note the CH9 has a higher priority over CH19. As a result, if both switches are turned on, CH9 will be opened.

As shown in the diagram, the UL line is asserted for 25ms after the CH9 or CH19 switch is turned off or on.

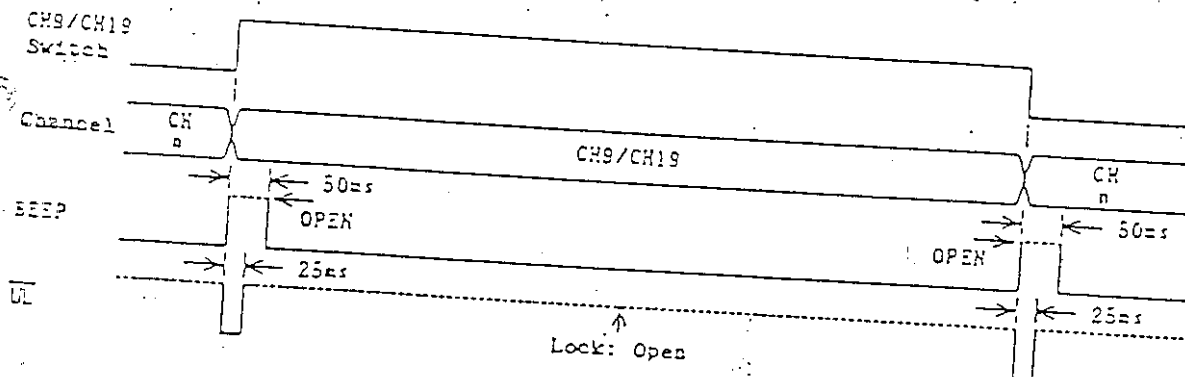


(3) Public Announcement (PA) mode

When the PA switch is turned on, the LC7185 does the following:

- Stores the value of the previous channel
- Disables all keys
- Causes "PA" to be displayed
- Stays in PA mode until the PA switch is turned off.

When the PA switch is turned back off, the LC7185 leaves PA mode and reopens the previous channel.

As shown in the diagram, the UL line is asserted while the PA switch is turned on.

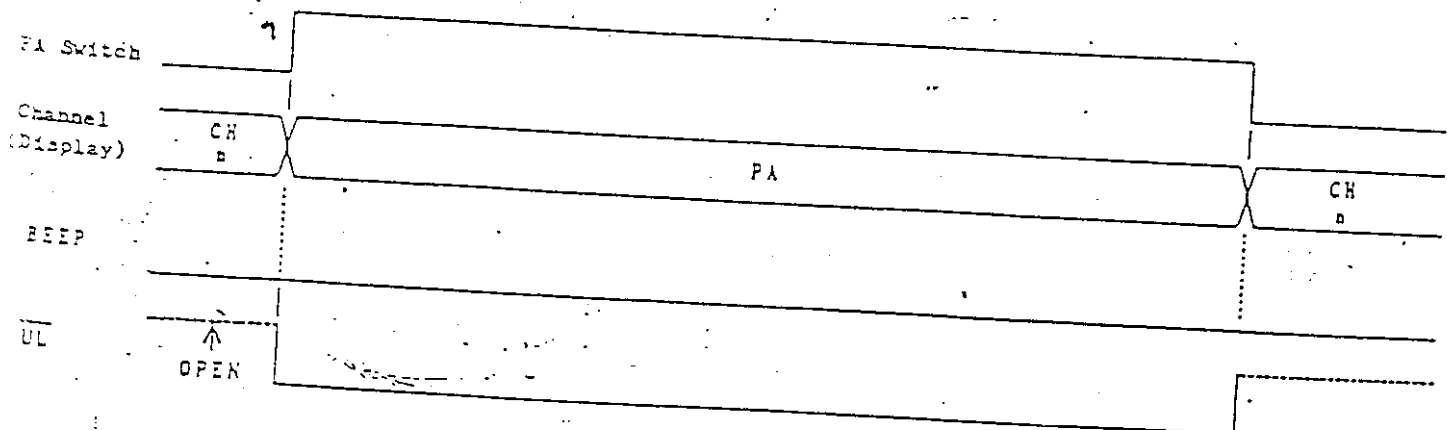

3. Presetting channels

Presetting a channel is done in the following way. First select the channel to be preset, then hold down the ME key and press the preset memory key (M1 to M5)* to which you would like to assign the current channel.

In the following cases, a channel will not be preset:

- 9 seconds elapse after the ME key is pressed and one of M1 to M5 is pressed.
- Emergency channels CH9 or CH19 are currently selected
- The TX line is asserted.
- The PA switch is turned on (PA mode).
- The HOLD line is asserted (hold mode).

There are two different display modes as shown below.

Mode 1 (without diode)

The current channel is displayed throughout the preset process.

Example: Display 15 → 15

Key

ME M1

Mode 2 (with diode)

When the ME key is held down, "PE" is flashed on the display. Once a preset memory key is pressed (e.g. M1), the key mnemonic (e.g. "P1") is displayed for 400msec before the current channel is redisplayed.

Example: Display 15 → PE → P1 → 15

Key

ME

M1

400 msec

* Note that if two or more keys are pressed at the same time, priority is assigned as follows:

M1>M2>M3>M4>M5


(6) Beep-tone Control Output

After each of the following events, the BEEP line is asserted for 50msec:

- A reset (e.g. battery replacement)
- Any key press associated with the channel memory
- Any emergency channel switch activation
- A new channel is selected.
- Leaving hold mode

(7) Unlock Detected Output ($\overline{UL}$)

In the following cases, the $\overline{UL}$ line is asserted for the duration indicated.

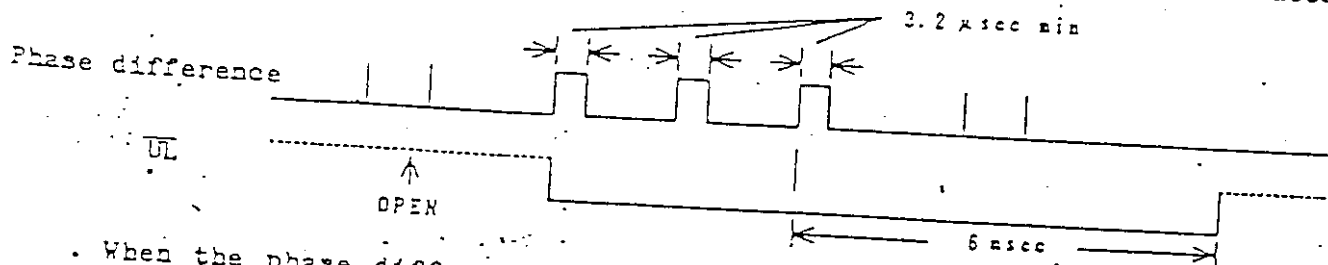


- When the phase difference between the programmable and reference divider outputs exceeds 3.2μsec. The $\overline{UL}$ line is held low for 6msec after the last out-of-range phase sample is detected, as shown below.
- After a new transmit/receive or channel selection. The $\overline{UL}$ line is asserted for 25msec.
- While the PA switch is turned on.

(4) Transmit/Receive Selection

When the $\overline{\text{TX}}$ line is asserted, the LC7185 enters TX mode. The LC7185 will only leave this mode if the PA switch is pressed or the $\overline{\text{TX}}$ line is deactivated.

As shown in the diagram, the $\overline{\text{UL}}$ line is asserted for 25ms after the TX line is asserted or deactivated.

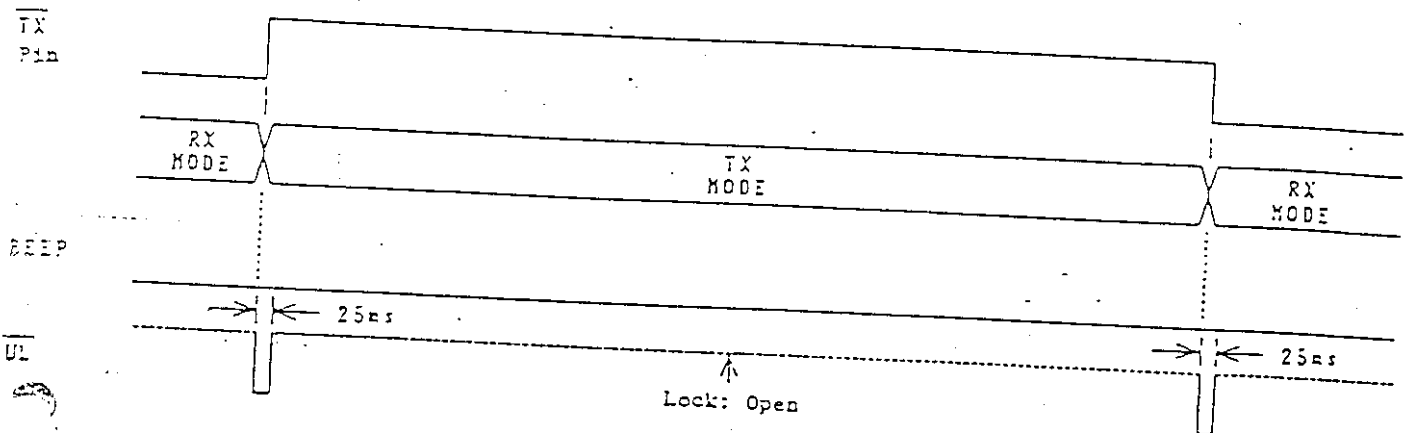

(5) Channel Preset/Recall Facility

1. The LC7185 allows up to 5 channels to be preset (assigned to M1 to M5).
 . After a reset, M1 to M5 are assigned to CE33.

2. Recalling preset channels

- . A preset channel is recalled by pressing one of the preset memory keys (M1 to M5)* to which the channel was previously assigned.
- . Presetting channel (assigning keys) are covered in the next section.

There are two different display modes as shown below.

Mode 1 (without diode)

Each time a key is pressed (e.g. M1), the new channel is displayed.

Example: Display

21 → 15

Key

M 1

Mode 2 (with diode)

Each time a key is pressed (e.g. M1), a key mnemonic (e.g. "P1") is displayed for 400msec, then the new channel is displayed.

Example: Display

21 → P1 → 15


Key

M 1

400ms


(8) Key Matrix

It is normal to put diodes in series with the key scanning lines to avoid creating a short with the output lines.
But K01, K02 and K03 lines don't need diodes.

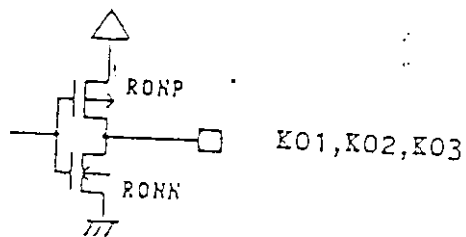


R_{ONP}, R_{ONN} : ON impedance

	min	typ	max	[kohm]
R_{ONP}	0.5	1.0	2.0	
R_{ONN}	30	50	70	
R_{PdN}	30	50	70	

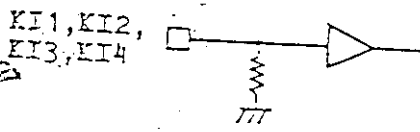

R_{PdN} : Pull-down resistor

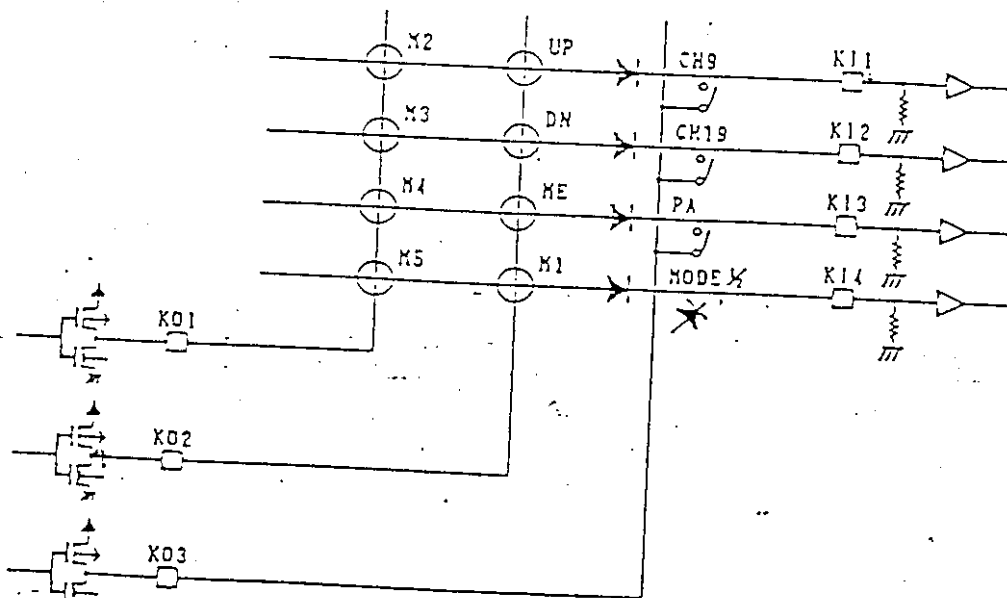

Hold Mode

The LC7185 enters hold mode when the HOLD line is asserted. In this mode, the channel preset/recall RAM is not affected.

(1) System status

The LC7185 will remain in hold mode until the HOLD line is deactivated or a reset occurs (INIT line is asserted). The programmable divider, crystal oscillator, and reference divider are all inhibited. Signal output levels are shown below.

PD: High impedance

UL: V_{SS} (Ground)

D1, D2: High impedance

BEEP: V_{SS}

K01 to K03: V_{SS}

When the LC7185 leaves hold mode, the previously selected channel is reopened.


(2) Reset

To reset the chip, assert the INIT line,


Reset state:

• CE9 is selected.

• Preset memory keys are all set to CE33.

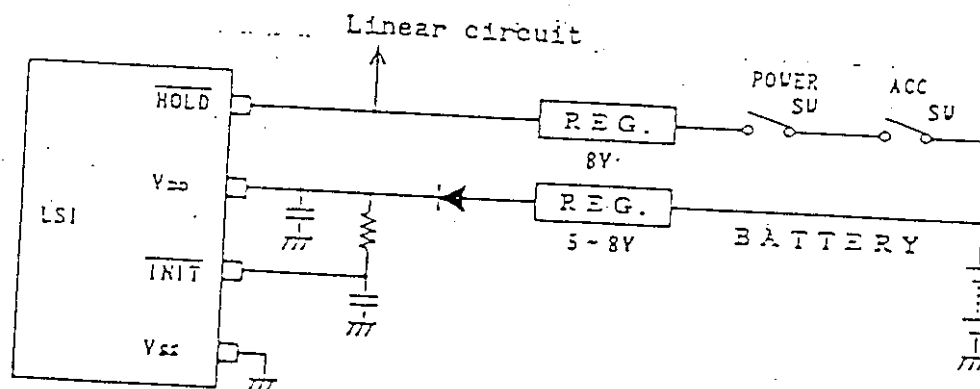

Timing Requirements for Hold Mode

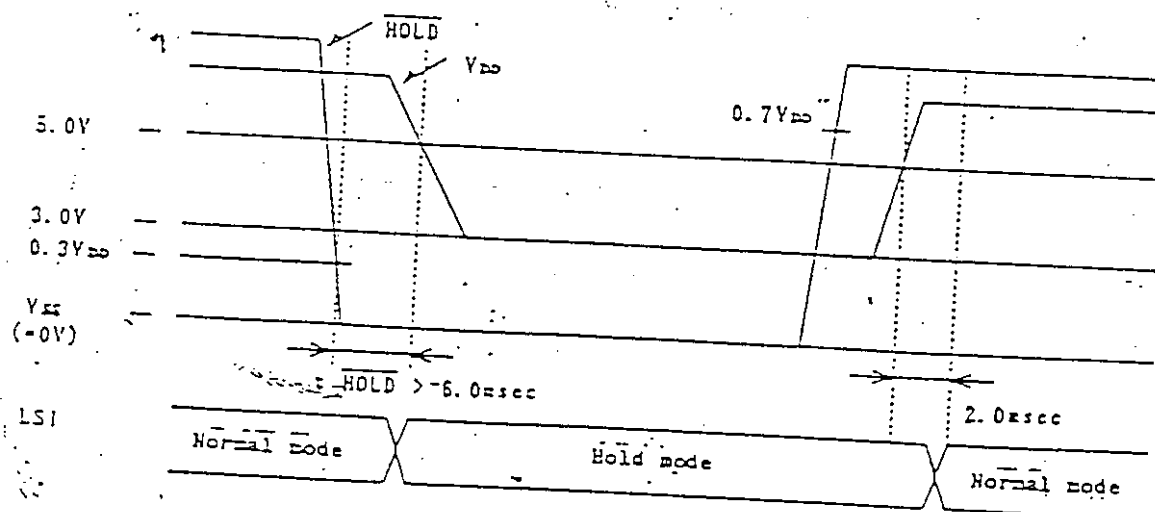


V_{DD} must remain at 5.0V or higher (crystal oscillator requirement) for 6.0msec (t_{HOLD}) after the HOLD line is asserted ($HOLD < 0.3V_{DD}$). After this V_{DD} may go as low as 3.0V.

There are no constraints on timing when the chip is leaving hold mode. The signals can be activated in one of two orders.

- 1) If HOLD is already deactivated ($> 0.7V_{DD}$), the LC7185 leaves hold mode within 2.0msec after V_{DD} rises to $> 5.0V$.
- 2) If V_{DD} is $> 5.0V$, the LC7185 enters normal mode within 2.0msec after HOLD is deactivated.


(4) Reset Timing

- 1) Reset timing (e.g. battery replacement)

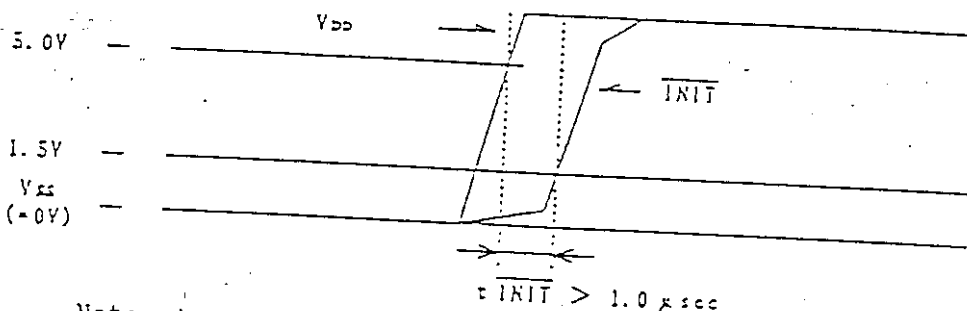

Note: t_{INIT} should be greater than 1.0msec.

- 2) Reset caused by a sudden voltage (V_{DD}) drop

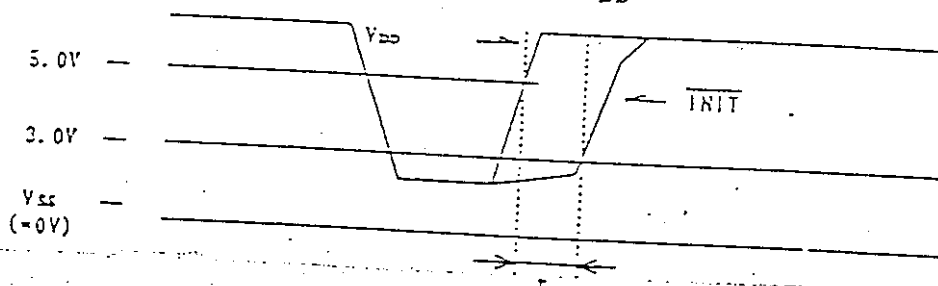

Note: If V_{DD} drops momentarily down to less than 3.0V and rises up to more than 5.0V ($t > 1.0msec$), a reset may be generated.

Frequency Table (U.S.A.; LC7185-8750)

CHANNEL	FREQUENCY (MHz)	RX ($\overline{TX} = 1$)		TX ($\overline{TX} = 0$)	
		N	F v c o	N	F v c o
1	26.965	6508	16.27		
2	26.975	6512	16.28	5393	13.4825
3	26.985	6516	16.29	5395	13.4875
4	27.005	6524	16.31	5397	13.4925
5	27.015	6528	16.32	5401	13.5025
6	27.025	6532	16.33	5403	13.5075
7	27.035	6536	16.34	5405	13.5125
8	27.055	6544	16.36	5407	13.5175
9	27.065	6548	16.37	5411	13.5275
10	27.075	6552	16.38	5413	13.5325
				5415	13.5375
11	27.085	6556	16.39		
12	27.105	6564	16.41	5417	13.5425
13	27.115	6568	16.42	5421	13.5525
14	27.125	6572	16.43	5423	13.5575
15	27.135	6576	16.44	5425	13.5625
16	27.155	6584	16.46	5427	13.5675
17	27.165	6588	16.47	5431	13.5775
18	27.175	6592	16.48	5433	13.5825
19	27.185	6596	16.49	5435	13.5875
20	27.205	6604	16.51	5437	13.5925
				5441	13.6025
21	27.215	6608	16.52		
22	27.225	6612	16.53	5443	13.6075
23	27.255	6624	16.56	5445	13.6125
24	27.235	6616	16.54	5451	13.6275
25	27.245	6620	16.55	5447	13.6175
26	27.265	6628	16.57	5449	13.6225
27	27.275	6632	16.58	5453	13.6325
28	27.285	6636	16.59	5455	13.6375
29	27.295	6640	16.60	5457	13.6425
30	27.305	6644	16.61	5459	13.6475
				5461	13.6525
31	27.315	6648	16.62		
32	27.325	6652	16.63	5463	13.6575
33	27.335	6656	16.64	5465	13.6625
34	27.345	6660	16.65	5467	13.6675
35	27.355	6664	16.66	5469	13.6725
36	27.365	6668	16.67	5471	13.6775
37	27.375	6672	16.68	5473	13.6825
38	27.385	6676	16.69	5475	13.6875
39	27.395	6680	16.70	5477	13.6925
40	27.405	6684	16.71	5479	13.6975
				5481	13.7025

$$V_{co} (TX) = RF \div 2$$

$$V_{co} (RX) = RF - 10.695 \text{ MHz (IF)}$$

$$CH1: V_{co} (TX) = 26.965 \div 2 = 13.4825$$

$$V_{co} (RX) = 26.965 - 10.695 = 16.27$$

Electrical Characteristics

Absolute maximum ratings at $T_a=25^{\circ}\text{C}$, $V_{SS}=0\text{V}$

	V_{DD} max	V_{DD}	$V_{SS}=0\text{V}$	min	typ	max	unit
Supply Voltage	$V_{IN(1)}$ max	HOLD, TX		-0.3		9.0	V
Input Voltage	$V_{IN(2)}$ max	Input pins other than $V_{IN(1)}$ max		-0.3		15	V
Output Voltage	$V_{O(1)}$ max	SA, SB, SC, SD, SE, SF, SG, D1, D2		-0.3		$V_{DD}+0.3$	V
	$V_{O(2)}$ max	UL, BEEP		-0.3		15	V
	$V_{O(3)}$ max	PD		-0.3		$V_{DD}+0.3$	V
	$V_{O(4)}$ max	Output pins other than mentioned above		-0.3		$V_{DD}+0.3$	V
Output Current	$I_{O(1)}$ max	SA, SB, SC, SD, SE, SF, SG		0		30	mA
	$I_{O(2)}$ max	D1, D2				10	mA
	$I_{O(3)}$ max	UL		0		20	mA
	$I_{O(4)}$ max	BEEP		0		10	mA
Allowable Power Dissipation	P_d max	($T_a \leq 85^{\circ}\text{C}$)		0		350	mW
Operating Temperature	T_{ops}			-40		+85	$^{\circ}\text{C}$
Storage Temperature	T_{stg}			-55		+125	$^{\circ}\text{C}$

Allowable operating conditions at $T_a=-40$ to $+85^{\circ}\text{C}$, $V_{SS}=0\text{V}$

Supply Voltage	V_{DD}		5.0	8.0	V
"H"-Level Input Voltage	$V_{IH(1)}$	HOLD, TX	$0.7V_{DD}$	12	V
	$V_{IH(2)}$	INIT	3.0	V_{DD}	V
"L"-Level Input Voltage	$V_{IL(1)}$	KI1, KI2, KI3, KI4	$0.6V_{DD}$	V_{DD}	V
	$V_{IL(2)}$	HOLD, TX	0	$0.3V_{DD}$	V
	$V_{IL(3)}$	INIT	0	1.5	V
Output Voltage	$V_{OUT(1)}$	KI1, KI2, KI3, KI4	0	$0.4V_{DD}$	V
	$V_{OUT(2)}$	SA, SB, SC, SD, SE, SF, SG, D1, D2	0	13	V
Input Frequency	$f_{IN(1)}$	UL, BEEP	0	8	V
	$f_{IN(2)}$	XIN(sine wave, capacitor coupled)	1.0 10.24	15	MHz
Input Amplitude	$V_{IN(1)}$	PIN(sine wave, capacitor coupled)	10	30	MHz
	$V_{IN(2)}$	XIN(sine wave, capacitor coupled)	0.5	1.5	Vrms
	$V_{IN(3)}$	PIN(sine wave, capacitor coupled)	0.15	1.5	Vrms
Required Oscillating Frequency	X'tal	XIN, XOUT ($C_i \leq 50\text{ohms}$)	5.0 10.24	15	MHz

Electrical characteristics at under allowable operating conditions

Internal Feedback Resistance	$R_f(1)$	XIN	1.0	Mohm
Pull-down Resistor	$R_f(2)$	PIN	500	kohm
"H"-Level Input Current	R_{pdN}	KI1, KI2, KI3, KI4, TEST	30 50	70 kohm
	$I_{IH(1)}$	HOLD, TX $V_I=12\text{V}$		5.0 uA
	$I_{IH(2)}$	INIT $V_I=V_{DD}$		5.0 uA
	$I_{IH(3)}$	XIN $V_I=V_{DD}$		20 uA
	$I_{IH(4)}$	PIN $V_I=V_{DD}$		40 uA

Continued on next page.

Continued from preceding page.

"L"-Level Input Current

		min	typ	max	unit
$I_{IL}(1)$	HOLD, $\overline{TX}$, $V_i = V_{SS}$			5.0	μA
$I_{IL}(2)$	INIT $V_i = V_{SS}$			5.0	μA
$I_{IL}(3)$	XIN $V_i = V_{SS}$			2.0	μA
$I_{IL}(4)$	PIN $V_i = V_{SS}$			4.0	μA
$V_{OH}(1)$	KO1, KO2, KO3 $I_O = 1mA$	V_{DD} -2.0	V_{DD} -1.0	V_{DD} -0.5	V

"H"-Level Output Voltage

"L"-Level Output Voltage

$V_{OH}(2)$	PD $I_O = 1mA$				V
$V_{OL}(1)$	KO1, KO2, KO3 $I_O = 20\mu A$	$V_{DD} - 1.0$ 0.6	1.0	1.4	V
$V_{OL}(2)$	PD $I_O = 0.5mA$			1.0	V
$V_{OL}(3)$	BEEP $I_O = 2mA$			1.0	V
$V_{OL}(4)$	SA, SB, SC, SD, SE, SF, SG $I_O = 20mA$			1.0	V

Output Leakage Current.

$V_{OL}(5)$	D1, D2 $I_O = 5mA$			1.0	V
$V_{OL}(6)$	UL $I_O = 10mA$			5.0	μA
$I_{OFF}(1)$	SA, SB, SC, SD, SE, SF, SG, D1, D2 $V_O = 13V$			5.0	μA

"H"-Level Tristate Leakage Current

"L"-Level Tristate Leakage Current
Supply Current

$I_{OFF}(2)$	UL, BEEP $V_O = 8V$			0.01	10.0	nA
I_{OFFH}	PD $V_O = V_{DD}$			0.01	10.0	nA
I_{OFFL}	PD $V_O = V_{SS}$			10	15	mA
$I_{DD}(1)$	Normal mode *1(PLL operates)			5	15	μA
$I_{DD}(2)$	Hold mode $V_{DD} = 3.0V$ *2(memory backup) $V_{DD} = 8.0V$			15		μA

*1 $f_{IN}(2) = 20MHz(PIN)$
 $V_{IN}(2) = 0.15V_{rms}$
 $X'_{tal} = 10.240MHz$
 $\overline{TX} = \overline{HOLD} = \overline{INIT} = V_{DD}$
 Other inputs = V_{SS}
 Other outputs = open

*2 $\overline{HOLD} = V_{SS}$
 $\overline{TX} = \overline{INIT} = V_{DD}$
 Other inputs = V_{SS}
 Other outputs = open

APPENDIX 10
FINAL RF AMPLIFIER DATA SHEETS

FOUR (4) PAGES OF KTC2078 DATA FOLLOW THIS SHEET

FINAL RF AMP DATA SHEET
FCC ID: AAO2101574

APPENDIX 10

ws\rstrc446.TC


TRANSCEIVER TX FINAL AMPLIFIER APPLICATION.
TRANSCEIVER APPLICATION.

FEATURES

Recommended for Output Stage Application of
VHF Transmitter.
High Power Gain.
Wide Area of Safe Operation.

MAXIMUM RATINGS (Ta=25°C)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CB0}	80	V
Collector-Emitter Voltage ($R_{BE}=50\Omega$)	V_{CER}	80	V
Emitter-Base Voltage	V_{EB0}	4	V
Collector Current	I_C	4	A
Emitter Current	I_E	4	A
Collector Power Dissipation ($T_c=25^\circ\text{C}$)	P_C	10	W
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C

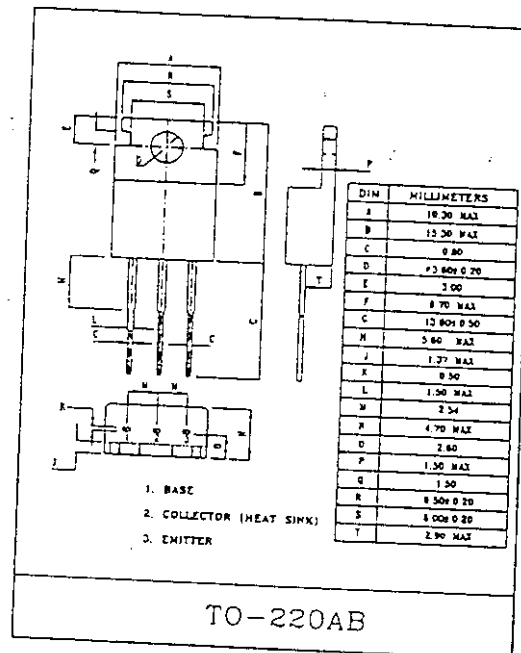

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=30V, I_E=0$	-	-	10	μA
Breakdown Voltage	Collector-Emitter	$I_C=10mA, R_{BE}=50\Omega$	80	-	-	V
	Emitter-Base	$I_E=1.0mA, I_C=0$	4	-	-	V
Current Gain	h_{FE}	$V_{CE}=5V, I_C=0.5A$	100	-	200	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=3A, I_B=0.3A$	-	-	1.5	V
Transition Frequency	f_T	$V_{CE}=5V, I_C=500mA$	100	-	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	-	40	-	pF
Output Power (Fig.1)	P_o	$V_{CC}=12V, P_i=0.3W, f=27MHz$	4	-	-	W


FIG. 1. TEST CIRCUIT

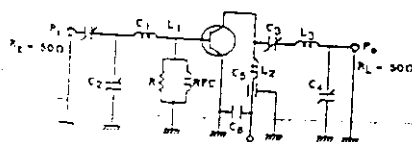


$C_1 \sim 100pF, C_2, C_3 \sim 150pF, C_4 \sim 300pF, C_5: 1000pF$
 $C_6: 0.01\mu F, R: 250\Omega$
 $L_1: 0.8mm \phi UEW, 7T, 8mm I.D, L_2: 0.8mm \phi UEW, 5T, 8mm I.D$
 $L_3: 0.8mm \phi UEW, 10T, 8mm I.D, RFC: 0.35mm \phi UEW, 17T, 5mm I.D$

KTC2078


Fig.2 27MHz 4W OUTPUT AM TRANSCIEVER CIRCUIT

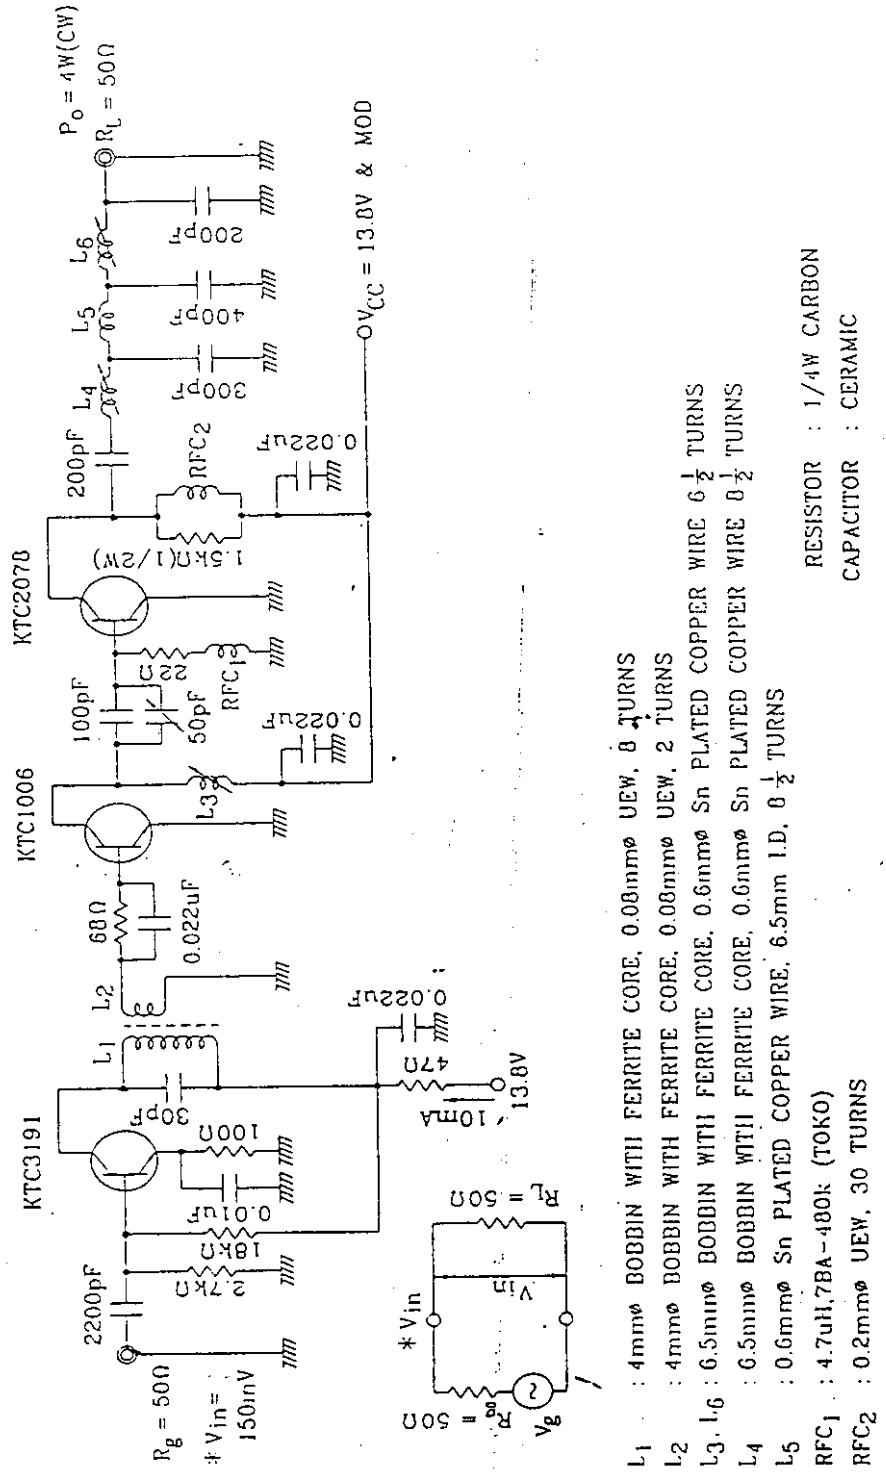


$P_o - P_i$

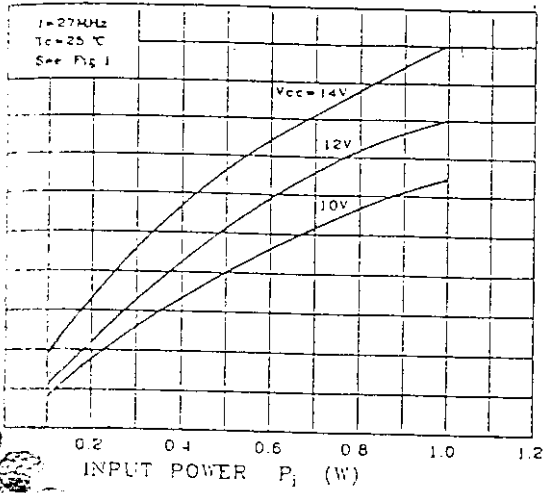


$P_o - V_{cc}$

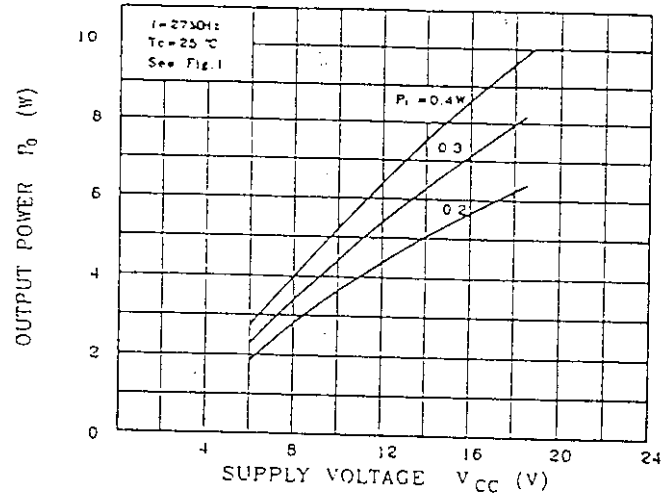


$h_{FE} - I_c$

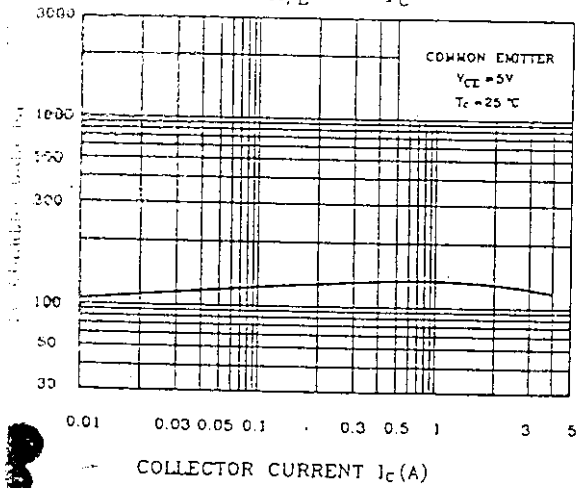


$f_T - I_c$

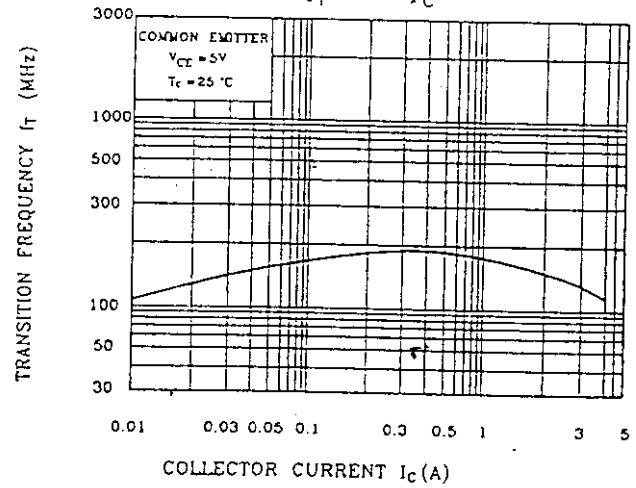

$C_{ob} - V_{CB}$

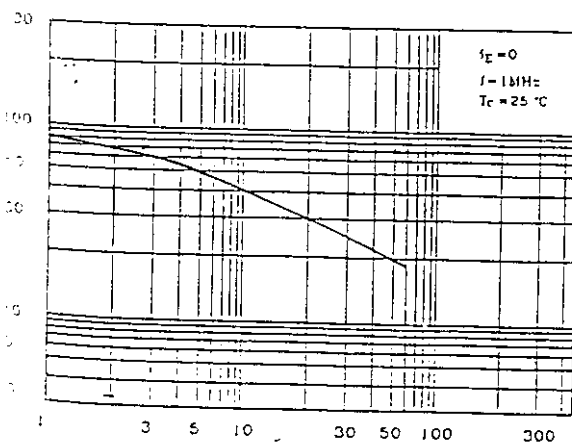

$P_c - T_a$

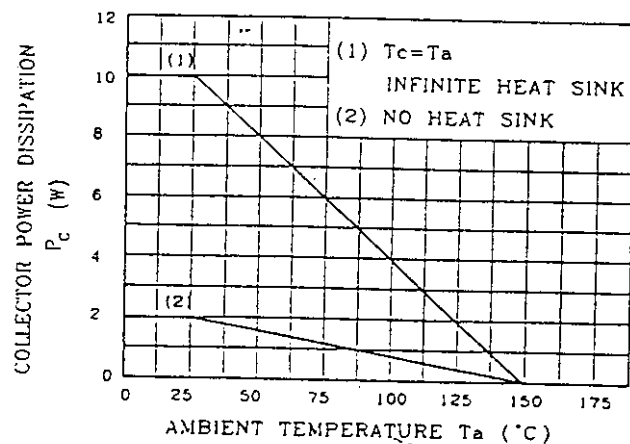

KTC2078





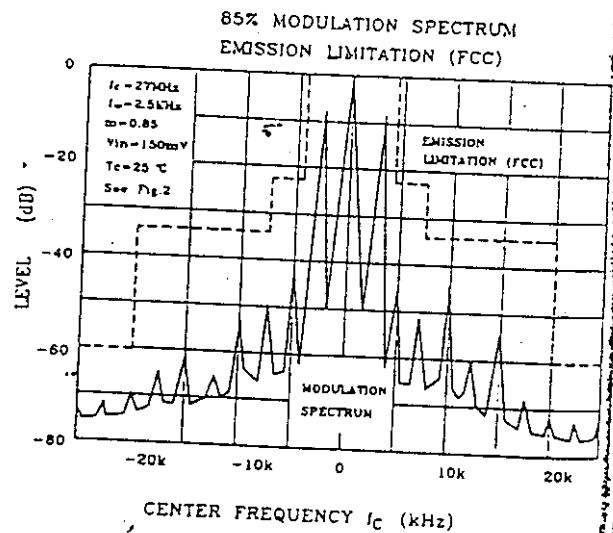


FIGURE 1
TRANSMITTER FREQUENCY RESPONSE

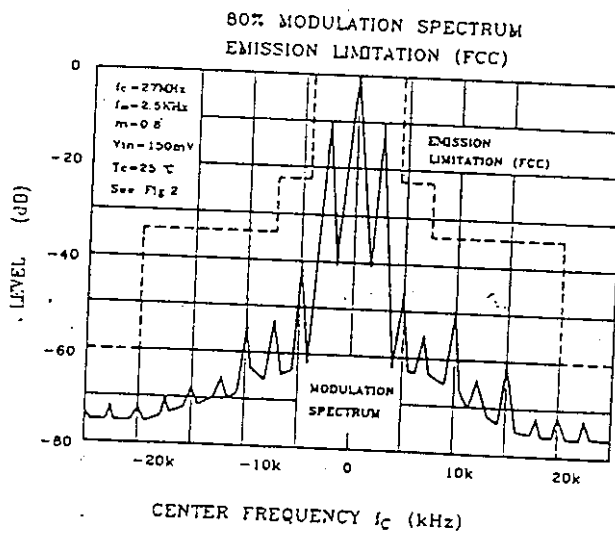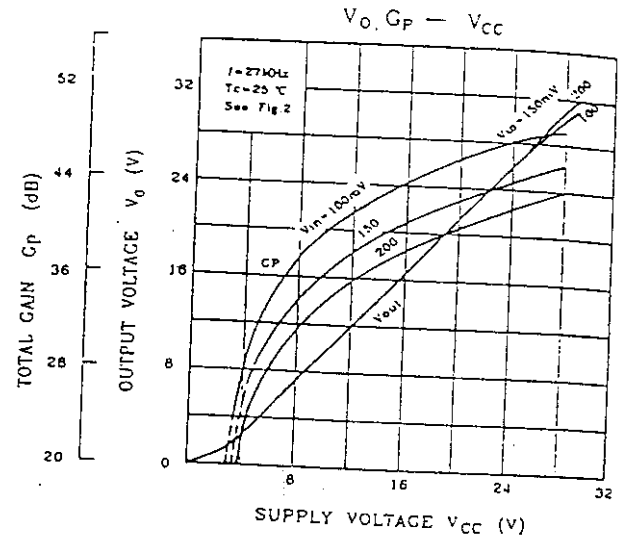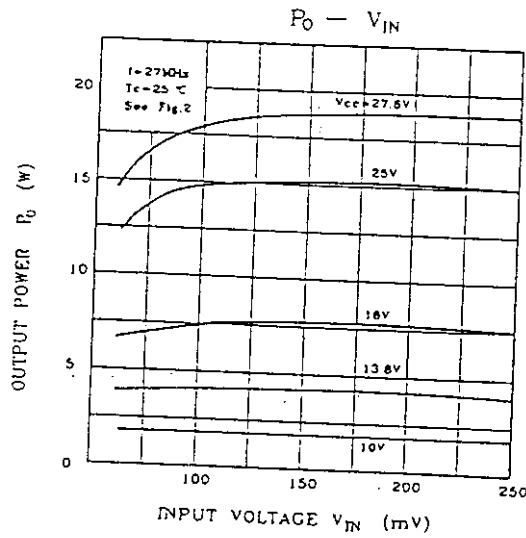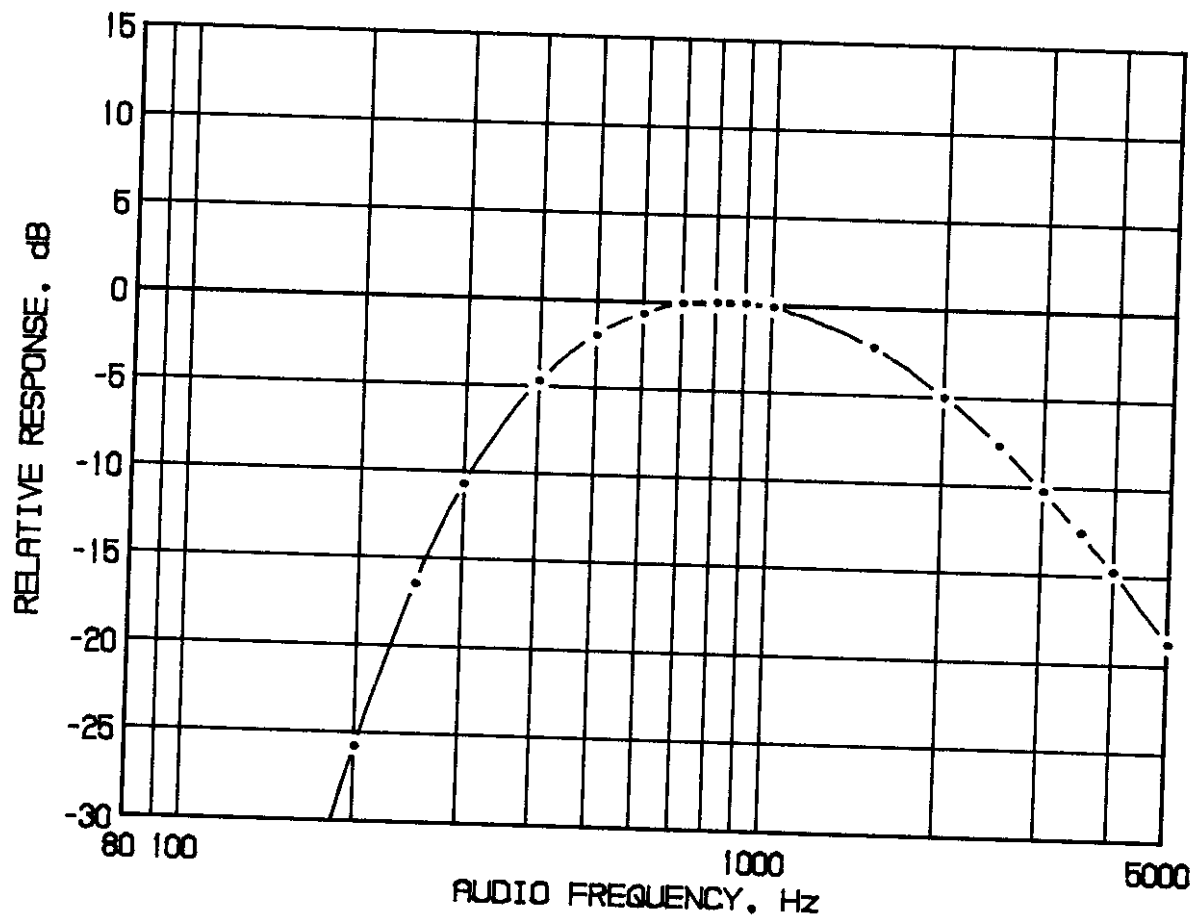


TRANSMITTER FREQUENCY RESPONSE
FCC ID: AAO2101574

FIGURE 1

FIGURE 2a

AM MODULATION LIMITING - POSITIVE PEAKS

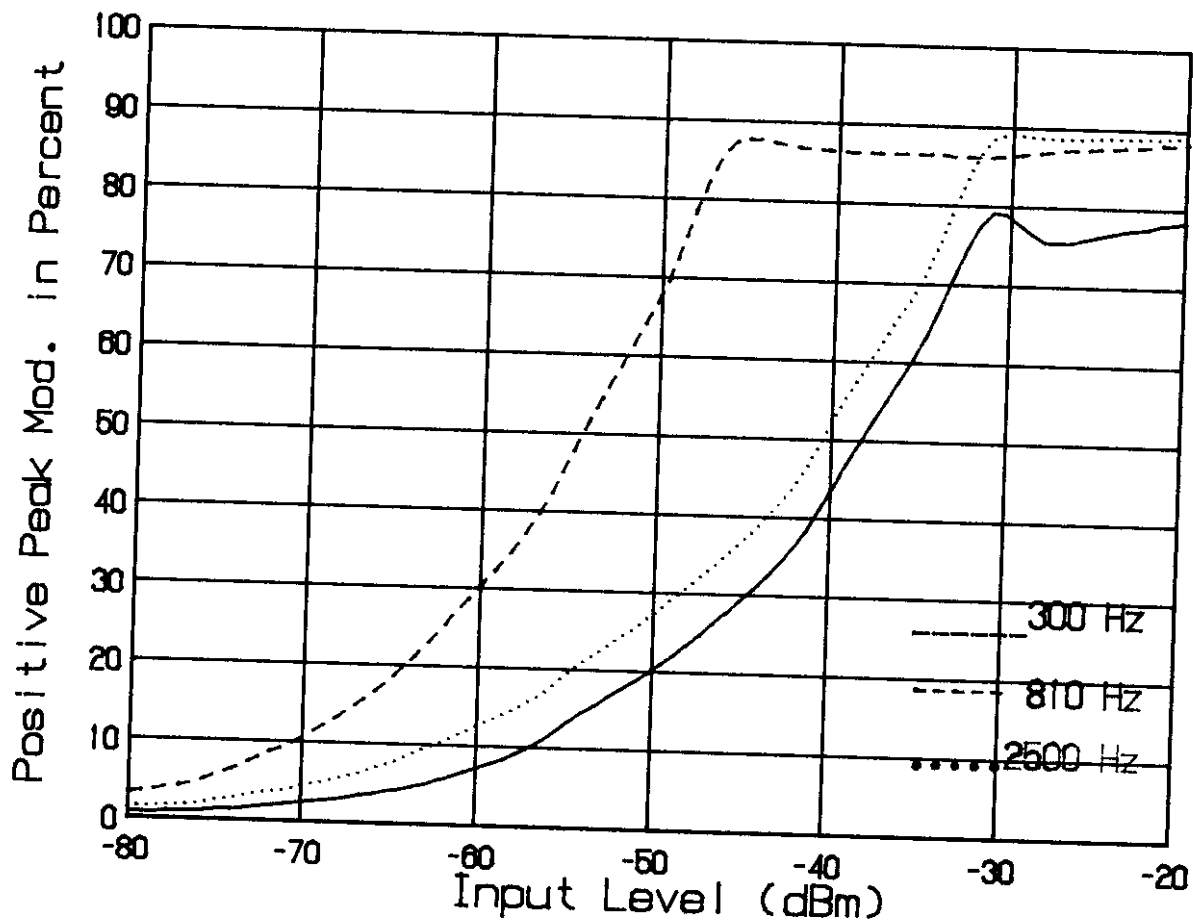

MODULATION LIMITING CHARACTERISTICS

Percent modulation as a function of input level at microphone jack in dBm for 300 Hz, 810 Hz, and 2500 Hz tones.


MODULATION LIMITING POSITIVE PEAKS

FCC ID: AAO2101574

FIGURE 2a

FIGURE 2b

AM MODULATION LIMITING - NEGATIVE PEAKS

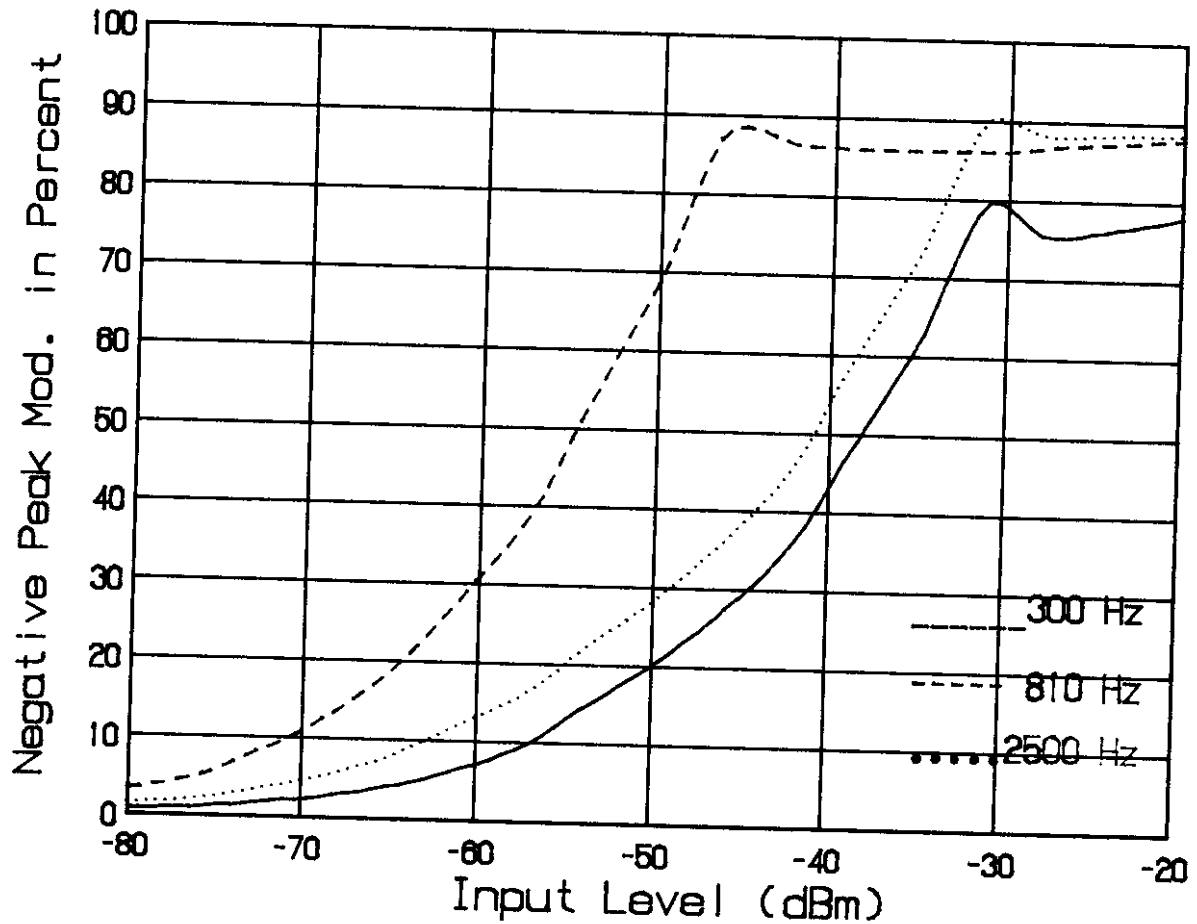

MODULATION LIMITING CHARACTERISTICS


Percent modulation as a function of input level at microphone jack in dBm for 300 Hz, 810 Hz, and 2500 Hz tones.

MODULATION LIMITING NEGATIVE PEAKS

FCC ID: AAO2101574

FIGURE 2b

FIGURE 3a
MODULATION LIMITER ATTACK TIME

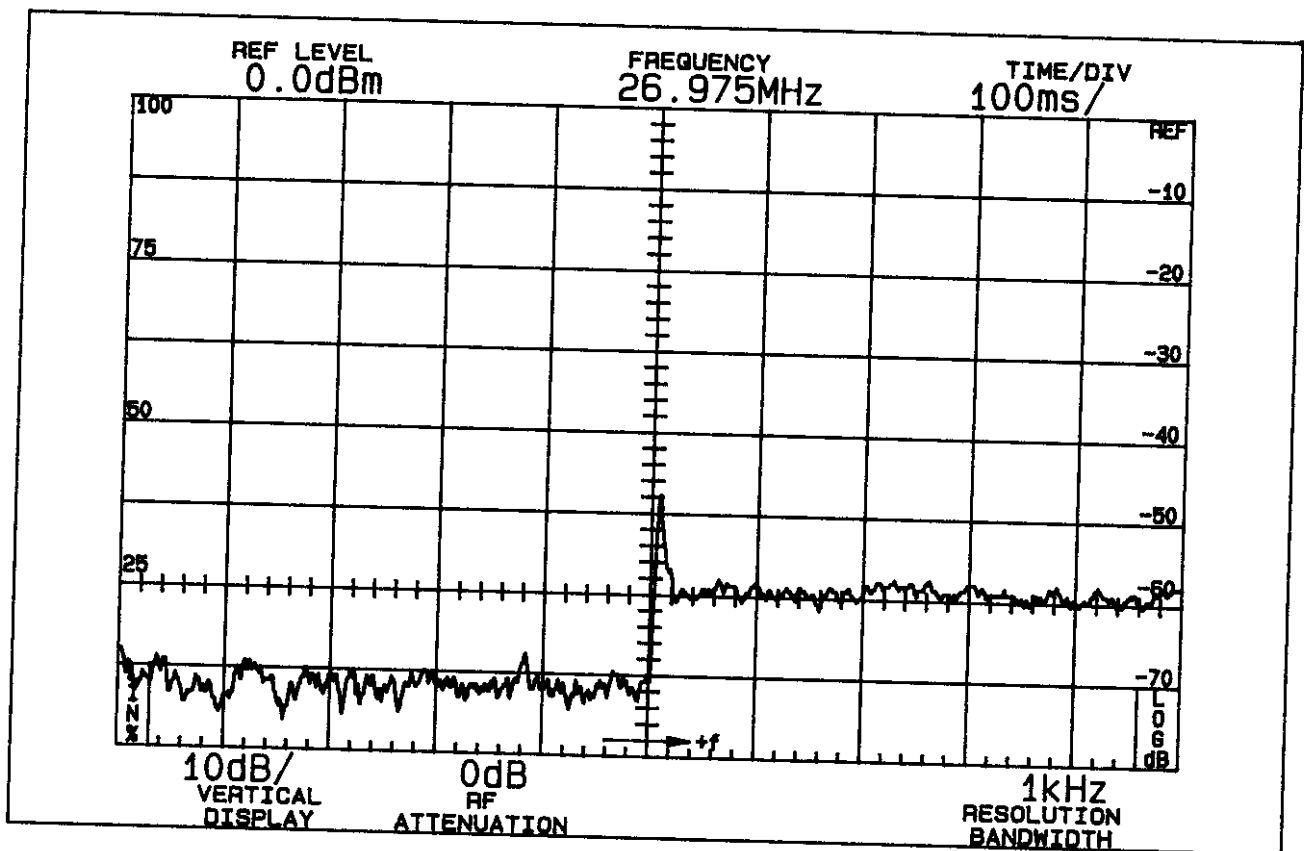


Measurement Conditions: 16 dB over 50% modulation level at 810 Hz with 2500 Hz tone, upper fourth order sideband; horizontal scale 100 ms/div.

UPPER FOURTH-ORDER SIDEBAND
LIMITER ATTACK TIME
FCC ID: AAO2101574

FIGURE 3a

FIGURE 3b

MODULATION LIMITER ATTACK TIME

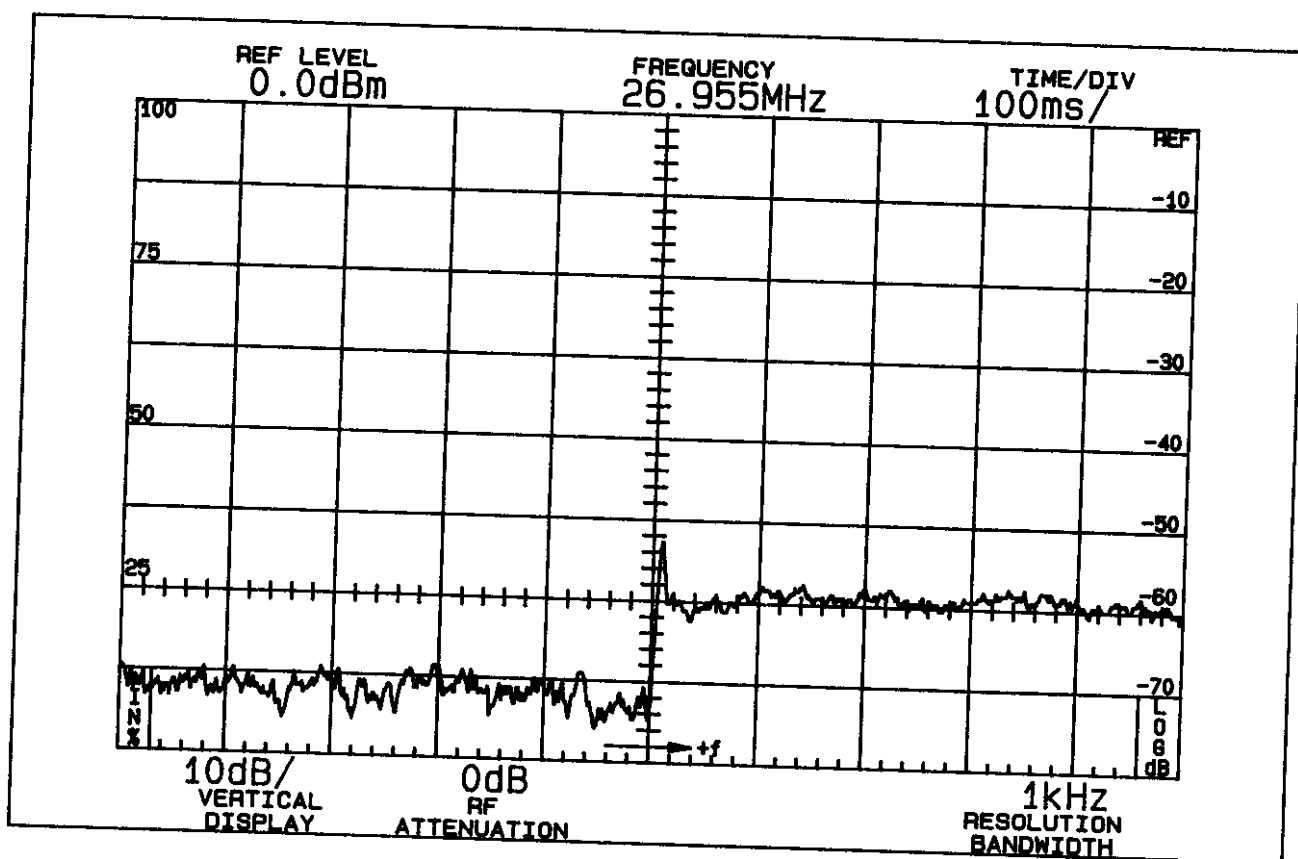

Measurement Conditions: 16 dB over 50% modulation level at 810 Hz with 2500 Hz tone, lower fourth order sideband; horizontal scale 100 ms/div.

LOWER FOURTH-ORDER SIDEBAND
LIMITER ATTACK TIME
FCC ID: AAO2101574

FIGURE 3b


C. MODULATION CHARACTERISTICS (Continued)

4. Occupied Bandwidth - AM
(Paragraph 2.989(c) of the Rules)

Figure 4 is a plot of the sideband envelope of the transmitter taken from a Tektronix 494P spectrum analyzer. Modulation corresponded to conditions of 2.989(a) and consisted of 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50% modulation at 810 Hz, the frequency of maximum response. Measured modulation under these conditions was 88% positive, 88% negative.

The plot is within the limits imposed by Paragraph 95.631(b)(1,3) for double sideband AM modulation. The horizontal scale, frequency, is 10 kHz per division and the vertical scale, amplitude, is a logarithmic presentation equal to 10 dB per division.

FIGURE 4
OCCUPIED BANDWIDTH

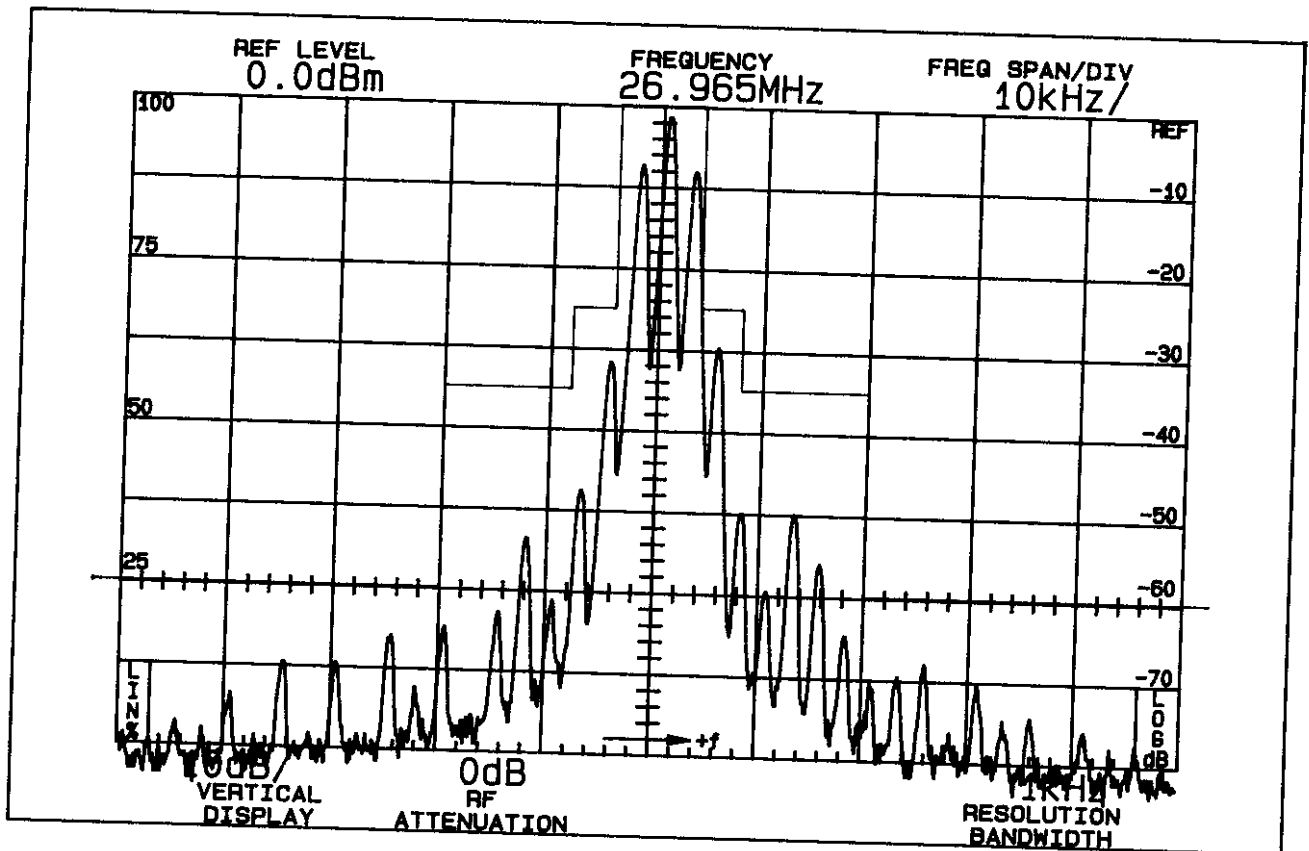

ATTENUATION IN dB BELOW
MEAN OUTPUT POWER
Required

On any frequency more than 50%
up to and including 100% of the
authorized bandwidth, 8kHz (4-8kHz)

25

On any frequency more than 100%,
up to and including 250% of the
authorized bandwidth (8-20kHz)

35

On any frequency removed from the
assigned frequency by more than
250% of the authorized bandwidth

60

OCCUPIED BANDWIDTH
FCC ID: AAO2101574

FIGURE 4

D. SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS
(Paragraph 2.991 of the Rules)

The TRC-446 transmitter was tested in the AM mode for spurious emissions at the antenna terminals while the equipment was modulated with a 2500 Hz signal, 16 dB above minimum input signal for 50% modulation at 810 Hz, the frequency of highest sensitivity.

Measurements were made with Tektronix 494P spectrum analyzer coupled to the transmitter output terminal through Narda 765-20 50 ohm power attenuation.

In order to improve measurement system dynamic range, a series trap tuned to the carrier frequency was used on the Narda attenuator output. The trap, which had negligible attenuation at the second harmonic and higher frequencies, provided 26 dB attenuation of the fundamental. The trap was not used during close-in (within 10 MHz of the carrier) spurious measurements.

During the tests, the transmitter was terminated in the Narda 765-20 dummy load. Power was monitored on a Bird 43 Thru-Line wattmeter; dc supply was 13.8 volts throughout the tests.

Spurious emission was measured at both power settings on Channels 1, 21, and 40 throughout the RF spectrum from 10.24 to 300 MHz. Any emissions that were between the 60 dB attenuation required and the 100 dB noise floor of the spectrum analyzer were recorded. Data are shown in Table.

TABLE 1
TRANSMITTER CONDUCTED SPURIOUS

13.8 Vdc Input

<u>Channel</u>	<u>Spurious Frequency MHz</u>	<u>dB Below Unmod Carrier Ref.</u>
1	53.930	74
1	80.895	80
1	107.860	78
1	134.825	76
1	161.790	79
1	188.755	80
1	215.720	76
1	242.685	85
1	269.650	90
21	54.430	72
21	81.645	77
21	108.860	79
21	136.075	77
21	163.290	80
21	190.505	82
21	217.720	77
21	244.935	83
21	272.150	96
40	54.810	74
40	82.215	77
40	109.620	79
40	137.025	77
40	164.430	79
40	191.835	86
40	219.240	80
40	246.645	82
40	274.050	96
Required:		60

All other spurious were more than 20 dB below required 60 dB suppression.

E. FIELD STRENGTH MEASUREMENTS OF SPURIOUS RADIATION
(Paragraph 2.993(a)(b,2) of the Rules)

Field intensity measurements of radiated spurious emissions from the TRC-446 transmitter were made with a Tektronix 494P spectrum analyzer and dummy load located in an open field 3 meters from the test antenna. Output power was 3.7 watts. The supply voltage was 13.8 volts. The transmitter and test antennae were arranged according to OCE 42 to maximize pickup. Measurements were made with and without accessory cable. Both vertical and horizontal test antenna polarization were employed.

Measurements were made from 10.24 MHz to 10 times the maximum operating frequency of 26.965 or 269.65 MHz.

Reference level for the spurious radiations was taken as an ideal dipole excited by 3.7 watts, the output power of the transmitter according to the following relationship:*

$$E = \frac{(49.2 \times P_t)^{1/2}}{R}$$

where

E = electric-field intensity in volts/meter

P_t = transmitter power in watts

R = distance in meters

for this case $E = \frac{(49.2 \times 3.7)^{1/2}}{3} = 4.5 \text{ V/m}$

Since the spectrum analyzer is calibrated in decibels above one milliwatt (dBm):

$$4.5 \text{ volts/meter} = 4.5 \times 10^6 \text{ uV/m}$$

$$\text{dBu/m} = 20 \text{ Log}_{10}(4.5 \times 10^6)$$

$$= 133 \text{ dBu/m}$$

Since 1 uV/m = -107 dBm, the reference becomes

$$133 - 107 = 26 \text{ dBm}$$

Representing a conversion for convenience, from dBu to dBm. The measurement system was capable of detecting signals 100 dB or more below the carrier reference level. Data, including antenna factor and line loss corrections, are shown in Table 2.

*Reference Data for Radio Engineers, International Telephone and Telegraph Corporation, Sixth Edition.

F. FIELD STRENGTH MEASUREMENTS (Continued)

TABLE 2

TRANSMITTER CABINET RADIATED SPURIOUS
Channel 1, 26.965 MHz; 3.5 watts

<u>Frequency, MHz</u>	<u>dB Below Carrier Reference</u>			
	With Accessories		Without Accessories	
	(V)	(H)	(V)	(H)
53.930	94	96	98	102
80.895	71	70	88	92
107.860	77	83	89	92
134.825	76	94	88	87
161.790	92	94	95	97
188.755	97	94	95	92
215.720	84	83	93	90
242.685	76	74	81	83
269.650	80	88	91	95
Required:	60	60	60	60

Any unlisted spurious were more than 80 below carrier reference from 10.24 to 269.650 MHz.

F. FREQUENCY STABILITY
(Paragraph 2.995(a)(1) of the Rules)

Measurement of frequency stability versus temperature was made at temperatures from -30°C to $+50^{\circ}\text{C}$ in 10° increments. At each temperature, the unit was exposed to the test chamber ambient a minimum of 60 minutes after indicated chamber temperature ambient had stabilized to within $\pm 2^{\circ}$ of the desired test temperature. Following a 30 minute soak at each temperature, the unit was turned on, keyed and frequency measured within 2 minutes. Test temperature was sequenced in the order shown in Table 3, starting with -30°C .

A Thermotron S1.2 temperature chamber was used. The transmitter output stage was terminated in a dummy load. Primary supply was 13.8 volts. Frequency was measured with a HP 5385A digital frequency counter connected to the transmitter through a power attenuator. Measurements were made on Channel 9, 27.065 MHz. No transient keying effects were observed.

G. FREQUENCY STABILITY (Continued)

TABLE 3

<u>Temperature</u>	<u>Output Frequency, MHz</u>
-29.7	
-19.6	27.065133
- 9.9	27.065169
0.2	27.065198
10.4	27.065182
20.2	27.065133
30.5	27.065061
40.1	27.064995
49.9	27.064956
	27.064869
Maximum frequency error:	27.065198
	<u>27.065000</u>
	+ .000198 MHz

FCC Rule 95.625(b) specifies .005% or a maximum of $\pm .001353$ MHz.

G. FREQUENCY STABILITY AS A FUNCTION OF SUPPLY VOLTAGE
(Paragraph 2.995(d)(2) of the Rules)

Oscillator frequency as a function of power supply voltage was measured with a HP 5385A digital frequency counter as supply voltage provided by an HP 6264B variable dc power supply was varied $\pm 15\%$ from the nominal 13.8 volt rating. A Keithley 197 digital voltmeter was used to measure supply voltage at transmitter primary input terminals. Measurements were made at 20°C ambient.

TABLE 4

<u>Supply Voltage</u>	<u>Output Frequency, MHz</u>
15.87	
15.19	27.065067
14.49	27.065065
13.80	27.065063
13.11	27.065061
12.42	27.065059
11.73	27.065058
	27.065056
Maximum frequency error:	27.065067
	<u>27.065000</u>
	+ .000067 MHz

FCC Rule 95.625(b) specifies .005% or a maximum of $\pm .0001353$ MHz.
No effects on frequency related to keying the unit were observed.

H. ADDITIONAL REQUIREMENTS FOR TYPE ACCEPTANCE
(Paragraph 95.665 of the Rules)

The TRC-446 meets the applicable provision of 95.665(a).

External controls are limited to the following per 95.665(a):

1. Primary power connection
2. Microphone
3. RF output power connection
4. External speaker jack
5. On-off switch (combined with receiver volume control)
6. Not applicable, AM only
7. Not applicable, AM only
8. Transmitting frequency selector
9. Transmit-receive switch
10. See #1
11. Not applicable

The serial number of each unit will be implemented in accordance with 95.667.

A copy of Part 95, Subpart D, of the FCC rules for the Citizens Band Radio Service, current at the time of packing of the transmitter, must be furnished with each CB transmitter marketed per 95.669.

I. PLL RESTRICTIONS (Per Public Notice of April 27, 1978)

The TRC-446 meets the following conditions specified:

1. All frequency-determining elements, including crystals, PLL integrated circuits and channel selector switches are permanently wired and soldered in place.
2. The PLL integrated circuit division ratio selection is BCD coded. All the 40 channels are mask programmed into the CPU and can not be changed.
3. Channel selection is controlled by the masked program of the CPU and has only 40 positions for use in the US.
4. All the undedicated leads in the CPU and PLL integrated circuits are disabled and not serviceable by the user.
5. A copy of the PLL data sheet is shown in Appendix 9.