


APPROVED: _____
CHECKED: _____

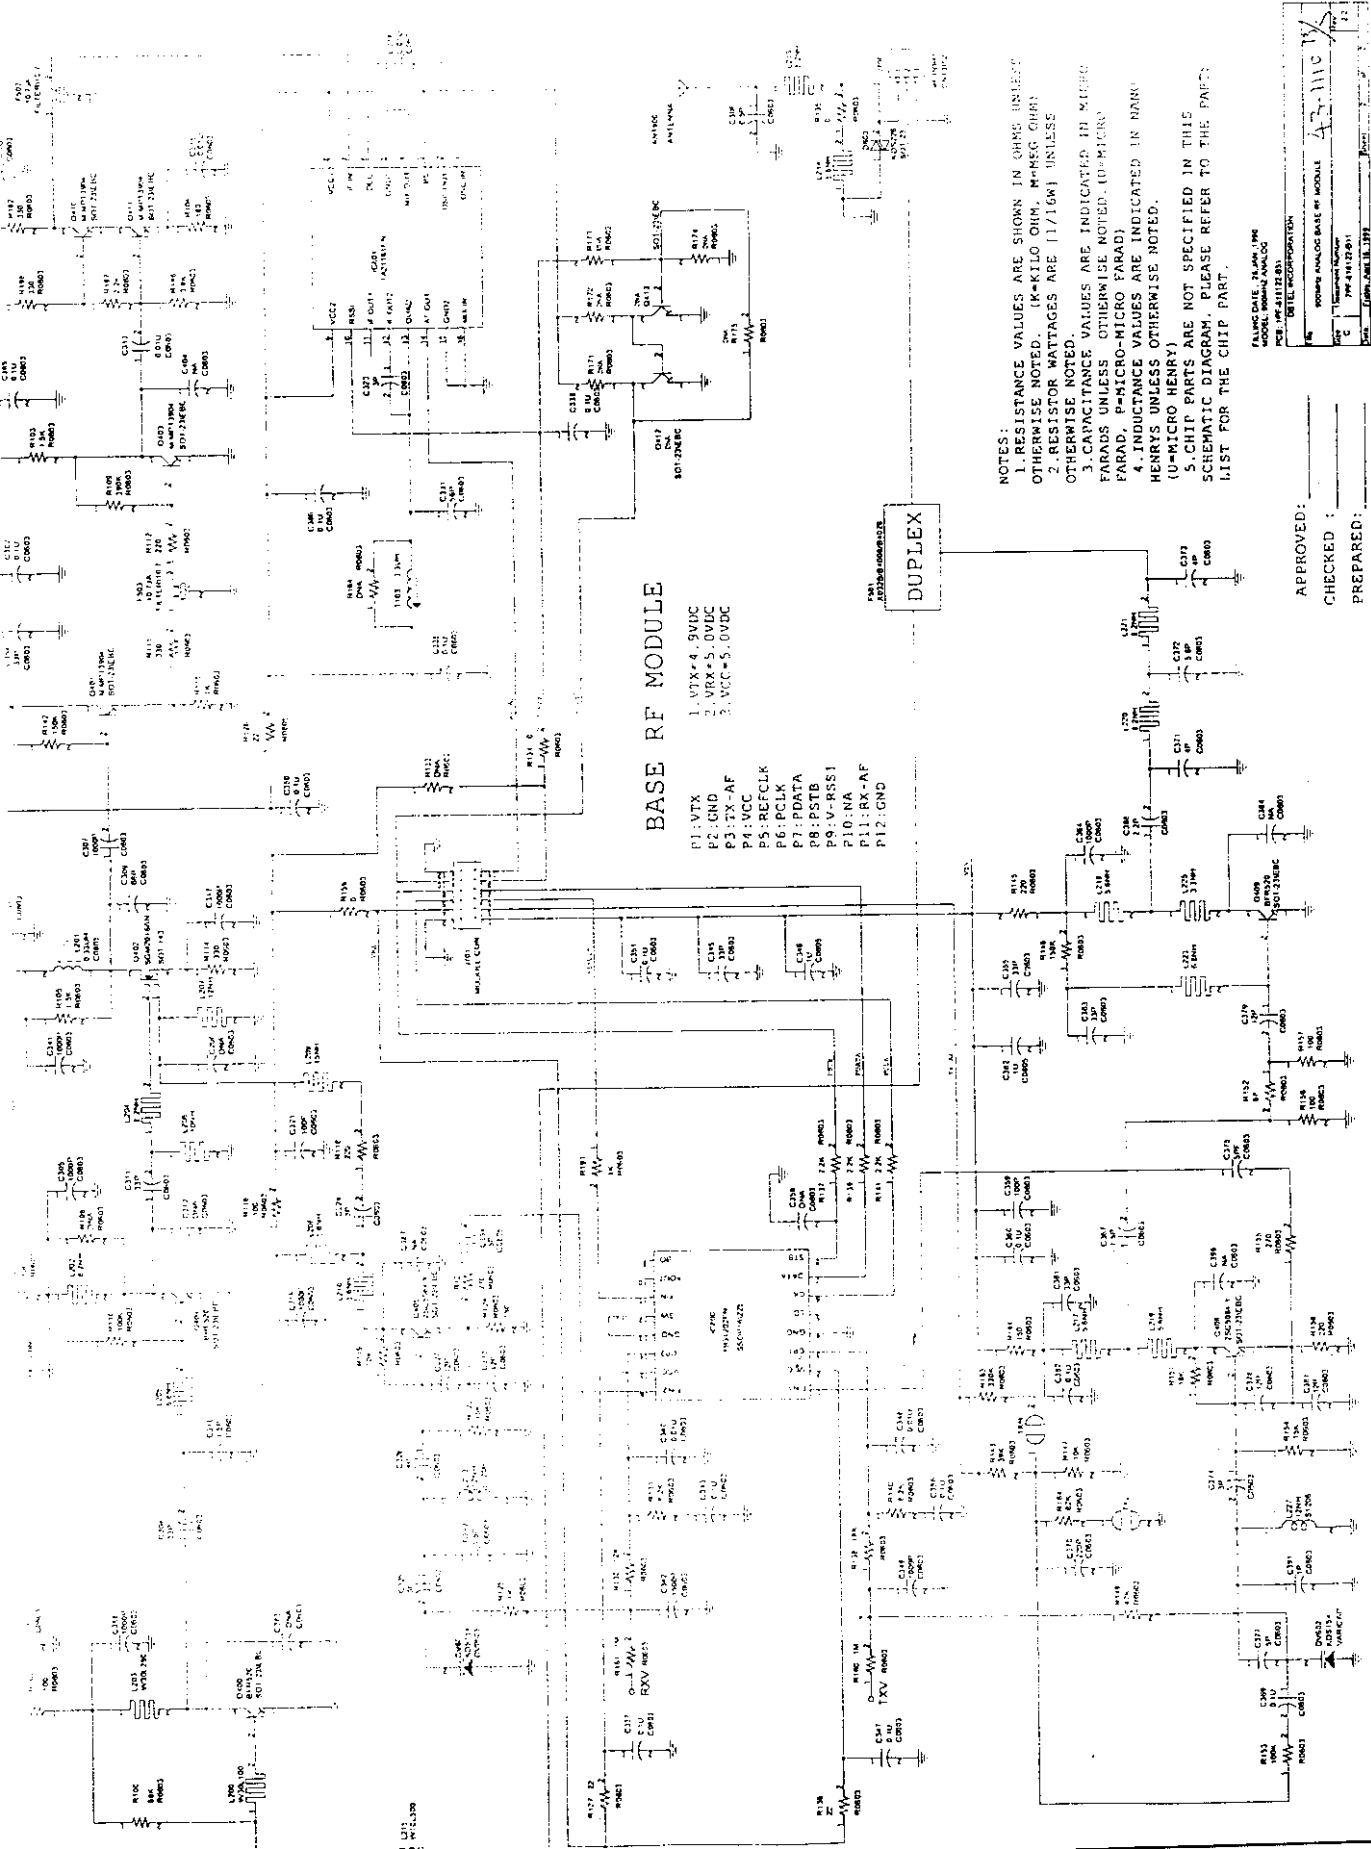


BASE RF MODULE

- 1. VTX = 4.5VDC
- 2. VCC = 5.0VDC
- 3. VCC2 = 5.0VDC
- P1: VTX
- P2: GND
- P3: TX - AF
- P4: VCC
- P5: REFCLK
- P6: PCLK
- P7: PDATA
- P8: PSTB
- P9: V-RSSI
- P10: NA-RSSI
- P11: RX - AF
- P12: GND

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
 2. RESISTOR WATTAGES ARE (1/16W) UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (U=MICRO FARAD, P=PICO-FARAD)
 4. INDUCTANCE VALUES ARE INDICATED IN NANO HENRYS UNLESS OTHERWISE NOTED.
 5. CHIP PARTS ARE NOT SPECIFIED IN THIS SCHEMATIC DIAGRAM. PLEASE REFER TO THE PARTS LIST FOR THE CHIP PART.

DATE: 12-01-1996
 BY: [Signature]
 FOR: [Signature]
 TITLE: [Signature]
 APPROVED: [Signature]
 CHECKED: [Signature]
 PREPARED: [Signature]

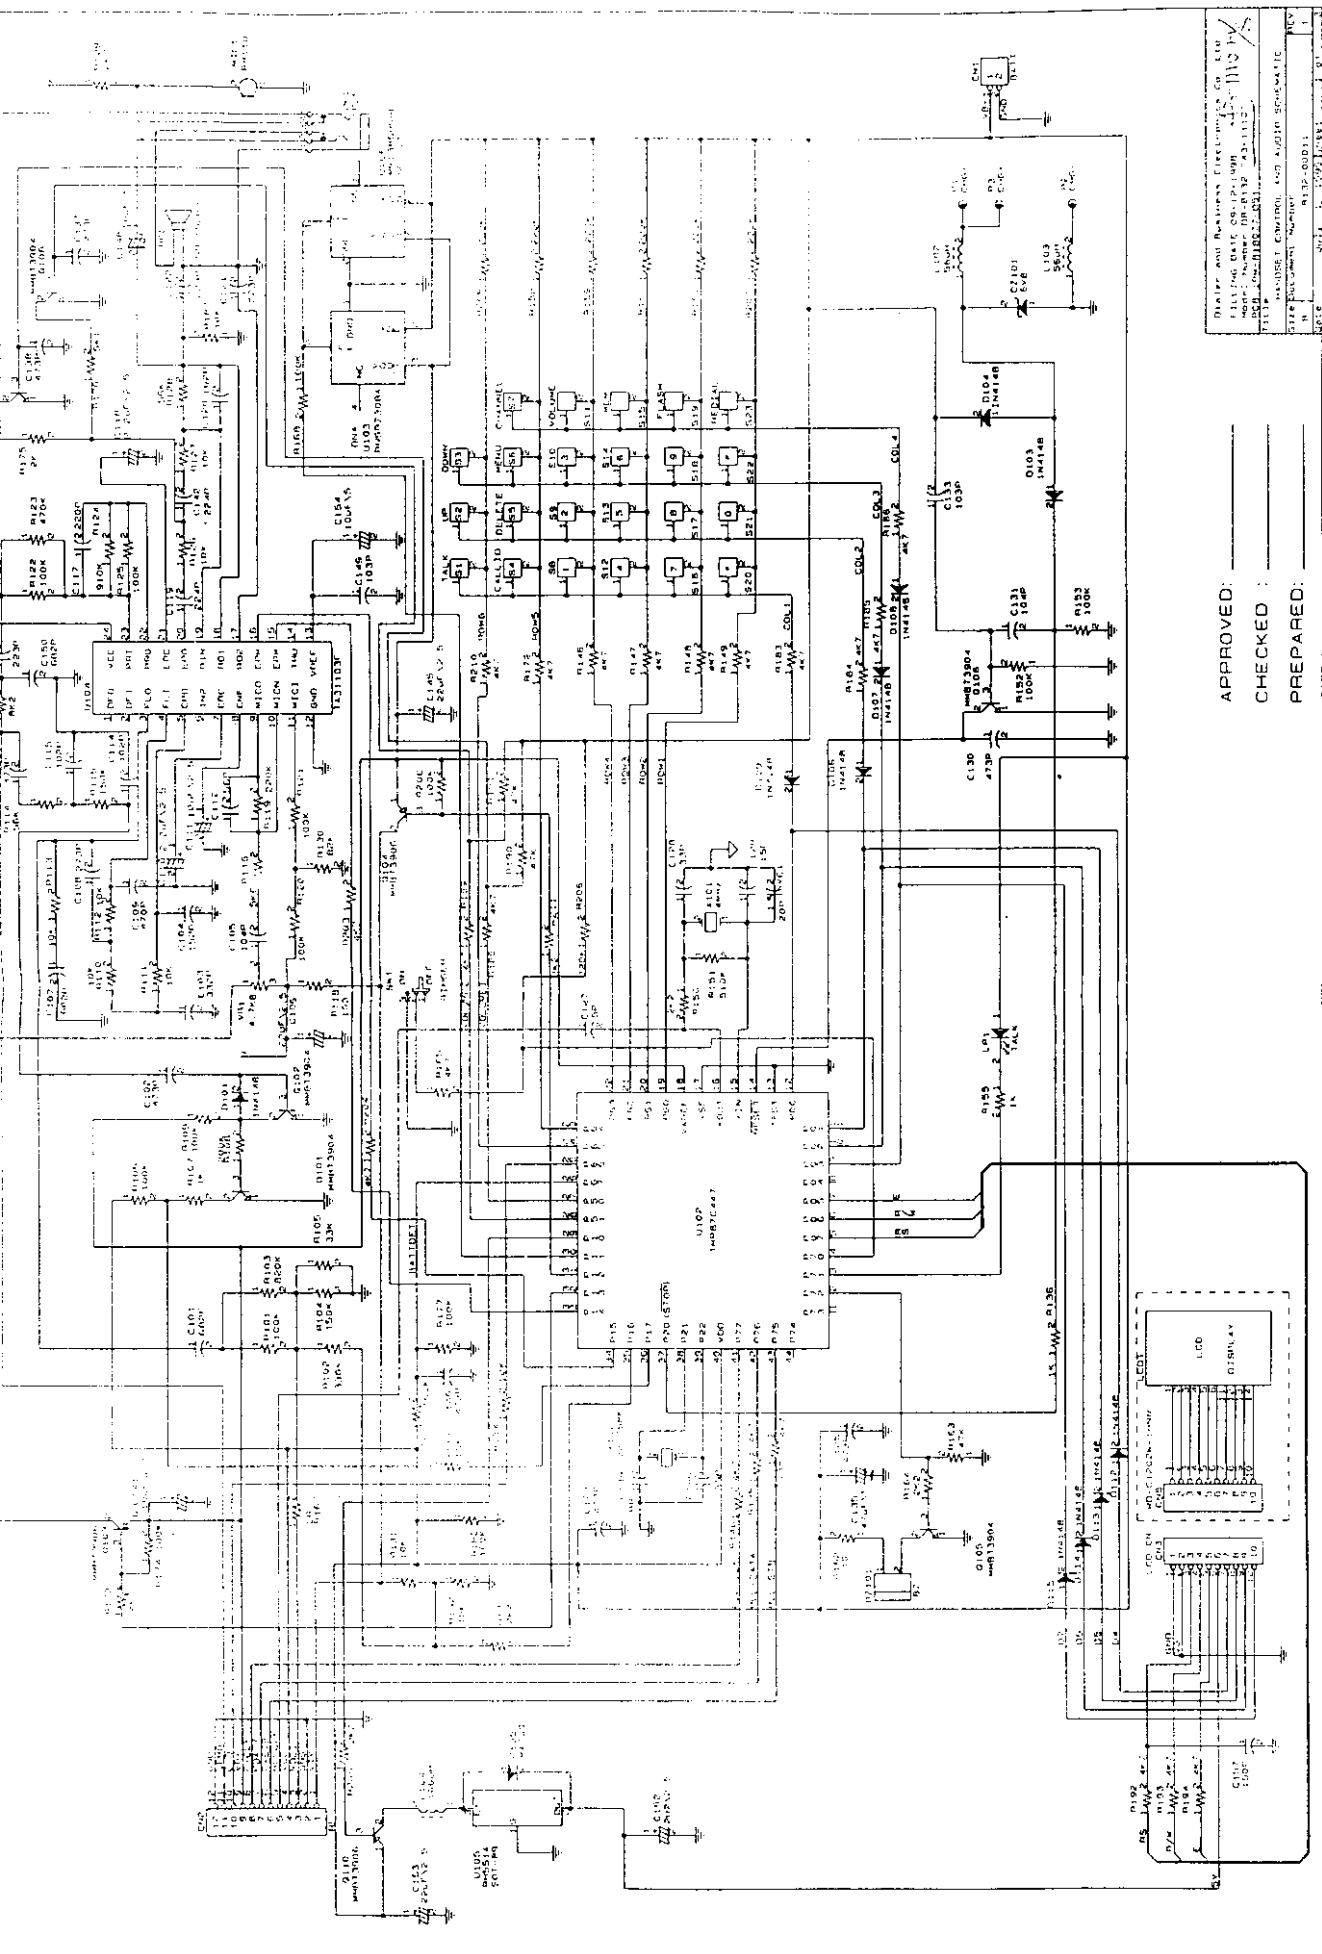

DATE: 10/10/2011
DESIGNED BY: [Signature]
CHECKED BY: [Signature]
PREPARED BY: [Signature]
REVIEWED BY: [Signature]
APPROVED BY: [Signature]

APPROVED: _____
CHECKED: _____
PREPARED: _____

DATE: 10/10/2011
DESIGNED BY: [Signature]
CHECKED BY: [Signature]
PREPARED BY: [Signature]
REVIEWED BY: [Signature]
APPROVED BY: [Signature]

