





APPENDIX C***DIAGRAMS, CHARTS AND PHOTOS***

FIGURE 1: CONDUCTED EMISSIONS TEST SETUP



SKETCH

FCC ID'S: AMWUC650, AJXSG1000, AAO4301119

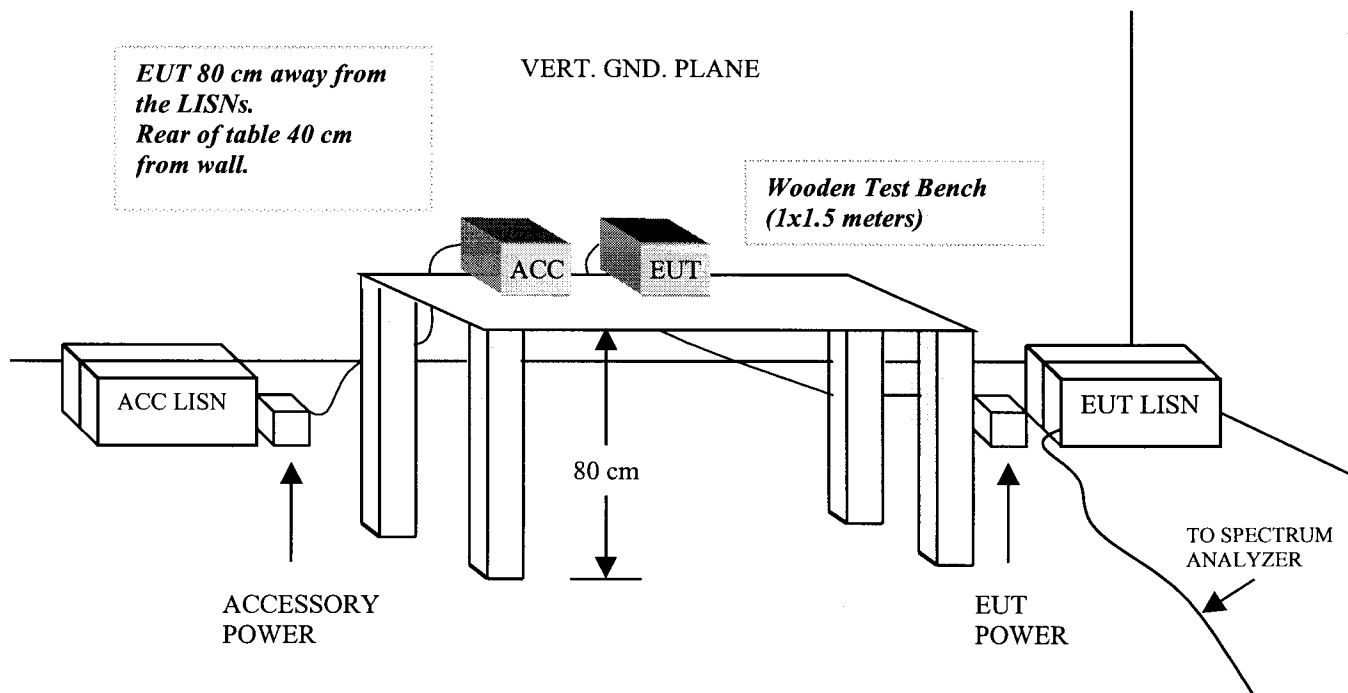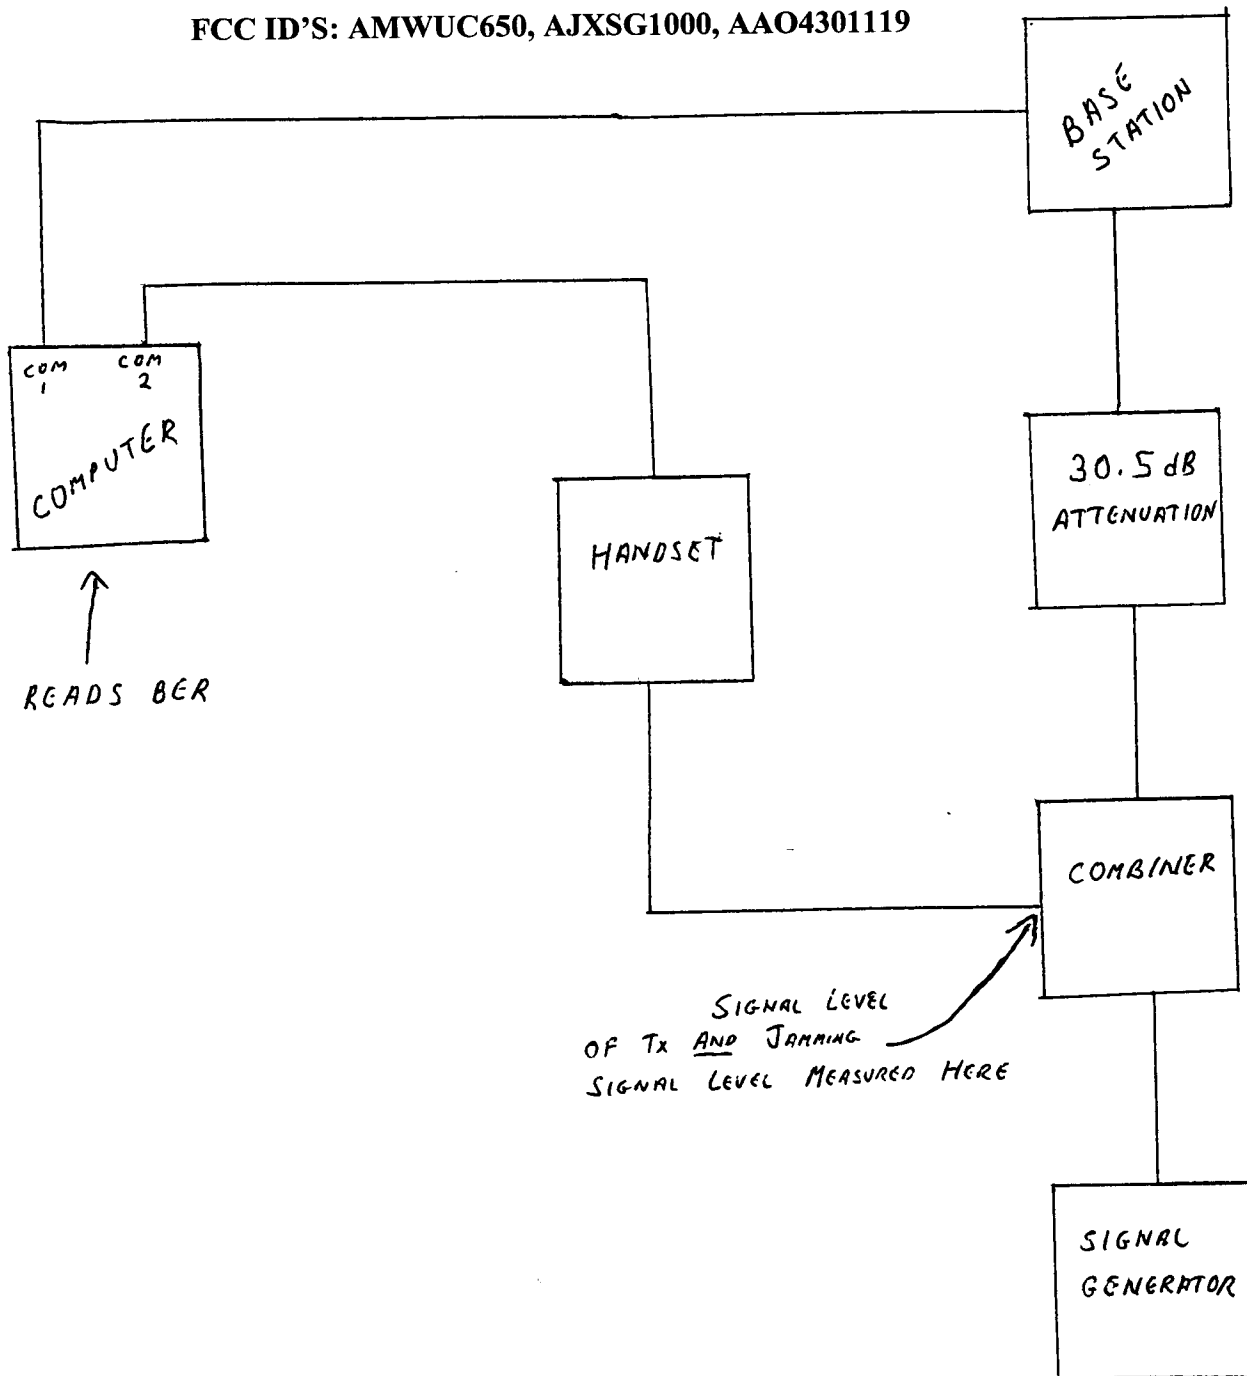


NOTE: FOR HANDSET OUTPUT TO BASE STATION INPUT
JUST SWAP THE BASE STATION AND HANDSET LOCATIONS

FIGURE 1A

FIGURE 2: PLOT MAP AND LAYOUT OF RADIATED SITE

OPEN LAND > 15 METERS

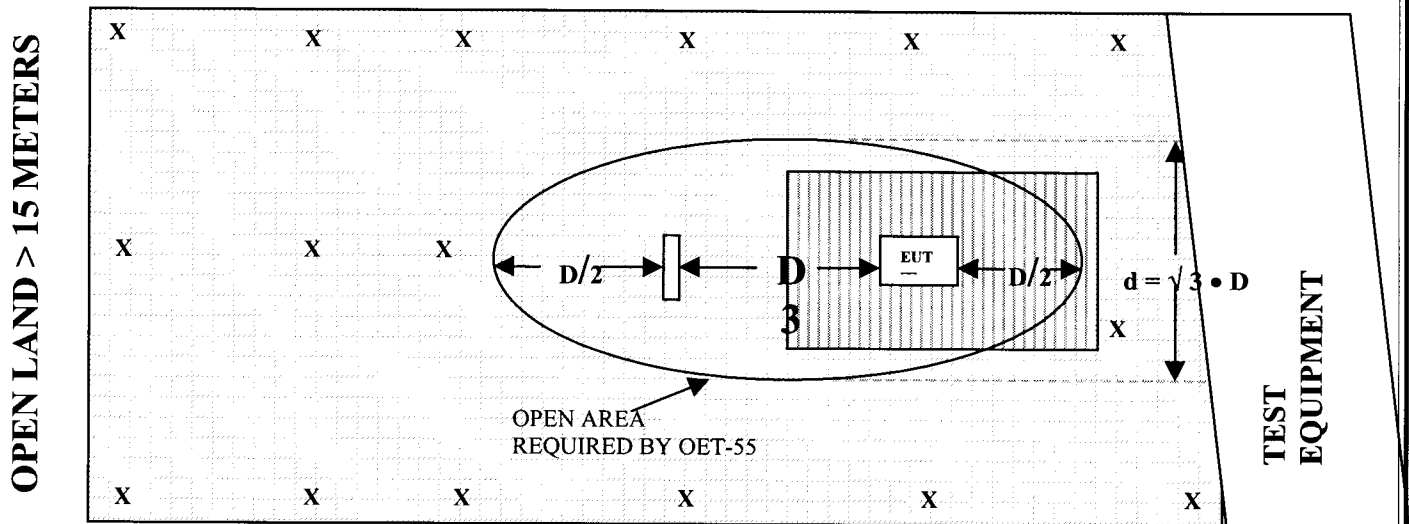

OPEN LAND > 15 METERS

X	= GROUND RODS		= GROUND SCREEN
D	= TEST DISTANCE (meters)		= WOOD COVER






**COMPATIBLE
ELECTRONICS**

FCC ID'S: AMWUC650, AJXSG1000, AAO4301119

Cal: 10/15/98


LAB "D" BICONICAL ANTENNA AB-100 S/N 01548

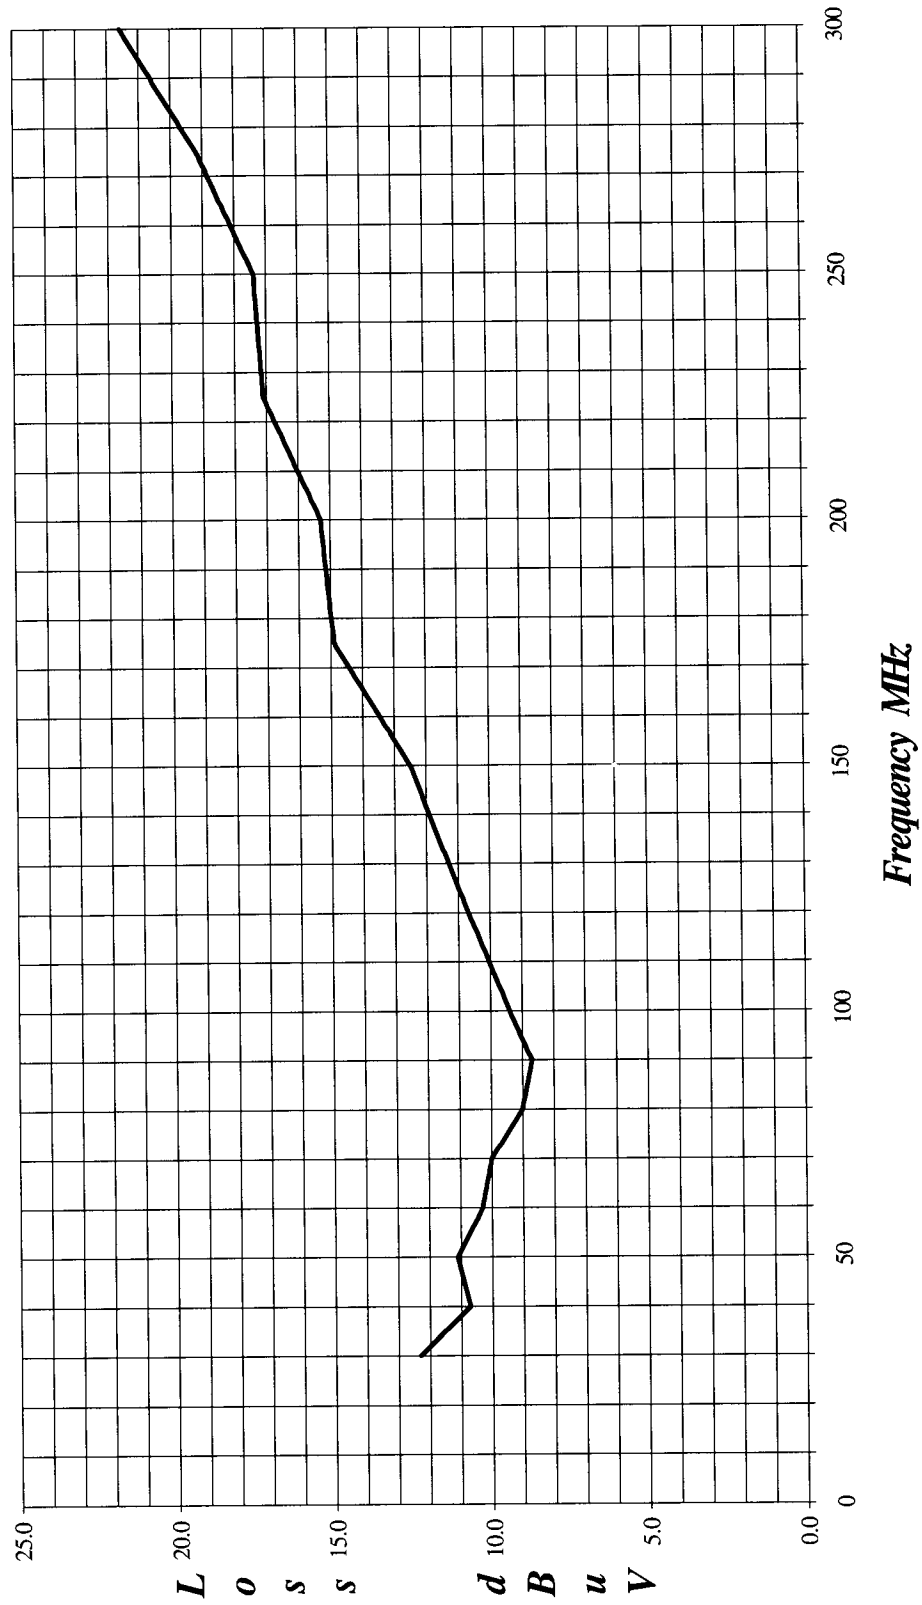



Cal: 10/15/98

LAB "D" LOG PERIODIC ANTENNA AL-100 S/N 01117

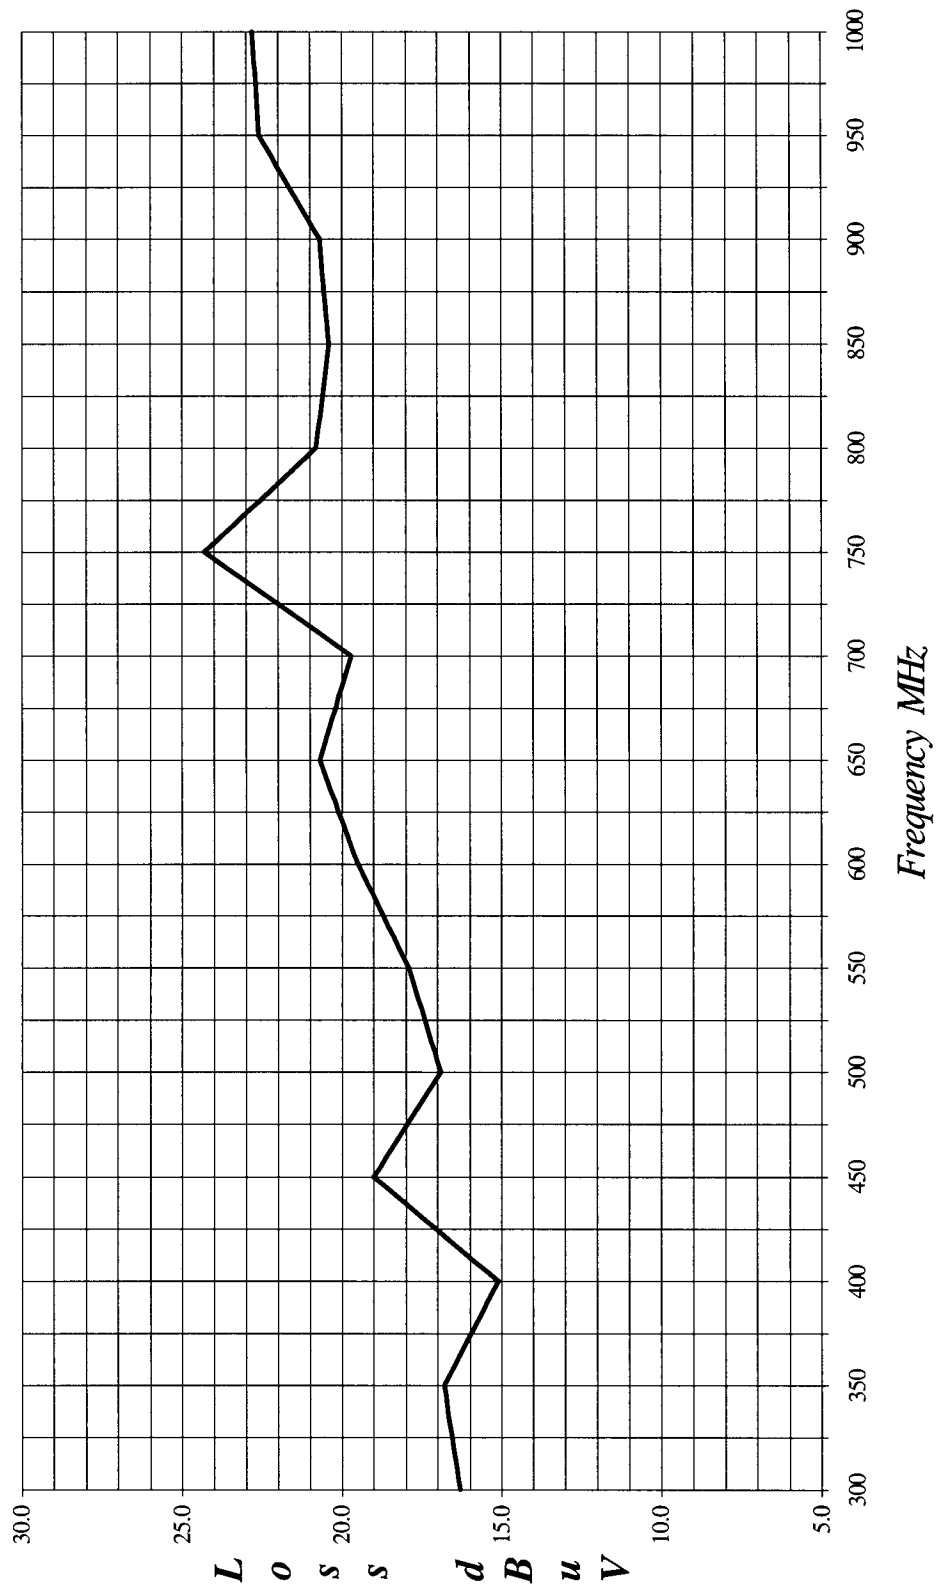




Effective Gain = Preamplifier Gain - Cable Loss

Lab "D" Effective: 1/16/99

PREAMPLIFIER EFFECTIVE GAIN AT 3 METERS PA-102 S/N: 1017

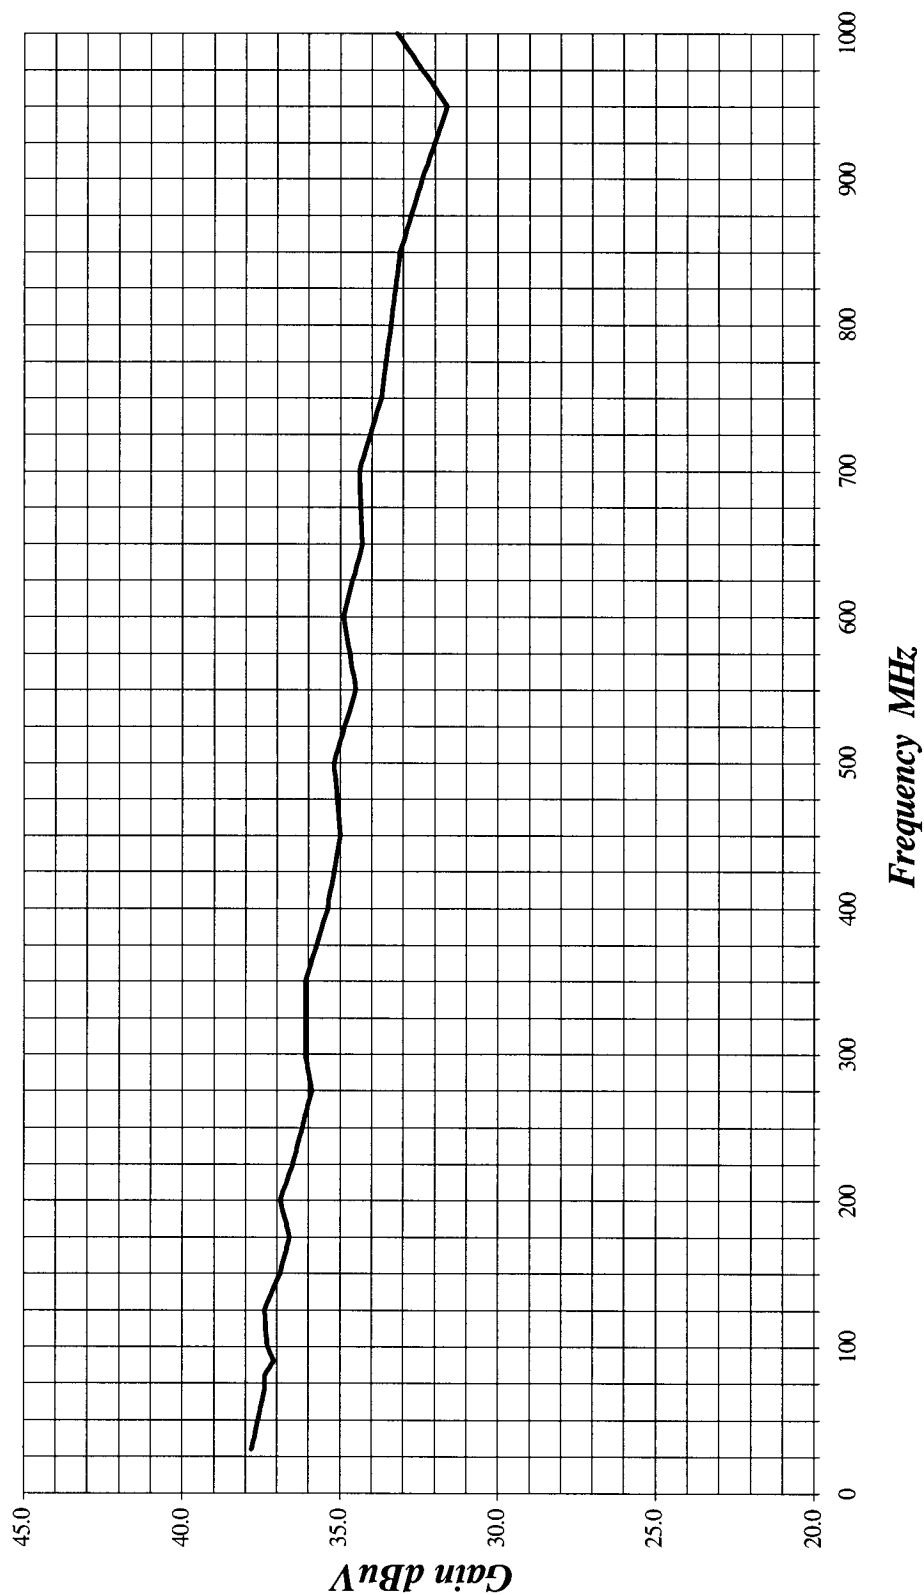



HEWLETT PACKARD 8449B
MICROWAVE PREAMPLIFIER

S/N: 3008A008766

CALIBRATION DATE: JANUARY 30, 1999

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	36.9	9.5	34.3
1.1	36.3	10.0	33.7
1.2	36.4	10.5	34.1
1.3	36.2	11.0	33.7
1.4	36.3	11.5	34.0
1.5	35.7	12.0	33.9
1.6	35.9	12.5	34.4
1.7	35.7	13.0	32.9
1.8	35.6	13.5	31.6
1.9	35.5	14.0	31.8
2.0	35.4	14.5	31.9
2.5	35.6	15.0	32.2
3.0	35.2	15.5	32.8
3.5	35.2	16.0	32.4
4.0	34.3	16.5	32.1
4.5	34.1	17.0	32.3
5.0	34.3	17.5	30.3
5.5	33.0	18.0	31.5
6.0	34.1	18.5	31.2
6.5	34.5	19.0	32.2
7.0	34.3	19.5	32.0
7.5	33.9	20.0	32.0
8.0	34.5	20.5	33.2
8.5	34.5	21.0	30.9
9.0	34.4	22.0	32.1



E-FIELD ANTENNA FACTOR CALIBRATION

$$E(\text{dB V/m}) = V_o(\text{dB V}) + AFE(\text{dB/m})$$

Model number : DRG-118/A

Frequency GHz	AFE dB/m	Gain dBi
1	22.3	8.0
2	26.7	9.5
3	29.7	10.1
4	29.5	12.8
5	32.3	12.0
6	32.4	13.4
7	36.1	11.0
8	37.4	10.9
9	36.8	12.5
10	39.5	10.7
11	39.6	11.5
12	39.8	12.0
13	39.7	12.8
14	41.8	11.3
15	41.9	11.9
16	38.1	16.3
17	41.0	13.9
18	46.5	8.9

Serial number : 1053
Job number : 96-092
Remarks : 3 meter calibration
Standards : LPD-118/A, TE-1000

Temperature : 72° F
Humidity : 56 %
Traceability : A01887
Date : December 08, 1995

Calibrated By

**Com-Power Corporation**

(949) 587-9800

Antenna Calibration

Antenna Type:		Loop Antenna	
Model:		AL-130	
Serial Number:		25309	
Calibration Date:		4/13/99	
Frequency MHz	Magnetic (dB/m)	Electric dB/m	
0.01	-40.6	10.9	
0.02	-41.5	10.0	
0.03	-39.9	11.6	
0.04	-40.2	11.3	
0.05	-41.5	10.0	
0.06	-41.1	10.4	
0.07	-41.3	10.2	
0.08	-41.6	9.9	
0.09	-41.7	9.8	
0.1	-41.7	9.8	
0.2	-44.0	7.5	
0.3	-41.6	9.9	
0.4	-41.6	9.9	
0.5	-41.7	9.8	
0.6	-41.5	10.0	
0.7	-41.4	10.1	
0.8	-41.5	10.0	
0.9	-41.6	9.9	
1	-41.2	10.3	
2	-40.5	11.0	
3	-40.8	10.7	
4	-41.0	10.5	
5	-40.5	11.0	
6	-40.5	11.0	
7	-40.7	10.8	
8	-40.8	10.7	
9	-40.1	11.4	
10	-40.4	11.1	
12	-41.0	10.5	
14	-42.1	9.4	
15	-42.3	9.2	
16	-42.7	8.8	
18	-41.0	10.5	
20	-41.1	10.4	
25	-43.4	8.1	
30	-45.3	6.2	

Trans. Antenna Height	2 meter
Receiving Antenna Height	2 meter

FCC ID'S: AMWUC650, AJXSG1000, AAO4301119

ANTENNA RESEARCH
11317 Frederick Avenue, Beltsville, MD 20705, USA
TEL: (301)937-8888 FAX: (301)937-2796

E-FIELD ANTENNA FACTOR CALIBRATION

$$E \text{ (dB V/m)} = V_o \text{ (dB V)} + AFE \text{ (dB 1/m)}$$

Model Number : MWH-1826/B

Frequency (GHz)	AFE (dB 1/m)	Gain (dBi)
18.000	23.1	32.2
18.850	23.2	32.5
19.700	23.6	32.5
20.550	23.5	33.0
21.400	23.7	33.1
22.250	24.0	33.2
23.100	24.0	33.5
23.950	24.1	33.7
24.800	24.1	34.0
25.650	24.3	34.1
26.500	24.4	34.3

Serial Number : 1004