


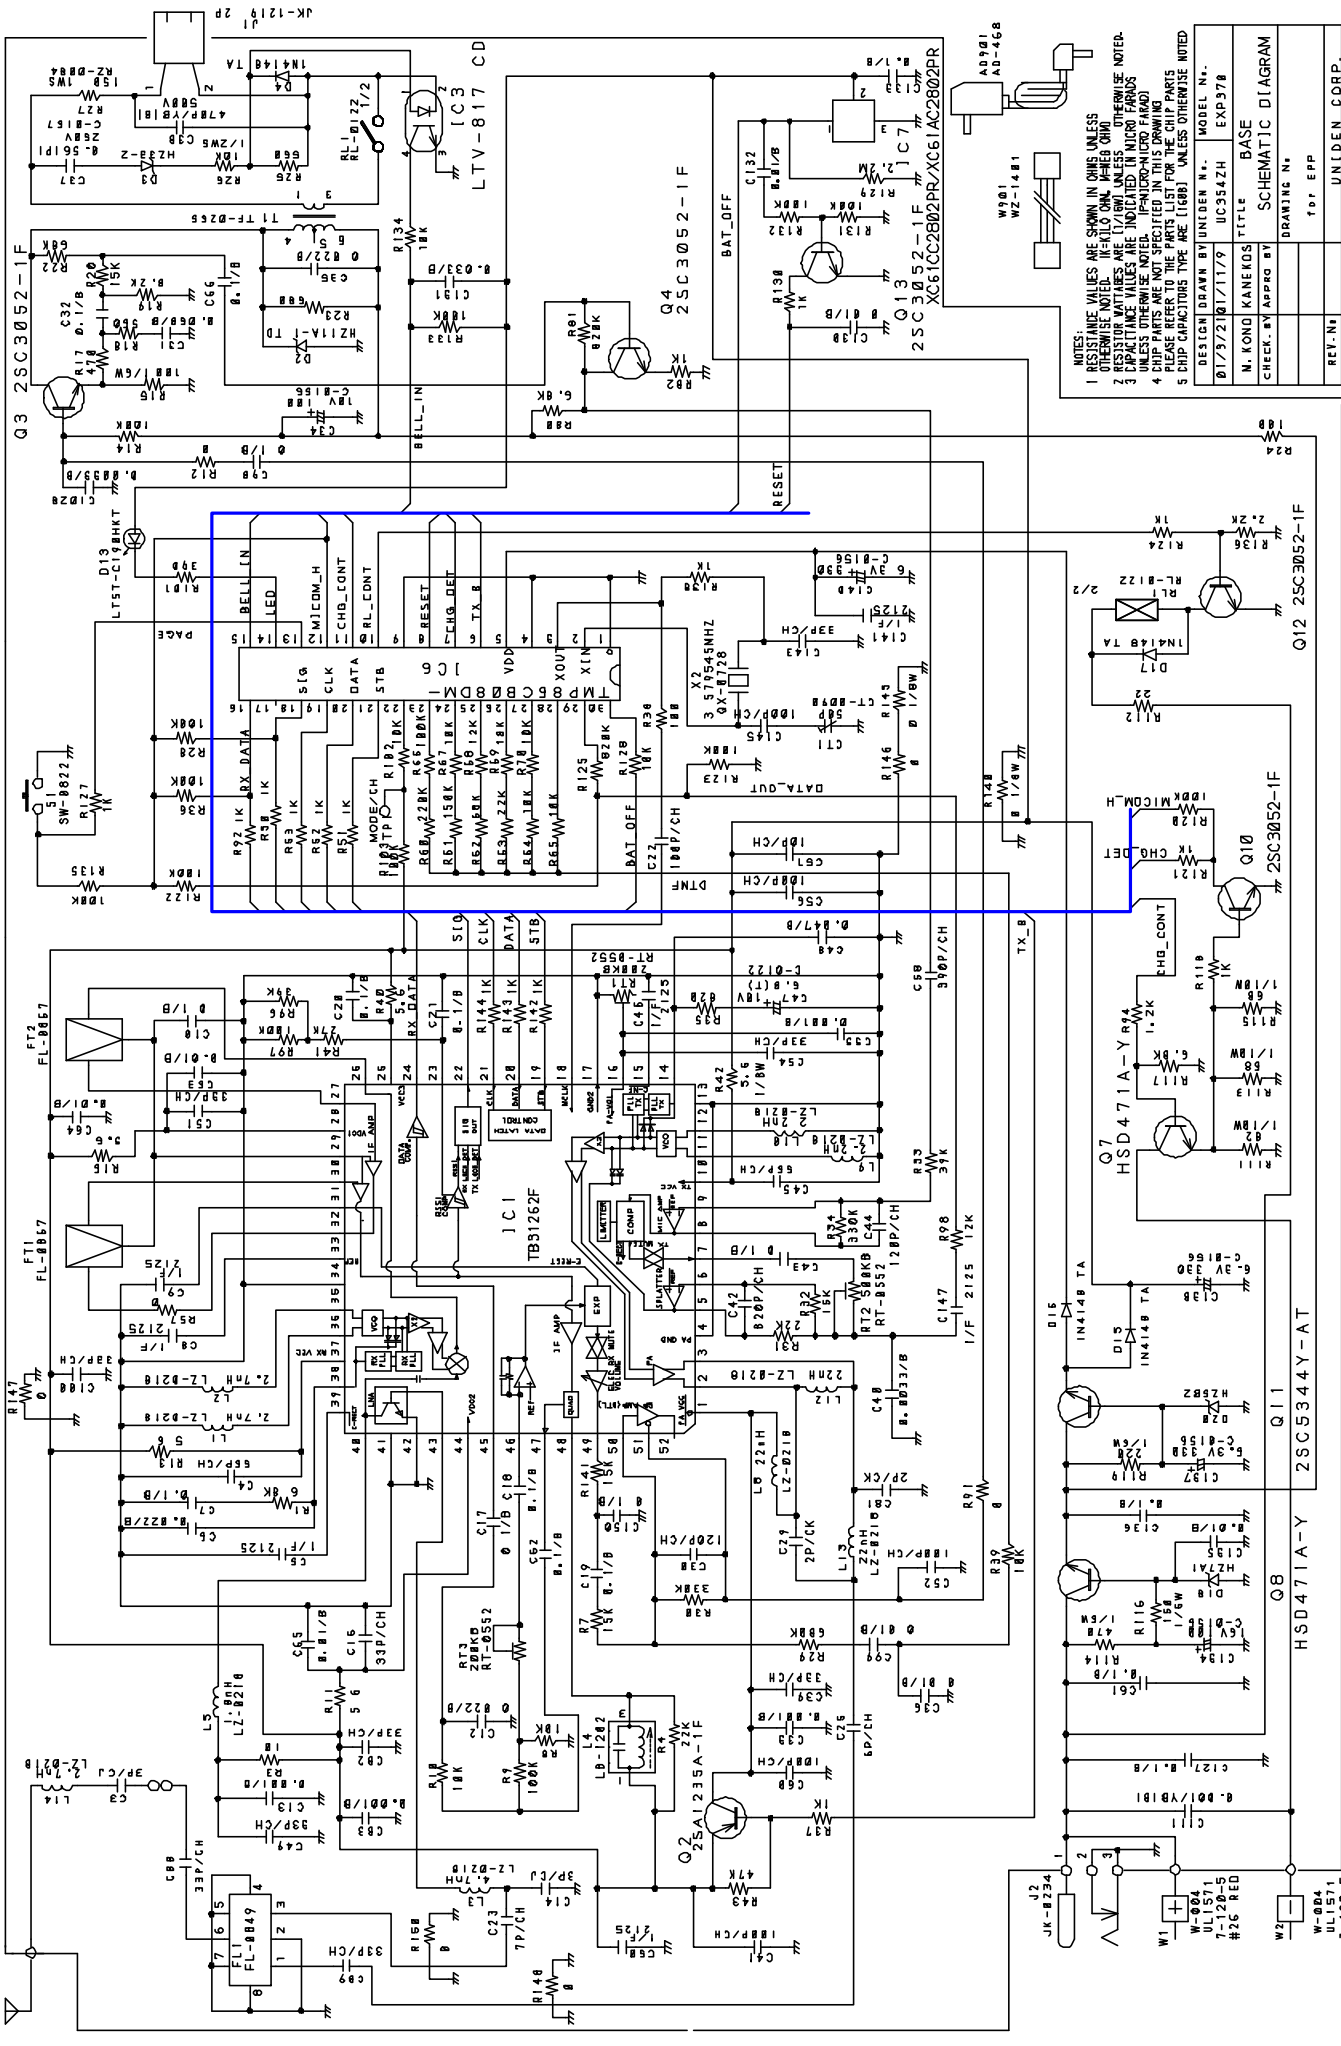

NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. IN-KILO OHMS ARE SHOWN AS "K" UNLESS OTHERWISE NOTED.
2. RESISTOR RATINGS ARE 1/4W UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE IN MICROFARADS UNLESS OTHERWISE NOTED.
4. UNLESS OTHERWISE NOTED, ALL CAPACITORS ARE POLYPROPYLENE FILM.
5. PLEASE REFER TO THE PARTS LIST FOR THE CHIP PARTS.

DESIGN DRAWN BY: UNIDEN N.Y. MODEL N.Y.
 Q1/Q2: 2SC3052-1F
 Q3: 2SC3052-1F
 Q4: 2SC3052-1F
 Q5: 2SC3052-1F
 Q6: 2SC3052-1F
 Q7: HSD471A-Y
 Q8: HSD471A-Y
 Q9: 2SC3052-1F
 Q10: 2SC3052-1F
 Q11: 2SC5344Y-AT

REV. NO.	DATE	BY	CHKD.	APP'D.	TITLE	BASE
1	07/30/90	W. KONO	KANEKOS	UNIDEN	SCHEMATIC DIAGRAM	EXP-978

UNIDEN CORP.

