





CSA/FCC MARK Regulatory Label
iBTS MONO (ref: P0606560)

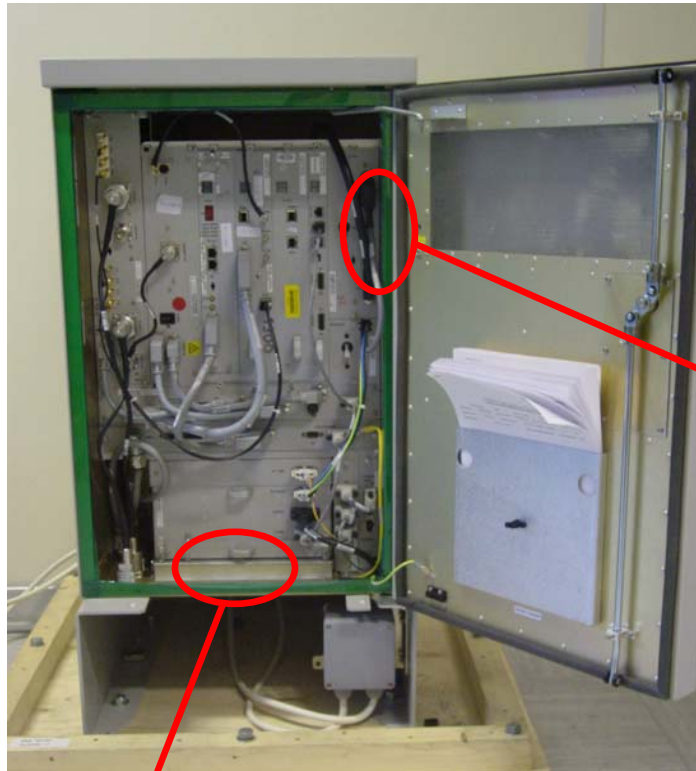

PCM Protection Label (ref: P0937414)

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE EXPRESSED IN MILLIMETERS. TOLERANCES SHALL BE:
1 DECIMAL PLACE = ± 0.5
2 DECIMAL PLACES = ± 0.25
3 DECIMAL PLACES = ± 0.125
ALL LABEL CORNERS SHALL HAVE A 0.75 RADIUS.
2. TO CONVERT MILLIMETERS TO INCHES:
25.40 MILLIMETERS = 1 INCH.
3. THIS DESIGN FILE WAS CREATED IN ACCORDANCE WITH NT STD 1517.20. LABEL/ARTWORKS MUST BE MANUFACTURED IN ACCORDANCE WITH NPS90942.
4. THE ARTWORK SHALL BE PLOTTED AT A MINIMUM OF 1200 DPI. THE TEXT FONT(S) SHALL BE: UNIVERS 67 CONDENSED BOLD PER NPS90942. TEXT ABOVE AND BELOW UL OR CSA SYMBOLS SHALL BE UNIVERS 57 CONDENSED PER NPS90942.
5. MATERIAL: 0.25 CLEAR POLYCARBONATE PER R0115902
FINISH: VELVET/MATTE
ADHESIVE: 0.05 PRESSURE SENSITIVE WITH PEEL OFF LINER PER R0113138
6. COLOURS SHALL CONFORM TO NORTHERN TELECOM OBSERVATIONAL STANDARD 2701.01.
BACKGROUND: BTS LIGHT GREY PER NORTHERN TELECOM STANDARD S-33470
TEXT AND GRAPHICS: NORTEL DARK GRAY PER NORTHERN TELECOM STANDARD S-33310
BACKGROUND AT TOP OF LABEL: NORTEL LIGHT GRAY PER NORTHERN TELECOM STANDARD S-33310
7. LABEL TO BE REVERSE SCREEN PRINTED PER NPS90942-2.

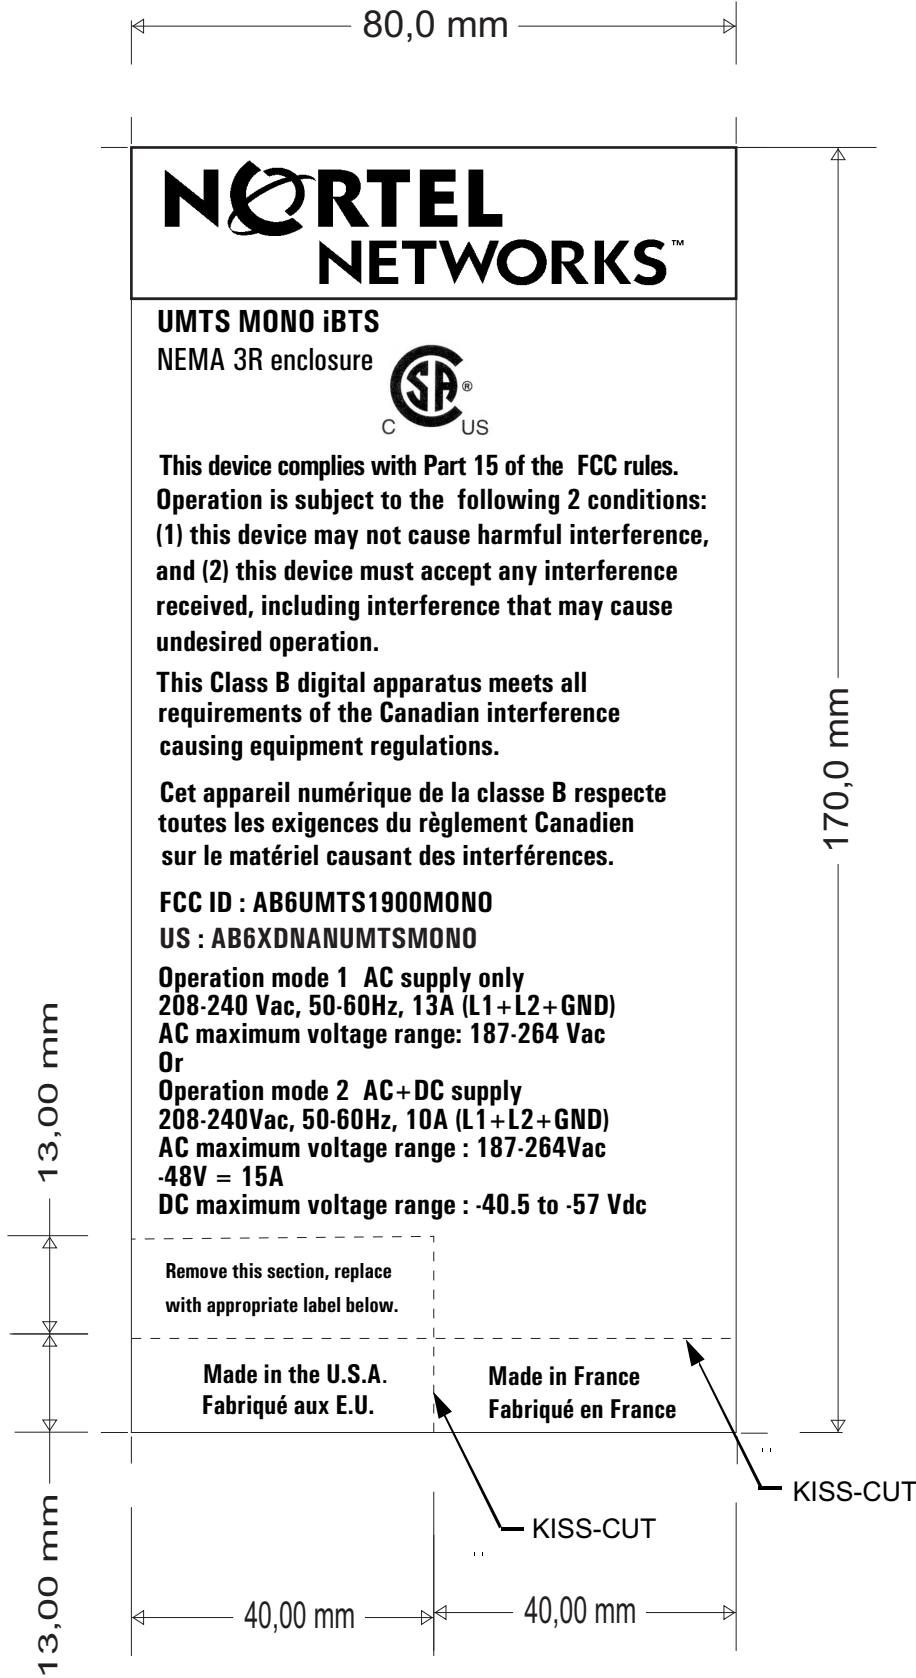

EC: 103-11994
29-08-2003

DRAWN	APPD	STREAM	ISSUE
PD	PD	01	01

PROPRIETARY INFORMATION:
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF NORTEL NETWORKS LIMITED. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY NORTEL NETWORKS LIMITED, THE HOLDER OF THIS DOCUMENT: (1) SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES AND (2) SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.


INITIAL APPLICATION

TITLE

CSA/FCC MARK Regulatory Label
UMTS MONO iBTS

DRAWING NUMBER

P0606560



SCALE

1:1

NORTEL
NETWORKS

SIZE

C

SHEET

1 OF 1

4	3	2	1											
D	NOTES: 1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE EXPRESSED IN MILLIMETERS. TOLERANCE SHALL BE: 1 DECIMAL PLAVE = ± 0.5 2 DECIMAL PLACES = ± 0.25 3 DECIMAL PLACES = ± 0.125 ALL LABEL CORNERS SHALL HAVE A .75 RADIUS. 2. TO CONVERT MILLIMETERS TO INCHES: 25.40 MILLIMETERS = 1 INCH 3. THIS DESIGN FILE WAS CREATED IN ACCORDANCE WITH NT STD 1517.20. LABEL/ARTWORKS MUST BE MANUFACTURED IN ACCORDANCE WITH NPS90942. 4. THE ARTWORK SHALL BE PLOTTED AT A MINIMUM OF 1200 DPI. THE TEXT FONT(S) SHALL BE: UNIVERS 67 CONDENSED BOLD PER NPS90942. 5. MATERIAL: 0.25 CLEAR POLYCARBONATE PER R0115902 FINISH: VELVET/MATTE ADHESIVE: 0.127 PRESSURE SENSITIVE WITH PEEL OFF LINER PER R0114911 6. COLOURS SHALL CONFORM TO NORTHERN TELECOM OBSERVATIONAL STANDARD 2701.01. BACKGROUND: WHITE PER NORTHERN TELECOM STANDARD S-33294 BACKGROUND BEHIND CAUTION SYMBOL AND CAUTION TEXT: CAUTION YELLOW PER NORTHERN TELECOM STANDARD S-33357 TEXT AND GRAPHICS: BLACK PER NORTHERN TELECOM STANDARD S-33154 7. LABEL TO BE REVERSE SCREEN PRINTED PER NPS90942-2.			EC: 103-11850 02-07-2003 <table><tr><td>DRAWN</td><td>APPD</td><td>STREAM</td><td>ISSUE</td></tr><tr><td>HP</td><td>HP</td><td>01</td><td>01</td></tr></table>		DRAWN	APPD	STREAM	ISSUE	HP	HP	01	01	D
	DRAWN	APPD	STREAM	ISSUE										
	HP	HP	01	01										
	C				C									
B	30,0 mm CAUTION For Safety compliance to CSA/UL requirements the following must be respected : · For PCM regular wire connection to the telecommunication network, a CSA/UL Certified secondary protection module must be provided between the iBTS and the telecommunication network (for outdoor cabinet, the protection must be installed inside the iBTS). · For PCM wireless link, a CSA/UL Certified microwave module must be used with the iBTS. 130,0 mm 32,0 mm			B										
A				A										
	INITIAL APPLICATION													
	TITLE PCM Protection label													
	DRAWING NUMBER P0937414		SCALE 1:1											
NORTEL NETWORKS		SIZE C	SHEET 1 OF 1											
COREL 10.0 07/02														
4	3	2	1											