


|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5795 MHz |

### Horizontal

130 dBuV/m

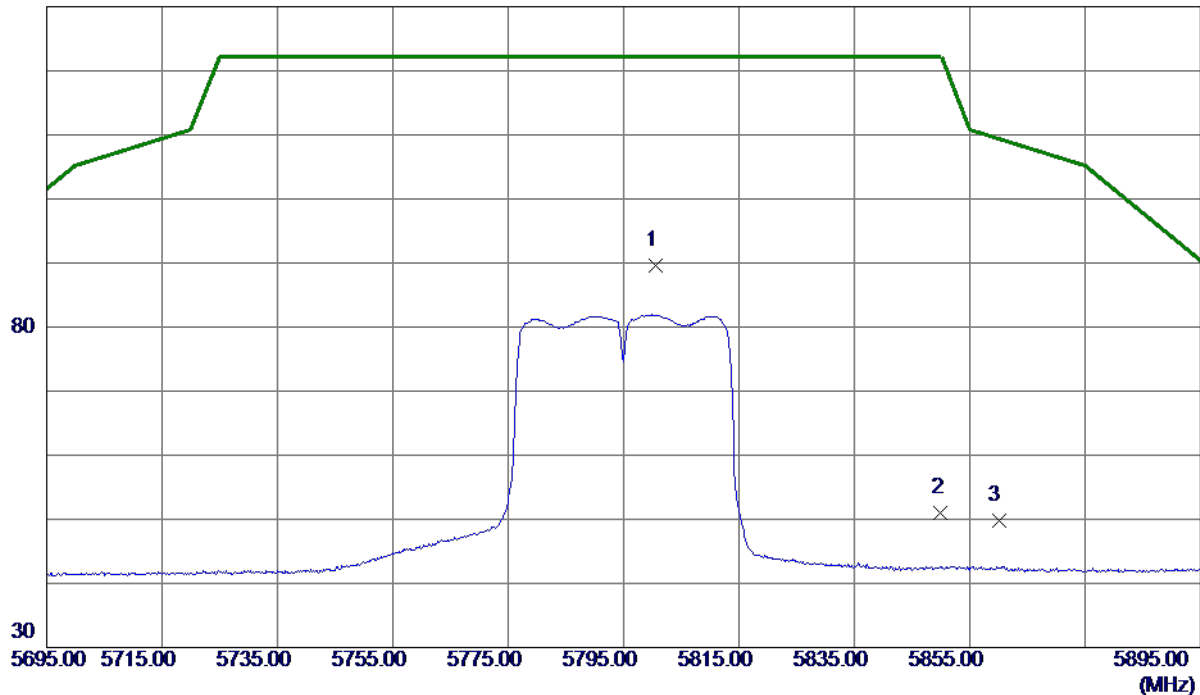

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5800.5000    | 73.78                      | 15.86                   | 89.64                     | 122.20          | -32.56       | Peak     | No Limit |
| 2   | 5850.0000    | 34.99                      | 15.97                   | 50.96                     | 122.20          | -71.24       | Peak     |          |
| 3   | 5860.0000    | 33.86                      | 16.00                   | 49.86                     | 109.40          | -59.54       | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5795 MHz |

### Horizontal

80 dBuV/m

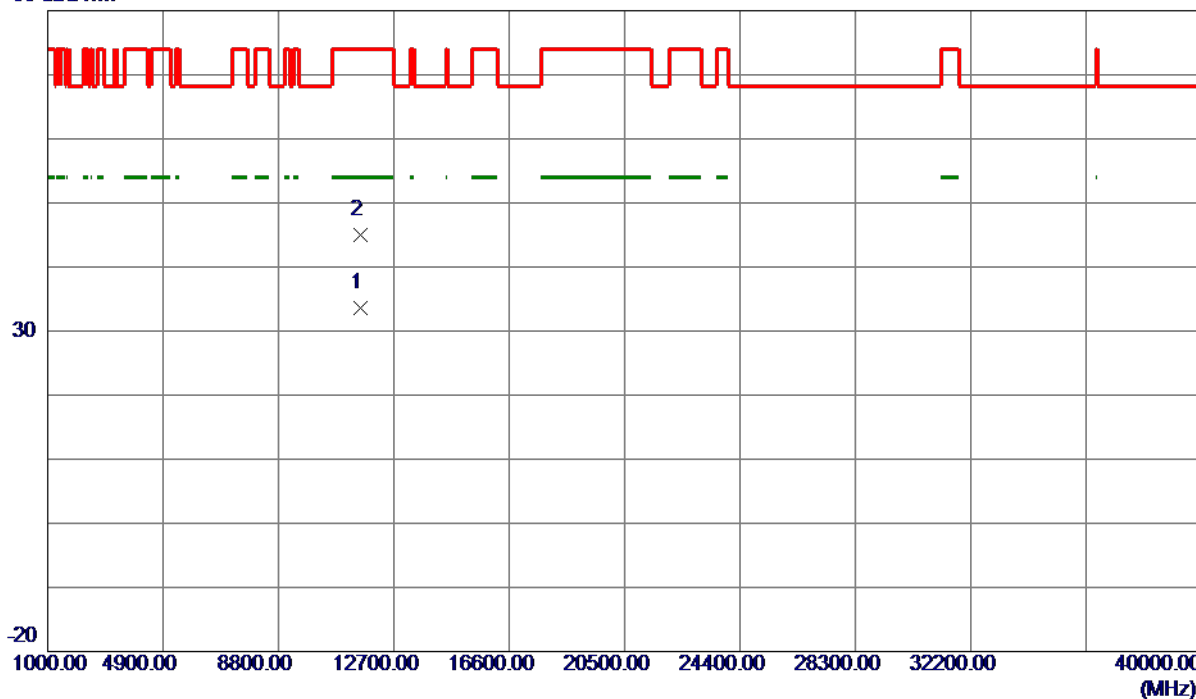

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11590.1550   | 21.46                      | 12.17                   | 33.63                     | 54.00           | -20.37       | AVG      |         |
| 2   | 11590.7650   | 32.82                      | 12.17                   | 44.99                     | 74.00           | -29.01       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5180 MHz |

Vertical

130 dBuV/m

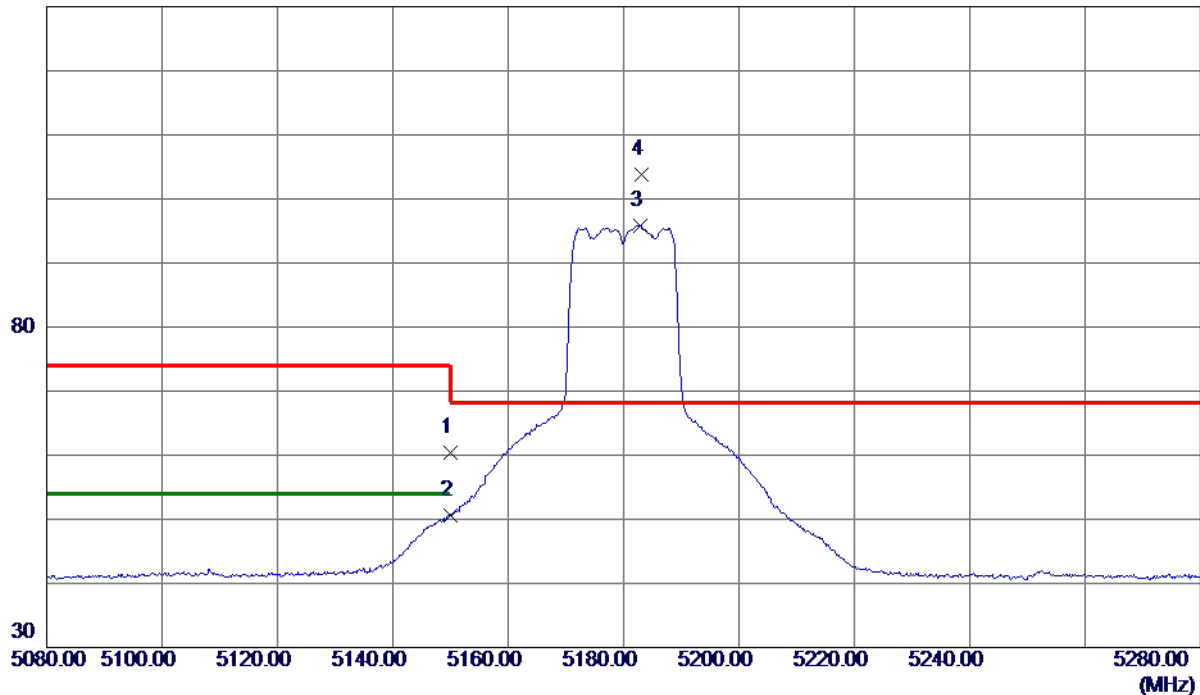

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 46.09                      | 14.32                   | 60.41                     | 74.00           | -13.59       | Peak     |          |
| 2   | 5150.0000    | 36.20                      | 14.32                   | 50.52                     | 54.00           | -3.48        | AVG      |          |
| 3   | 5182.8000    | 81.44                      | 14.39                   | 95.83                     | 999.00          | -903.17      | AVG      | No Limit |
| 4 * | 5183.1000    | 89.43                      | 14.39                   | 103.82                    | 68.30           | 35.52        | Peak     | No Limit |

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5180 MHz |

**Vertical**

80 dBuV/m

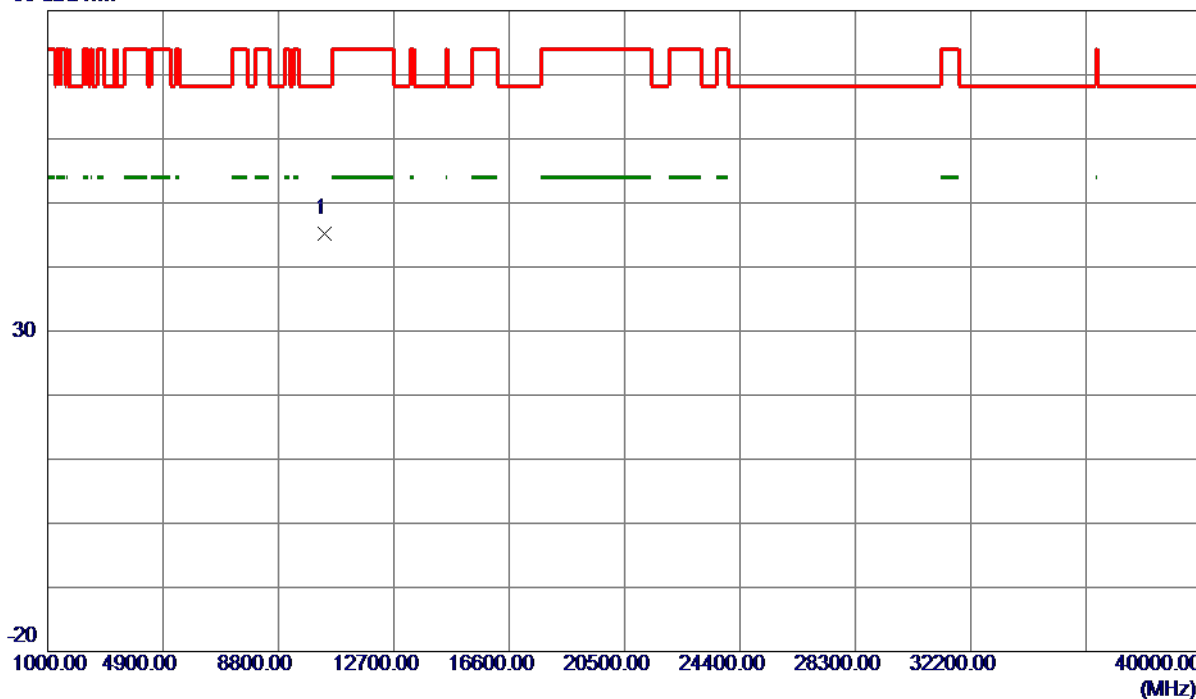

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10357.4300   | 33.83                      | 11.29                   | 45.12                     | 68.30           | -23.18       | Peak     |         |


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5180 MHz |

### Horizontal

130 dBuV/m

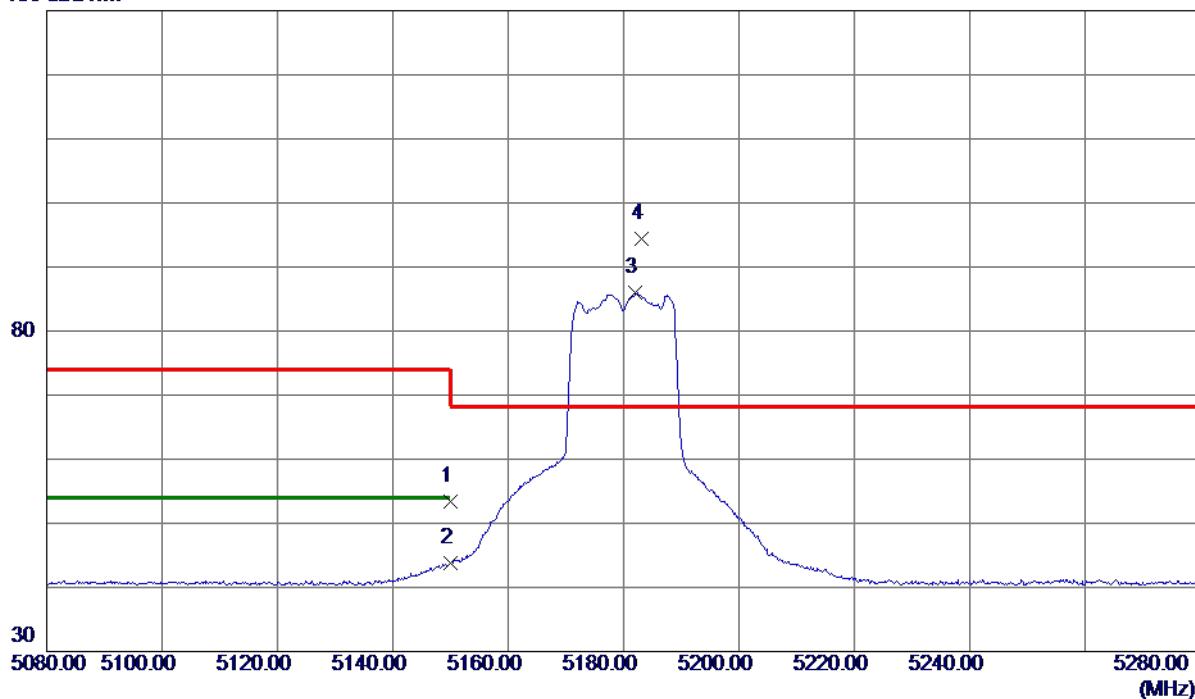

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 39.12                      | 14.32                   | 53.44                     | 74.00           | -20.56       | Peak     |          |
| 2   | 5150.0000    | 29.44                      | 14.32                   | 43.76                     | 54.00           | -10.24       | AVG      |          |
| 3   | 5182.0000    | 71.57                      | 14.39                   | 85.96                     | 999.00          | -913.04      | AVG      | No Limit |
| 4 * | 5183.1000    | 80.06                      | 14.39                   | 94.45                     | 68.30           | 26.15        | Peak     | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5180 MHz |

### Horizontal

80 dBuV/m

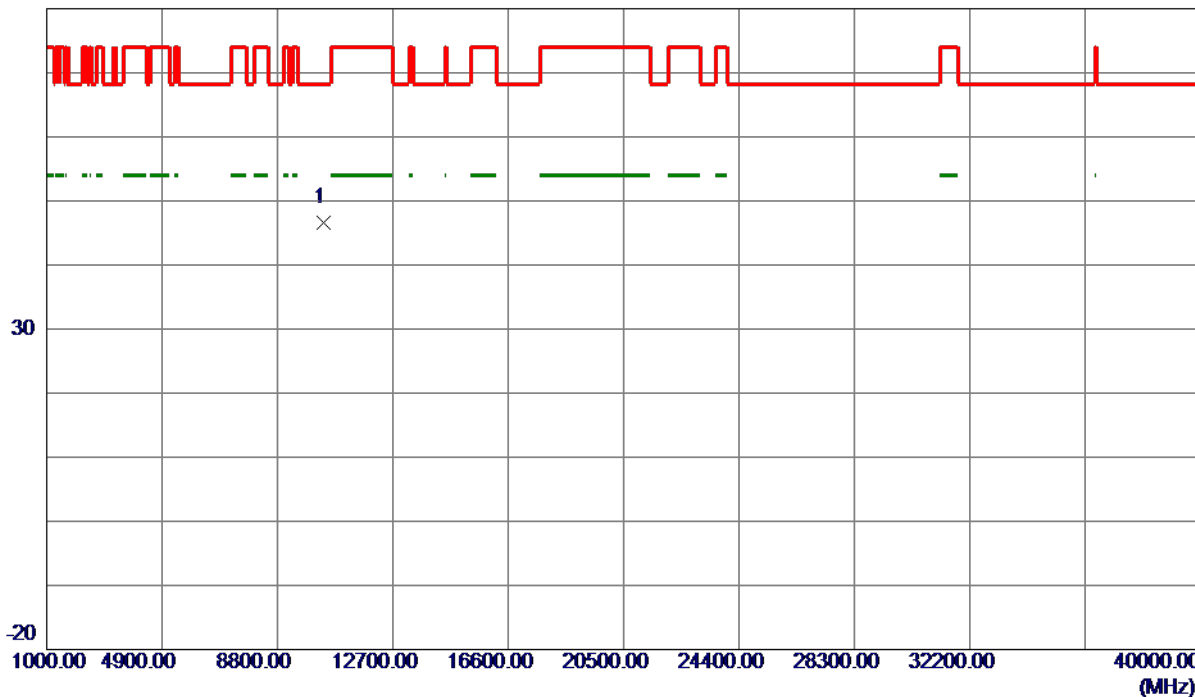

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10356.6100   | 35.22                      | 11.29                   | 46.51                     | 68.30           | -21.79       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5200 MHz |

### Vertical

130 dBuV/m

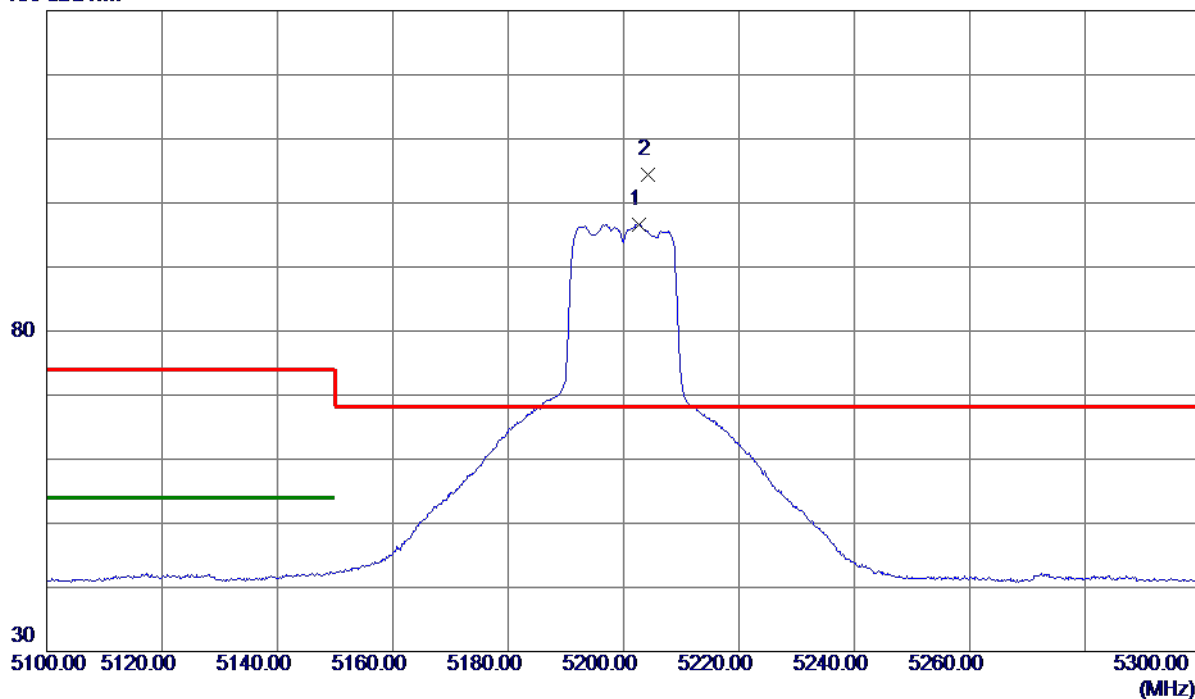


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5202.7000    | 82.18                      | 14.44                   | 96.62                     | 999.00          | -902.38      | AVG      | No Limit |
| 2 * | 5204.3000    | 89.95                      | 14.44                   | 104.39                    | 68.30           | 36.09        | Peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5200 MHz |

Vertical

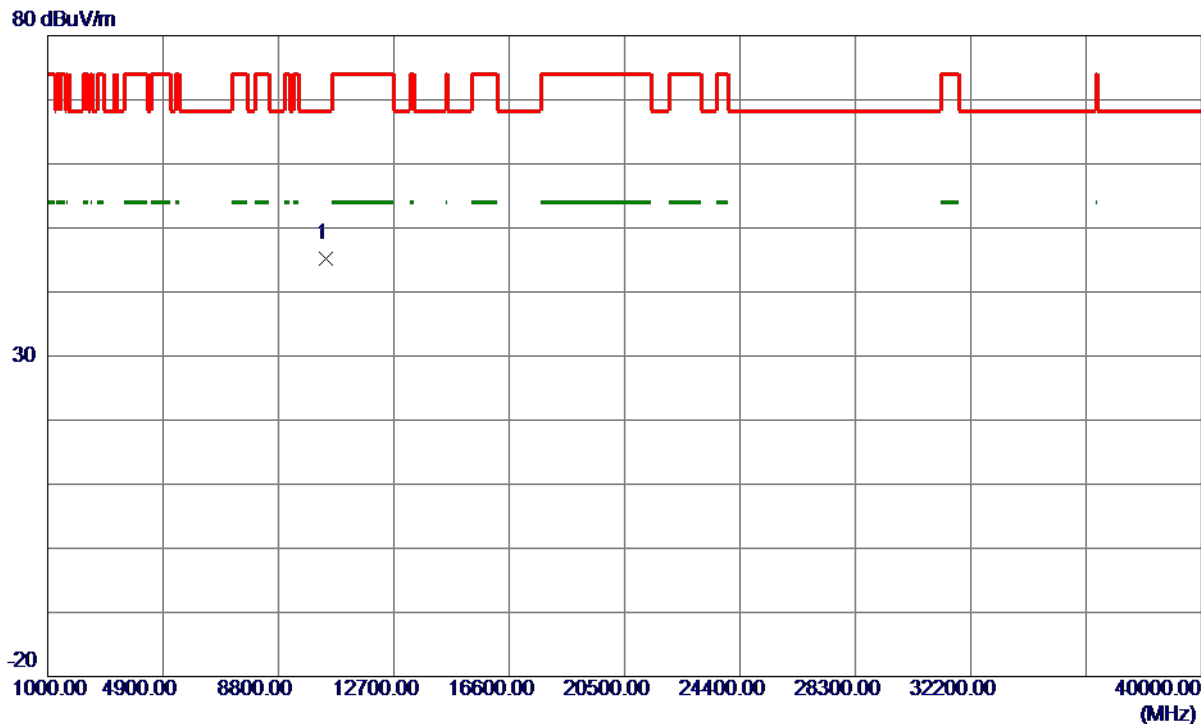

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.1250   | 33.88                      | 11.37                   | 45.25                     | 68.30           | -23.05       | Peak     |         |


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5200 MHz |

### Horizontal

130 dBuV/m

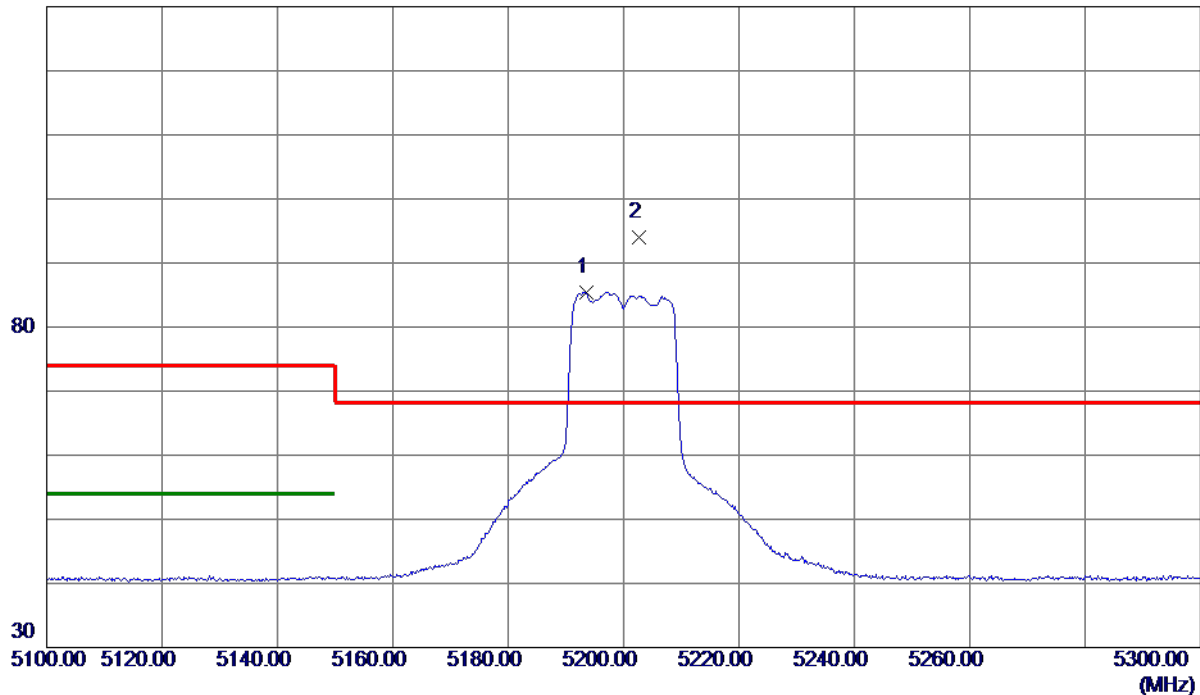

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5193.6000    | 71.00                      | 14.42                   | 85.42                     | 999.00          | -913.58      | AVG      | No Limit |
| 2 * | 5202.6000    | 79.46                      | 14.44                   | 93.90                     | 68.30           | 25.60        | Peak     | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5200 MHz |

### Horizontal

80 dBuV/m

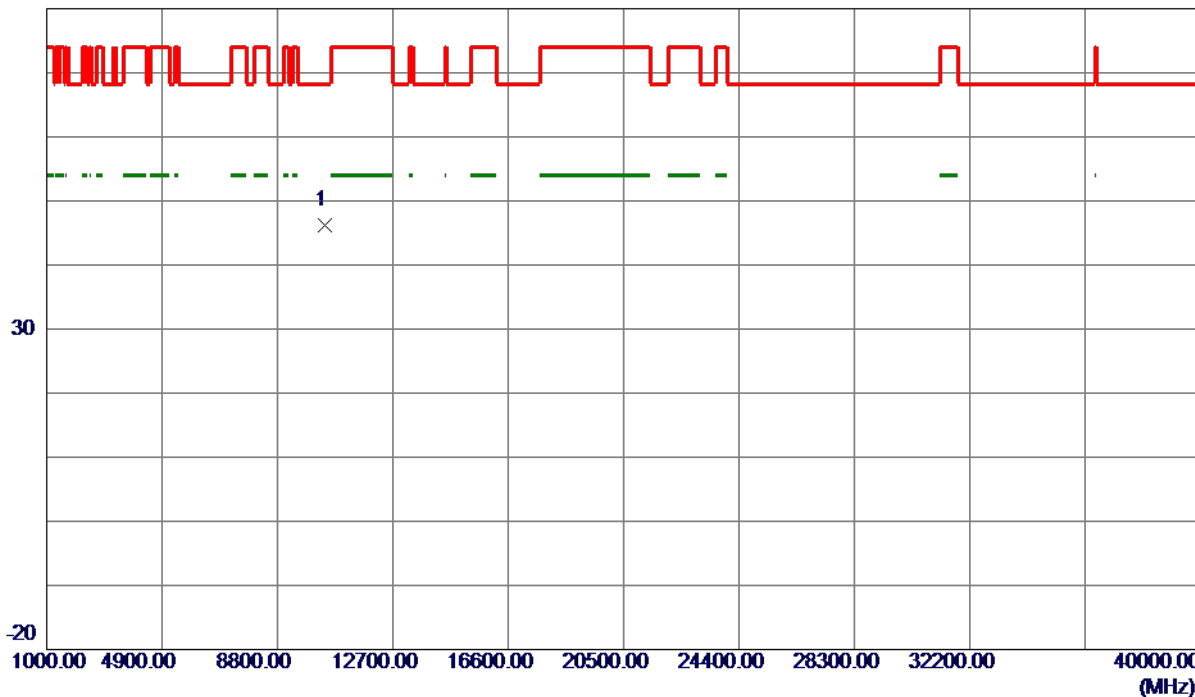

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10404.7800   | 34.76                      | 11.37                   | 46.13                     | 68.30           | -22.17       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5240 MHz |

**Vertical**

130 dBuV/m

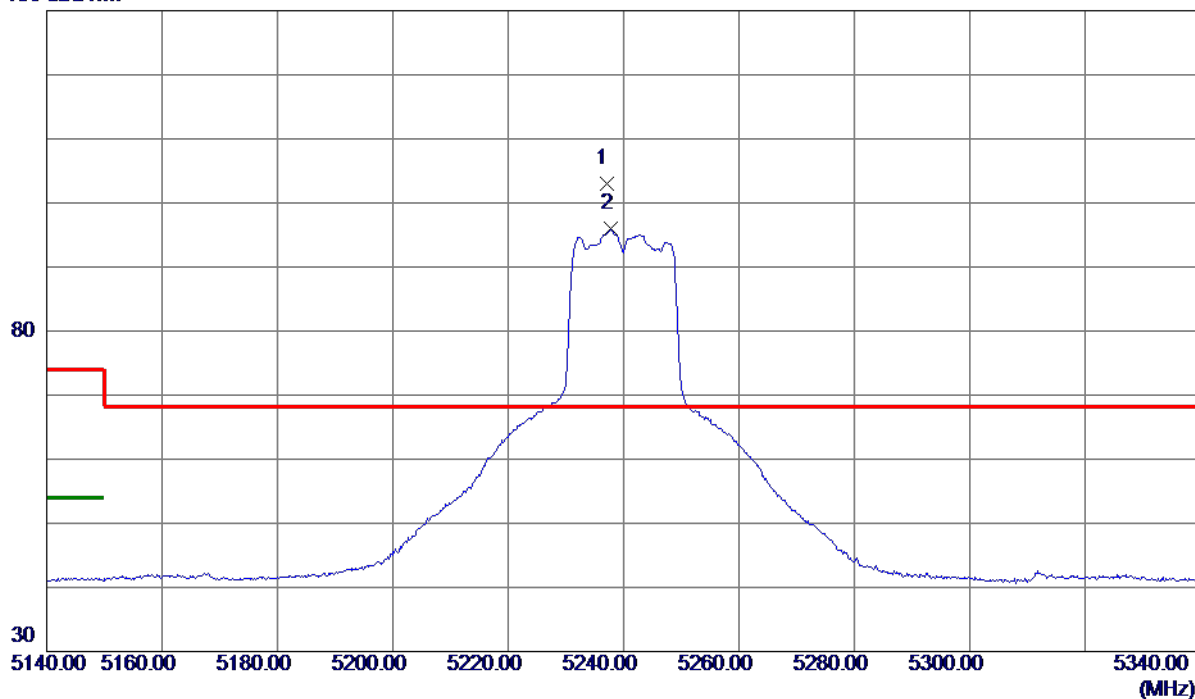

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5237.0000    | 88.39                      | 14.52                   | 102.91                    | 68.30           | 34.61        | Peak     | No Limit |
| 2   | 5237.8000    | 81.40                      | 14.52                   | 95.92                     | 999.00          | -903.08      | AVG      | No Limit |


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5240 MHz |

Vertical

80 dBuV/m

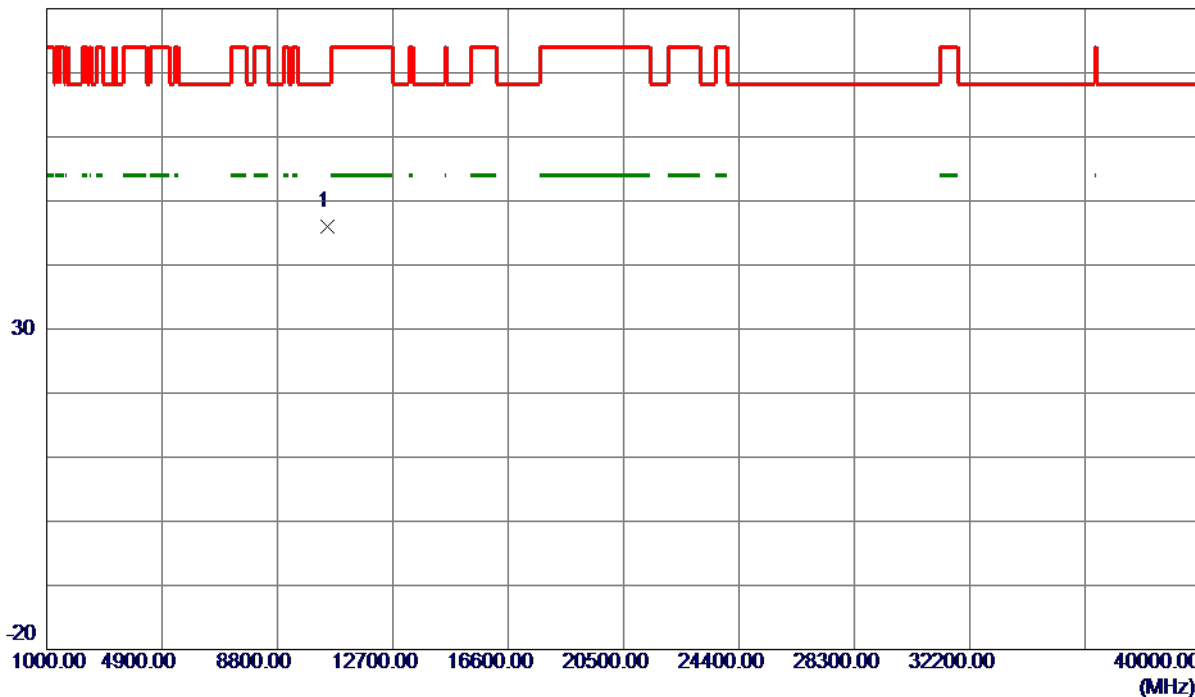

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10484.4450   | 34.47                      | 11.51                   | 45.98                     | 68.30           | -22.32       | Peak     |         |


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5240 MHz |

### Horizontal

130 dBuV/m

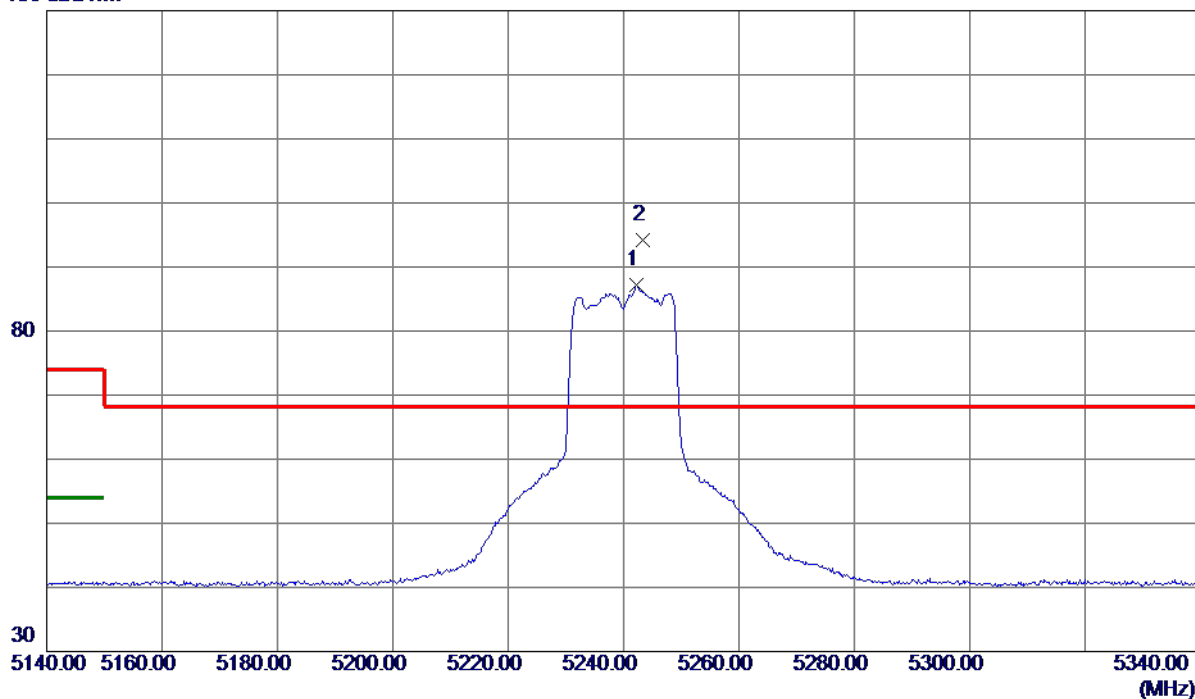

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5242.2000    | 72.67                      | 14.53                   | 87.20                     | 999.00          | -911.80      | AVG      | No Limit |
| 2 * | 5243.4000    | 79.70                      | 14.54                   | 94.24                     | 68.30           | 25.94        | Peak     | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5240 MHz |

### Horizontal

80 dBuV/m

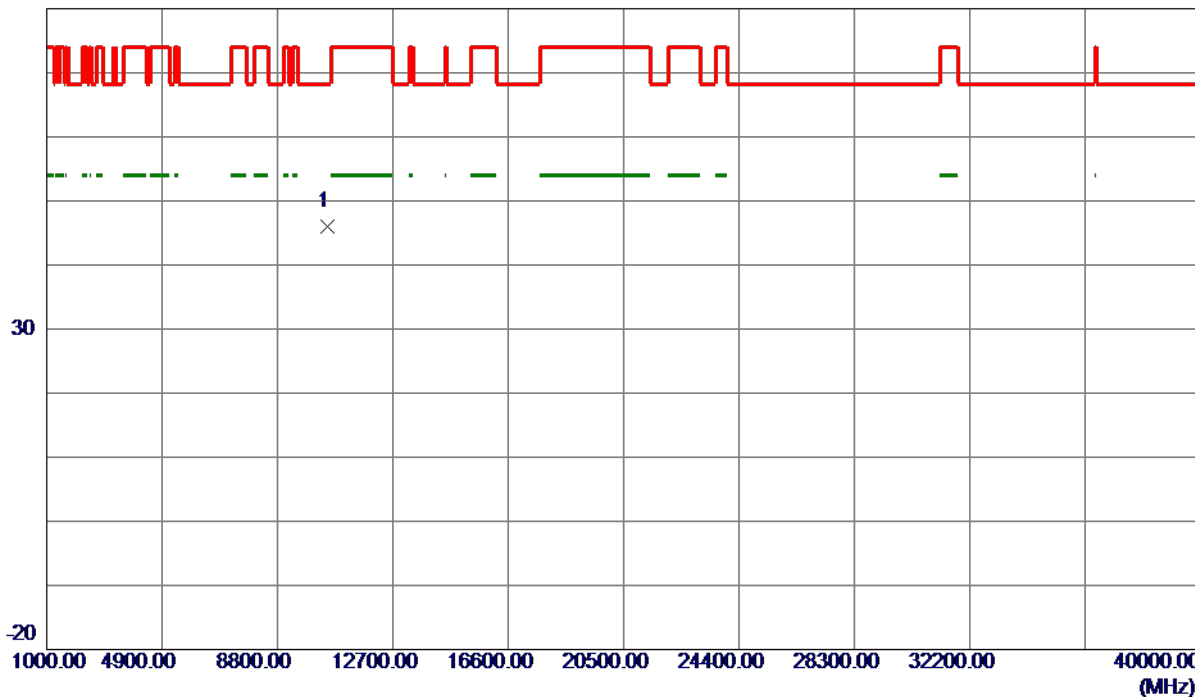

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10475.1600   | 34.45                      | 11.49                   | 45.94                     | 68.30           | -22.36       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5190 MHz |

### Vertical

130 dBuV/m

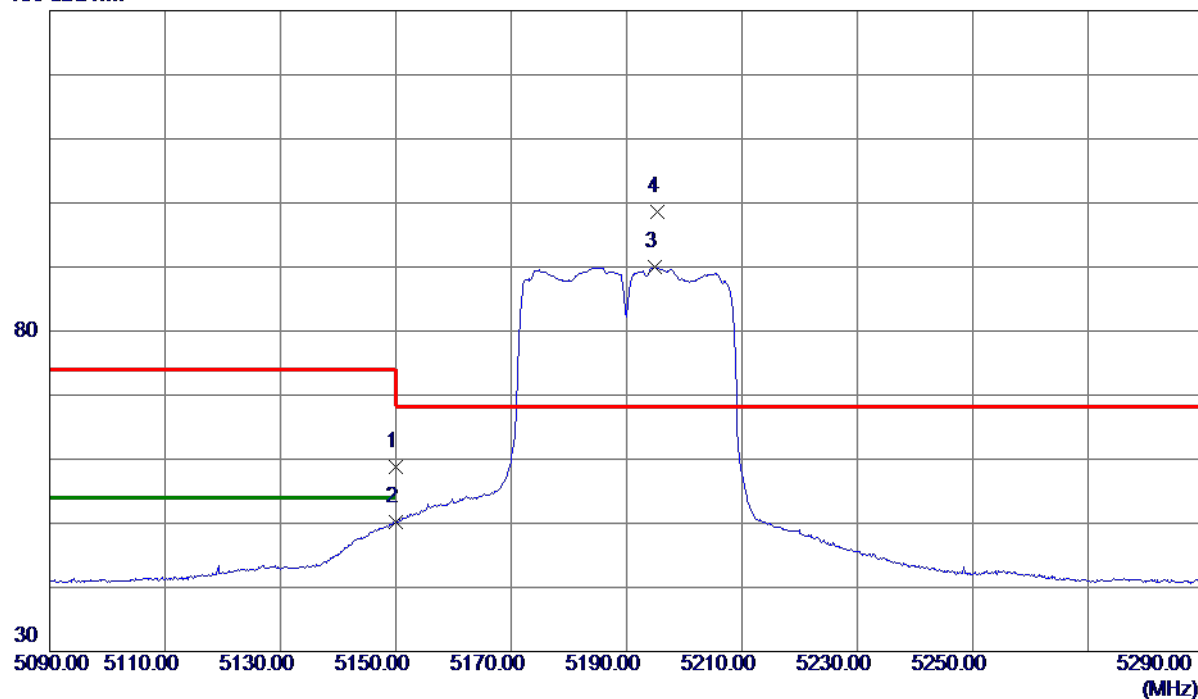

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 44.47                      | 14.32                   | 58.79                     | 74.00           | -15.21       | Peak     |          |
| 2   | 5150.0000    | 35.79                      | 14.32                   | 50.11                     | 54.00           | -3.89        | AVG      |          |
| 3   | 5194.9000    | 75.53                      | 14.42                   | 89.95                     | 999.00          | -909.05      | AVG      | No Limit |
| 4 * | 5195.4000    | 84.13                      | 14.42                   | 98.55                     | 68.30           | 30.25        | Peak     | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5190 MHz |

**Vertical**

80 dBuV/m

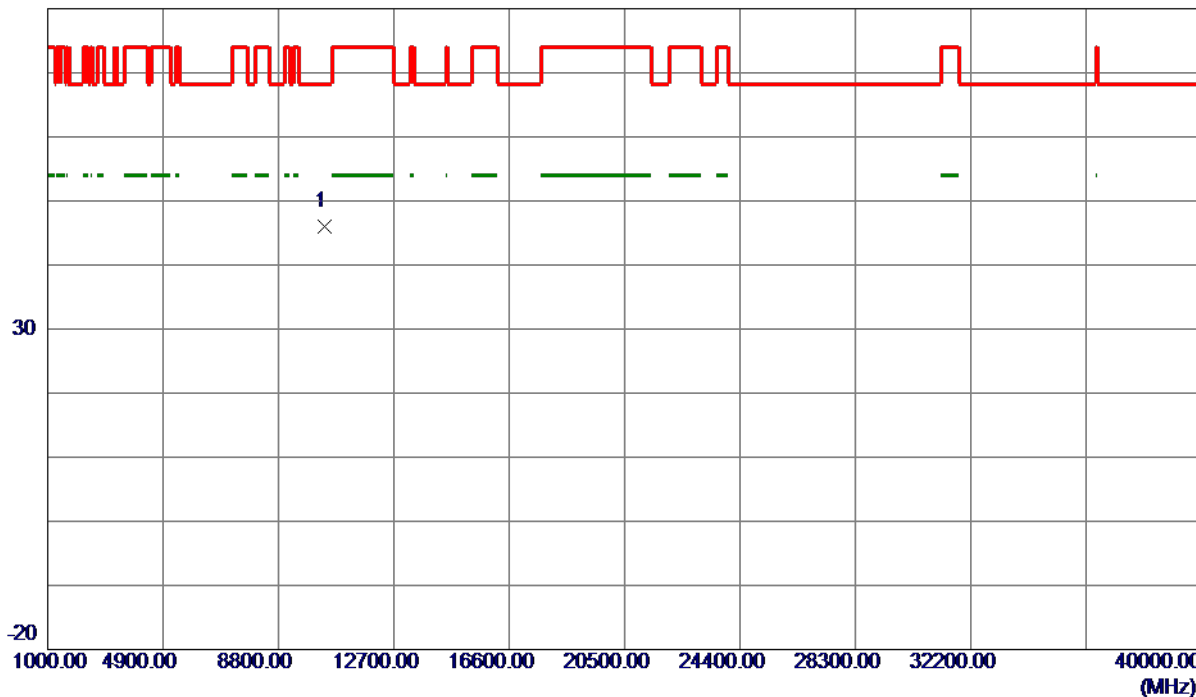

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10377.5800   | 34.71                      | 11.33                   | 46.04                     | 68.30           | -22.26       | Peak     |         |


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5190 MHz |

### Horizontal

130 dBuV/m

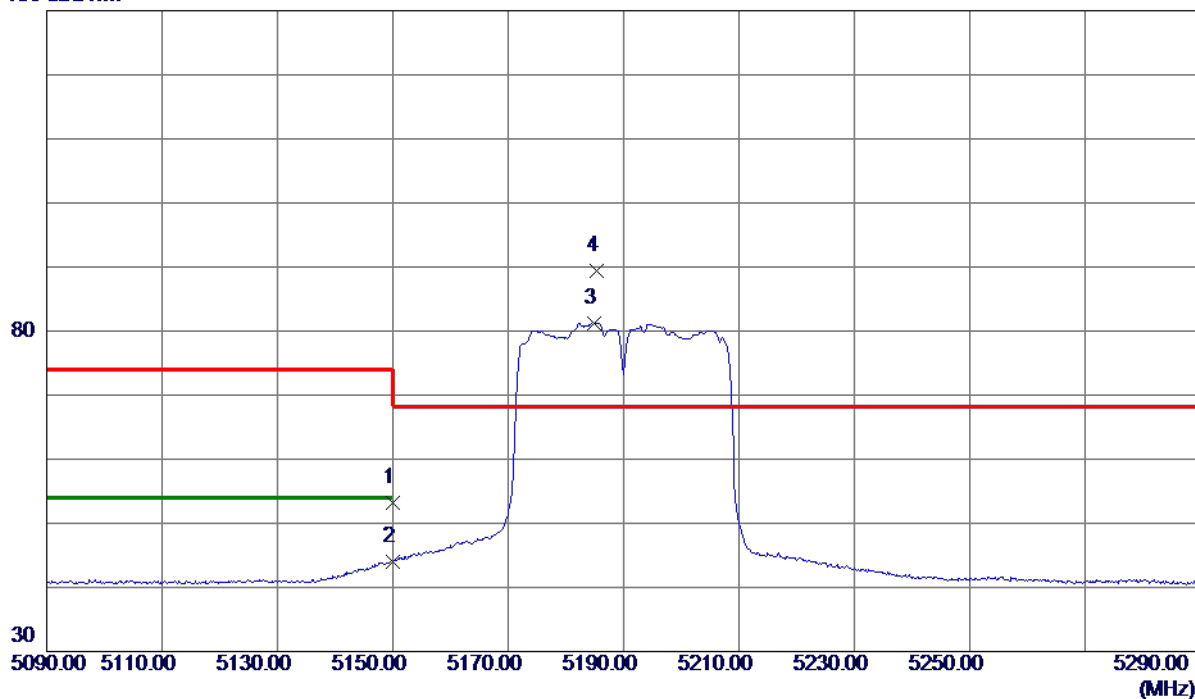

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 38.85                      | 14.32                   | 53.17                     | 74.00           | -20.83       | Peak     |          |
| 2   | 5150.0000    | 29.72                      | 14.32                   | 44.04                     | 54.00           | -9.96        | AVG      |          |
| 3   | 5184.9000    | 66.88                      | 14.40                   | 81.28                     | 999.00          | -917.72      | AVG      | No Limit |
| 4 * | 5185.3000    | 75.01                      | 14.40                   | 89.41                     | 68.30           | 21.11        | Peak     | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5190 MHz |

### Horizontal

80 dBuV/m

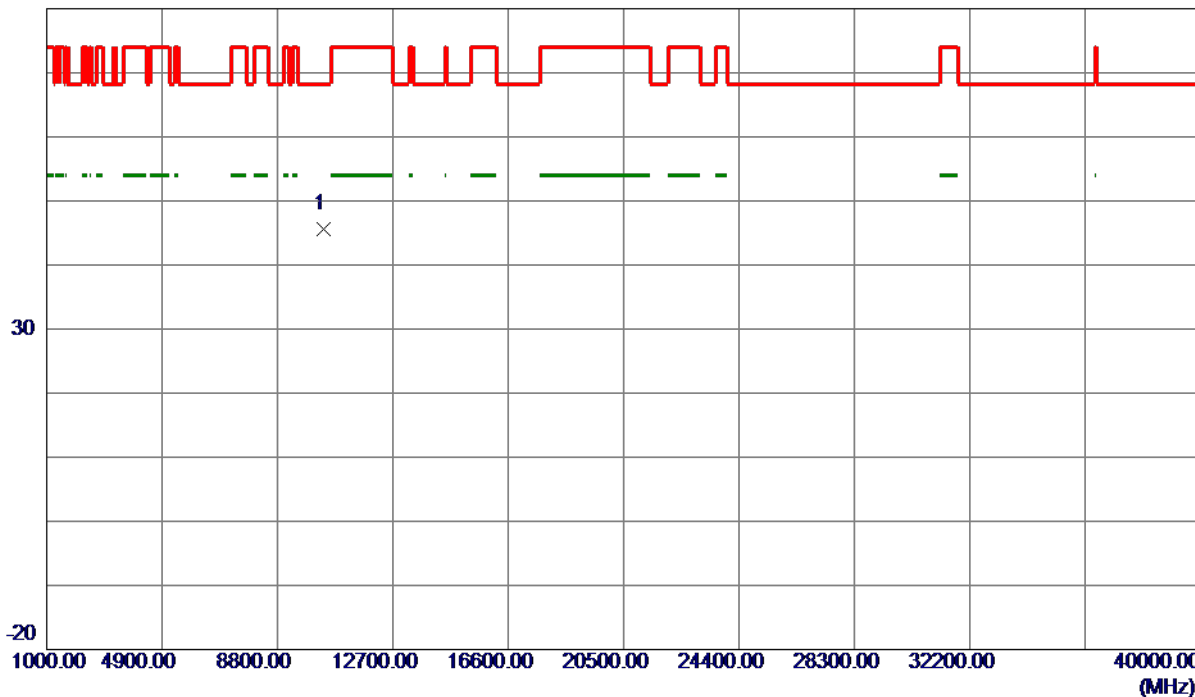

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10376.4100   | 34.32                      | 11.33                   | 45.65                     | 68.30           | -22.65       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5230 MHz |

**Vertical**

130 dBuV/m

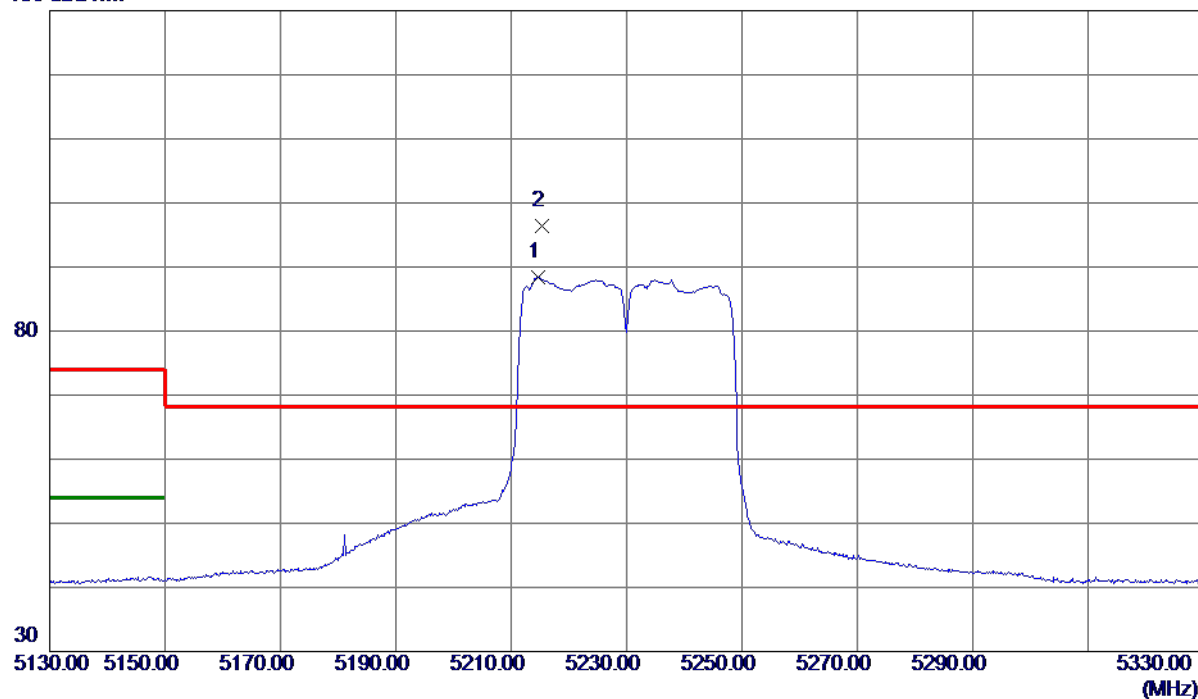

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5214.7000    | 73.87                      | 14.47                   | 88.34                     | 999.00          | -910.66      | AVG      | No Limit |
| 2 * | 5215.4000    | 81.97                      | 14.47                   | 96.44                     | 68.30           | 28.14        | Peak     | No Limit |

**REMARKS:**


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5230 MHz |

Vertical

80 dBuV/m

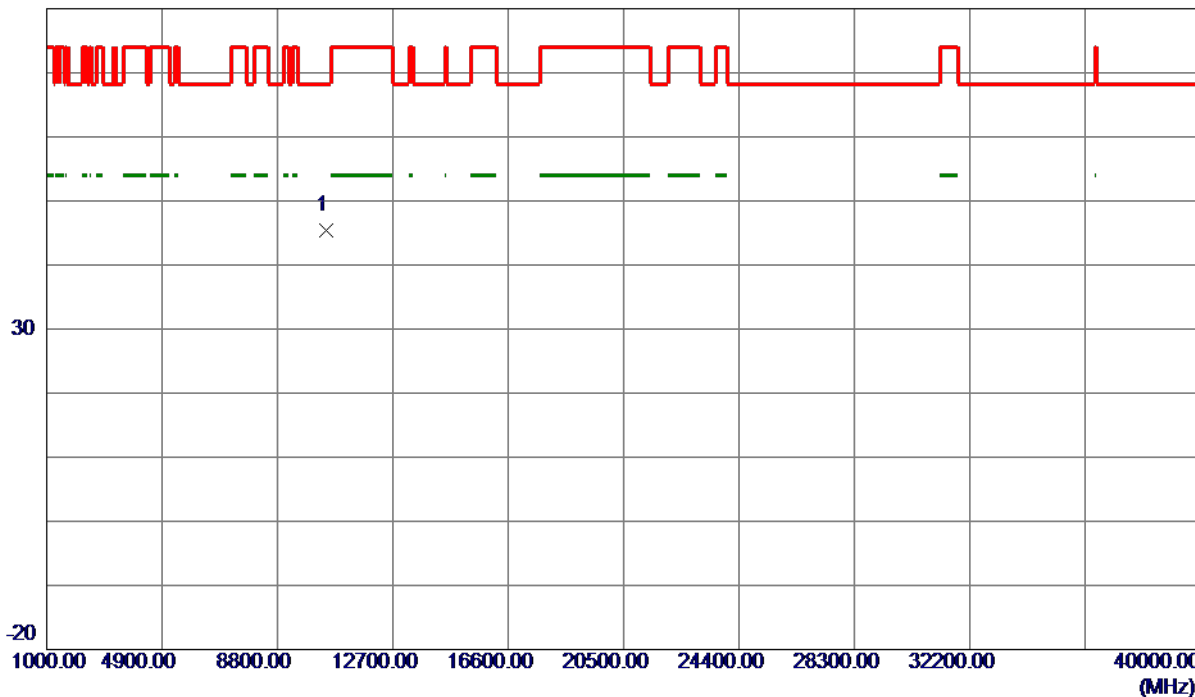

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10458.6849   | 33.95                      | 11.47                   | 45.42                     | 68.30           | -22.88       | Peak     |         |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5230 MHz |

### Horizontal

130 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5226.5000    | 67.05                      | 14.50                   | 81.55                     | 999.00          | -917.45      | AVG      | No Limit |
| 2 * | 5235.2000    | 75.16                      | 14.52                   | 89.68                     | 68.30           | 21.38        | Peak     | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5230 MHz |

### Horizontal

80 dBuV/m

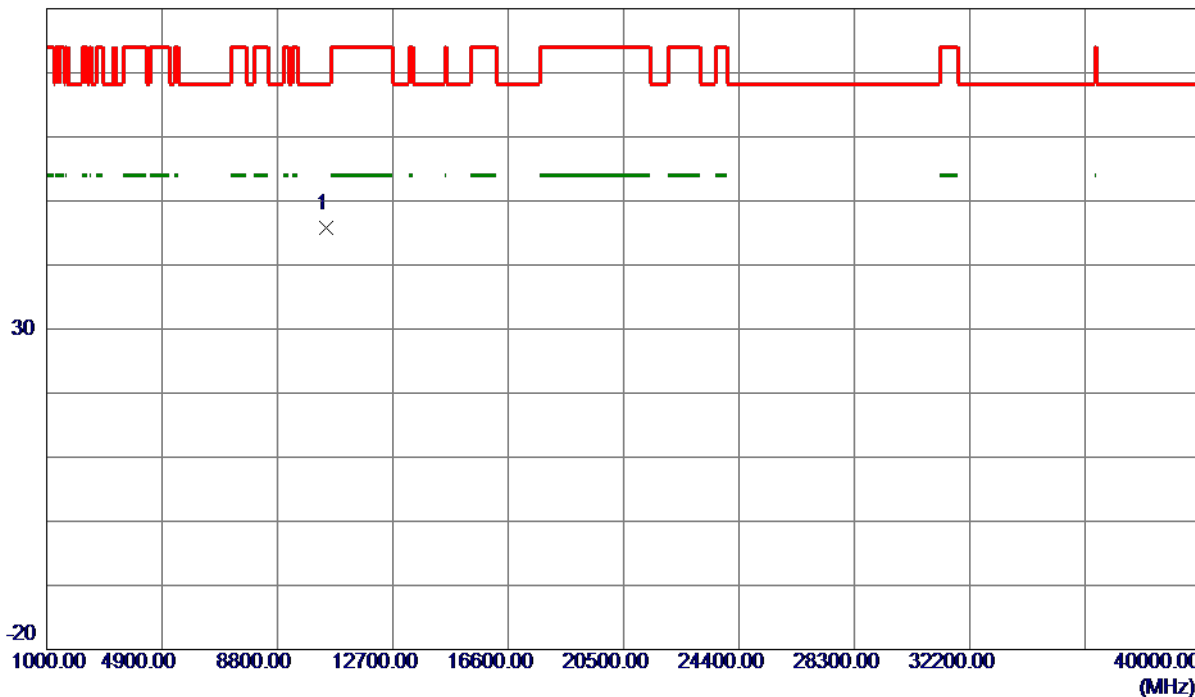

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10462.9550   | 34.23                      | 11.47                   | 45.70                     | 68.30           | -22.60       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT80) Mode 5210 MHz |

### Vertical

130 dBuV/m

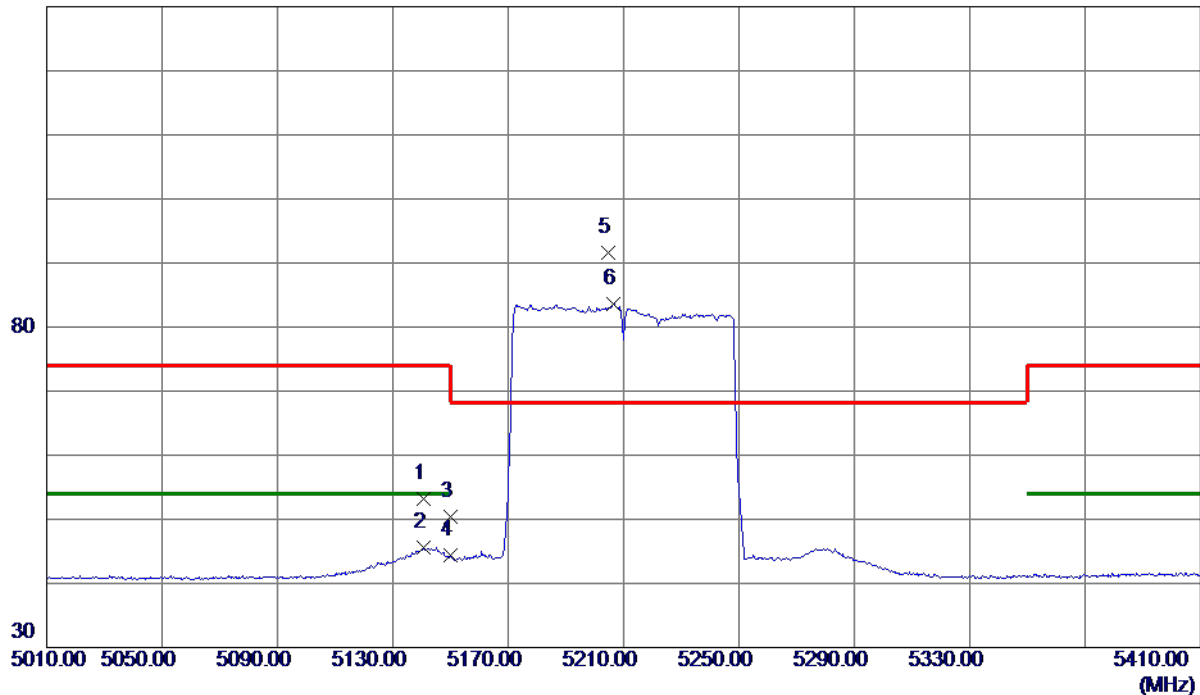

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5140.8000    | 38.90                      | 14.29                   | 53.19                     | 74.00           | -20.81       | Peak     |          |
| 2   | 5140.8000    | 31.33                      | 14.29                   | 45.62                     | 54.00           | -8.38        | AVG      |          |
| 3   | 5150.0000    | 36.15                      | 14.32                   | 50.47                     | 74.00           | -23.53       | Peak     |          |
| 4   | 5150.0000    | 30.10                      | 14.32                   | 44.42                     | 54.00           | -9.58        | AVG      |          |
| 5 * | 5204.8000    | 77.08                      | 14.45                   | 91.53                     | 68.30           | 23.23        | Peak     | No Limit |
| 6   | 5206.6000    | 69.21                      | 14.45                   | 83.66                     | 999.00          | -915.34      | AVG      | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT80) Mode 5210 MHz |

### Vertical

80 dBuV/m

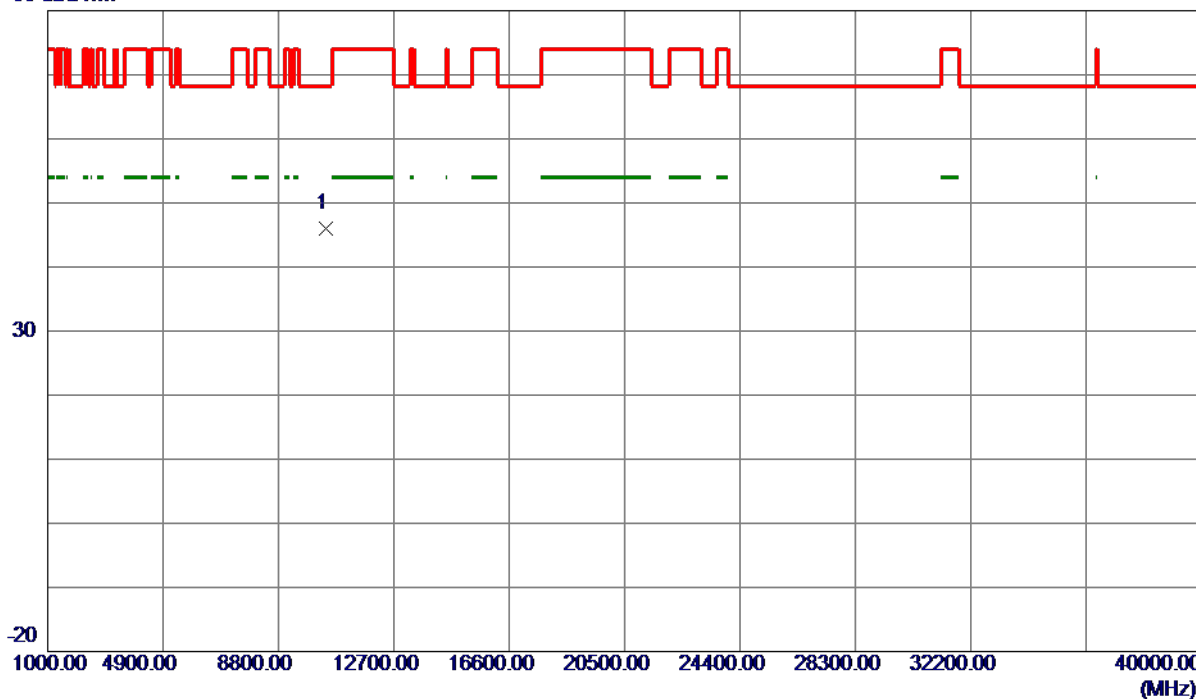

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10420.5250   | 34.66                      | 11.40                   | 46.06                     | 68.30           | -22.24       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT80) Mode 5210 MHz |

### Horizontal

130 dBuV/m

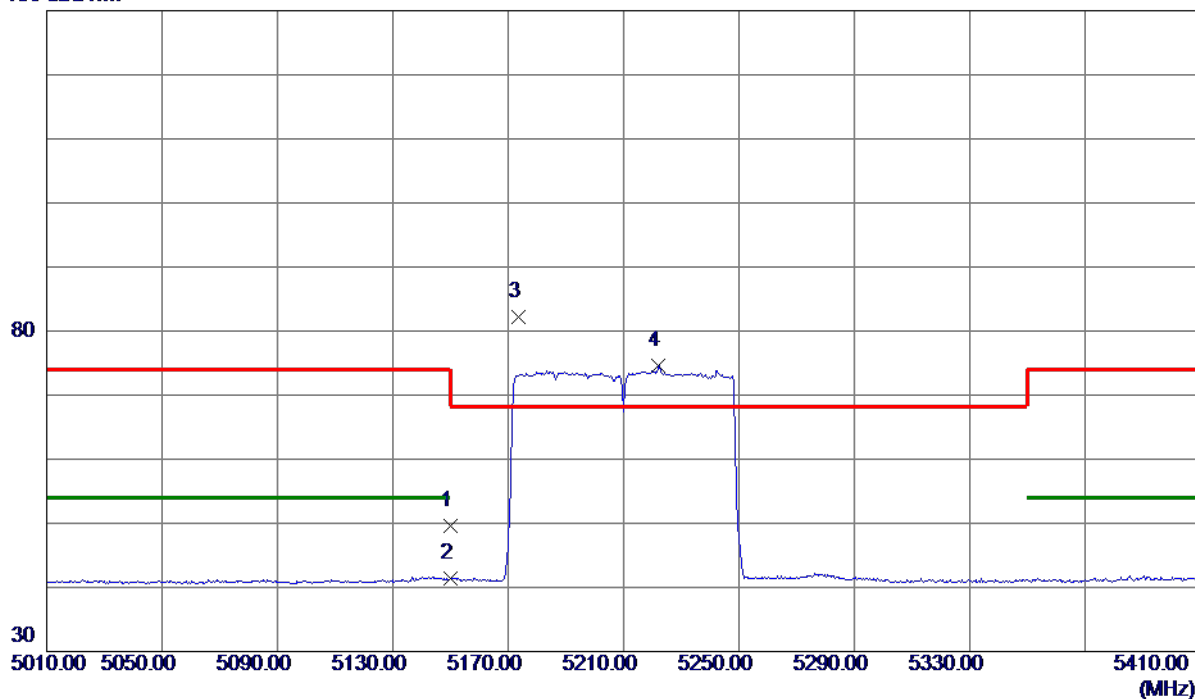

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 35.32                      | 14.32                   | 49.64                     | 74.00           | -24.36       | Peak     |          |
| 2   | 5150.0000    | 27.16                      | 14.32                   | 41.48                     | 54.00           | -12.52       | AVG      |          |
| 3 * | 5173.6000    | 67.81                      | 14.37                   | 82.18                     | 68.30           | 13.88        | Peak     | No Limit |
| 4   | 5222.2000    | 60.11                      | 14.49                   | 74.60                     | 999.00          | -924.40      | AVG      | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT80) Mode 5210 MHz |

### Horizontal

80 dBuV/m

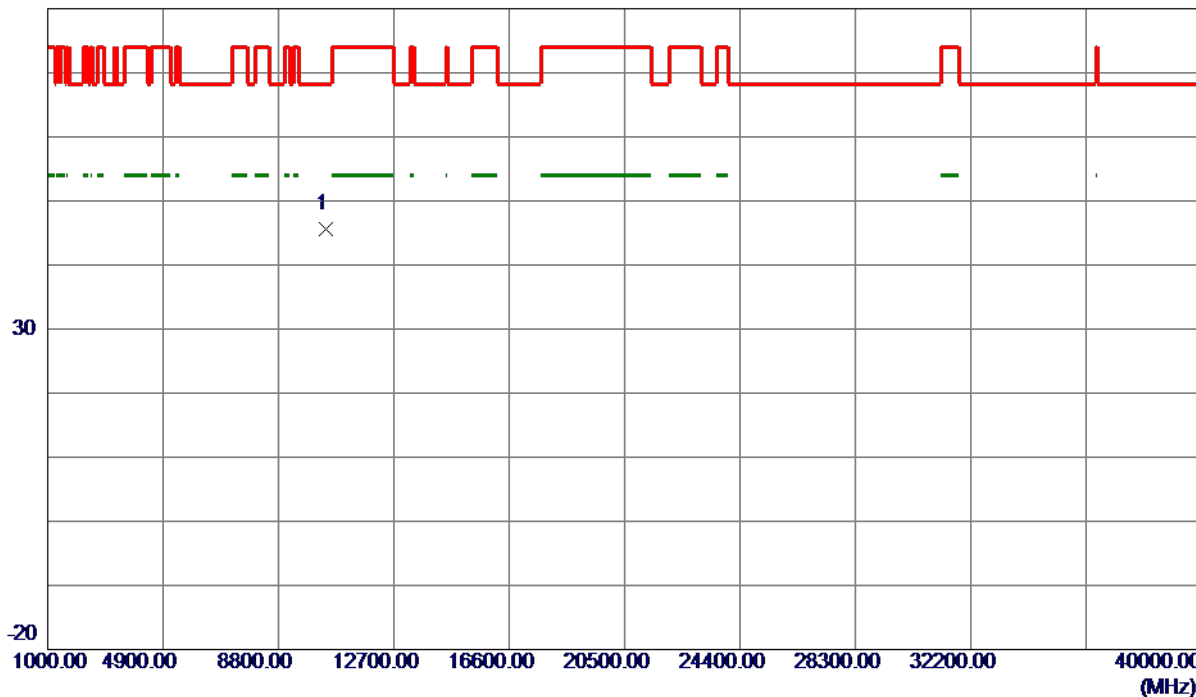

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10418.5770   | 34.11                      | 11.40                   | 45.51                     | 68.30           | -22.79       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5260 MHz |

### Vertical

130 dBuV/m

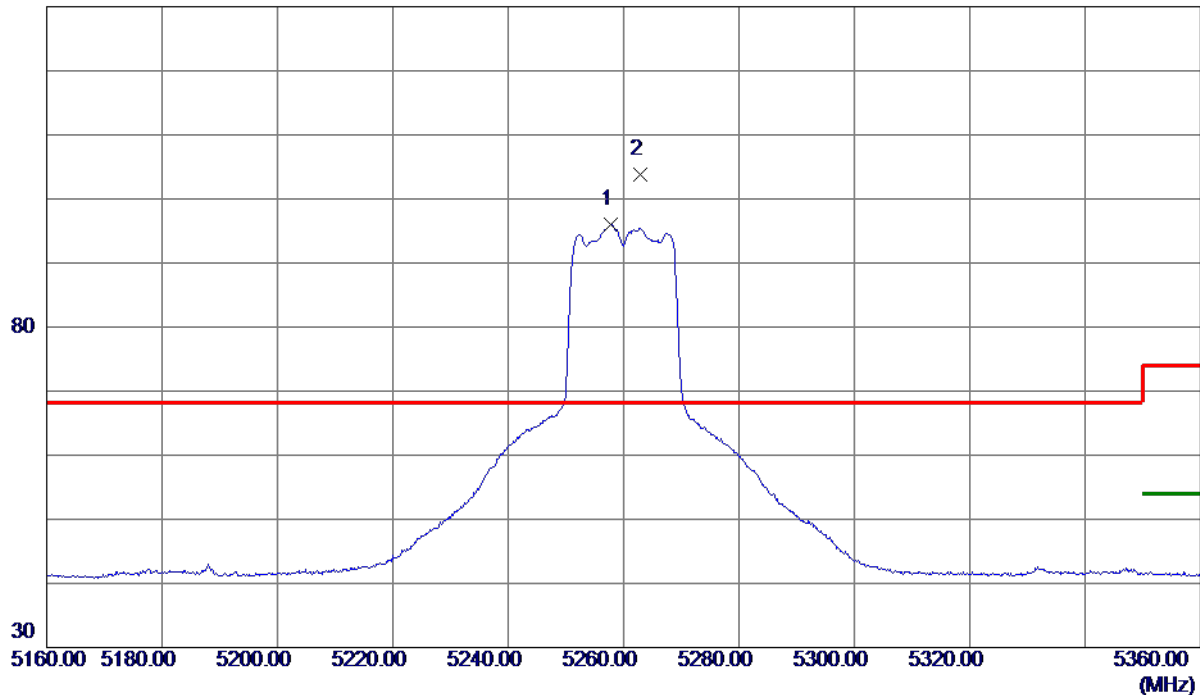

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5257.7000    | 81.53                      | 14.57                   | 96.10                     | 999.00          | -902.90      | AVG      | No Limit |
| 2 * | 5262.9000    | 89.18                      | 14.58                   | 103.76                    | 68.30           | 35.46        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5260 MHz |

### Vertical

80 dBuV/m

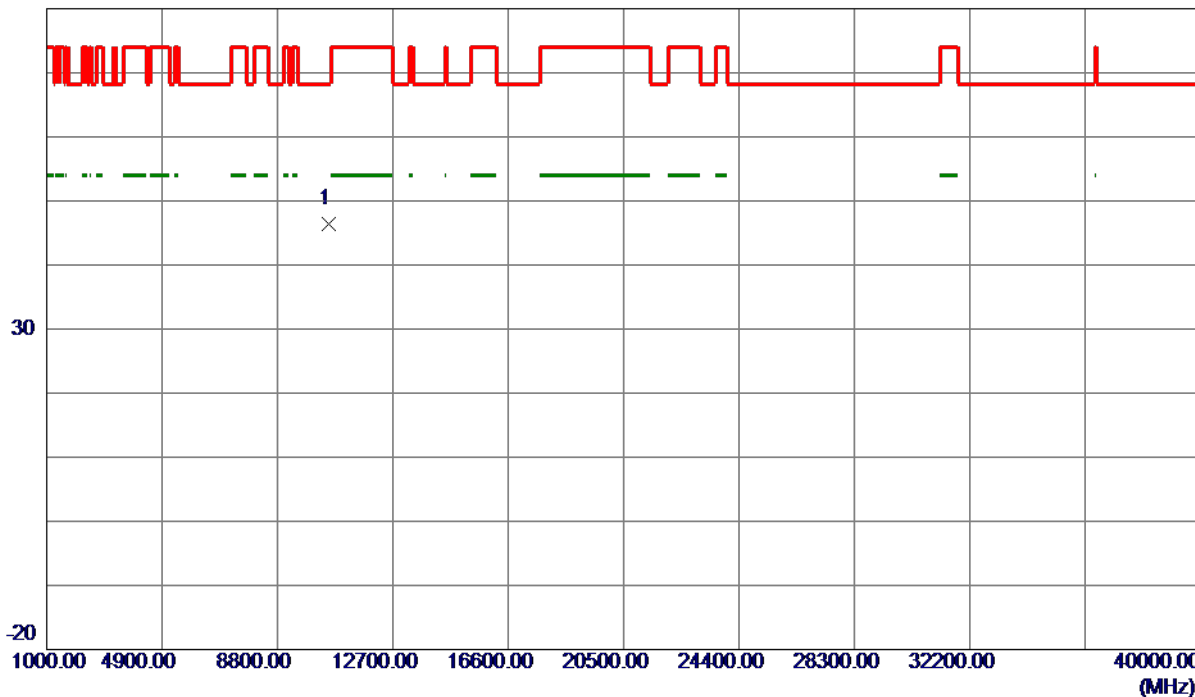

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10517.2200   | 34.91                      | 11.54                   | 46.45                     | 68.30           | -21.85       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5260 MHz |

### Horizontal

130 dBuV/m

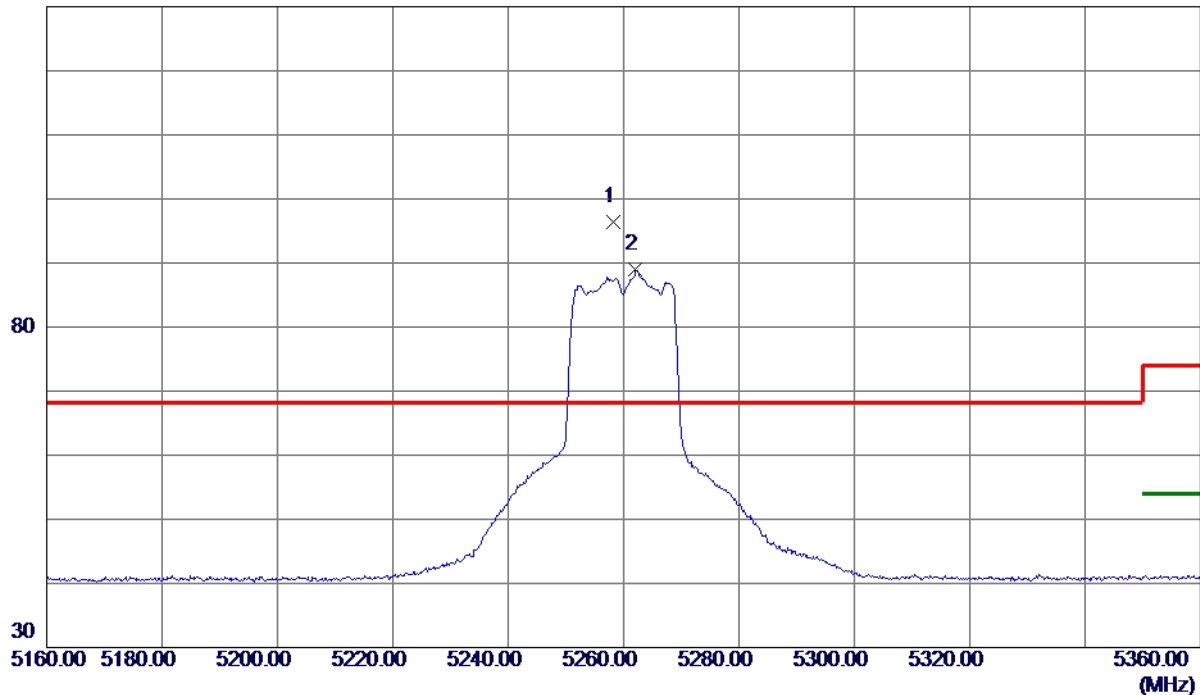

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5258.3000    | 81.87                      | 14.57                   | 96.44                     | 68.30           | 28.14        | Peak     | No Limit |
| 2   | 5262.1000    | 74.45                      | 14.58                   | 89.03                     | 999.00          | -909.97      | AVG      | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5260 MHz |

### Horizontal

80 dBuV/m

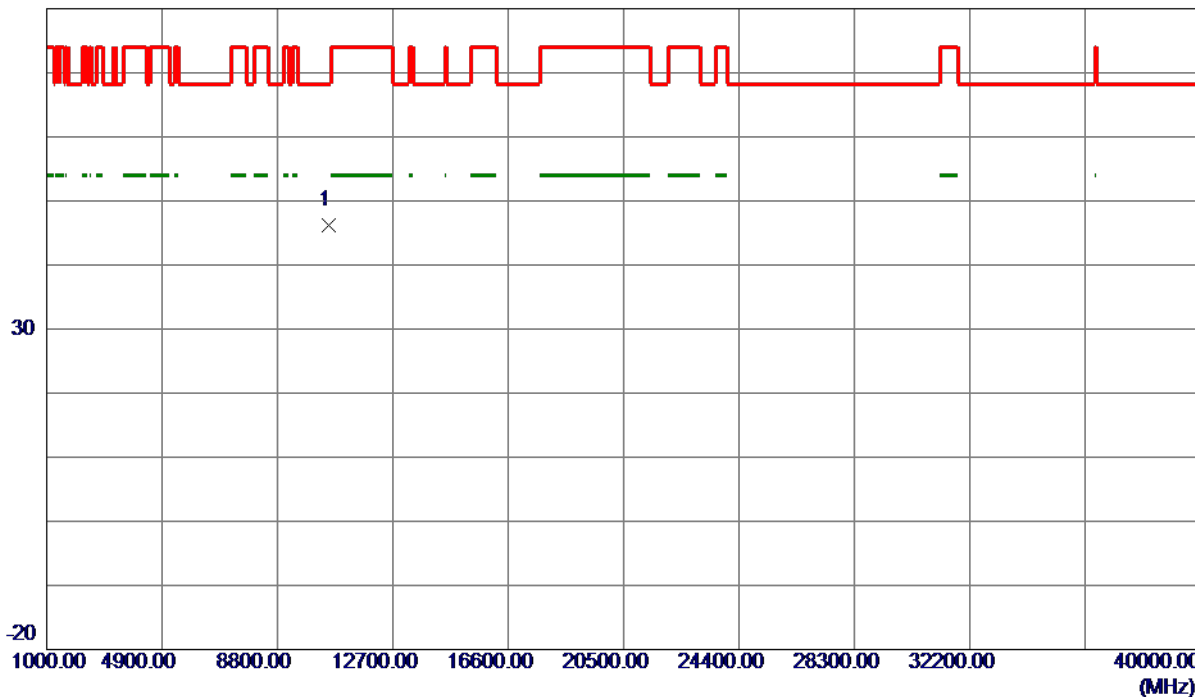

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10524.6100   | 34.73                      | 11.54                   | 46.27                     | 68.30           | -22.03       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5300 MHz |

**Vertical**

130 dBuV/m

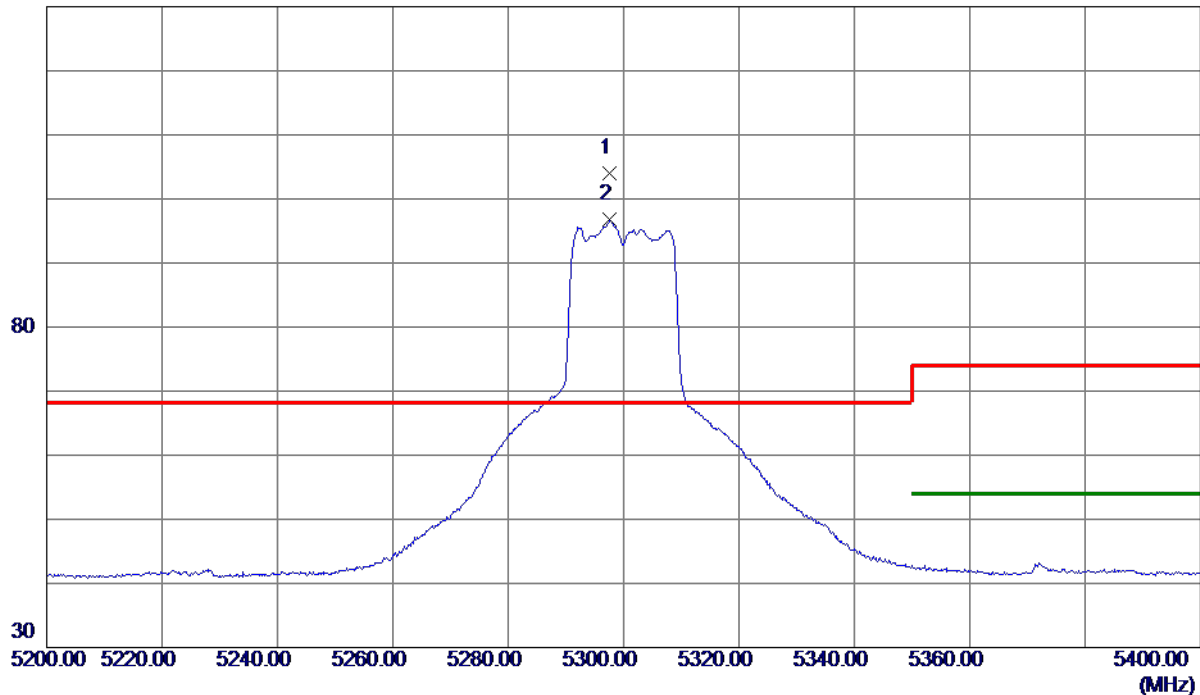

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5297.5000    | 89.30                      | 14.67                   | 103.97                    | 68.30           | 35.67        | Peak     | No Limit |
| 2   | 5297.6000    | 82.05                      | 14.67                   | 96.72                     | 999.00          | -902.28      | AVG      | No Limit |


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5300 MHz |

Vertical

80 dBuV/m

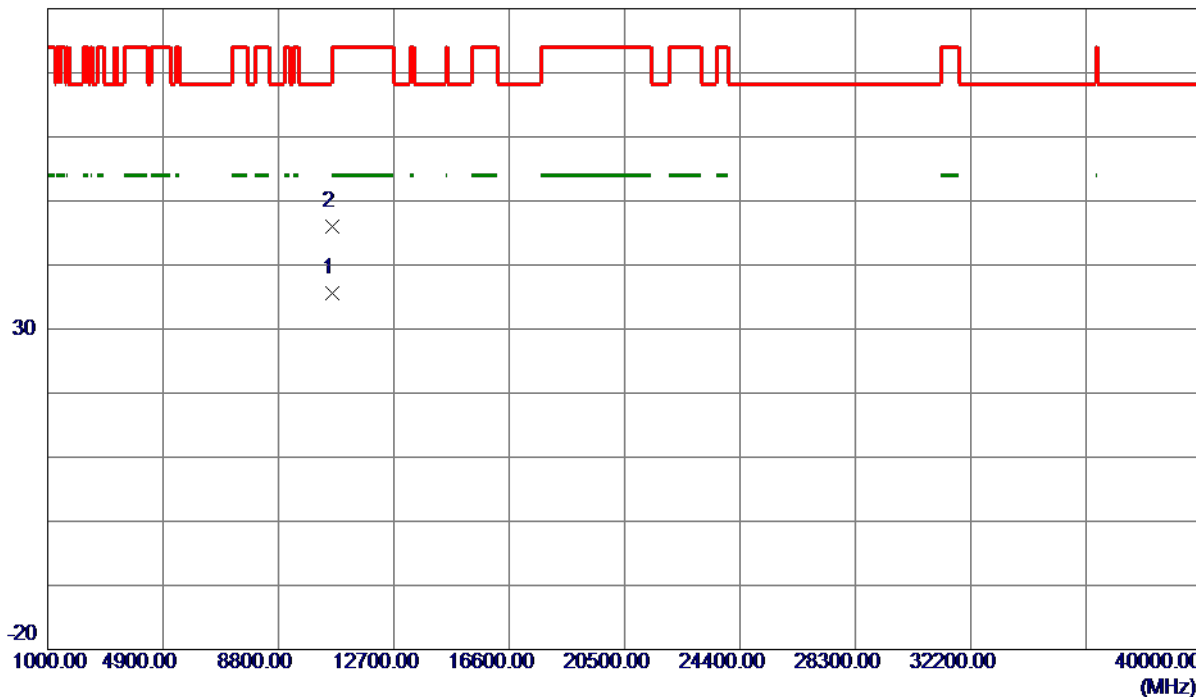

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10600.0750   | 24.00                      | 11.55                   | 35.55                     | 54.00           | -18.45       | AVG      |         |
| 2   | 10602.0100   | 34.36                      | 11.55                   | 45.91                     | 74.00           | -28.09       | Peak     |         |


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5300 MHz |

### Horizontal

130 dBuV/m

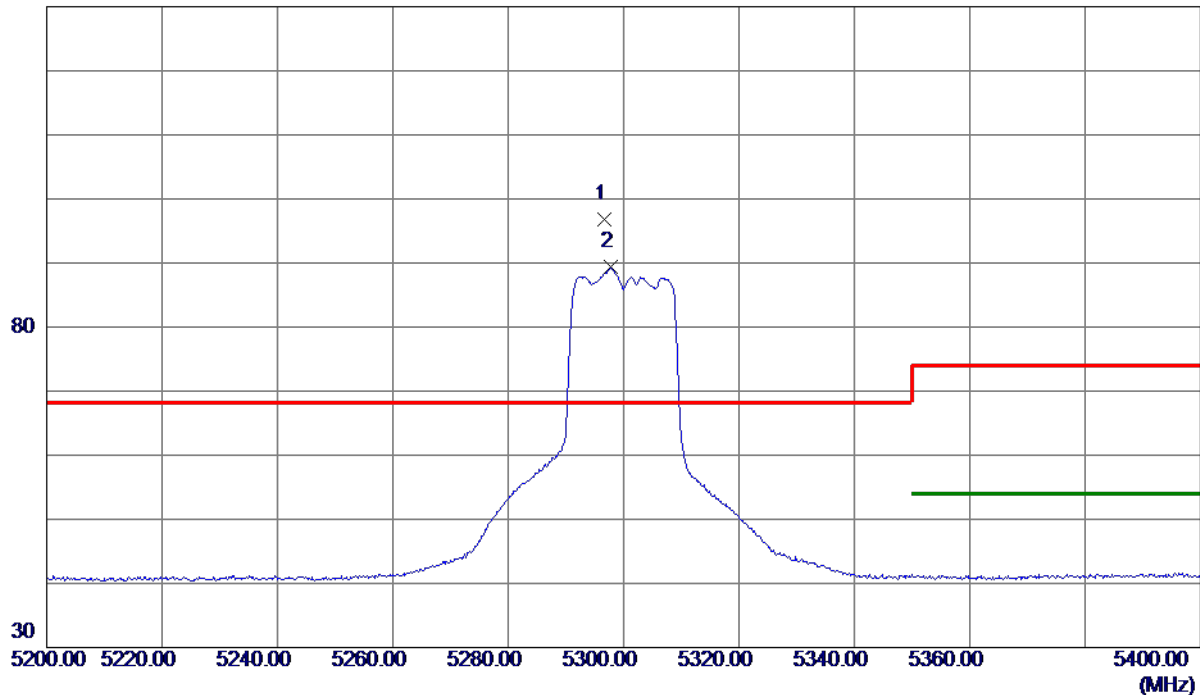

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5296.6000    | 82.09                      | 14.66                   | 96.75                     | 68.30           | 28.45        | Peak     | No Limit |
| 2   | 5297.8000    | 74.67                      | 14.67                   | 89.34                     | 999.00          | -909.66      | AVG      | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5300 MHz |

### Horizontal

80 dBuV/m

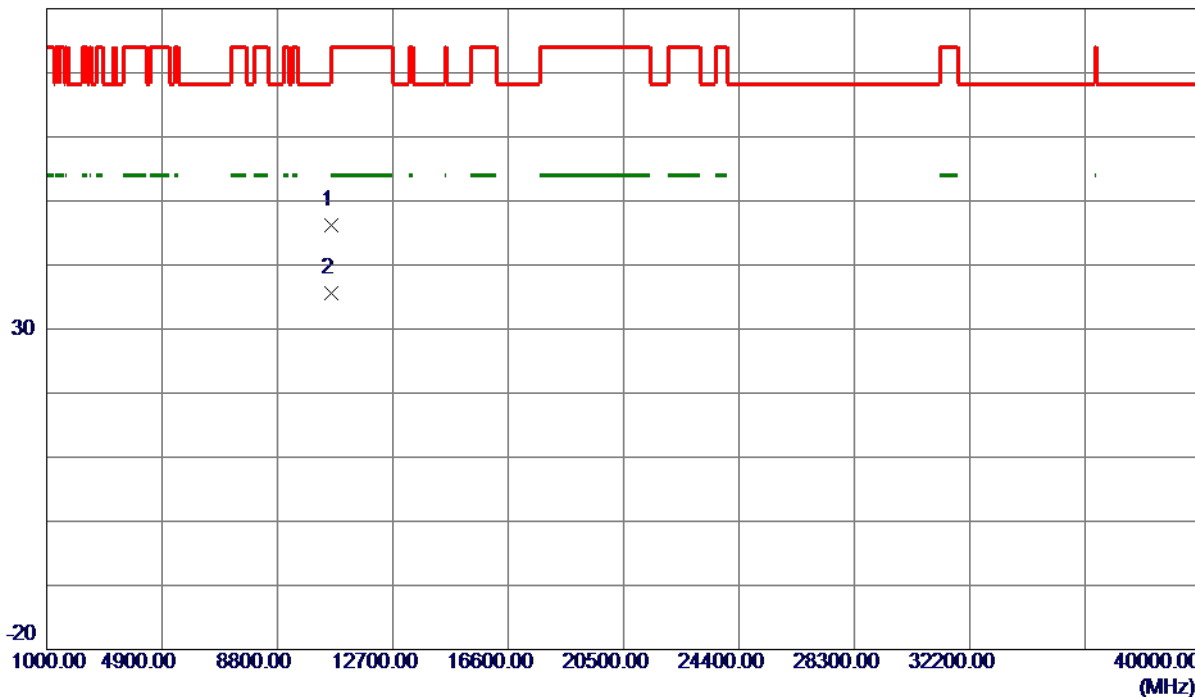

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10600.7699   | 34.58                      | 11.55                   | 46.13                     | 74.00           | -27.87       | Peak     |         |
| 2 * | 10602.9450   | 23.98                      | 11.55                   | 35.53                     | 54.00           | -18.47       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5320 MHz |

### Vertical

130 dBuV/m

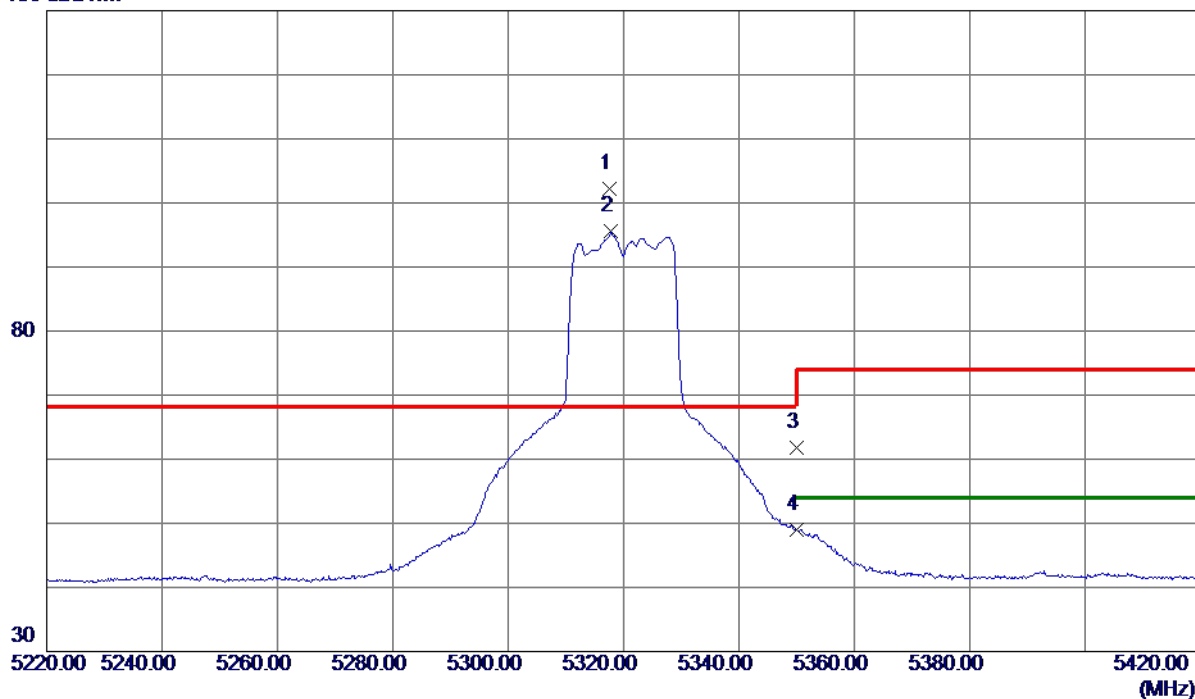

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5317.5000    | 87.44                      | 14.71                   | 102.15                    | 68.30           | 33.85        | Peak     | No Limit |
| 2   | 5317.8000    | 80.87                      | 14.71                   | 95.58                     | 999.00          | -903.42      | AVG      | No Limit |
| 3   | 5350.0000    | 47.02                      | 14.79                   | 61.81                     | 74.00           | -12.19       | Peak     |          |
| 4   | 5350.0000    | 34.23                      | 14.79                   | 49.02                     | 54.00           | -4.98        | AVG      |          |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5320 MHz |

Vertical

80 dBuV/m

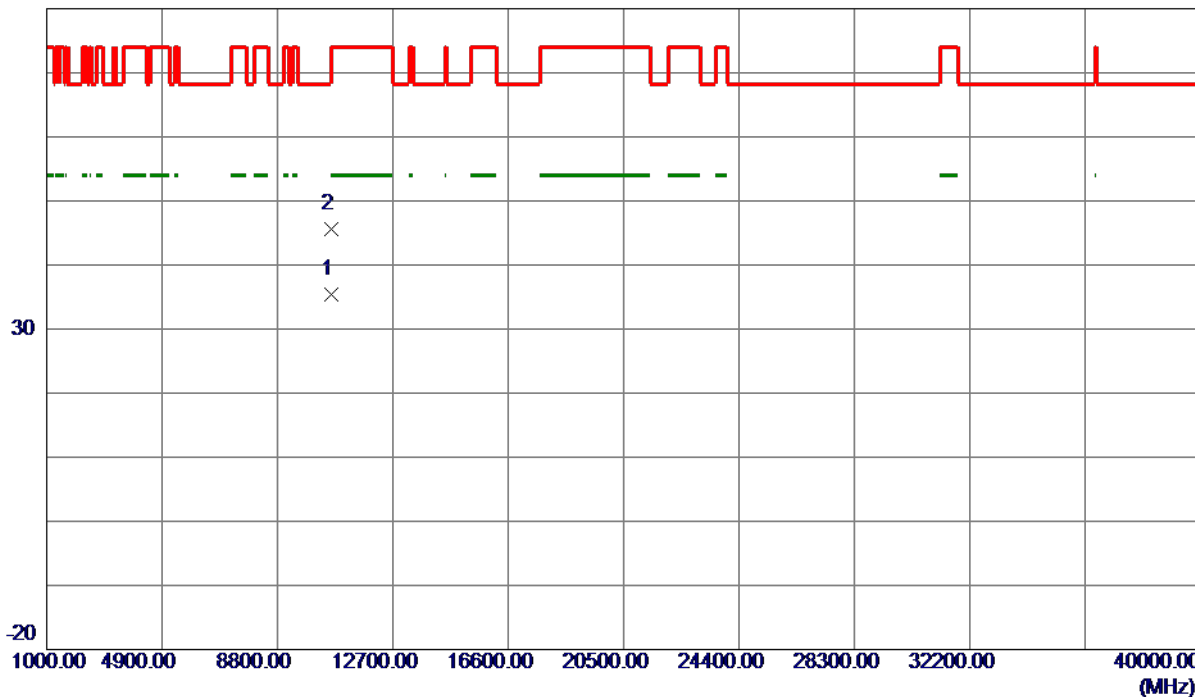

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10637.7900   | 23.76                      | 11.56                   | 35.32                     | 54.00           | -18.68       | AVG      |         |
| 2   | 10638.5350   | 34.05                      | 11.56                   | 45.61                     | 74.00           | -28.39       | Peak     |         |


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5320 MHz |

### Horizontal

130 dBuV/m

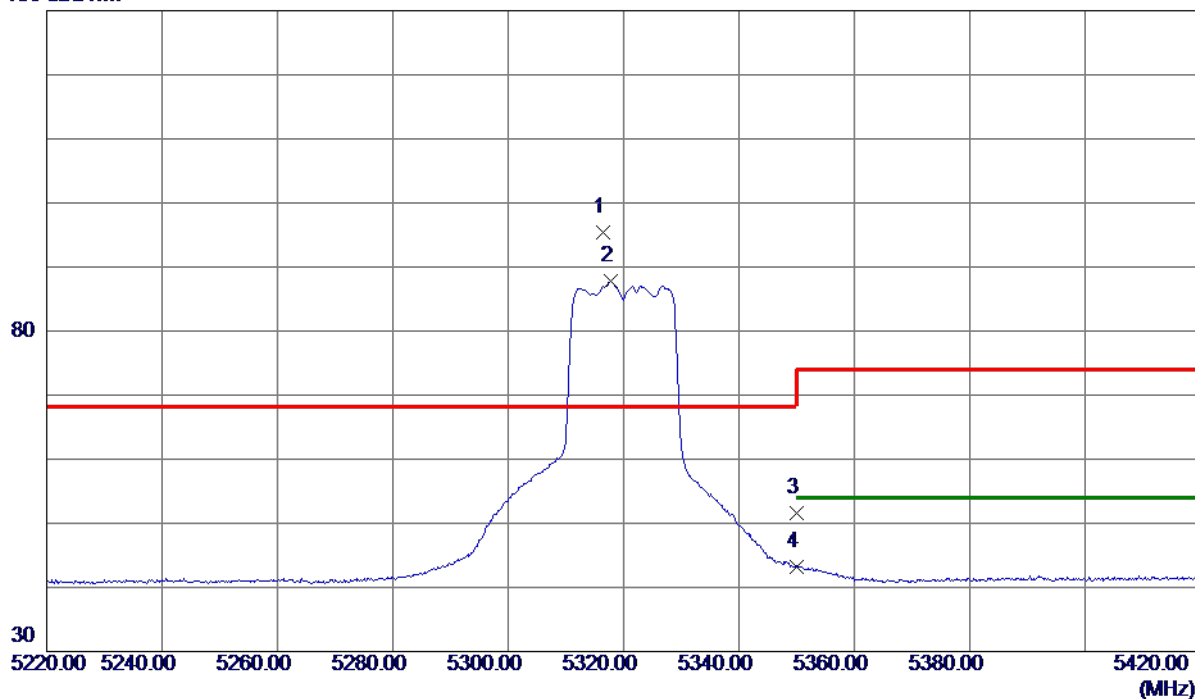

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5316.5000    | 80.74                      | 14.71                   | 95.45                     | 68.30           | 27.15        | Peak     | No Limit |
| 2   | 5317.7000    | 73.07                      | 14.71                   | 87.78                     | 999.00          | -911.22      | AVG      | No Limit |
| 3   | 5350.0000    | 36.76                      | 14.79                   | 51.55                     | 74.00           | -22.45       | Peak     |          |
| 4   | 5350.0000    | 28.48                      | 14.79                   | 43.27                     | 54.00           | -10.73       | AVG      |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5320 MHz |

### Horizontal

80 dBuV/m

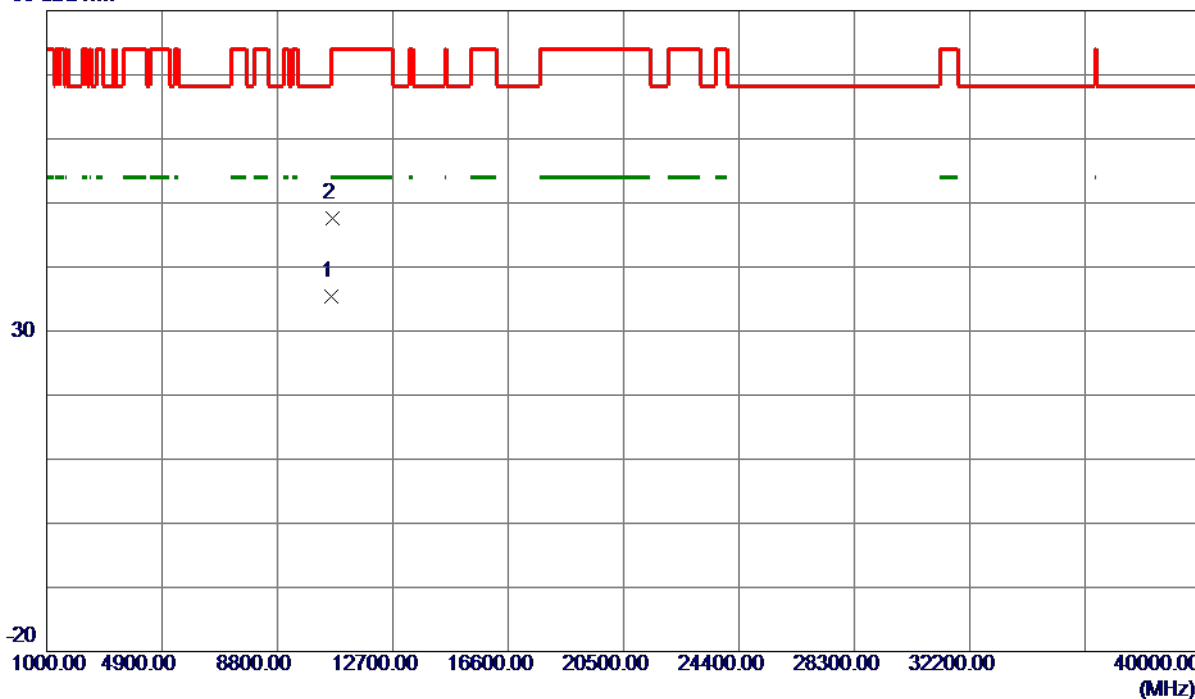

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10636.9050   | 23.93                      | 11.56                   | 35.49                     | 54.00           | -18.51       | AVG      |         |
| 2   | 10644.5300   | 36.05                      | 11.56                   | 47.61                     | 74.00           | -26.39       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5270 MHz |

# Vertical

130 dBuV/m

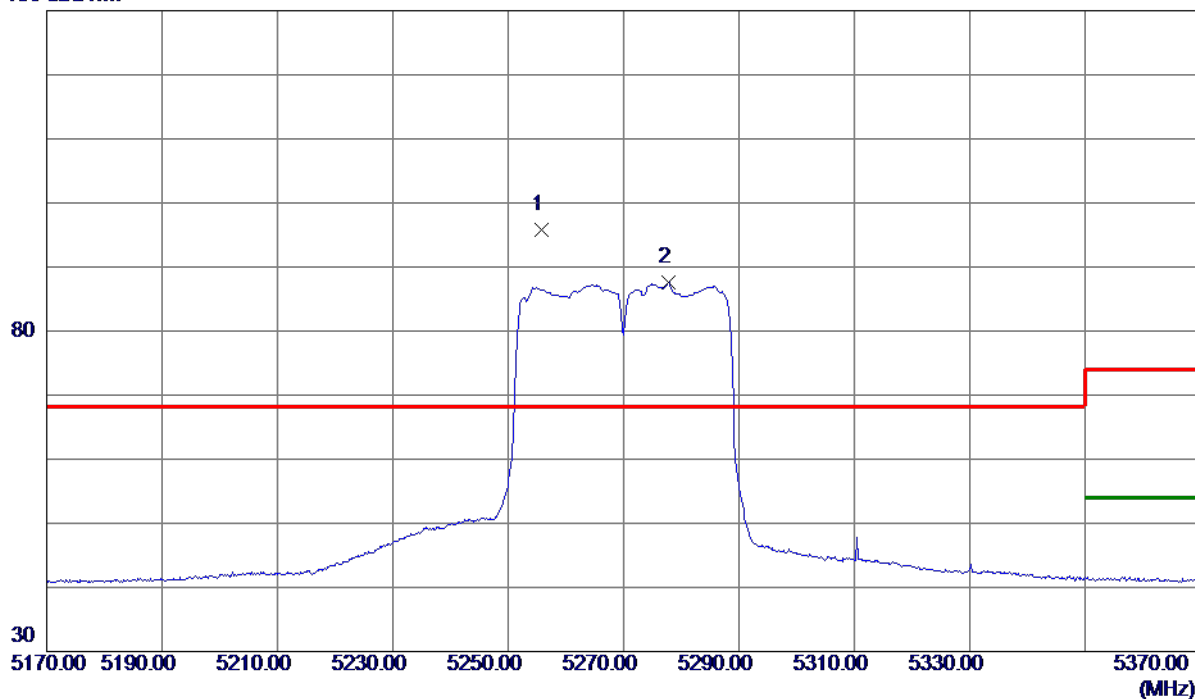

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5255.7000    | 81.27                      | 14.57                   | 95.84                     | 68.30           | 27.54        | Peak     | No Limit |
| 2   | 5277.7000    | 72.96                      | 14.62                   | 87.58                     | 999.00          | -911.42      | AVG      | No Limit |

## REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5270 MHz |

Vertical

80 dBuV/m

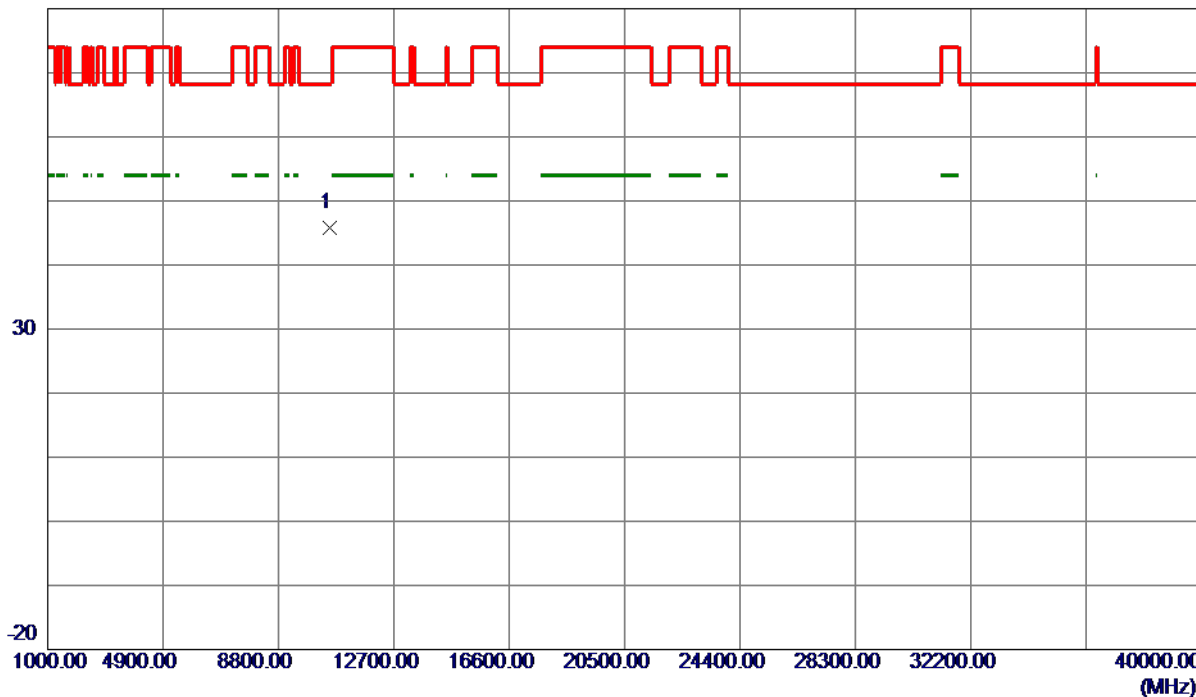

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10544.0000   | 34.23                      | 11.54                   | 45.77                     | 68.30           | -22.53       | Peak     |         |


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5270 MHz |

### Horizontal

130 dBuV/m

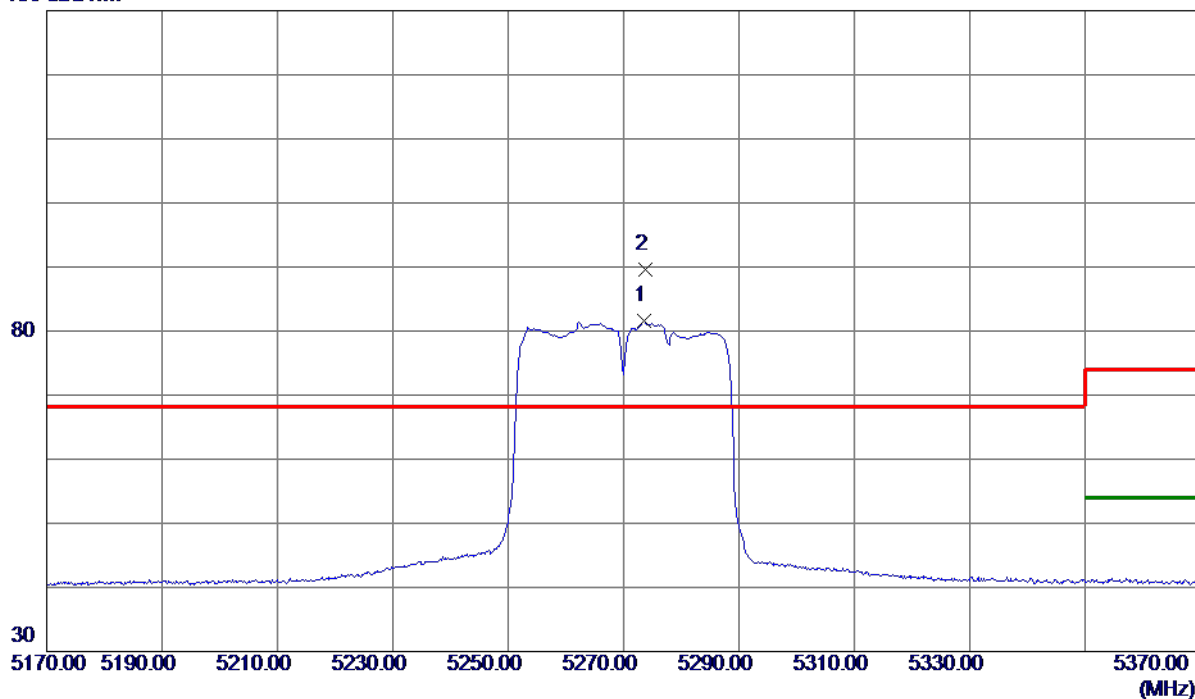

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5273.5000    | 66.98                      | 14.61                   | 81.59                     | 999.00          | -917.41      | AVG      | No Limit |
| 2 * | 5273.7000    | 74.95                      | 14.61                   | 89.56                     | 68.30           | 21.26        | Peak     | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5270 MHz |

### Horizontal

80 dBuV/m

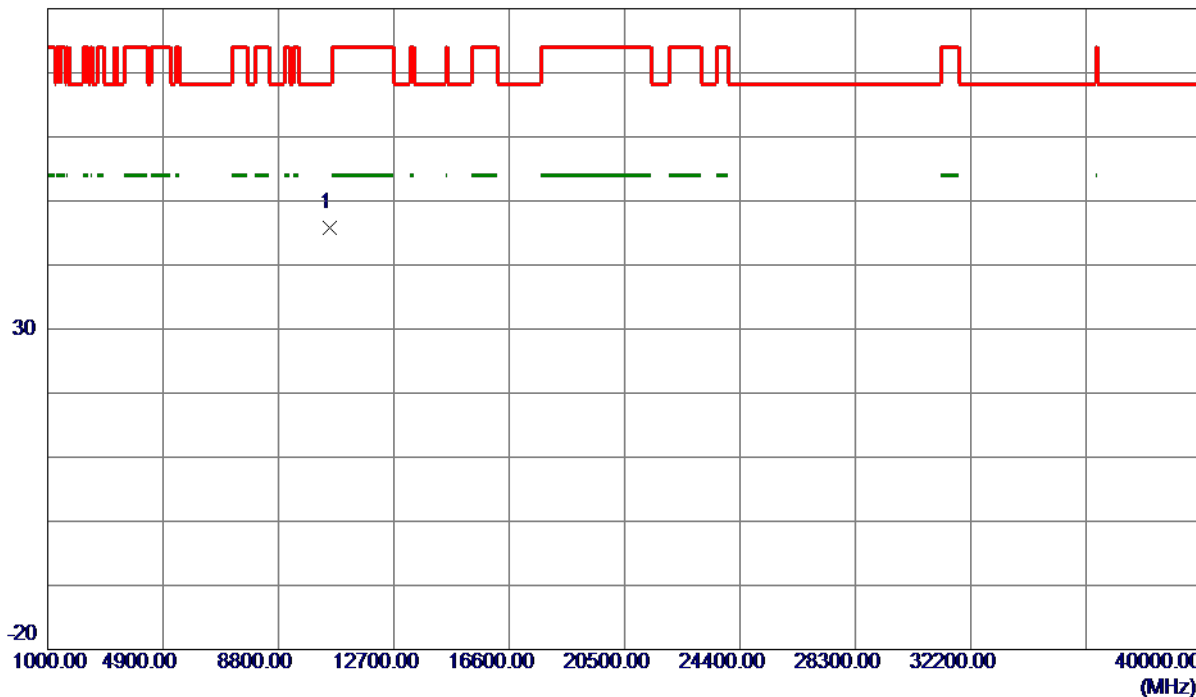

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10535.5050   | 34.27                      | 11.54                   | 45.81                     | 68.30           | -22.49       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5310 MHz |

### Vertical

130 dBuV/m

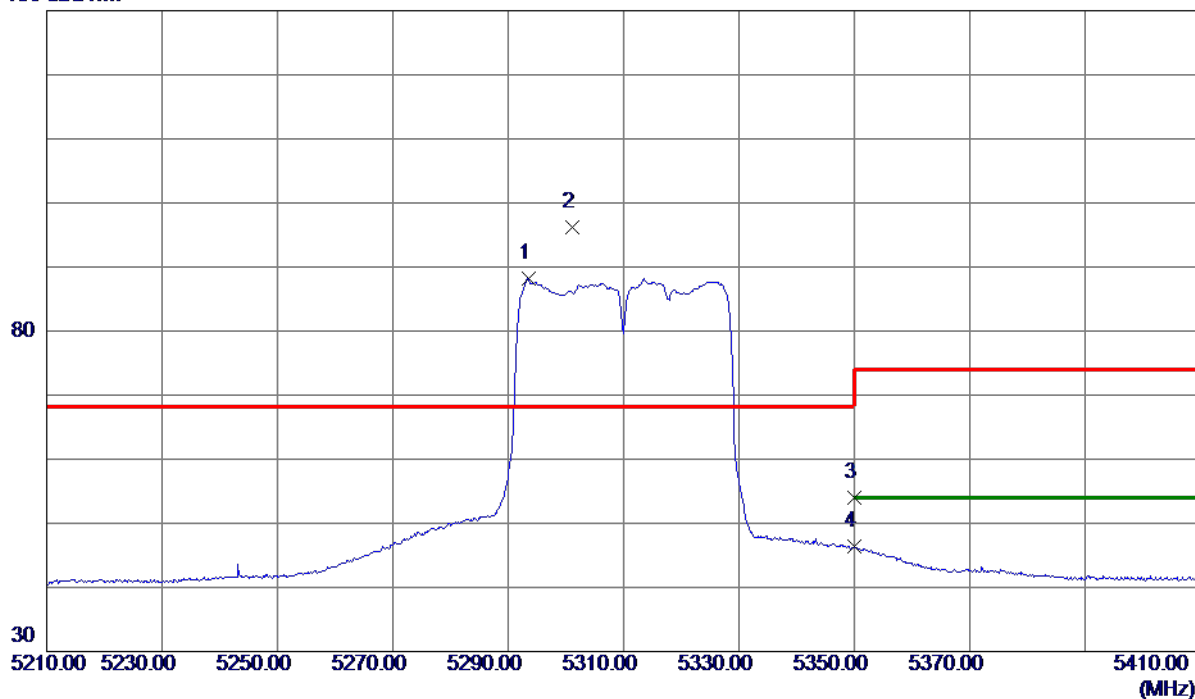

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5293.5000    | 73.53                      | 14.66                   | 88.19                     | 999.00          | -910.81      | AVG      | No Limit |
| 2 * | 5301.1000    | 81.58                      | 14.67                   | 96.25                     | 68.30           | 27.95        | Peak     | No Limit |
| 3   | 5350.0000    | 39.28                      | 14.79                   | 54.07                     | 74.00           | -19.93       | Peak     |          |
| 4   | 5350.0000    | 31.64                      | 14.79                   | 46.43                     | 54.00           | -7.57        | AVG      |          |


#### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5310 MHz |

### Vertical

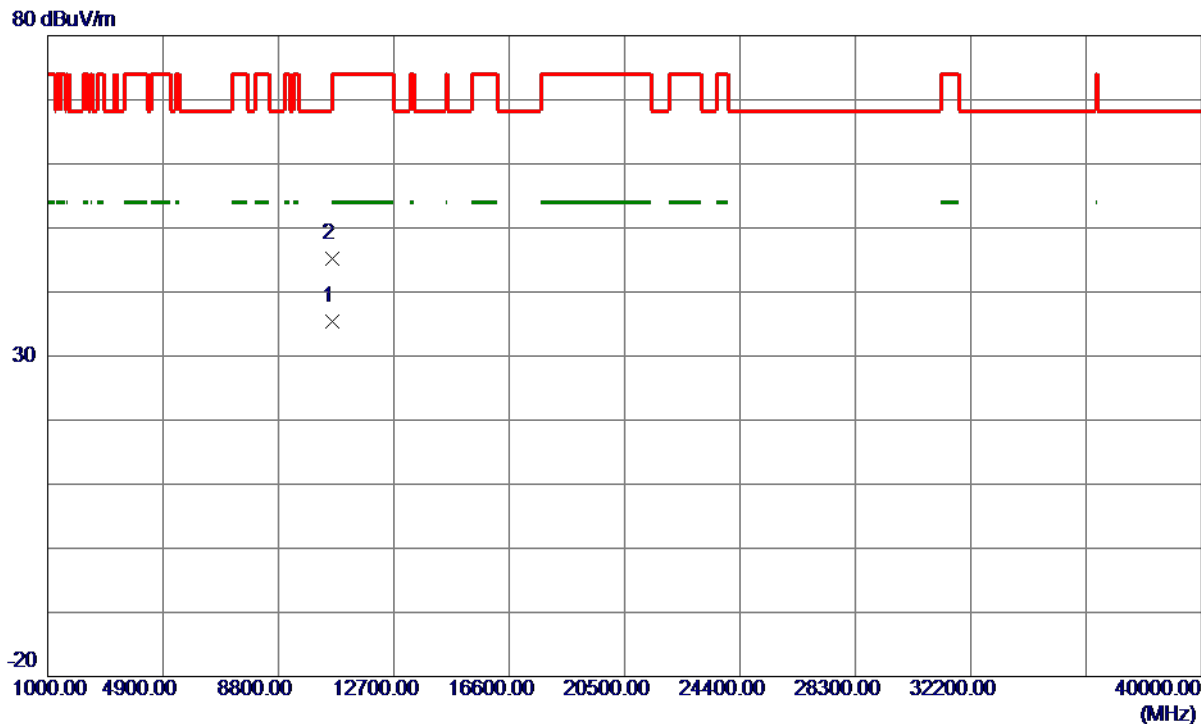

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10616.0000   | 23.78                      | 11.55                   | 35.33                     | 54.00           | -18.67       | AVG      |         |
| 2   | 10618.7200   | 33.67                      | 11.56                   | 45.23                     | 74.00           | -28.77       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5310 MHz |

### Horizontal

130 dBuV/m

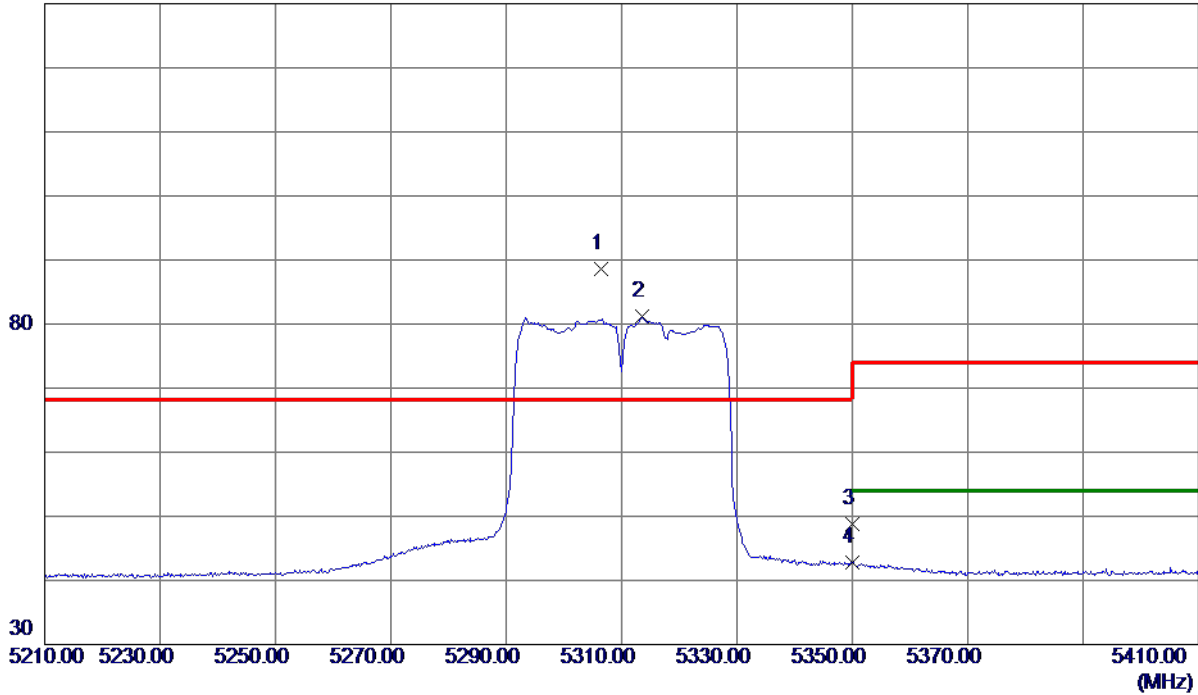

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5306.5000    | 73.97                      | 14.69                   | 88.66                     | 68.30           | 20.36        | Peak     | No Limit |
| 2   | 5313.5000    | 66.54                      | 14.70                   | 81.24                     | 999.00          | -917.76      | AVG      | No Limit |
| 3   | 5350.0000    | 34.08                      | 14.79                   | 48.87                     | 74.00           | -25.13       | Peak     |          |
| 4   | 5350.0000    | 27.94                      | 14.79                   | 42.73                     | 54.00           | -11.27       | AVG      |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5310 MHz |

### Horizontal

80 dBuV/m

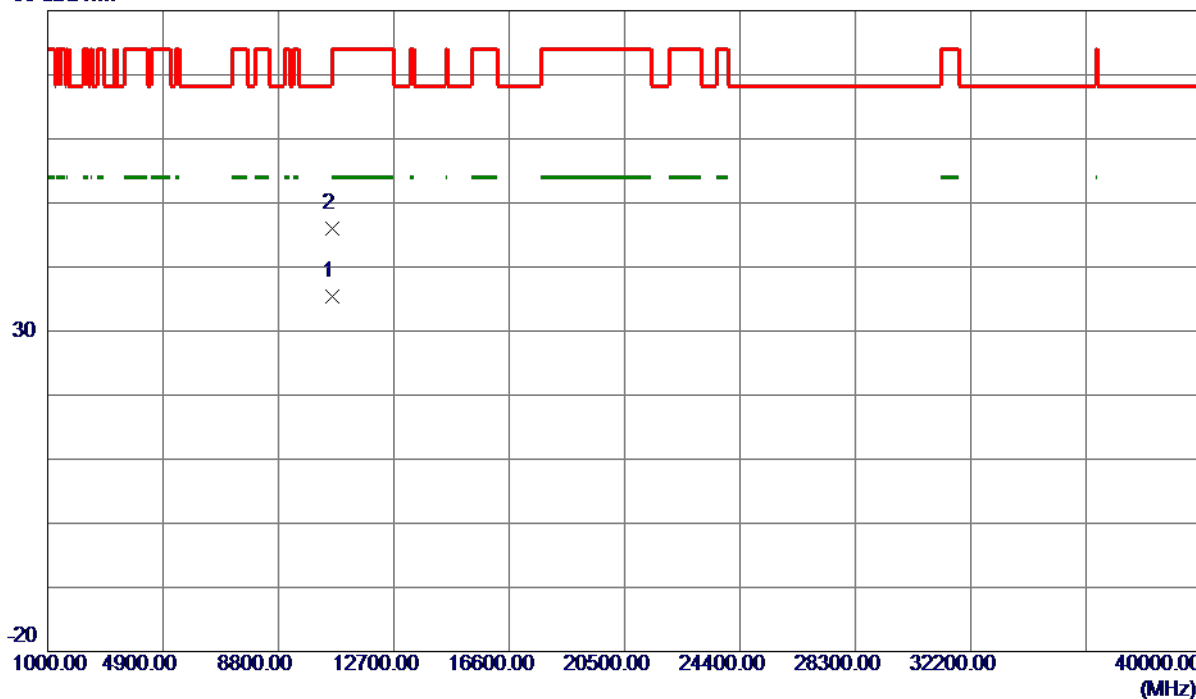

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10615.8200   | 23.93                      | 11.55                   | 35.48                     | 54.00           | -18.52       | AVG      |         |
| 2   | 10619.8200   | 34.39                      | 11.56                   | 45.95                     | 74.00           | -28.05       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT80) Mode 5290 MHz |

### Vertical

130 dBuV/m

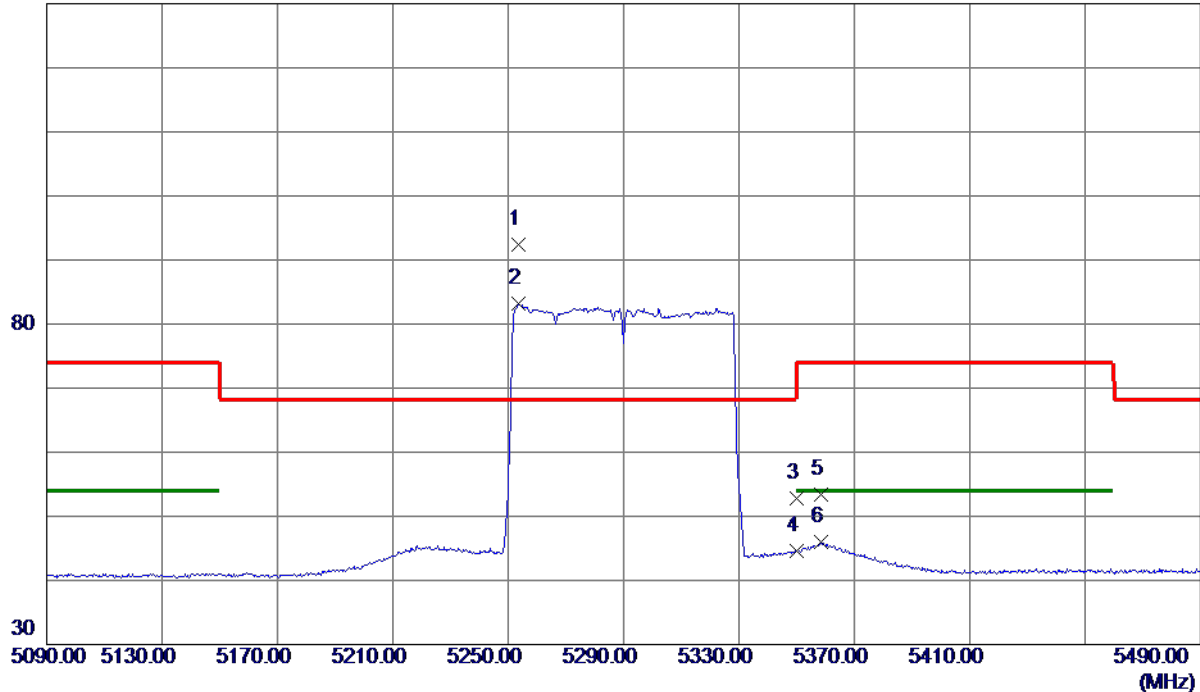

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5253.4000    | 77.84                      | 14.56                   | 92.40                     | 68.30           | 24.10        | Peak     | No Limit |
| 2   | 5253.6000    | 68.57                      | 14.56                   | 83.13                     | 999.00          | -915.87      | AVG      | No Limit |
| 3   | 5350.0000    | 38.05                      | 14.79                   | 52.84                     | 74.00           | -21.16       | Peak     |          |
| 4   | 5350.0000    | 29.72                      | 14.79                   | 44.51                     | 54.00           | -9.49        | AVG      |          |
| 5   | 5358.6000    | 38.66                      | 14.81                   | 53.47                     | 74.00           | -20.53       | Peak     |          |
| 6   | 5358.6000    | 31.12                      | 14.81                   | 45.93                     | 54.00           | -8.07        | AVG      |          |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT80) Mode 5290 MHz |

**Vertical**

80 dBuV/m

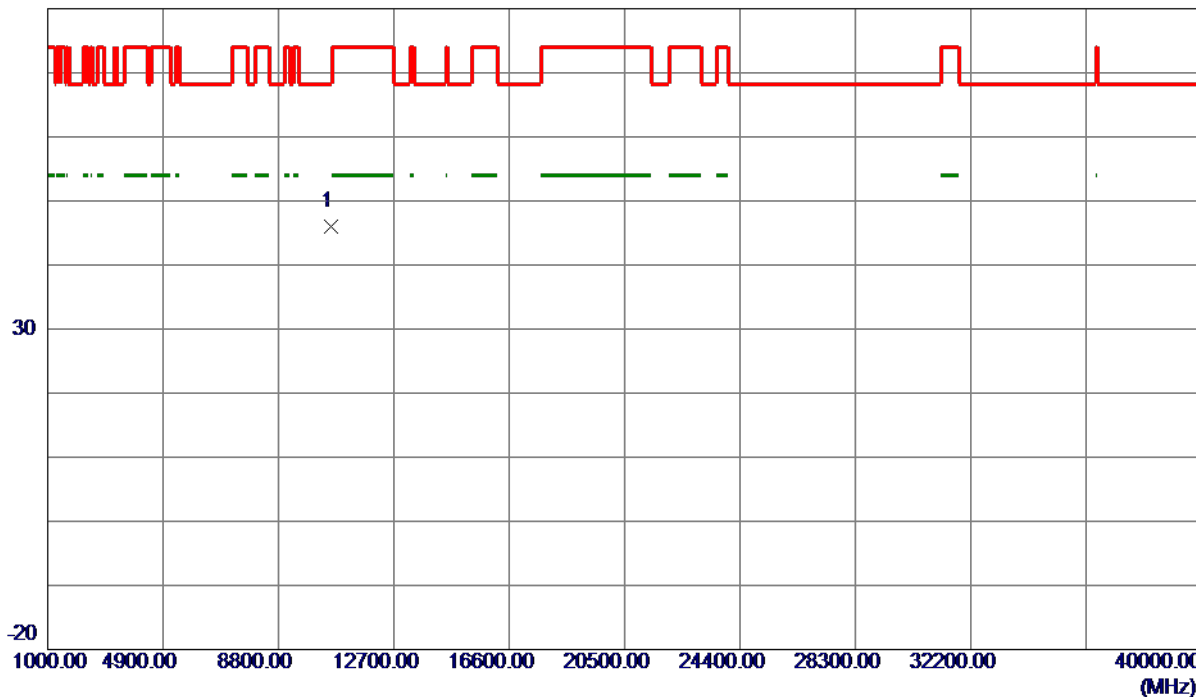

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10577.6730   | 34.42                      | 11.55                   | 45.97                     | 68.30           | -22.33       | Peak     |         |


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT80) Mode 5290 MHz |

### Horizontal

130 dBuV/m

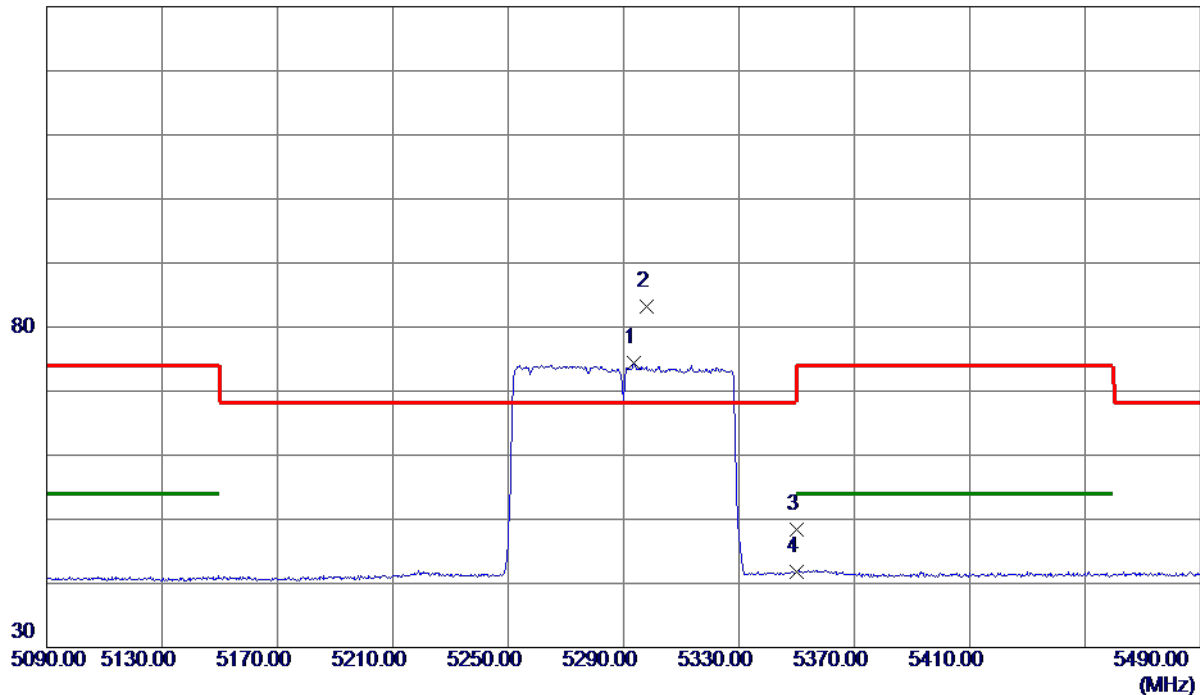

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5293.6000    | 59.76                      | 14.66                   | 74.42                     | 999.00          | -924.58      | AVG      | No Limit |
| 2 * | 5298.0000    | 68.61                      | 14.67                   | 83.28                     | 68.30           | 14.98        | Peak     | No Limit |
| 3   | 5350.0000    | 33.56                      | 14.79                   | 48.35                     | 74.00           | -25.65       | Peak     |          |
| 4   | 5350.0000    | 26.93                      | 14.79                   | 41.72                     | 54.00           | -12.28       | AVG      |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT80) Mode 5290 MHz |

### Horizontal

80 dBuV/m

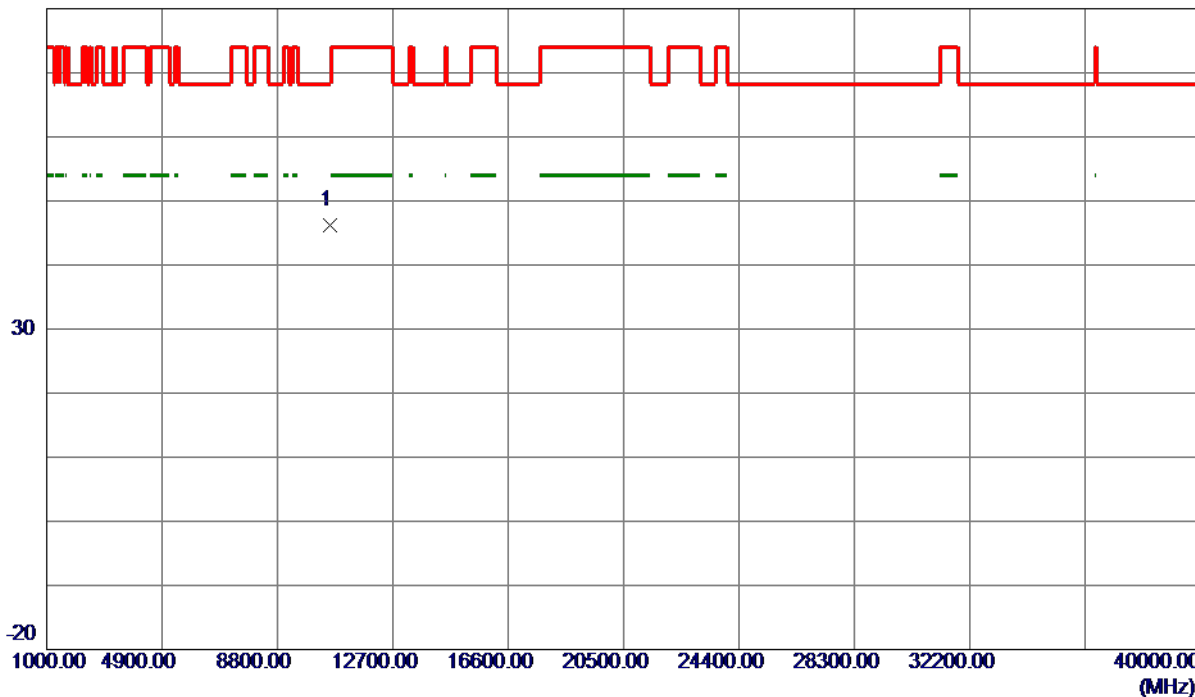

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10581.7150   | 34.58                      | 11.55                   | 46.13                     | 999.00          | -952.87      | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5500 MHz |

**Vertical**

130 dBuV/m

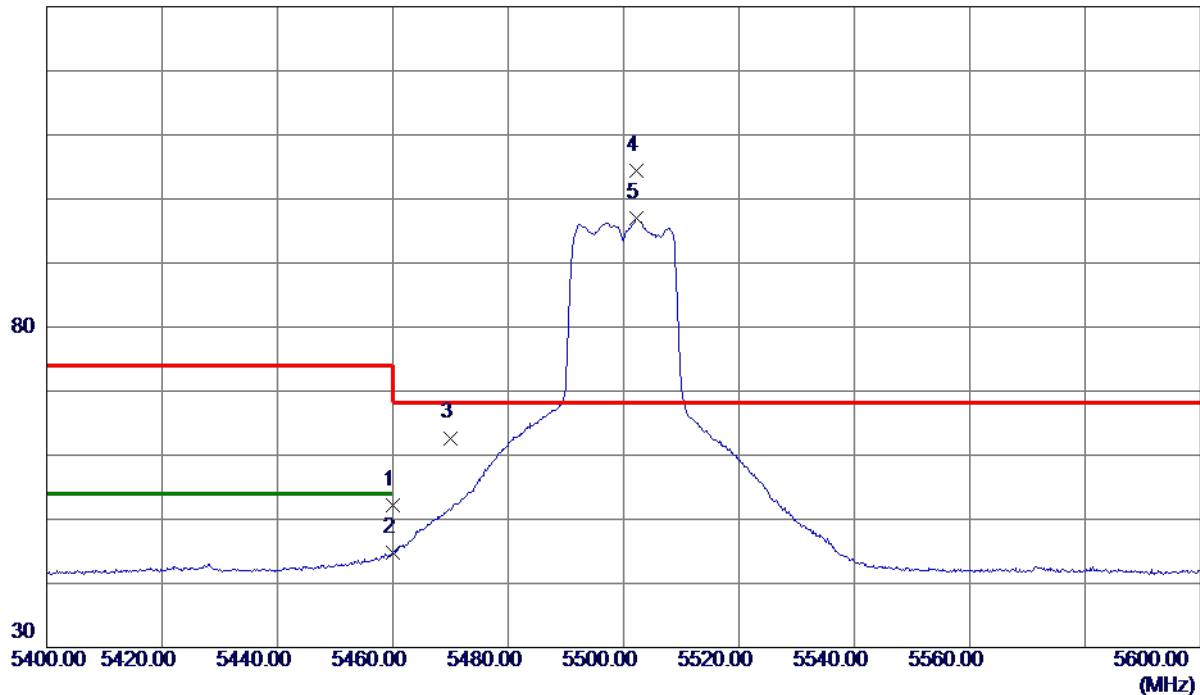

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 37.07                      | 15.05                   | 52.12                     | 74.00           | -21.88       | Peak     |          |
| 2   | 5460.0000    | 29.72                      | 15.05                   | 44.77                     | 54.00           | -9.23        | AVG      |          |
| 3   | 5470.0000    | 47.63                      | 15.07                   | 62.70                     | 68.30           | -5.60        | Peak     |          |
| 4 * | 5502.2000    | 89.21                      | 15.15                   | 104.36                    | 68.30           | 36.06        | Peak     | No Limit |
| 5   | 5502.2000    | 81.77                      | 15.15                   | 96.92                     | 999.00          | -902.08      | AVG      | No Limit |


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5500 MHz |

### Vertical

80 dBuV/m

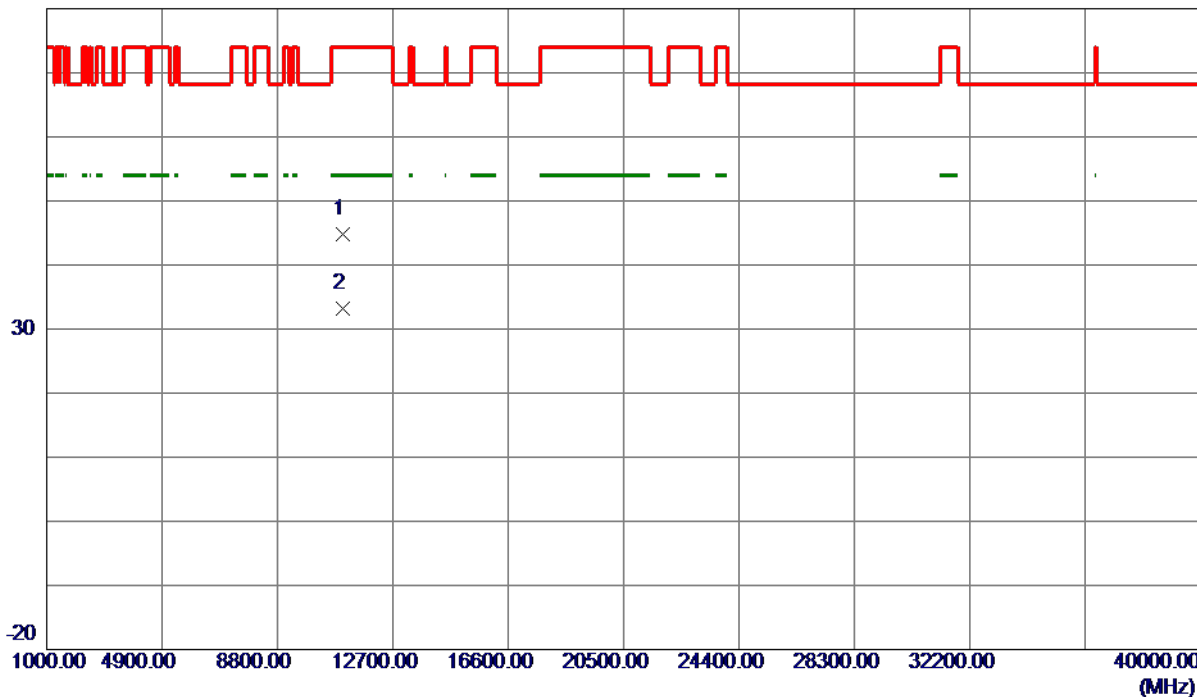

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10998.1730   | 33.15                      | 11.62                   | 44.77                     | 74.00           | -29.23       | Peak     |         |
| 2 * | 10999.4850   | 21.67                      | 11.62                   | 33.29                     | 54.00           | -20.71       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5500 MHz |

### Horizontal

130 dBuV/m

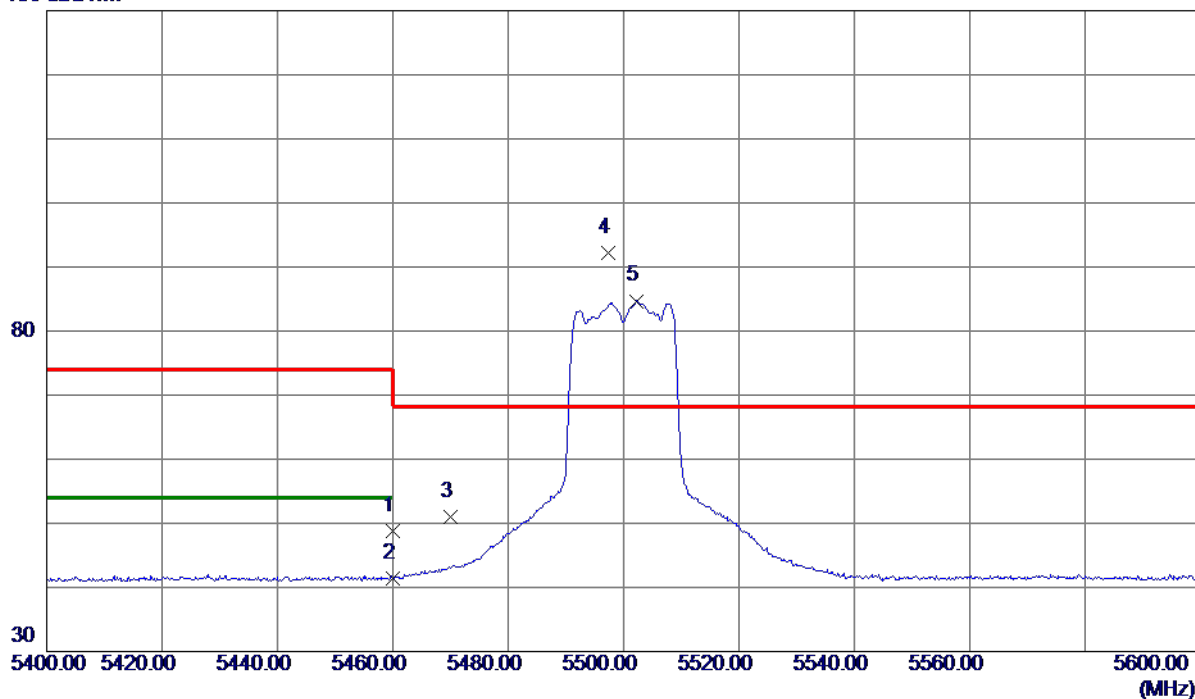

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 33.73                      | 15.05                   | 48.78                     | 74.00           | -25.22       | Peak     |          |
| 2   | 5460.0000    | 26.29                      | 15.05                   | 41.34                     | 54.00           | -12.66       | AVG      |          |
| 3   | 5470.0000    | 35.98                      | 15.07                   | 51.05                     | 68.30           | -17.25       | Peak     |          |
| 4 * | 5497.3000    | 77.13                      | 15.14                   | 92.27                     | 68.30           | 23.97        | Peak     | No Limit |
| 5   | 5502.3000    | 69.55                      | 15.15                   | 84.70                     | 999.00          | -914.30      | AVG      | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5500 MHz |

### Horizontal

80 dBuV/m

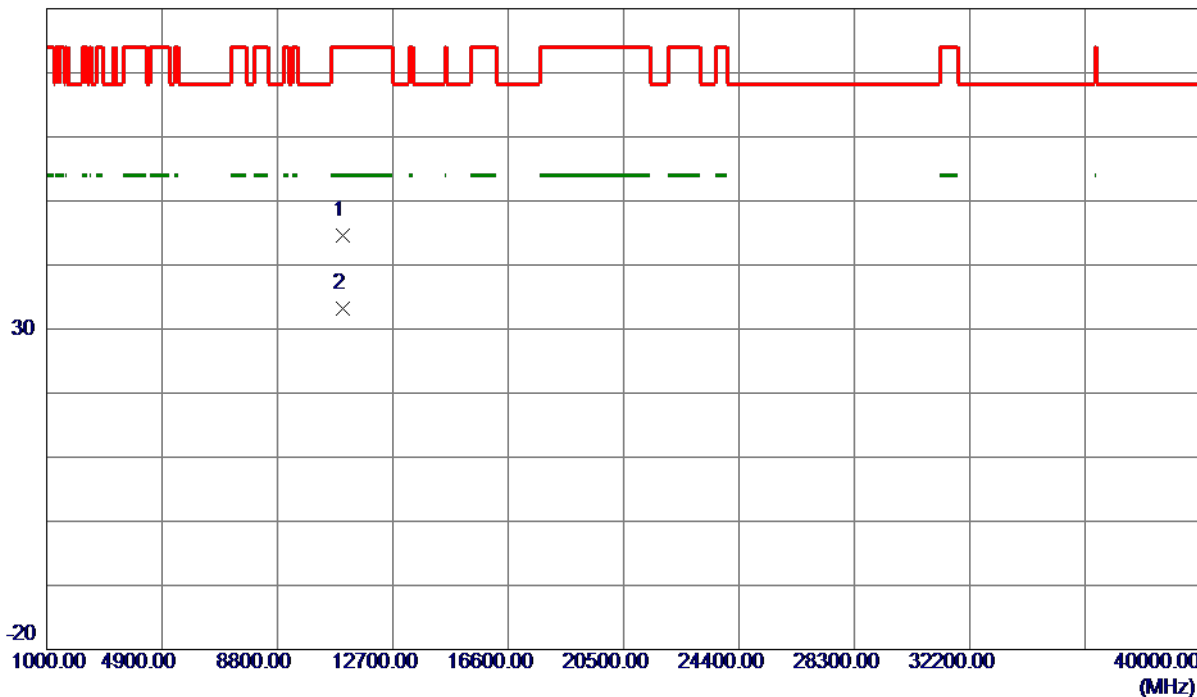

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10999.6400   | 32.96                      | 11.62                   | 44.58                     | 74.00           | -29.42       | Peak     |         |
| 2 * | 10999.8150   | 21.65                      | 11.62                   | 33.27                     | 54.00           | -20.73       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5580 MHz |

**Vertical**

130 dBuV/m

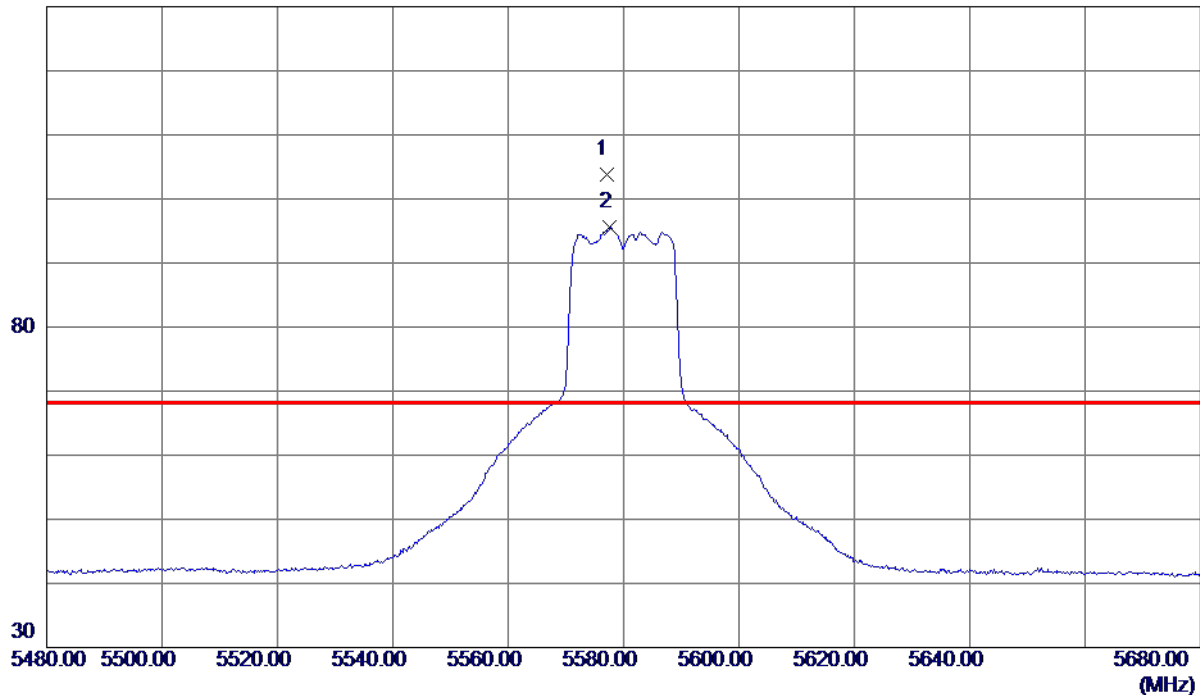


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5577.0000    | 88.38                      | 15.33                   | 103.71                    | 68.30           | 35.41        | Peak     | No Limit |
| 2   | 5577.6000    | 80.18                      | 15.33                   | 95.51                     | 999.00          | -903.49      | AVG      | No Limit |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5580 MHz |

### Vertical

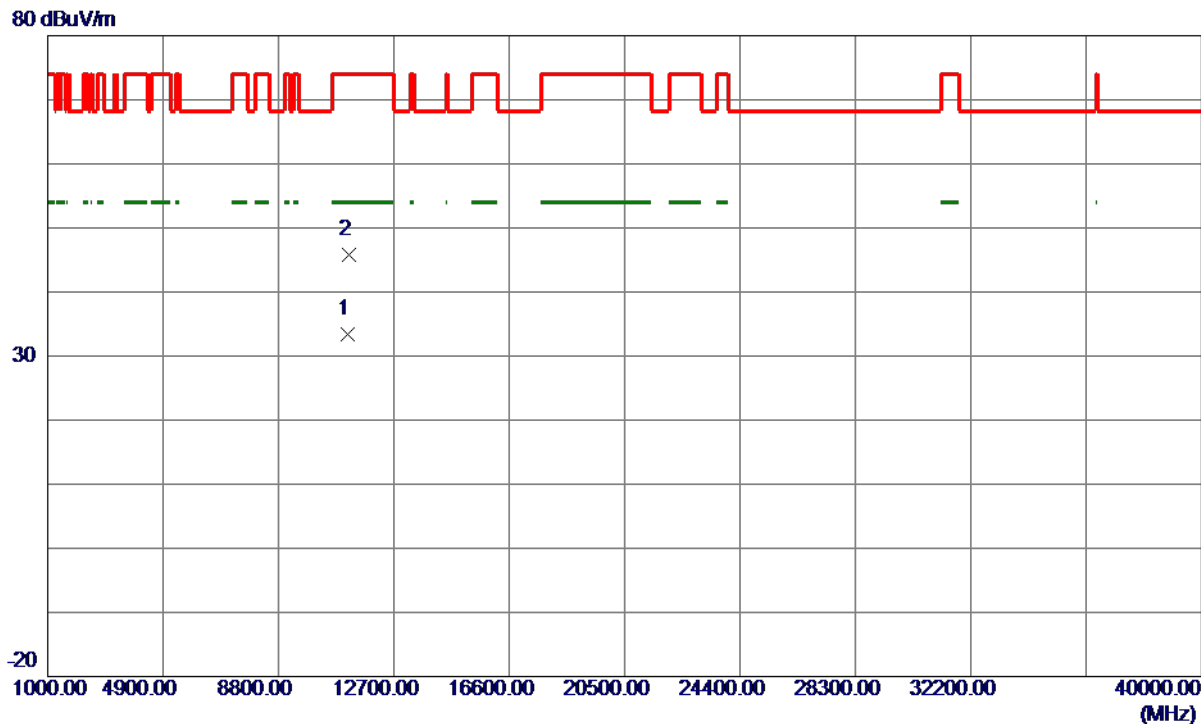

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11159.7180   | 21.69                      | 11.77                   | 33.46                     | 54.00           | -20.54       | AVG      |         |
| 2   | 11162.3170   | 34.07                      | 11.77                   | 45.84                     | 74.00           | -28.16       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5580 MHz |

### Horizontal

130 dBuV/m

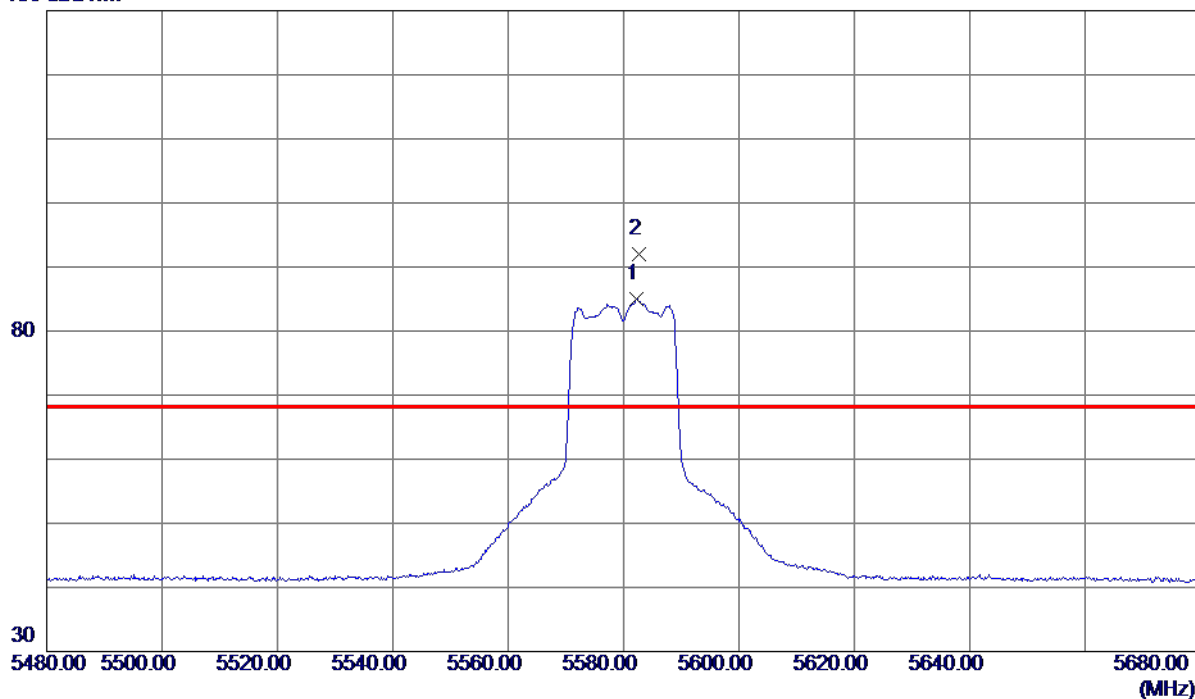

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5582.3000    | 69.69                      | 15.34                   | 85.03                     | 999.00          | -913.97      | AVG      | No Limit |
| 2 * | 5582.6000    | 76.74                      | 15.34                   | 92.08                     | 68.30           | 23.78        | Peak     | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5580 MHz |

### Horizontal

80 dBuV/m

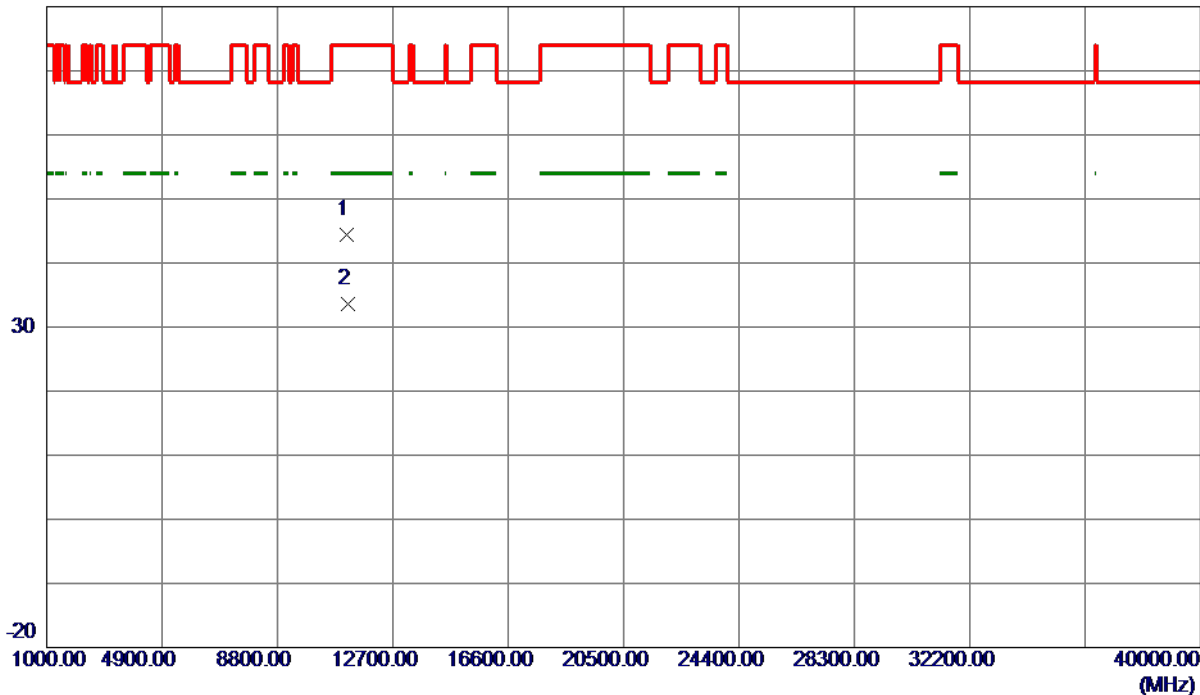

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11161.0400   | 32.64                      | 11.77                   | 44.41                     | 74.00           | -29.59       | Peak     |         |
| 2 * | 11162.2699   | 21.77                      | 11.77                   | 33.54                     | 54.00           | -20.46       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5700 MHz |

### Vertical

130 dBuV/m

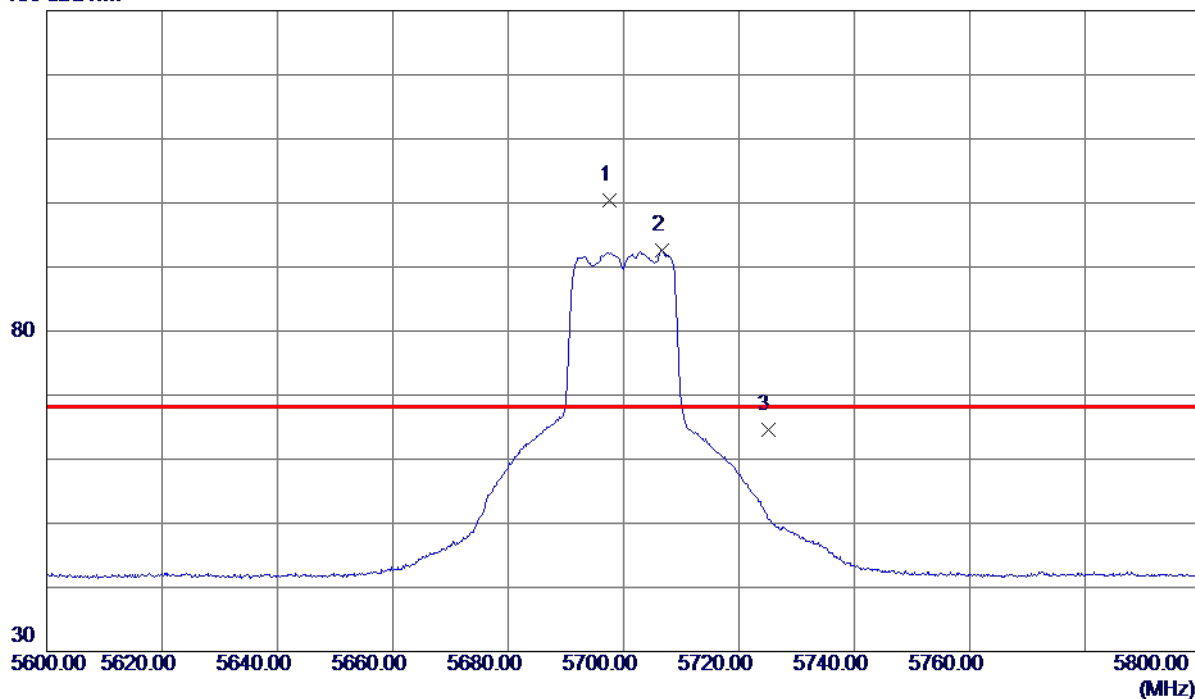

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5697.5000    | 84.71                      | 15.61                   | 100.32                    | 68.30           | 32.02        | Peak     | No Limit |
| 2   | 5706.6000    | 77.03                      | 15.63                   | 92.66                     | 999.00          | -906.34      | AVG      | No Limit |
| 3   | 5725.0000    | 48.97                      | 15.68                   | 64.65                     | 68.30           | -3.65        | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5700 MHz |

Vertical

80 dBuV/m

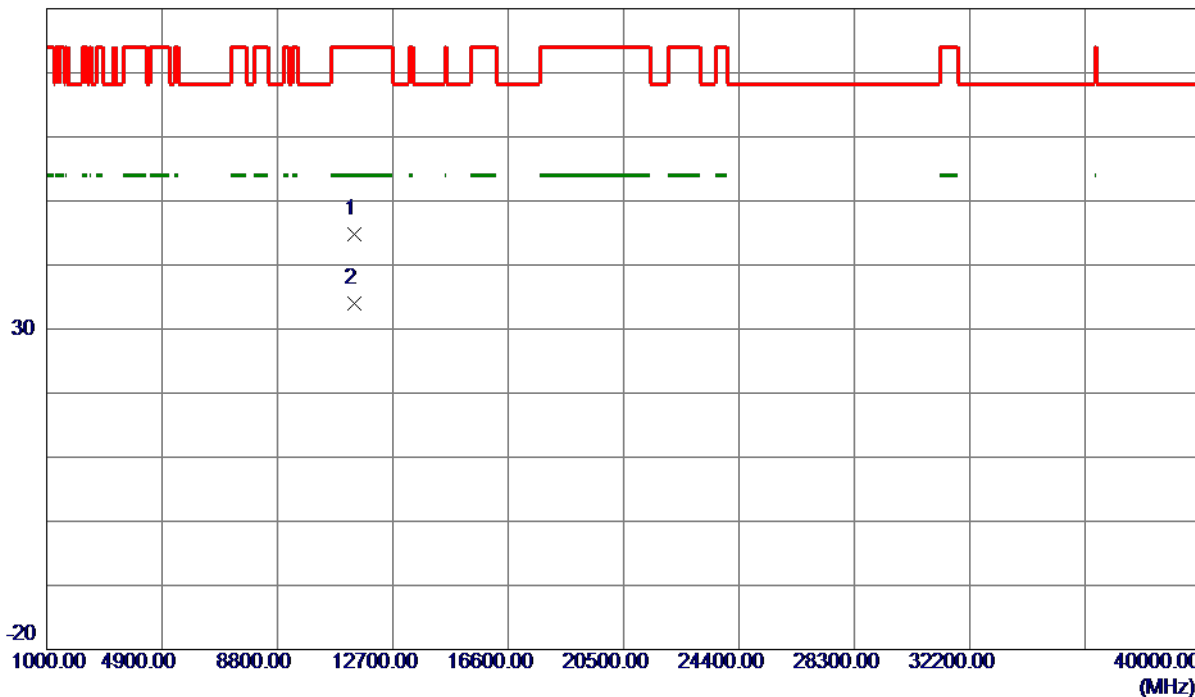

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11397.9900   | 32.73                      | 11.98                   | 44.71                     | 74.00           | -29.29       | Peak     |         |
| 2 * | 11400.4400   | 21.96                      | 11.98                   | 33.94                     | 54.00           | -20.06       | AVG      |         |


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5700 MHz |

### Horizontal

130 dBuV/m

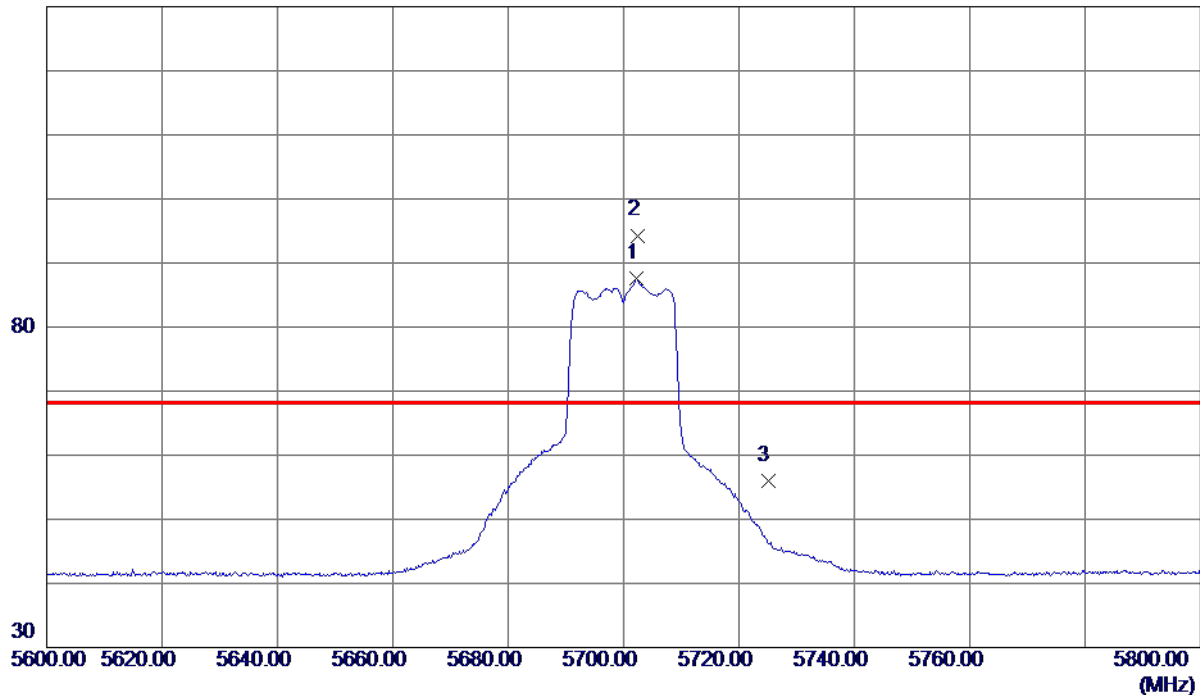

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5702.2000    | 71.96                      | 15.62                   | 87.58                     | 999.00          | -911.42      | AVG      | No Limit |
| 2 * | 5702.5000    | 78.67                      | 15.63                   | 94.30                     | 68.30           | 26.00        | Peak     | No Limit |
| 3   | 5725.0000    | 40.26                      | 15.68                   | 55.94                     | 68.30           | -12.36       | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5700 MHz |

### Horizontal

80 dBuV/m

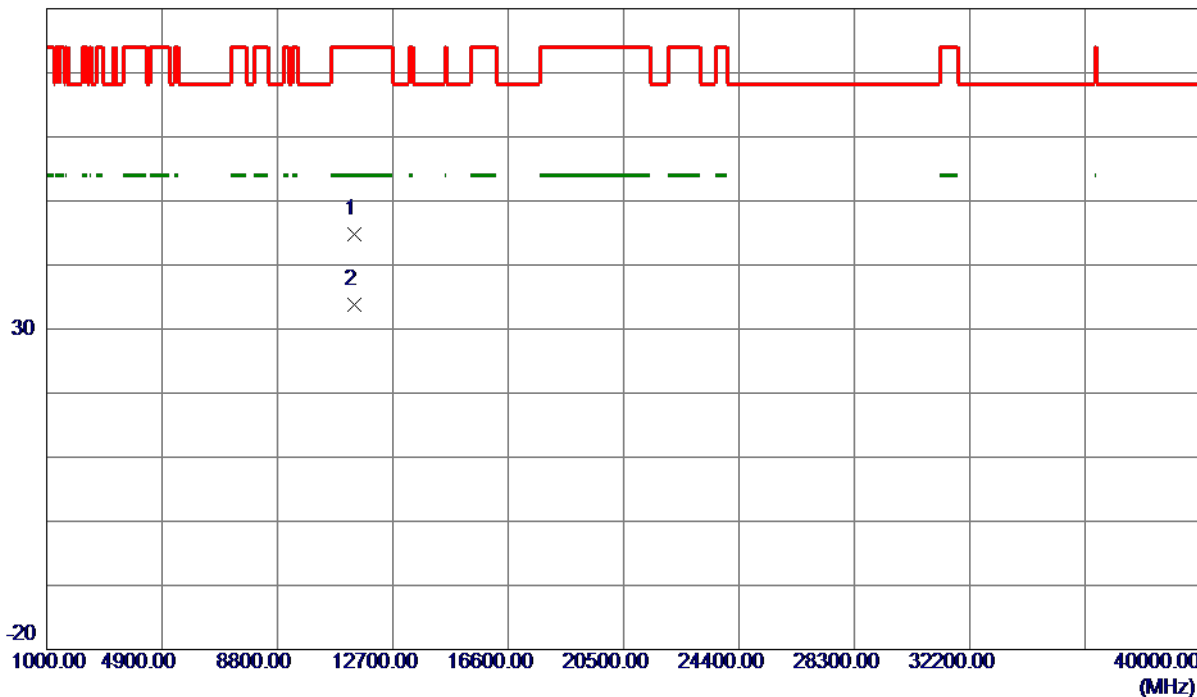

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11399.7950   | 32.90                      | 11.98                   | 44.88                     | 74.00           | -29.12       | Peak     |         |
| 2 * | 11401.7779   | 21.87                      | 11.99                   | 33.86                     | 54.00           | -20.14       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5510 MHz |

## Vertical

130 dBuV/m

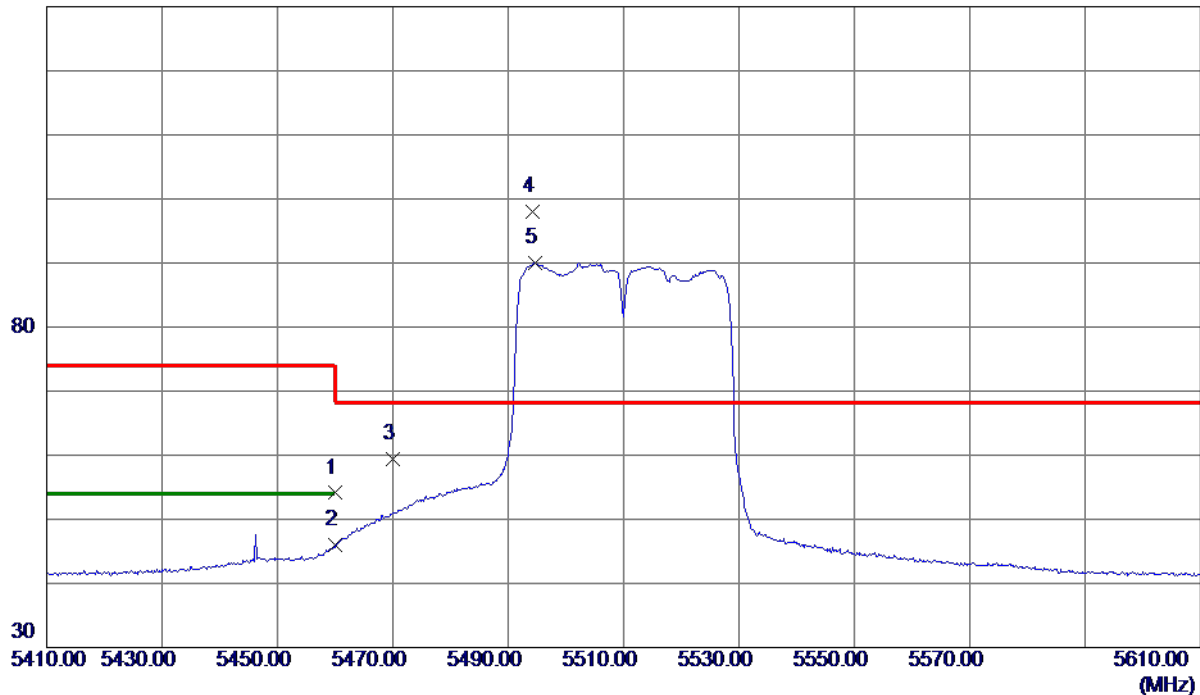

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 39.05                      | 15.05                   | 54.10                     | 74.00           | -19.90       | Peak     |          |
| 2   | 5460.0000    | 30.93                      | 15.05                   | 45.98                     | 54.00           | -8.02        | AVG      |          |
| 3   | 5470.0000    | 44.28                      | 15.07                   | 59.35                     | 68.30           | -8.95        | Peak     |          |
| 4 * | 5494.3000    | 82.96                      | 15.13                   | 98.09                     | 68.30           | 29.79        | Peak     | No Limit |
| 5   | 5494.6000    | 74.82                      | 15.13                   | 89.95                     | 999.00          | -909.05      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5510 MHz |

### Vertical

80 dBuV/m

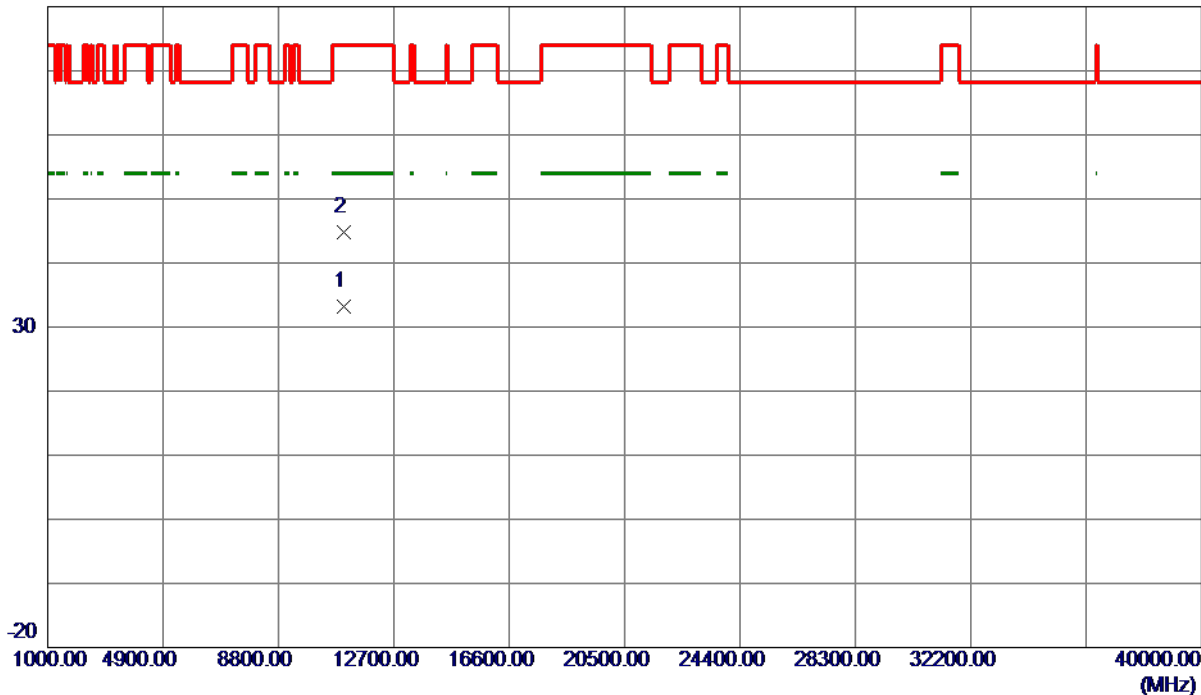

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11019.7000   | 21.63                      | 11.64                   | 33.27                     | 54.00           | -20.73       | AVG      |         |
| 2   | 11021.5380   | 33.15                      | 11.64                   | 44.79                     | 74.00           | -29.21       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5510 MHz |

### Horizontal

130 dBuV/m

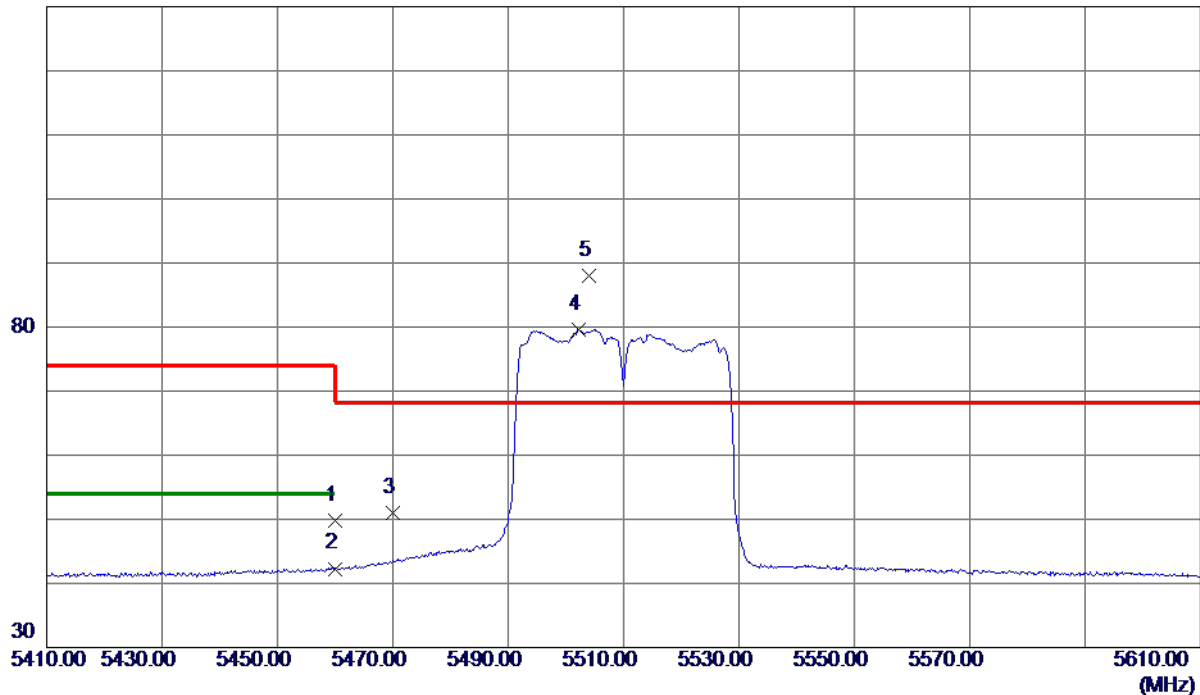

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 34.66                      | 15.05                   | 49.71                     | 74.00           | -24.29       | Peak     |          |
| 2   | 5460.0000    | 27.25                      | 15.05                   | 42.30                     | 54.00           | -11.70       | AVG      |          |
| 3   | 5470.0000    | 35.89                      | 15.07                   | 50.96                     | 68.30           | -17.34       | Peak     |          |
| 4   | 5502.2000    | 64.52                      | 15.15                   | 79.67                     | 999.00          | -919.33      | AVG      | No Limit |
| 5 * | 5504.1000    | 72.89                      | 15.15                   | 88.04                     | 68.30           | 19.74        | Peak     | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5510 MHz |

### Horizontal

80 dBuV/m

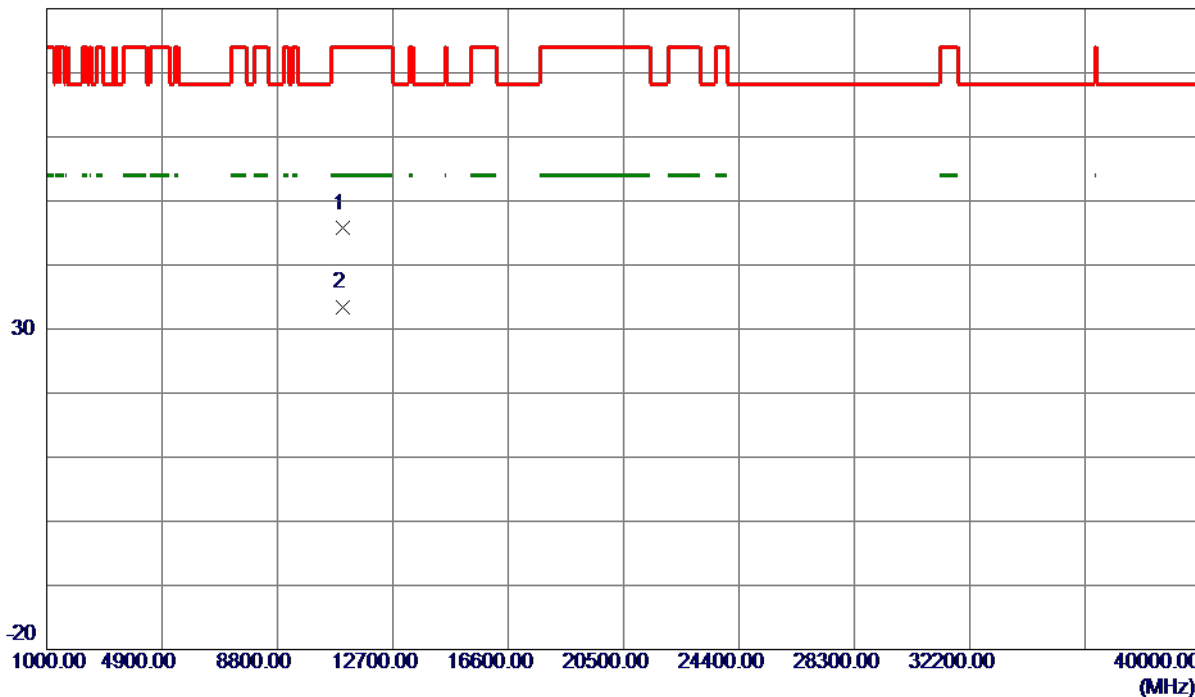

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11020.4500   | 34.06                      | 11.64                   | 45.70                     | 74.00           | -28.30       | Peak     |         |
| 2 * | 11021.4900   | 21.73                      | 11.64                   | 33.37                     | 54.00           | -20.63       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5550 MHz |

### Vertical

130 dBuV/m

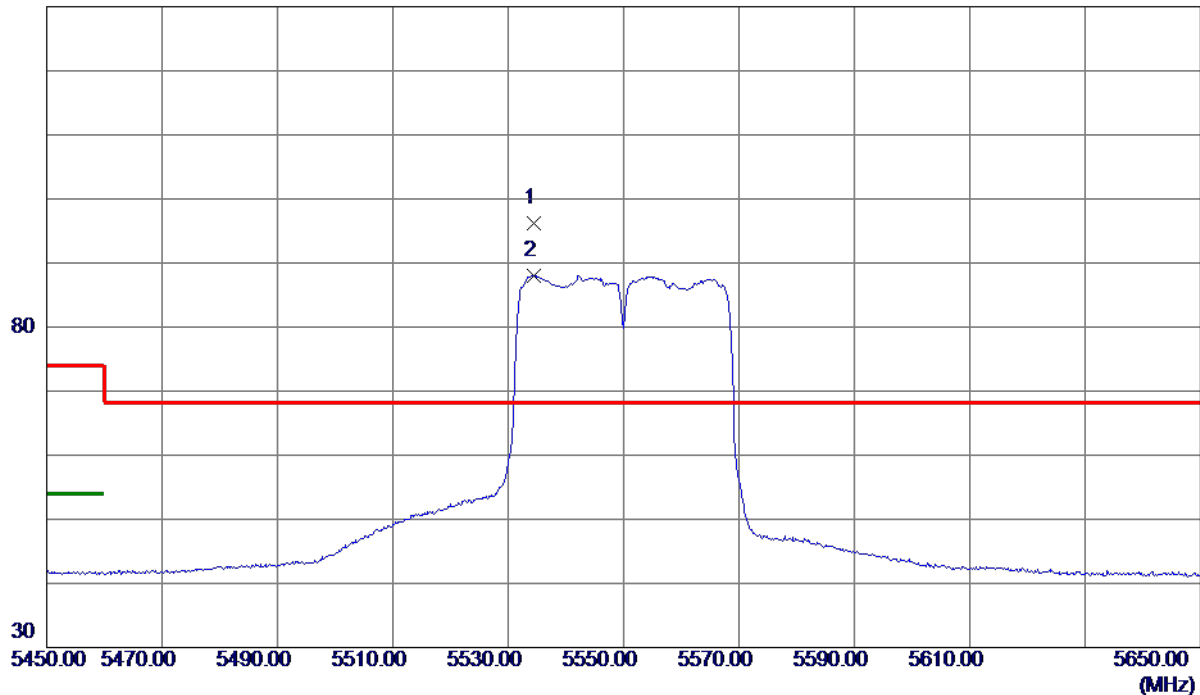

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5534.5000    | 80.94                      | 15.23                   | 96.17                     | 68.30           | 27.87        | Peak     | No Limit |
| 2   | 5534.5000    | 72.84                      | 15.23                   | 88.07                     | 999.00          | -910.93      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5550 MHz |

Vertical

80 dBuV/m

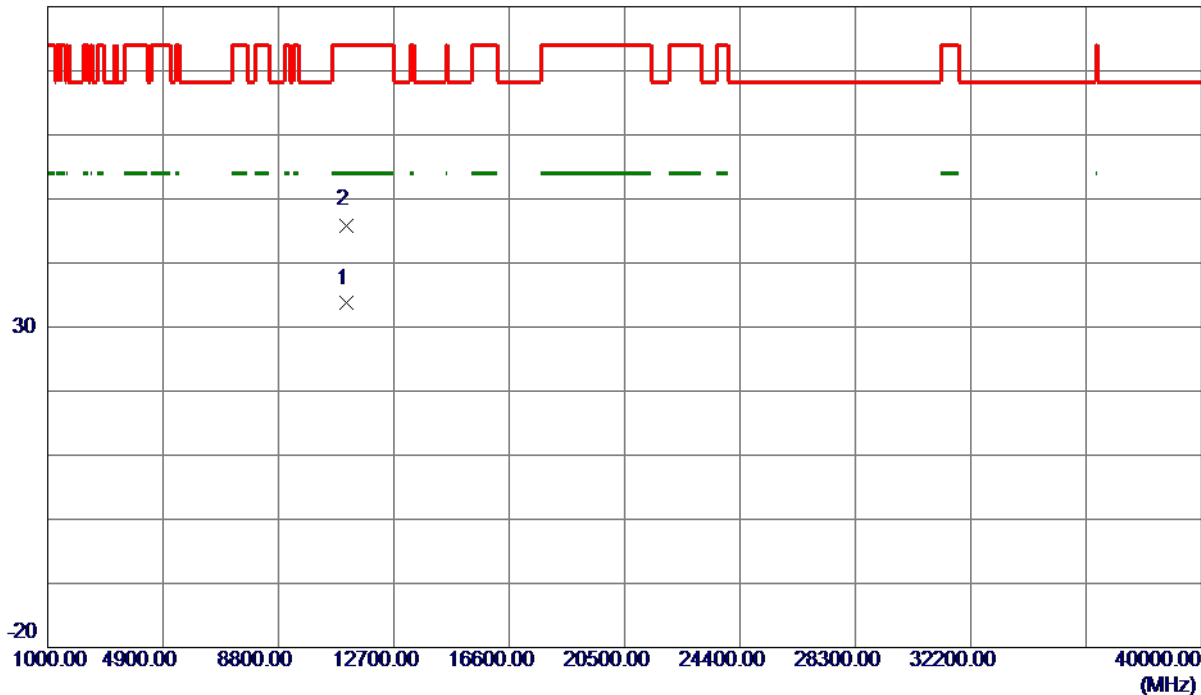

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11098.4380   | 21.99                      | 11.71                   | 33.70                     | 54.00           | -20.30       | AVG      |         |
| 2   | 11102.4100   | 34.19                      | 11.71                   | 45.90                     | 74.00           | -28.10       | Peak     |         |


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5550 MHz |

### Horizontal

130 dBuV/m

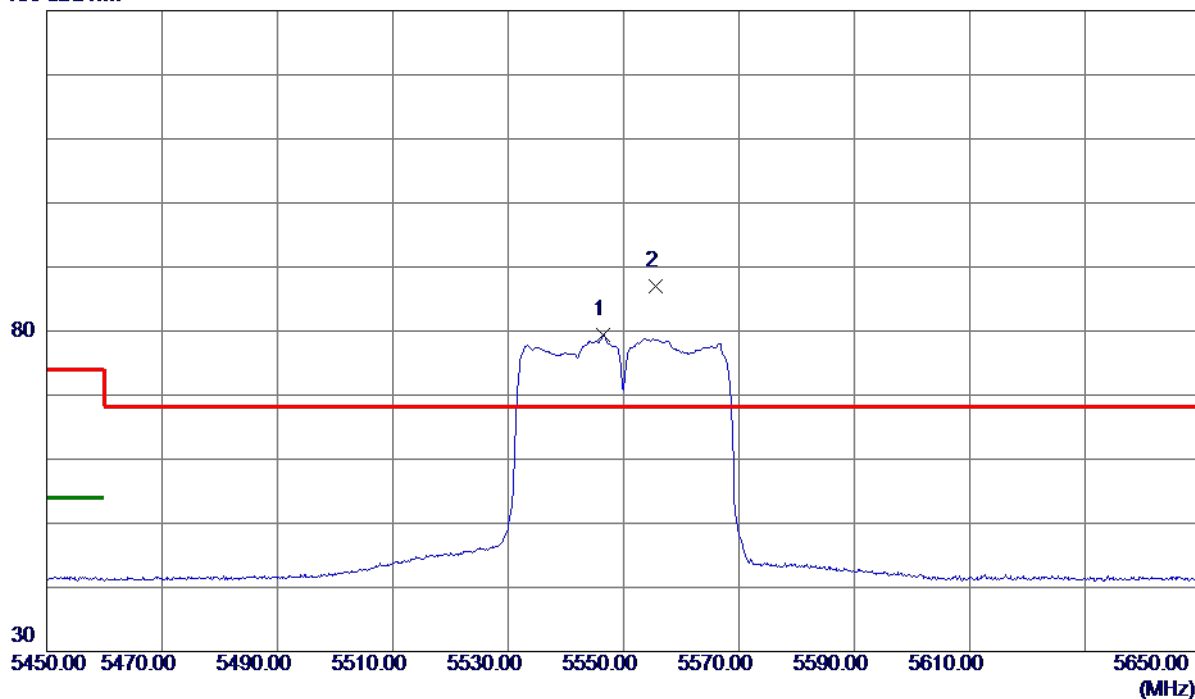

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5546.5000    | 64.20                      | 15.26                   | 79.46                     | 999.00          | -919.54      | AVG      | No Limit |
| 2 * | 5555.6000    | 71.81                      | 15.28                   | 87.09                     | 68.30           | 18.79        | Peak     | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5550 MHz |

### Horizontal

80 dBuV/m

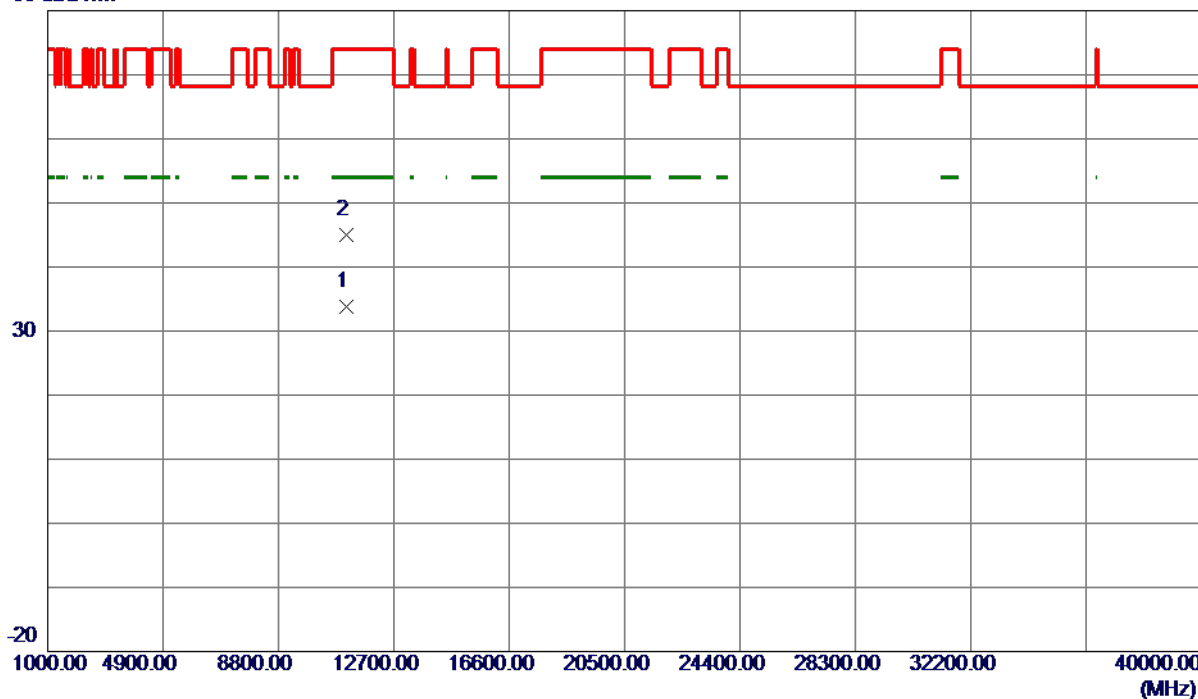

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11098.0750   | 22.05                      | 11.71                   | 33.76                     | 54.00           | -20.24       | AVG      |         |
| 2   | 11101.3050   | 33.23                      | 11.71                   | 44.94                     | 74.00           | -29.06       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5670 MHz |

### Vertical

130 dBuV/m

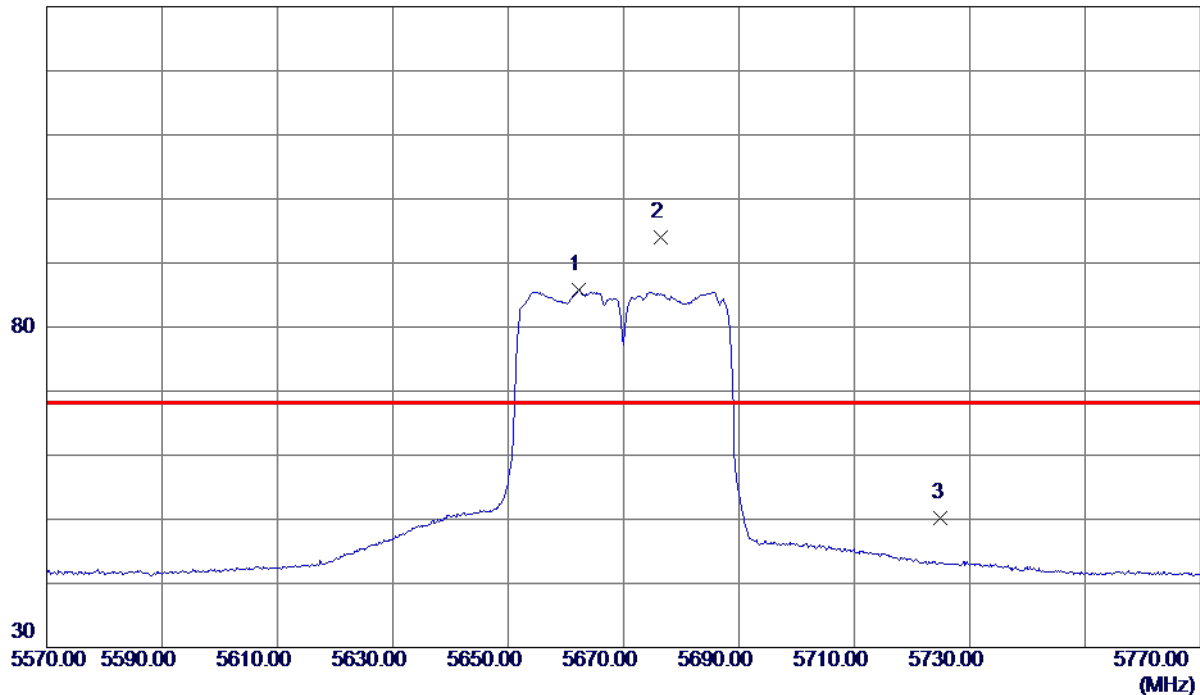

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5662.3000    | 70.30                      | 15.53                   | 85.83                     | 999.00          | -913.17      | AVG      | No Limit |
| 2 * | 5676.4000    | 78.47                      | 15.56                   | 94.03                     | 68.30           | 25.73        | Peak     | No Limit |
| 3   | 5725.0000    | 34.60                      | 15.68                   | 50.28                     | 68.30           | -18.02       | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5670 MHz |

Vertical

80 dBuV/m

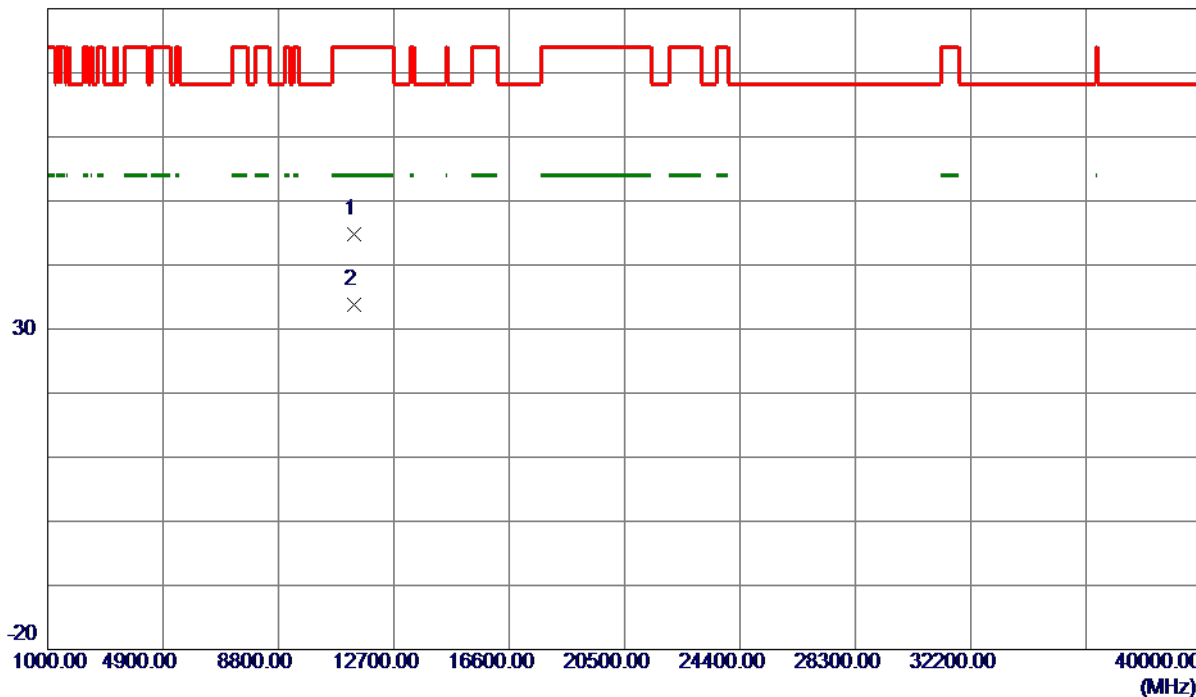

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11341.0150   | 32.83                      | 11.93                   | 44.76                     | 74.00           | -29.24       | Peak     |         |
| 2 * | 11341.9700   | 21.80                      | 11.93                   | 33.73                     | 54.00           | -20.27       | AVG      |         |


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5670 MHz |

### Horizontal

130 dBuV/m

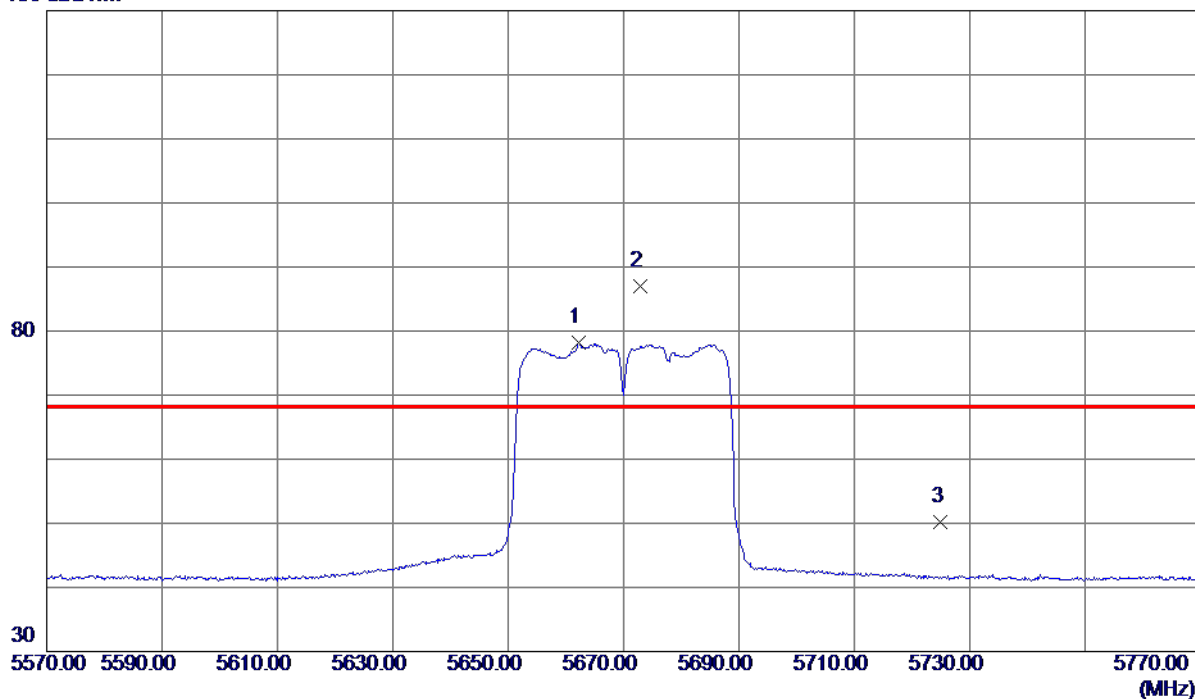

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5662.3000    | 62.69                      | 15.53                   | 78.22                     | 999.00          | -920.78      | AVG      | No Limit |
| 2 * | 5672.8000    | 71.42                      | 15.55                   | 86.97                     | 68.30           | 18.67        | Peak     | No Limit |
| 3   | 5725.0000    | 34.56                      | 15.68                   | 50.24                     | 68.30           | -18.06       | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5670 MHz |

### Horizontal

80 dBuV/m

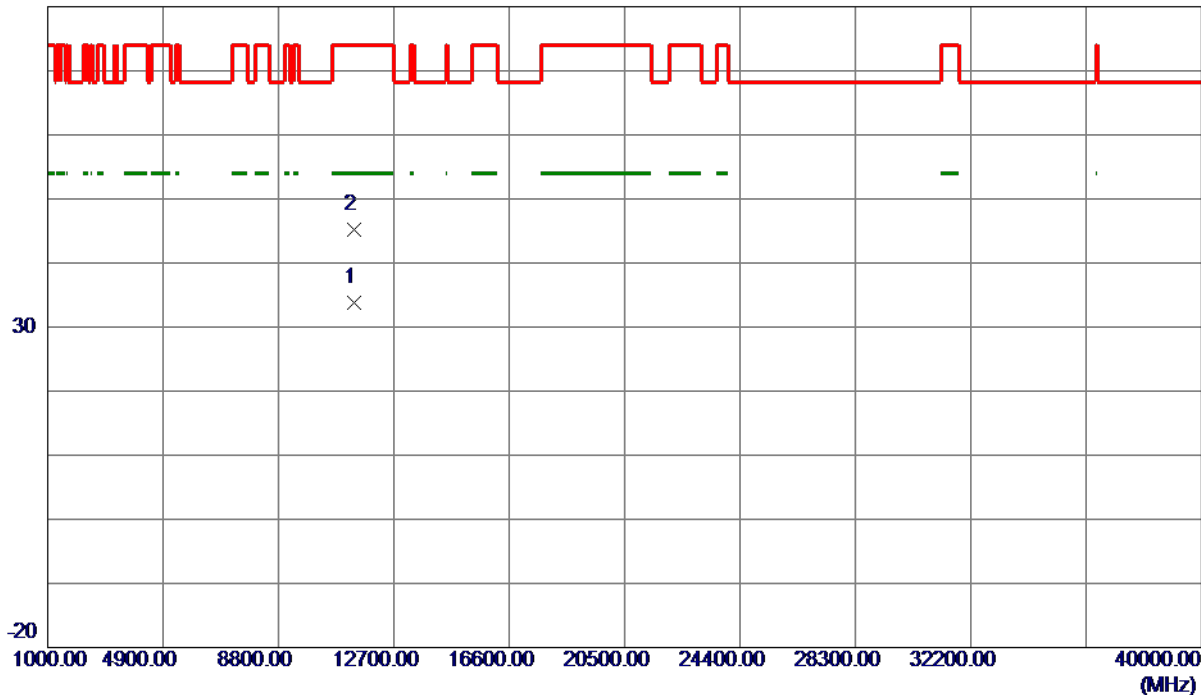

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11341.6280   | 21.83                      | 11.93                   | 33.76                     | 54.00           | -20.24       | AVG      |         |
| 2   | 11341.6529   | 33.21                      | 11.93                   | 45.14                     | 74.00           | -28.86       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

# Vertical

130 dBuV/m

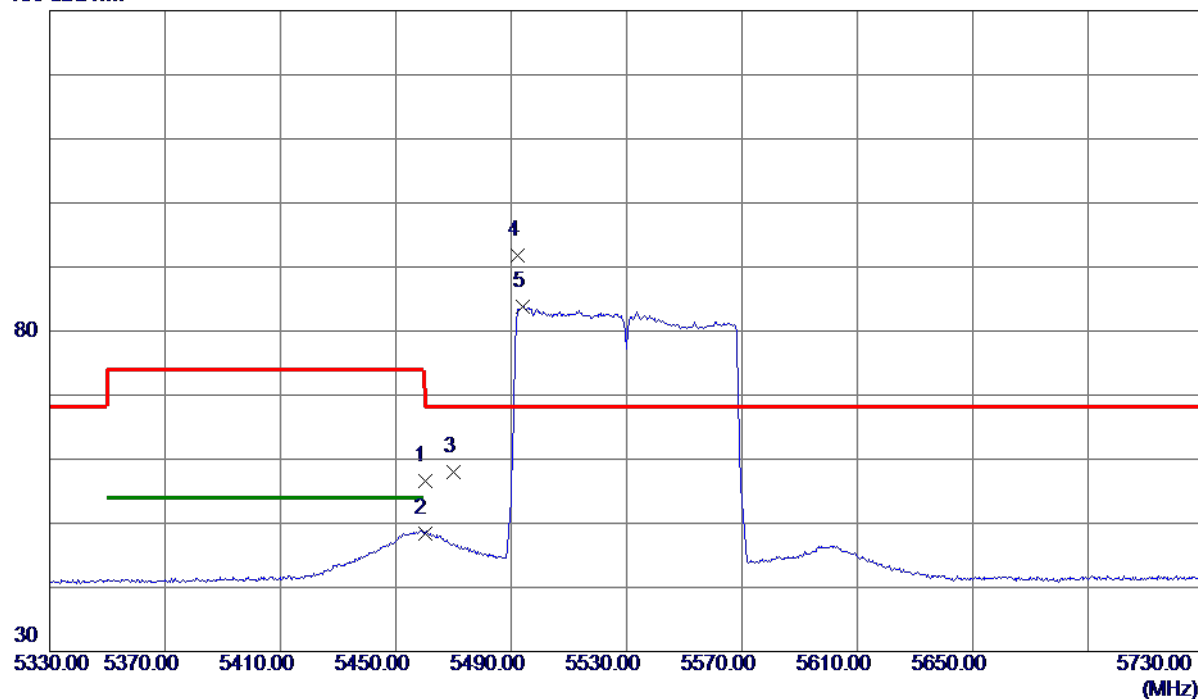

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 41.58                      | 15.05                   | 56.63                     | 74.00           | -17.37       | Peak     |          |
| 2   | 5460.0000    | 33.27                      | 15.05                   | 48.32                     | 54.00           | -5.68        | AVG      |          |
| 3   | 5470.0000    | 42.96                      | 15.07                   | 58.03                     | 68.30           | -10.27       | Peak     |          |
| 4 * | 5492.4000    | 76.63                      | 15.13                   | 91.76                     | 68.30           | 23.46        | Peak     | No Limit |
| 5   | 5494.0000    | 68.65                      | 15.13                   | 83.78                     | 999.00          | -915.22      | AVG      | No Limit |


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

### Vertical

80 dBuV/m

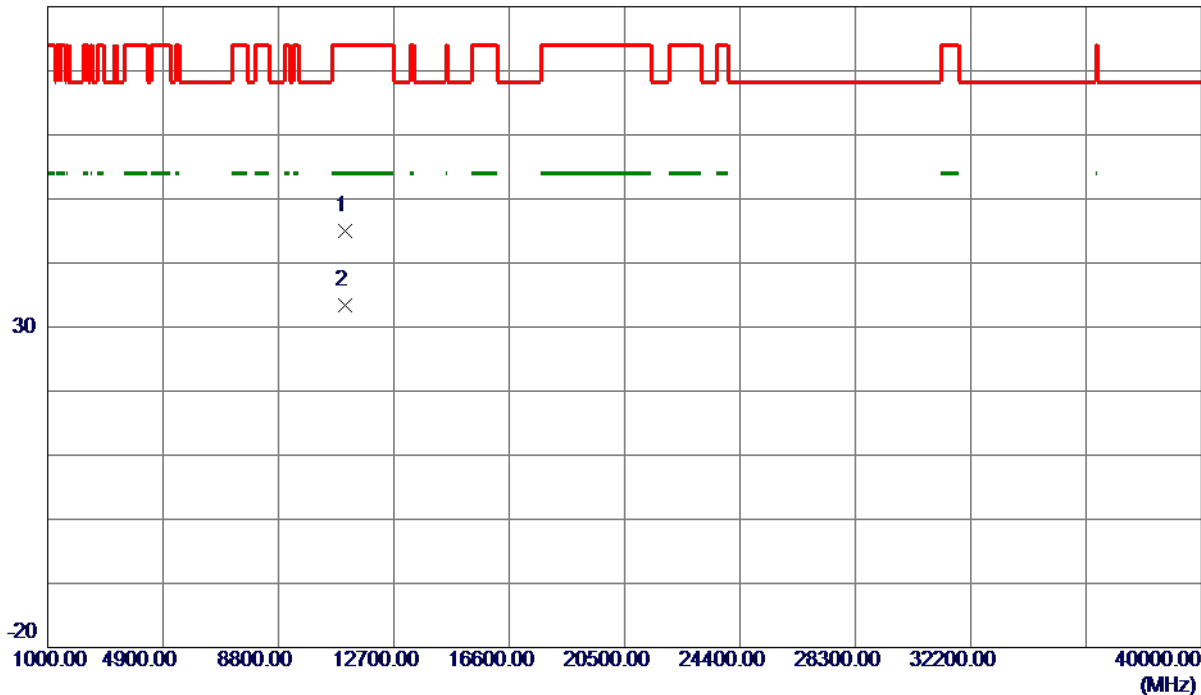

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11058.5250   | 33.28                      | 11.67                   | 44.95                     | 74.00           | -29.05       | Peak     |         |
| 2 * | 11060.0150   | 21.76                      | 11.67                   | 33.43                     | 54.00           | -20.57       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

### Horizontal

130 dBuV/m

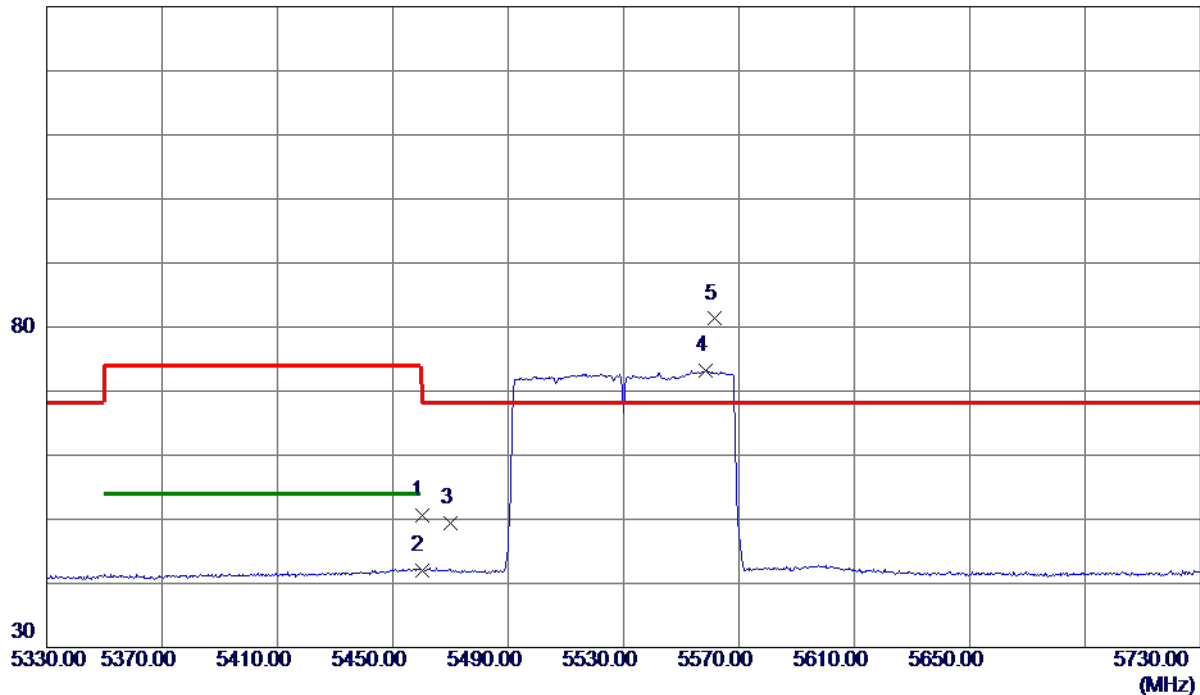

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 35.57                      | 15.05                   | 50.62                     | 74.00           | -23.38       | Peak     |          |
| 2   | 5460.0000    | 27.04                      | 15.05                   | 42.09                     | 54.00           | -11.91       | AVG      |          |
| 3   | 5470.0000    | 34.42                      | 15.07                   | 49.49                     | 68.30           | -18.81       | Peak     |          |
| 4   | 5558.4000    | 57.91                      | 15.28                   | 73.19                     | 999.00          | -925.81      | AVG      | No Limit |
| 5 * | 5561.4000    | 66.01                      | 15.29                   | 81.30                     | 68.30           | 13.00        | Peak     | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

### Horizontal

80 dBuV/m

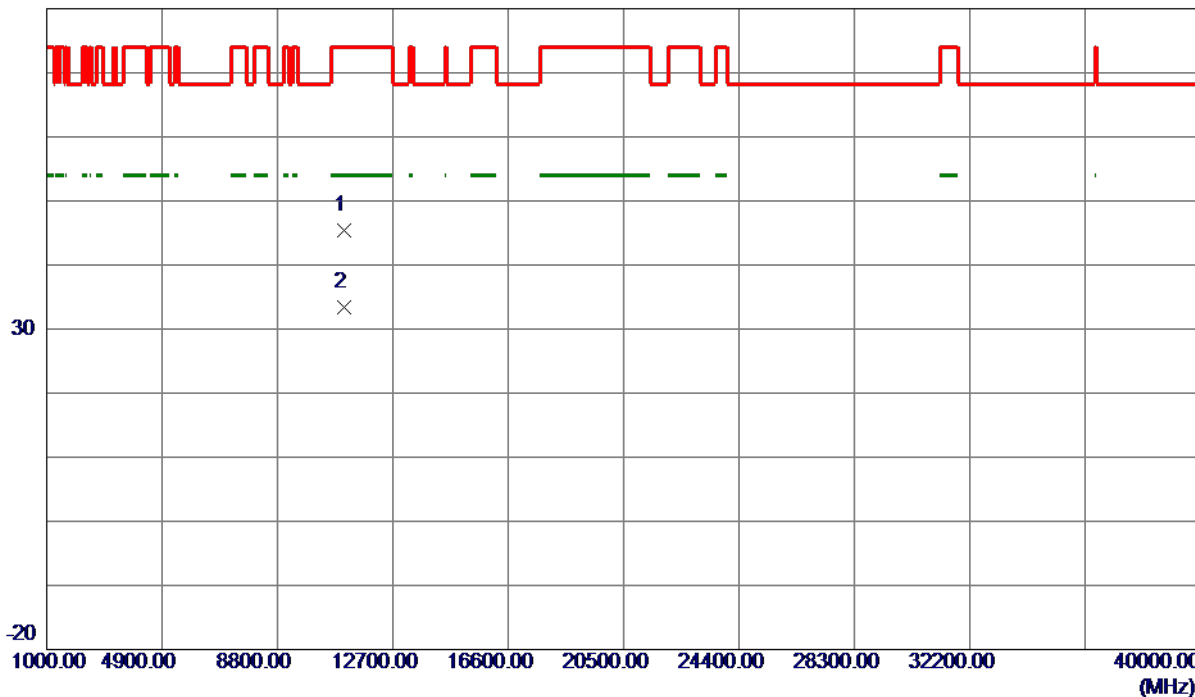

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11061.1030   | 33.76                      | 11.68                   | 45.44                     | 74.00           | -28.56       | Peak     |         |
| 2 * | 11062.2080   | 21.77                      | 11.68                   | 33.45                     | 54.00           | -20.55       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5610 MHz |

### Vertical

130 dBuV/m

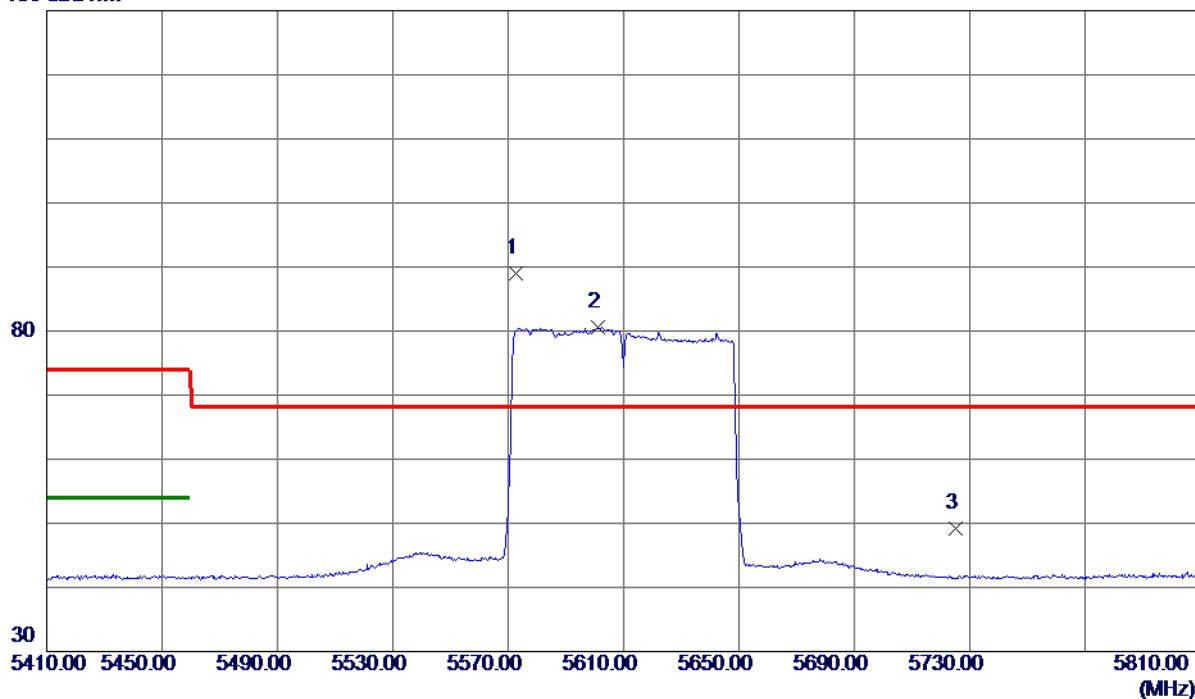

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5572.8000    | 73.71                      | 15.32                   | 89.03                     | 68.30           | 20.73        | Peak     | No Limit |
| 2   | 5601.0000    | 65.22                      | 15.38                   | 80.60                     | 999.00          | -918.40      | AVG      | No Limit |
| 3   | 5725.0000    | 33.45                      | 15.68                   | 49.13                     | 68.30           | -19.17       | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5610 MHz |

### Vertical

80 dBuV/m

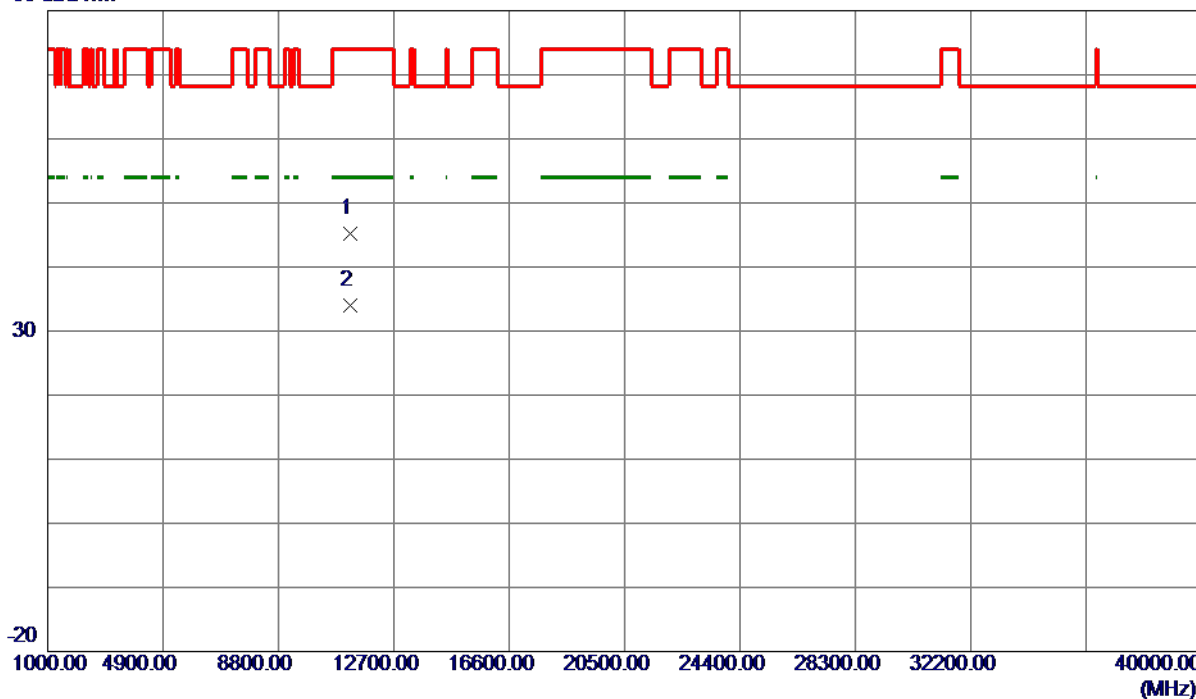

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11220.5450   | 33.38                      | 11.82                   | 45.20                     | 74.00           | -28.80       | Peak     |         |
| 2 * | 11221.9870   | 22.20                      | 11.82                   | 34.02                     | 54.00           | -19.98       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5610 MHz |

### Horizontal

130 dBuV/m

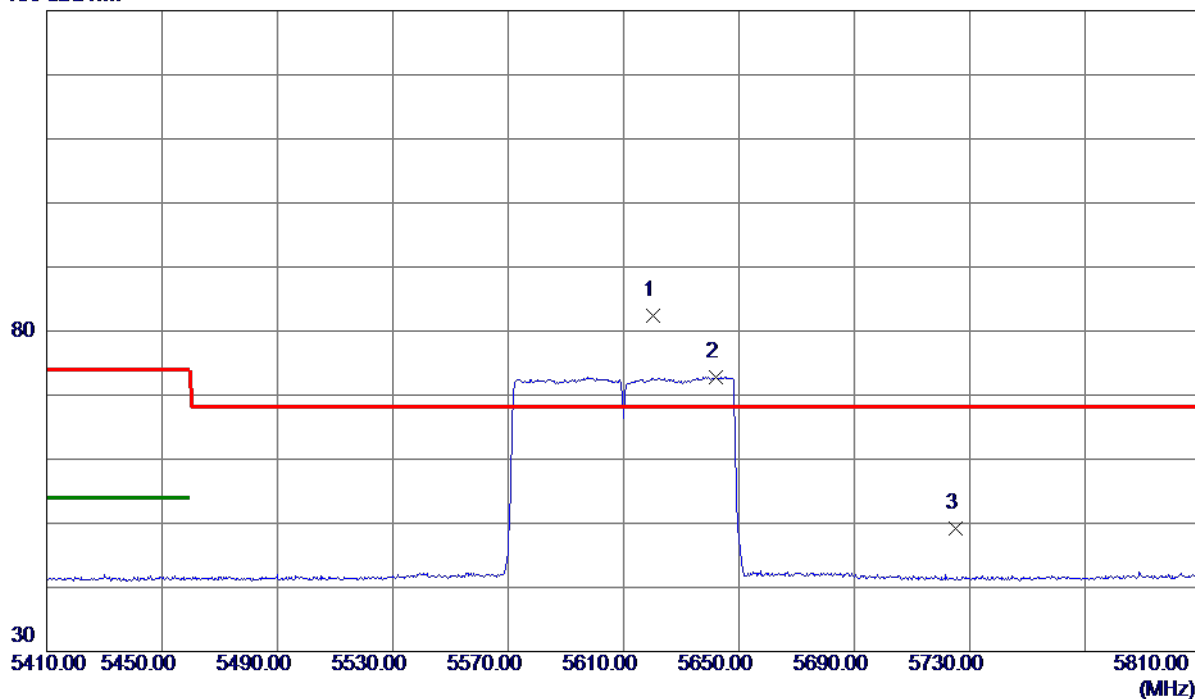

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5620.2000    | 67.02                      | 15.43                   | 82.45                     | 68.30           | 14.15        | Peak     | No Limit |
| 2   | 5642.0000    | 57.36                      | 15.48                   | 72.84                     | 999.00          | -926.16      | AVG      | No Limit |
| 3   | 5725.0000    | 33.44                      | 15.68                   | 49.12                     | 68.30           | -19.18       | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5610 MHz |

### Horizontal

80 dBuV/m

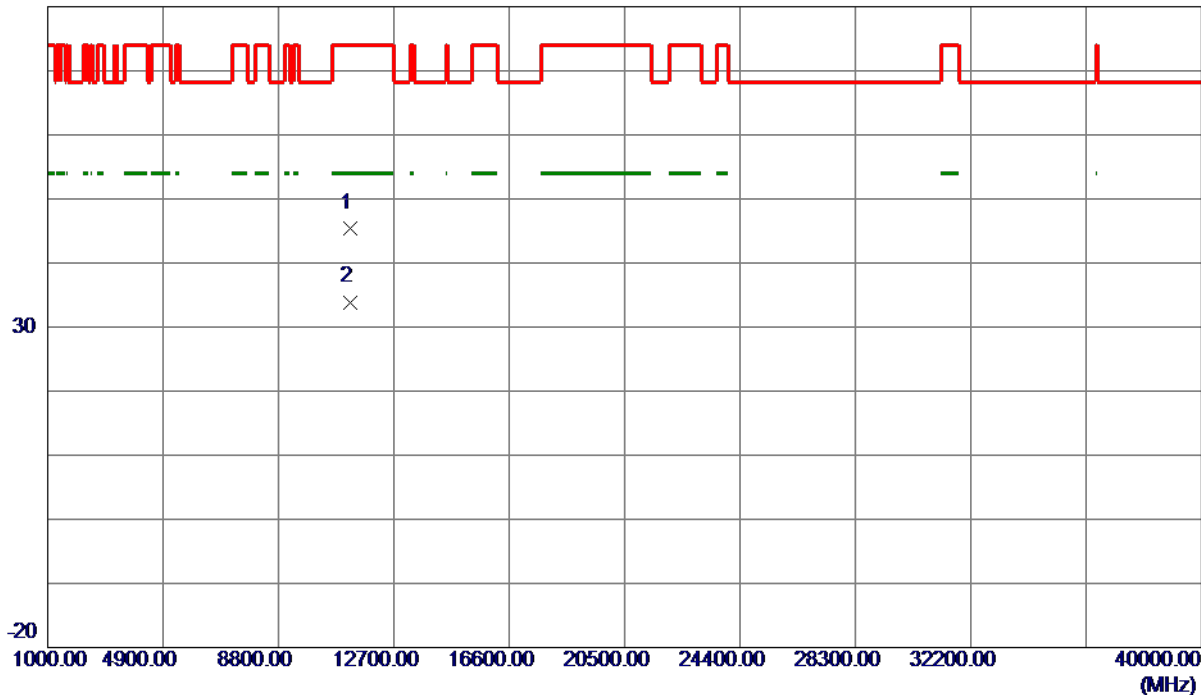


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11219.4870   | 33.57                      | 11.82                   | 45.39                     | 74.00           | -28.61       | Peak     |         |
| 2 * | 11220.7280   | 22.08                      | 11.82                   | 33.90                     | 54.00           | -20.10       | AVG      |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

Vertical

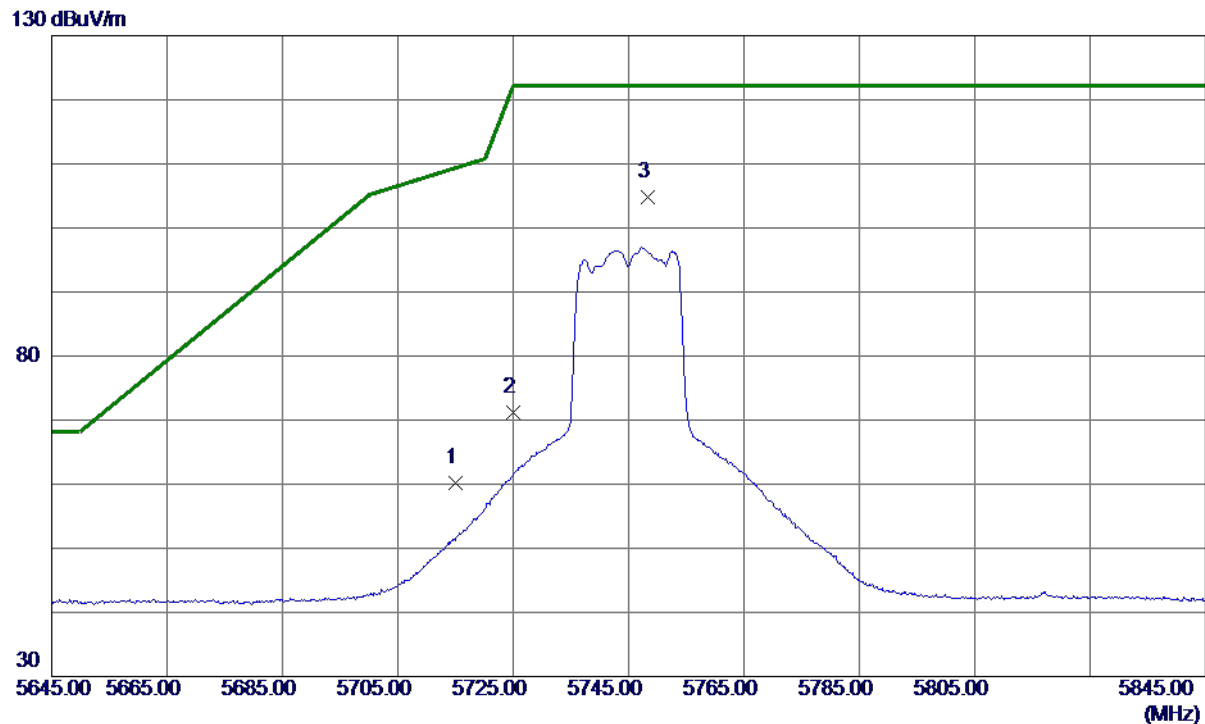

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 44.62                      | 15.65                   | 60.27                     | 109.40          | -49.13       | Peak     |          |
| 2   | 5725.0000    | 55.53                      | 15.68                   | 71.21                     | 122.20          | -50.99       | Peak     |          |
| 3 * | 5748.3000    | 89.00                      | 15.73                   | 104.73                    | 122.20          | -17.47       | Peak     | No Limit |

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

### Vertical

80 dBuV/m

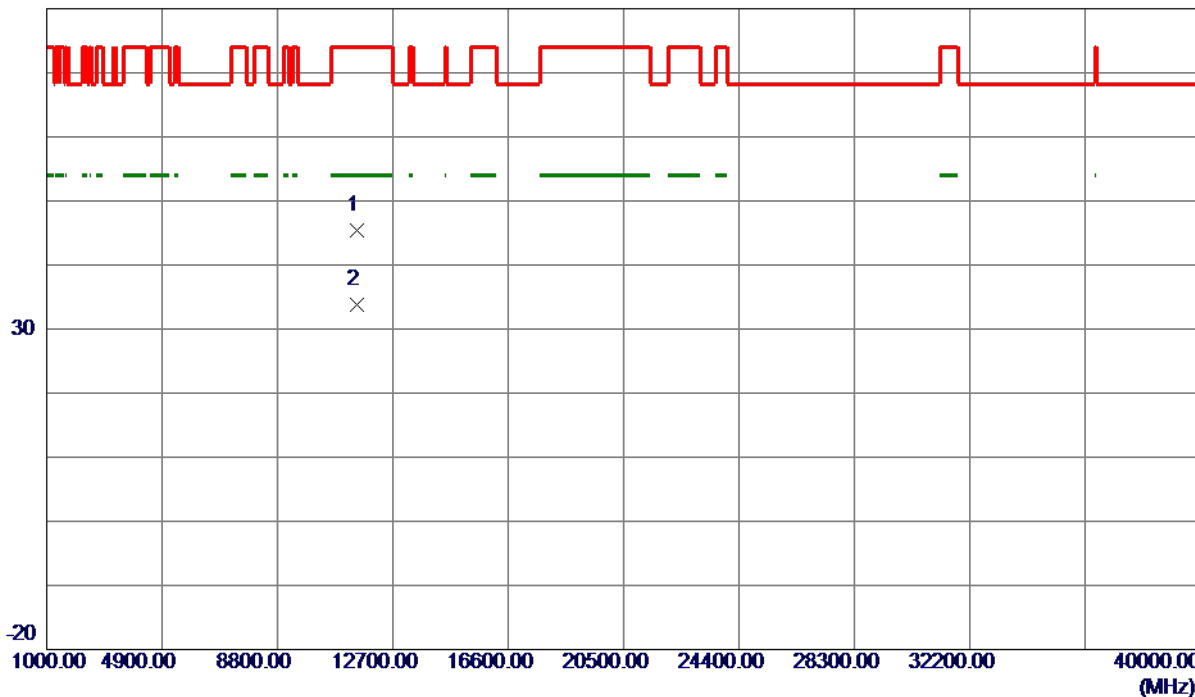

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11489.0730   | 33.28                      | 12.07                   | 45.35                     | 74.00           | -28.65       | Peak     |         |
| 2 * | 11491.0770   | 21.72                      | 12.07                   | 33.79                     | 54.00           | -20.21       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

### Horizontal

130 dBuV/m

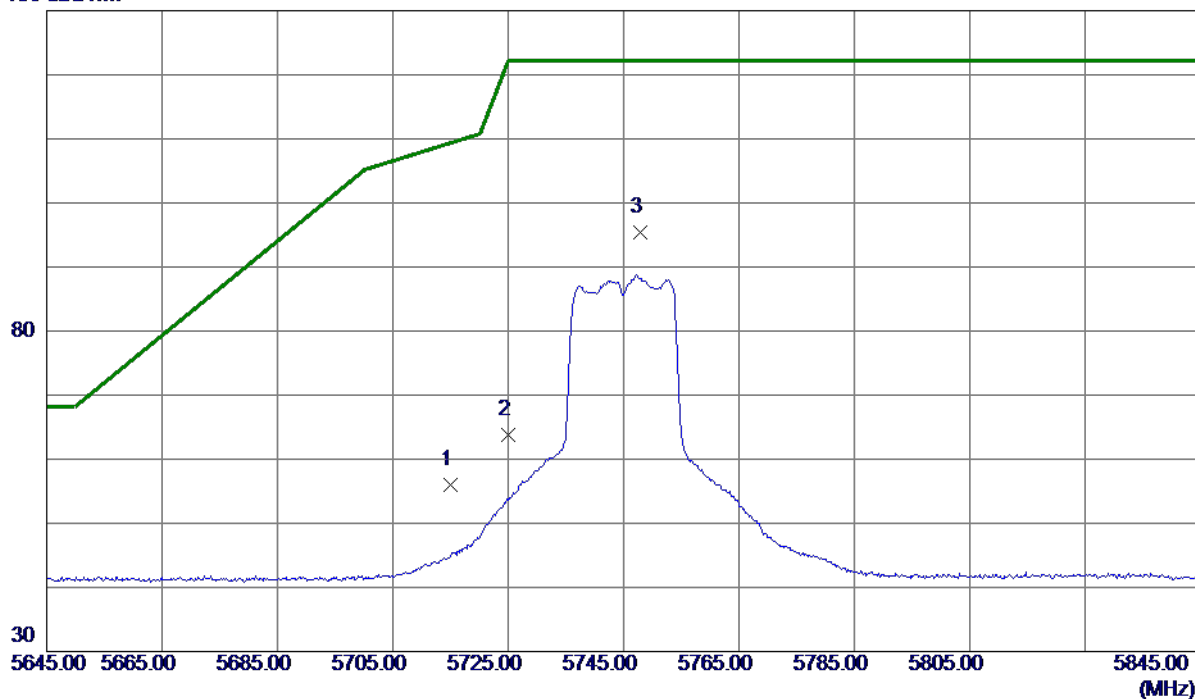

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 40.43                      | 15.65                   | 56.08                     | 109.40          | -53.32       | Peak     |          |
| 2   | 5725.0000    | 48.12                      | 15.68                   | 63.80                     | 122.20          | -58.40       | Peak     |          |
| 3 * | 5747.8000    | 79.59                      | 15.73                   | 95.32                     | 122.20          | -26.88       | Peak     | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

### Horizontal

80 dBuV/m

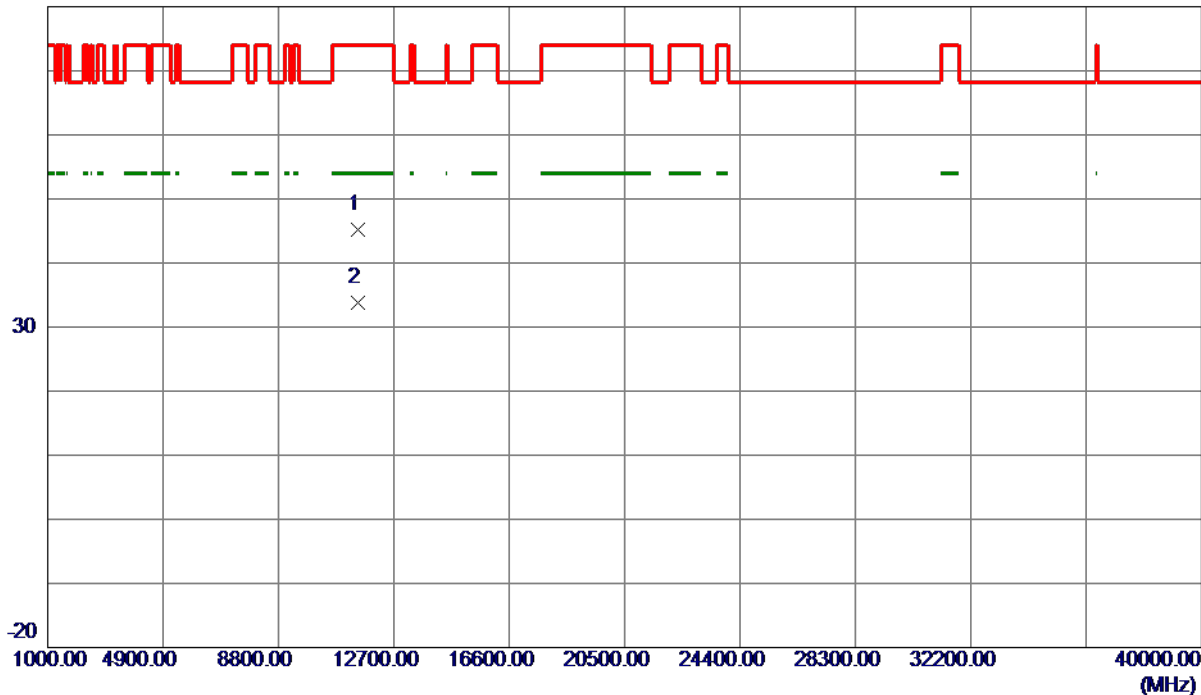


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11489.0700   | 33.10                      | 12.07                   | 45.17                     | 74.00           | -28.83       | Peak     |         |
| 2 * | 11491.7570   | 21.65                      | 12.07                   | 33.72                     | 54.00           | -20.28       | AVG      |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

**Vertical**

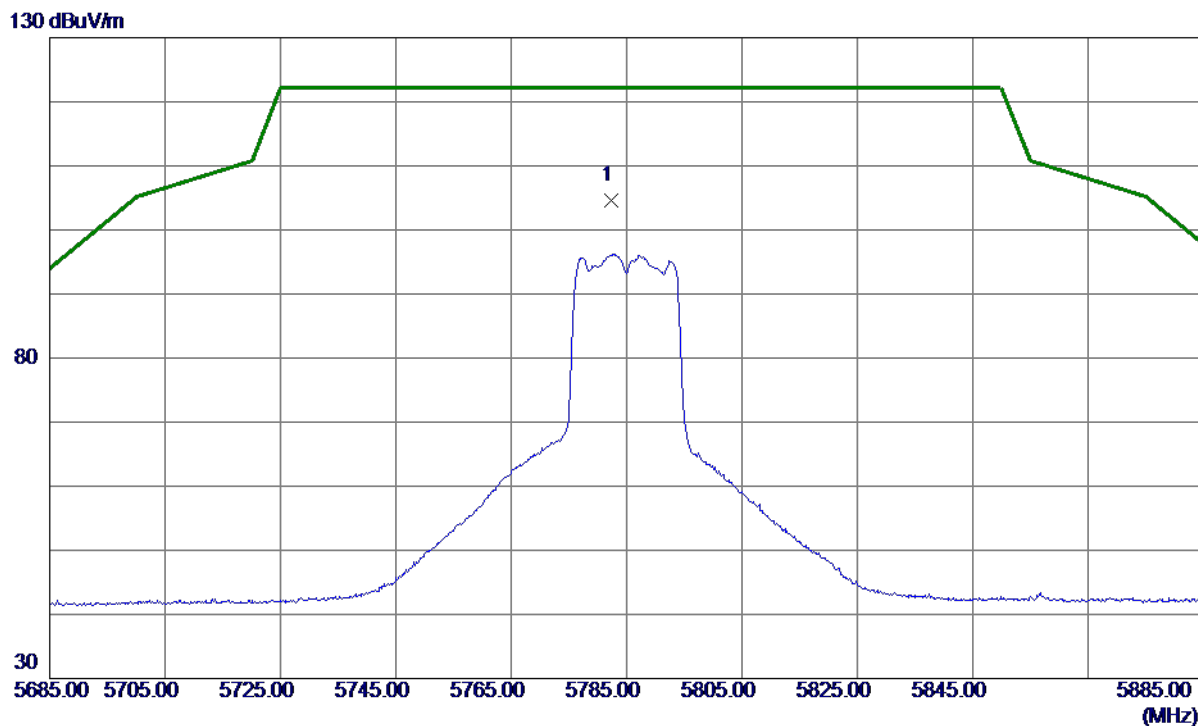

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5782.4000    | 88.80                      | 15.81                   | 104.61                    | 122.20          | -17.59       | Peak     | No Limit |


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

### Vertical

80 dBuV/m

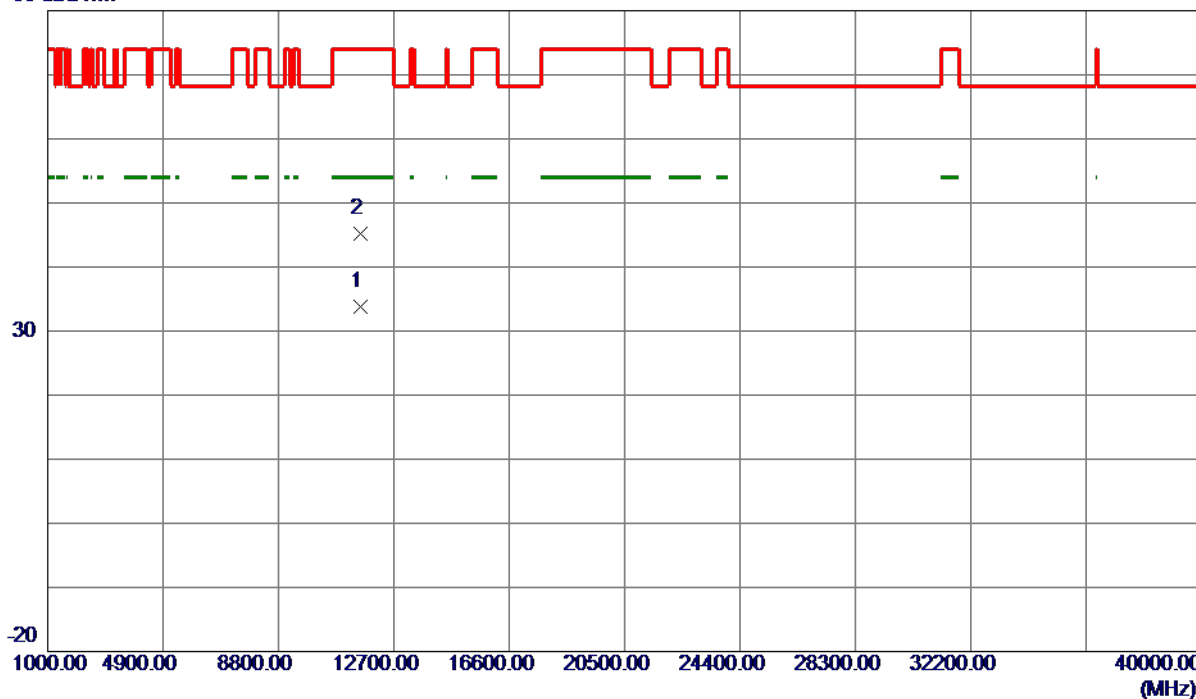


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11568.3580   | 21.62                      | 12.14                   | 33.76                     | 54.00           | -20.24       | AVG      |         |
| 2   | 11571.4780   | 33.07                      | 12.15                   | 45.22                     | 74.00           | -28.78       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

### Horizontal

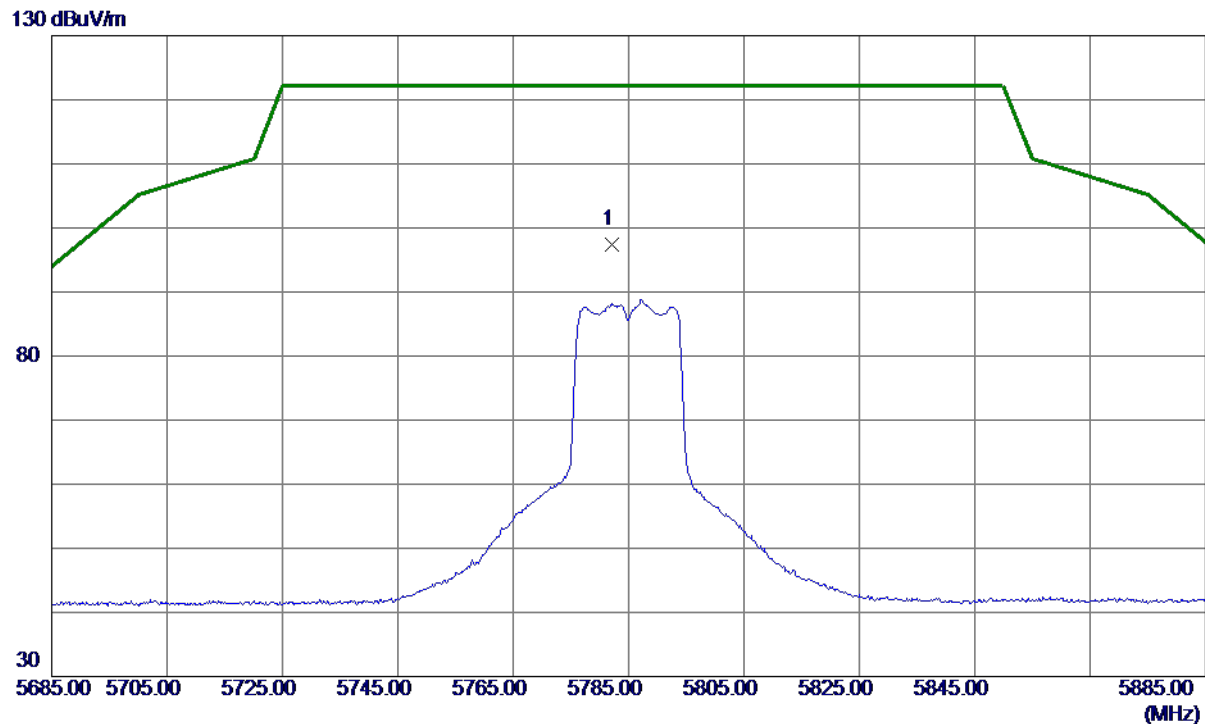

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5782.1000    | 81.52                      | 15.81                   | 97.33                     | 122.20          | -24.87       | Peak     | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

### Horizontal

80 dBuV/m

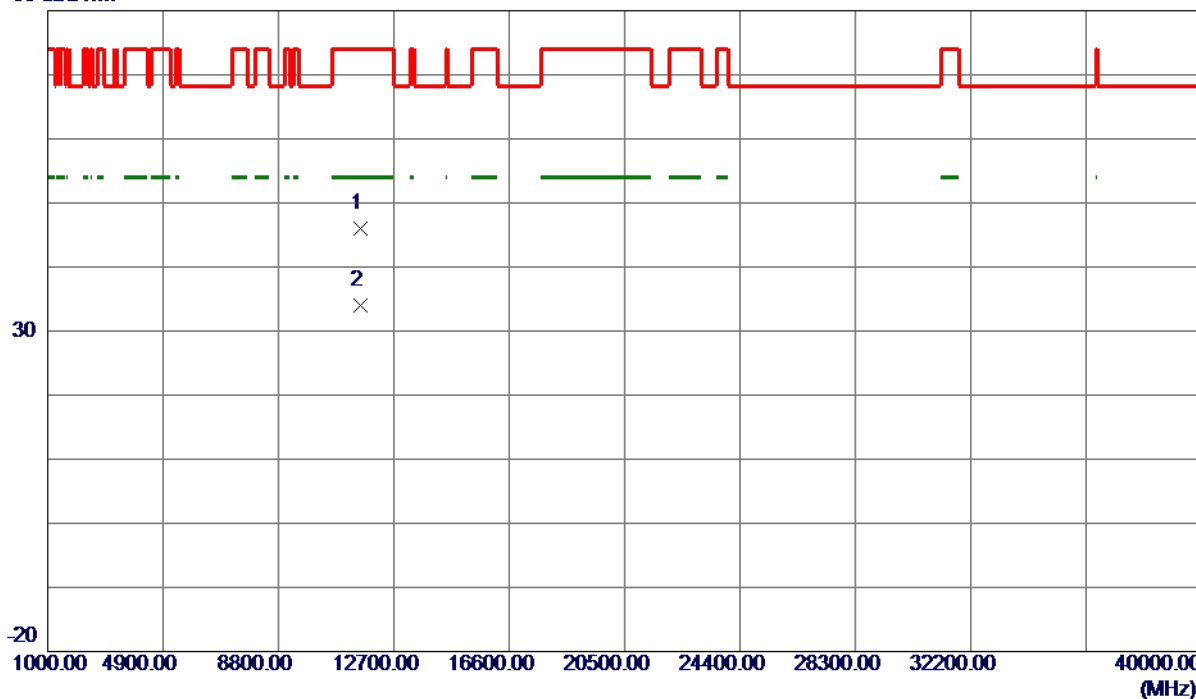


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11570.3200   | 33.87                      | 12.15                   | 46.02                     | 74.00           | -27.98       | Peak     |         |
| 2 * | 11572.0250   | 21.89                      | 12.15                   | 34.04                     | 54.00           | -19.96       | AVG      |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

**Vertical**

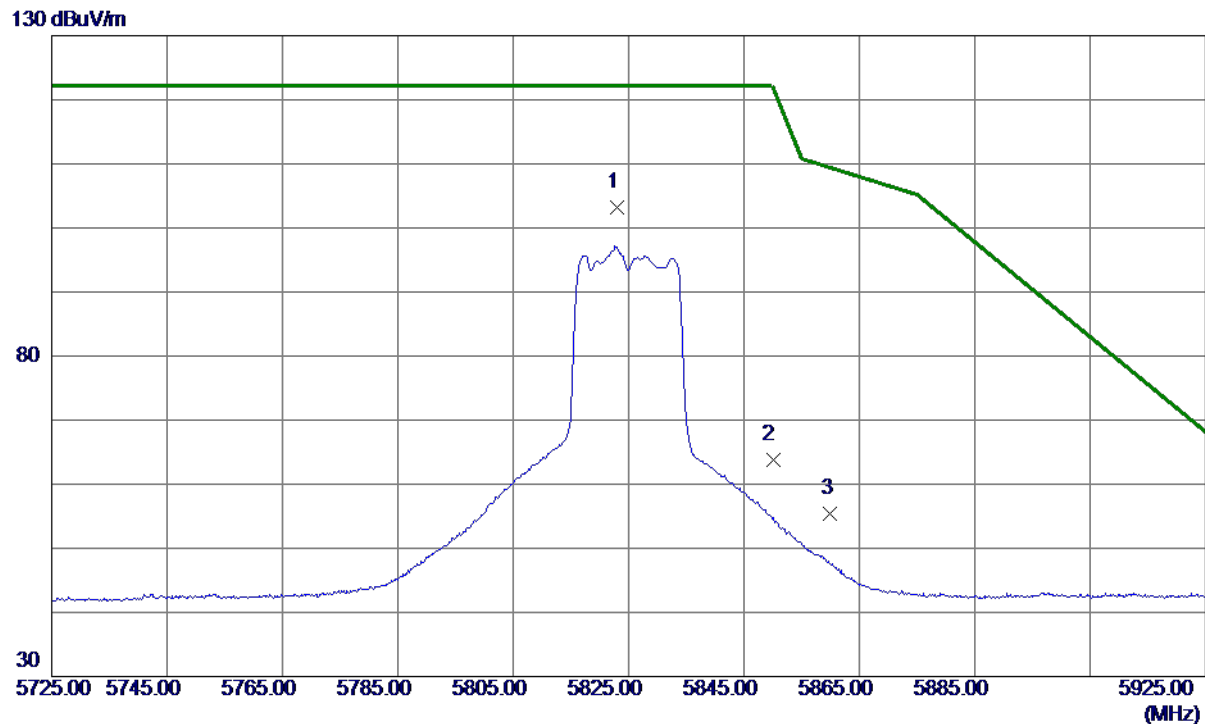

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5822.9000    | 87.34                      | 15.91                   | 103.25                    | 122.20          | -18.95       | Peak     | No Limit |
| 2   | 5850.0000    | 47.91                      | 15.97                   | 63.88                     | 122.20          | -58.32       | Peak     |          |
| 3   | 5860.0000    | 39.37                      | 16.00                   | 55.37                     | 109.40          | -54.03       | Peak     |          |

**REMARKS:**


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

Vertical

80 dBuV/m

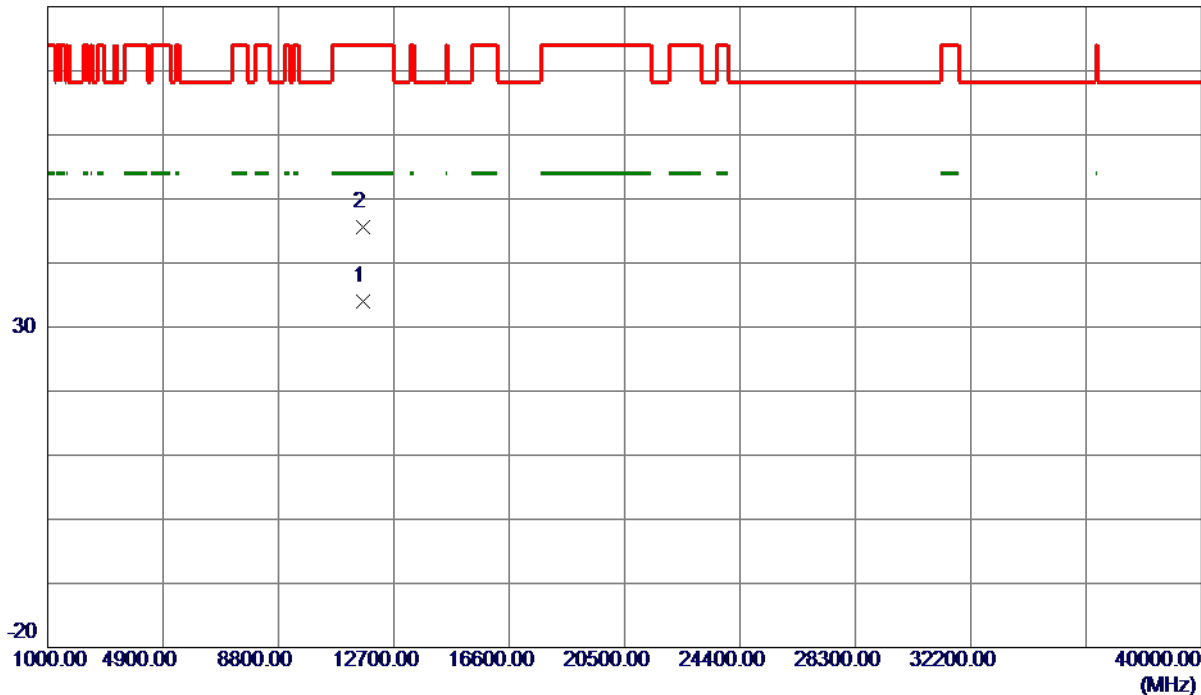

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11648.0300   | 21.69                      | 12.22                   | 33.91                     | 54.00           | -20.09       | AVG      |         |
| 2   | 11650.5650   | 33.29                      | 12.23                   | 45.52                     | 74.00           | -28.48       | Peak     |         |


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

### Horizontal

130 dBuV/m

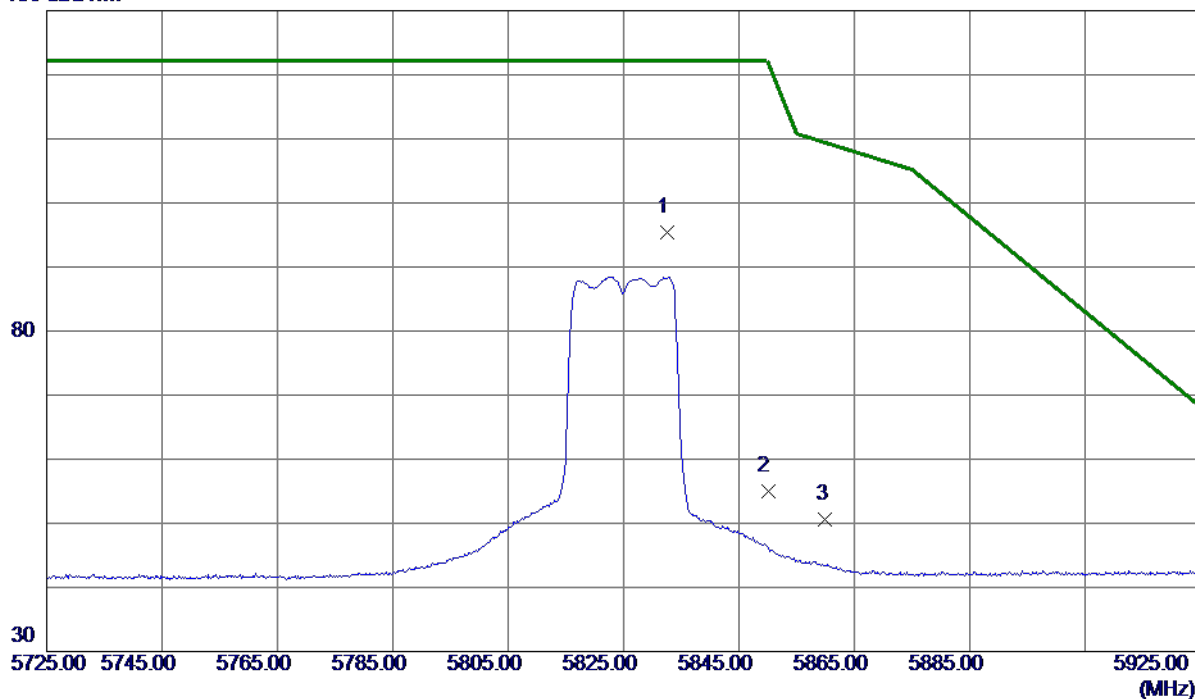

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5832.5000    | 79.42                      | 15.93                   | 95.35                     | 122.20          | -26.85       | Peak     | No Limit |
| 2   | 5850.0000    | 38.94                      | 15.97                   | 54.91                     | 122.20          | -67.29       | Peak     |          |
| 3   | 5860.0000    | 34.63                      | 16.00                   | 50.63                     | 109.40          | -58.77       | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

### Horizontal

80 dBuV/m

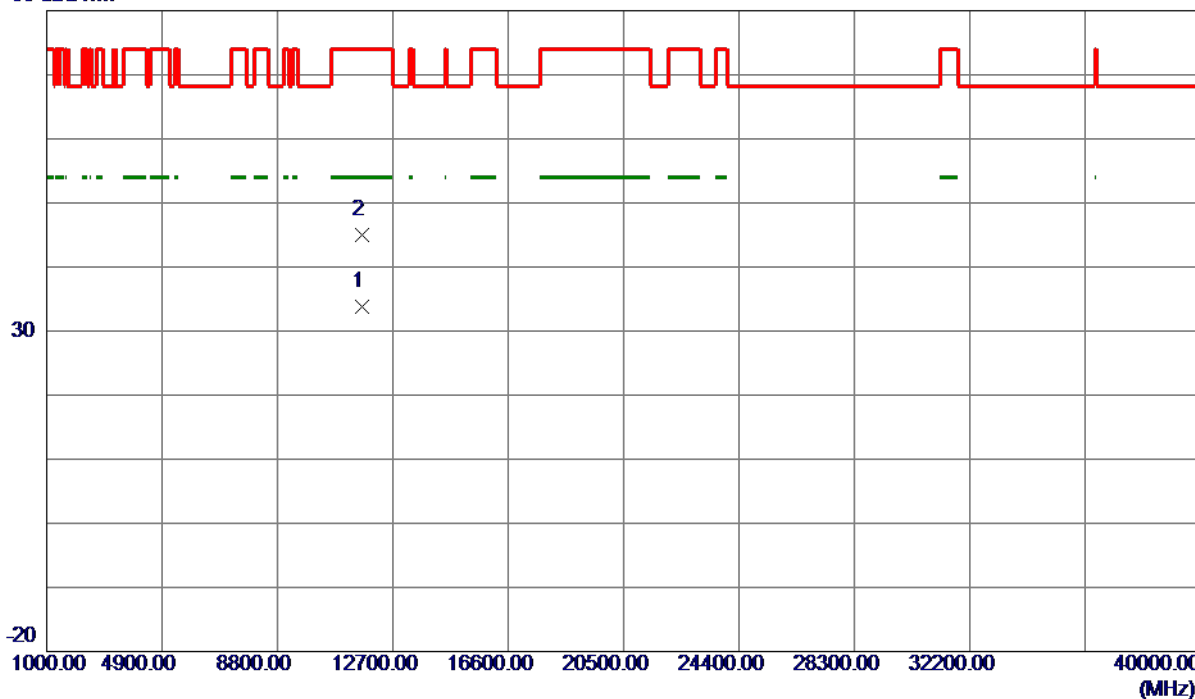


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11650.1320   | 21.62                      | 12.23                   | 33.85                     | 54.00           | -20.15       | AVG      |         |
| 2   | 11650.6150   | 32.72                      | 12.23                   | 44.95                     | 74.00           | -29.05       | Peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

Vertical

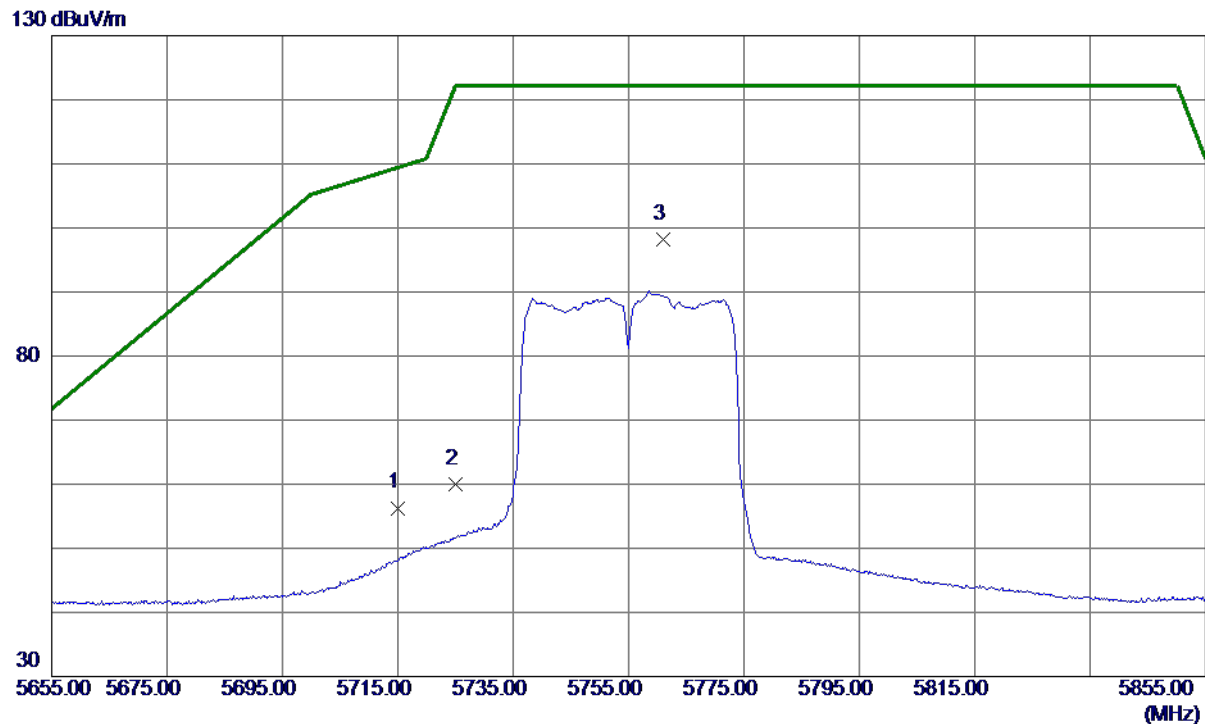

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 40.65                      | 15.65                   | 56.30                     | 109.40          | -53.10       | Peak     |          |
| 2   | 5725.0000    | 44.24                      | 15.68                   | 59.92                     | 122.20          | -62.28       | Peak     |          |
| 3 * | 5761.1000    | 82.40                      | 15.76                   | 98.16                     | 122.20          | -24.04       | Peak     | No Limit |

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

Vertical

80 dBuV/m

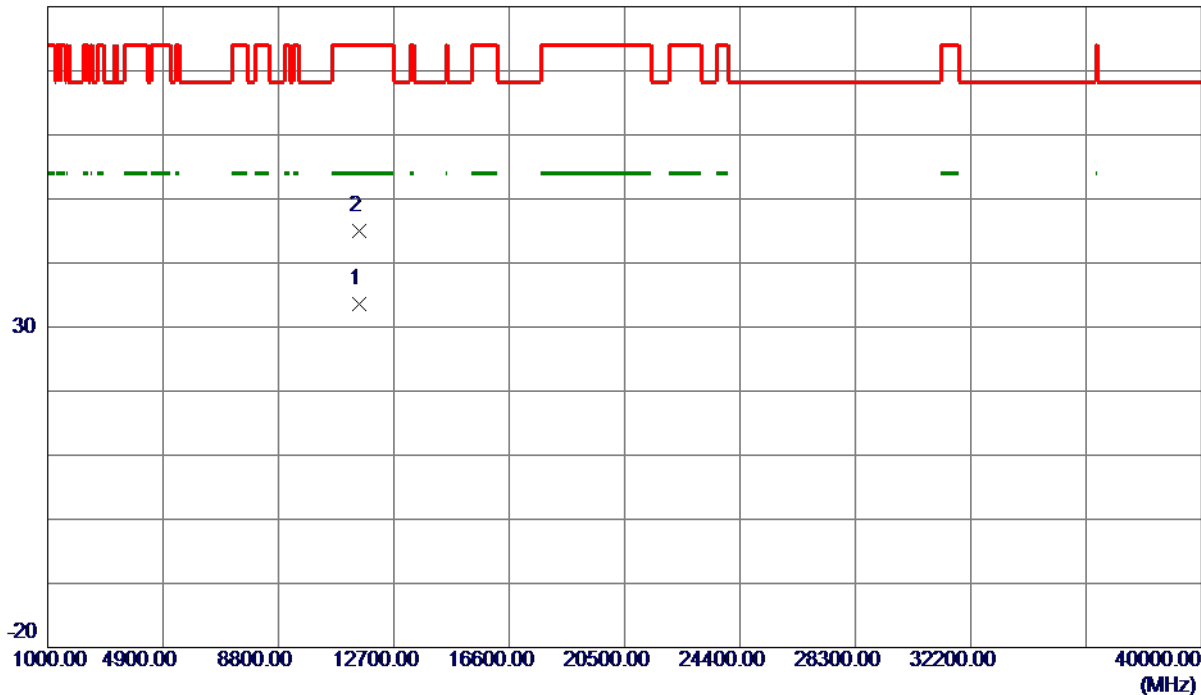


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11508.5380   | 21.49                      | 12.08                   | 33.57                     | 54.00           | -20.43       | AVG      |         |
| 2   | 11511.8050   | 32.89                      | 12.09                   | 44.98                     | 74.00           | -29.02       | Peak     |         |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

### Horizontal

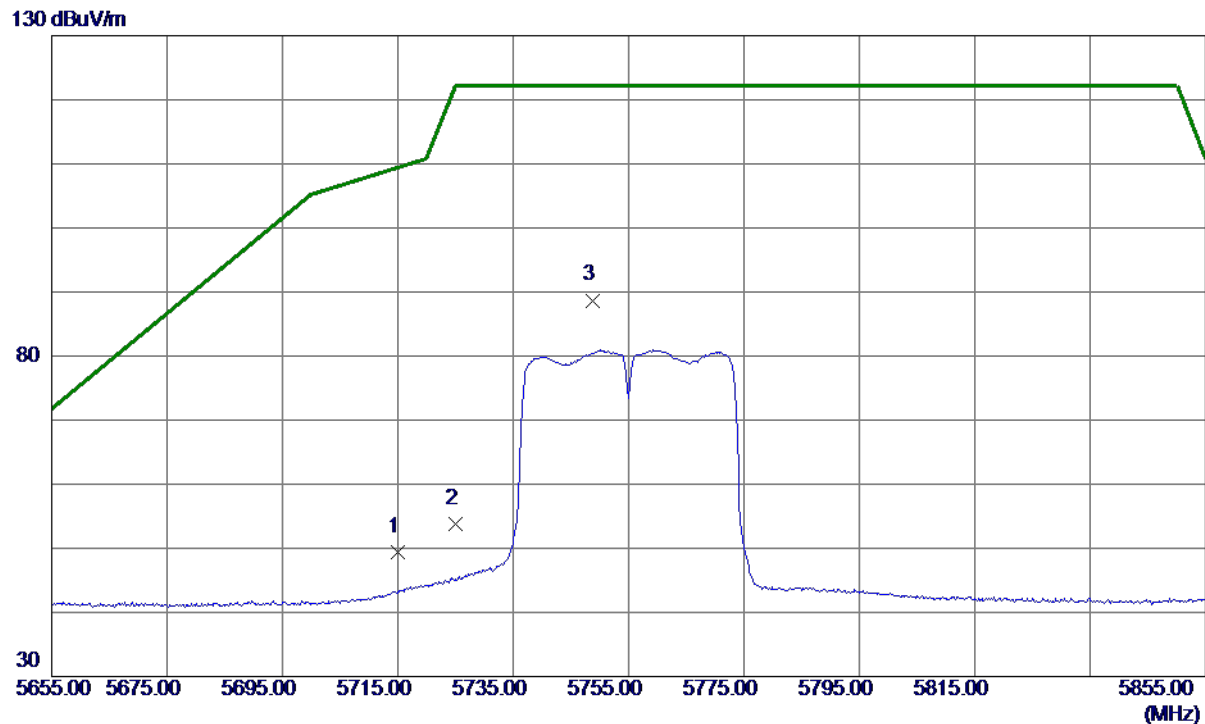

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 33.81                      | 15.65                   | 49.46                     | 109.40          | -59.94       | Peak     |          |
| 2   | 5725.0000    | 38.06                      | 15.68                   | 53.74                     | 122.20          | -68.46       | Peak     |          |
| 3 * | 5748.8000    | 72.97                      | 15.73                   | 88.70                     | 122.20          | -33.50       | Peak     | No Limit |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

### Horizontal

80 dBuV/m

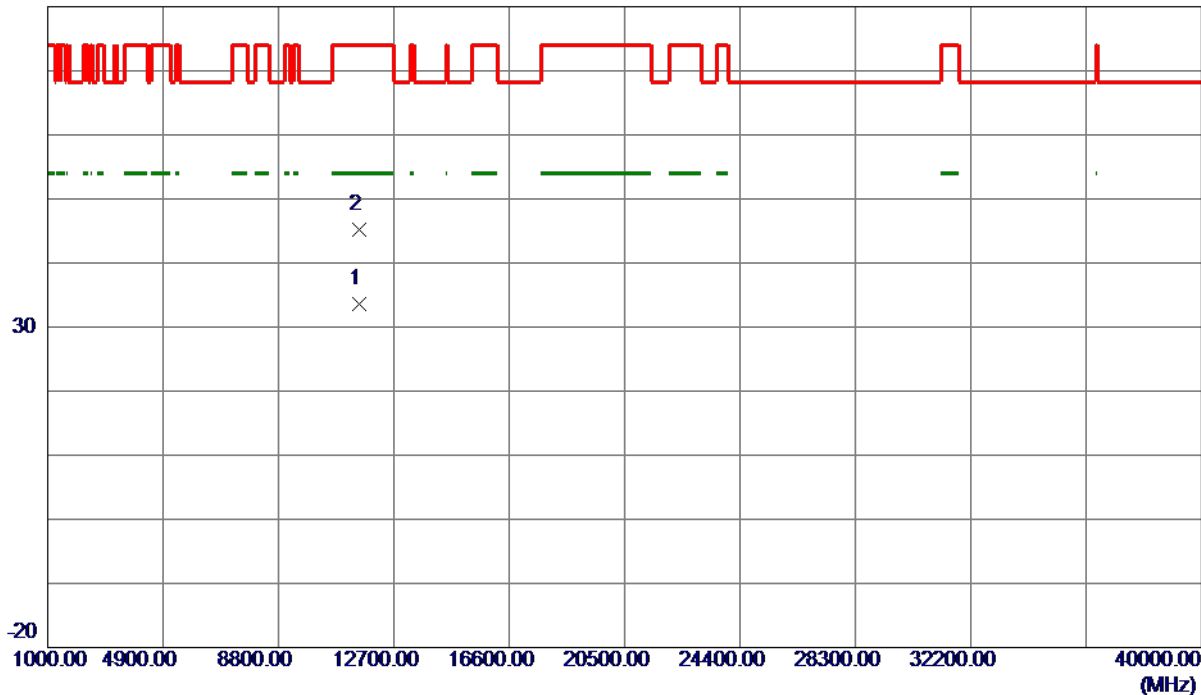

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11510.2570   | 21.49                      | 12.09                   | 33.58                     | 54.00           | -20.42       | AVG      |         |
| 2   | 11511.5199   | 33.15                      | 12.09                   | 45.24                     | 74.00           | -28.76       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

**Vertical**

130 dBuV/m

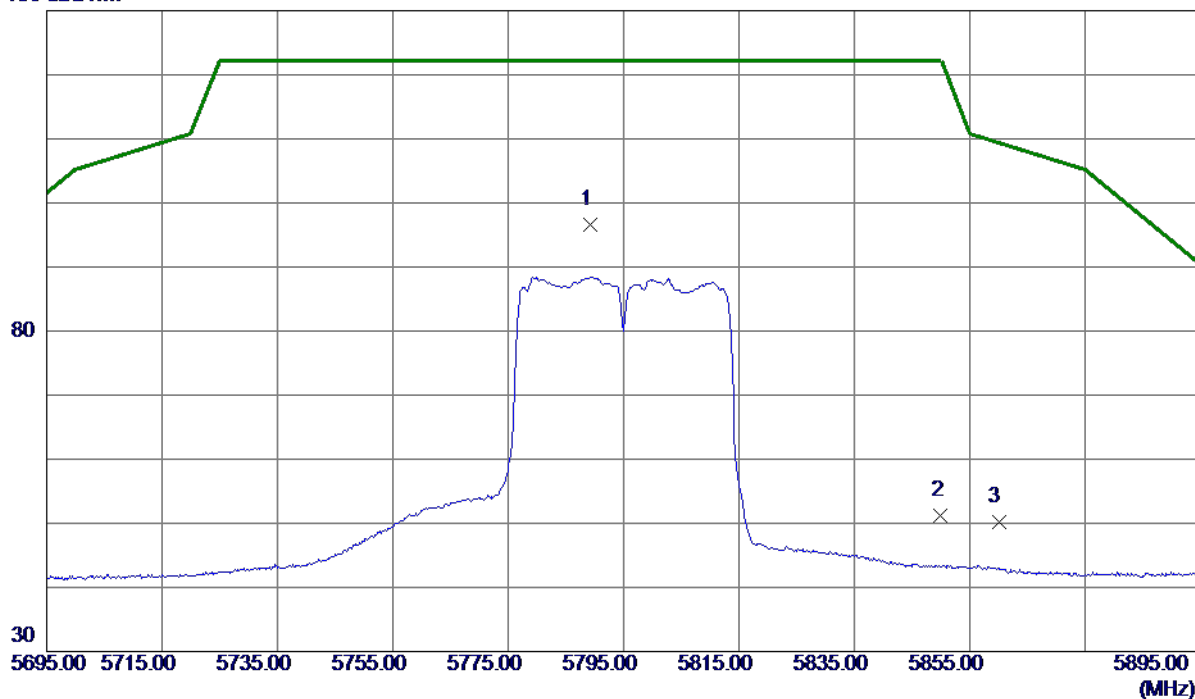

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5789.2000    | 80.72                      | 15.83                   | 96.55                     | 122.20          | -25.65       | Peak     | No Limit |
| 2   | 5850.0000    | 35.30                      | 15.97                   | 51.27                     | 122.20          | -70.93       | Peak     |          |
| 3   | 5860.0000    | 34.15                      | 16.00                   | 50.15                     | 109.40          | -59.25       | Peak     |          |

**REMARKS:**


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

Vertical

80 dBuV/m

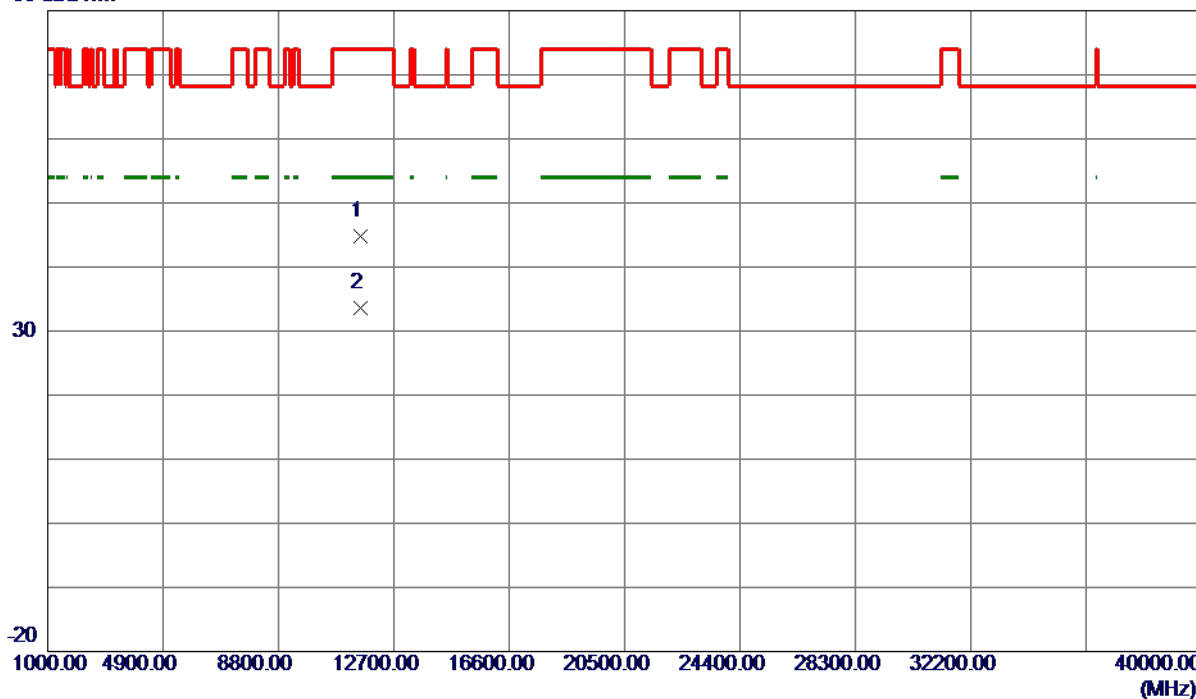

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11589.2900   | 32.60                      | 12.17                   | 44.77                     | 74.00           | -29.23       | Peak     |         |
| 2 * | 11591.7120   | 21.50                      | 12.17                   | 33.67                     | 54.00           | -20.33       | AVG      |         |


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

### Horizontal

130 dBuV/m

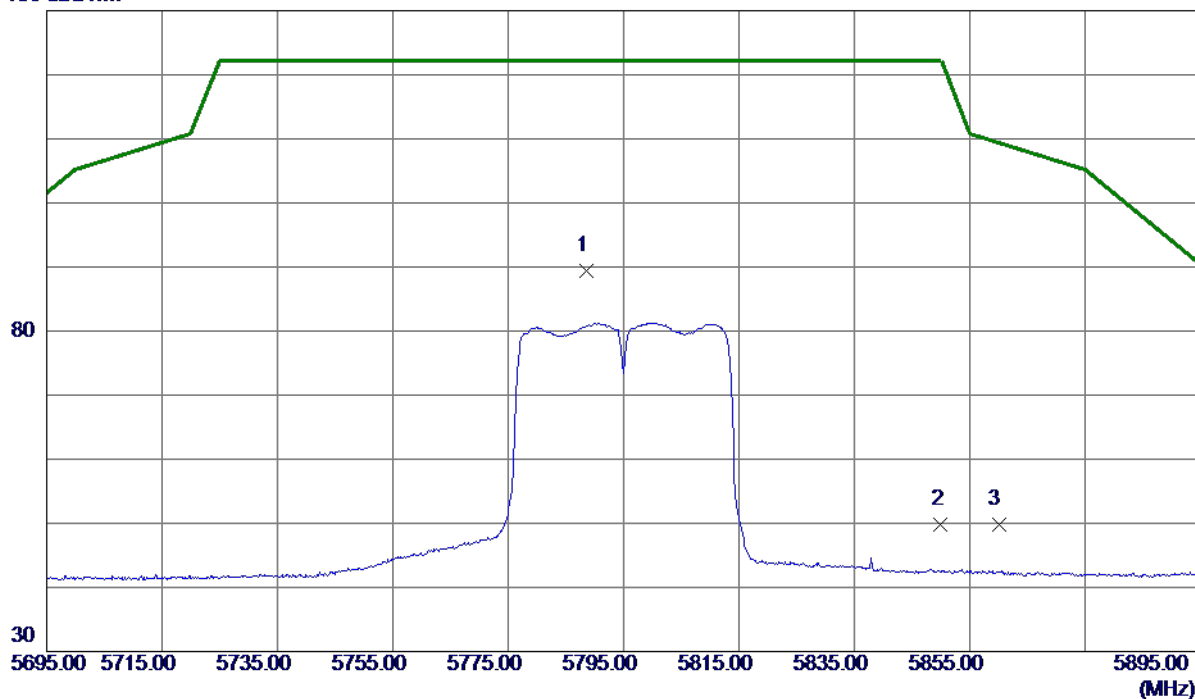

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5788.6000    | 73.49                      | 15.83                   | 89.32                     | 122.20          | -32.88       | Peak     | No Limit |
| 2   | 5850.0000    | 33.89                      | 15.97                   | 49.86                     | 122.20          | -72.34       | Peak     |          |
| 3   | 5860.0000    | 33.89                      | 16.00                   | 49.89                     | 109.40          | -59.51       | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

### Horizontal

80 dBuV/m

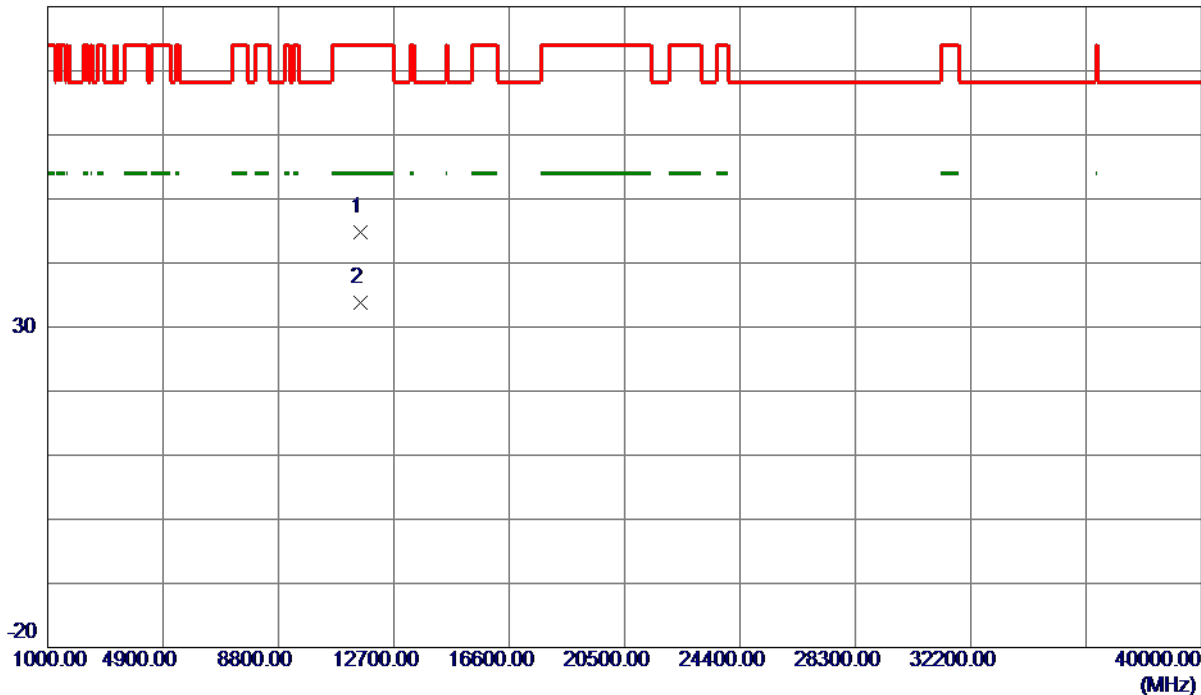

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11588.3600   | 32.65                      | 12.16                   | 44.81                     | 74.00           | -29.19       | Peak     |         |
| 2 * | 11590.0199   | 21.57                      | 12.17                   | 33.74                     | 54.00           | -20.26       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

### Vertical

130 dBuV/m

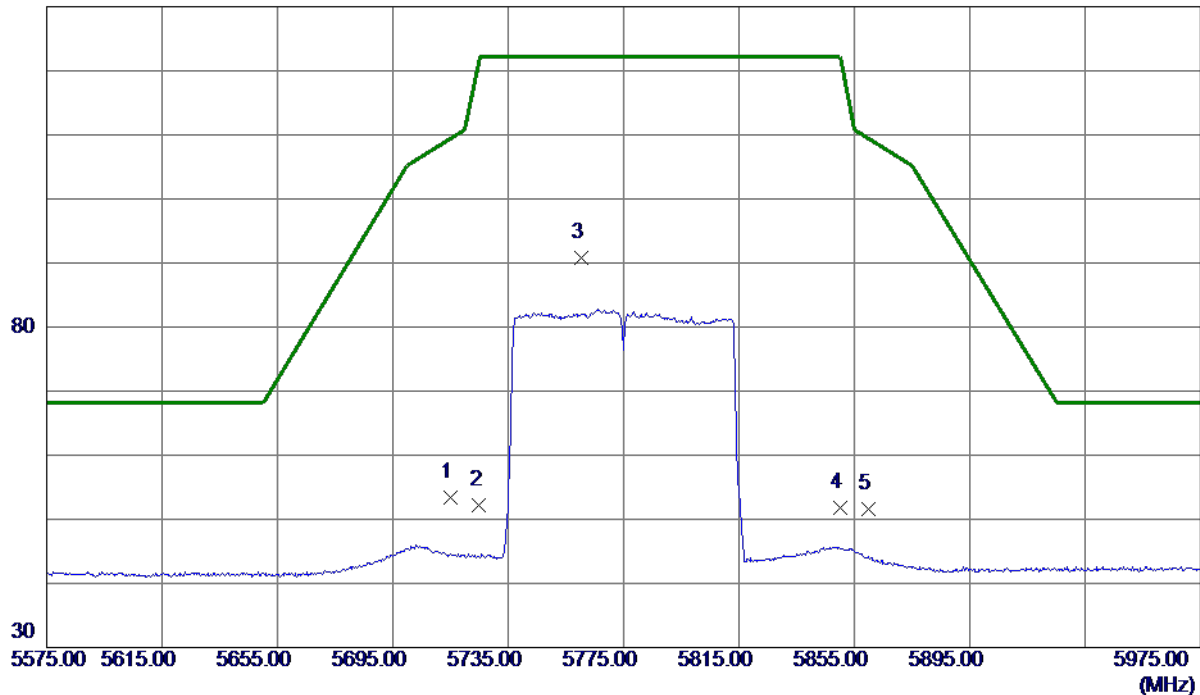

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 37.73                      | 15.65                   | 53.38                     | 109.40          | -56.02       | Peak     |          |
| 2   | 5725.0000    | 36.46                      | 15.68                   | 52.14                     | 122.20          | -70.06       | Peak     |          |
| 3 * | 5760.4000    | 75.10                      | 15.76                   | 90.86                     | 122.20          | -31.34       | Peak     | No Limit |
| 4   | 5850.0000    | 35.85                      | 15.97                   | 51.82                     | 122.20          | -70.38       | Peak     |          |
| 5   | 5860.0000    | 35.60                      | 16.00                   | 51.60                     | 109.40          | -57.80       | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

### Vertical

80 dBuV/m

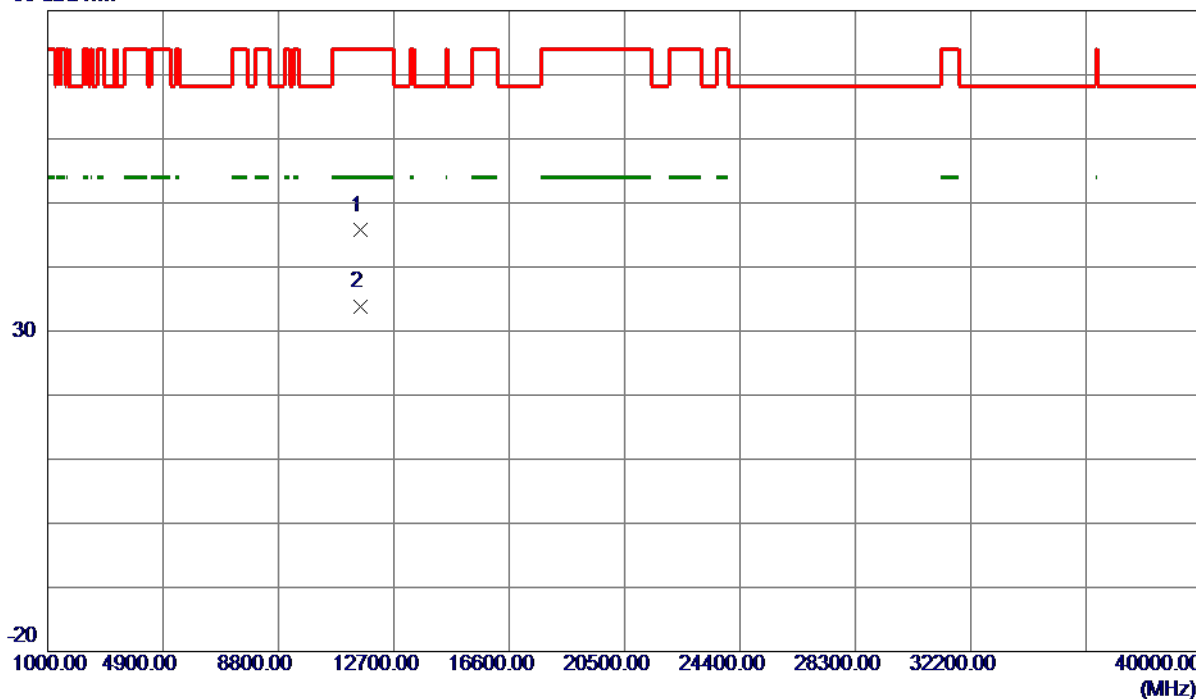

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11552.4720   | 33.57                      | 12.13                   | 45.70                     | 74.00           | -28.30       | Peak     |         |
| 2 * | 11552.4780   | 21.58                      | 12.13                   | 33.71                     | 54.00           | -20.29       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

### Horizontal

130 dBuV/m

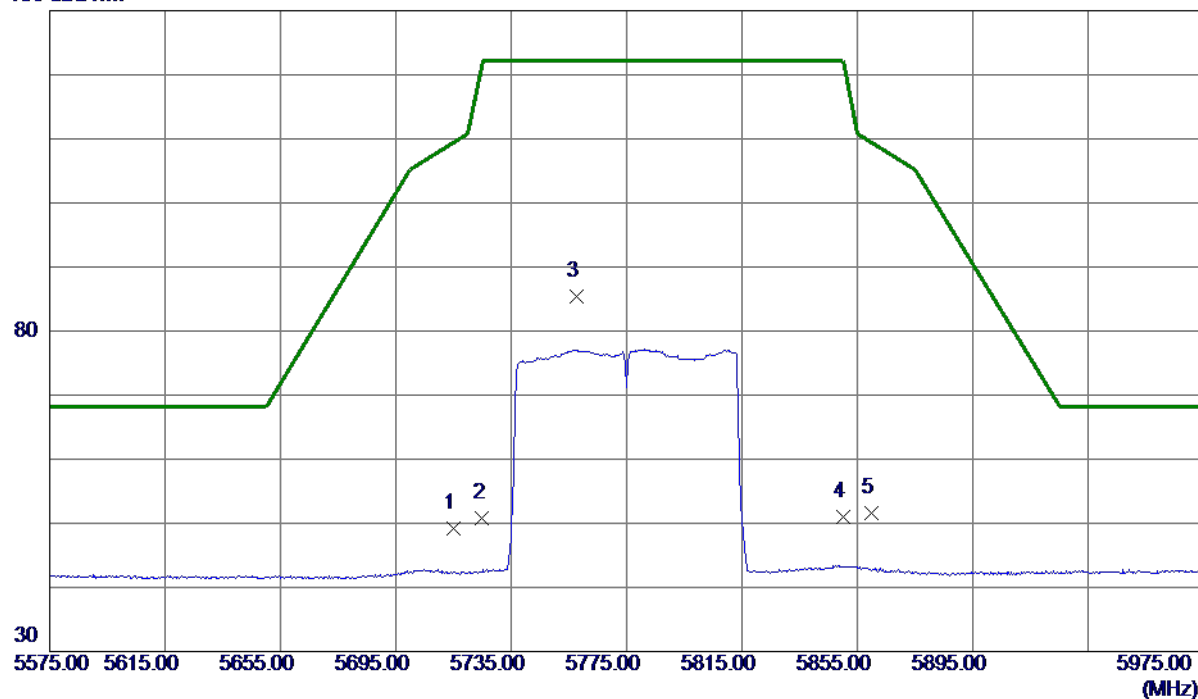

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 33.59                      | 15.65                   | 49.24                     | 109.40          | -60.16       | Peak     |          |
| 2   | 5725.0000    | 35.11                      | 15.68                   | 50.79                     | 122.20          | -71.41       | Peak     |          |
| 3 * | 5757.6000    | 69.62                      | 15.76                   | 85.38                     | 122.20          | -36.82       | Peak     | No Limit |
| 4   | 5850.0000    | 35.10                      | 15.97                   | 51.07                     | 122.20          | -71.13       | Peak     |          |
| 5   | 5860.0000    | 35.68                      | 16.00                   | 51.68                     | 109.40          | -57.72       | Peak     |          |

#### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

### Horizontal

80 dBuV/m

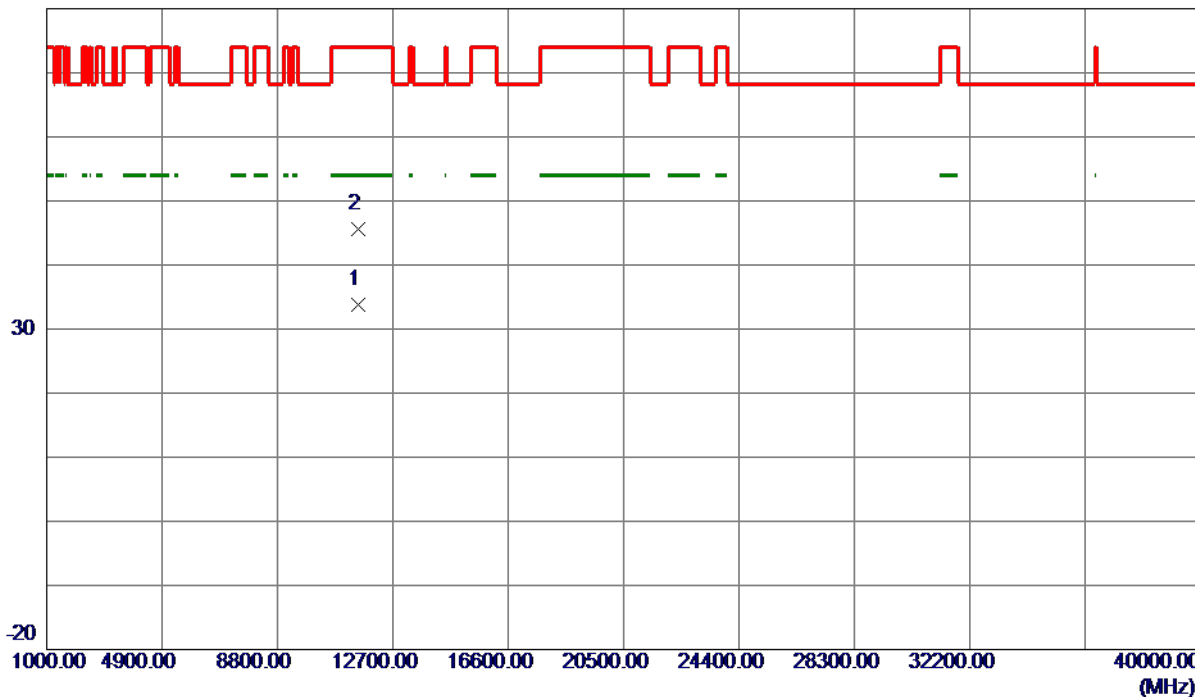

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11548.6400   | 21.64                      | 12.12                   | 33.76                     | 54.00           | -20.24       | AVG      |         |
| 2   | 11551.0519   | 33.38                      | 12.13                   | 45.51                     | 74.00           | -28.49       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


## APPENDIX E - BANDWIDTH

|           |                  |
|-----------|------------------|
| Test Mode | UNII-1_TX A Mode |
|-----------|------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 20.05                 | 16.90                         |
| 40      | 5200            | 20.00                 | 16.90                         |
| 48      | 5240            | 19.95                 | 16.90                         |

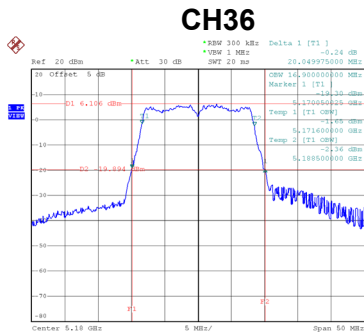

Date: 25.FEB.2019 10:35:29

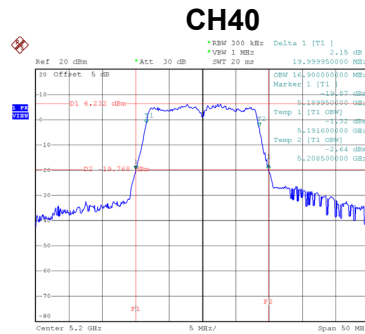


Date: 25.FEB.2019 10:38:17

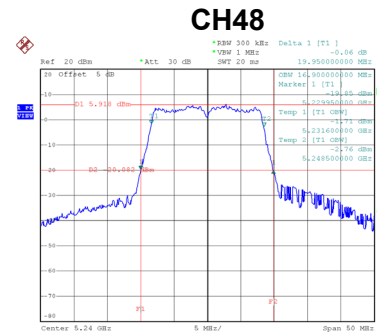


Date: 25.FEB.2019 10:39:31

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX N (HT20) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 28.55                 | 18.00                         |
| 40      | 5200            | 28.85                 | 18.00                         |
| 48      | 5240            | 28.29                 | 18.00                         |

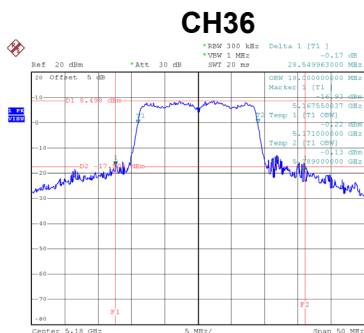

Date: 25.FEB.2019 18:04:27

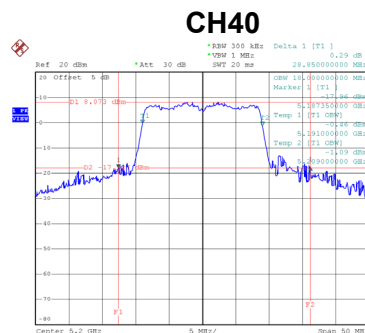


Date: 25.FEB.2019 18:05:30

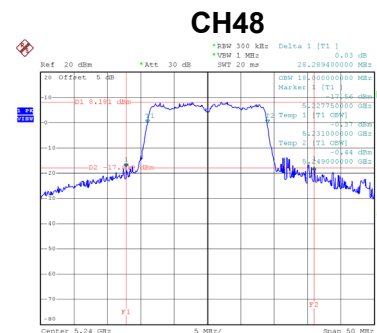


Date: 25.FEB.2019 18:37:46

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX N (HT40) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38      | 5190            | 41.81                 | 36.80                         |
| 46      | 5230            | 42.00                 | 36.80                         |




Date: 25.FEB.2019 18:59:11




Date: 25.FEB.2019 19:04:45

|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2A_TX A Mode |
|-----------|-------------------|


| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99 % Emission Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|----------------------------------|
| 52      | 5260               | 20.09                    | 16.90                            |
| 60      | 5300               | 20.09                    | 16.90                            |
| 64      | 5320               | 20.19                    | 16.90                            |



Date: 25.FEB.2019 10:41:14




Date: 25.FEB.2019 10:42:26




Date: 25.FEB.2019 10:43:50

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX N (HT20) Mode |
|-----------|--------------------------|


| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99 % Emission Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|----------------------------------|
| 52      | 5260               | 29.95                    | 18.00                            |
| 60      | 5300               | 29.60                    | 18.00                            |
| 64      | 5320               | 20.69                    | 17.80                            |

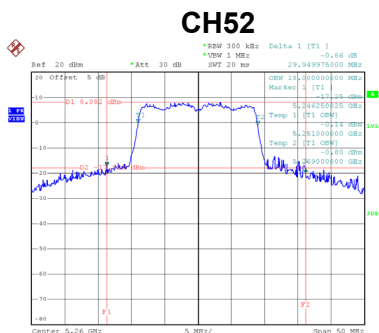

Date: 25.FEB.2019 11:05:57

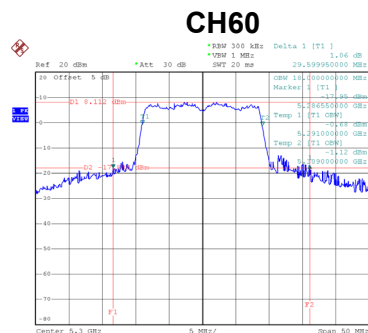


Date: 25.FEB.2019 11:08:36

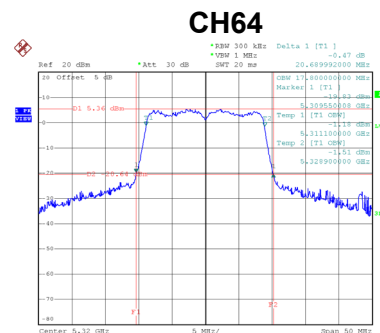


Date: 25.FEB.2019 15:29:49

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX N (HT40) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 54      | 5270            | 42.01                 | 36.60                         |
| 62      | 5310            | 42.21                 | 36.60                         |



Date: 25.FEB.2019 14:10:32




Date: 25.FEB.2019 14:12:48

|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2C_TX A Mode |
|-----------|-------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 20.10                 | 16.90                         |
| 116     | 5580            | 20.15                 | 17.00                         |
| 140     | 5700            | 20.29                 | 17.00                         |

CH100

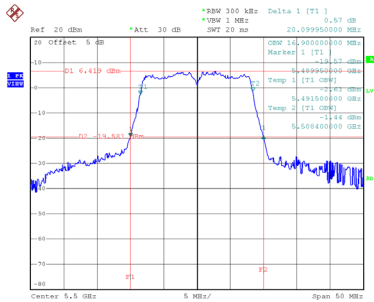


Date: 25.FEB.2019 10:46:31

CH116

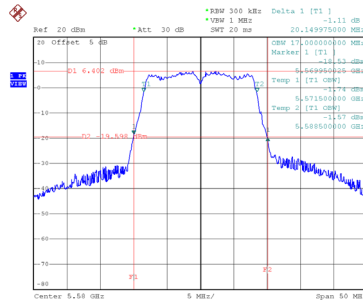

Date: 25.FEB.2019 10:47:56

CH140

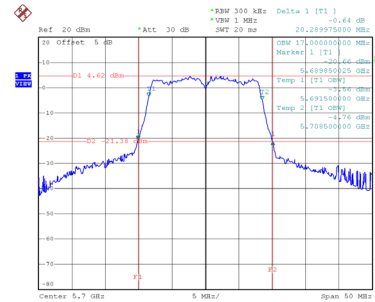


Date: 25.FEB.2019 10:50:00

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2C_TX N (HT20) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 22.31                 | 17.80                         |
| 116     | 5580            | 29.70                 | 18.10                         |
| 140     | 5700            | 22.70                 | 17.90                         |

CH100

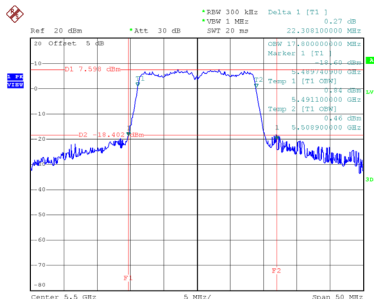


Date: 25.FEB.2019 11:13:24

CH116

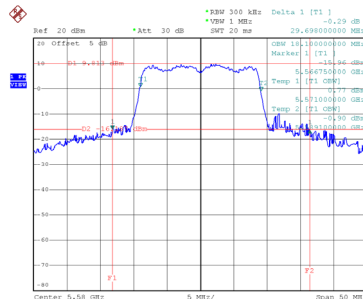

Date: 25.FEB.2019 15:31:18




CH140

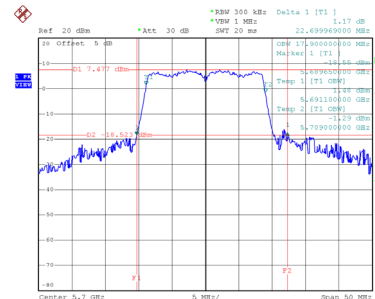

Date: 25.FEB.2019 15:38:56


|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2C_TX N (HT40) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 102     | 5510            | 42.10                 | 36.80                         |
| 110     | 5550            | 41.79                 | 36.80                         |
| 134     | 5670            | 42.30                 | 36.60                         |




|           |                  |
|-----------|------------------|
| Test Mode | UNII-3 TX A Mode |
|-----------|------------------|


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (kHz) | Result   |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|----------|
| 149     | 5745            | 16.65                | 16.60                         | 500                             | Complies |
| 157     | 5785            | 16.65                | 16.60                         | 500                             | Complies |
| 165     | 5825            | 16.65                | 16.60                         | 500                             | Complies |

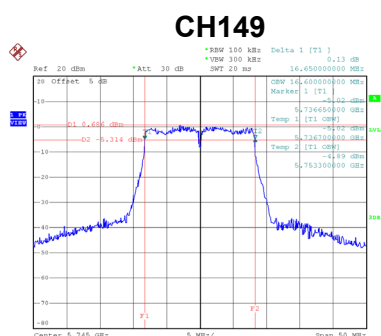

Date: 25.FEB.2019 10:51:32




Date: 25.FEB.2019 10:52:39

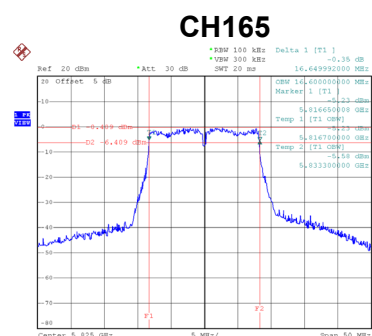


Date: 25.FEB.2019 10:53:40

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-3_TX N (HT20) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (kHz) | Result   |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|----------|
| 149     | 5745            | 17.71                | 17.60                         | 500                             | Complies |
| 157     | 5785            | 17.80                | 17.80                         | 500                             | Complies |
| 165     | 5825            | 17.85                | 17.70                         | 500                             | Complies |

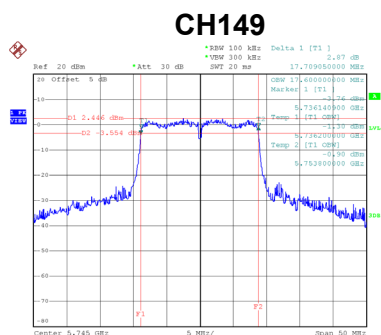

Date: 25.FRB.2019 15:34:16

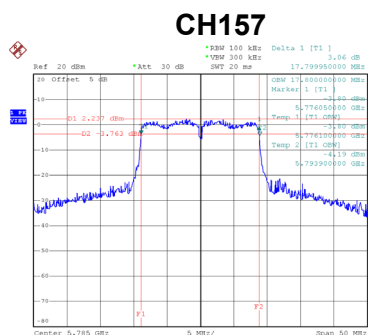

Date: 25.FEB.2019 11:19:57

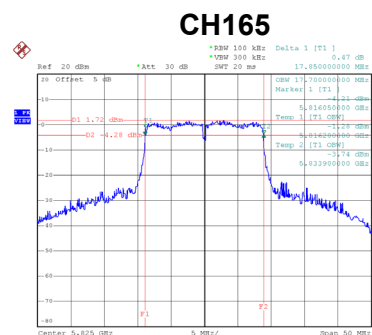


Date: 25.FEB.2019 11:27:11

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-3_TX N (HT40) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (kHz) | Result   |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|----------|
| 151     | 5755            | 36.50                | 36.40                         | 500                             | Complies |
| 159     | 5795            | 36.50                | 36.20                         | 500                             | Complies |

CH151

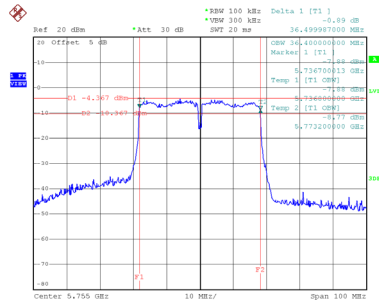

Date: 25.FEB.2019 14:17:29


CH159

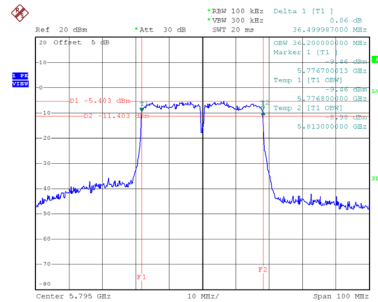


Date: 25.FEB.2019 14:18:37

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-1_TX AC (VHT20) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 23.39                 | 17.90                         |
| 40      | 5200            | 21.36                 | 17.90                         |
| 48      | 5240            | 20.79                 | 17.80                         |



Date: 25.FEB.2019 18:51:17




Date: 25.FEB.2019 18:52:59

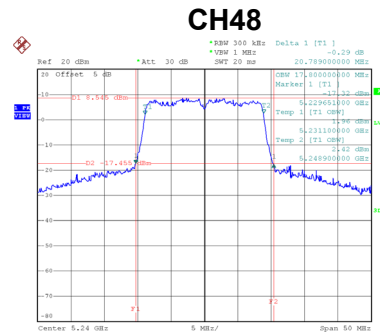


Date: 25.FEB.2019 18:54:06

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-1_TX AC (VHT40) Mode |
|-----------|---------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38      | 5190            | 41.70                 | 36.60                         |
| 46      | 5230            | 41.41                 | 36.60                         |

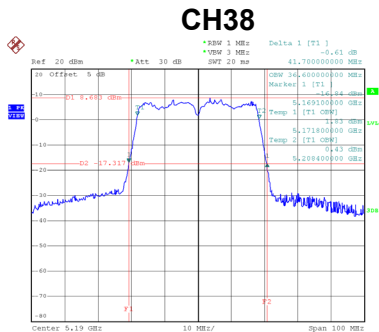


Date: 25.FEB.2019 19:14:07

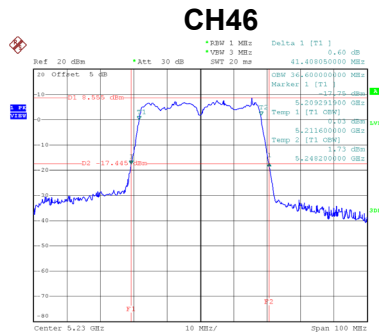

Date: 25.FEB.2019 19:15:45

|           |                      |
|-----------|----------------------|
| Test Mode | UNII-1_TX AC (VHT80) |
|-----------|----------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42      | 5210            | 81.80                 | 76.00                         |



Date: 25.FEB.2019 19:22:59