

EXHIBIT 5

Test Report

APPLICATION FOR CERTIFICATION

On Behalf of
Matsushita Electric Industrial Co., Ltd.
17" Multi-Scan Color Monitor

Model : TX-T7F22*/M-T7F22*

FCC ID : ACJ92512127

Prepared for : Matsushita Electric Industrial Co., Ltd.
One Panasonic Way, Panazip 4B-8,
Secaucus, NJ 07094, U.S.A.

Prepared By : Taiwan Tokin EMC Eng. Corp.
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei Hsien, Taiwan, R.O.C.

Tel: (02) 2609-9301, 2609-2133

File Number : ATM-G99058
Report Number : TTEMC-F99020
Date of Test : Feb. 10 ~ 11, 1999
Date of Report : Feb. 25, 1999

TABLE OF CONTENTS

Description	Page
Test Report Certification.....	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Tested Supporting System Details	5
1.3. Description of Test Facility	6
2. POWERLINE CONDUCTED TEST.....	7
2.1. Test Equipment	7
2.2. Block Diagram of Test Setup.....	7
2.3. Powerline Conducted Emission Limit (CLASS B).....	8
2.4. EUT's Configuration during Compliance Measurement.....	8
2.5. Operating Condition of EUT.....	8
2.6. Test Procedure.....	9
2.7. Test Results	9
2.8. Line Conducted RF Voltage Measurement Results.....	9
3. RADIATED EMISSION TEST	16
3.1. Test Equipment	16
3.2. Block Diagram of Test Setup.....	16
3.3. Radiation Limit (CLASS B)	17
3.4. EUT's Configuration during Compliance Measurement.....	17
3.5. Operating Condition of EUT.....	17
3.6. Test Procedure.....	18
3.7. Test Results	18
3.8. Radiated Emission Measurement Results.....	19
4. DEVIATIONS TO TEST SPECIFICATIONS	21
5. PHOTOGRAPHS.....	22
5.1. Photos of Powerline Conducted Measurement	22
5.2. Photos of Radiated Measurement at Open Field Test Site	23
5.3. Photos of Radiated Measurement at Anechoic Chamber	25
APPENDIX I (Conducted Test Data)	
APPENDIX II (Radiated Test Data at Anechoic Chamber)	

TEST REPORT CERTIFICATION

Applicant : Matsushita Electric Industrial Co., Ltd.
Manufacturer : Matsushita Electric (Taiwan) Co., Ltd.
FCC ID : ACJ92512127
EUT Description : 17" Multi-Scan Color Monitor
(A) MODEL NO. : TX-T7F22*/M-T7F22*
(B) SERIAL NO. : TA9130002
(C) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used :

FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 1997
AND FCC / ANSI C63.4-1992

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15B Class B limits both radiated and conducted emissions.

The measurement results were contained in this test report and TAIWAN TOKIN EMC ENG. CORP. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report showed that the EUT to be technically compliance with the FCC official limits.

This report applied to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : Feb. 10 ~ 11, 1999

Prepared by : Monica Chang Feb. 26, 1999
(MONICA CHANG)

Test Engineer : Kent
(KENT HSU)

Approve & Authorized Signer :

Jackie Deng 3/1/99
(JACKIE DENG)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	17" Multi-Scan Color Monitor
Model Number	:	TX-T7F22*/M-T7F22*
		The M/N TX-T7F22* is for panasonic; the M/N M-T7F22* is for Tiny; the "*" may be numeral 1 to 9 or alphabet A to Z.
Serial Number	:	TA9130002
Applicant	:	Matsushita Electric Industrial Co., Ltd. One Panasonic Way, Panazip 4B-8, Secaucus, NJ 07094, U.S.A.
Manufacturer	:	Matsushita Electric (Taiwan) Co., Ltd. 579 Yuan San Road, Chung-Ho, Taipei Hsien 23506, Taiwan, R.O.C.
CRT	:	Panasonic, M/N M41KXH100X01 S/N M000041
Data Cable	:	Shielded, Detachable, 1.5m Bonded two ferrite cores
Power Cord	:	Non-Shielded, Detachable, 1.5m
Date of Receipt of Sample	:	Feb. 10, 1999
Date of Test	:	Feb. 10 ~ 11, 1999

1.2. Tested Supporting System Details

1.2.1. PERSONAL COMPUTER

Model Number	:	PC763
Serial Number	:	TA421U7881
FCC ID	:	AO9-PC76X
Manufacturer	:	Digital
Switching Power Supply	:	Astec M/N SA-201-3440
Floppy Driver 3.5"	:	Teac Corp. M/N FD-235HF
VGA Card	:	Sixgraph Computing Ltd. M/N Wiz 924 S/N 189477 FCC ID JYOWIZ01
Disk Ctrl Card	:	Within Mother Board
Serial/Parallel Card	:	Within Mother Board
Power Cord	:	Non-Shielded, Detachable, 1.8m

1.2.2. KEYBOARD

Model Number	:	5121
Serial Number	:	J83300813
FCC ID	:	E5XKBM104M10UC
Manufacturer	:	Behavior Tech Computer Corp.
Data Cable	:	Shielded, Undetachable, 1.0m

1.2.3. PRINTER

Model Number	:	2225C
Serial Number	:	2526S40437
FCC ID	:	BS46XU2225C
Manufacturer	:	Hewlett Packard
Power Cord	:	Non-Shielded, Undetachable, 1.8m
Data Cable	:	Shielded, Detachable, 1.2m

1.2.4. MODEM #1

Model Number	:	DM-1414
Serial Number	:	980034396
FCC ID	:	IFAXDM1414
Manufacturer	:	Accex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A Non-Shielded, Undetachable, 1.8m

1.2.5. MODEM #2

Model Number	:	DM-1414
Serial Number	:	980034395
FCC ID	:	IFAXDM1414
Manufacturer	:	Accex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A Non-Shielded, Undetachable, 1.8m

1.2.6. MOUSE

Model Number	:	M-S35
Serial Number	:	LZA82103160
FCC ID	:	DZL211029
Manufacturer	:	Logitech
Data Cable	:	Non-Shielded, Undetachable, 1.8m

1.3. Description of Test Facility

Site Description (No. 5 Open Site)	:	Feb. 13, 1998 File on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
---------------------------------------	---	--

Site Description (Anechoic Chamber)	:	Aug. 22, 1997 Re-file on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
--	---	---

Name of Firm	:	Taiwan Tokin EMC Eng. Corp.
--------------	---	-----------------------------

Site Location	:	No. 53-11, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C.
---------------	---	--

NVLAP lab. Code	:	200077-0
-----------------	---	----------

2. POWERLINE CONDUCTED TEST


2.1. Test Equipment

The following test equipments were used during the power line conducted tests :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde&Schwarz	ESC3 30	825442/020	Apr. 29, 98'	1 Year
2.	L.I.S.N. # 1	Kyoritsu	KNW-407	8-1370-9	Jun.03, 98'	1 Year
3.	L.I.S.N. # 2	Kyoritsu	KNW-407	8-1370-10	Jun.03, 98'	1 Year

2.2. Block Diagram of Test Setup

2.2.1. EUT Power Connects to L.I.S.N. Directly

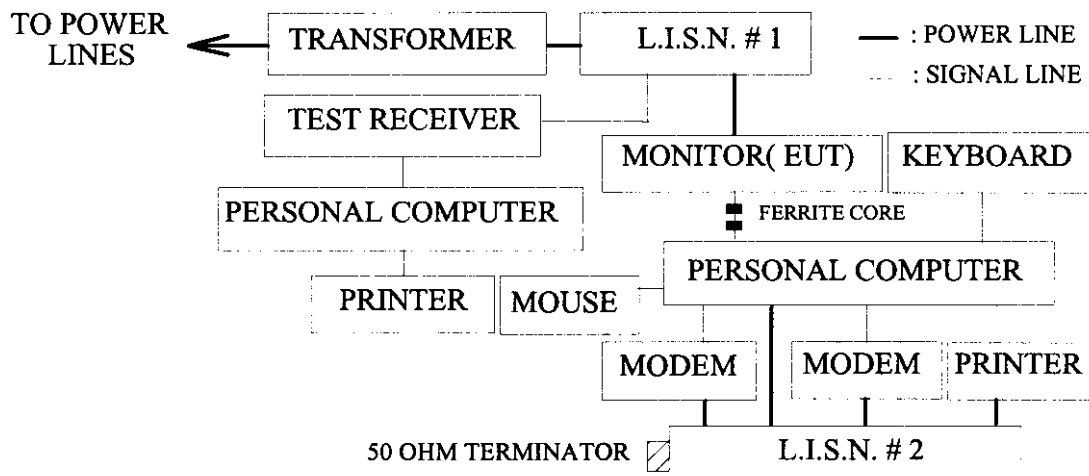

2.2.2. EUT Power connects to PC AC Outlet then PC power connects to L.I.S.N.

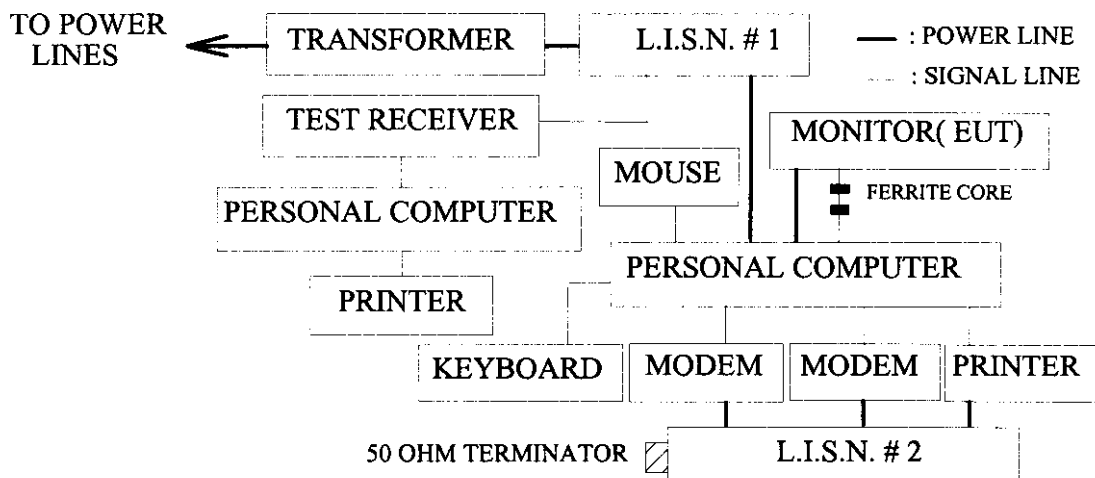

2.6. Test Procedure

The EUT was connected to the power mains through a line impedance stabilization network (L.I.S.N.# 1). The EUT is also connected to PC power outlet then the PC power cord connected to the power mains through a line impedance stabilization network (L.I.S.N # 1.). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N. # 2). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to FCC ANSI C63.4-1992 on conducted measurement.

The bandwidth of the R&S Test Receiver ESCS 30 was set at 10KHz.

The frequency range from 450KHz to 30MHz was checked.

2.7. Test Results

PASSED. Please refer to the following pages.

2.8. Line Conducted RF Voltage Measurement Results

The following test modes were done on conducted measurement and reported the worst test modes 7 & 14 in the next pages, the others test data are attached within Appendix I.

(Test Date : Feb. 11, 1999 Temperature : 20 °C Humidity : 56 %)

Mode	Frequency Resolution	EUT Power	Reference Data #
1.	31.5KHz / 640*480	Connect to L.I.S.N	# 93, 94
2.	37.9KHz / 640*480	Connect to L.I.S.N	# 97, 98
3.	48.1KHz / 800*600	Connect to L.I.S.N	# 100, 99
4.	48.4KHz / 1024*768	Connect to L.I.S.N	# 96, 95
5.	58KHz / 1024*768	Connect to L.I.S.N	# 101, 102
6.	61.6KHz / 1280*960	Connect to L.I.S.N	# 104, 103
※ 7.	66KHz / 1280*1024	Connect to L.I.S.N	# 105 (106), 107 (108)
8.	31.5KHz / 640*480	Connect to PC	# 110, 109
9.	37.9KHz / 640*480	Connect to PC	# 114, 113
10.	48.1KHz / 800*600	Connect to PC	# 115, 116
11.	48.4KHz / 1024*768	Connect to PC	# 111, 112
12.	58KHz / 1024*768	Connect to PC	# 118, 117
13.	61.6KHz / 1280*960	Connect to PC	# 119, 120
※ 14.	66KHz / 1280*1024	Connect to PC	# 123 (122), 121 (124)


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site: *FCC ID: ACJ92512127* Page 10 of 25
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 105 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:38:33

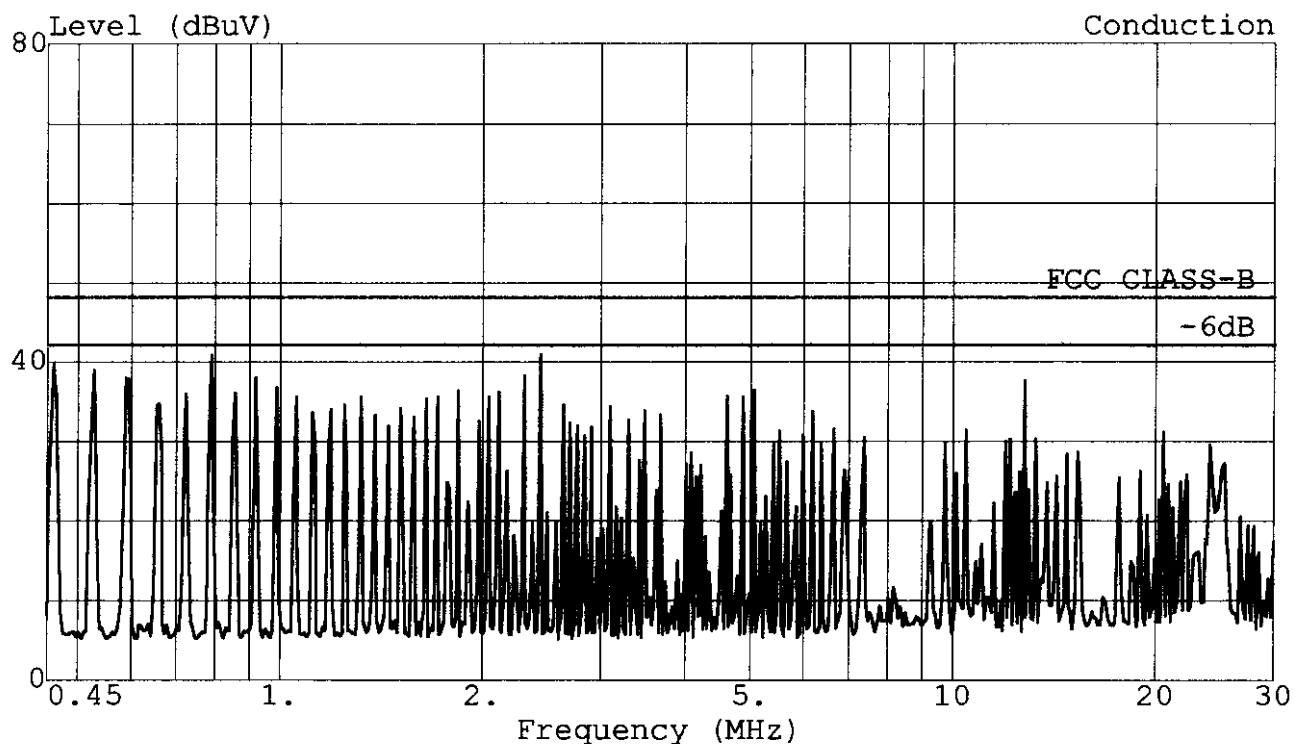

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1280*1024;66KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site: ^{FCC ID: ACJ92512127} Page 11 of 25
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 107 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:42:28

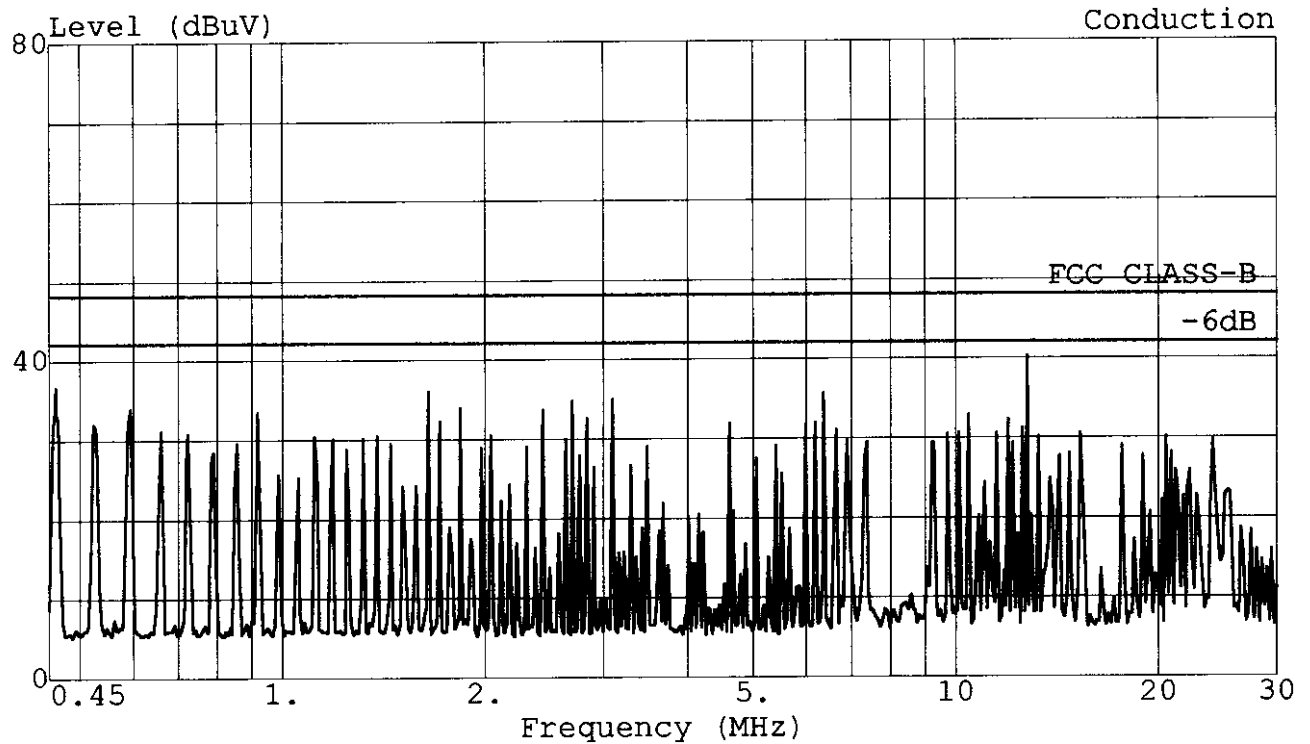

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1280*1024;66KHz

Data#: 106 File#: MATSUSHI.EMI Date: 1999-02-11 Time: 14:41:15
 Conduction
 Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
 EUT : 17" COLOR MONITOR EUT TO LISN
 Power: 120Vac/60Hz
 Memo : M/N:TX-T7F22*/M-T7F22*
 : 1280*1024;66KHz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.460	39.70	-8.30	48.00	39.54	0.11	0.04	0.00	QP
2	0.790	39.27	-8.73	48.00	39.12	0.10	0.05	0.00	QP
3	2.437	39.61	-8.39	48.00	39.46	0.10	0.05	0.00	QP
4	5.073	35.60	-12.40	48.00	35.45	0.10	0.05	0.00	QP
5	12.782	35.61	-12.39	48.00	35.35	0.18	0.08	0.00	QP
6	20.623	29.89	-18.11	48.00	29.41	0.28	0.20	0.00	QP


Data#: 108 File#: MATSUSHI.EMI Date: 1999-02-11 Time: 14:45:08
 Conduction
 Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
 EUT : 17" COLOR MONITOR EUT TO LISN
 Power: 120Vac/60Hz
 Memo : M/N:TX-T7F22*/M-T7F22*
 : 1280*1024;66KHz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.459	35.25	-12.75	48.00	35.09	0.12	0.04	0.00	QP
2	0.921	32.57	-15.43	48.00	32.42	0.10	0.05	0.00	QP
3	1.646	34.72	-13.28	48.00	34.57	0.10	0.05	0.00	QP
4	3.095	33.97	-14.03	48.00	33.82	0.10	0.05	0.00	QP
5	6.393	34.16	-13.84	48.00	34.01	0.10	0.05	0.00	QP
6	12.847	38.80	-9.20	48.00	38.54	0.18	0.08	0.00	QP

Data#: 123 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:13:22

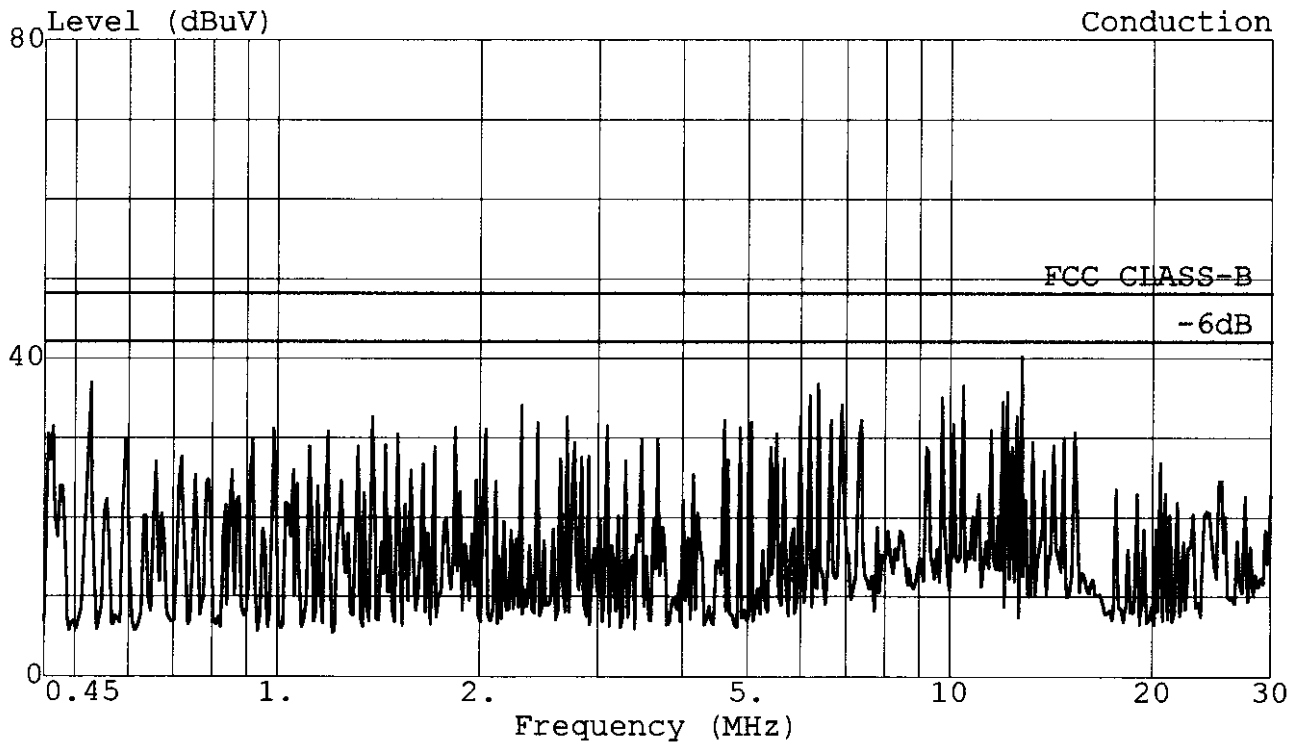

Trace: Ref Trace:
 Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
 EUT : 17" COLOR MONITOR EUT TO PC
 Power: 120Vac/60Hz
 Memo : M/N:TX-T7F22*/M-T7F22*
 : 1280*1024;66KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site: ^{FCC ID: ACJ92512127} Page 14 of 25
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 121 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:10:12

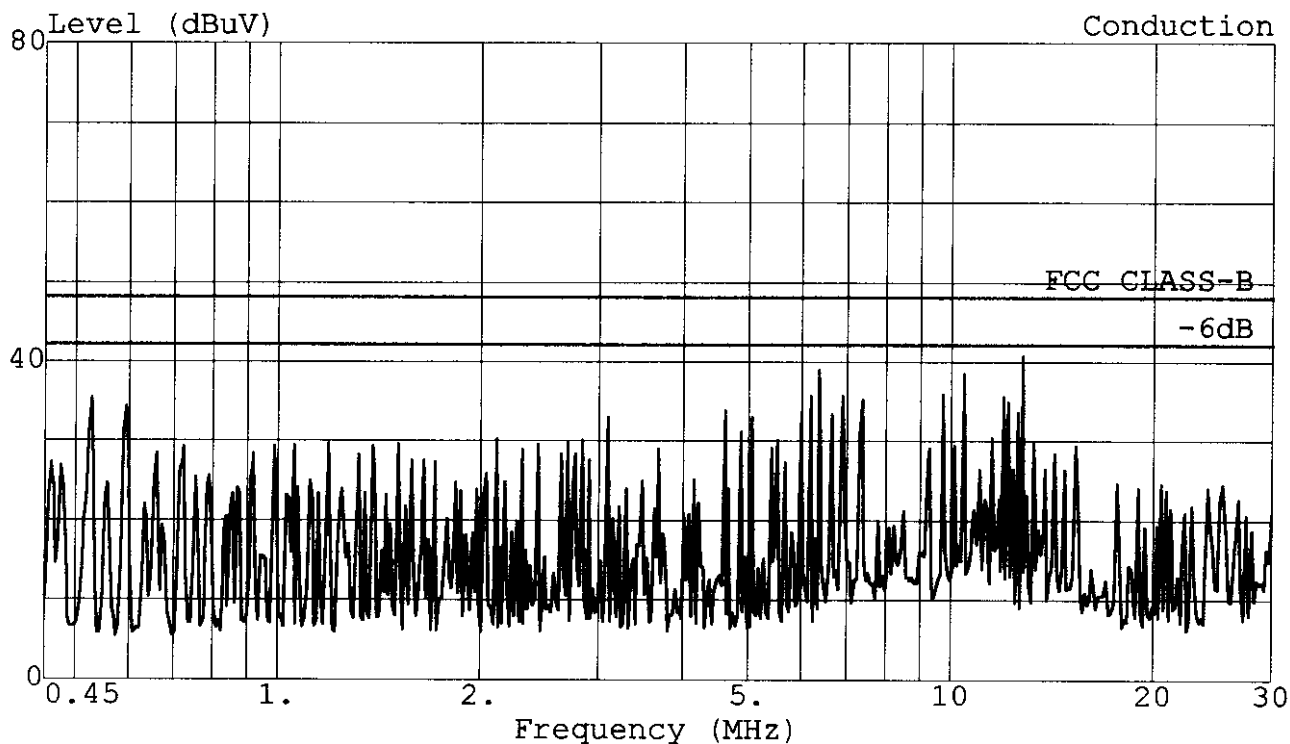

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1280*1024;66KHz

Data#: 122 File#: MATSUSHI.EMI Date: 1999-02-11 Time: 15:12:38

Conduction

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1280*1024;66KHz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.526	34.82	-13.18	48.00	34.68	0.10	0.04	0.00	QP
2	0.593	32.88	-15.12	48.00	32.74	0.10	0.04	0.00	QP
3	3.097	31.65	-16.35	48.00	31.50	0.10	0.05	0.00	QP
4	6.390	36.57	-11.43	48.00	36.42	0.10	0.05	0.00	QP
5	10.475	37.56	-10.44	48.00	37.35	0.16	0.06	0.00	QP
6	12.847	39.98	-8.02	48.00	39.72	0.18	0.08	0.00	QP

Data#: 124 File#: MATSUSHI.EMI Date: 1999-02-11 Time: 15:16:02

Conduction

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1280*1024;66KHz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.526	35.62	-12.38	48.00	35.48	0.10	0.04	0.00	QP
2	0.595	28.55	-19.45	48.00	28.41	0.10	0.04	0.00	QP
3	1.383	31.43	-16.57	48.00	31.28	0.10	0.05	0.00	QP
4	2.700	31.36	-16.64	48.00	31.21	0.10	0.05	0.00	QP
5	6.392	36.02	-11.98	48.00	35.87	0.10	0.05	0.00	QP
6	12.846	39.82	-8.18	48.00	39.56	0.18	0.08	0.00	QP

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission tests :

3.1.1. For Anechoic Chamber :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	HP	8593A	3212A01727	Jul.25, 98'	1 Year
2.	Pre-Amplifier	HP	8447D	2944A06305	May.13,98'	1 Year
3.	Broadband Antenna	Schwarzbeck	BBA9106	A3L	Dec.09, 98'	1 Year
4.	Broadband Antenna	Schwarzbeck	UHALP9107	A3H	Dec.09, 98'	1 Year

3.1.2. For No. 5 Open Site :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	R&S	ESVP	861190/011	Dec.21, 98'	1 Year
2.	Broadband Antenna	Chase	VBA6106A	1245	Jul.23, 98'	1 Year
3.	Broadband Antenna	Chase	UPA6109	1035	Jul.23, 98'	1 Year


3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

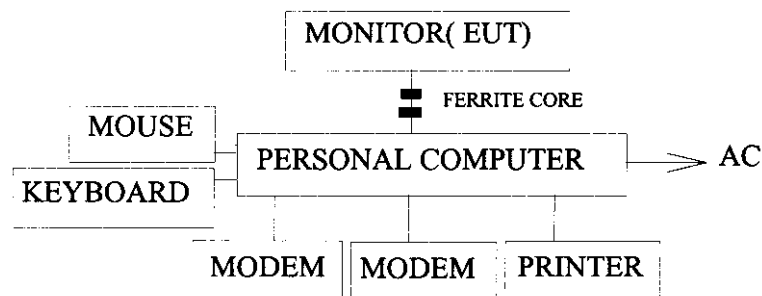

3.2.2. Anechoic Chamber & Open Field Test Site Setup Diagram

ANTENNA TOWER

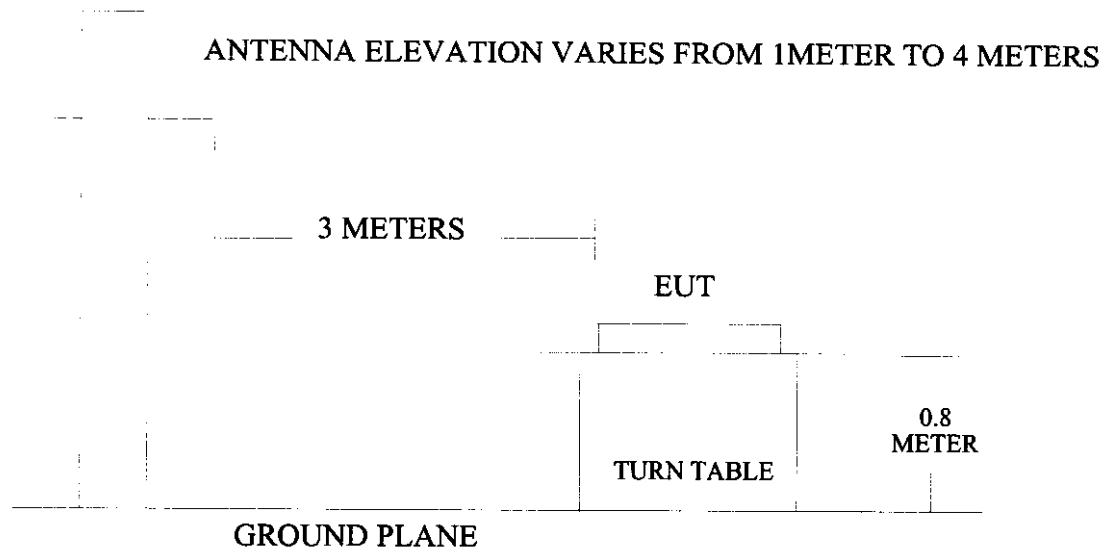

3.3. Radiation Limit (CLASS B)

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMITS	
MHz	Meters	uV/M	dBuV/M
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

- Remark :
- (1) Emission level (dBuV/M) = 20 log Emission level (uV/M)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT's Configuration during Compliance Measurement

The configuration of EUT and its simulators were same as those used in conducted measurement. Please refer to 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which is listed in 2.5.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotate 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which were mounted on a antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 on radiated measurement.

The bandwidth of the R&S Test Receiver ESVP was set at 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

The following operating conditions were measured within Anechoic Chamber and all the scanning waveform were attached within Appendix II, which include :

- (1) 31.5KHz/640*480
- (2) 37.9KHz/640*480
- (3) 48.1KHz/800*600
- (4) 48.4KHz/1024*768
- (5) 58KHz/1024*768
- (6) 61.6KHz/1280*960
- (7) 66KHz/1280*1024

Finally, re-measured the each worst operating situation (66KHz/1280*1024) at No. 5 Open Field Test Site and all the test results are listed in section 3.8.

3.7. Test Results

PASSED. Please refer to the following pages.

3.8. Radiated Emission Measurement Results

The frequency spectrum from 30 MHz to 1000MHz was investigated. All the emissions not reported below were too low against the FCC CLASS B limit.

Date of Test : Feb. 11, 1999 Temperature : 22 °C
 EUT : 17" Multi-Scan Color Monitor Humidity : 65 %
 Test Mode : 66KHz/1280*1024

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dBuV/m
			Horizontal dBuV		Horizontal dBuV/m	Limits dBuV/m	
41.319	19.66	1.15	2.87		23.68	40.00	16.32
55.067	13.59	1.33	9.16		24.08	40.00	15.92
75.753	12.95	1.54	15.97		30.46	40.00	9.54
123.954	19.60	1.99	8.58		30.17	43.50	13.33
130.810	19.97	2.06	9.84		31.87	43.50	11.63
144.580	20.30	2.17	8.08		30.55	43.50	12.95
199.675	21.44	2.57	4.57		28.58	43.50	14.92
220.331	21.90	2.70	9.19		33.79	46.00	12.21
* 234.089	22.78	2.75	12.57		38.10	46.00	7.90
254.744	23.49	2.96	11.52		37.97	46.00	8.03
344.261	16.48	3.45	6.91		26.84	46.00	19.16
351.149	16.70	3.49	9.66		29.85	46.00	16.15
406.241	17.80	3.81	4.98		26.59	46.00	19.41
440.672	17.83	3.92	6.27		28.02	46.00	17.98
537.063	19.44	4.40	3.63		27.47	46.00	18.53
550.833	20.14	4.44	7.78		32.36	46.00	13.64
660.971	20.91	4.92	0.95		26.78	46.00	19.22
798.708	22.02	5.54	4.32		31.88	46.00	14.12
826.249	23.09	5.71	1.87		30.67	46.00	15.33

- Remark :
1. All reading were Quasi-Peak values.
 2. The worst emission was detected at 234.089MHz with corrected signal level of 38.10dBuV/m (limit was 46.0dBuV/m) when the antenna was at horizontal polarization and was at 1m high and the turn table was at 330 ° .
 3. 0 ° is the table front facing the antenna. Degree was calculated from 0 ° clockwise facing the antenna.

Date of Test : Feb. 11, 1999 Temperature : 22 °C
 EUT : 17" Multi-Scan Color Monitor Humidity : 65 %
 Test Mode : 66KHz/1280*1024

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBuV	Emission Level Vertical dBuV/m	Limits dBuV/m	Margin dBuV/m
46.780	16.19	1.21	15.08	32.48	40.00	7.52
* 55.091	13.94	1.33	20.50	35.77	40.00	4.23
68.732	12.75	1.48	17.36	31.59	40.00	8.41
75.593	13.52	1.54	18.26	33.32	40.00	6.68
82.478	15.33	1.60	18.51	35.44	40.00	4.56
110.160	18.46	1.86	10.74	31.06	43.50	12.44
130.817	19.26	2.06	8.20	29.52	43.50	13.98
151.473	20.91	2.21	4.05	27.17	43.50	16.33
220.323	22.57	2.70	4.33	29.60	46.00	16.40
254.749	23.66	2.96	5.02	31.64	46.00	14.36
275.404	24.12	3.07	6.25	33.44	46.00	12.56
296.059	25.53	3.19	4.79	33.51	46.00	12.49
344.263	15.85	3.45	9.13	28.43	46.00	17.57
351.148	15.52	3.49	12.66	31.67	46.00	14.33
406.227	16.81	3.81	10.92	31.54	46.00	14.46
440.652	17.56	3.92	7.59	29.07	46.00	16.93
550.804	20.12	4.44	7.24	31.80	46.00	14.20
605.884	20.08	4.74	2.21	27.03	46.00	18.97
764.263	21.81	5.41	2.20	29.42	46.00	16.58

- Remark :
1. All reading were Quasi-Peak values.
 2. The worst emission was detected at 55.091MHz with corrected signal level of 35.77dBuV/m (limit was 40.0dBuV/m) when the antenna was at vertical polarization and was at 1.4m high and the turn table was at 325 ° .
 3. 0 ° is the table front facing the antenna. Degree was calculated from 0 ° clockwise facing the antenna.

4. DEVIATIONS TO TEST SPECIFICATIONS

[NONE]

APPENDIX I

Conducted Test Data

(Total Pages : 24)

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 93 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:18:14

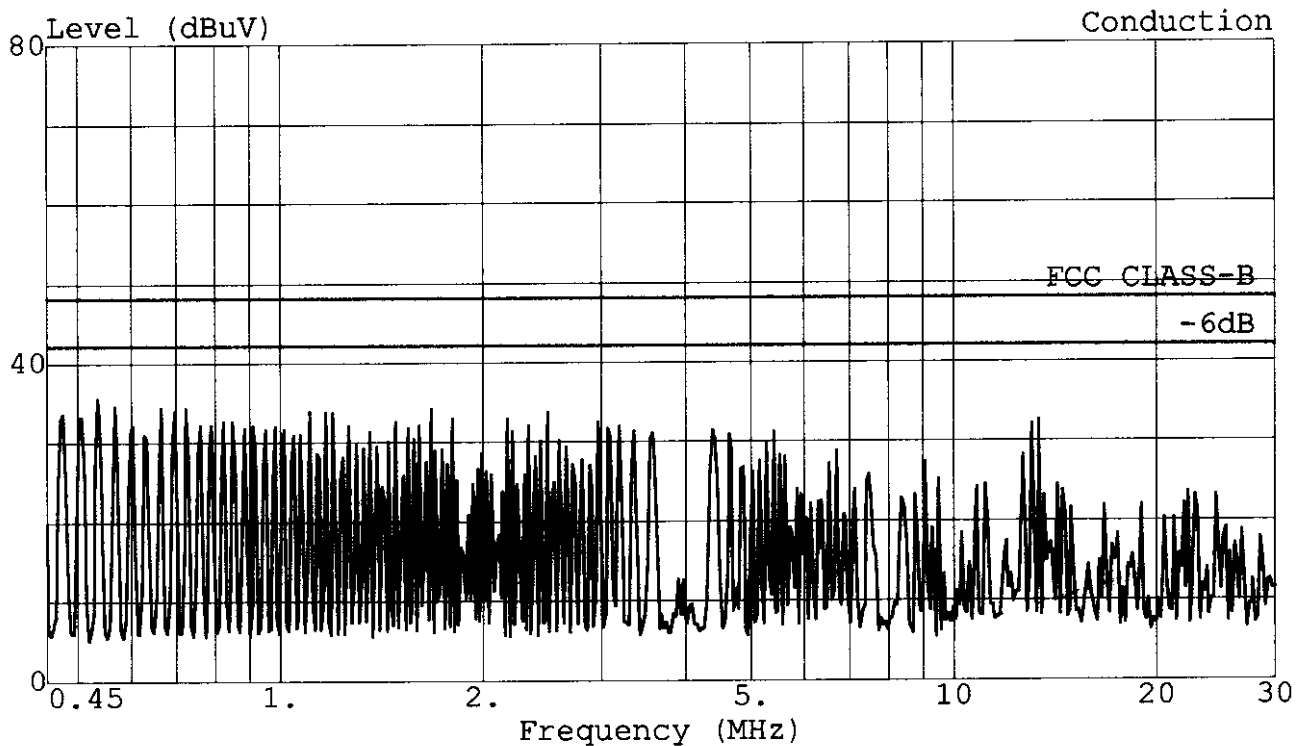

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 640*480;31.5KHz

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 94 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:18:40

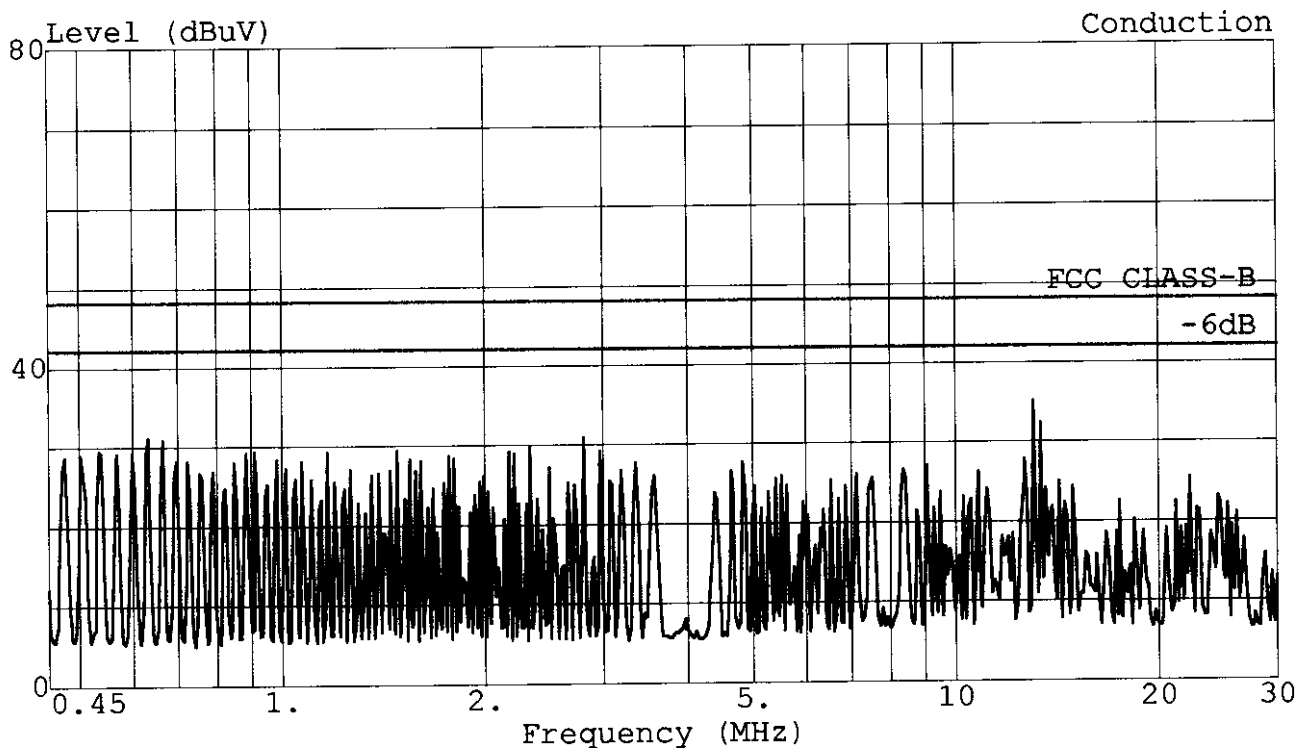

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 640*480;31.5KHz

Ref Trace:

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 97 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:24:59

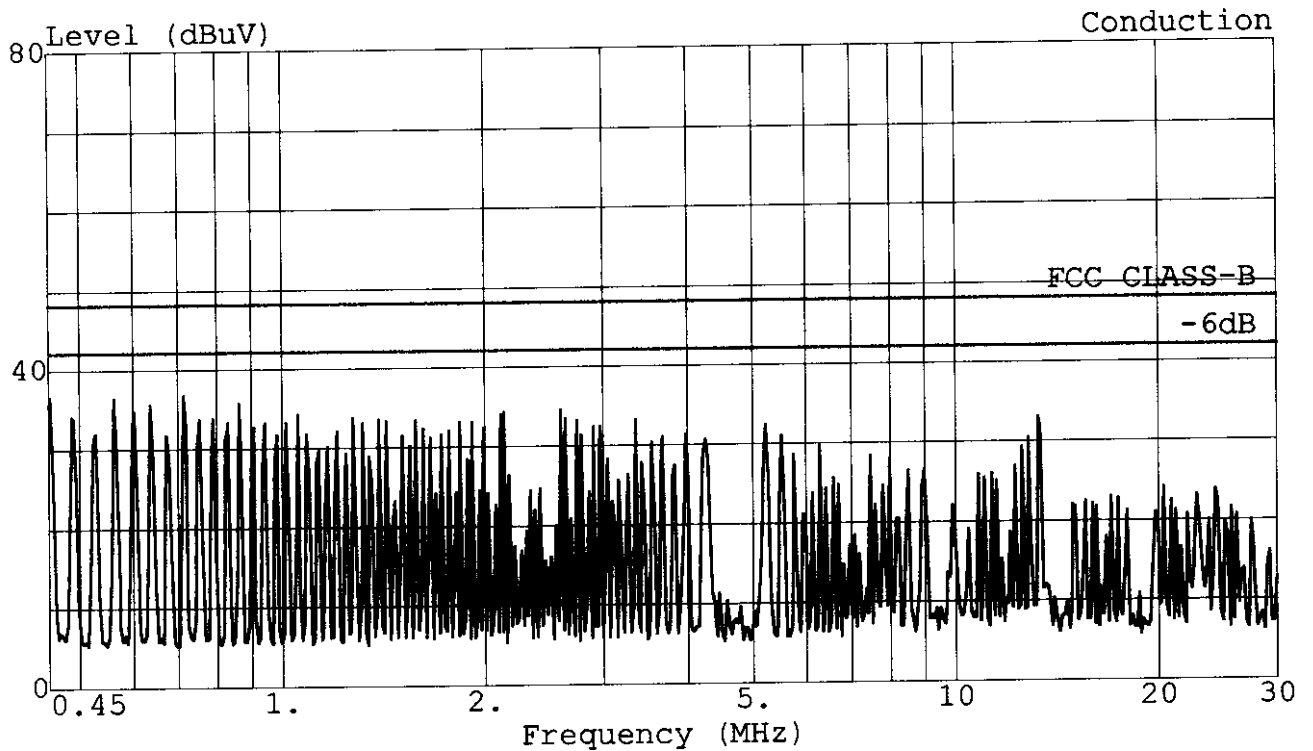

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 640*480;37.9KHz

Ref Trace:


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 98 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:25:27

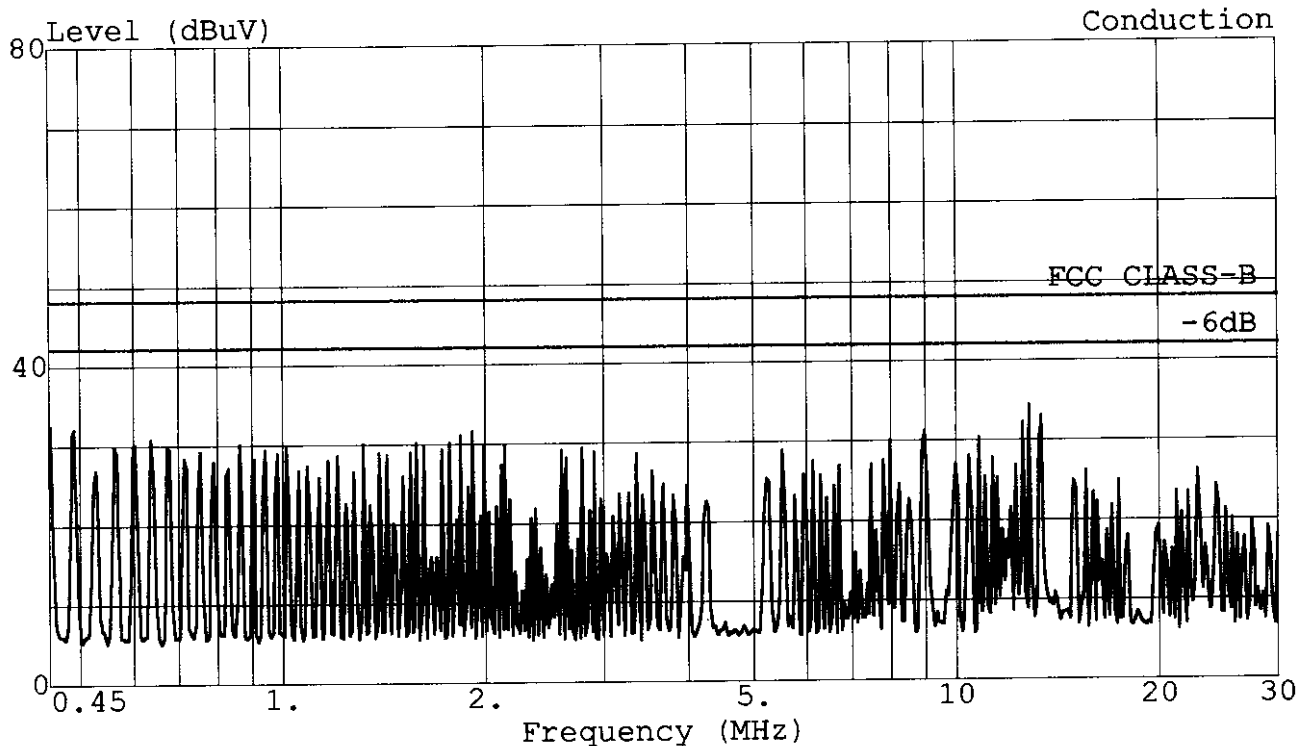

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 640*480;37.9KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 100 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:30:32

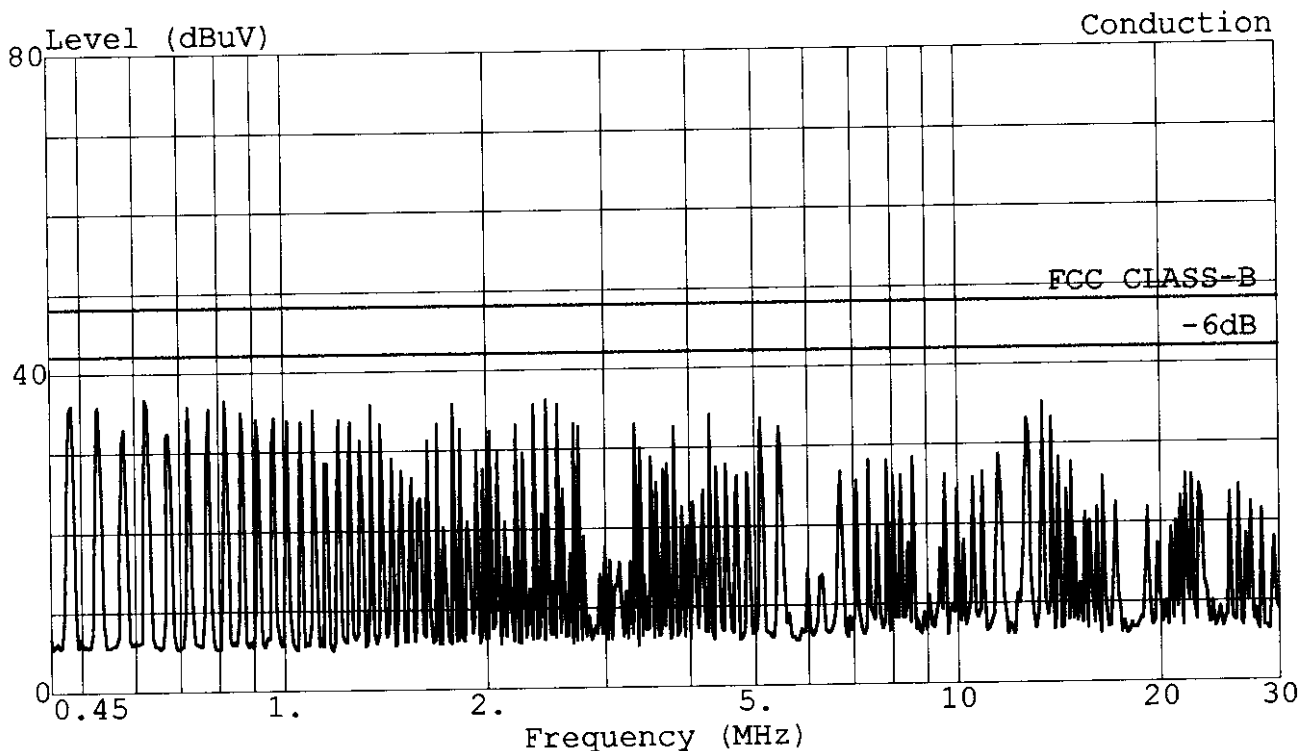

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 800*600;48.1KHz

Ref Trace:


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 99 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:30:04

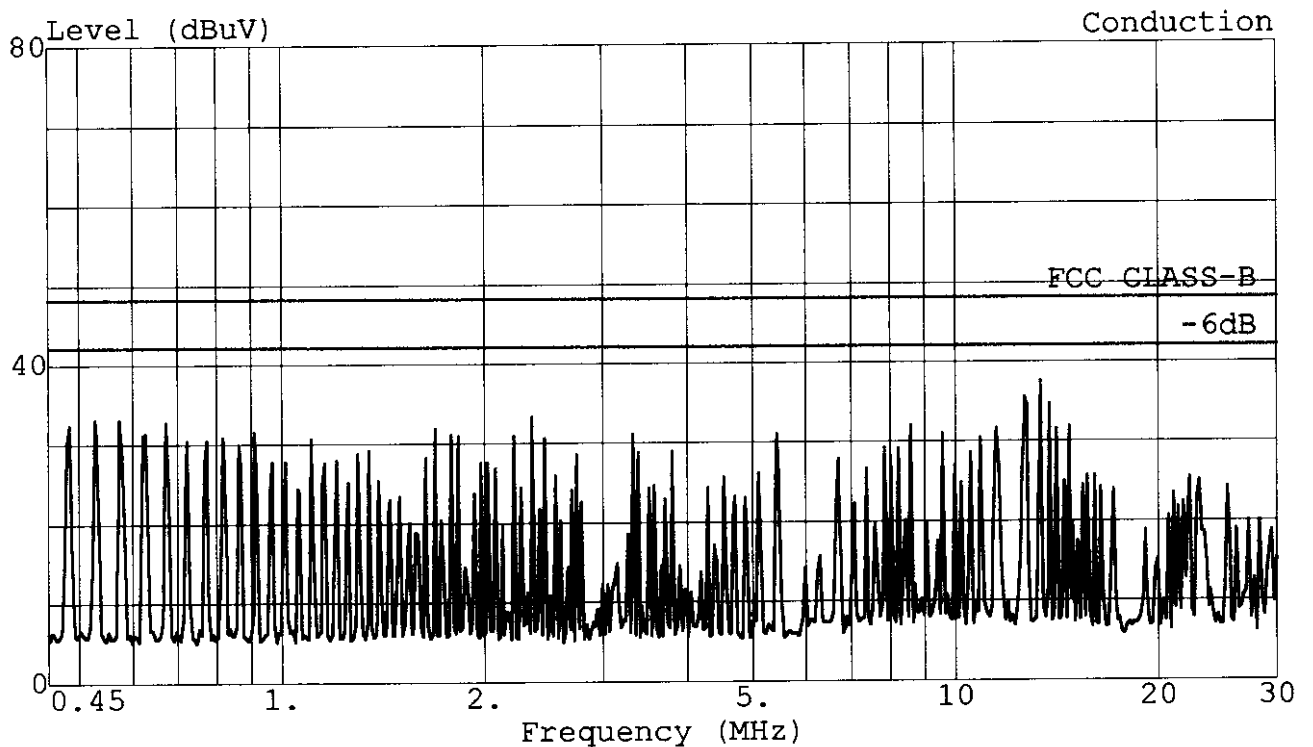

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 800*600;48.1KHz

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 96 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:21:19

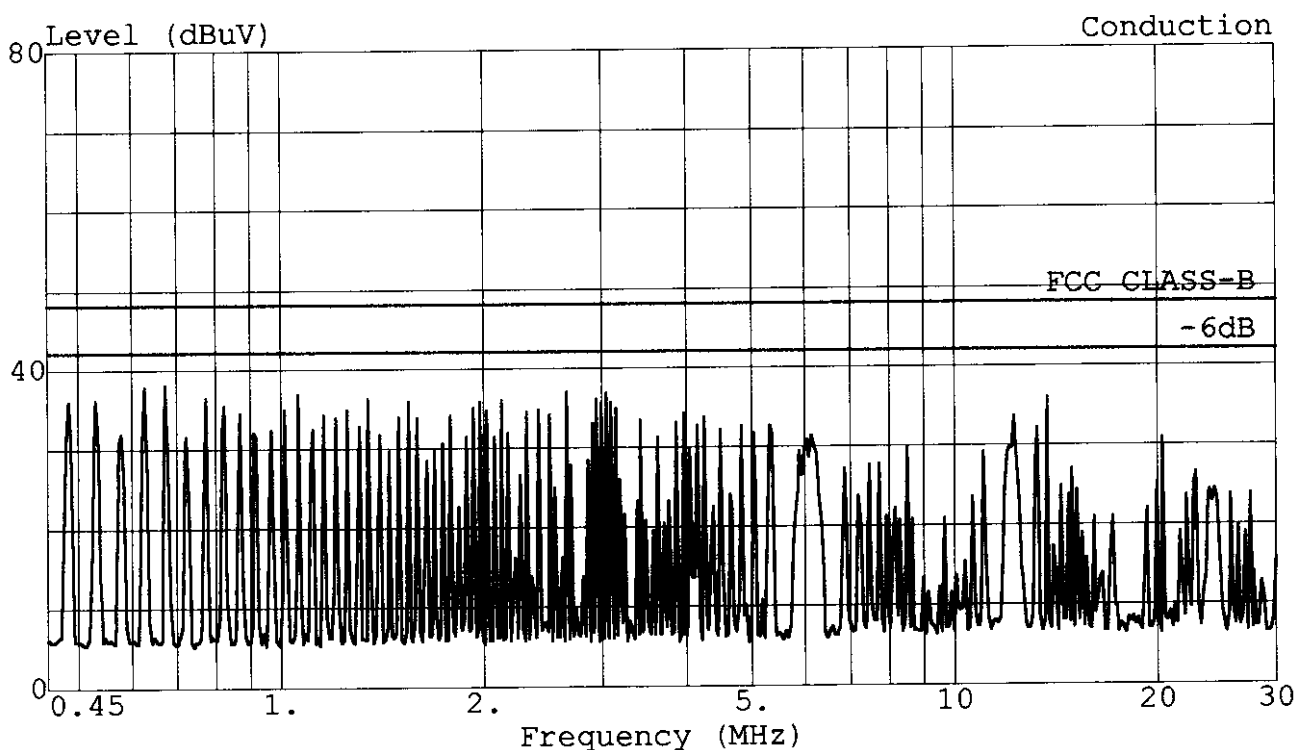

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1024*768;48.4KHz

Ref Trace:

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 95 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:20:42

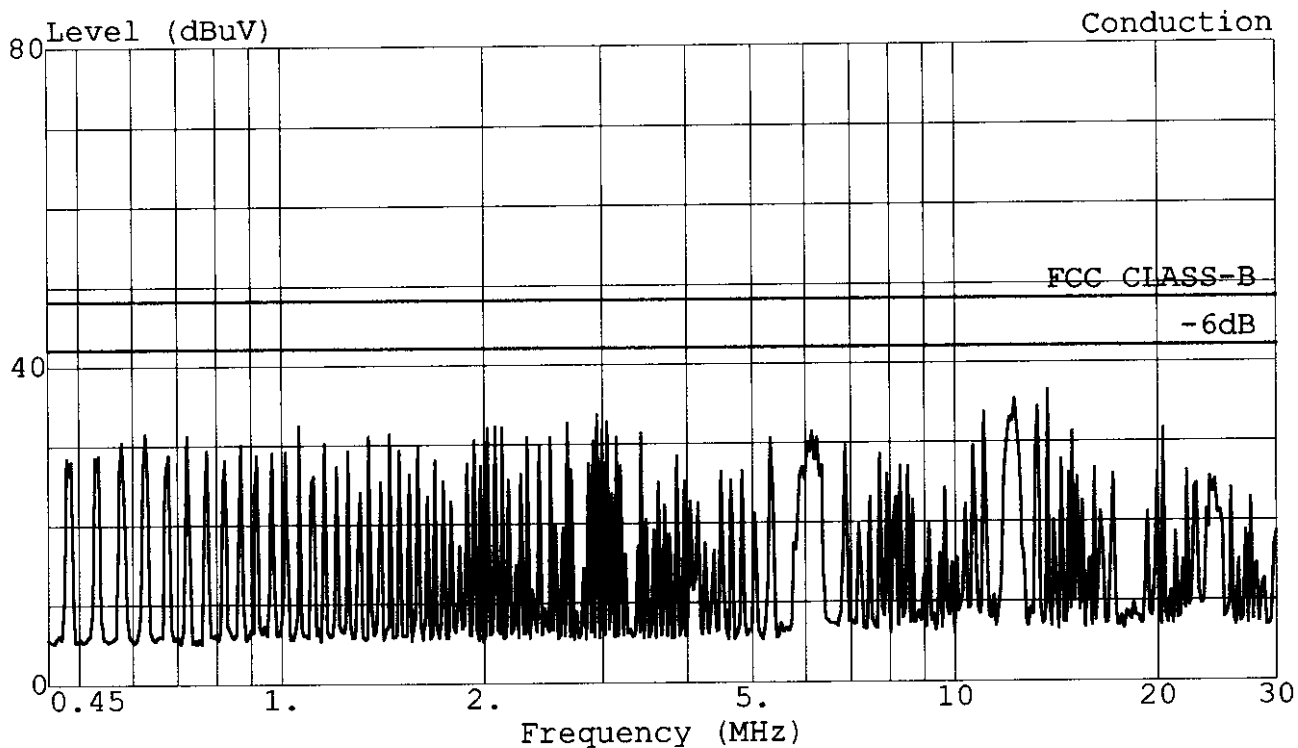

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1024*768;48.4KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 101 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:33:28

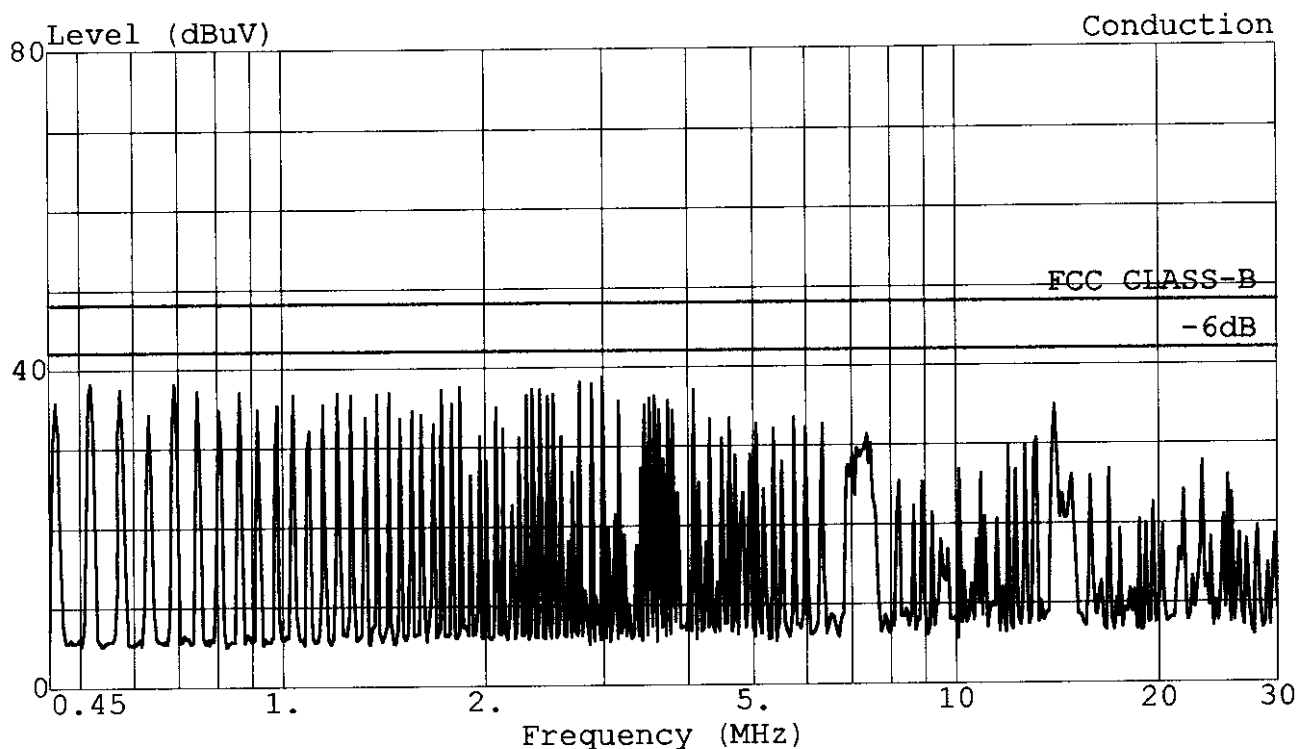

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1024*768;58KHz

Ref Trace:


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 102 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:33:54

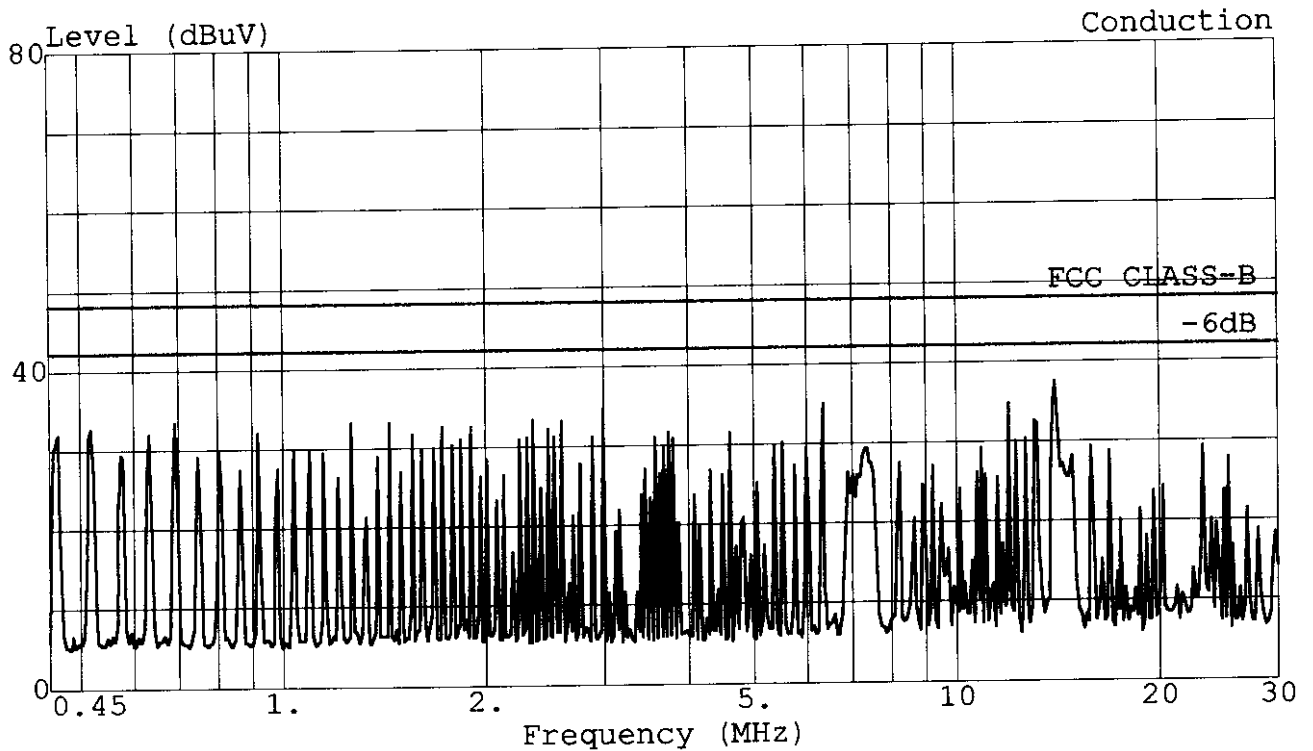

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1024*768;58KHz

Ref Trace:

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 104 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:37:18

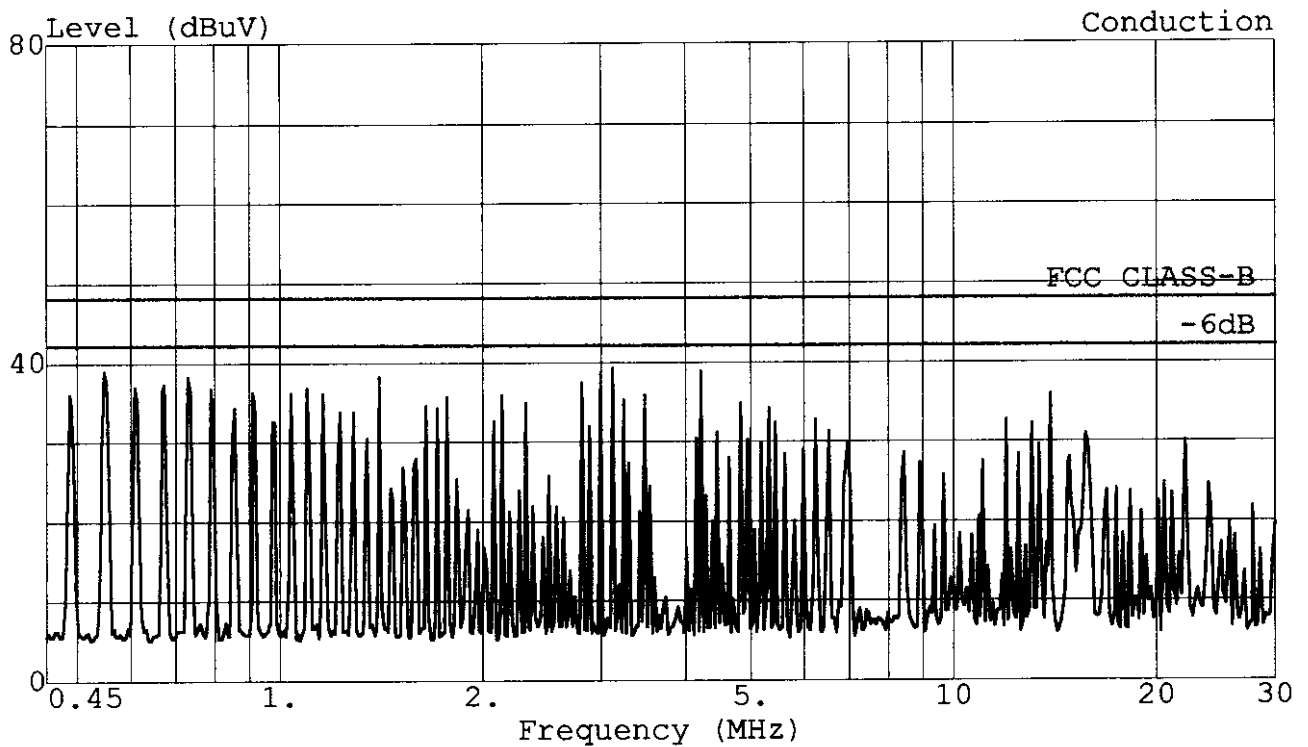

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1280*960;61.6KHz

Ref Trace:

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 103 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:36:47

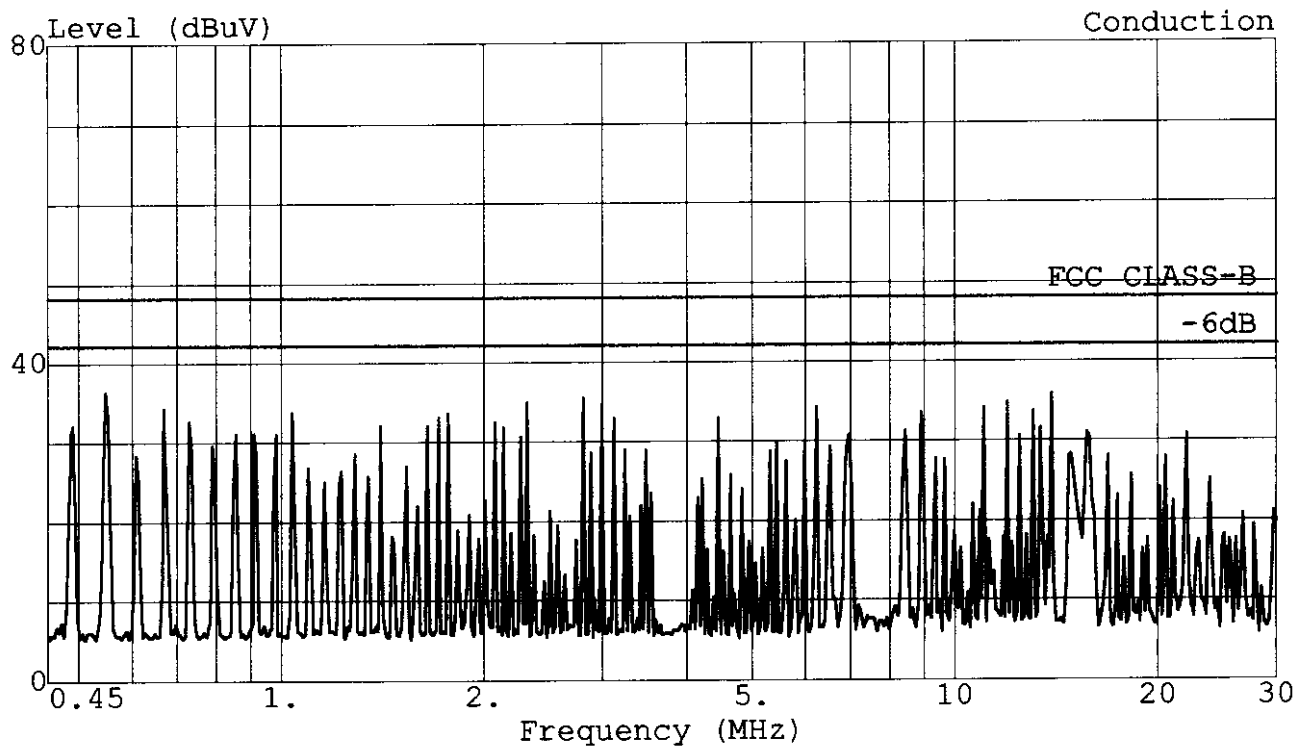

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC) 8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1280*960;61.6KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 110 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:54:59

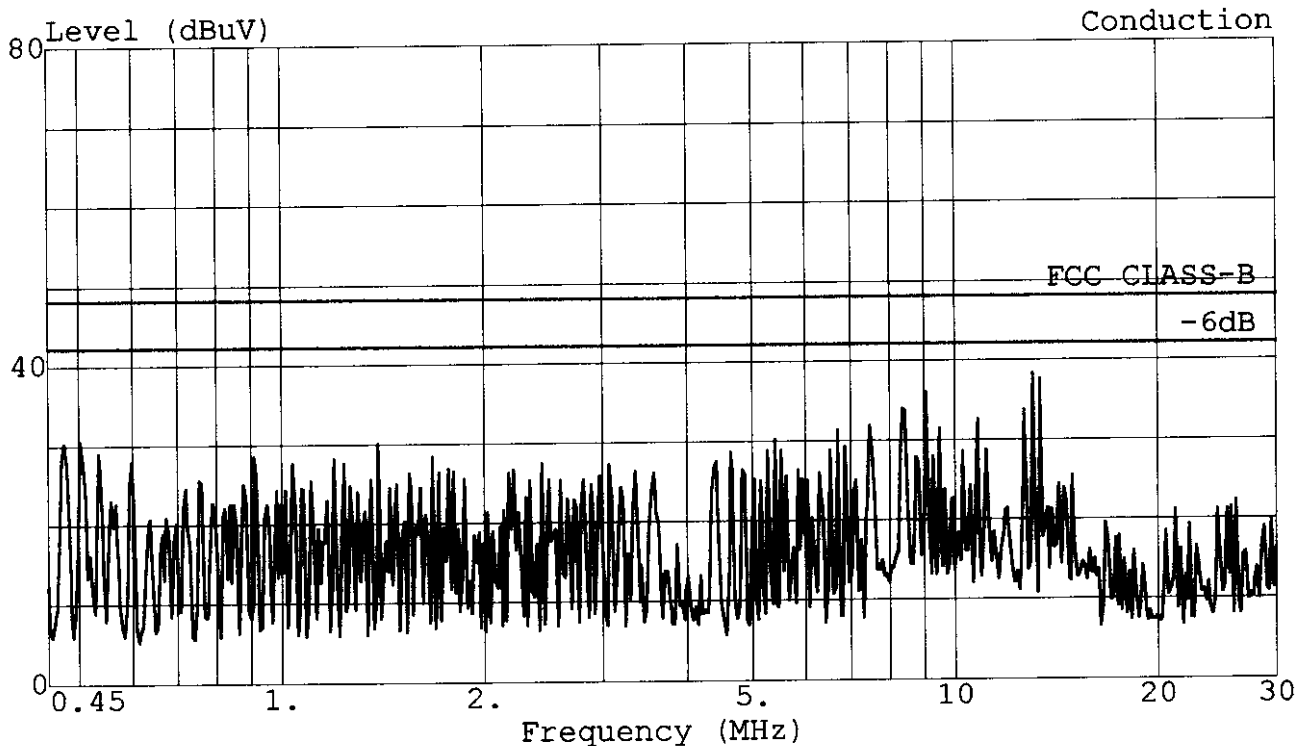

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 640*480;31.5KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 109 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:54:18

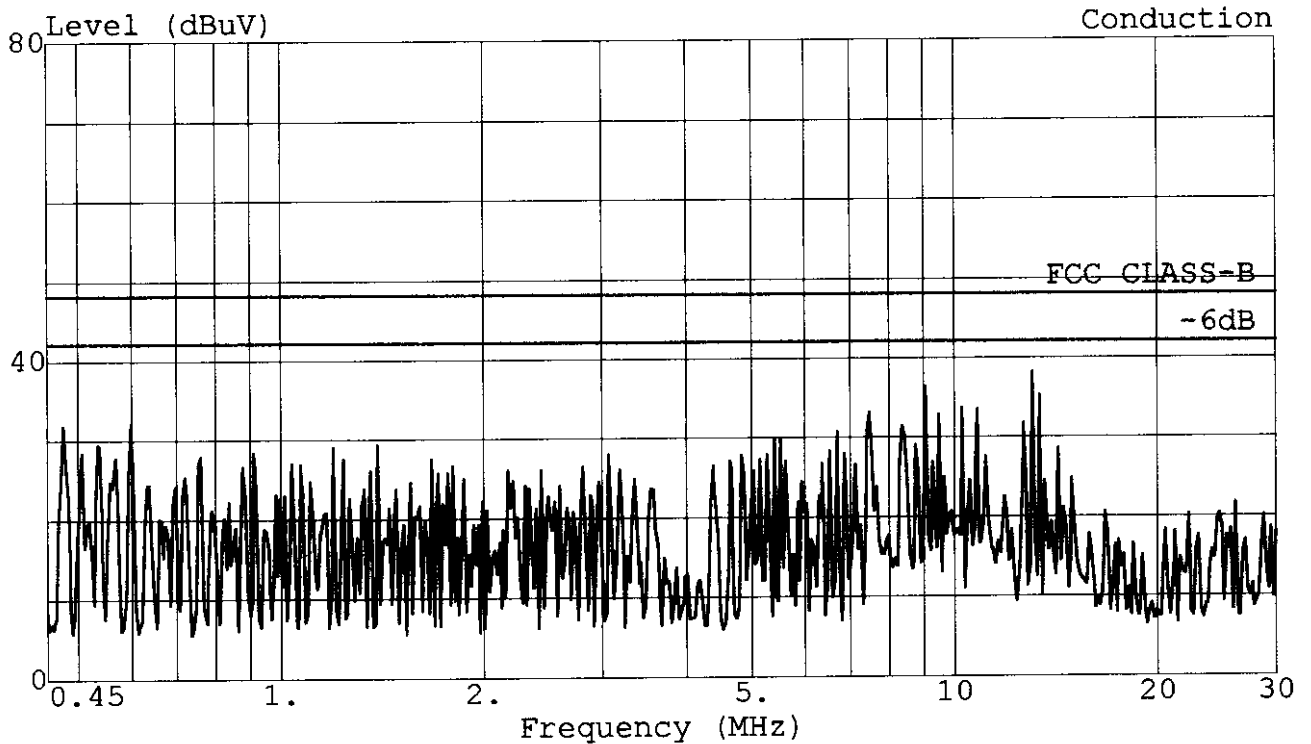

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 640*480;31.5KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 114 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:00:29

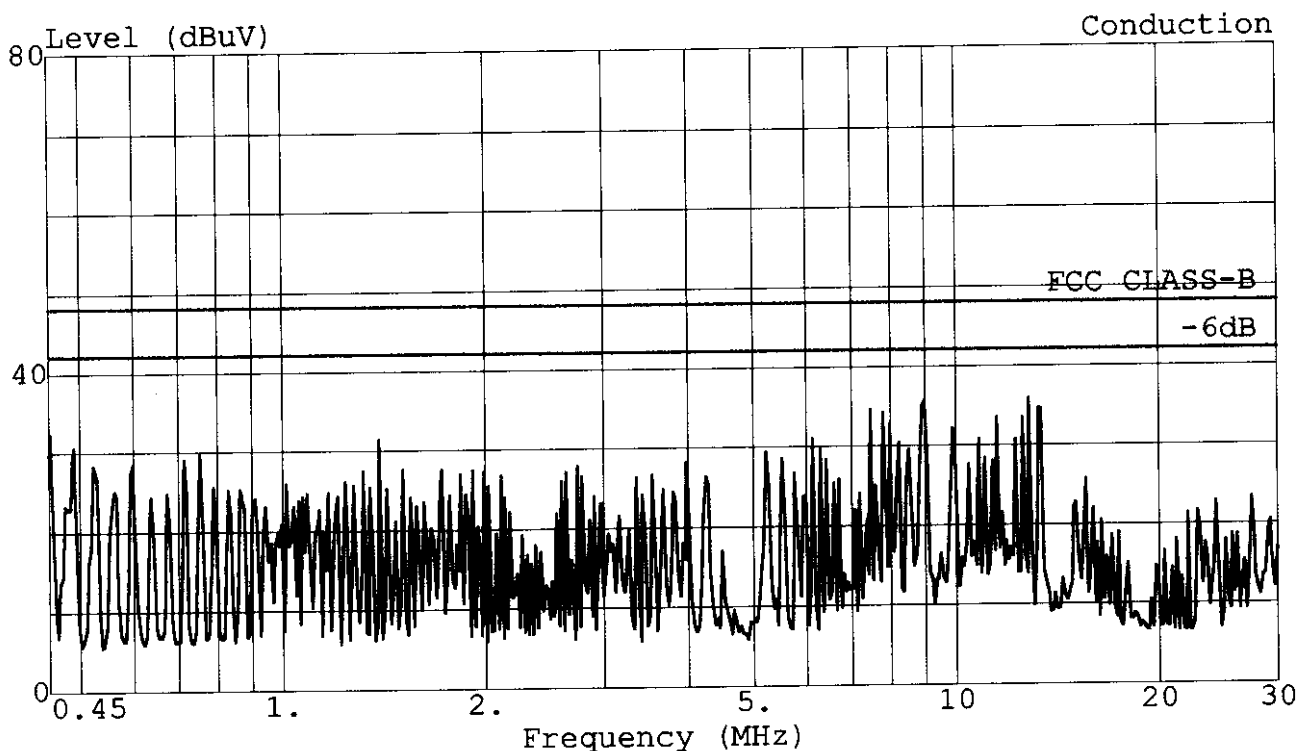

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 640*480;37.9KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 113 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:59:59

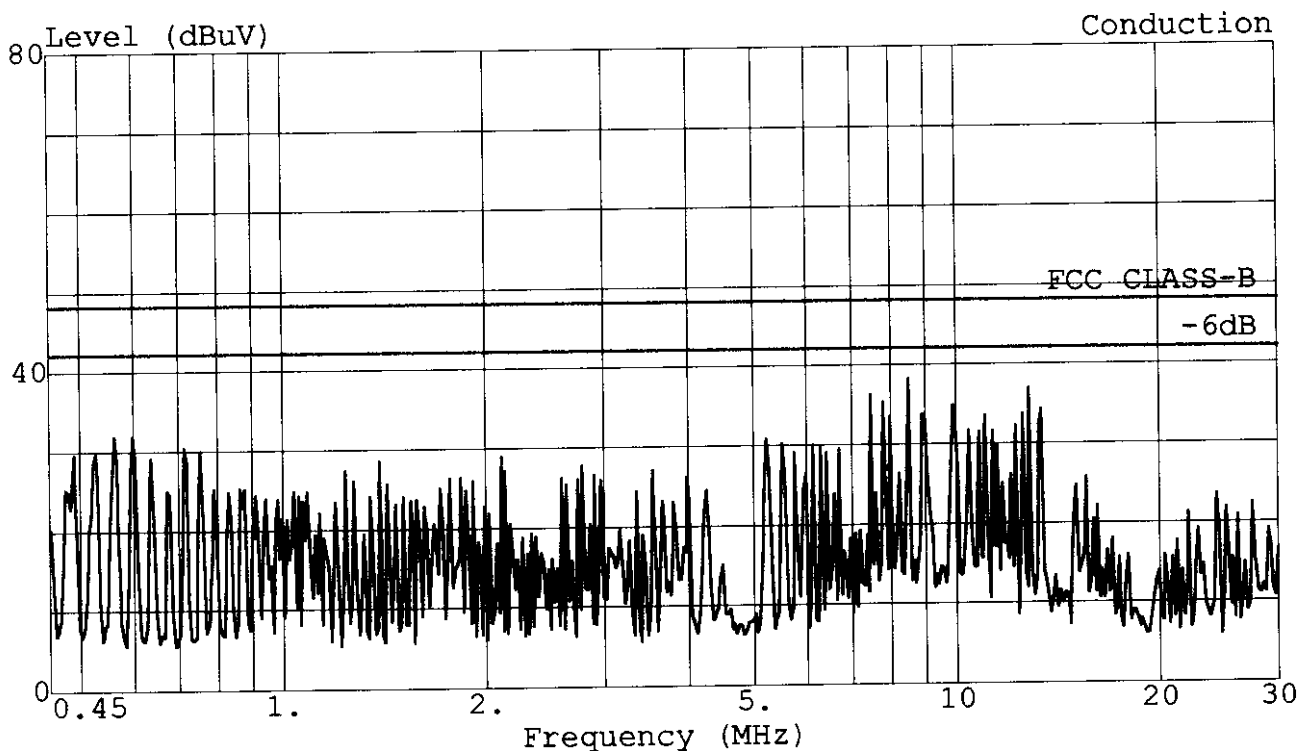

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 640*480;37.9KHz

Ref Trace:

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 115 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:03:27

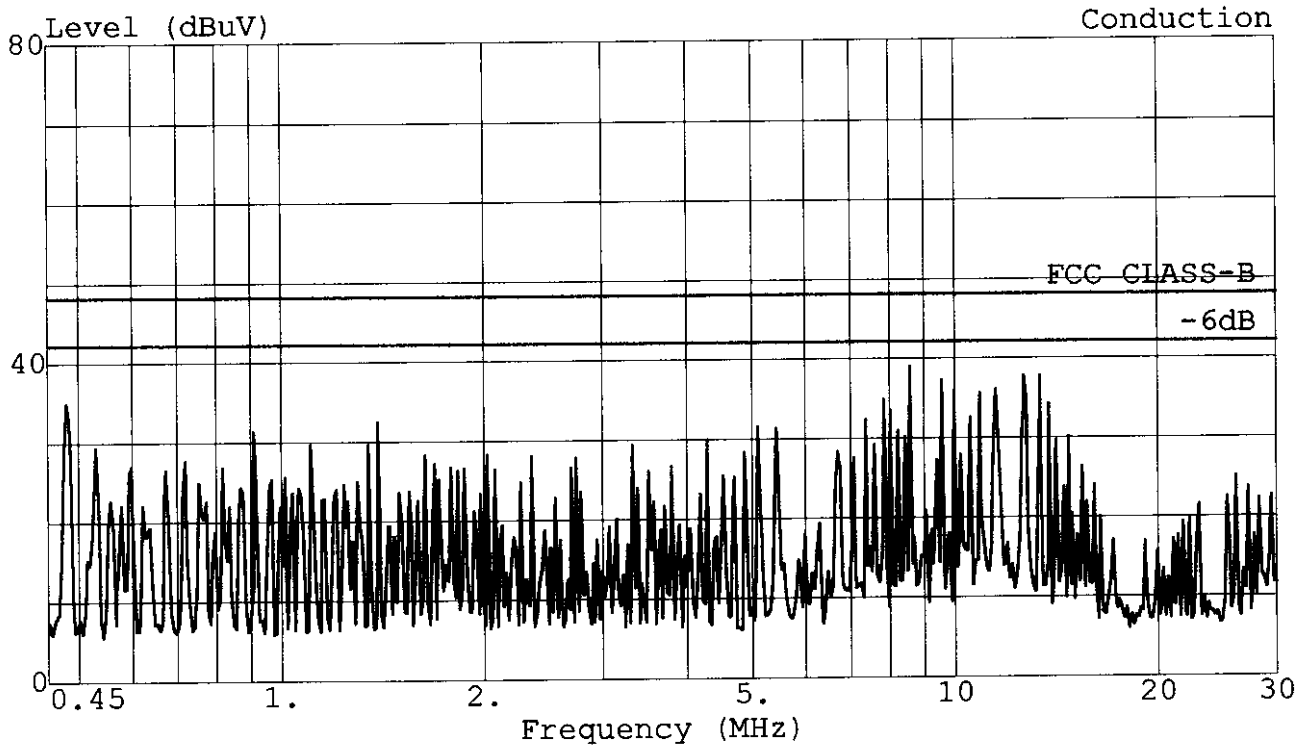

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 800*600;48.1KHz

Ref Trace:

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 116 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:03:53

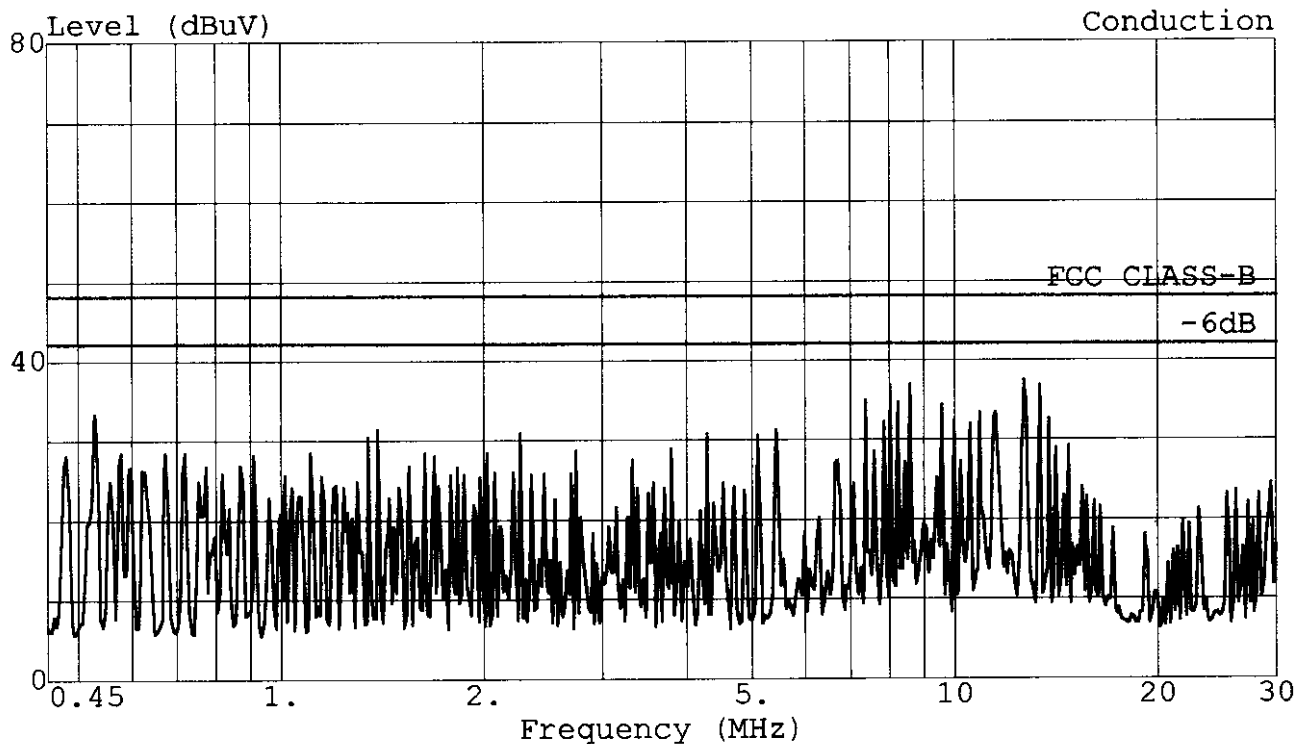

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 800*600;48.1KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 111 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:56:28

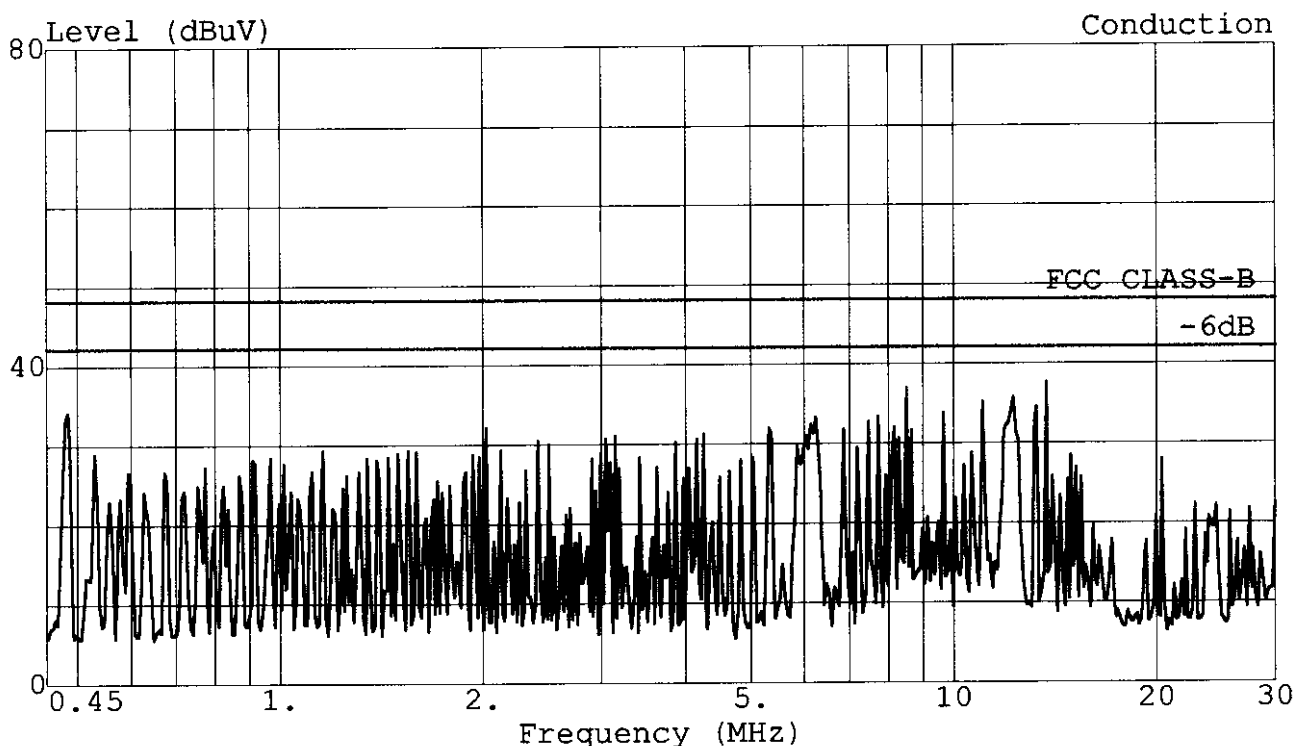

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1024*768;48.4KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 112 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:56:54

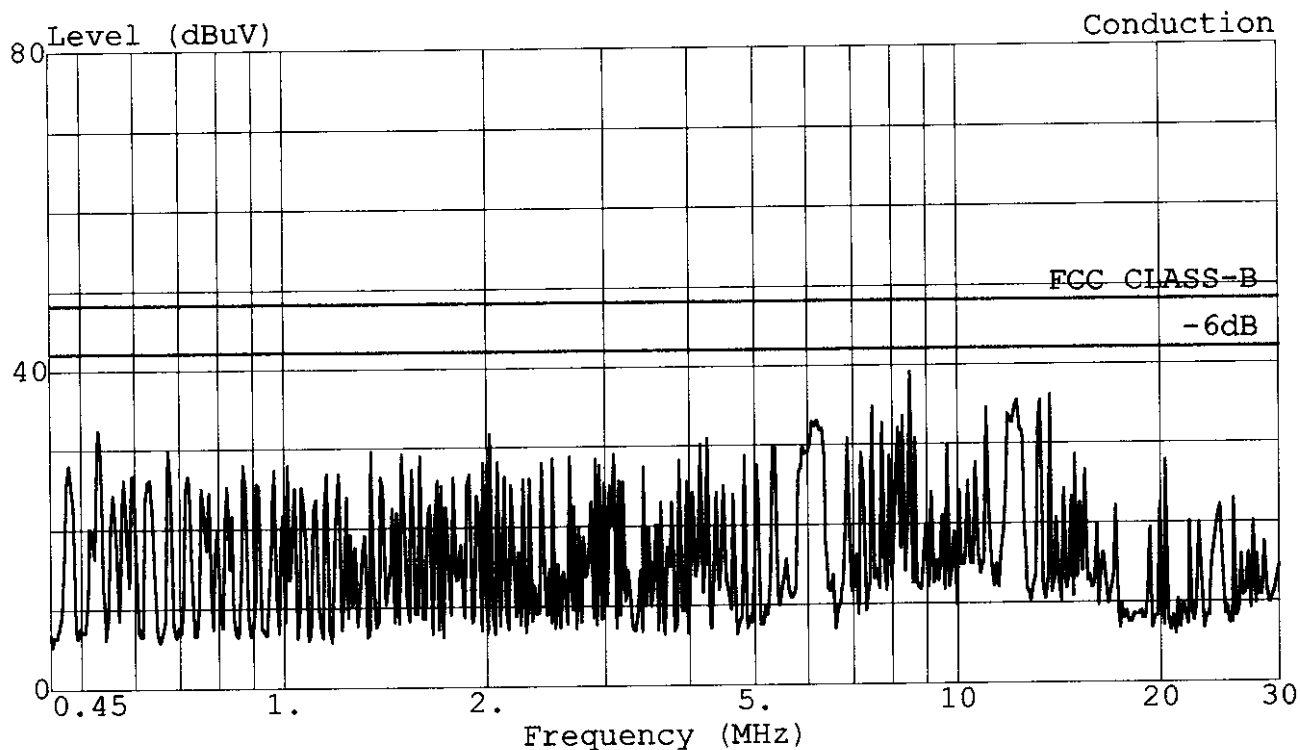

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1024*768;48.4KHz

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 118 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:06:04

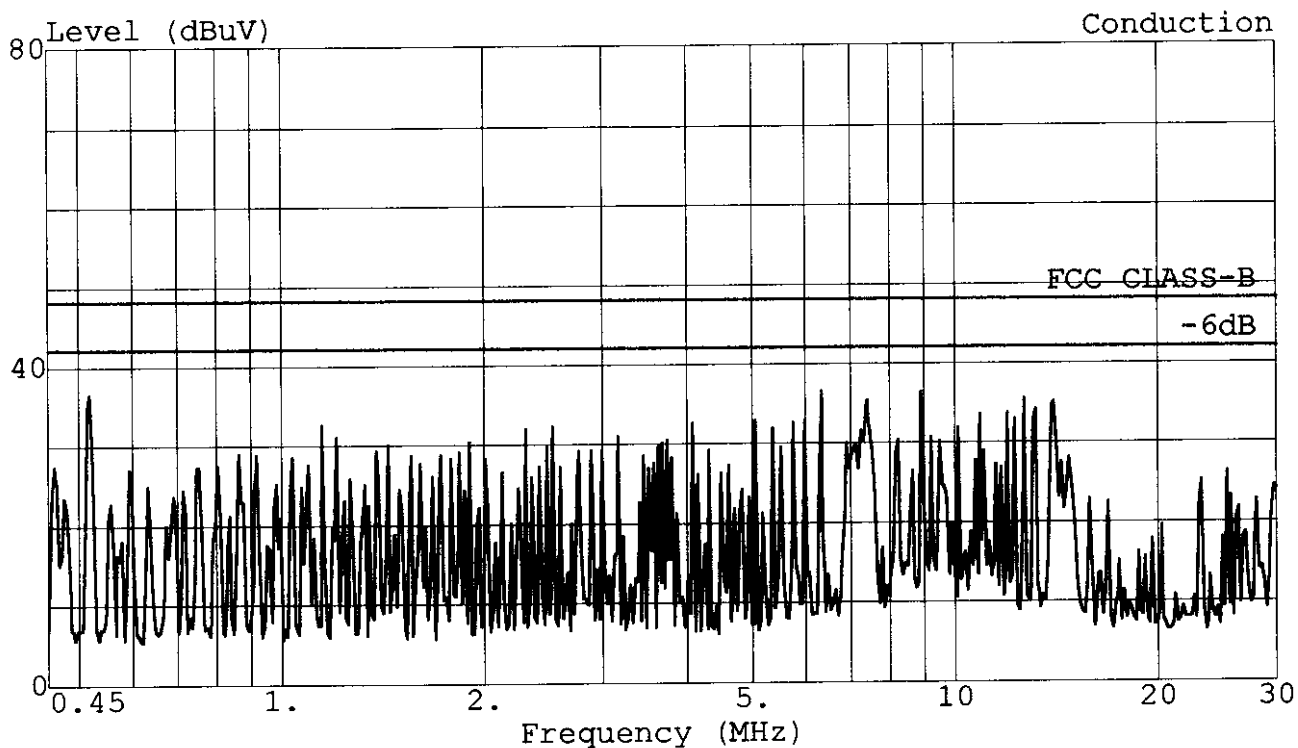

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1024*768;58KHz

Ref Trace:

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 117 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:05:38

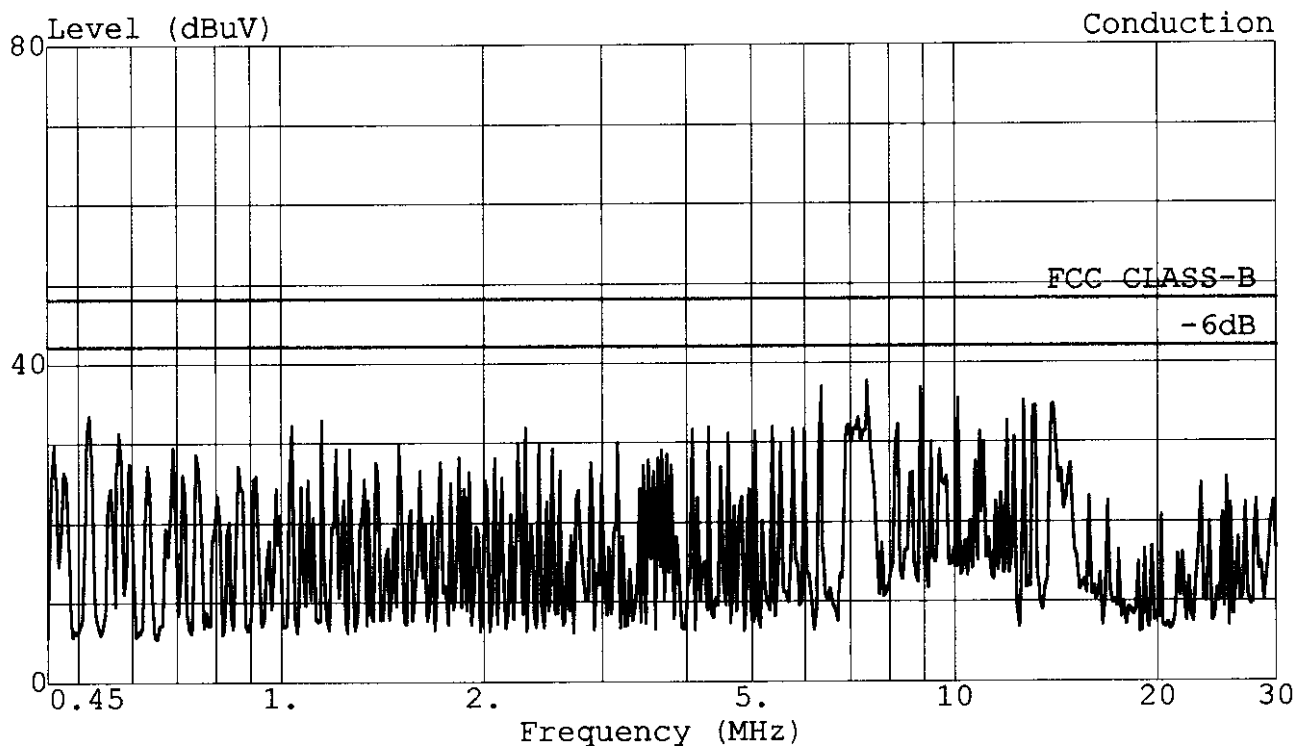

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1024*768;58KHz

Ref Trace:


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 119 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:07:15

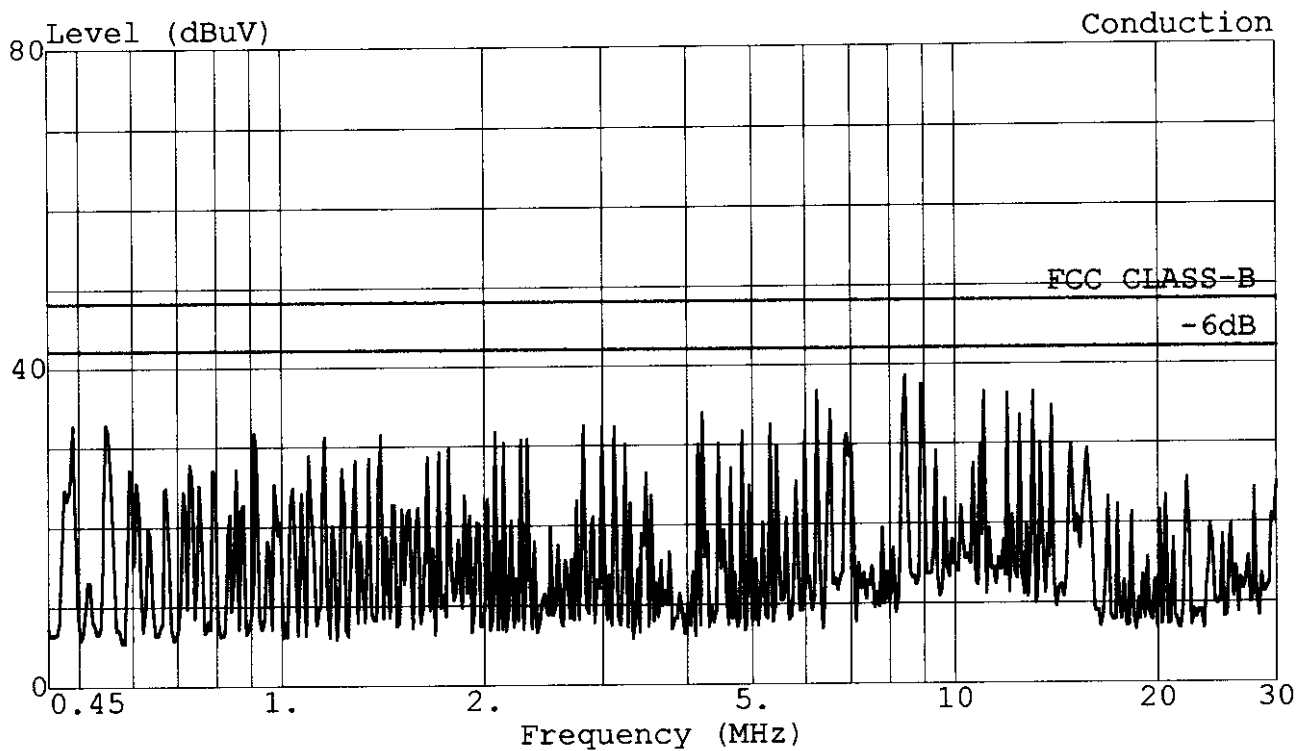

Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1280*960;61.6KHz

Ref Trace:


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 120 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:08:57

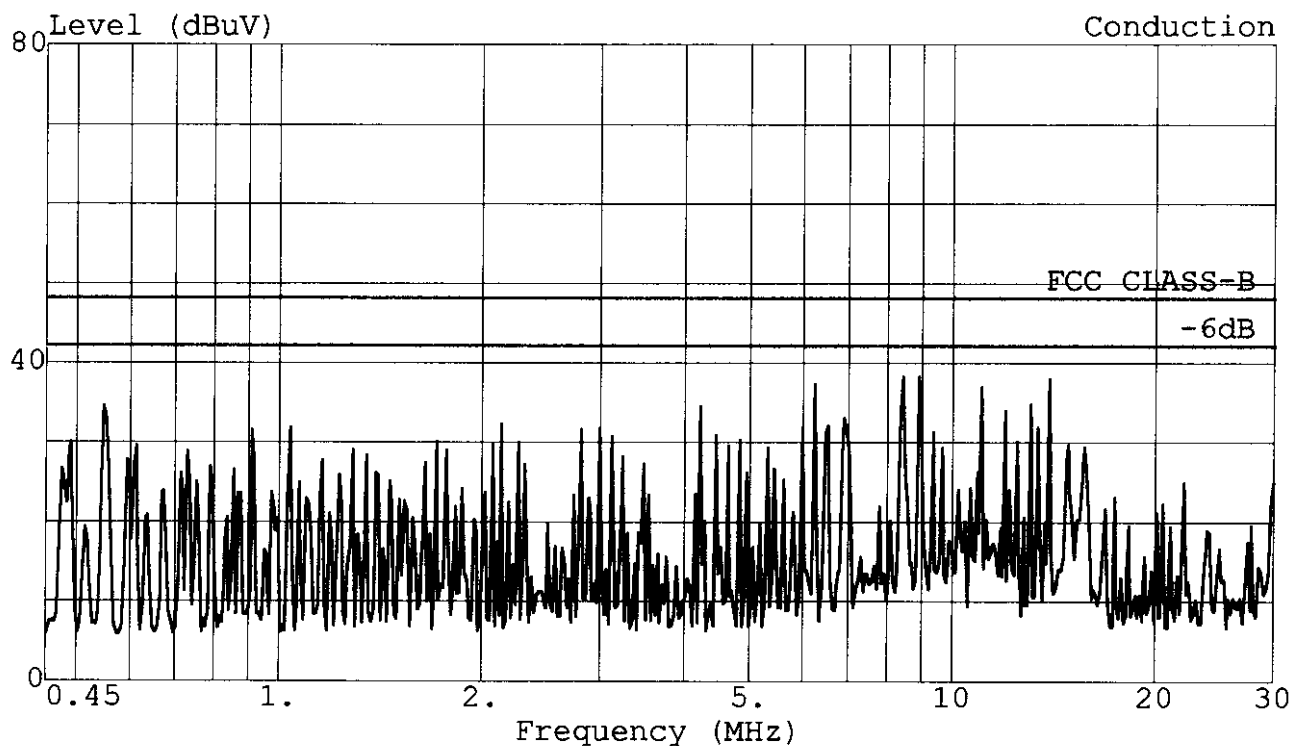

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*


: 1280*960;61.6KHz

APPENDIX II


Radiated Test Data at Anechoic Chamber

(Total Pages : 14)


Page#: 1510 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 17:43:18
 dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

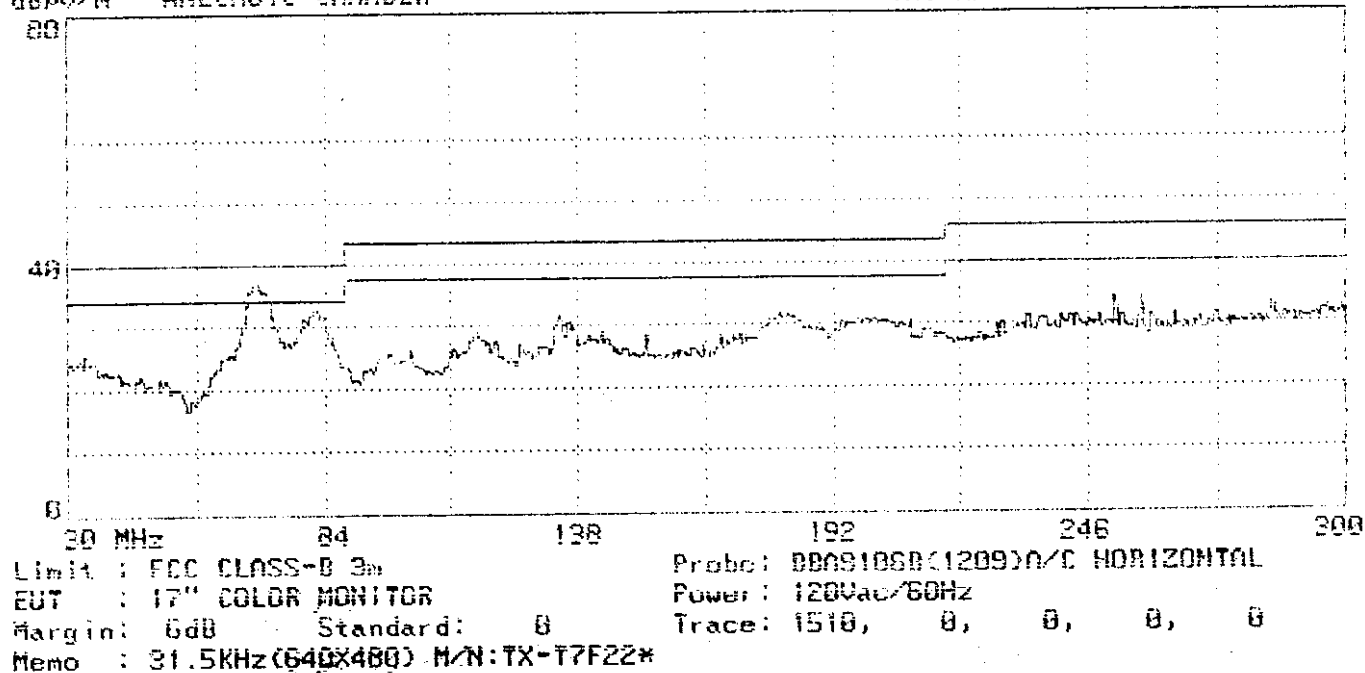


Page#: 1511 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 17:44:55
 dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

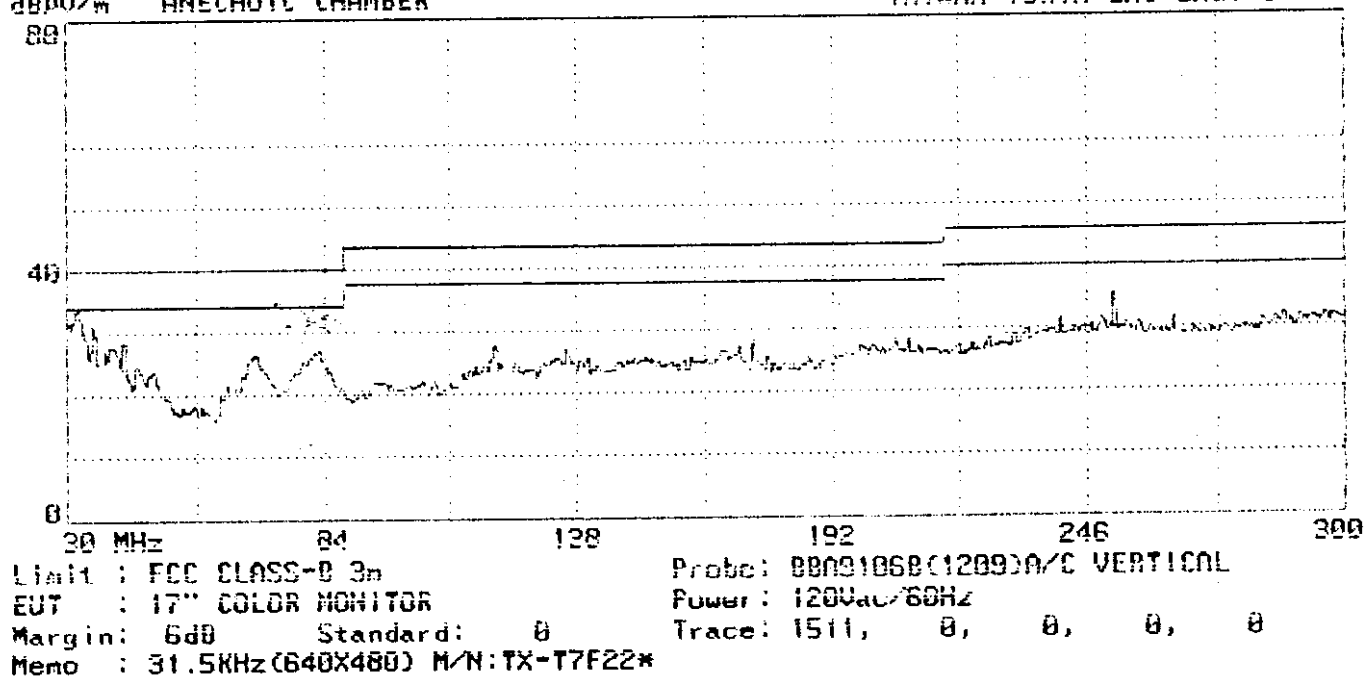


Page#: 1508 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 17:33:33
 dBuV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

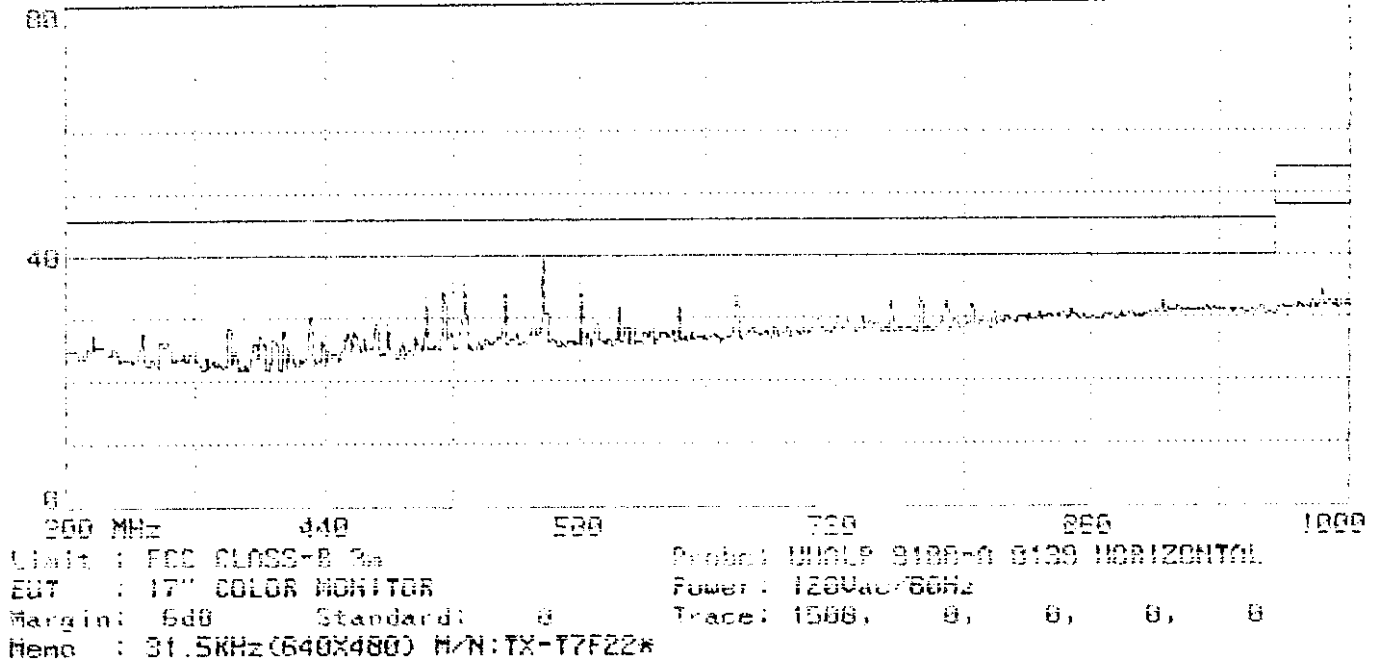


Page#: 1509 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 17:40:16
 dBuV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

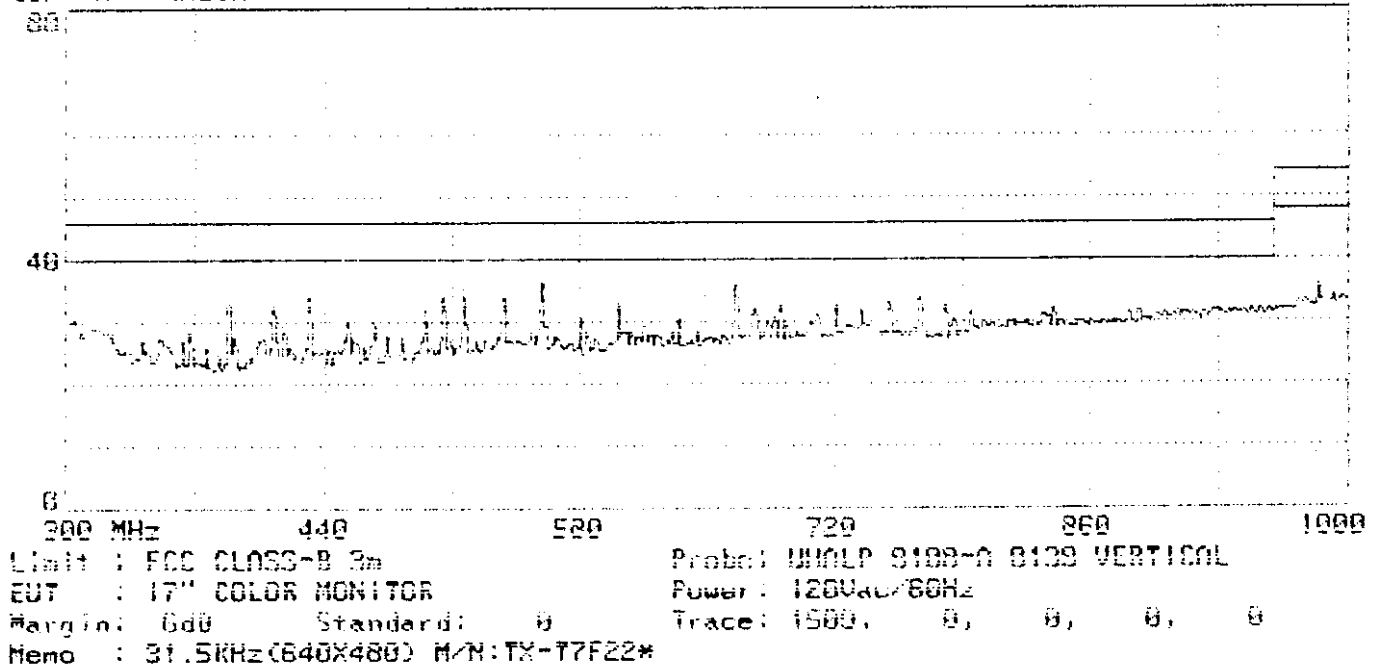


Page#: 1512 SP File#: MATSUSHI.E1 Date: 82-10-1999 Time: 17:51:26
 dB μ V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

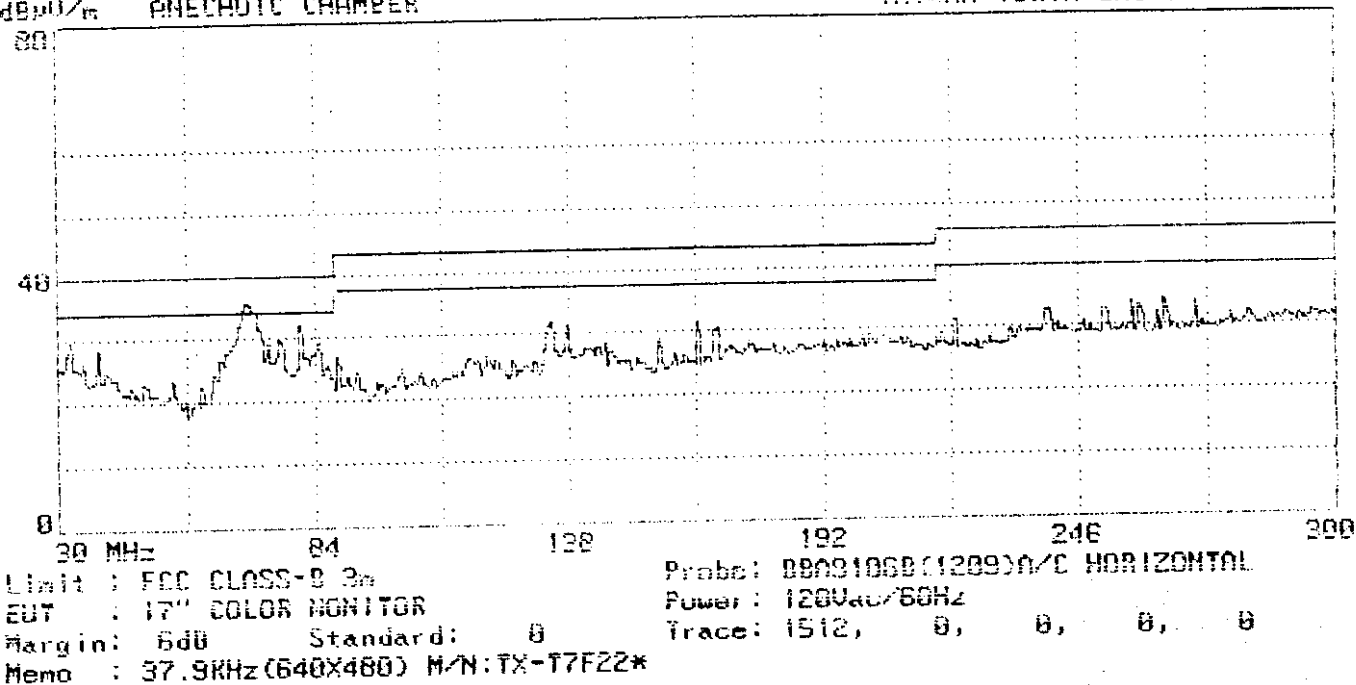


Page#: 1513 SP File#: MATSUSHI.E1 Date: 82-10-1999 Time: 17:53:16
 dB μ V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

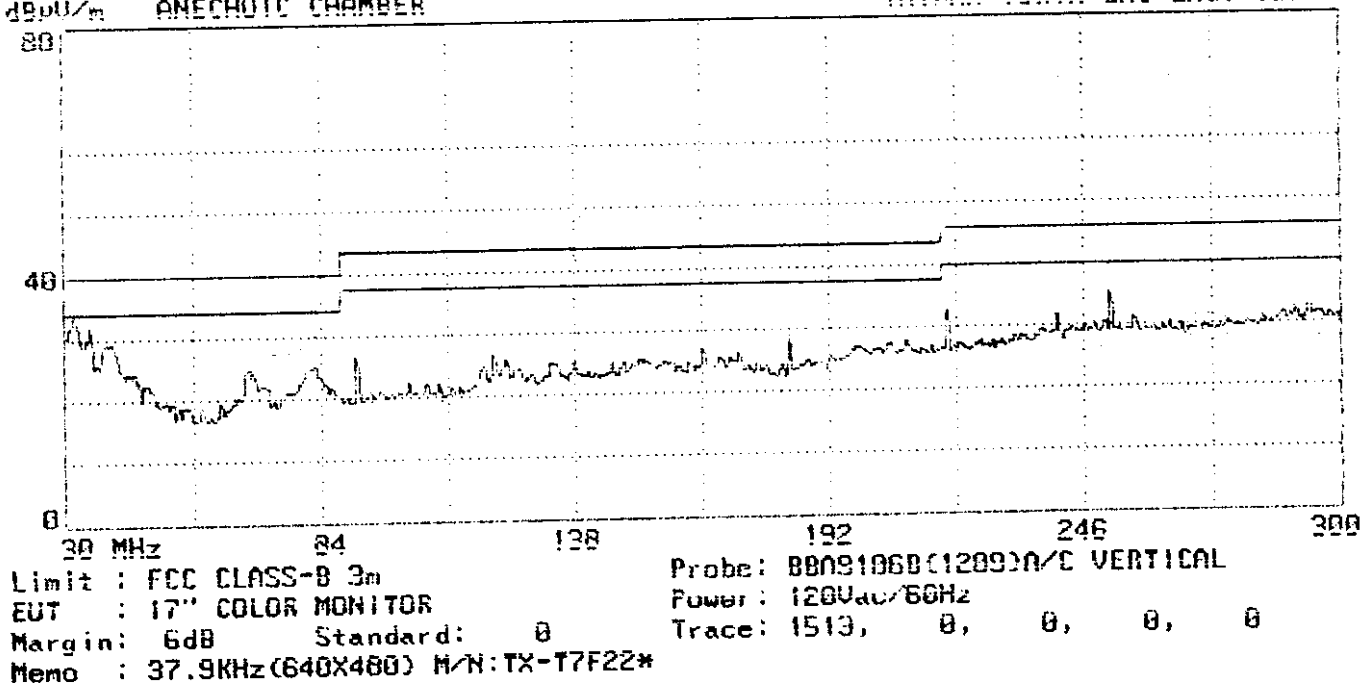


Page#: 1514 SP File#: MATSUSHI.EI Date: 02-10-1999 Time: 17:58:21
 dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

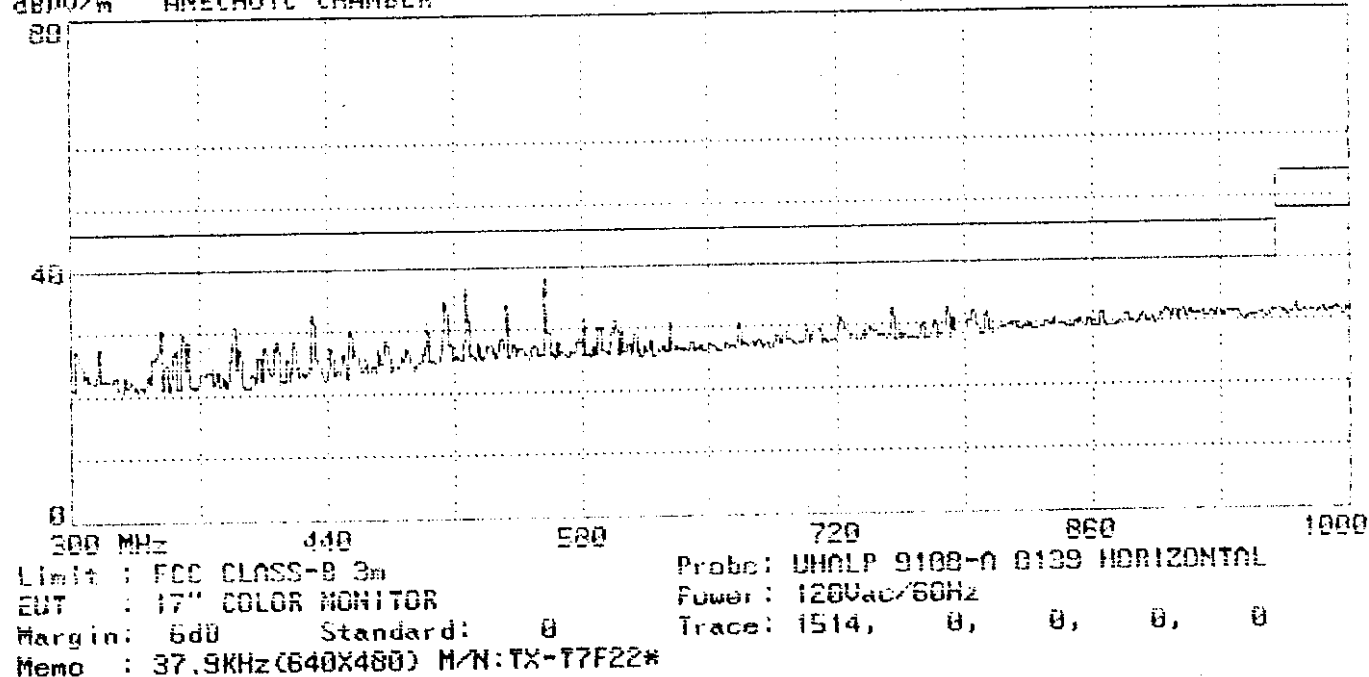

Page#: 1515 SP File#: MATSUSHI.EI Date: 02-10-1999 Time: 17:59:51
 dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

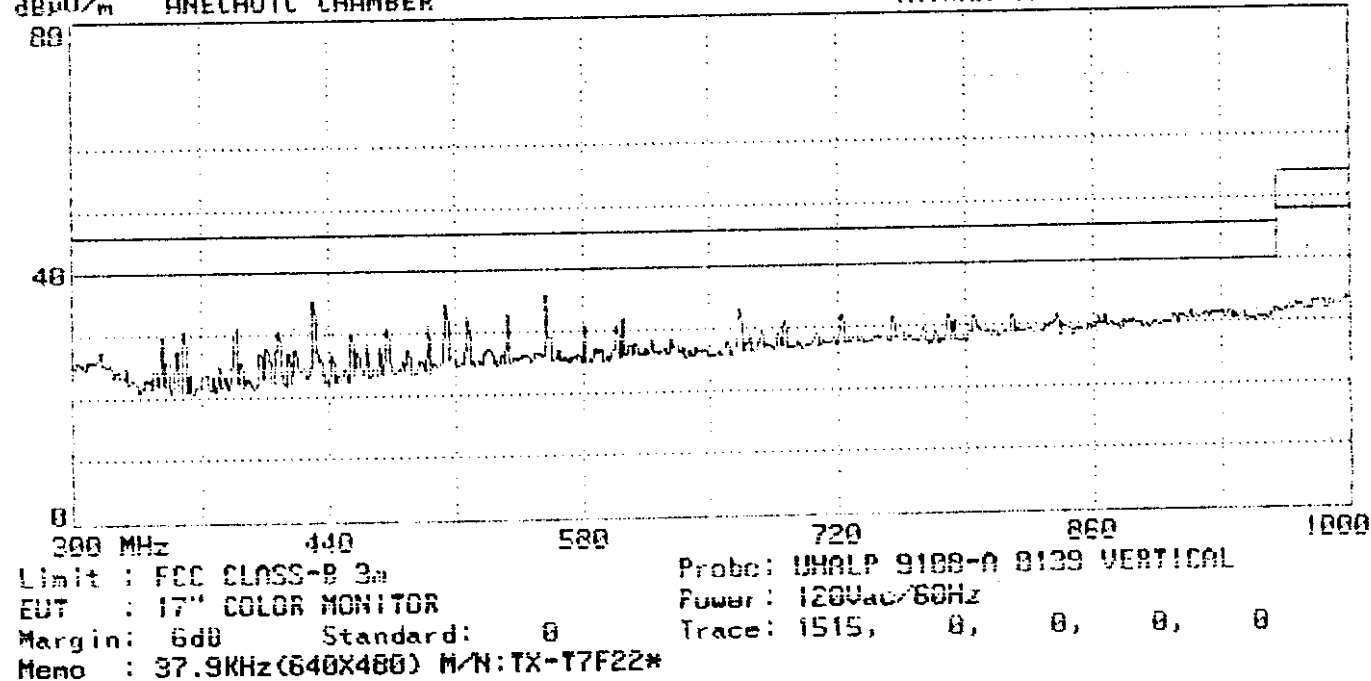


Page#: 1518 SP File#: MATSUSHI.EI Date: 02-10-1999 Time: 18:10:56
 dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

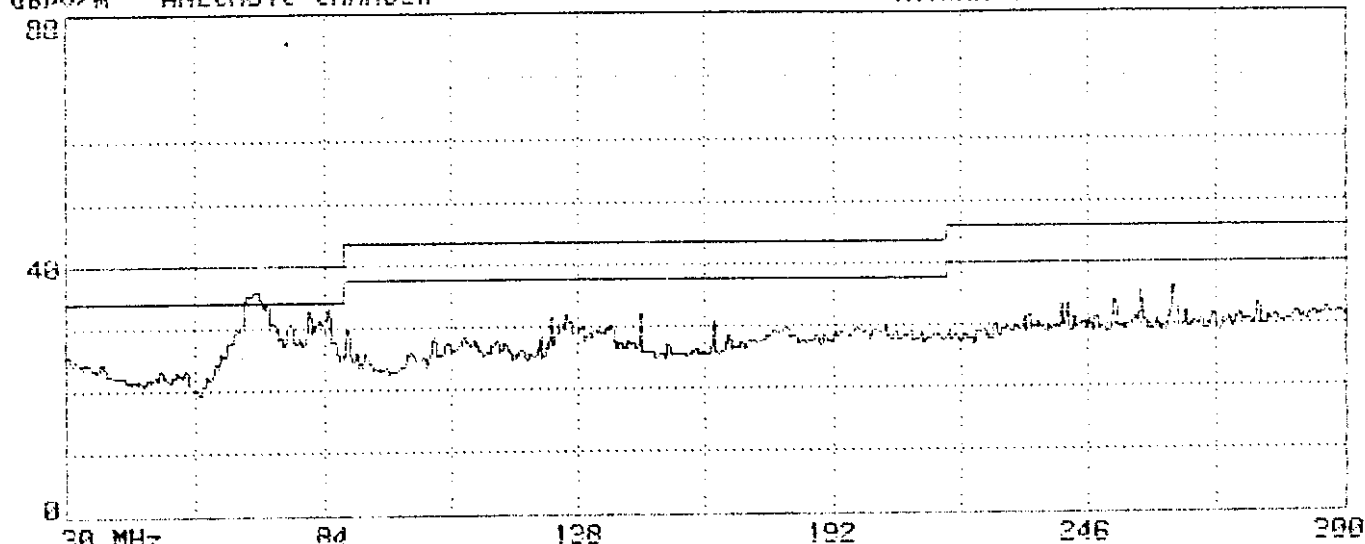

Limit : FCC CLASS-B 3m
 EUT : 17" COLOR MONITOR
 Margin: 6dB Standard: 0
 Memo : 48.1KHz(800X600) M/N:TX-T7F22*
 Probe: BB091058(1209)O/C HORIZONTAL
 Power: 120Vac/60Hz
 Trace: 1518, 0, 0, 0, 0


Page#: 1519 SP File#: MATSUSHI.EI Date: 02-10-1999 Time: 18:12:33
 dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

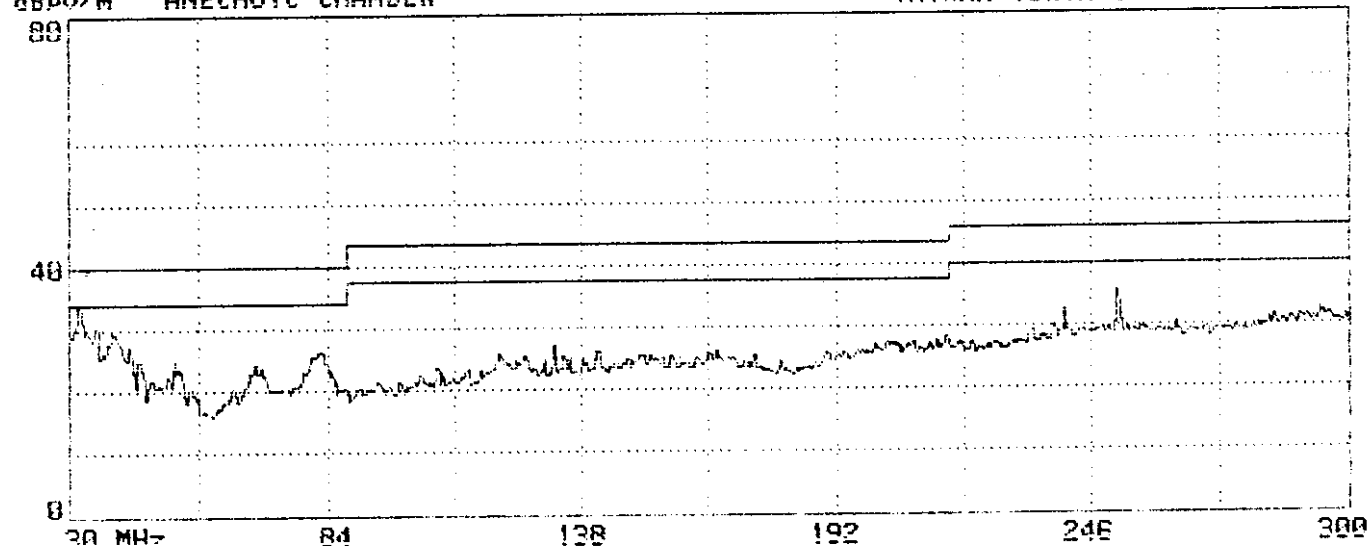

Limit : FCC CLASS-B 3m
 EUT : 17" COLOR MONITOR
 Margin: 6dB Standard: 0
 Memo : 48.1KHz(800X600) M/N:TX-T7F22*
 Probe: BB091058(1209)O/C VERTICAL
 Power: 120Vac/60Hz
 Trace: 1519, 0, 0, 0, 0


Page#: 1516 SP File#: MATSUSHI.E1
dBuV/m ANECHOIC CHAMBER

Date: 02-18-1999 Time: 18:04:49
TAIWAN TOKIN EMC ENG. CORP.

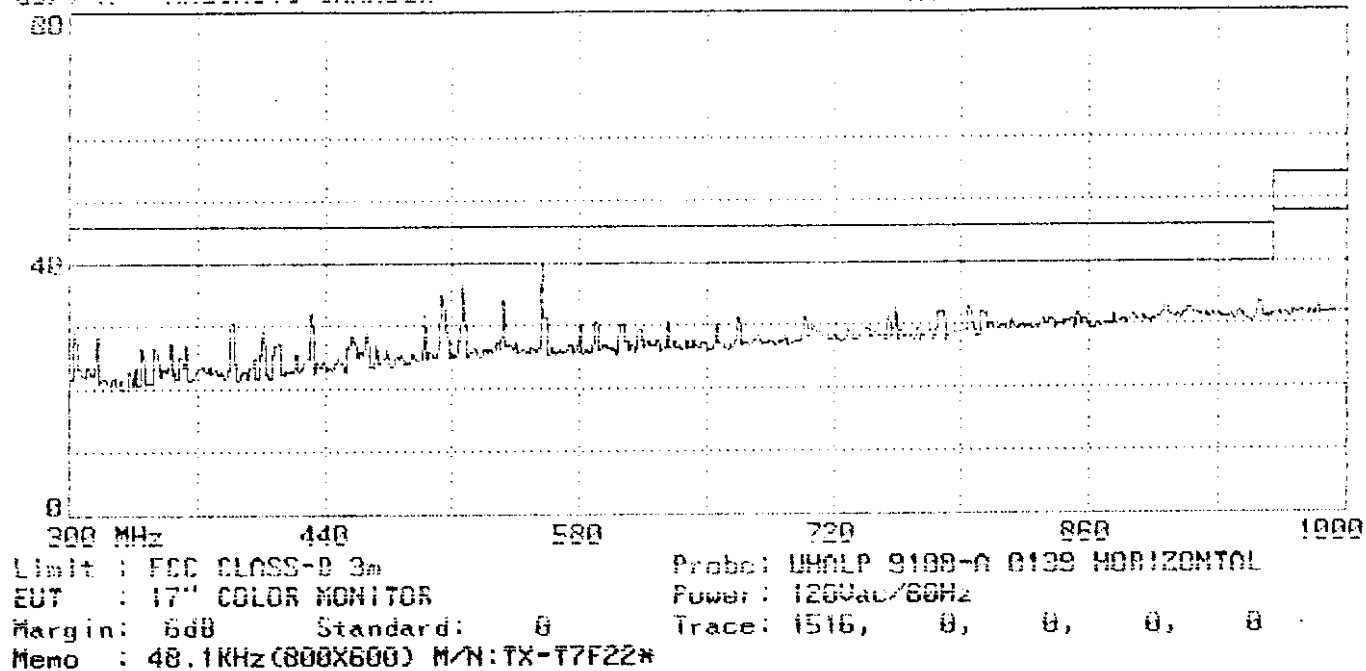


Page#: 1517 SP File#: MATSUSHI.E1
dBuV/m ANECHOIC CHAMBER

Date: 02-18-1999 Time: 18:06:27
TAIWAN TOKIN EMC ENG. CORP.

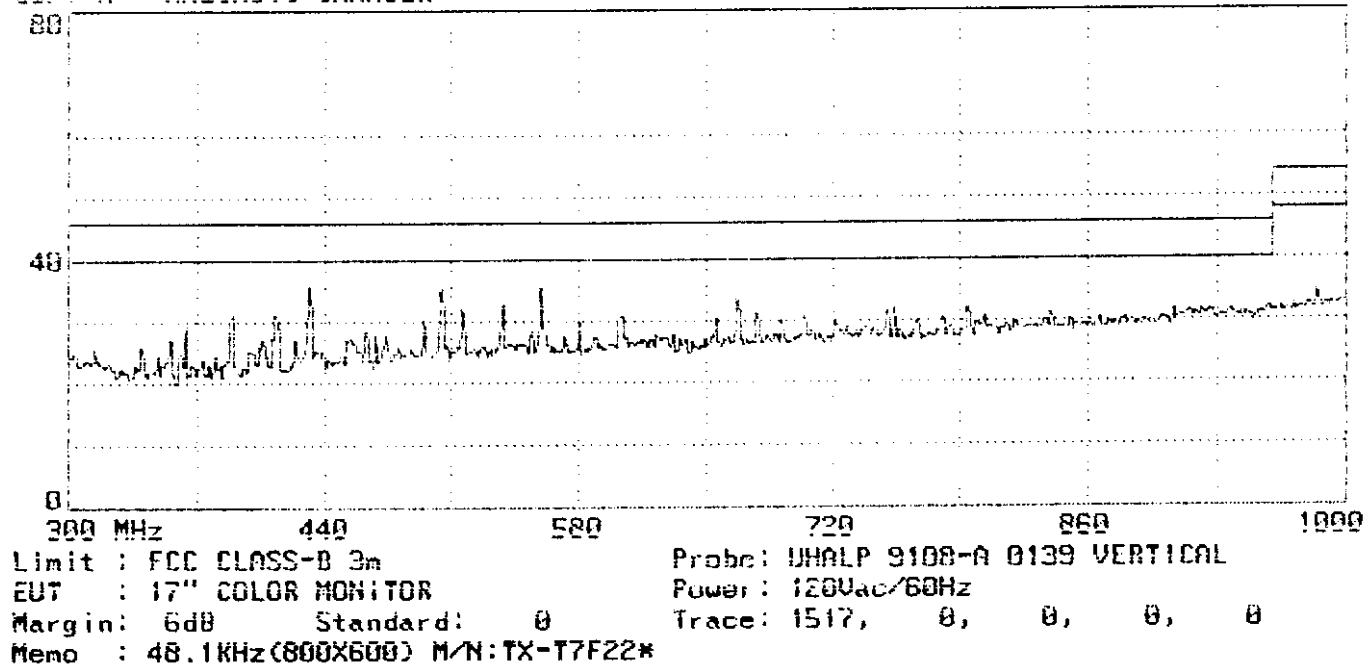


Page#: 1520 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 18:21:28
 dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

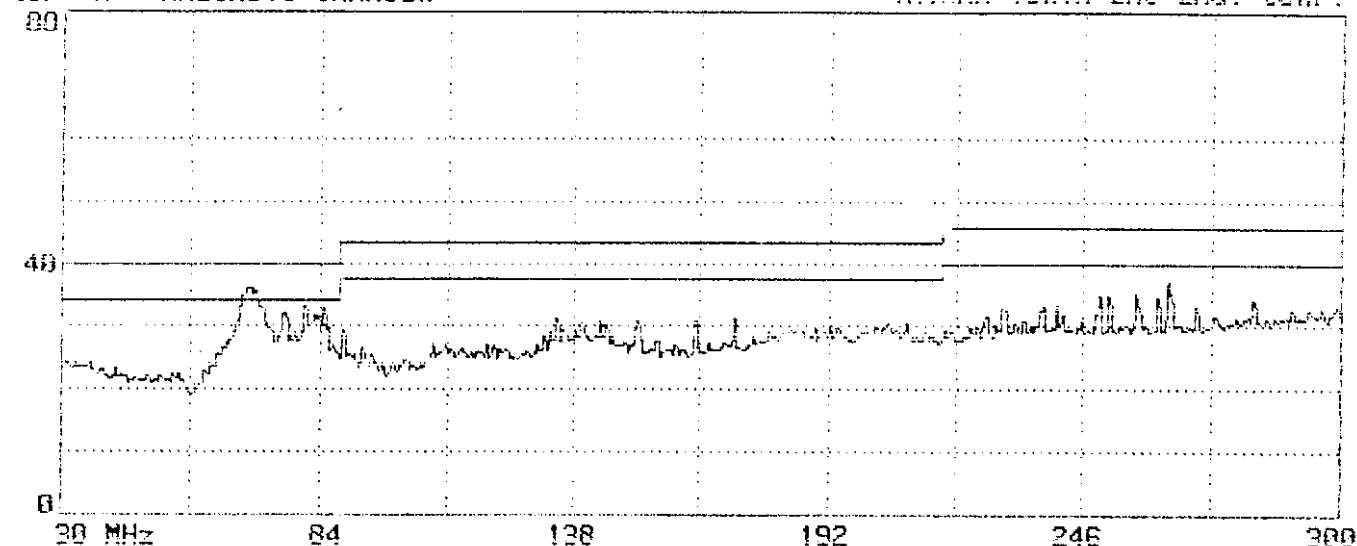


Limit : FCC CLASS-B 3m Probe: BBA9106B(1209)A/C HORIZONTAL
 EUT : 17" COLOR MONITOR Power: 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 1520, 0, 0, 0, 0
 Memo : 48.4KHz(1024X768) M/N:TX-T7F22*

Page#: 1521 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 18:23:16
 dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

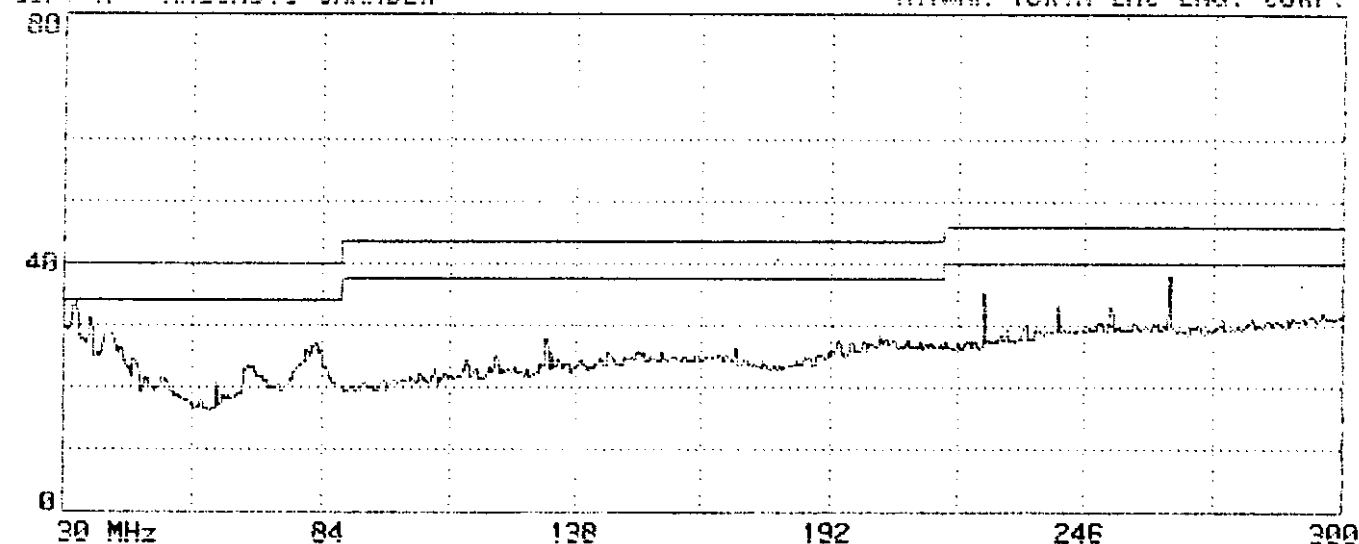


Limit : FCC CLASS-B 3m Probe: BBA9106B(1209)A/C VERTICAL
 EUT : 17" COLOR MONITOR Power: 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 1521, 0, 0, 0, 0
 Memo : 48.4KHz(1024X768) M/N:TX-T7F22*


Page#: 1522 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 18:29:03
 dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

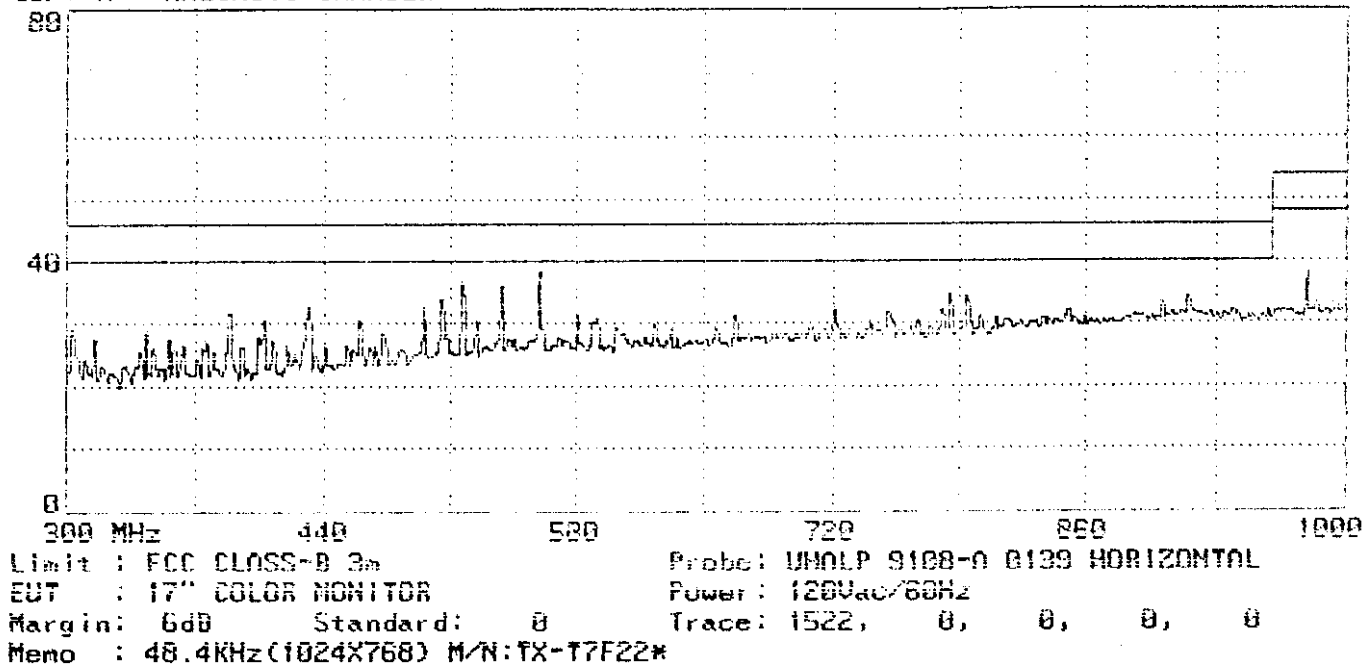


Page#: 1523 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 18:31:52
 dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

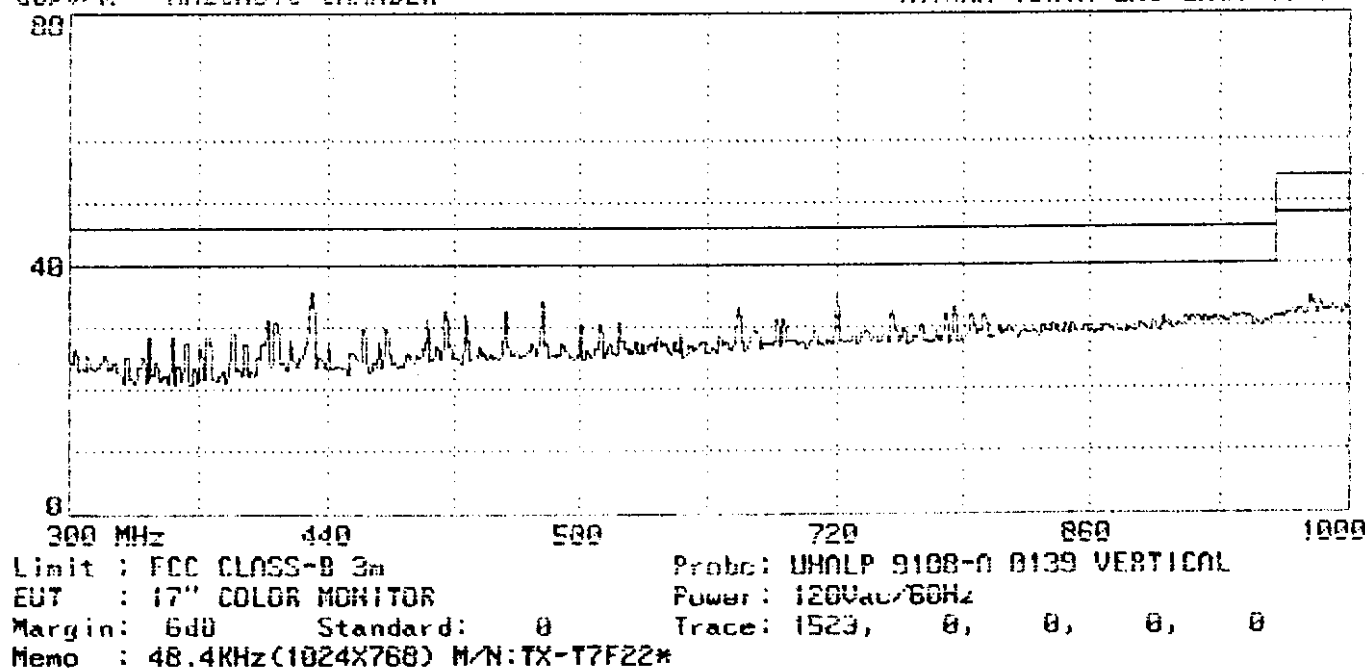


Page#: 1526 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 18:55:32
 dB μ V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

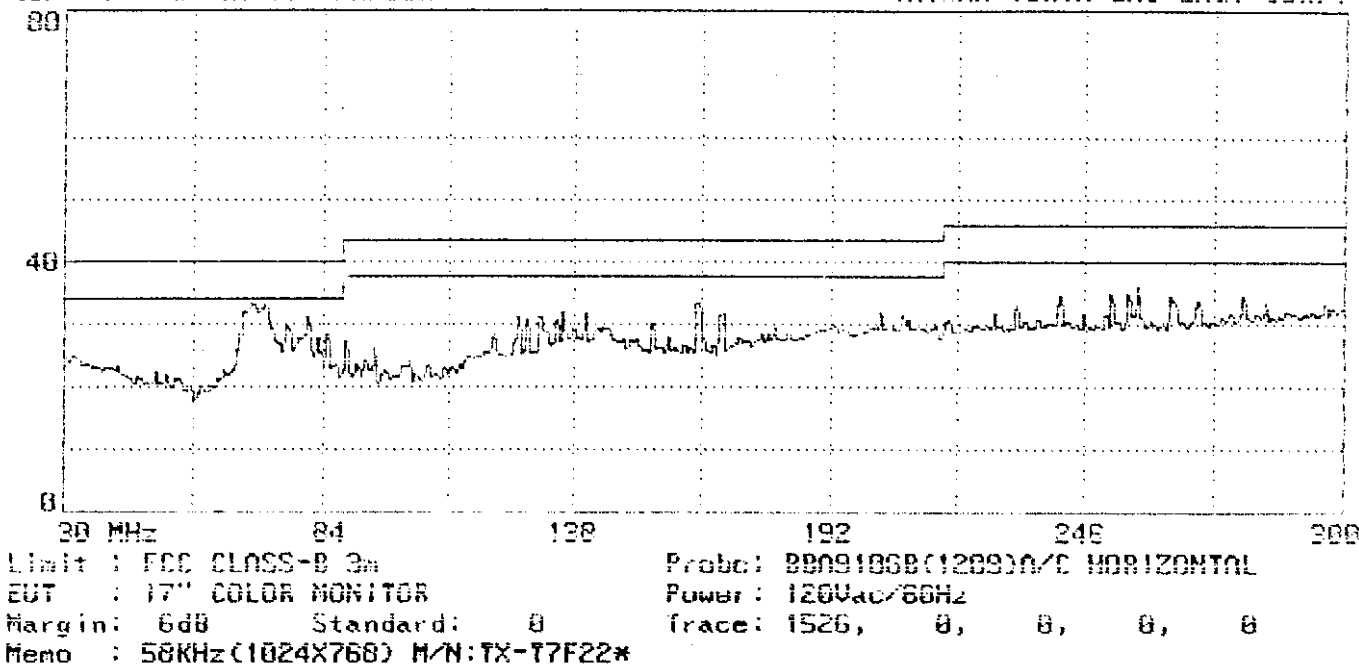


Page#: 1527 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 18:57:41
 dB μ V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

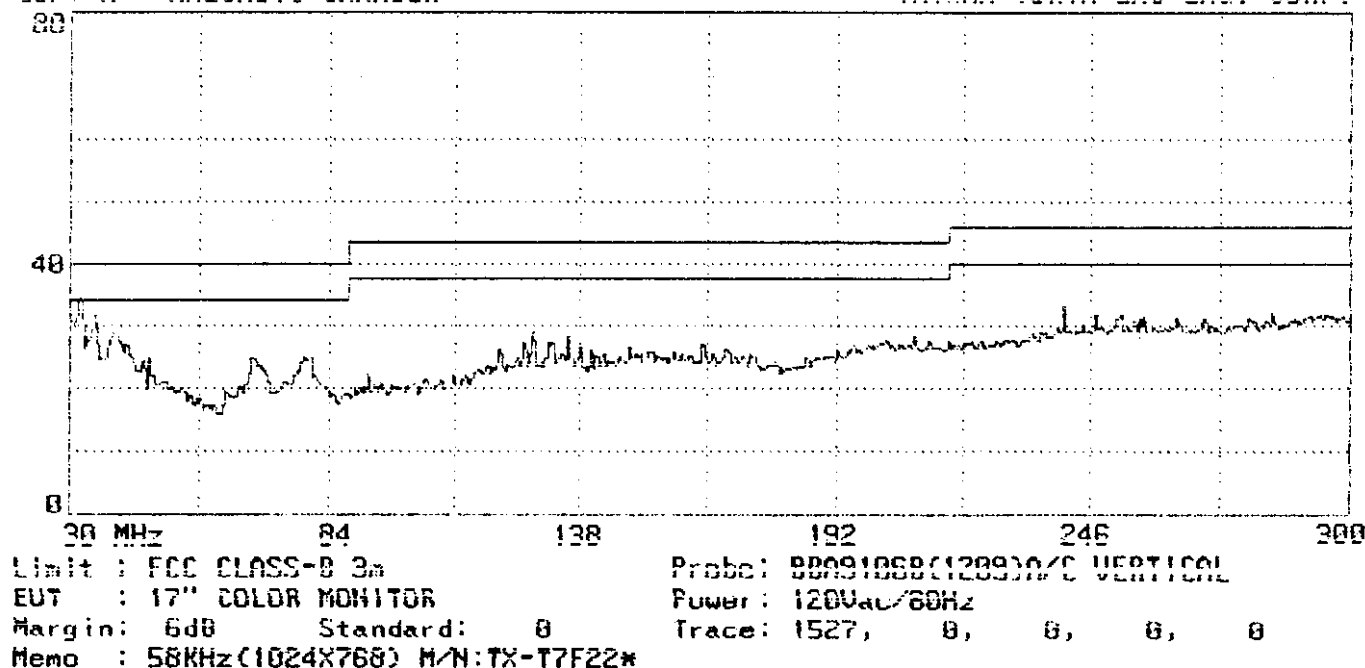


Page#: 1524 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 18:40:57
 dBuV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

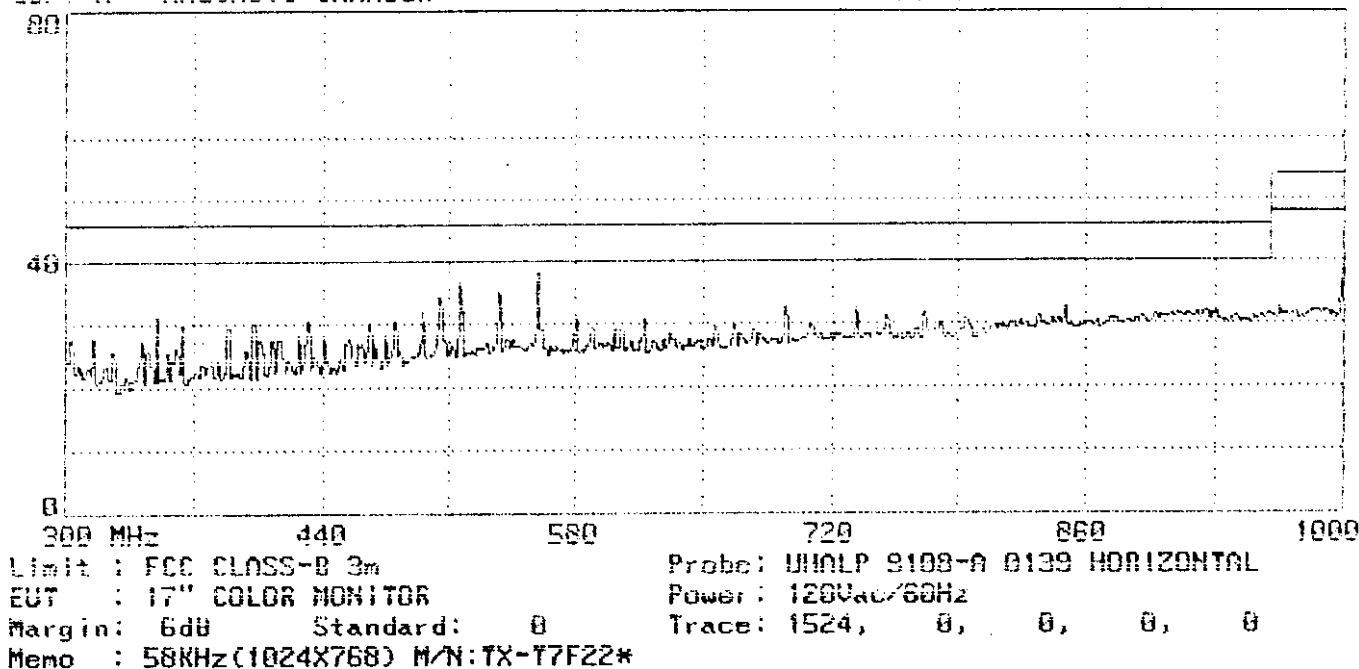


Page#: 1525 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 18:43:23
 dBuV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

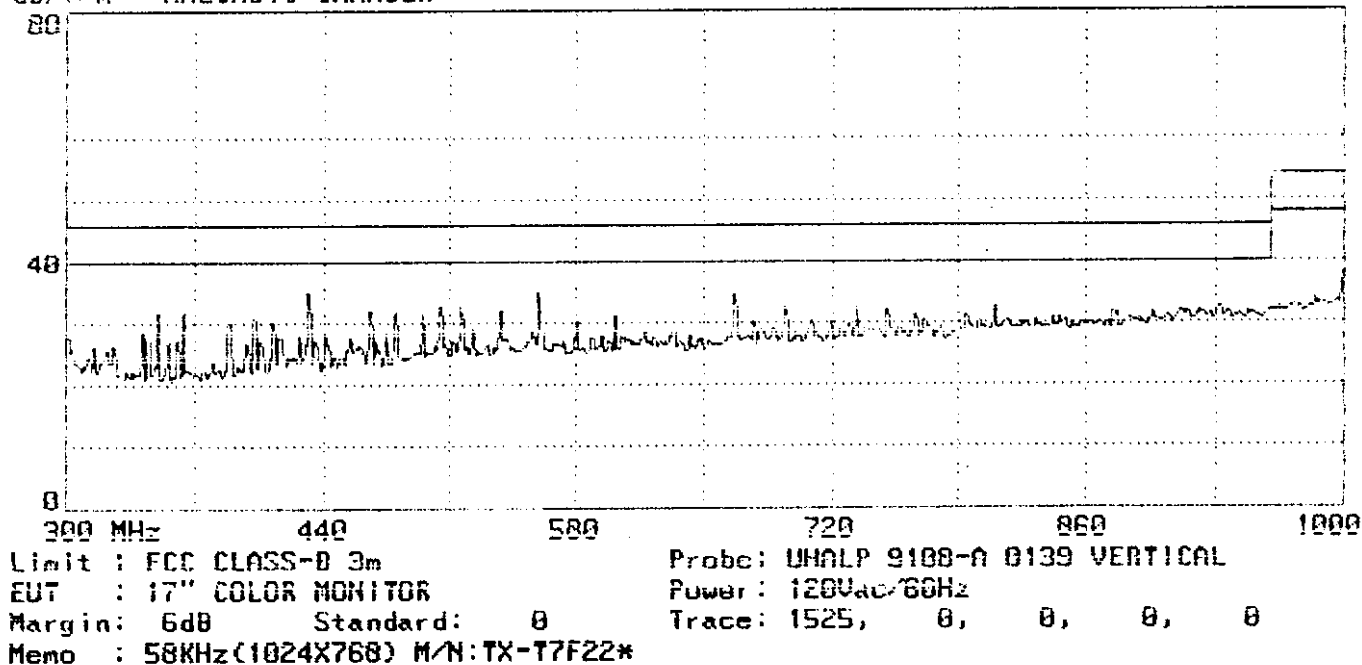


Page#: 1534 SP File#: MATSUSHI.EI Date: 02-10-1999 Time: 19:26:54
 dB μ V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

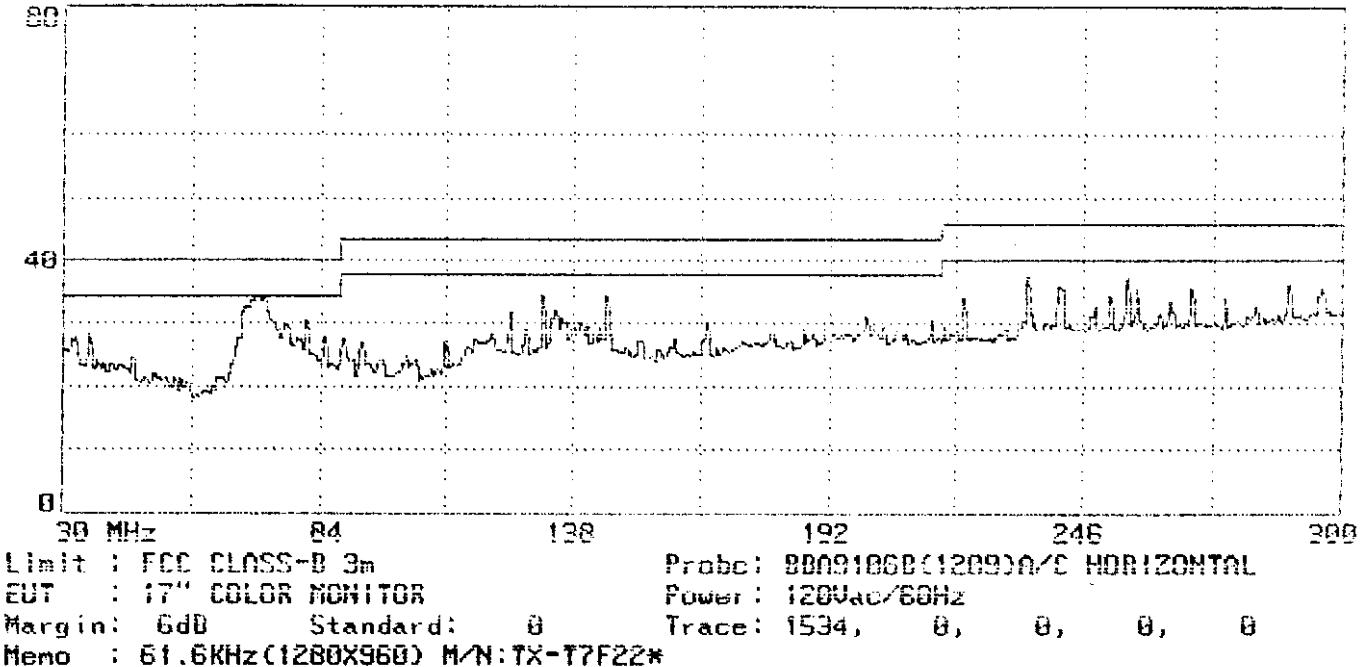


Page#: 1535 SP File#: MATSUSHI.EI Date: 02-10-1999 Time: 19:30:45
 dB μ V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

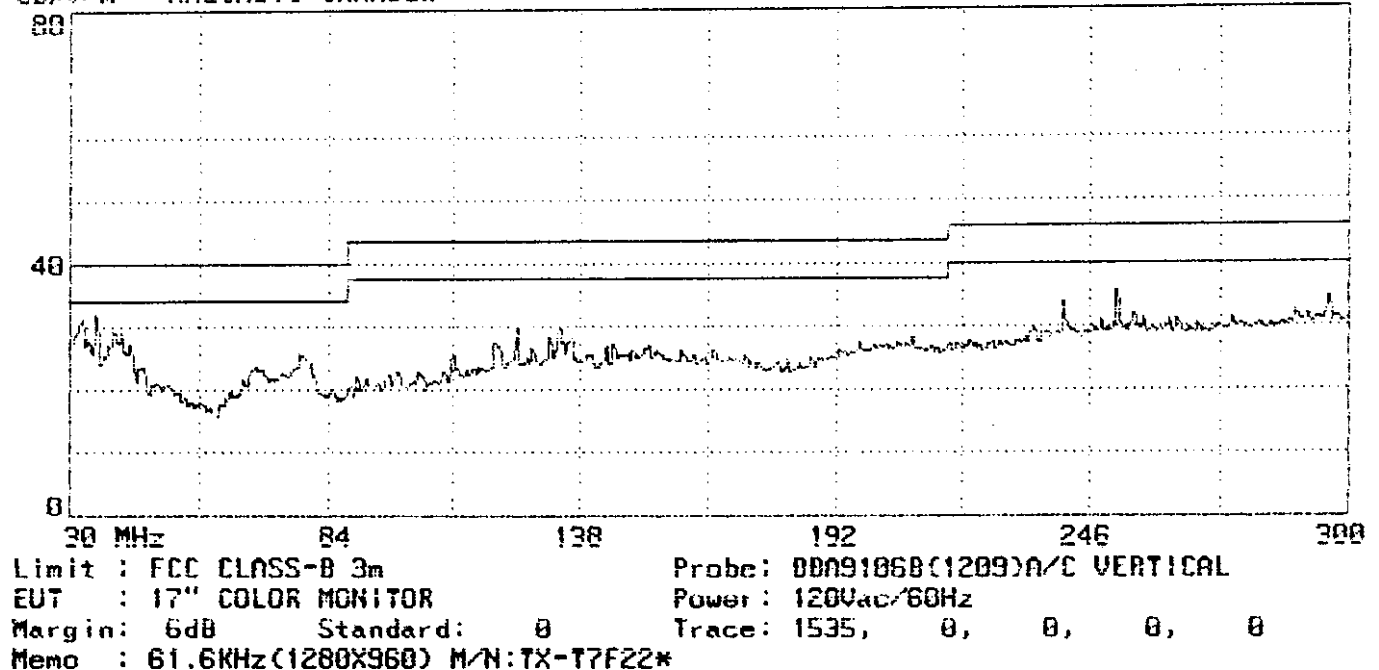

Page#: 1532 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 19:18:32
dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

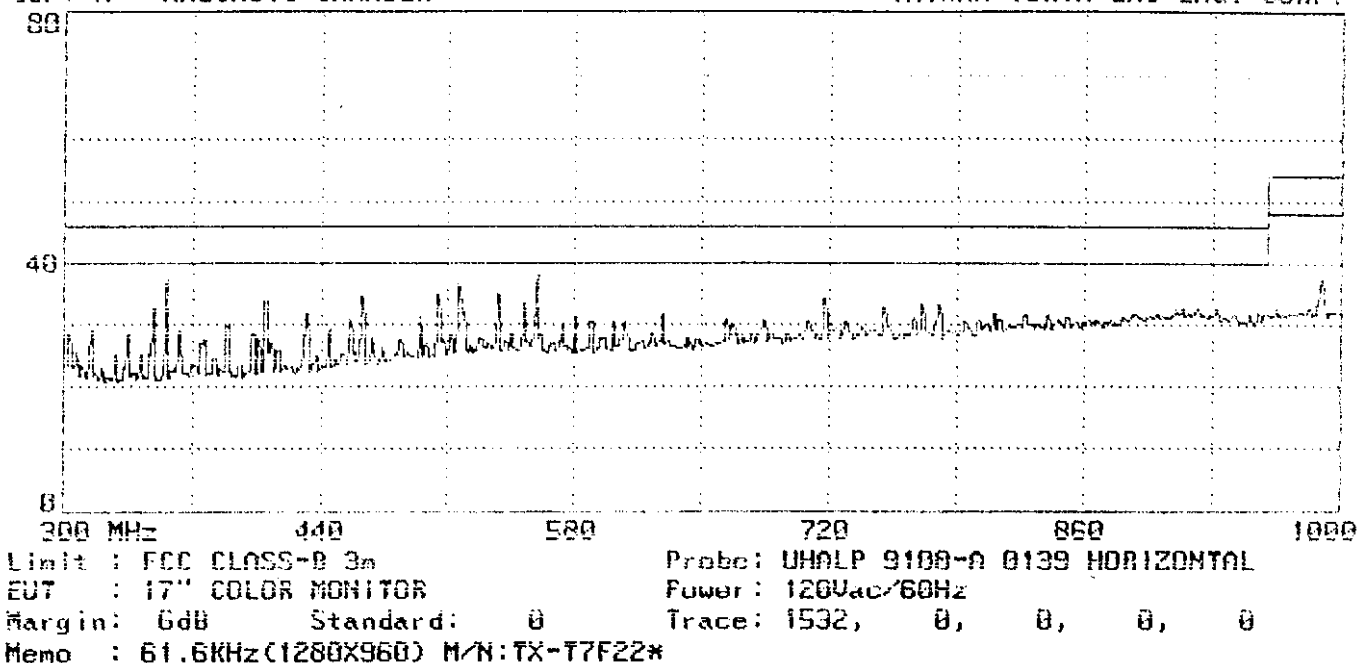


Page#: 1533 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 19:21:22
dBμV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

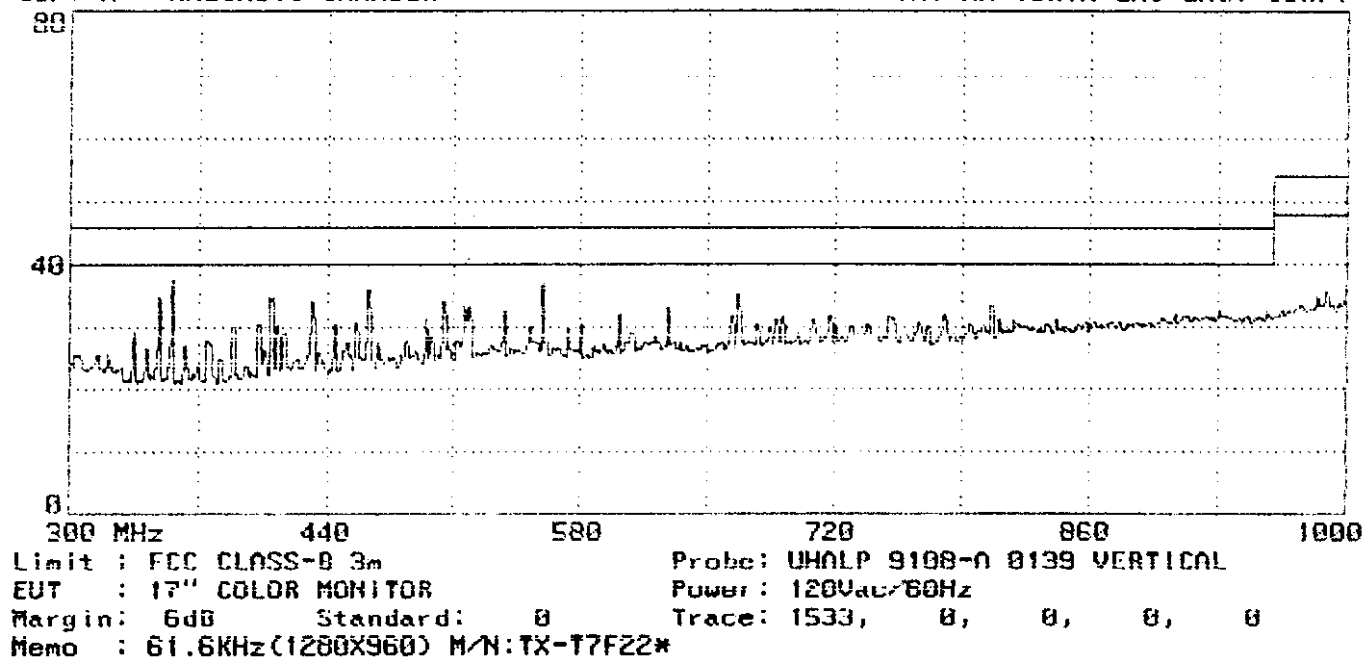


Page#: 1528 SP File#: MATSUSHI.E1
dB μ V/m ANECHOIC CHAMBER

Date: 02-10-1999 Time: 19:02:56
TAIWAN TOKIN EMC ENG. CORP.

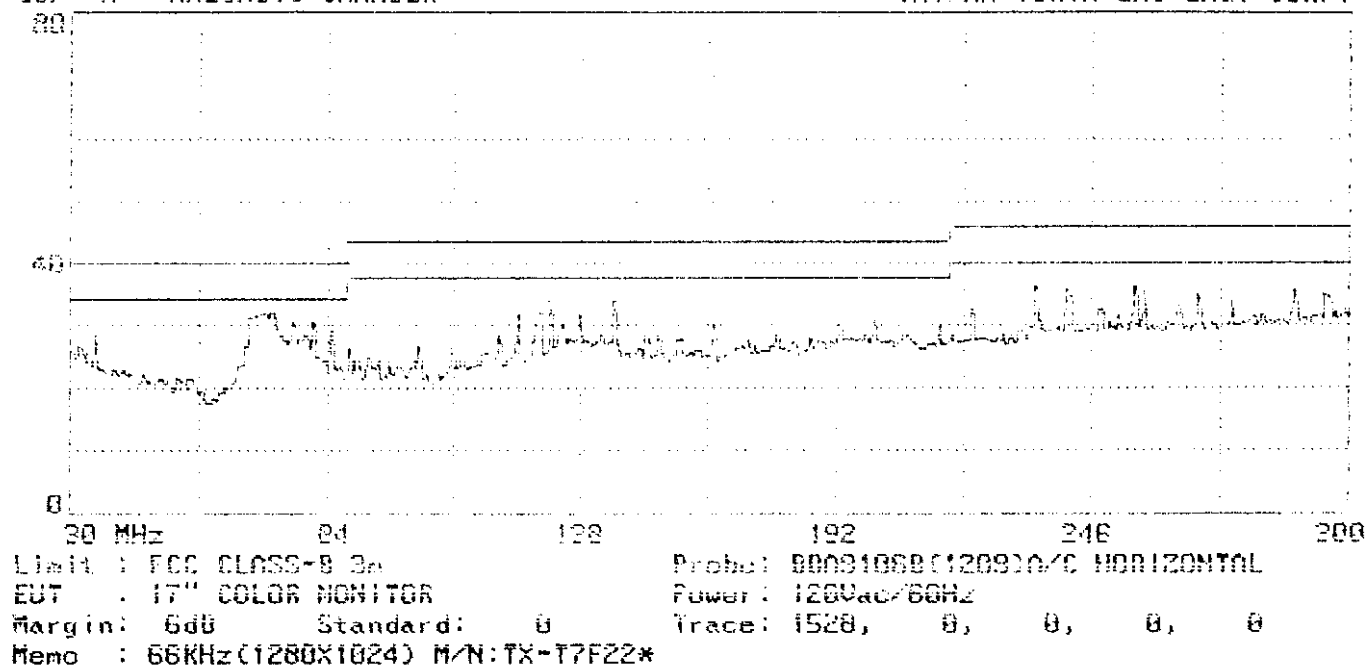


Page#: 1529 SP File#: MATSUSHI.E1
dB μ V/m ANECHOIC CHAMBER

Date: 02-10-1999 Time: 19:05:37
TAIWAN TOKIN EMC ENG. CORP.

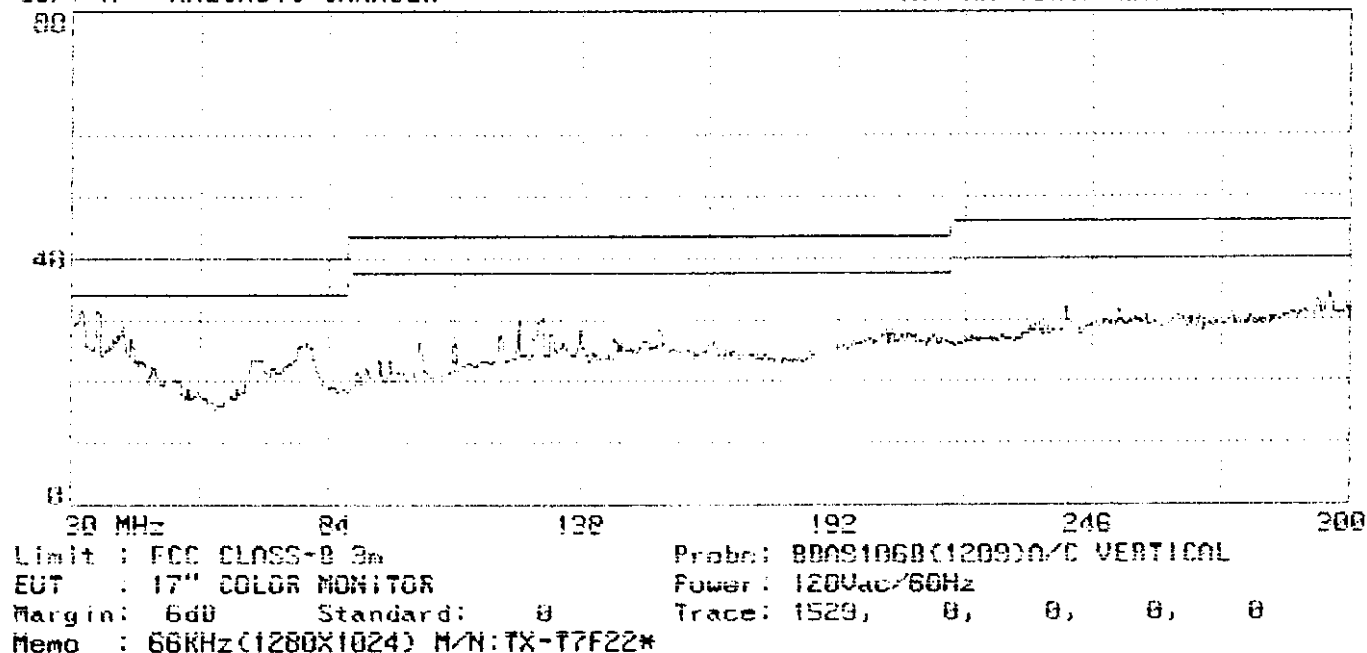


Page#: 1530 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 19:11:07
 dB μ V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

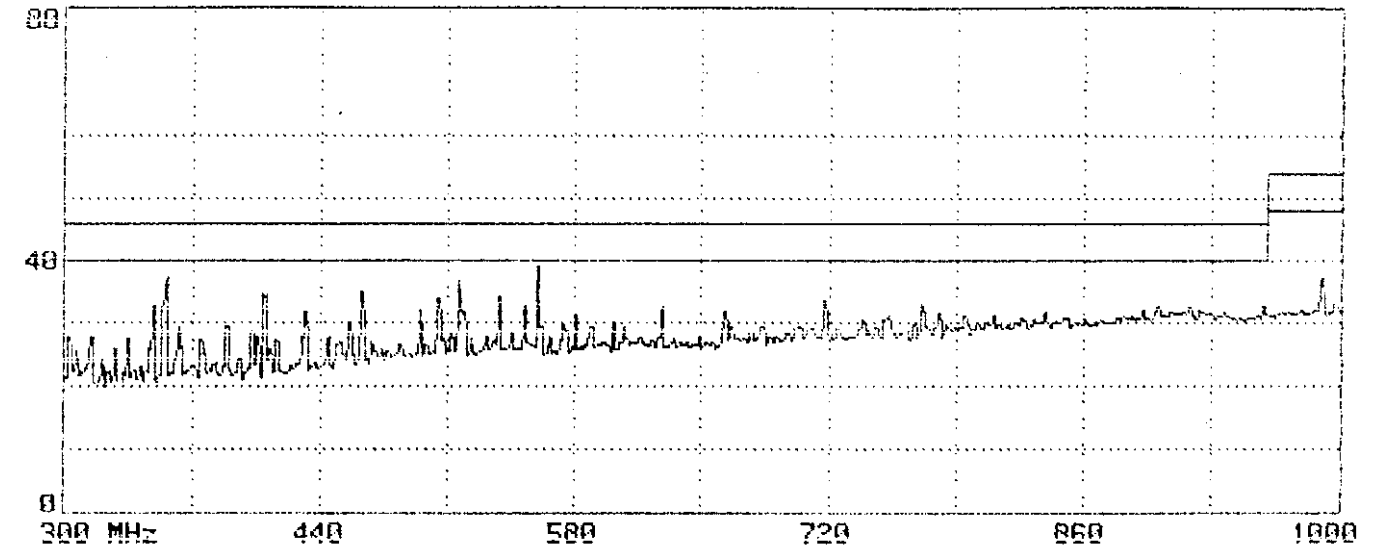

Limit : FCC CLASS-B 3m Probe: UHALP 9108-A 0139 HORIZONTAL
 EUT : 17" COLOR MONITOR Power : 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 1530, 0, 0, 0, 0
 Memo : 66KHz(1280X1024) M/N:TX-T7F22*

Page#: 1531 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 19:12:54
 dB μ V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

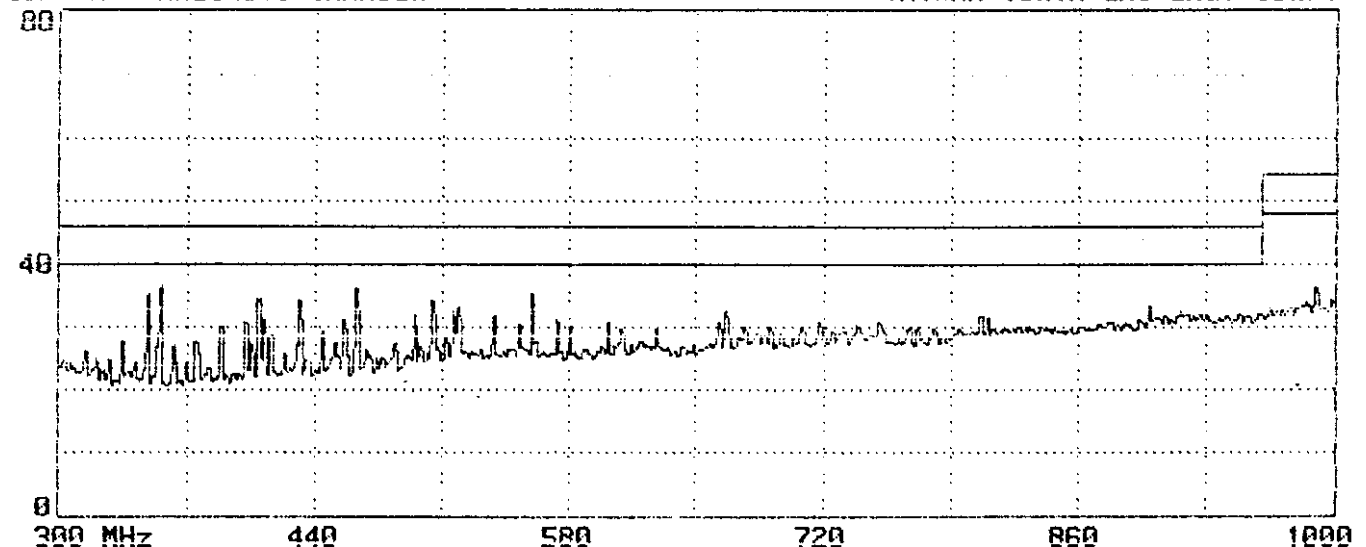

Limit : FCC CLASS-B 3m Probe: UHALP 9108-A 0139 VERTICAL
 EUT : 17" COLOR MONITOR Power : 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 1531, 0, 0, 0, 0
 Memo : 66KHz(1280X1024) M/N:TX-T7F22*