

Test Report

Product	UPCS Base Station	
Name and address of the applicant	Panasonic Corporation of North America	
Name and address of the manufacturer	Panasonic System Networks Co., Ltd. 1-62, 4-chome, Minoshima, Hakata-ku Fukuoka 812-8531, Japan	
Model	KX-TGE230	
Rating	120 V AC (Mains)	
Trademark	Panasonic	
Serial number	/	
Additional information	DECT 6.0	
Tested according to	FCC Part 15, subpart D Isochronous UPCS Device, 1920 – 1930 MHz Industry Canada RSS 213, Issue 2 2 GHz License-exempt Personal Communications Service Devices (LE-PCS)	
Order number	248567	
Tested in period	2013.12.10 to 2013.12.13	
Issue date	2013.12.13	
Name and address of the testing laboratory	 FCC No: 994405 IC OATS: 2040D-1 TEL: (+47) 22 96 03 30 FAX: (+47) 22 96 05 50 Instituttveien 6 Kjeller, Norway	
		
	Prepared by [Frode Sveinsen]	Approved by [G.Suhanthakumar]
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.		

CONTENTS

1	INFORMATION	3
1.1	Tested Item.....	3
1.2	Description of Tested Device.....	3
1.3	Exposure Evaluation.....	3
1.4	Test Environment	4
1.5	Test Engineer(s).....	4
1.6	Test Equipment	4
1.7	Other Comments	4
2	TEST REPORT SUMMARY	5
2.1	General.....	5
2.2	Test Summary	6
3	TEST RESULTS.....	7
3.1	Power Line Conducted Emissions.....	7
3.2	Coordination with fixed microwave	17
3.3	Digital Modulation Techniques	17
3.4	Labeling Requirements	17
3.5	Antenna Requirement.....	18
3.6	Channel Frequencies	18
3.7	Automatic Discontinuation of Transmission	19
3.8	Peak Power Output	20
3.9	Emission Bandwidth B	23
3.10	Power Spectral Density	26
3.11	In-Band Unwanted Emissions, Conducted	29
3.12	Out-of-band Emissions, Conducted.....	31
3.13	Carrier Frequency Stability	35
3.14	Frame Repetition Stability	36
3.15	Frame Period and Jitter	36
3.16	Monitoring Threshold, Least Interfered Channel	38
3.17	Threshold Monitoring Bandwidth	40
3.18	Reaction Time and Monitoring Interval.....	41
3.19	Time and Spectrum Window Access Procedure	43
3.20	Acknowledgements and Transmission Duration	46
3.21	Dual Access Criteria Check.....	47
3.22	Alternative Monitoring Interval	47
4	TEST SETUPS	48
4.1	Frequency Measurements.....	48
4.2	Timing Measurements	48
4.3	Conducted Emission Test.....	48
4.4	Power Line Conducted Emissions Test.....	48
4.5	Monitoring Tests	49
5	TEST EQUIPMENT USED	50

1 INFORMATION

1.1 Tested Item

Name :	Panasonic
Model name :	KX-TGE230
FCC ID :	ACJ96NKX-TGE230
Industry Canada ID :	216A-KXTGE230
Serial number :	/
Hardware identity and/or version:	PNLB2278xx
Software identity and/or version :	SW401
Tested to IC Radio Standard (RSS) :	RSS-213 Issue 2, RSS-GEN Issue 3
Test Site IC Reg. Number :	IC 2040D-1
Frequency Range :	1921.536 – 1928.448 MHz
Number of Channels :	5 RF Channels, 5x12 = 60 TDMA Duplex Channels
Type of Modulation :	Digital (Gaussian Frequency Shift Keying)
Conducted Output Power :	64 mW (Peak)
Antenna Connector :	None
Number of Antennas :	2
Antenna Diversity Supported :	Yes
Power Supply :	AC Adaptor PNLV226

1.2 Description of Tested Device

The EUT is a DECT Base Station and is a responding device as described in ANSI C63.17 and is designed to operate together with a DECT portable part (i.e. a handset), which is the initiating device.

1.3 Exposure Evaluation

For the purposes of exposure evaluation this EUT is a mobile or fixed device. MPE Calculation at 20 cm satisfying FCC requirements is submitted as a separate document.

The EUT is exempted from RF Exposure Evaluation to Industry Canada requirements since the output power complies with the power levels of section 2.5.2 of RSS-102 Issue 4.

1.4 Test Environment

Temperature:	19.9 – 21.0 °C
Relative humidity:	40.5 – 42.8 %
Normal test voltage:	120 V AC

The values are the limit registered during the test period.

1.5 Test Engineer(s)

Frode Sveinsen
Thomas Dangle

1.6 Test Equipment

See list of test equipment in clause 6.

1.7 Other Comments

The Monitoring and Time and Spectrum Window Access tests were performed with Test Set-Up 6 (Ref. clause 5). A clock signal from the companion device was used to synchronize the Pulse Pattern Generator and the Spectrum Analyzer to the start of the DECT time window. The EUT was limited by administrative commands to operate on only two frequency carriers. For the tests where the EUT was required to operate on only one frequency carrier, one carrier was blocked by applying a CW interfering signal from RF Generator 3. The Pulse Pattern Generator was used to apply time synchronized interference to time windows where this was required.

Since the EUT was programmed to operate on only two RF carriers, it was only necessary with two RF generators for the monitoring tests, however a third generator was applied for the tests that required specific time slots to be blocked.

This EUT supports Least Interfered Channel procedure (LIC), the Monitoring and Time and Spectrum Window Access tests were conducted as specified for EUTs that support LIC procedure.

All tests except Antenna Gain and Power-Line Conducted Emissions were performed in conducted mode with a temporary antenna connector.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC CFR47 Part 15D for Isochronous UPCS Devices and Industry Canada RSS-213 Issue 2 / RSS-GEN Issue 3.

All tests were conducted in accordance with ANSI C63.4-2009 and ANSI C63.17-2006. Antenna Gain tests were made in a 3m fully-anechoic chamber.

A description of the test facility is on file with the FCC and Industry Canada.

☒ New Submission

☒ Production Unit

☐ Class II Permissive Change

☐ Pre-production Unit

PUB Equipment Code

☐ Family Listing



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC CFR 47 Paragraph #	IC RSS-213 Paragraph #	Verdict
Power Line Conducted Emission	15.107(a) 15.207(a)	6.3 RSS-GEN 7.2.2	Complies
Coordination with fixed microwave	15.307(b)	N/A	Complies
Digital Modulation Techniques	15.319(b)	6.1	Complies
Labeling requirements	15.19(a)(3)	3 RSS-GEN 5.2	Complies
Antenna Requirement	15.317, 15.203	RSS-GEN 7.1.2	Complies
Channel Frequencies	15.303	1	Complies
Automatic discontinuation of transmission	15.319(f)	4.3.4(a)	Complies
Emission Bandwidth	15.323(a)	6.4	Complies
In-band emissions	15.323(d)	6.7.2	Complies
Out-of-band emissions	15.323(d)	6.7.1	Complies
Output Power and Antenna Gain	15.319(c)(e), 15.31(e)	6.5 and 4.1(e)	Complies
Power Spectral Density	15.319(d)	4.3.2.1	Complies
Carrier frequency stability	15.323(f)	6.2	Complies
Frame repetition stability	15.323(e)	4.3.4(c)	Complies
Frame period and jitter	15.323(e)	4.3.4(c)	Complies
Monitoring threshold, Least interfered channel	15.323(c)(2);(5); (9)	4.3.4(b)	Complies
Monitoring of intended transmit window and maximum reaction time	15.323(c)(1)	4.3.4(b)	Complies
Threshold monitoring bandwidth	15.323(c)(7)	4.3.4(b)	Complies
Reaction time and monitoring interval	15.323(c)(1);(5); (7)	4.3.4(b)	Complies
Access criteria test interval	15.323(c)(4);(6)	4.3.4(b)	Complies
Access Criteria functional test	15.323(c)(4);(6)	4.3.4(b)	Complies
Acknowledgements	15.323(c)(4)	4.3.4(b)	Complies
Transmission duration	15.323(c)(3)	4.3.4(b)	N/A ¹
Dual access criteria	15.323(c)(10)	4.3.4(b)	N/A ¹
Alternative monitoring interval	15.323(c)(10);(11)	4.3.4(b)	N/A ²
Spurious Emissions (Radiated)	15.319(g) 15.109(a) 15.209(a)	4.3.3 RSS-GEN 7.2.3	N/A ³

¹ Only applies for EUT that can be initiating device

² The client declares that the tested equipment does not implement this provision

³ Not required if the Conducted Out-of-Band Emissions test is Passed

3 TEST RESULTS

3.1 Power Line Conducted Emissions

Para. No.: 15.207 (a)

Test Performed By: Thomas Dangle	Date of Test: 12-Dec-2013
----------------------------------	---------------------------

Measurement procedure: ANSI C63.4-2009 using 50 μ H/50 ohms LISN.

Test Results: Complies

Measurement Data: See attached graph, (Peak detector).

Highest measured value (L1 and N):

Note: All plots show maximum of Phase L1 and N.

All tests were performed with a KX-TGEA20 Handset.

Off-Hook, Speech Mode, AC Adaptor PNLV226 (UC), 120V 60Hz:

Frequency [MHz]	Level [dBuV]	Af [dB]	Limit [dBuV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.150000	40.30	10.10	66.00	25.70	QP	N	Pass
0.355000	41.40	10.20	58.80	17.40	QP	L1	Pass
0.730000	27.90	10.20	56.00	28.10	QP	N	Pass
0.785000	29.10	10.20	56.00	26.90	QP	L1	Pass
1.225000	31.90	10.20	56.00	24.10	QP	L1	Pass
1.485000	31.30	10.20	56.00	24.70	QP	N	Pass
1.815000	31.70	10.20	56.00	24.30	QP	N	Pass
2.725000	33.30	10.30	56.00	22.70	QP	N	Pass
3.330000	33.50	10.30	56.00	22.50	QP	N	Pass
4.105000	32.30	10.40	56.00	23.70	QP	N	Pass
4.920000	30.40	10.40	56.00	25.60	QP	L1	Pass
0.150000	21.40	10.10	56.00	34.60	AV	N	Pass
0.220000	16.60	10.10	52.80	36.20	AV	N	Pass
0.330000	16.90	10.20	49.50	32.60	AV	L1	Pass
0.355000	30.70	10.20	48.80	18.10	AV	L1	Pass
0.540000	15.60	10.20	46.00	30.40	AV	L1	Pass
0.730000	13.60	10.20	46.00	32.40	AV	N	Pass
0.785000	18.60	10.20	46.00	27.40	AV	L1	Pass
1.225000	22.10	10.20	46.00	23.90	AV	L1	Pass
1.485000	16.40	10.20	46.00	29.60	AV	N	Pass
1.815000	17.70	10.20	46.00	28.30	AV	N	Pass
2.725000	20.10	10.30	46.00	25.90	AV	N	Pass
3.330000	21.30	10.30	46.00	24.70	AV	N	Pass
4.105000	21.00	10.40	46.00	25.00	AV	N	Pass
4.920000	20.80	10.40	46.00	25.20	AV	L1	Pass
6.415000	16.70	10.50	50.00	33.30	AV	L1	Pass
8.075000	13.50	10.60	50.00	36.50	AV	N	Pass
10.645000	11.00	10.60	50.00	39.00	AV	N	Pass

On-Hook, Charging Mode, AC Adaptor PNLV226 (UC), 120V 60Hz:

Frequency [MHz]	Level [dBuV]	Af [dB]	Limit [dBuV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.155000	41.00	10.10	65.70	24.70	QP	N	Pass
0.330000	42.20	10.20	59.50	17.30	QP	L1	Pass
0.335000	38.10	10.20	59.30	21.20	QP	N	Pass
0.500000	35.20	10.20	56.00	20.80	QP	L1	Pass
0.715000	35.30	10.20	56.00	20.70	QP	L1	Pass
0.885000	34.50	10.20	56.00	21.50	QP	L1	Pass
1.165000	36.90	10.20	56.00	19.10	QP	L1	Pass
1.475000	34.50	10.20	56.00	21.50	QP	N	Pass
1.855000	36.20	10.20	56.00	19.80	QP	N	Pass
2.595000	37.70	10.30	56.00	18.30	QP	N	Pass
3.335000	37.80	10.30	56.00	18.20	QP	N	Pass
3.695000	37.40	10.30	56.00	18.60	QP	N	Pass
4.740000	35.50	10.40	56.00	20.50	QP	N	Pass
0.155000	22.60	10.10	55.70	33.10	AV	N	Pass
0.250000	17.50	10.10	51.80	34.30	AV	L1	Pass
0.330000	33.10	10.20	49.50	16.40	AV	L1	Pass
0.335000	24.30	10.20	49.30	25.00	AV	N	Pass
0.500000	26.20	10.20	46.00	19.80	AV	L1	Pass
0.715000	25.90	10.20	46.00	20.10	AV	L1	Pass
0.885000	25.70	10.20	46.00	20.30	AV	L1	Pass
1.165000	26.00	10.20	46.00	20.00	AV	L1	Pass
1.475000	20.40	10.20	46.00	25.60	AV	N	Pass
1.855000	23.00	10.20	46.00	23.00	AV	N	Pass
2.595000	24.70	10.30	46.00	21.30	AV	N	Pass
3.335000	25.60	10.30	46.00	20.40	AV	N	Pass
3.695000	25.60	10.30	46.00	20.40	AV	N	Pass
4.740000	24.20	10.40	46.00	21.80	AV	N	Pass
6.140000	20.90	10.50	50.00	29.10	AV	N	Pass
8.015000	17.60	10.60	50.00	32.40	AV	N	Pass
10.595000	14.90	10.60	50.00	35.10	AV	N	Pass

Off-Hook, Speech Mode, AC Adaptor PNLV226 (FW), 120V 60Hz:

Frequency [MHz]	Level [dBuV]	Af [dB]	Limit [dBuV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.390000	41.40	10.20	58.10	16.70	QP	L1	Pass
0.510000	30.90	10.20	56.00	25.10	QP	N	Pass
0.730000	25.40	10.20	56.00	30.60	QP	N	Pass
0.950000	30.00	10.20	56.00	26.00	QP	L1	Pass
1.025000	29.90	10.20	56.00	26.10	QP	L1	Pass
2.265000	29.90	10.30	56.00	26.10	QP	L1	Pass
3.050000	30.60	10.30	56.00	25.40	QP	L1	Pass
4.115000	30.80	10.40	56.00	25.20	QP	L1	Pass
4.705000	30.10	10.40	56.00	25.90	QP	L1	Pass
0.230000	18.30	10.10	52.40	34.10	AV	L1	Pass
0.320000	24.80	10.10	49.70	24.90	AV	N	Pass
0.390000	33.50	10.20	48.10	14.60	AV	L1	Pass
0.510000	18.30	10.20	46.00	27.70	AV	N	Pass
0.730000	19.20	10.20	46.00	26.80	AV	N	Pass
0.950000	19.30	10.20	46.00	26.70	AV	L1	Pass
1.025000	18.50	10.20	46.00	27.50	AV	L1	Pass
1.300000	14.70	10.20	46.00	31.30	AV	L1	Pass
1.840000	14.10	10.20	46.00	31.90	AV	L1	Pass
2.265000	15.50	10.30	46.00	30.50	AV	L1	Pass
3.050000	19.30	10.30	46.00	26.70	AV	L1	Pass
4.115000	21.50	10.40	46.00	24.50	AV	L1	Pass
4.705000	21.10	10.40	46.00	24.90	AV	L1	Pass
6.520000	18.00	10.50	50.00	32.00	AV	L1	Pass
8.190000	14.70	10.60	50.00	35.30	AV	L1	Pass

On-Hook, Handset Charging, AC Adaptor PNLV226 (FW), 120V 60Hz:


Frequency [MHz]	Level [dBuV]	Af [dB]	Limit [dBuV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.400000	43.40	10.20	57.90	14.50	QP	N	Pass
0.475000	32.70	10.20	56.40	23.70	QP	N	Pass
0.520000	31.00	10.20	56.00	25.00	QP	N	Pass
0.715000	34.20	10.20	56.00	21.80	QP	L1	Pass
0.900000	33.10	10.20	56.00	22.90	QP	L1	Pass
1.195000	30.30	10.20	56.00	25.70	QP	L1	Pass
1.250000	33.10	10.20	56.00	22.90	QP	L1	Pass
1.805000	33.80	10.20	56.00	22.20	QP	L1	Pass
2.695000	32.90	10.30	56.00	23.10	QP	L1	Pass
2.765000	33.10	10.30	56.00	22.90	QP	L1	Pass
3.620000	33.60	10.30	56.00	22.40	QP	L1	Pass
4.915000	32.70	10.40	56.00	23.30	QP	L1	Pass
0.160000	25.50	10.10	55.50	30.00	AV	N	Pass
0.235000	27.10	10.10	52.30	25.20	AV	N	Pass
0.315000	23.60	10.10	49.80	26.20	AV	L1	Pass
0.400000	37.40	10.20	47.90	10.50	AV	N	Pass
0.475000	28.20	10.20	46.40	18.20	AV	N	Pass
0.520000	23.10	10.20	46.00	22.90	AV	N	Pass
0.715000	24.10	10.20	46.00	21.90	AV	L1	Pass
0.900000	16.20	10.20	46.00	29.80	AV	L1	Pass
1.195000	16.00	10.20	46.00	30.00	AV	L1	Pass
1.250000	17.30	10.20	46.00	28.70	AV	L1	Pass
1.805000	18.20	10.20	46.00	27.80	AV	L1	Pass
2.695000	21.60	10.30	46.00	24.40	AV	L1	Pass
2.765000	22.20	10.30	46.00	23.80	AV	L1	Pass
3.620000	23.70	10.30	46.00	22.30	AV	L1	Pass
4.915000	23.90	10.40	46.00	22.10	AV	L1	Pass
6.335000	22.30	10.50	50.00	27.70	AV	L1	Pass
8.155000	19.70	10.60	50.00	30.30	AV	L1	Pass
10.480000	16.40	10.60	50.00	33.60	AV	L1	Pass

Off-Hook, Speech Mode, AC Adaptor PNLV226 (ZP), 120V 60Hz:


Frequency [MHz]	Level [dBuV]	Af [dB]	Limit [dBuV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.345000	36.30	10.20	59.10	22.80	QP	L1	Pass
4.625000	32.20	10.40	56.00	23.80	QP	N	Pass
4.785000	31.00	10.40	56.00	25.00	QP	N	Pass
9.665000	32.80	10.60	60.00	27.20	QP	N	Pass
10.185000	32.70	10.60	60.00	27.30	QP	N	Pass
10.220000	31.90	10.60	60.00	28.10	QP	N	Pass
10.675000	32.40	10.60	60.00	27.60	QP	N	Pass
10.900000	30.50	10.60	60.00	29.50	QP	N	Pass
11.475000	30.80	10.70	60.00	29.20	QP	N	Pass
11.535000	30.50	10.70	60.00	29.50	QP	N	Pass
11.790000	30.10	10.70	60.00	29.90	QP	N	Pass
11.925000	28.80	10.70	60.00	31.20	QP	N	Pass
12.115000	28.80	10.70	60.00	31.20	QP	N	Pass
12.165000	28.70	10.70	60.00	31.30	QP	N	Pass
12.280000	28.60	10.70	60.00	31.40	QP	N	Pass
12.325000	28.80	10.70	60.00	31.20	QP	N	Pass
12.335000	28.90	10.70	60.00	31.10	QP	N	Pass
12.530000	29.00	10.70	60.00	31.00	QP	N	Pass
12.930000	29.30	10.70	60.00	30.70	QP	N	Pass
13.440000	29.60	10.70	60.00	30.40	QP	N	Pass
0.345000	26.50	10.20	49.10	22.60	AV	L1	Pass
4.625000	22.20	10.40	46.00	23.80	AV	N	Pass
4.785000	20.70	10.40	46.00	25.30	AV	N	Pass
9.665000	19.80	10.60	50.00	30.20	AV	N	Pass
10.185000	18.50	10.60	50.00	31.50	AV	N	Pass
10.220000	18.40	10.60	50.00	31.60	AV	N	Pass
10.675000	17.50	10.60	50.00	32.50	AV	N	Pass
10.900000	17.20	10.60	50.00	32.80	AV	N	Pass
11.475000	16.80	10.70	50.00	33.20	AV	N	Pass
11.535000	16.60	10.70	50.00	33.40	AV	N	Pass
11.790000	16.50	10.70	50.00	33.50	AV	N	Pass
11.925000	16.70	10.70	50.00	33.30	AV	N	Pass
12.115000	16.70	10.70	50.00	33.30	AV	N	Pass
12.165000	16.70	10.70	50.00	33.30	AV	N	Pass
12.280000	16.70	10.70	50.00	33.30	AV	N	Pass
12.325000	16.60	10.70	50.00	33.40	AV	N	Pass
12.335000	16.70	10.70	50.00	33.30	AV	N	Pass
12.530000	17.10	10.70	50.00	32.90	AV	N	Pass
12.930000	17.70	10.70	50.00	32.30	AV	N	Pass
13.440000	18.10	10.70	50.00	31.90	AV	N	Pass

On-Hook, Handset Charging, AC Adaptor PNLV226 (ZP), 120V 60Hz:


Frequency [MHz]	Level [dBuV]	Af [dB]	Limit [dBuV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.215000	36.60	10.10	63.00	26.40	QP	N	Pass
0.380000	42.90	10.20	58.30	15.40	QP	L1	Pass
0.715000	34.20	10.20	56.00	21.80	QP	N	Pass
0.945000	32.30	10.20	56.00	23.70	QP	N	Pass
1.185000	32.50	10.20	56.00	23.50	QP	N	Pass
1.275000	32.70	10.20	56.00	23.30	QP	N	Pass
3.500000	32.40	10.30	56.00	23.60	QP	N	Pass
4.660000	33.40	10.40	56.00	22.60	QP	N	Pass
4.765000	34.00	10.40	56.00	22.00	QP	N	Pass
7.820000	36.70	10.50	60.00	23.30	QP	N	Pass
8.195000	36.70	10.60	60.00	23.30	QP	N	Pass
10.770000	36.60	10.60	60.00	23.40	QP	N	Pass
13.875000	32.60	10.80	60.00	27.40	QP	N	Pass
0.175000	19.30	10.10	54.70	35.40	AV	N	Pass
0.215000	17.40	10.10	53.00	35.60	AV	N	Pass
0.260000	17.70	10.10	51.40	33.70	AV	N	Pass
0.380000	37.40	10.20	48.30	10.90	AV	L1	Pass
0.425000	23.70	10.20	47.30	23.60	AV	N	Pass
0.515000	27.70	10.20	46.00	18.30	AV	L1	Pass
0.715000	21.40	10.20	46.00	24.60	AV	N	Pass
0.945000	20.10	10.20	46.00	25.90	AV	N	Pass
1.185000	17.90	10.20	46.00	28.10	AV	N	Pass
1.275000	21.40	10.20	46.00	24.60	AV	N	Pass
1.945000	14.80	10.20	46.00	31.20	AV	L1	Pass
2.730000	15.00	10.30	46.00	31.00	AV	N	Pass
3.500000	18.80	10.30	46.00	27.20	AV	N	Pass
4.660000	22.50	10.40	46.00	23.50	AV	N	Pass
4.765000	22.90	10.40	46.00	23.10	AV	N	Pass
7.820000	25.40	10.50	50.00	24.60	AV	N	Pass
8.195000	25.80	10.60	50.00	24.20	AV	N	Pass
10.770000	24.70	10.60	50.00	25.30	AV	N	Pass
13.875000	21.60	10.80	50.00	28.40	AV	N	Pass

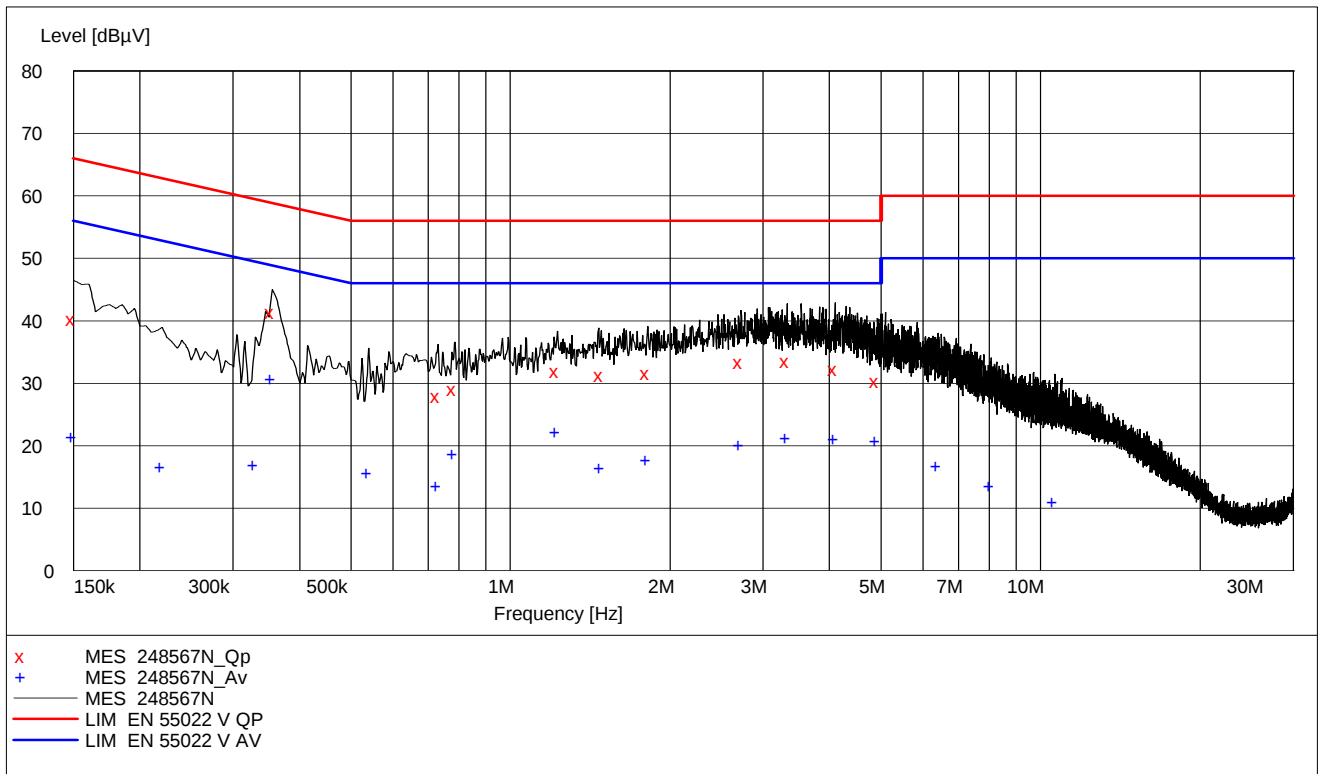


Off-Hook, Speech Mode, AC Adaptor PNLV226 (UC), 120V 60Hz

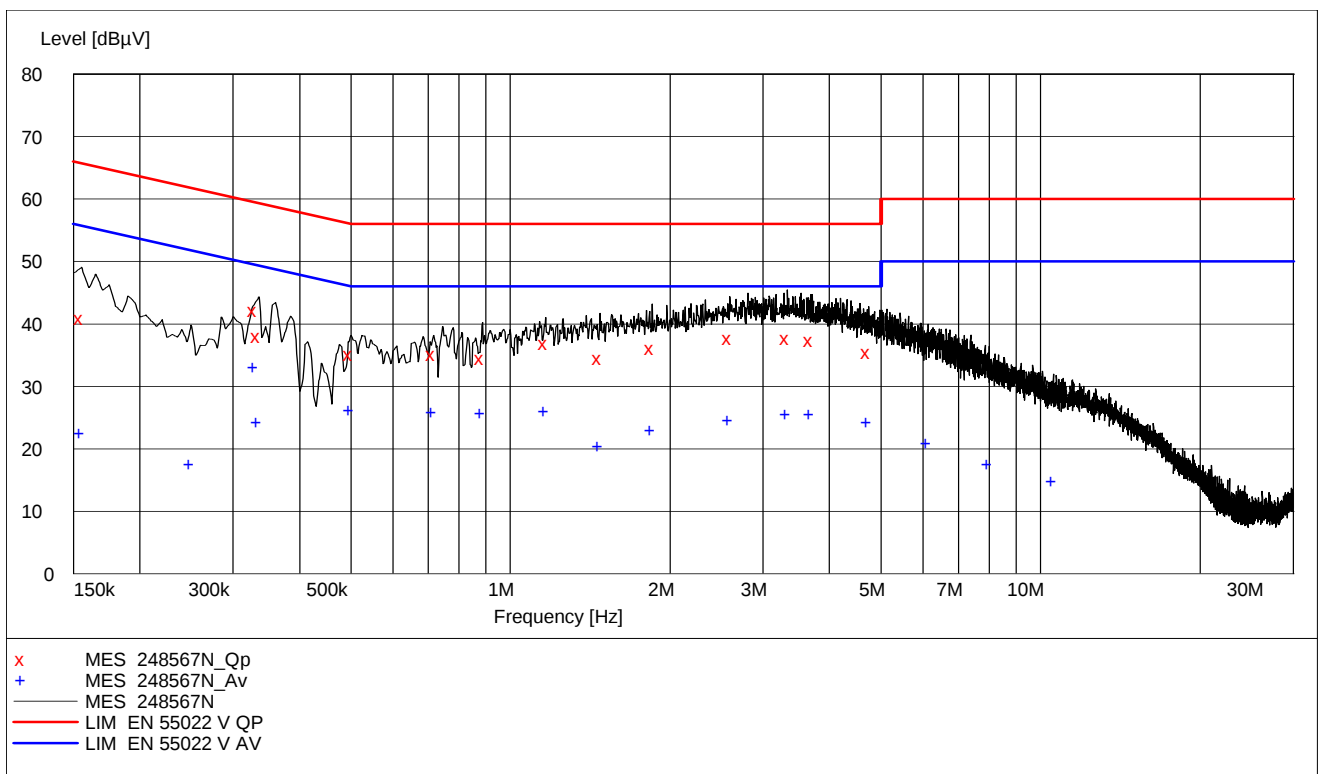


On-Hook, Handset Charging, AC Adaptor PNLV226 (UC), 120V 60Hz

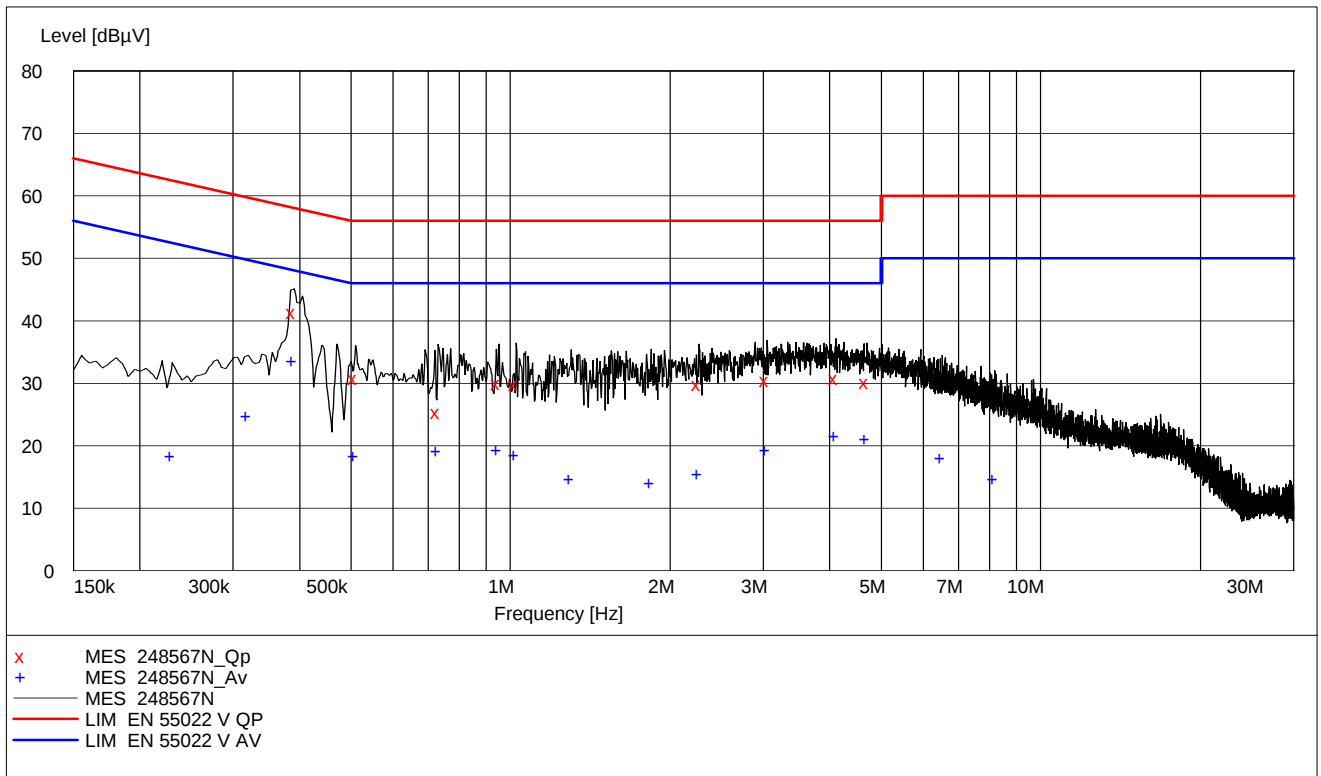


Off-Hook, Speech Mode, AC Adaptor PNLV226 (FW), 120V 60Hz

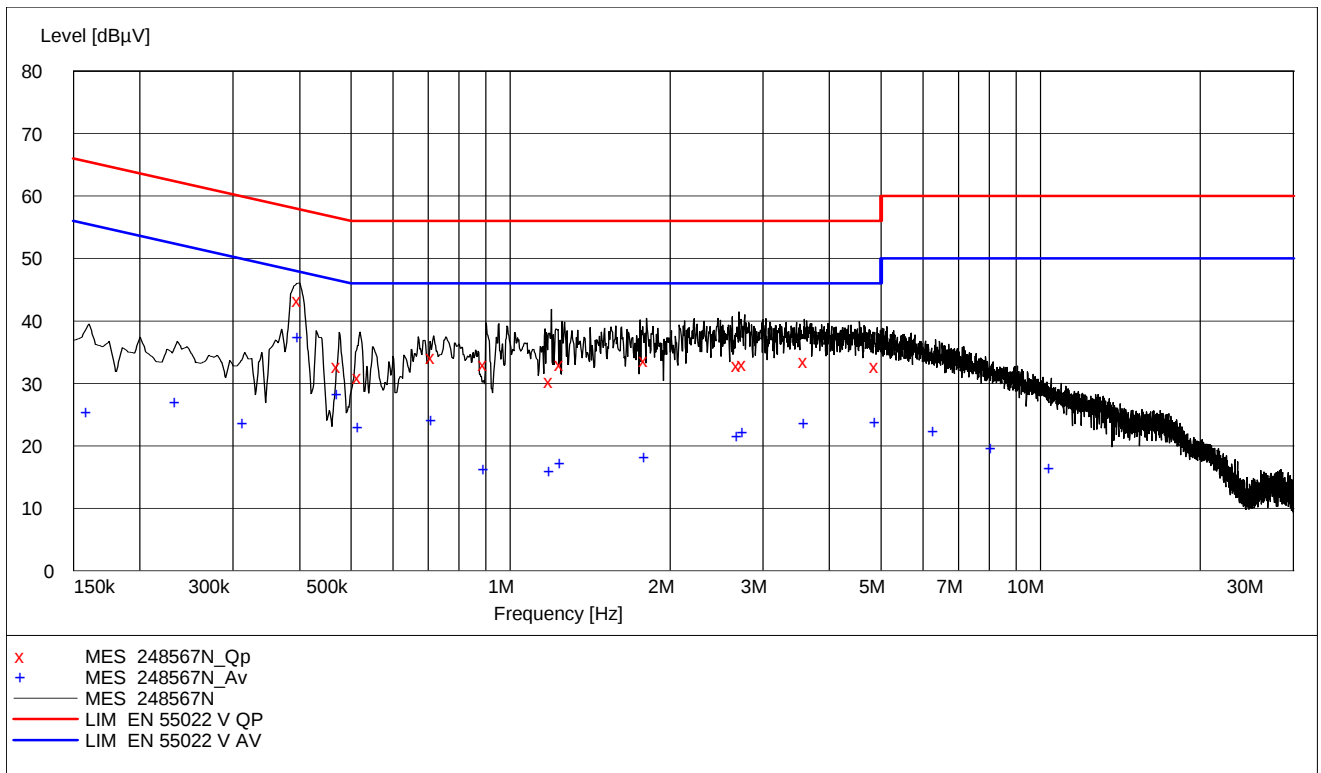

On-Hook, Handset Charging, AC Adaptor PNLV226 (FW), 120V 60Hz

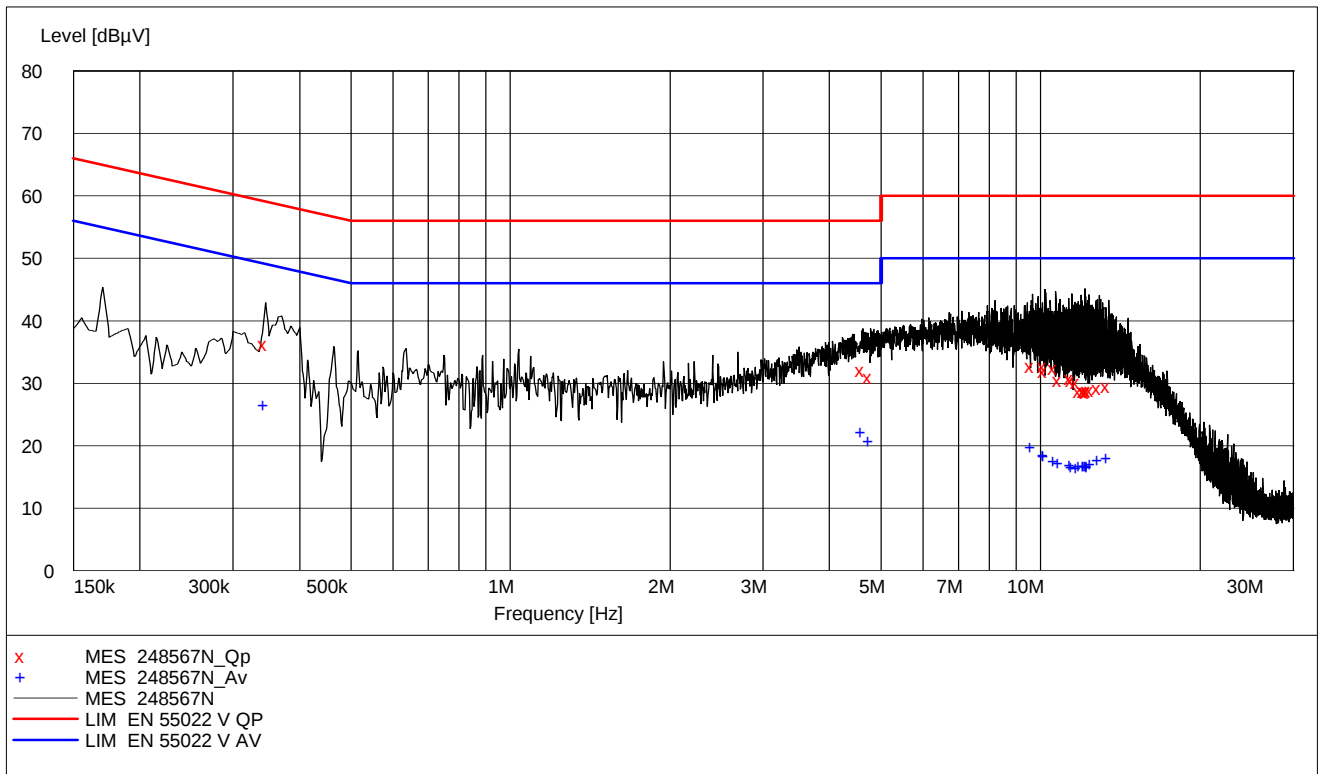

Off-Hook, Speech Mode, AC Adaptor PNLV226 (ZP), 120V 60Hz

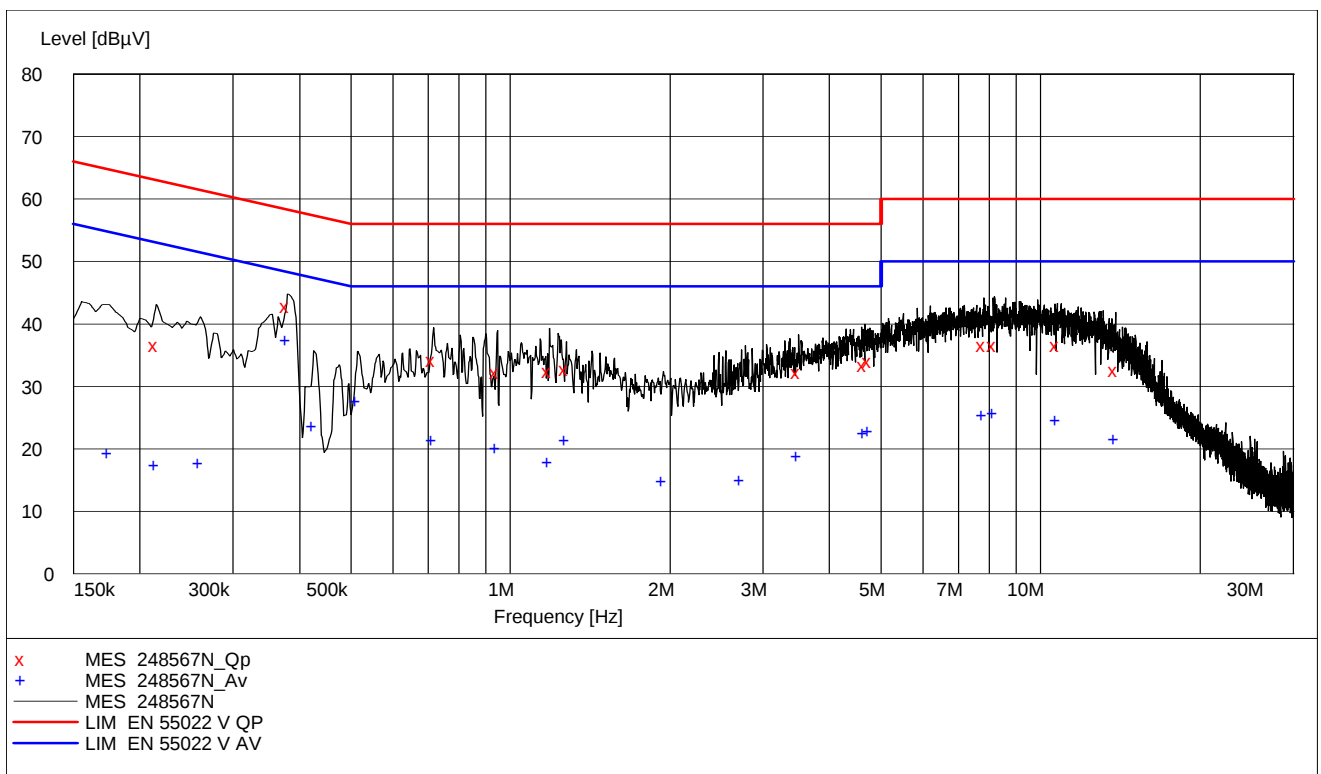

On-Hook, Handset Charging, AC Adaptor PNLV226 (ZP), 120V 60Hz

3.2 Coordination with fixed microwave

The affidavit from UTAM, Inc. is included in the documentation supplied by the applicant:

☒ Yes

☐ No

Requirement, FCC 15.307 (b):

Each application for certification of equipment operating under the provisions of this Subpart must be accompanied by an affidavit from UTAM, Inc. certifying that the applicant is a participating member of UTAM, Inc. In the event a grantee fails to fulfill the obligations attendant to participation in UTAM, Inc., the Commission may invoke administrative sanctions as necessary to preclude continued marketing and installation of devices covered by the grant of certification, including but not limited to revoking certification.

3.3 Digital Modulation Techniques

The EUT uses Multi Carrier / Time Division Multiple Access / Time Division Duplex and Digital GFSK modulation. For further details see the operational description provided by the applicant.

Requirement, FCC 15.319(b):

All transmissions must use only digital modulation techniques.

3.4 Labeling Requirements

See separate documents showing the label design and the placement of the label on the EUT.

Requirements FCC 15.19

The FCC Identifier shall be displayed on the label, and the device(s) shall bear the following statement in a conspicuous location on the device or in the user manual if the device is too small:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label itself shall be of a permanent type, not a paper label, and shall last the lifetime of the equipment.

3.5 Antenna Requirement

Does the EUT have detachable antenna(s)?

☐ Yes ☒ No

If detachable, is the antenna connector(s) non-standard?

☐ Yes ☐ No

The tested equipment has only integral antennas. The conducted tests were performed on a sample with a temporary antenna connector.

Requirement: FCC 15.203, 15.204, 15.317.

3.6 Channel Frequencies

UPCS CHANNEL	FREQUENCY (MHz)
Upper Band Edge	1930.000
0 (Highest)	1928.448
1	1926.720
2	1924.992
3	1923.264
4 (Lowest)	1921.536
Lower Band Edge	1920.000

Requirement: FCC 15.303

Within 1920 -1930 MHz band for isochronous devices.

3.7 Automatic Discontinuation of Transmission

Does the EUT transmit Control and Signaling Information?	☒ YES	☐ NO
TYPE OF EUT :	☐ INITIATING DEVICE	☒ RESPONDING DEVICE

The following tests simulate the reaction of the EUT in case of either absence of information to transmit or operational failure after a connection with the companion device is established.

Number	Test	EUT Reaction	Verdict
1	Power removed from EUT	A	Pass
2	Switch Off EUT	N/A	Pass
3	Hook-On by EUT	N/A	Pass
4	Power Removed from Companion Device	B	Pass
5	Switch Off Companion Device	B	Pass
6	Hook-On by Companion Device	B	Pass

- A - Connection breakdown, Cease of all transmissions
 B - Connection breakdown, EUT transmits control and signaling information
 C - Connection breakdown, Companion Device transmits control and signaling information
 N/A - Not Applicable (EUT does not have On/Off switch and cannot perform Hook-On)

Requirements, FCC 15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

3.8 Peak Power Output

Test Method:

ANSI C63.17, clause 6.1.2.

Test Results: Complies

Measurement Data:

Maximum Conducted Output Power

Channel No.	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Maximum Antenna Gain (dBi)	Maximum Radiated Output Power (dBm)
4	1921.536	18.1	0.0*	18.1
2	1924.992	18.1	0.0*	18.1
0	1928.448	18.0	0.0*	18.0

*Antenna gain value is declared by the manufacturer.

For this test it was also checked that input voltage variation of 85 and 115% of nominal value did not have any effect on the measured output power.

Limit:

Conducted: $100 \mu\text{W} \times \text{SQRT}(B)$ where B is the measured Emission Bandwidth in Hz

FCC 15.319(c)(e): 20.70 dBm (117 mW)

RSS-213, Issue 2: 20.44 dBm (111 mW)


The antenna gain is below 3 dBi, no reduction in transmit power is necessary.

Requirements, FCC 15.319(c)(e), RSS-213, Issue 2

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in Hertz.


The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Conducted Peak Output Power

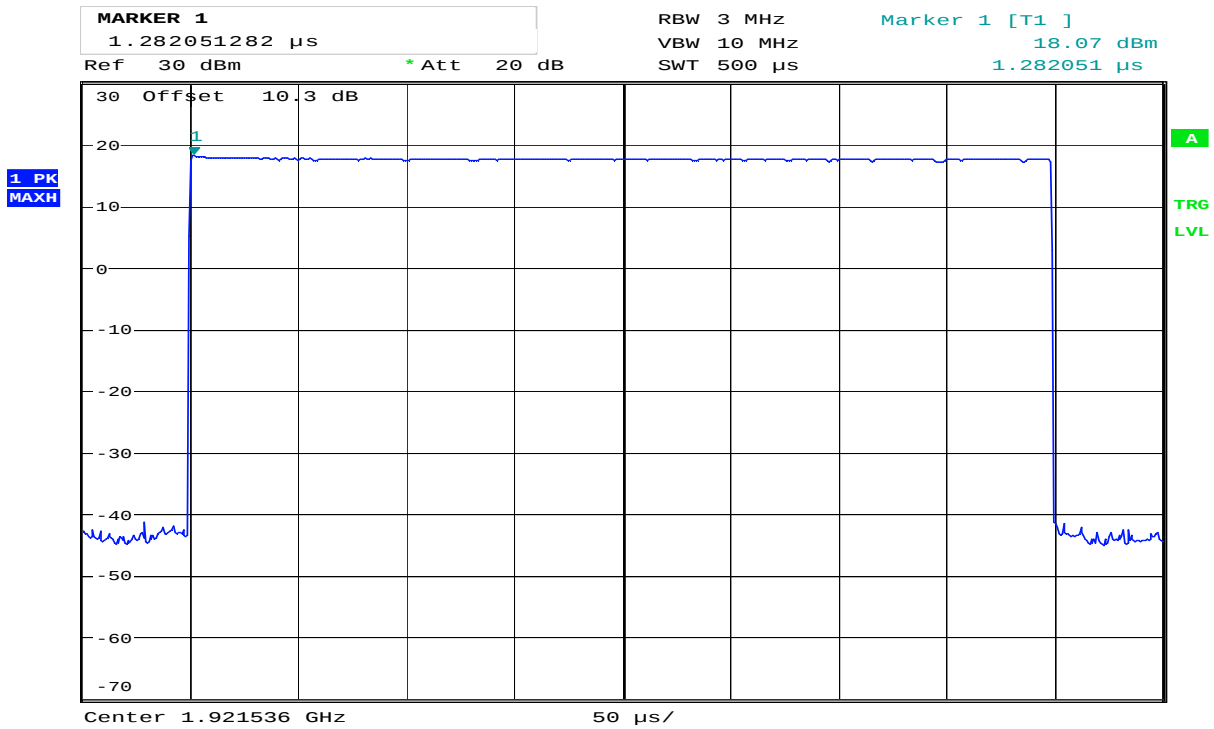


Date: 10.DEC.2013 14:40:39

Lower Channel

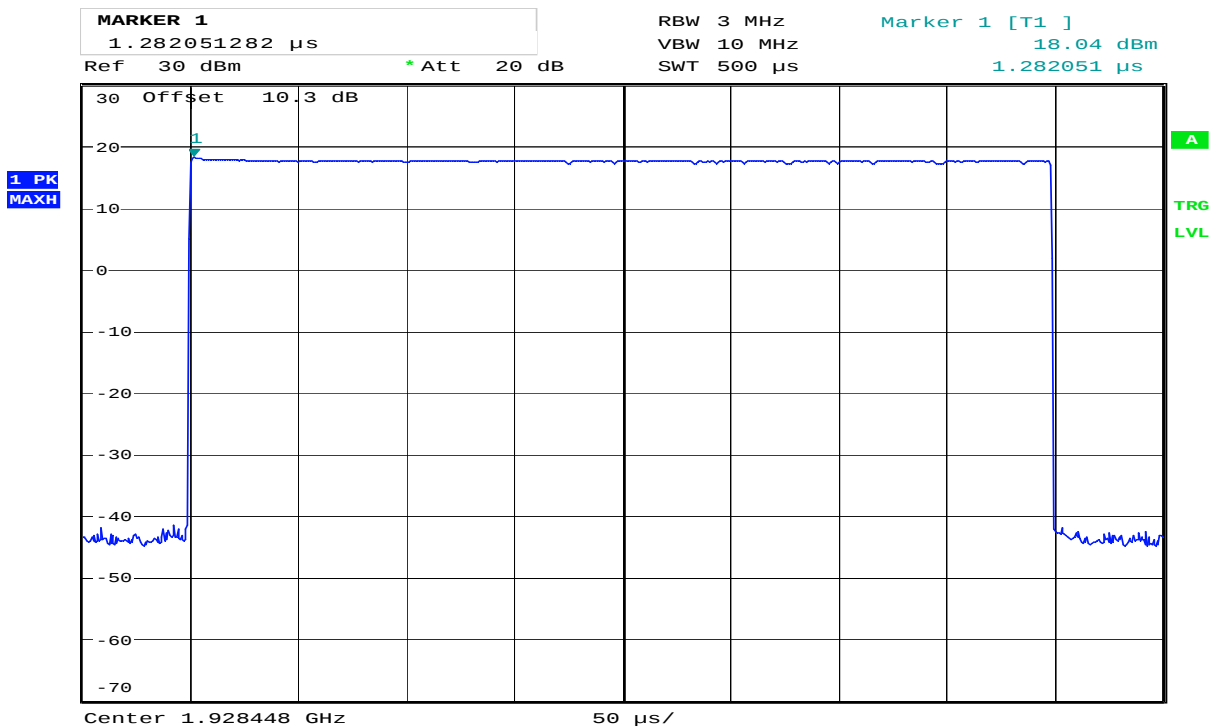

Date: 10.DEC.2013 14:41:12

Upper Channel

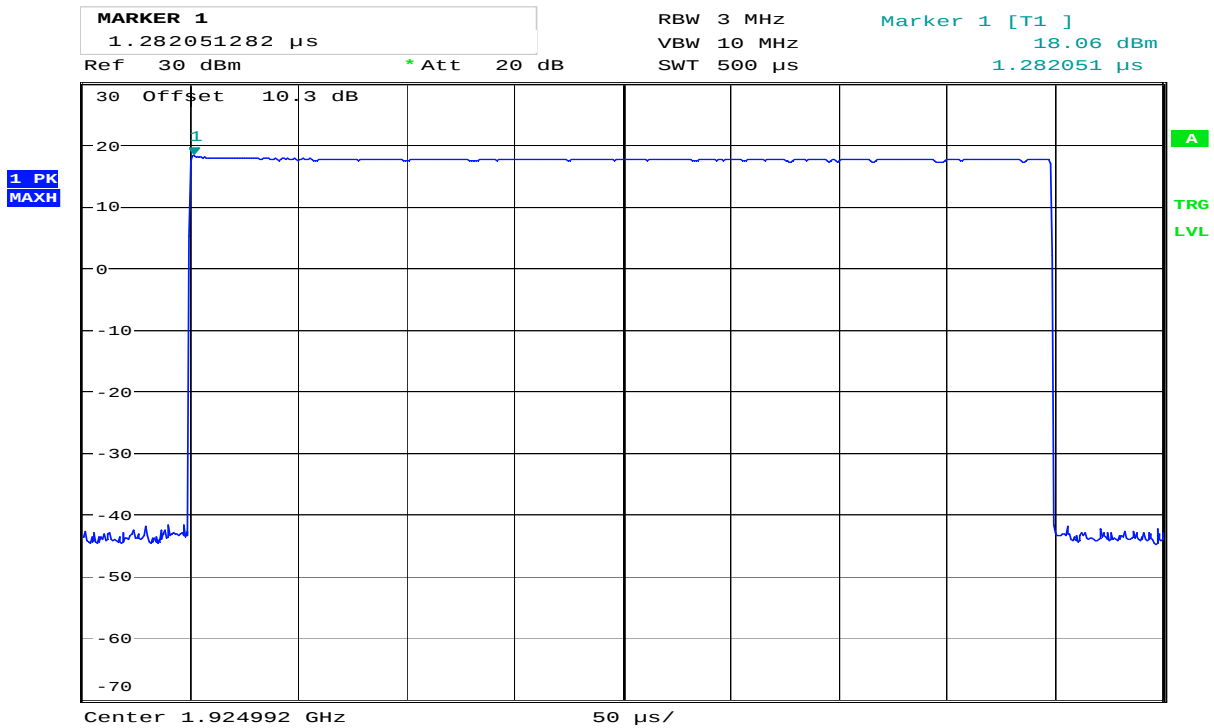

Date: 10.DEC.2013 14:39:05

Middle Channel

3.9 Emission Bandwidth *B*

Test Method:

ANSI C63.17, clause 6.1.3.

Test Results: Complies

Measurement Data:

Channel No.	Frequency (MHz)	26 dB Bandwidth <i>B</i> (kHz)
4	1921.536	1378
0	1928.448	1386

Channel No.	Frequency (MHz)	99% Bandwidth (kHz)
2	1924.992	1226

Channel No.	Frequency (MHz)	6 dB Bandwidth (kHz)
4	1921.536	N/A
0	1928.448	N/A
Channel No.	Frequency (MHz)	12 dB Bandwidth (kHz)
4	1921.536	N/A
0	1928.448	N/A


Requirements, FCC 15.323(a)

The 26 dB Bandwidth *B* shall be larger than 50 kHz and less than 2.5 MHz.

Requirements, RSS-213 Issue 2, clause 6.4


The 99% Bandwidth shall be larger than 50 kHz and less than 2.5 MHz.

No requirements for 6 and 12 dB Bandwidth. These values are only used for testing Monitoring Bandwidth if the Simple Compliance test fails (ANSI C63.17, clause 7.4).

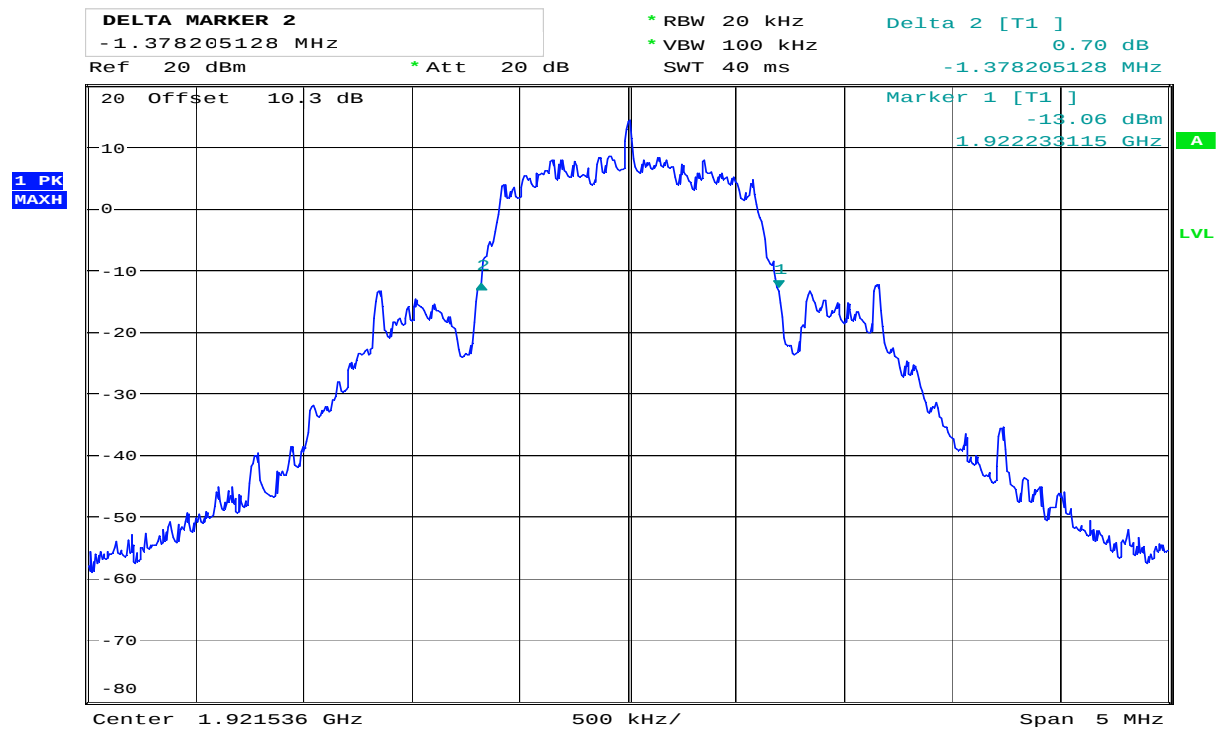


Date: 10.DEC.2013 14:45:39

Emission Bandwidth B, Lower Channel

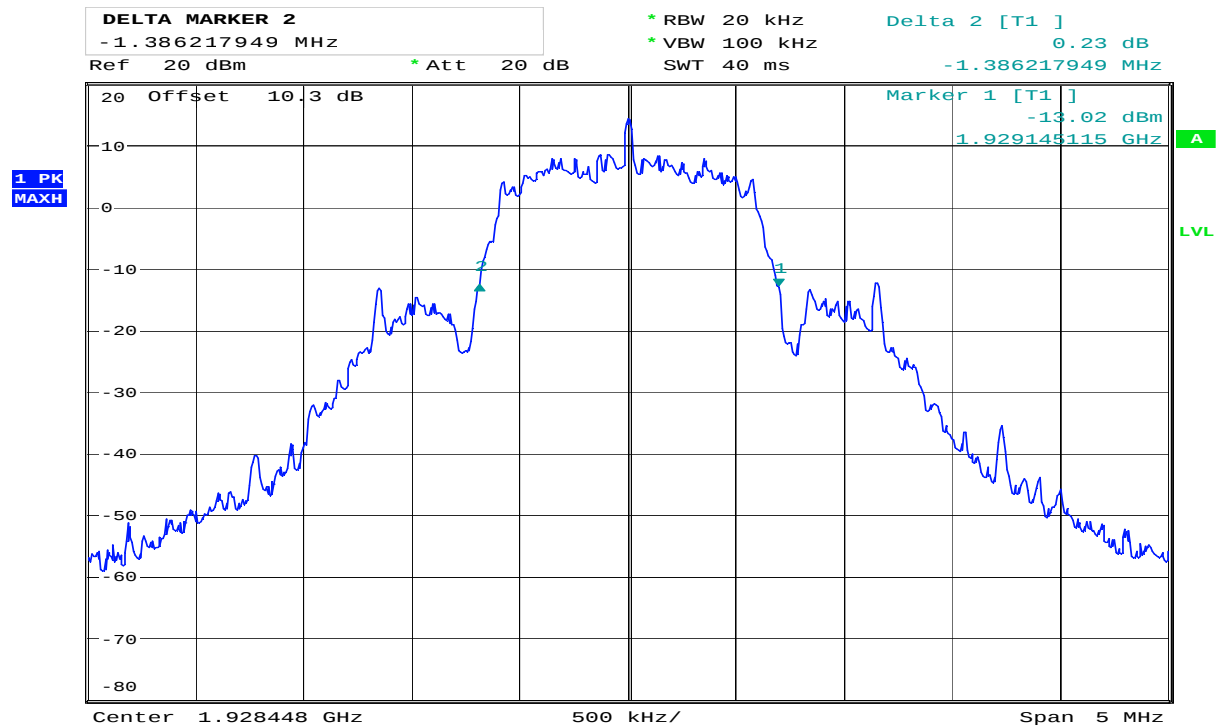

Date: 10.DEC.2013 14:44:00

Emission Bandwidth B, Upper Channel

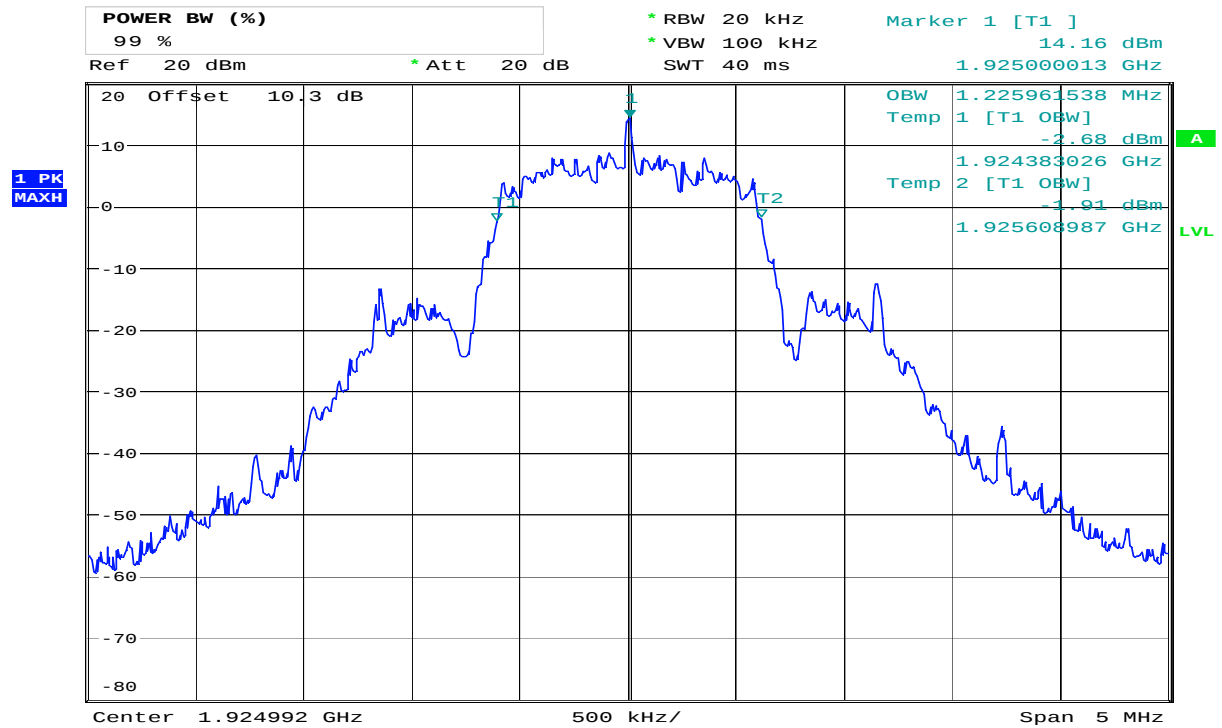

Date: 10.DEC.2013 14:47:24

99% Bandwidth, Middle Channel

3.10 Power Spectral Density

Test Method:

ANSI C63.17, clause 6.1.5.

Test Results: Complies

Measurement Data:

Channel No.	Frequency (MHz)	Power Spectral Density (dBm)
4	1921.536	0.5
0	1928.448	0.9


Averaged over 1000 sweeps.

Requirements, FCC 15.319(d)

The Power Spectral Density shall be less than 3 mW (4.77 dBm) when averaged over at least 100 sweeps.


Power Spectral Density

Lower Channel:

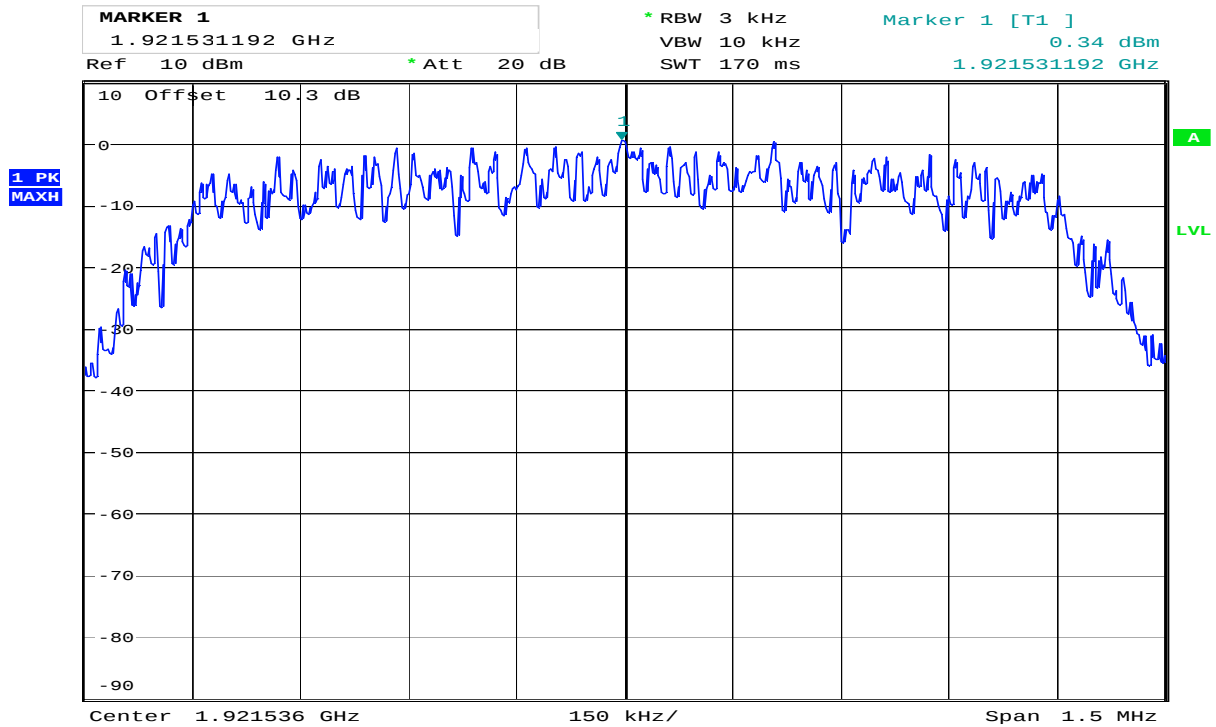

Date: 10.DEC.2013 15:15:25


Overview

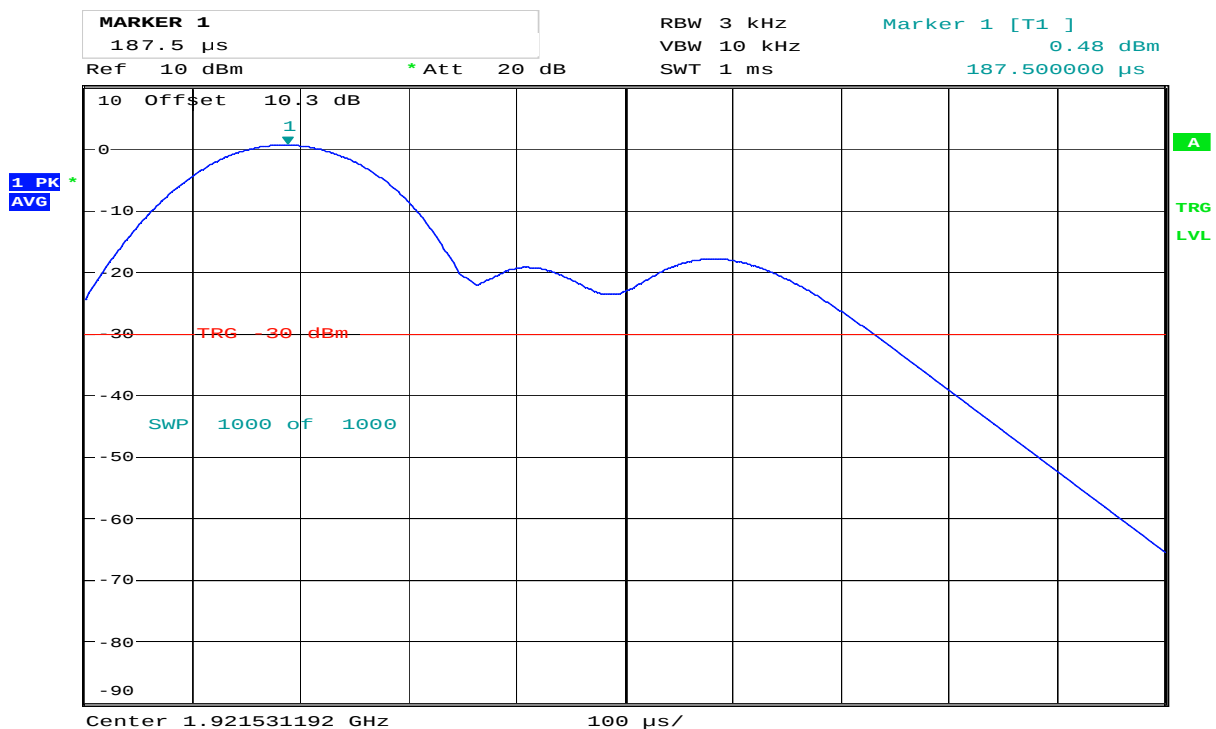

Date: 10.DEC.2013 15:17:33


Averaged, 1000 Sweeps

Upper Channel:

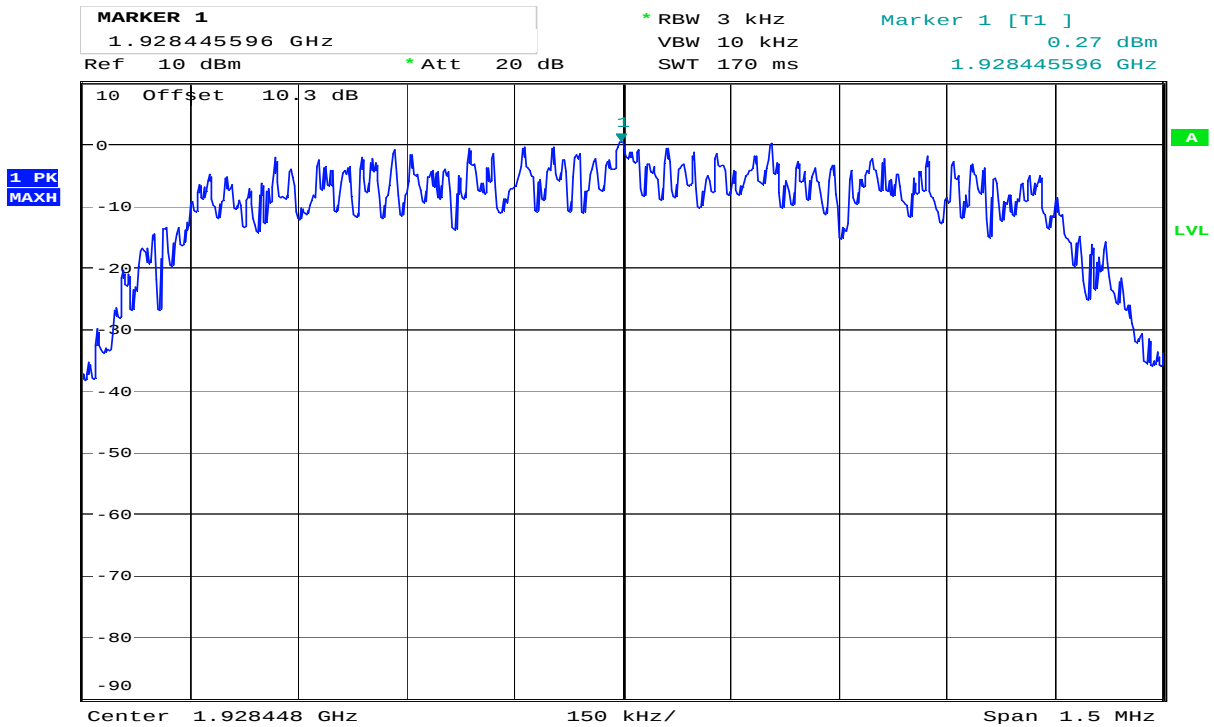

Date: 10.DEC.2013 15:08:16

Overview

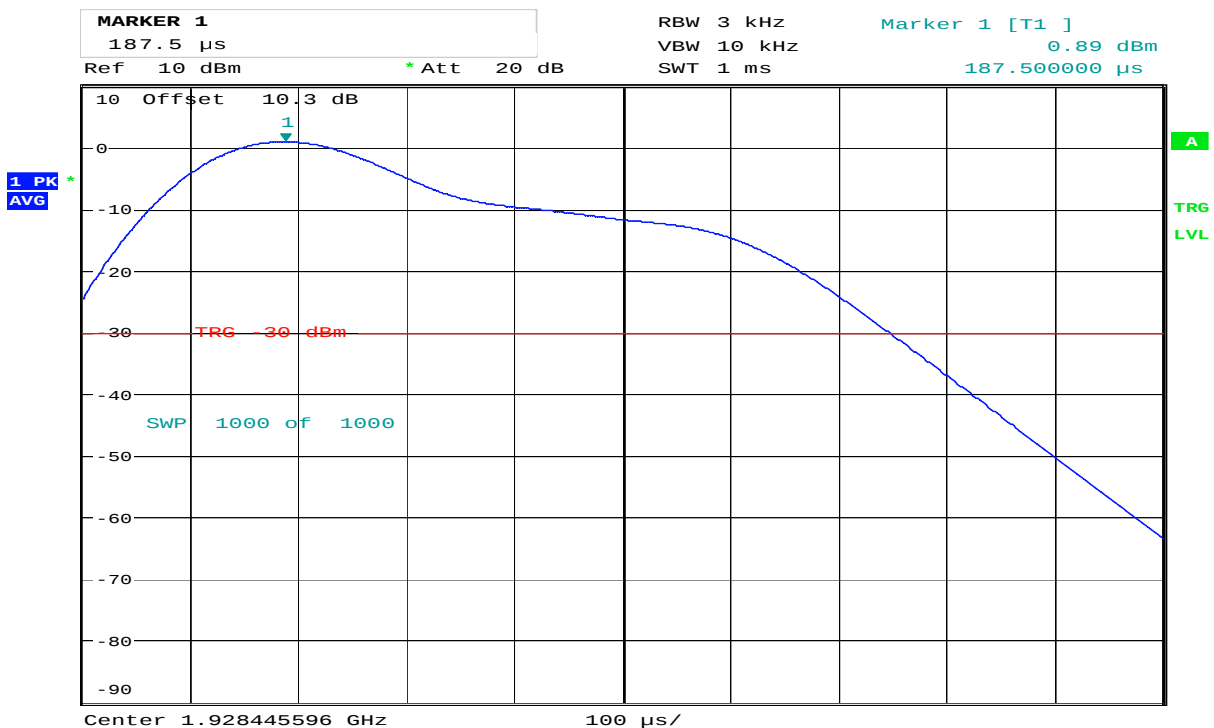

Date: 10.DEC.2013 15:10:15

Averaged, 1000 Sweeps

3.11 In-Band Unwanted Emissions, Conducted

Test Method:

ANSI C63.17, clause 6.1.6.1.

Test Results: Complies

Measurement Data:


See plots.

Requirements, FCC 15.323(d):

$B < f \leq 2B$: at least 30 dB below max. permitted peak power

$2B < f \leq 3B$: at least 50 dB below max. permitted peak power


$3B < f \leq$ UPCS Band Edge : at least 60 dB below max. permitted peak power

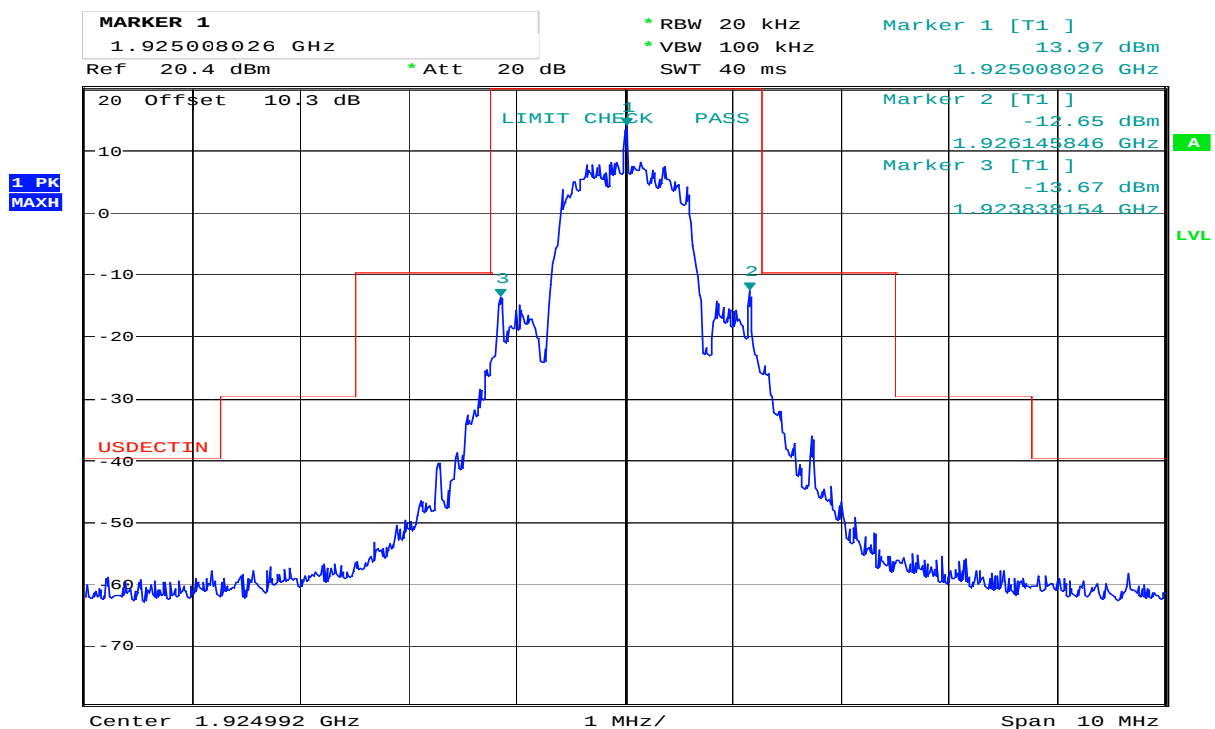

Date: 10.DEC.2013 14:49:34


Middle Channel

In-Band Unwanted Emissions, Conducted

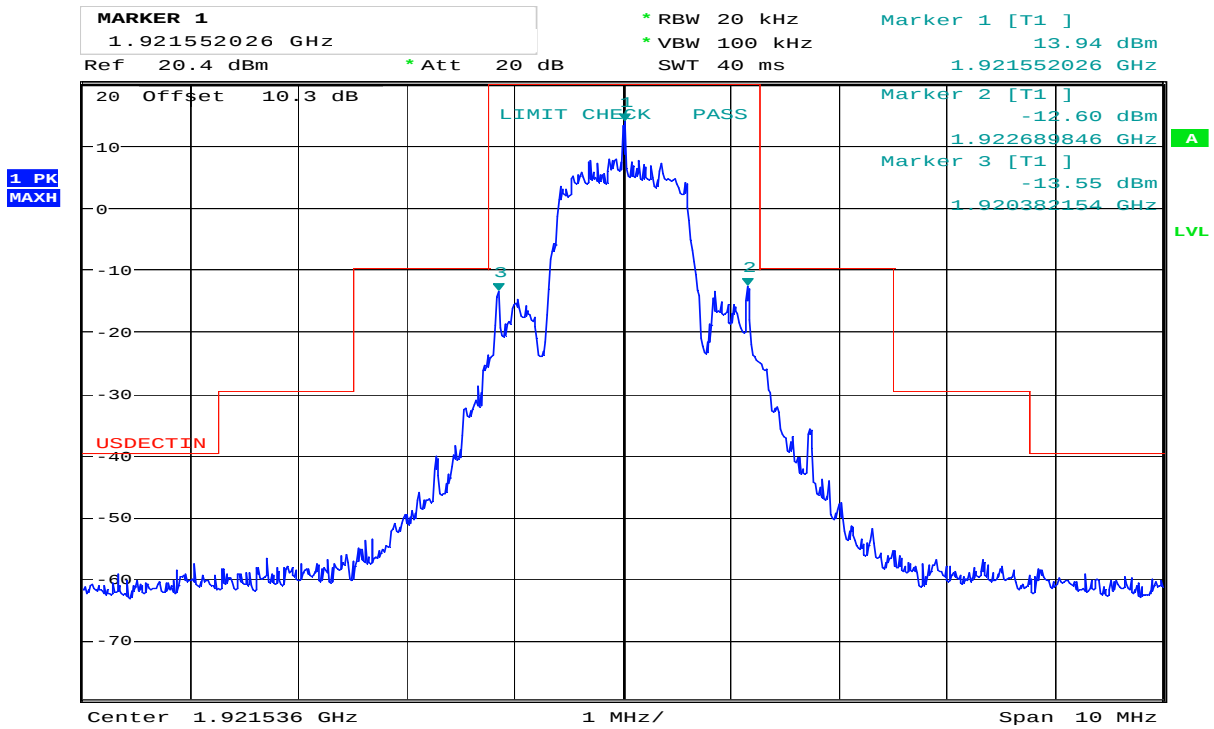

Date: 10.DEC.2013 14:51:53

Lower Channel

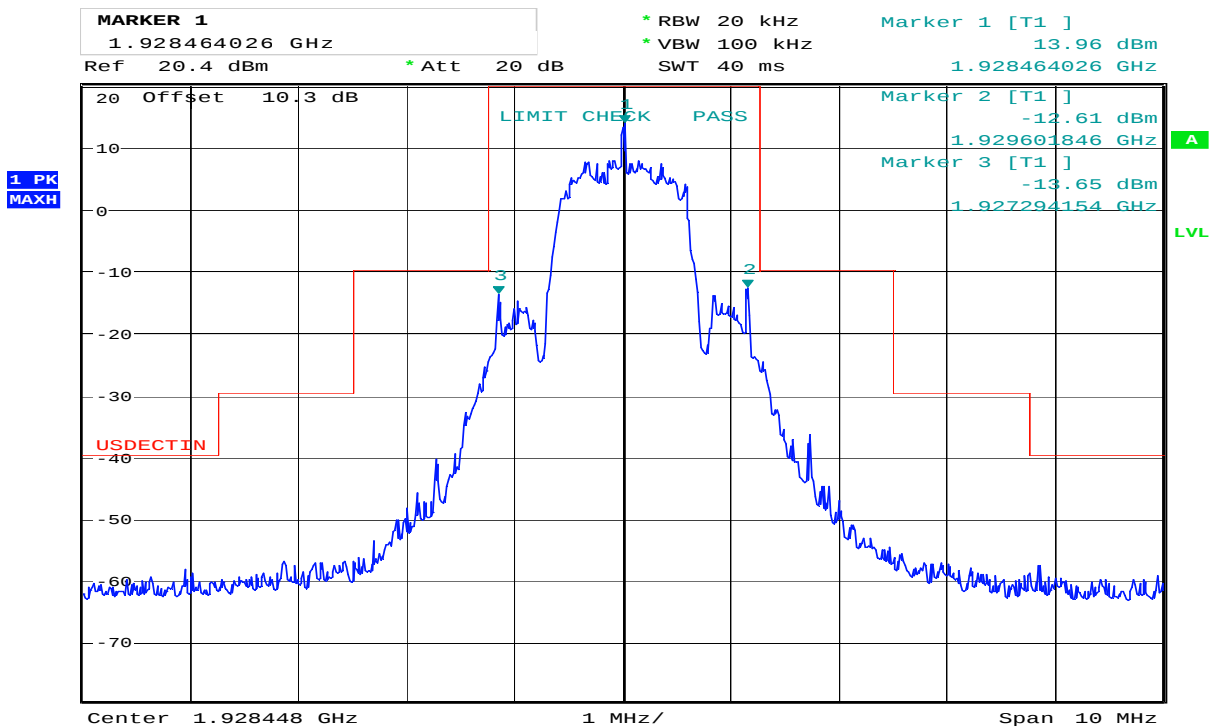

Date: 10.DEC.2013 14:50:50

Upper Channel

3.12 Out-of-band Emissions, Conducted

Test Method:

ANSI C63.17, clause 6.1.6.2.

Test Results: Complies

Measurement Data:


See plots.

Requirements, FCC 15.323(d):


$f \leq 1.25\text{MHz}$ outside UPCS band :	$\leq -9.5\text{dBm}$
$1.25\text{MHz} \leq f \leq 2.5\text{MHz}$ outside UPCS band :	$\leq -29.5 \text{ dBm}$
$f \geq 2.5\text{MHz}$ outside UPCS band :	$\leq -39.5 \text{ dBm}$

Out-of-Band Emissions, Conducted

Lower Channel:

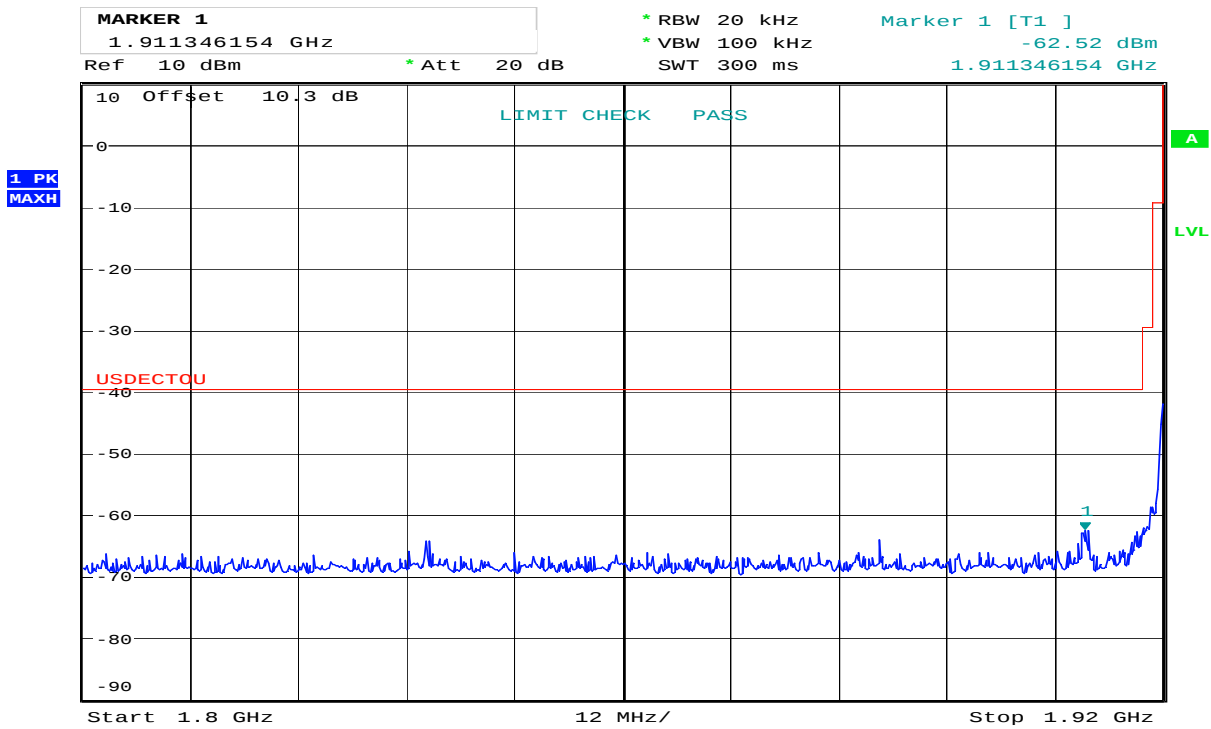


Date: 10.DEC.2013 15:00:23

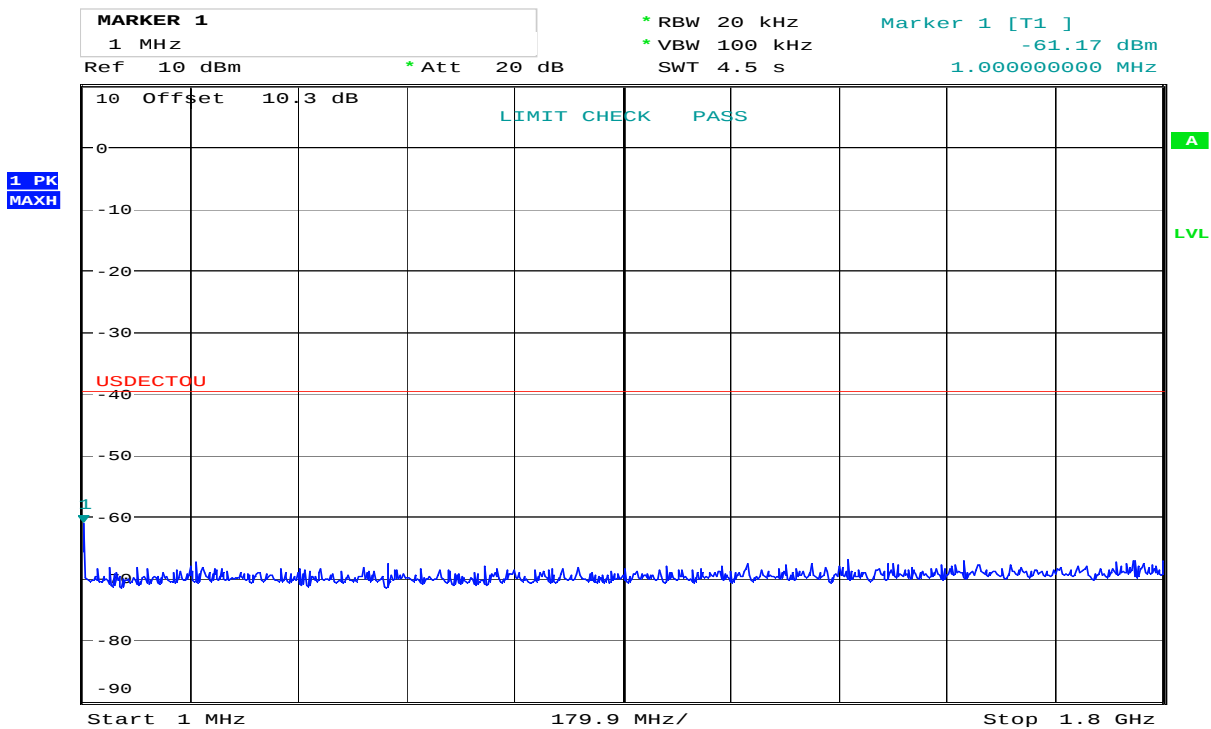


Date: 10.DEC.2013 14:59:36

Out-of-Band Emissions, Conducted

Upper Channel:

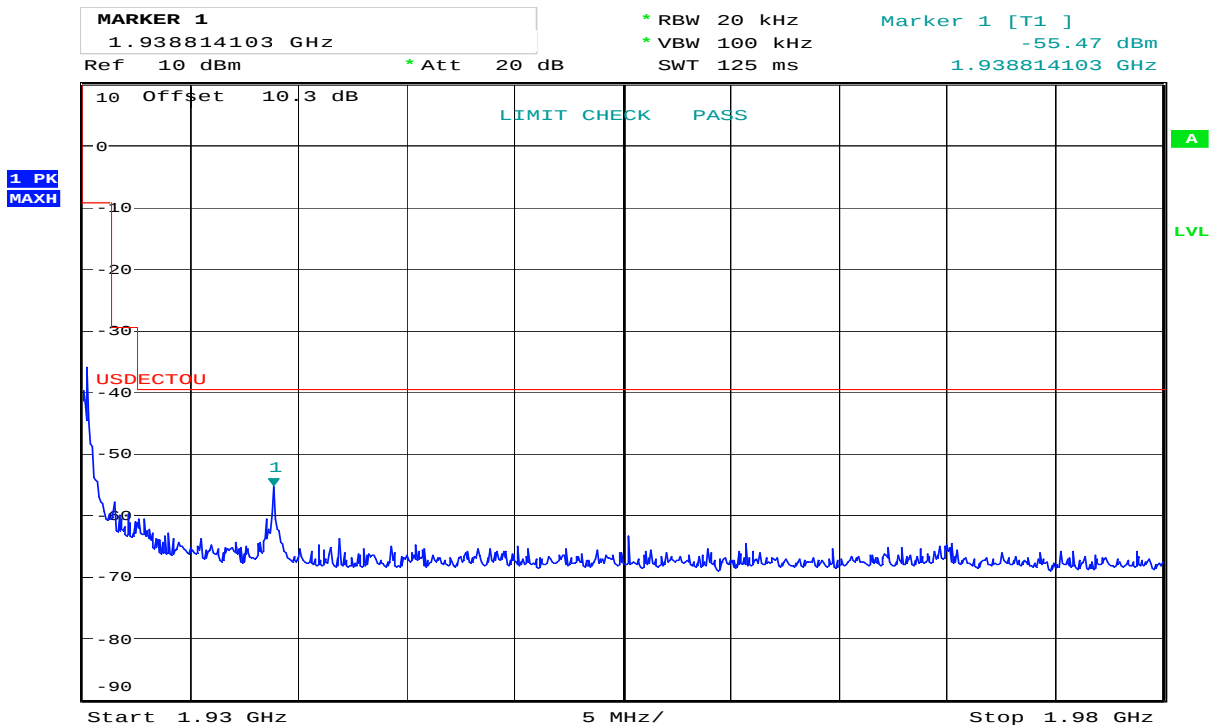


Date: 10.DEC.2013 15:02:18

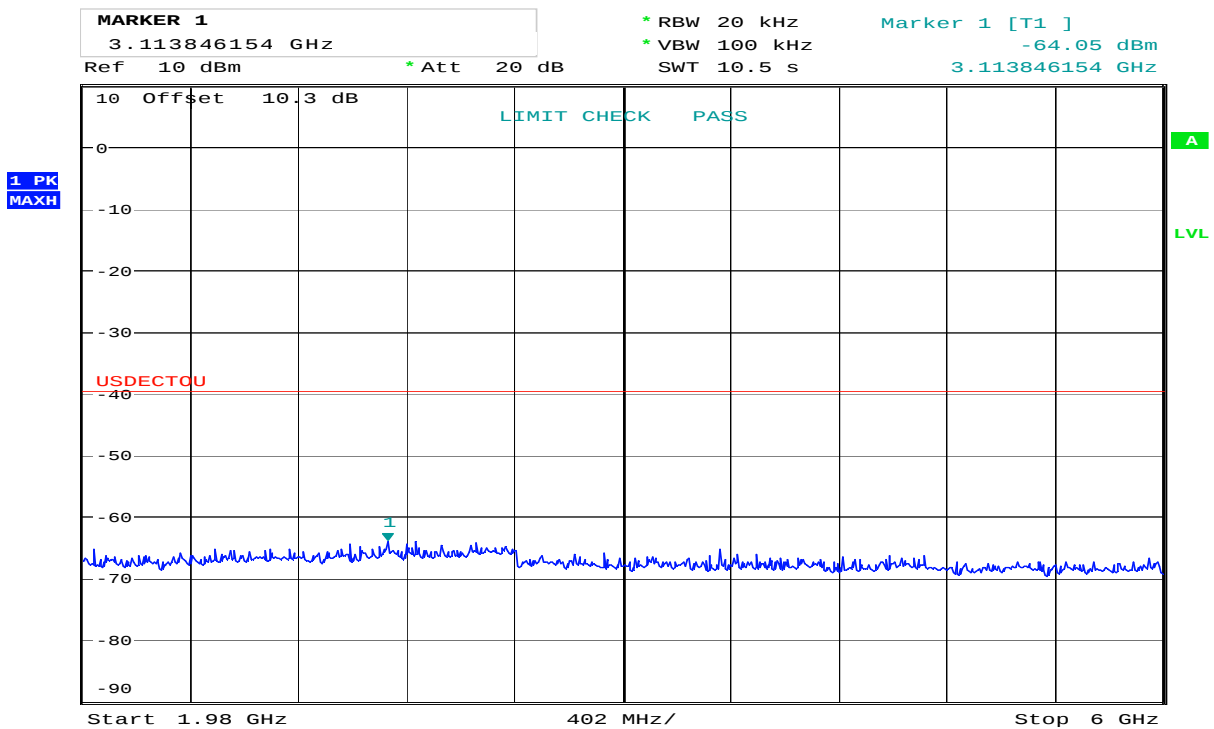


Date: 10.DEC.2013 15:03:51

Out-of-Band Emissions, Conducted

Upper Channel:

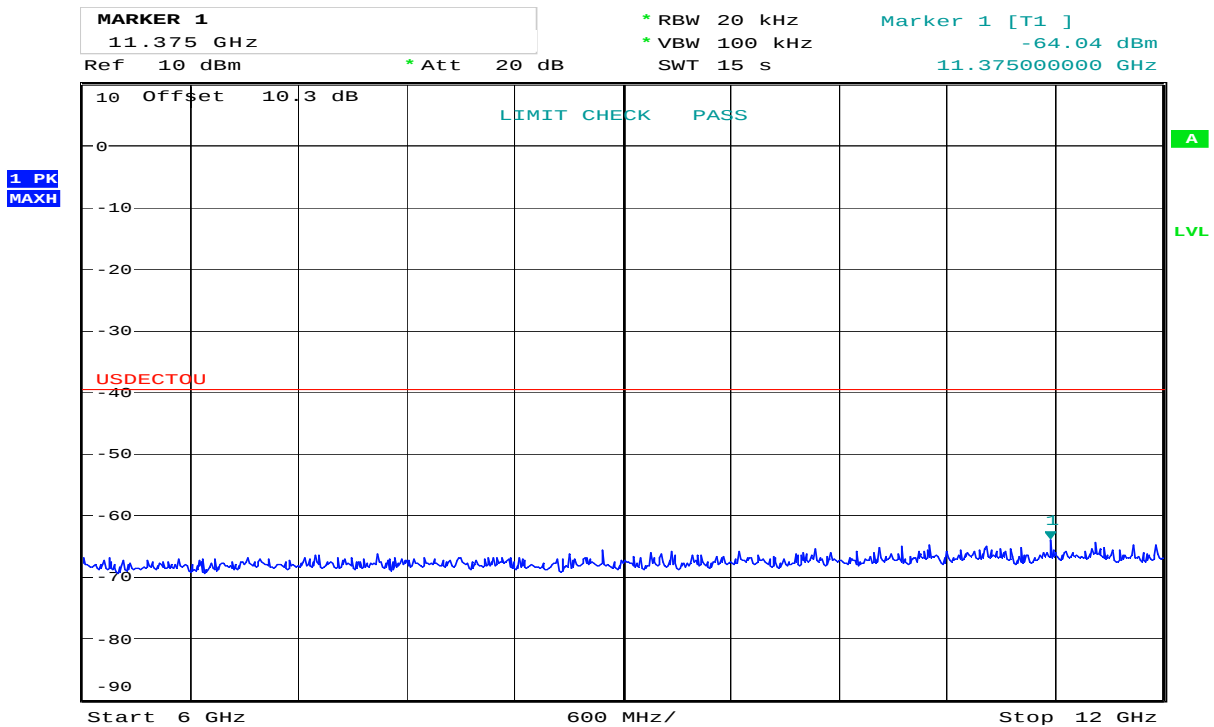

Date: 10.DEC.2013 15:04:53

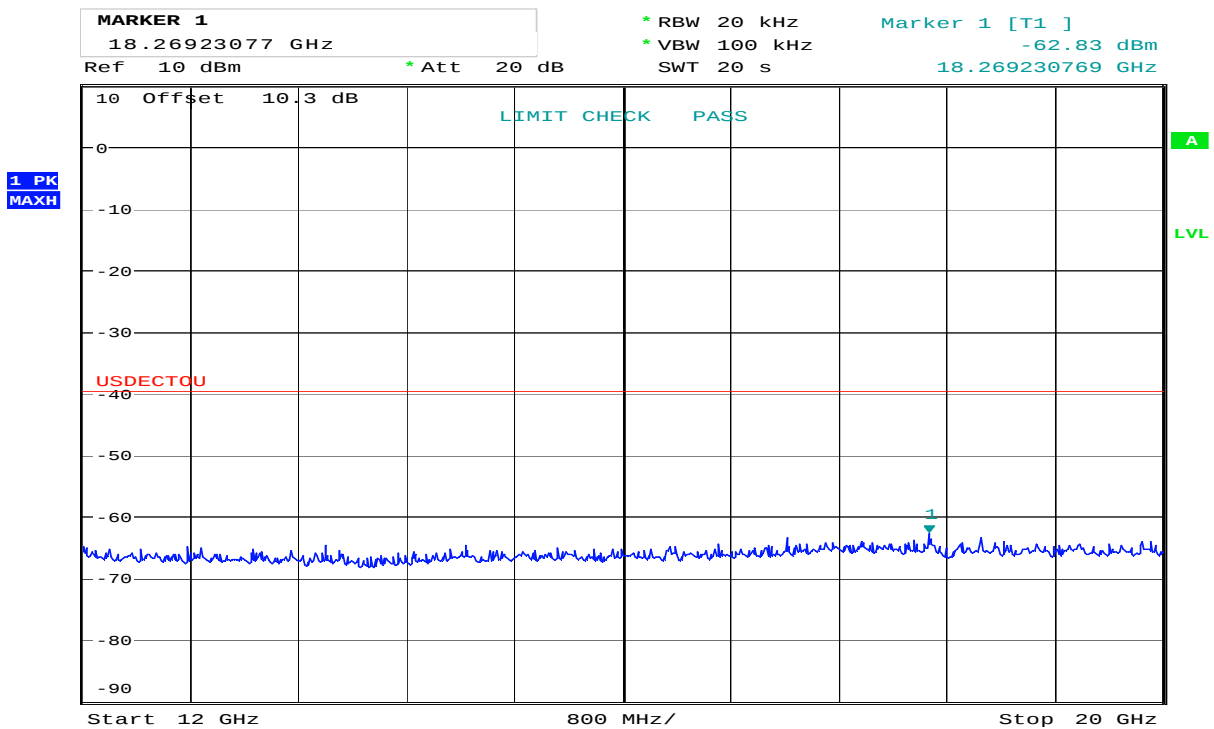

Date: 10.DEC.2013 15:05:58

3.13 Carrier Frequency Stability

Test Method:

ANSI C63.17, clause 6.2.1.

Test Results: Complies

Measurement Data:

The Frequency Stability is measured with a R&S CMD60 DECT Tester. The CMD60 was logged by a computer programmed to get new readings as fast as possible (about 3 readings per second) over the noted time period or number of readings. The peak-to-peak difference was recorded and the mean value and deviation in ppm was calculated.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

Carrier Frequency Stability over Time at Nominal Temperature

Average Mean Carrier Frequency (MHz)	Max. Diff. (kHz)	Min. Diff. (kHz)	Max. Dev. (ppm)	Limit
1924.993350	2.301	0.331	0.5	±10 ppm

Deviation ppm = ((Diff. - Mean Diff) / Mean Carrier Freq.) x 10⁶

Deviation (ppm) is calculated from 3000 readings.

Frequency Stability over Power Supply Voltage at Nominal Temperature

Voltage	Measured Carrier Frequency (MHz)	Difference (kHz)	Deviation (ppm)	Limit
V _{nom}	1924.984101	0	0	±10 ppm
85% of V _{nom}	1924.984118	0.0	0.0	
115% of V _{nom}	1924.984063	0.0	0.0	

Deviation ppm = ((Mean – Measured Frequency) / Mean) x 10⁶

Frequency Stability over Temperature

Temperature	Measured Carrier Frequency (MHz)	Difference (kHz)	Deviation (ppm)	Limit
T = +20 °C	1924.984101	0	0	±10 ppm
T = 0 °C	1924.971801	-12.3	-6.4	
T = +50 °C	1924.985511	1.4	0.7	

Deviation ppm = ((Mean – Measured Frequency) / Mean) x 10⁶

The tested device is designed for indoor use only and is therefore not tested below 0 °C.

3.14 Frame Repetition Stability

Test Method:

ANSI C63.17, clause 6.2.2.

Test Results: Complies

Measurement Data:

The envelope of the RF signal from the EUT is detected with a Crystal Detector and the mean and standard deviation of the frame repetition frequency is then gated over 100 frames and measured with a Frequency Domain Analyzer. The frame repetition stability is 3 times the standard deviation.

Carrier Frequency (MHz)	Mean (Hz)	Standard Deviation (Hz)	Frame Repetition Stability (ppm)
1924.992	100.000	0.0000012	0.037

Limit:

Frame Repetition Stability	±10 ppm (TDMA)
----------------------------	----------------

Ref. FCC 15.323(e), ANSI C63.17, clause 6.2.2

3.15 Frame Period and Jitter

Test Method:

ANSI C63.17, clause 6.2.3.

Test Results: Complies

Measurement Data:

Carrier Frequency (MHz)	Frame Period (ms)	Max Jitter (µs)	3xStandard Deviation of Jitter (µs)
1924.992	10.000	-0.057	-0.028


Max Jitter = $(1 / (\text{Frame period} + \text{Pk-Pk}/2)) - (1/\text{Frame Period})$, when Pk-Pk and Frame Period are in Hz

$3 \times \text{St.Dev. Jitter} = 3 \times (1/(\text{Frame Period} + \text{St.Dev}) - 1/\text{St.Dev}) \times 10^6$

Limit:


Frame Period	20 or 10 ms
Max Jitter	25 µs
3 times St.Dev of Jitter	12.5 µs

Ref. FCC 15.323(e), ANSI C63.17, clause 6.2.3

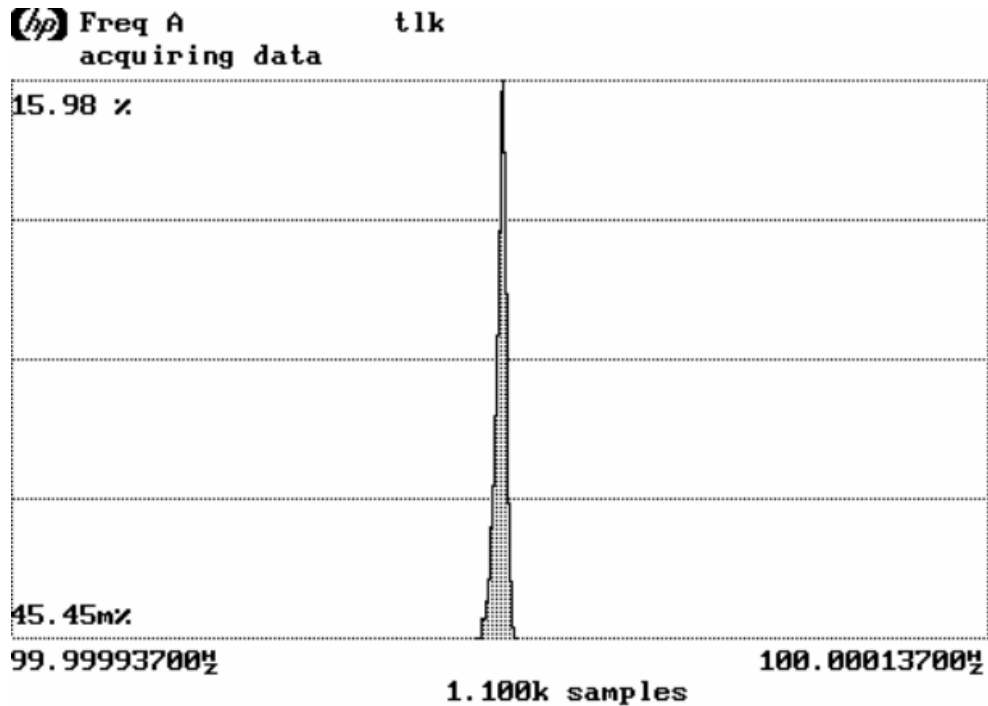

Mean 100.0000371701Hz 1/Mean 10.000ms
Pk-Pk 8.02μHz Std Dev 1.2186μHz

Frame Repetition Stability, Gated over 100 Frames

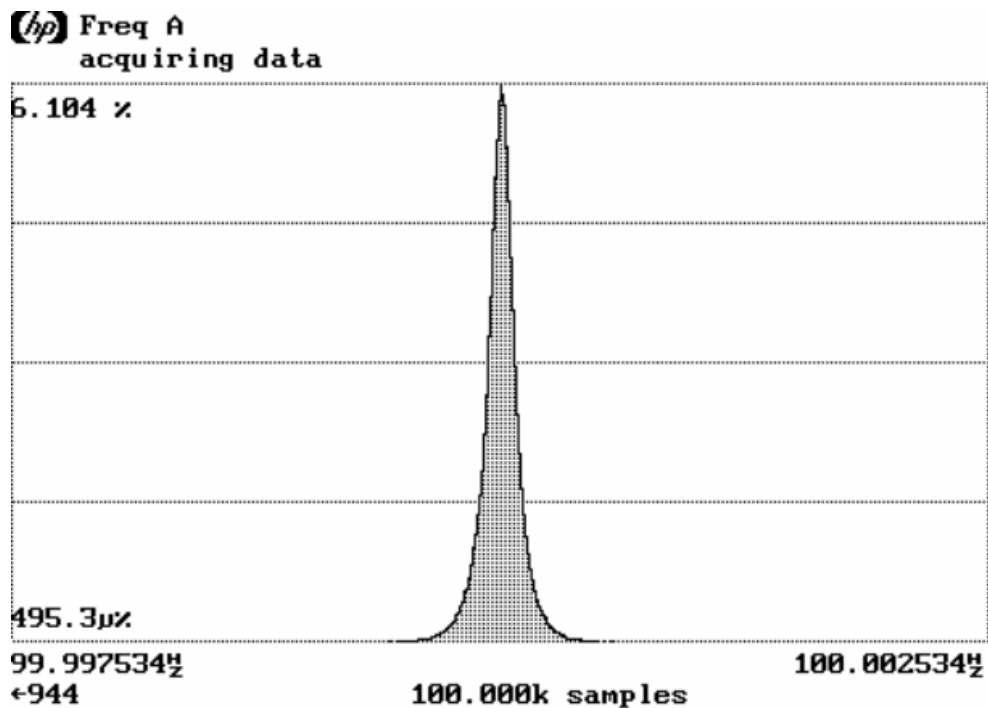

Mean 100.000039692Hz 1/Mean 10.000ms
Pk-Pk 1.147mHz Std Dev 94.077μHz

Frame Period and Jitter

3.16 Monitoring Threshold, Least Interfered Channel

Monitoring Threshold Limits:

Lower Threshold:

$$T_L = 15 \log B - 184 + 30 - P_{EUT} \quad (\text{dBm})$$

Upper Threshold:

$$T_U = 15 \log B - 184 + 50 - P_{EUT} \quad (\text{dBm})$$

B is measured Emission Bandwidth in Hz

P_{EUT} is measured Transmitter Power in dBm

Calculated values:

	FCC 15.323	RSS-213, Issue 2
Lower Threshold	-80.0 dBm	-80.7 dBm
Upper Threshold	N/A	-60.7 dBm

Least Interfered Channel Procedure (LIC) may only be used by systems with more than 20 duplex system access channels. Systems with less than 20 duplex system access channels are not allowed to transmit when interferer level is above Lower Threshold.

Upper Threshold has been removed from FCC 15D but still exists in the current Industry Canada RSS-213.

Measurement Procedure:

The Upper or Lower Threshold is found by the procedure defined in ANSI C63.17 clause 7.3.1 or 7.3.2.

Least Interfered Channel Procedure NOT used:	
Lower Threshold	N/A dBm
Least Interfered Channel Procedure:	
Upper Threshold	-65.8 dBm

Least Interfered Channel (LIC) Procedure Test, FCC 15.323(b), (c)(2) and (c)(5)


ANSI C63.17 clause 7.3.3 ref.	Observation	Verdict
b) $f_1 T_L + 13 \text{ dB}$, f_2 at $T_L + 6 \text{ dB}$	Transmission always on f_2	Pass
c) $f_1 T_L + 6 \text{ dB}$, f_2 at $T_L + 13 \text{ dB}$	Transmission always on f_1	Pass
d) $f_1 T_L + 7 \text{ dB}$, f_2 at T_L	Transmission always on f_2	Pass
e) $f_1 T_L$, f_2 at $T_L + 7 \text{ dB}$	Transmission always on f_1	Pass

Selected Channel Confirmation, FCC 15.323(c)(1) and (5)

ANSI C63.17 clause 7.3.4	Observation	Verdict
b) Shall not transmit on f_1	EUT transmits on f_2	Pass
d) Shall not transmit on f_2	EUT transmits on f_1	Pass

Limits:

	FCC 15.323	RSS-213, Issue 2
Lower Threshold + 6 dB margin	-74.0 dBm	-74.7 dBm
Upper Threshold + 6 dB margin	N/A	-54.7 dBm

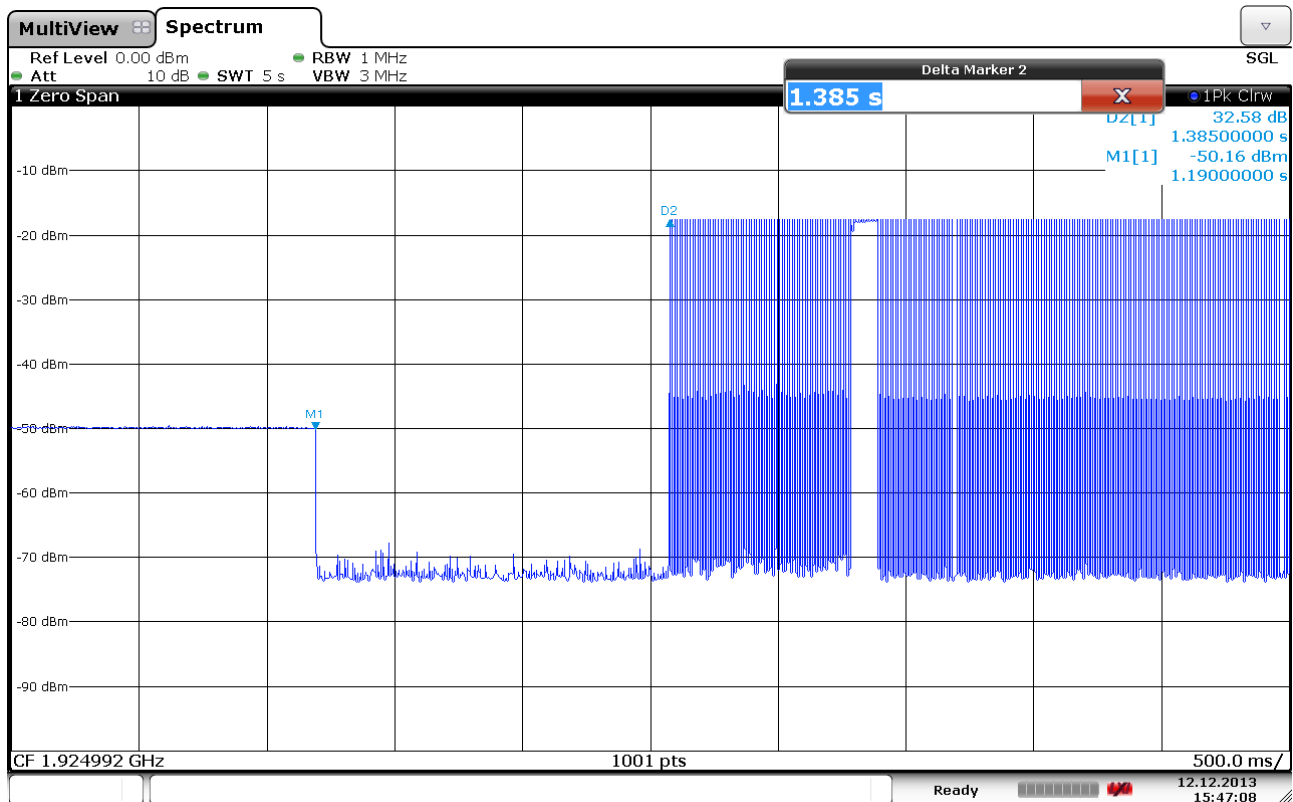

7.3.4 Selected Channel Confirmation, Connection 1.4s After Interferer Removed

3.17 Threshold Monitoring Bandwidth

This test is only required if a dedicated monitoring receiver is used. However, if the test is not carried out the manufacturer shall declare and provide proper evidence that the monitoring is made through the radio receiver used for communication.

Measurement Procedure:

Simple Compliance Test, ANSI C63.17, clause 7.4.1

More Detailed Test, ANSI C63.17, clause 7.4.2

The test is passed if **either** the Simple Compliance Test or the More Detailed test is passed.

During this test the spectrum analyzer is observed visually to see if the EUT transmits or not.

Test Results:

Test performed	Observation	Verdict
Simple Compliance test, at $\pm 30\%$ of B	No transmissions	Pass
More Detailed Test, at -6 dB points	N/A	N/A
More Detailed Test, at -12 dB points	N/A	N/A

The more detailed test must be pass at both the -6 and -12 dB points if the Simple Compliance test fails.

Comment: The Simple Compliance Test was performed with the level at $T_U + U_M + 10$ dB to check that the EUT did not transmit at all.

The tested EUT uses the same receiver for monitoring and communication, this test is therefore not required. However the test has been performed nonetheless and the test is passed.

Limits, FCC 15.323(c)(7):

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.

3.18 Reaction Time and Monitoring Interval

Measurement Procedure

ANSI C63.17, clause 7.5

Test results:

By administrative commands and out-of-operating region interference, the EUT is restricted to operate on a single carrier frequency.

Time-synchronized pulsed interference was then applied on the carrier at pulsed levels $T_U + U_M$ to check that the EUT does not transmit at all. The level was raised 6 dB for part d) with 35 μ s pulses.

The pulses are synchronized with the EUT timeslots and applied centered within all timeslots.


Pulse Width, ref. to ANSI C63.17 clause 7.5	Observation	Verdict
c) > largest of 50 μ s and $50 \cdot \text{SQRT}(1.25/B)$	No transmissions	Pass
d) > largest of 35 μ s and $35 \cdot \text{SQRT}(1.25/B)$, and with interference level raised 6 dB	No transmissions	Pass

Comment: Since B is larger than 1.25 MHz the test was performed with pulse lengths of 50 μ s and 35 μ s.


Limits, FCC 15.323(c)(1), (5) and (7)

The maximum reaction time must be less than $50 \cdot \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds.

If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \cdot \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.

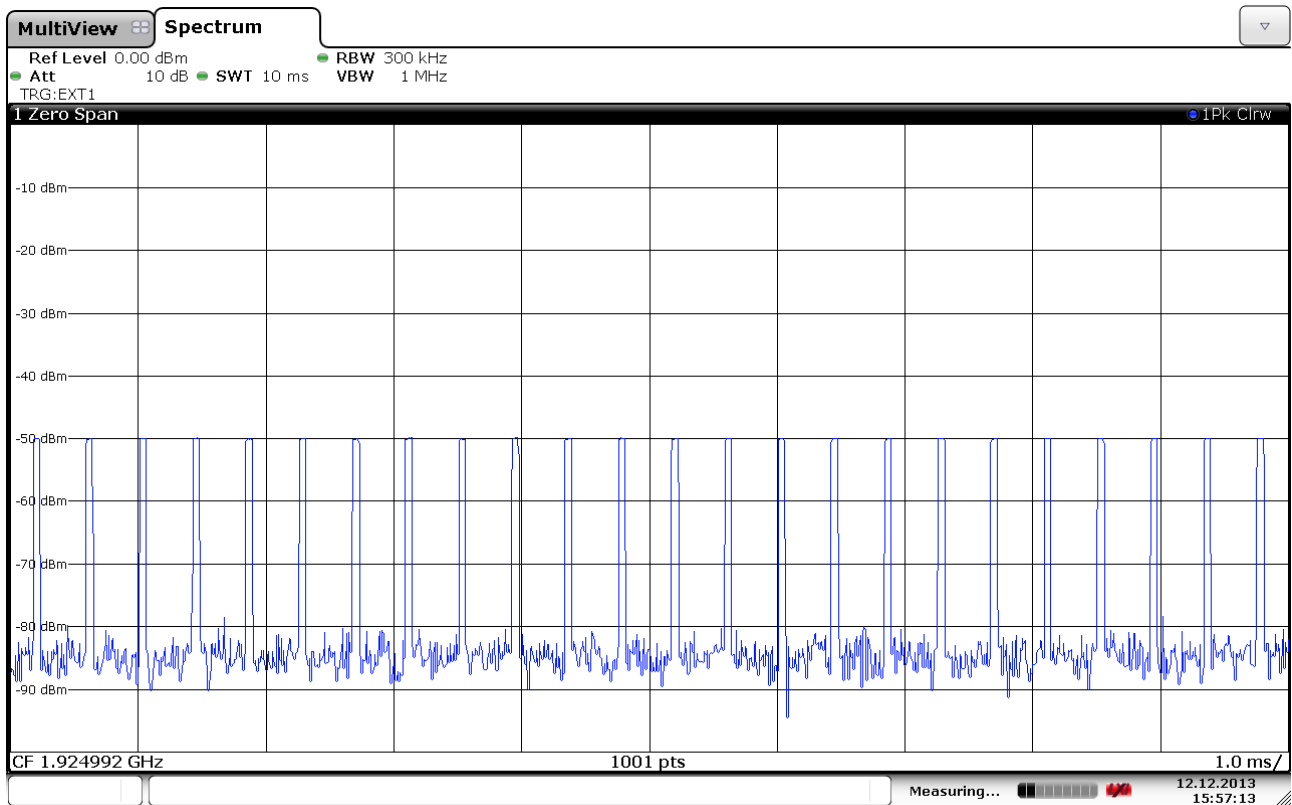

50 µs Pulses

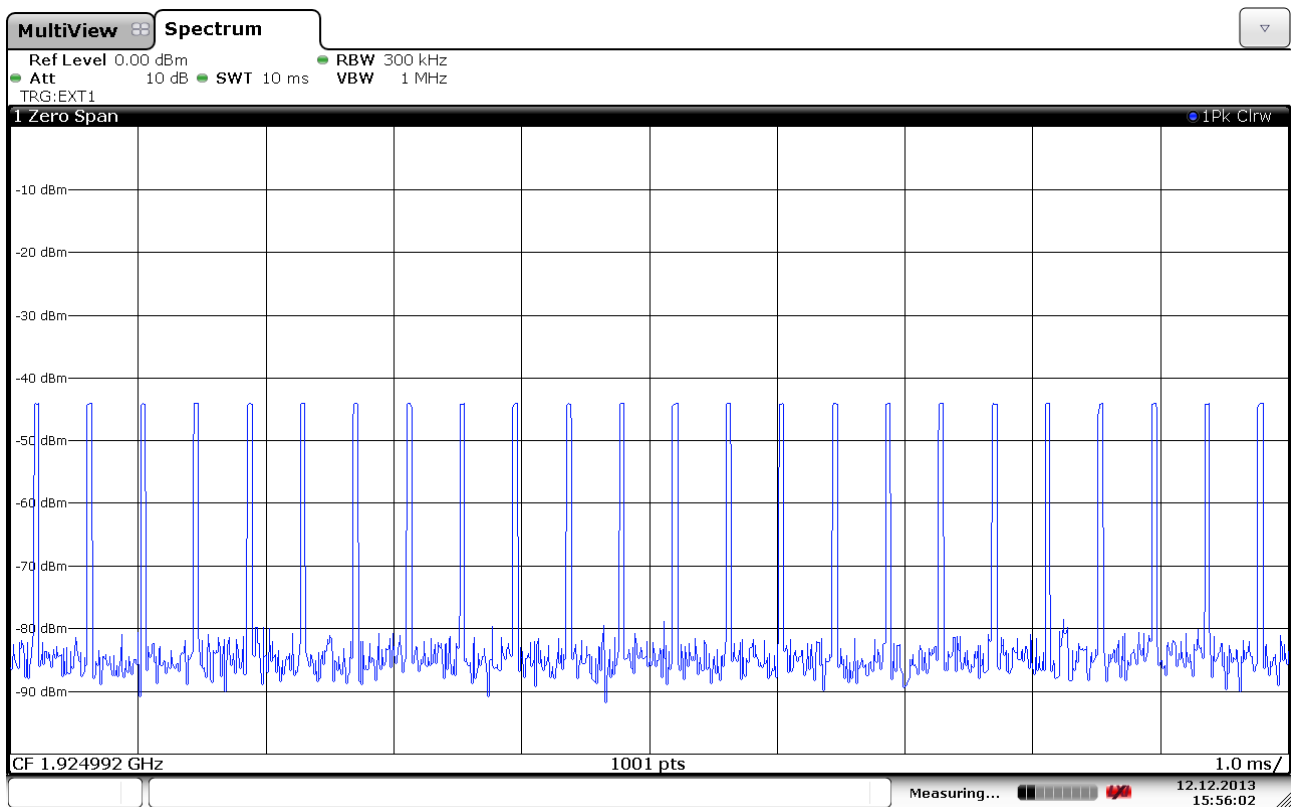

35 µs Pulses

3.19 Time and Spectrum Window Access Procedure

This requirement is only for EUTs which transmit unacknowledged control and signaling information.

Measurement Procedure:

Timing for EUTs using control and signaling channel type transmissions: ANSI C63.17, clause 8.1

Test results:

Access Criteria, ref. to ANSI C63.17 clause 8.1.1	Observation	Verdict
b) Check that the EUT transmits on the interference free time-slot	EUT transmits on the interference free time-slot	Pass
b) The EUT must terminate or pause in its repetitive transmission of the control and signalling channel on the open channel to repeat the access criteria not less frequently than every 30 s	Transmission paused every 1.28 s	Pass

If FCC 15.323(c)(6) option, **If Random Waiting Interval is NOT implemented**

Access Criteria, ref. to ANSI C63.17 clause 8.1.2	Observation	Verdict
b) Check that the EUT changes to an interference-free slot when interference is introduced on the time slot in use	EUT changes to the interference-free time-slot, and stays there	Pass

If FCC 15.323(c)(6) option, **Only if Random Waiting Interval is implemented**

Access Criteria, ref. to ANSI C63.17 clause 8.1.3	Observation	Verdict
b-d) Check that the EUT uses random waiting interval before continuing transmission on an interfered time slot	N/A	N/A

Comment: The tested EUT does not support the Random Waiting Interval option.

Limits:



FCC 15.323(c)(4):

Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.

FCC 15.323(c)(6):



If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available

Access Criteria Check

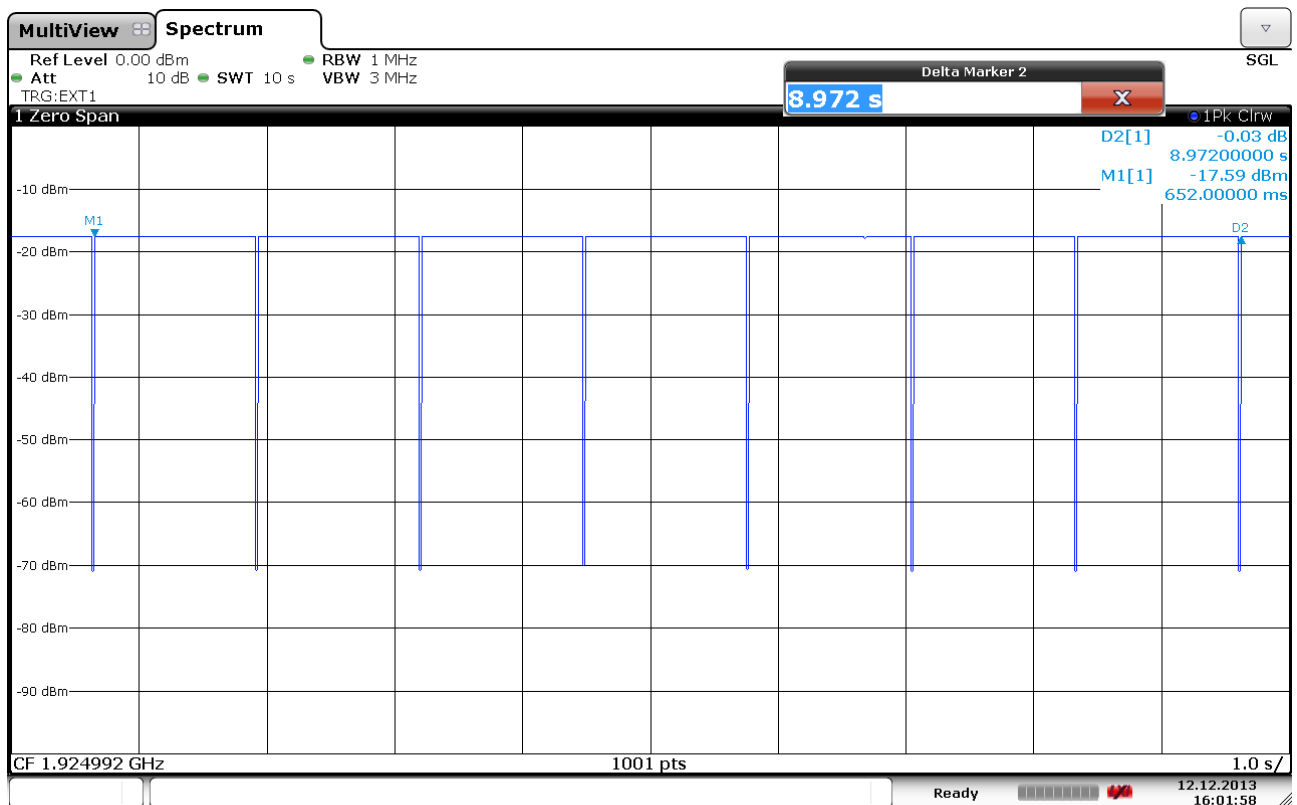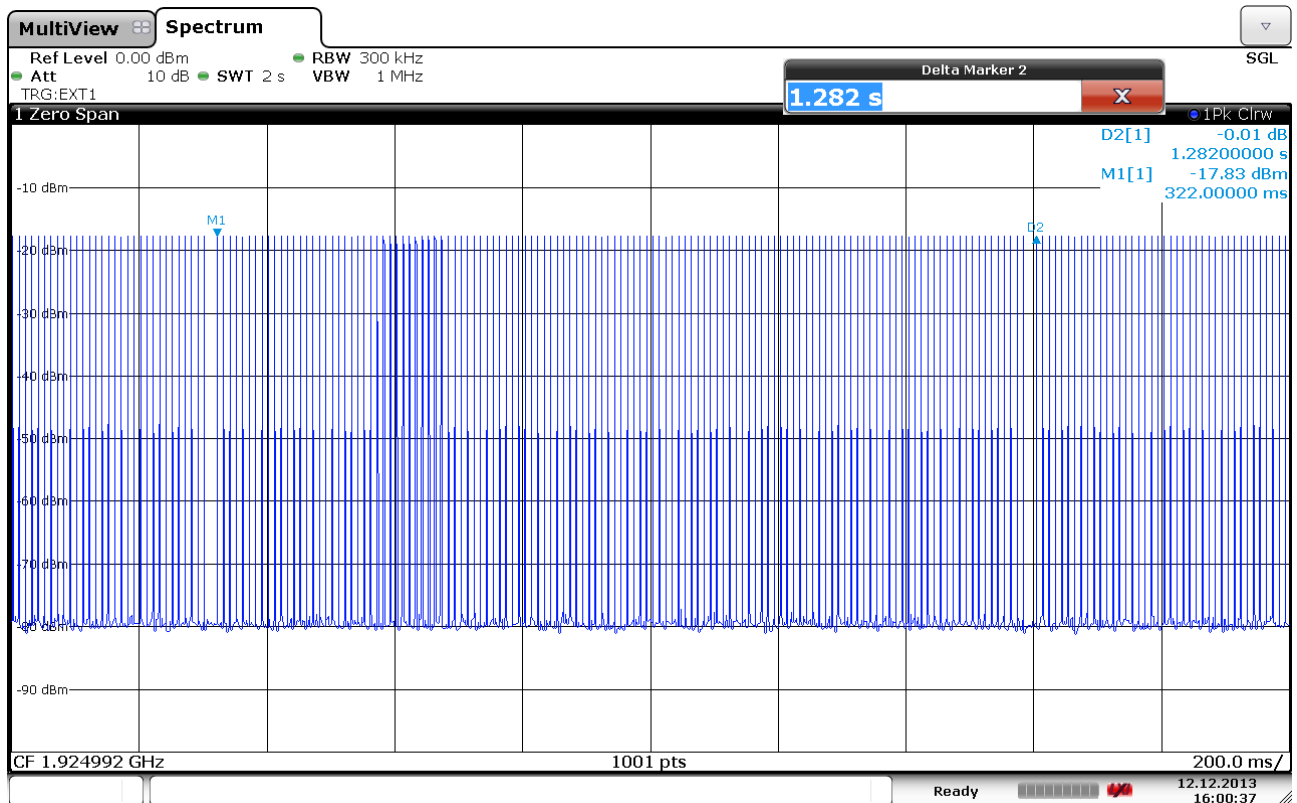

8.1.1b) Access Criteria Check Interval

Access Criteria Check

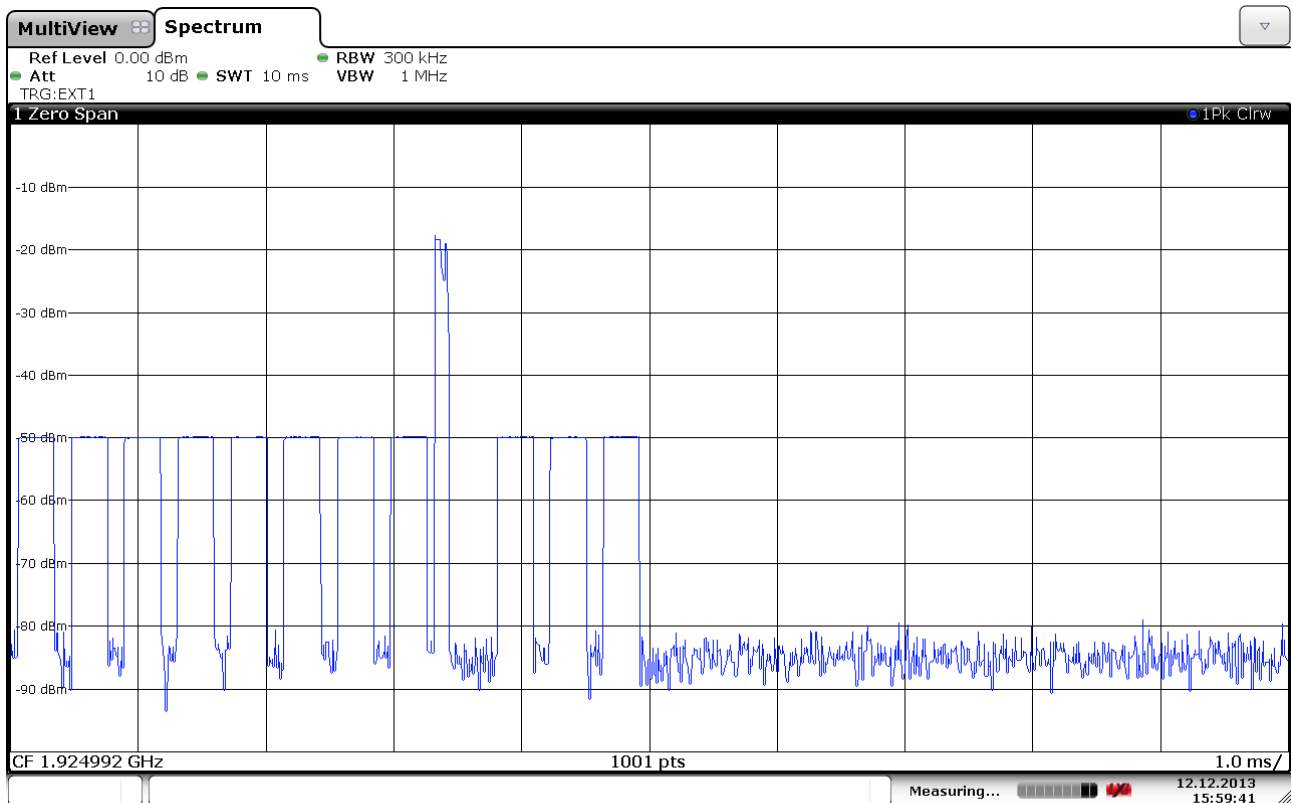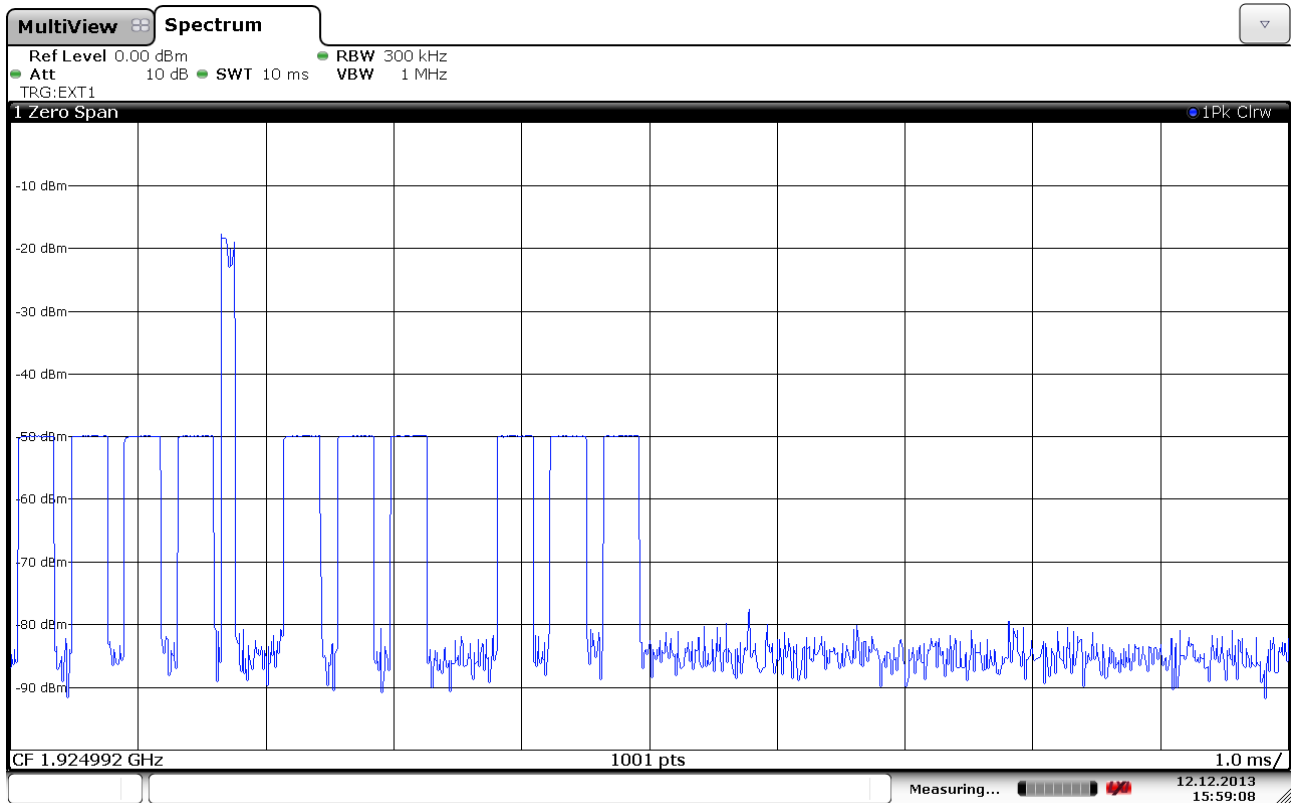

8.1.2b) Access Criteria Functional Test, Before and After

3.20 Acknowledgements and Transmission Duration

Measurement Procedure:

Acknowledgements: ANSI C63.17, clause 8.2.1

Transmission Duration: ANSI C63.17, clause 8.2.2

During the test **Initial transmission without acknowledgements** the signal from the EUT to the companion device is blocked by circulators in addition to the tunable attenuator.

The test **Transmission time after loss of acknowledgements** is performed by cutting-off the signal from the companion device by a RF switch and measuring the time until the EUT stops transmitting.

The **Transmission Duration** test is performed by monitoring the slot in use and measuring the time until the EUT changes to a different slot.

Test Results:

Acknowledgements

Test ref. to ANSI C63.17 clause 8.2.1	Observation	Verdict
a) Initial transmission without acknowledgements	Not applicable for EUT that transmits control and signaling information	N/A
c) Transmission time after loss of acknowledgements	10 sec	Pass

Transmission Duration

Test ref. to ANSI C63.17 clause 8.2.2	Observation	Verdict
b) Transmission duration on same time and frequency window	Only for initiating device that controls which time slot is used	N/A

Comment: /

Limits, FCC 15.323(c)(3) and (4)

Occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease.

Periodic acknowledgements must be received at least every 30 seconds or transmission must cease.

Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.

3.21 Dual Access Criteria Check

Measurement Procedure:

EUTs that does not implement the Upper Threshold: ANSI C63.17, clause 8.3.1

EUTs that implement the Upper Threshold: ANSI C63.17, clause 8.3.2

This test is required for equipment that uses the access criteria in FCC 15.323(c)(10).

Test Results:

EUTs that Implements the Upper Threshold:

Test ref. to ANSI C63.17 clause 8.3.2	Observation	Verdict
b) EUT is restricted to a single carrier f_i for TDMA systems. The Test is Pass if EUT can transmit	N/A	N/A
c) d) Transmission on interference-free receive time/spectrum window	N/A	N/A
e) f) Transmission on interference-free transmit time/spectrum window	N/A	N/A
g) Transmission not possible on any time/spectrum window	N/A	N/A

Comment: This test is only applicable for EUT that can be initiating device.

Limits, FCC 15.323(c)(10)

An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

3.22 Alternative Monitoring Interval

Test procedure described in ANSI C63.17 clause 8.4.

This test is required if the EUT implements the provisions of FCC 15.323(c)(11).

Test result:

Not Tested. The tested EUT does not implement this provision. See manufacturers' declaration.

4 Test Setups

4.1 Frequency Measurements




Test equipment included: 5, 9, 28

Test Set-up 1

This setup is used for measuring Carrier frequency stability at normal and extreme temperatures.

The EUT was in loopback-mode and was controlled with the CMD60 for this test. The modulation pattern was set to 01010101...

4.2 Timing Measurements




Test equipment included: 5, 7, 9, 28

Test Set-up 2

This setup is used for measuring Frame repetition stability, Frame period and Jitter.

4.3 Conducted Emission Test




Test equipment included: 1, 2, 9, 26

Test Set-up 3

This setup is used for all conducted emission tests.


4.4 Power Line Conducted Emissions Test

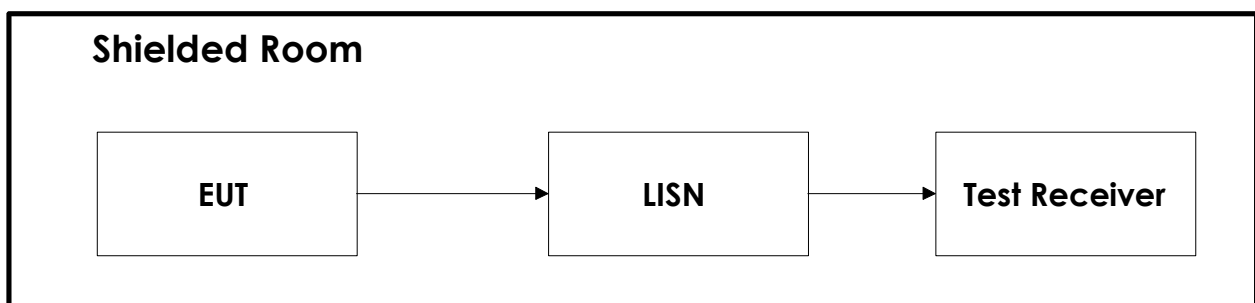

Test equipment: 8, 17, 18, 22, 27

Test Set-Up 5

4.5 Monitoring Tests

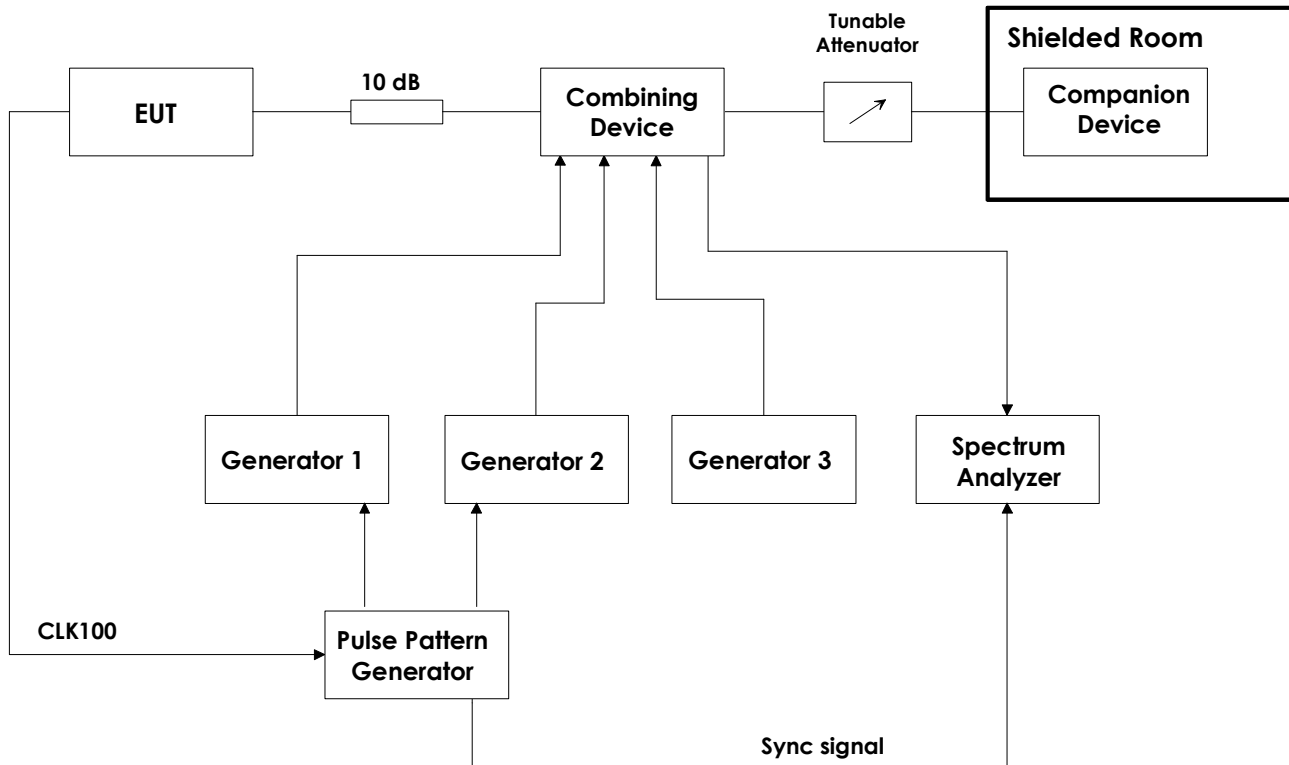

Test equipment: 2, 3, 4, 6, 9, 10, 11, 12, 13, 14, 15, 19, 23, 24, 25, 26, 29

Test Set-Up 6

This test setup is used for all Monitoring and Time and Spectrum Access Procedure tests. The path loss from the signal generators to the EUT is measured with a power meter before the testing is started.

The CLK100 is used to synchronize the Pulse-/ Pattern generator to the start of the DECT frame, this signal always comes from the base station. If the EUT is a DECT Portable Part (i.e. a handset) the CLK100 signal will come from the Companion Device.

The sync signal to the Spectrum Analyzer is the CLK100 signal that is regenerated in the Pulse-/ Pattern Generator, this is used to synchronize the Spectrum Analyzer to the DECT frame when in zero span. The Pulse-/ Pattern Generator is used for tests that require time synchronized pulses or blocking of specific time slots.

5 Test Equipment Used

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Testhouse.

No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1	FSU26	Spectrum Analyzer	Rohde & Schwarz	LR 1504	2013.12.05	2015.12.05
2	SME03	Signal generator	Rohde & Schwarz	LR 1238	2013.03.19	2015.03.19
3	SMIQ03B	Signal generator	Rohde & Schwarz	LR 1516	2012.11.02	2014.11.02
4	SMHU54	Signal generator	Rohde & Schwarz	LR 1240	2012.06.19	2014.06.19
5	53310A	Modulation Domain Analyzer	Hewlett Packard	LR 1483	2013.08.14	2015.08.14
6	81104A	Pulse-/ Pattern Generator	Agilent	LR 1502	2013.03.19	2015.03.19
7	8470B	Crystal Detector	Hewlett Packard	LR 1207	N/A	
8	ESHS10	Measuring Receiver	Rohde & Schwarz	N- 3528	2012.06.28	2014.06.28
9	4768-10	Attenuator	Narda	LR1356	Cal b4 use	
10	745-69	Step Attenuator	Narda	LR 1442	N/A	
11	WE 1506A	Power Splitter	Weinchel	LR 244	Cal b4 use	
12	WE 1506A	Power Splitter	Weinchel	LR 245	Cal b4 use	
13	H-9	Hybrid	Anzac	LR 86	Cal b4 use	
14	H-9	Hybrid	Anzac	LR 257	Cal b4 use	
15	S212DS	RF Switch	Narda	LR 1244	N/A	
16	3115	Double Ridged Horn Antenna	EMCO	LR 1226	N/A	
17	ESH3-Z5	Two Line V-Network	Rohde & Schwarz	N-3403	2013.03.07	2014.09
19	6812B	AC Power Source	Agilent	LR 1515	2013.10.28	2014.10.28
22	Model 87 V	Multimeter	Fluke	LR 1599	2012.10.29	2014.10.29
23	87H35-1	Circulator	Racal-MESL	s.no.: 140	N/A	
24	87H35-1	Circulator	Racal-MESL	s.no.: 141	N/A	
25	87H35-1	Circulator	Racal-MESL	s.no.: 142	N/A	
26	NRP-Z81	Wideband Power Sensor	Rohde & Schwarz	LR 1644	2013.04.05	2014.04.05
27	ESH3-Z2	Pulse Limiter	Rohde & Schwarz	LR 1074	2012.04.24	2014.04.24
28	CMD60	DECT Tester	Rohde & Schwarz	LR 1335	2012.11.01	2014.11.01
29	FSW26	Spectrum Analyzer	Rohde & Schwarz	LR 1640	2013.09.03	2014.09.03