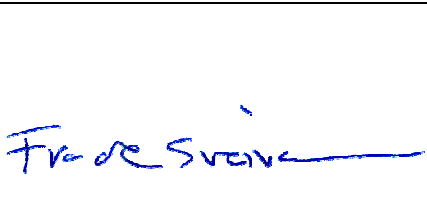
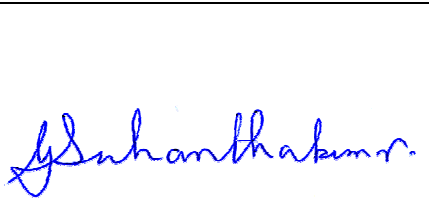


Test Report

Product	BT Transceiver in UPCS Base Station
Name and address of the applicant	Panasonic Corporation of North America
Name and address of the manufacturer	Panasonic System Networks Co., Ltd. 1-62, 4-chome, Minoshima, Hakata-ku Fukuoka 812-8531, Japan
Model	KX-TGF380
Rating	120 V AC (Mains)
Trademark	Panasonic
Serial number	/
Additional information	Bluetooth
Tested according to	FCC Part 15.247 Frequency Hopping Transmitters Industry Canada RSS-210, Issue 8 Low Power Licence-Exempt Radiocommunications Devices
Order number	275367
Tested in period	2014.12.10 to 2014.12.15
Issue date	2015.01.06
Name and address of the testing laboratory	 FCC No: 994405 IC OATS: 2040D-1 Instituttveien 6 Kjeller, Norway TEL: (+47) 64 84 57 00 FAX: (+47) 64 84 57 05
 Prepared by [Frode Sveinsen]  Approved by [G.Suwanthakumar]	
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.	

CONTENTS

1	INFORMATION	3
1.1	Test Item.....	3
1.2	Test Environment	4
1.3	Test Engineer(s)	4
1.4	Test Equipment	4
2	TEST REPORT SUMMARY	5
2.1	General.....	5
2.2	Test Summary	6
2.3	Description of modification for Modification Filing	6
2.4	Comments	6
2.5	Family List Rational	6
3	TEST RESULTS.....	7
3.1	Power Line Conducted Emissions.....	7
3.2	Channel Separation and 20dB Bandwidth.....	9
3.3	Pseudorandom Hopping Algorithm.....	12
3.4	Occupancy Time.....	13
3.5	Occupied Bandwidth.....	16
3.6	Peak Power Output	19
3.7	Spurious Emissions (Radiated)	26
4	LIST OF TEST EQUIPMENT	50
5	BLOCK DIAGRAM	51
5.1	Power Line Conducted Emission.....	51
5.2	Test Site Radiated Emission	51

1 INFORMATION

1.1 Test Item

Name :	Panasonic
FCC ID :	ACJ96NKX-TGF380
Industry Canada ID :	216A-KXTGF380
Model/version :	KX-TGF380
Serial number :	/
Hardware identity and/or version:	PNLB2420xx
Software identity and/or version :	SW401
Frequency Range :	2402 - 2480 MHz
Number of Channels :	79
Type of Modulation :	Digital (GFSK)
User Frequency Adjustment :	None
Conducted Output Power :	0.0076 Watts (Peak)
Type of Power Supply :	AC Adaptor PNLV226
Antenna Connector :	None
Number of Antennas :	1
Antenna Diversity Supported :	No

Description of Test Item

The EUT is a Bluetooth Module in a DECT Base station.

The BT module in KX-TGF380 is identical to the BT Module in KX-TGE270 (FCC ID: ACJ96NKX-TGE270), all conducted test results are from Nemko Test Report No: 248567-3 for KX-TGE270.

Exposure Evaluation

The EUT is designed to be fixed to a wall etc. and the user manual contains text that it shall be mounted with a separation distance of at least 20 cm from any humans. For the purposes of exposure evaluation this EUT is a mobile or fixed device. MPE Calculation at 20 cm satisfying FCC requirements is submitted as a separate document.

The EUT is exempted from RF Exposure Evaluation to Industry Canada requirements since the output power complies with the power levels of section 2.5.2 of RSS-102 Issue 4.

1.2 Test Environment

1.2.1 Normal test condition

Temperature:	20.4 – 21.2 °C
Relative humidity:	40 – 43 %
Normal test voltage:	120 V AC

The values are the limit registered during the test period.

1.3 Test Engineer(s)

Frode Sveinsen

1.4 Test Equipment

See list of test equipment in clause 5.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for the purpose of demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and Industry Canada RSS-210 Issue 8.

Tests were performed in accordance with ANSI C63.4-2003 and DA 00-705 Filing and Guidelines for Frequency Hopping Spread Spectrum Systems.

Radiated tests were made in a semi-anechoic chamber at measuring distances of 3m and 10m.

A description of the test facility is on file with the FCC and Industry Canada.

☒ New Submission

☒ Production Unit

☐ Class II Permissive Change

☐ Pre-production Unit

DSS Equipment Code

☐ Family Listing



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-210 Issue 8 reference	Result
Supply Voltage Variations	15.31(e)	N/A	Complies
Number of Operating Frequencies	15.31(m)	A8.1	Complies
Antenna Requirement	15.203	6.7 (RSS-GEN)	Complies
Power Line Conducted Emission	15.107(a) 15.207(a)	8.8 (RSS-GEN)	Complies
Channel Separation	15.247(a)(1)	A8.1	Complies ³
Pseudorandom Hopping Algorithm	15.247(a)(1)	A8.1	Complies ³
Time of Occupancy	15.247(a)(1)(iii)	A8.1	Complies ³
Occupied Bandwidth	15.247(a)(1)	A8.1	Complies ³
Minimum 6 dB Bandwidth	15.247(a)(2)	A8.2	N/A ²
Peak Power Output	15.247(b)	A8.4	Complies ³
Power Spectral Density	15.247(d)	A8.2	N/A ²
Spurious Emissions (Antenna Conducted)	15.247(c)	A8.5	N/A ¹
Spurious Emissions (Radiated)	15.247(c) 15.109(a) 15.209(a)	A8.5	Complies

¹ The tested equipment has integrated antennas only

² Not Applicable for FHSS equipments

³ All Conducted test results are from Nemko Test report No 248567-3 and were tested on KX-TGE270

2.3 Description of modification for Modification Filing

Not applicable.

2.4 Comments

The measurements were done with the EUT powered by 120 V AC. It was checked that power variations between 85% and 115% did not have any influence on the measurements.

All ports were populated during spurious emission measurements.

2.5 Family List Rational

Not Applicable.

3 TEST RESULTS

3.1 Power Line Conducted Emissions

Para. No.: 15.207 (a)

Test Performed By: Thomas Dangle	Date of Test: 15-Dec-2014
----------------------------------	---------------------------

Measurement procedure: ANSI C63.4-2009 using 50 µH/50 ohms LISN.


Test Results: Complies

Measurement Data: See attached graph, (Peak detector).

Highest measured value (L1 and N):

On-Hook Mode, Standby, AC Adaptor PNLV226:

Frequency [MHz]	Level [dBuV]	Af [dB]	Limit [dBuV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.360000	33.80	10.40	58.70	24.90	QP	N	Pass
0.160000	20.20	10.70	55.50	35.30	AV	N	Pass
0.220000	17.40	10.70	52.80	35.40	AV	L1	Pass
0.255000	16.10	10.60	51.60	35.50	AV	N	Pass
0.360000	23.70	10.40	48.70	25.00	AV	N	Pass
0.520000	14.80	10.20	46.00	31.20	AV	L1	Pass
0.730000	16.10	10.20	46.00	29.90	AV	L1	Pass
0.755000	16.00	10.20	46.00	30.00	AV	N	Pass
0.980000	15.00	10.40	46.00	31.00	AV	L1	Pass
1.625000	17.40	10.40	46.00	28.60	AV	N	Pass
1.905000	17.50	10.40	46.00	28.50	AV	L1	Pass
2.565000	17.90	10.40	46.00	28.10	AV	L1	Pass
3.015000	18.00	10.40	46.00	28.00	AV	N	Pass
3.990000	16.50	10.50	46.00	29.50	AV	N	Pass
4.710000	14.80	10.50	46.00	31.20	AV	N	Pass
26.780000	11.80	11.10	50.00	38.20	AV	N	Pass

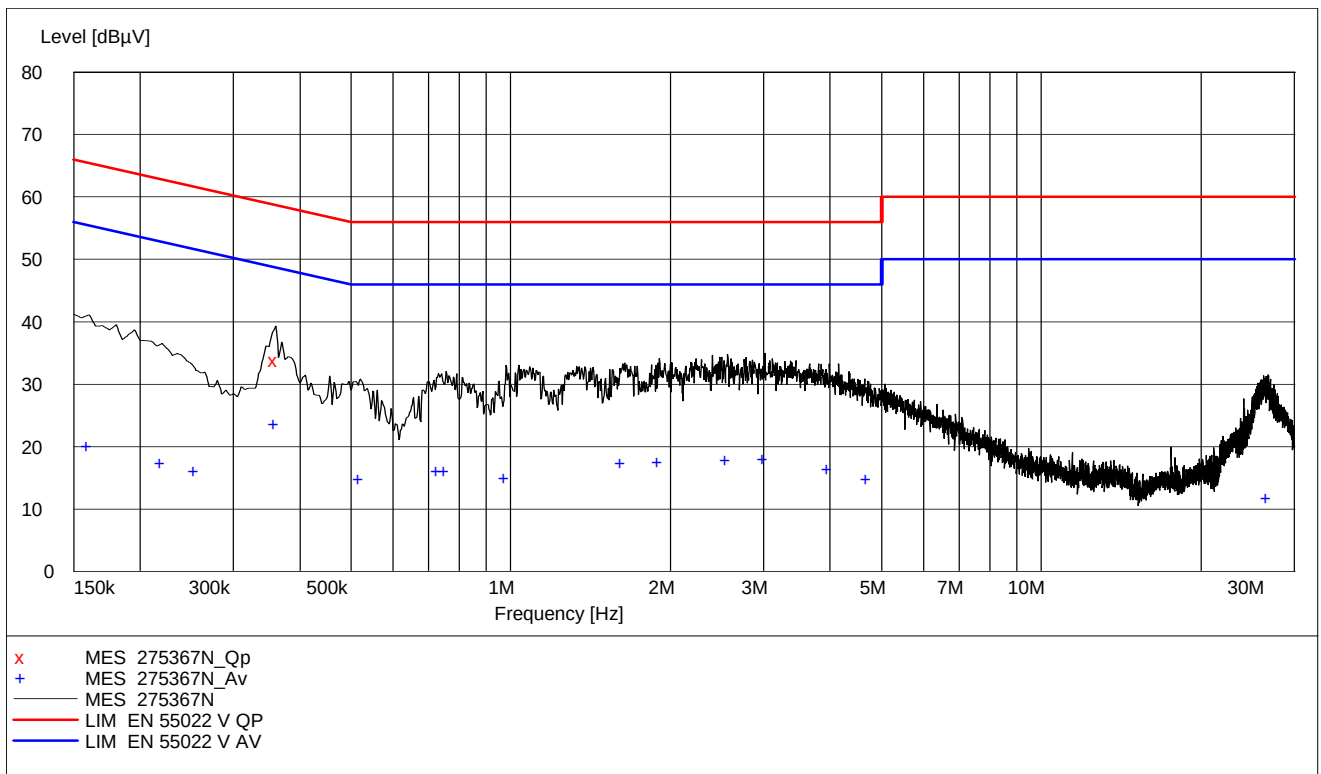

On-Hook Mode, Standby, 120 V AC, AC Adaptor PNLV226
Plot shows maximum of Phase L1 and N

3.2 Channel Separation and 20dB Bandwidth

Para. No.: 15.247 (a)(1)

Test Results: **Complies**

Measurement Data:

Channel Separation:	1.0 MHz
Nominal value for Channel Separation	1.0 MHz
20 dB BW of hopping channel, 2402MHz:	923.1 kHz
20 dB BW of hopping channel, 2441MHz:	921.1 kHz
20 dB BW of hopping channel, 2480MHz:	921.1 kHz

See attached plots


Requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


or:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the system operates with an output power no greater than 125 mW.


No requirements for Digital Transmission Systems.

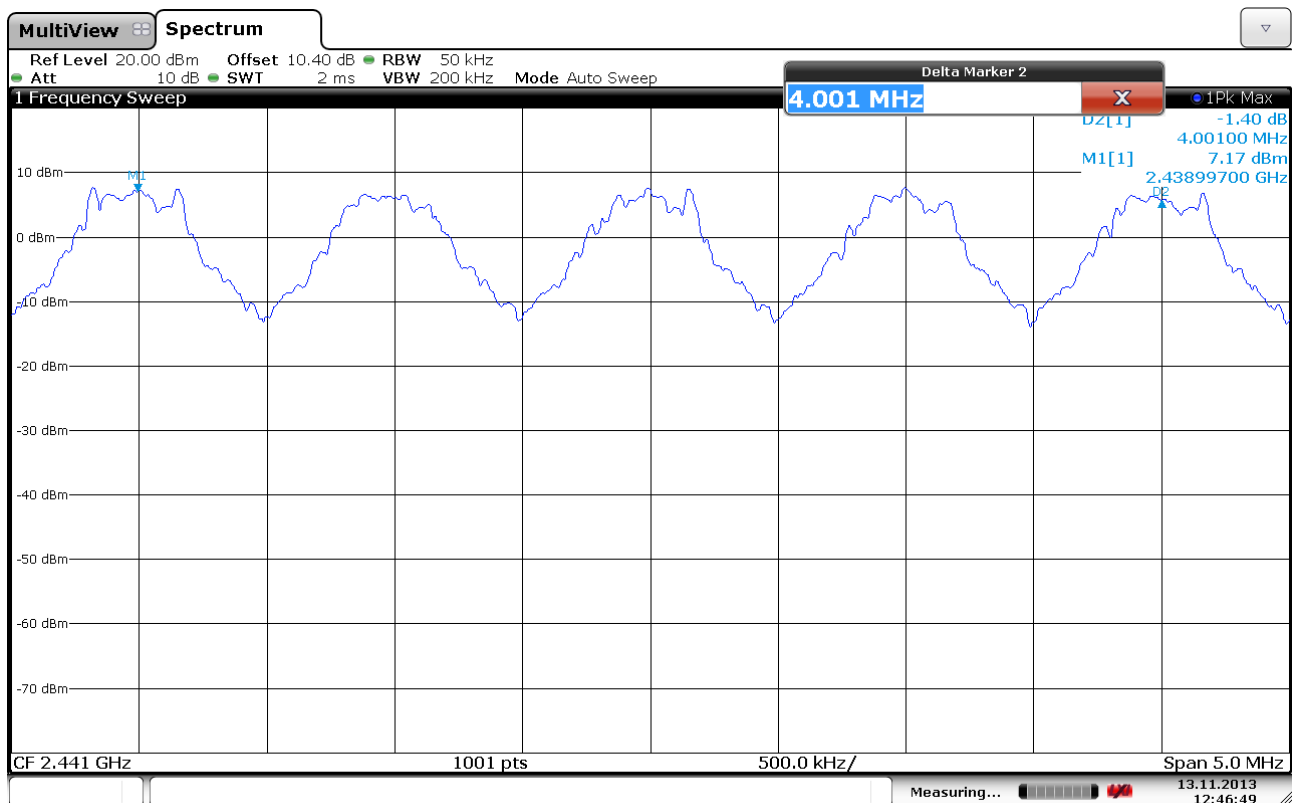


Channel Separation

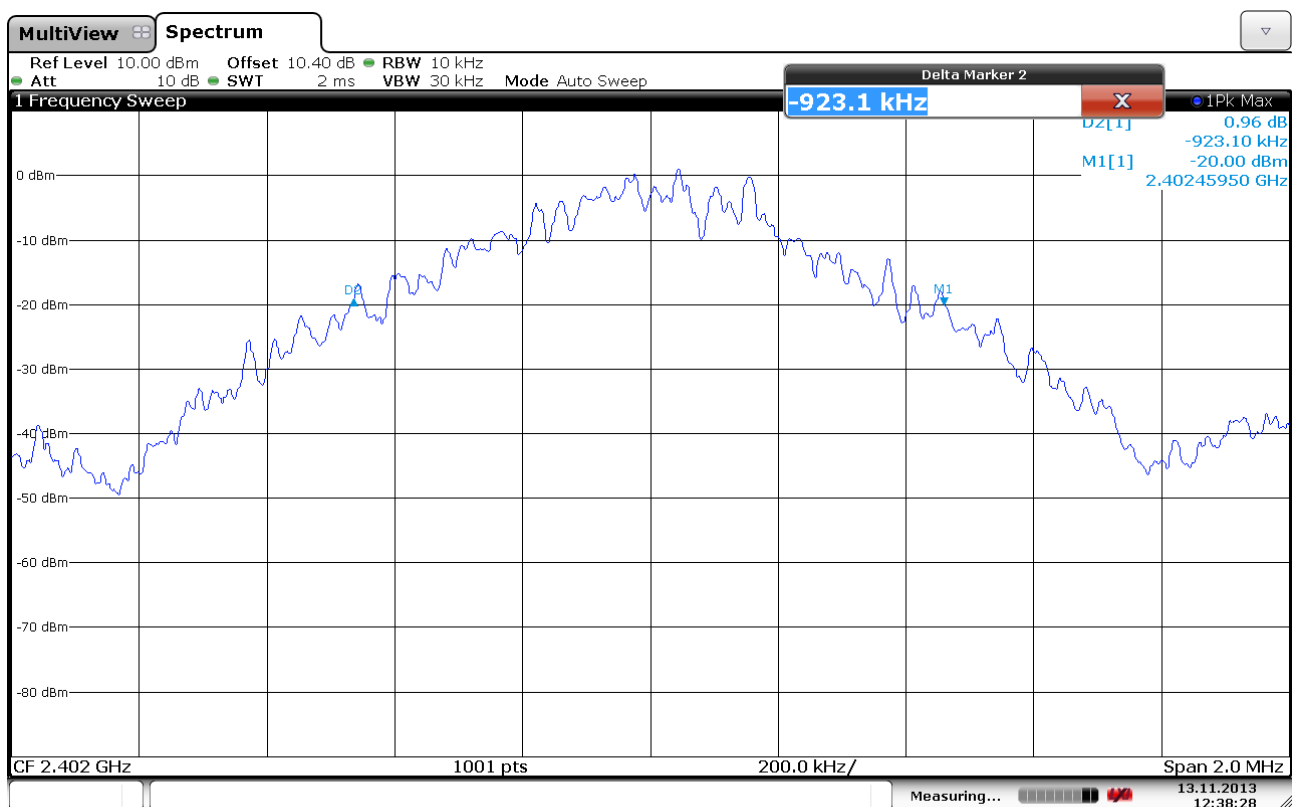

20dB Bandwidth, 2402MHz

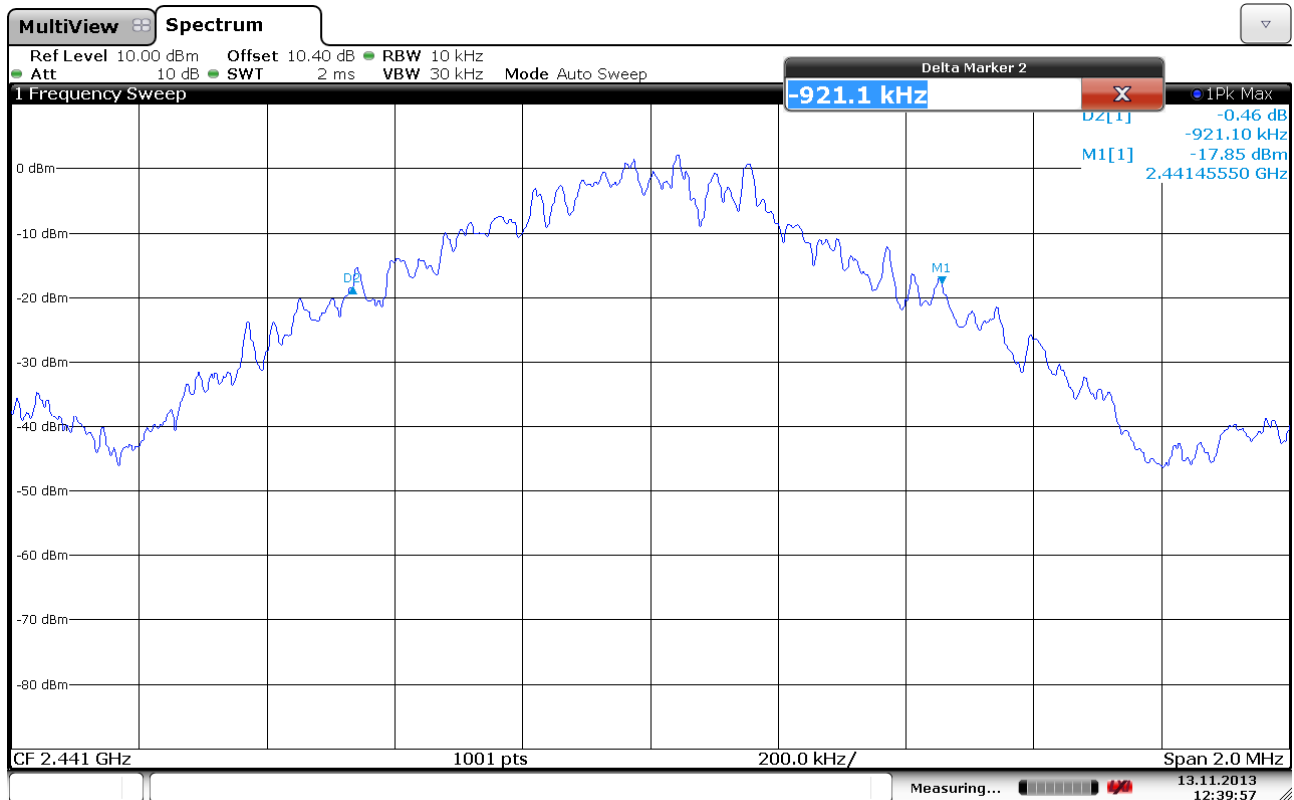

20dB Bandwidth, 2441MHz

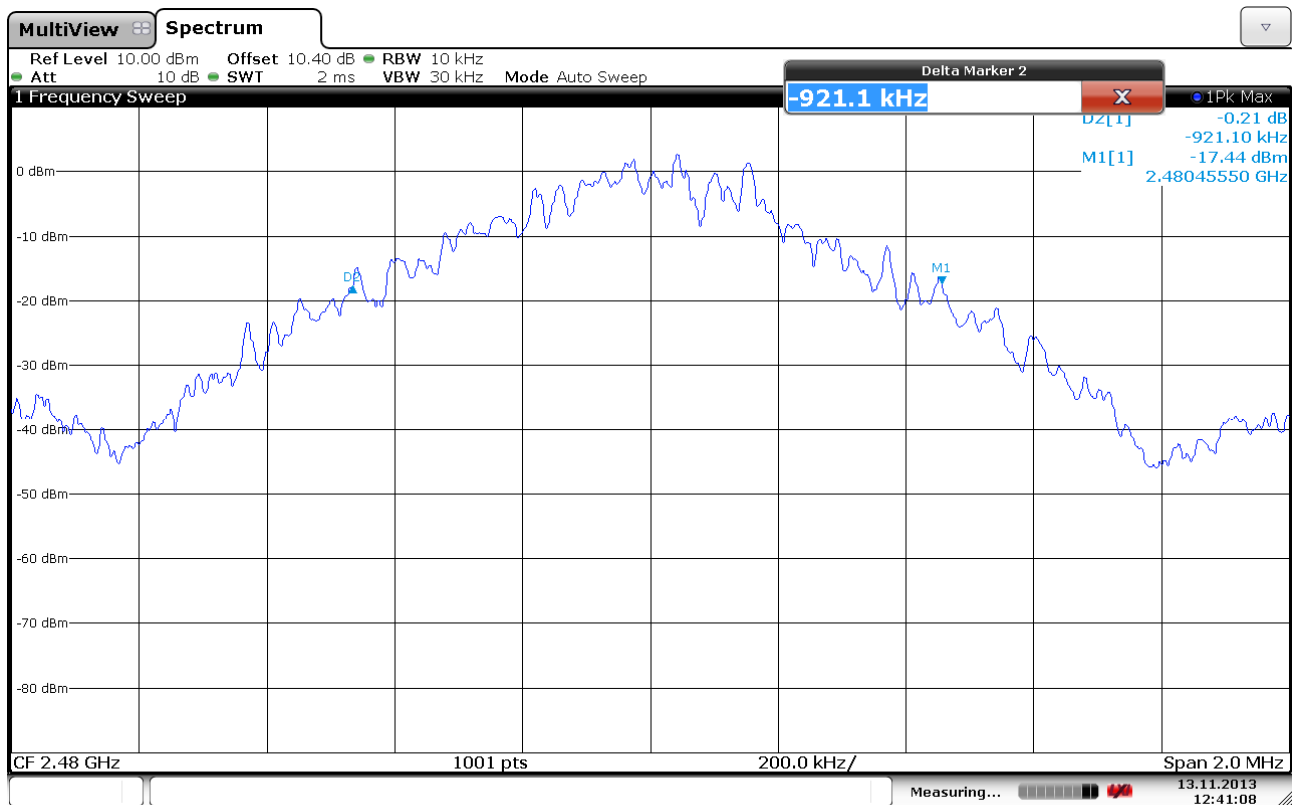

20dB Bandwidth, 2480MHz

3.3 Pseudorandom Hopping Algorithm

Para. No.: 15.247 (a)(1)

Test Results: Complies

Measurement Data: /

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

No requirements for Digital Transmission Systems.

3.4 Occupancy Time

Para. No.: 15.247 (a)(1)(iii)

Test Results: Complies

Measurement Data:

Minimum Number of RF Channels:	20
Maximum Number of RF Channels:	79
Maximum Length of RF Burst pr. channel	2.90 ms
Time between RF Burst on same RF Channel	75.0 ms (20 ch)
	296.25 ms (79 ch)
Time of Occupancy (20 and 79 ch mode)	309.3 ms

20 Ch Mode:

Time between RF burst on same channel: $3.75 \times 20 \text{ ms} = 75.0 \text{ ms}$

Time of occupancy: $(2.90 \times 400 \times 20) / 75.0 = 309.3 \text{ ms}$

79 Ch Mode:

Time between RF burst on same channel: $3.75 \times 79 \text{ ms} = 296.25 \text{ ms}$


Time of occupancy: $(2.90 \times 400 \times 79) / 296.25 = 309.3 \text{ ms}$

See attached graph.


Requirements:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


No requirements for Digital Transmission Systems.

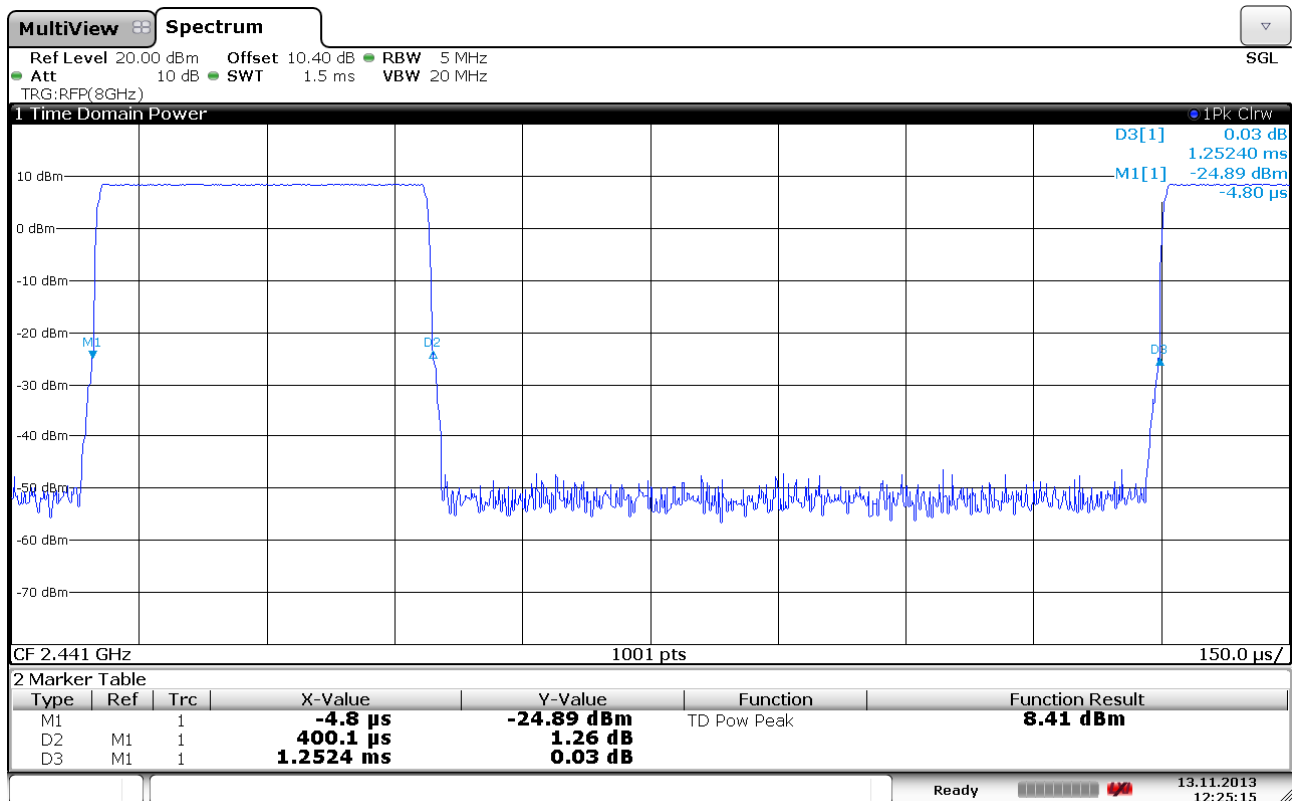

Burst Length, DH1

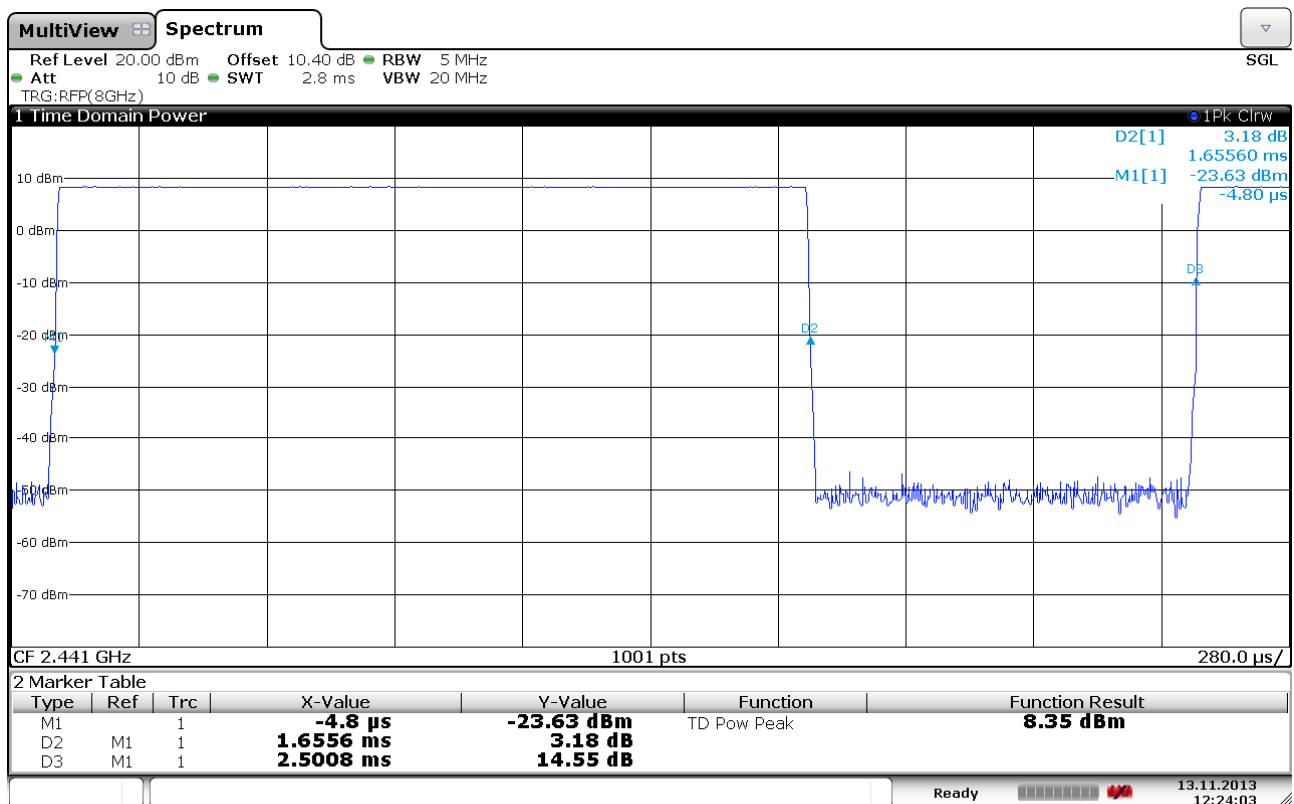

Burst Length, DH3

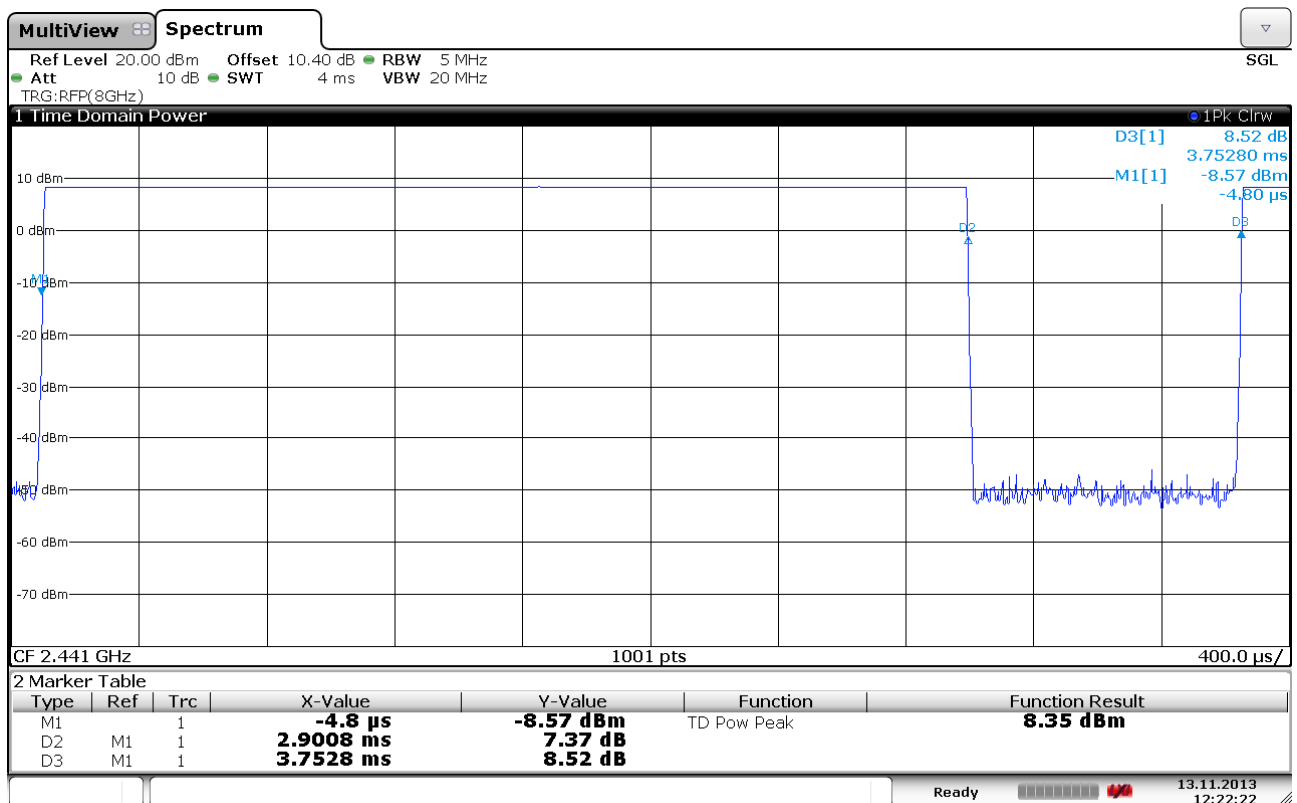

Burst Length, DH5

3.5 Occupied Bandwidth

Para. No.: 15.247 (a)(1)(iii)

Test Results: **Complies**

Measurement Data:

Number of RF Channels in use:	20 or 79 RF channels in use
Channel Centre Frequencies:	The channels are centered at each full MHz from 2402 to 2480 MHz


See attached plots.

Requirements:


Frequency hopping systems in the 2400 - 2483.5 MHz band shall use at least 15 non-overlapping channels.
No requirements for bandwidth for this frequency band.

No requirements for Digital Transmission Systems.


No requirement for 99% BW, reported for information only.

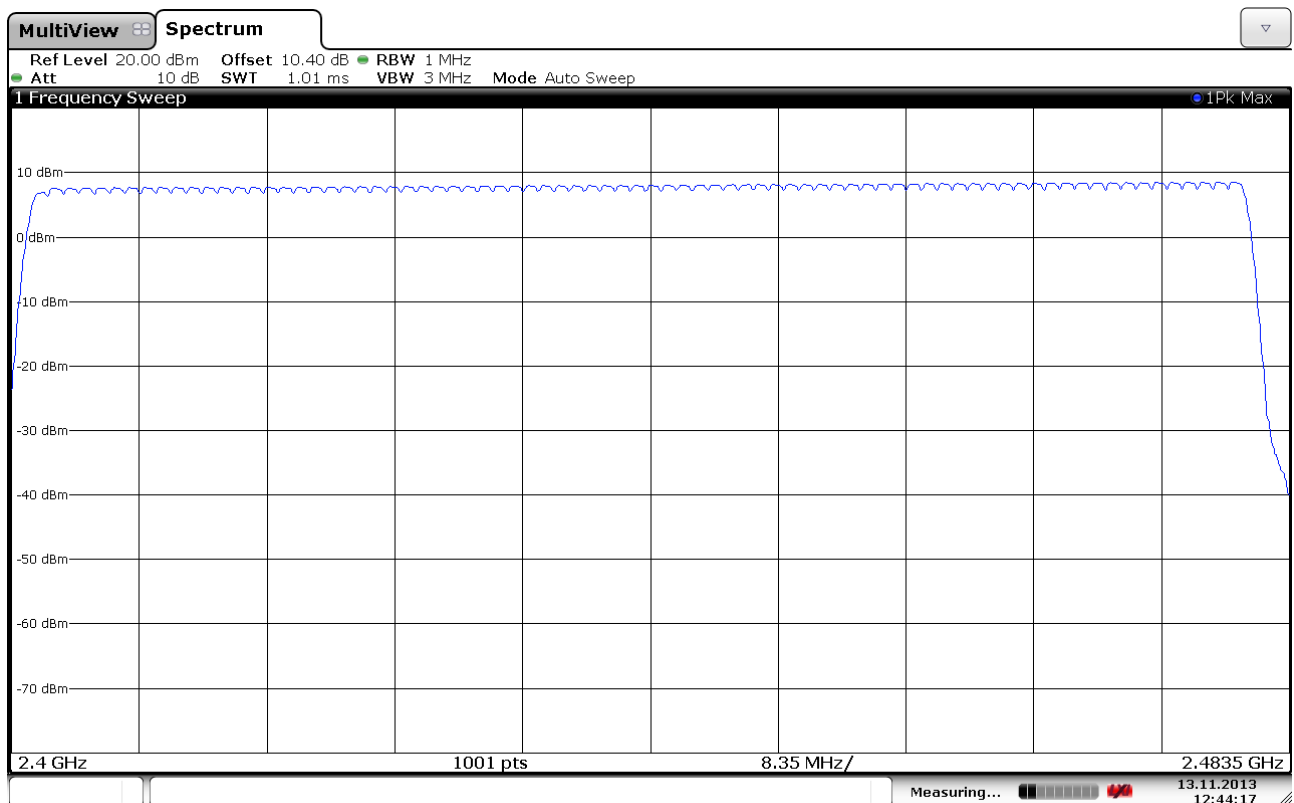


RF Channels in Use, Full Band

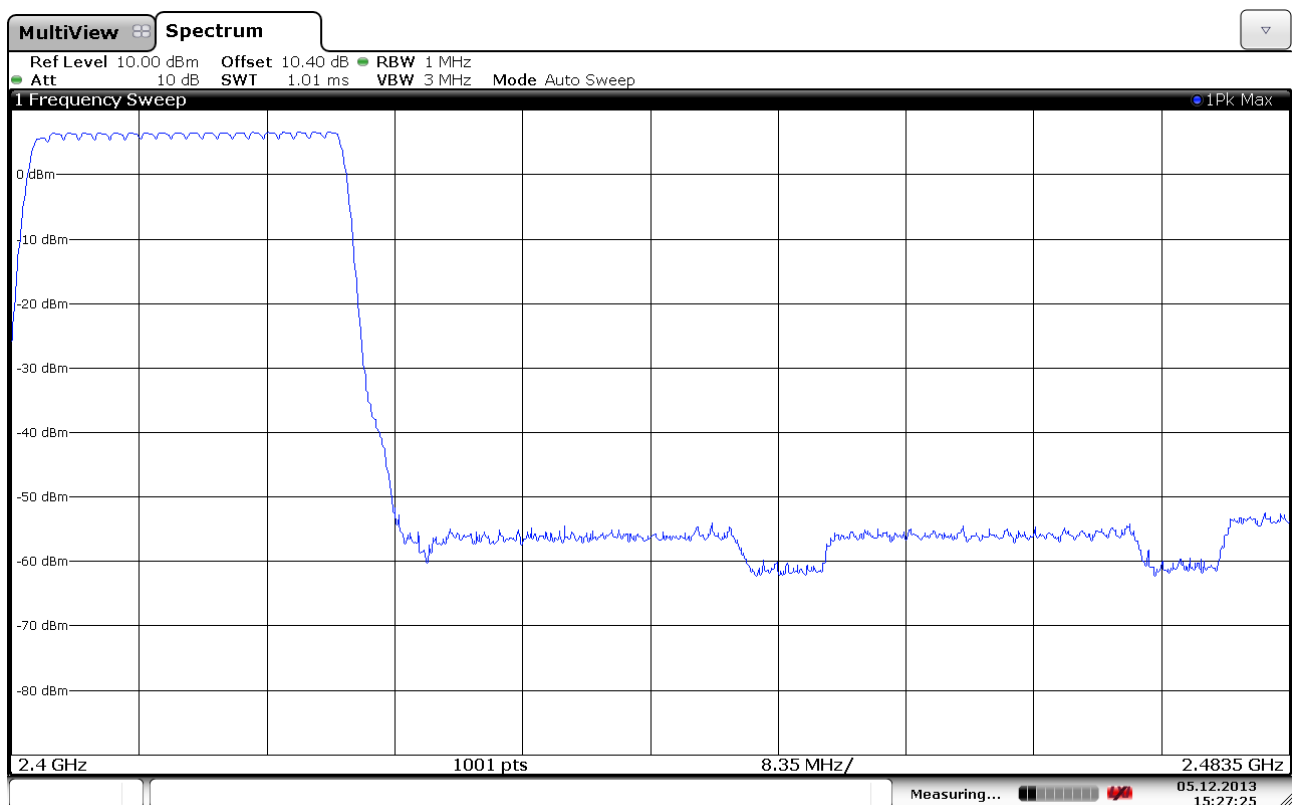

RF Channels in Use, 20 Channels, Lower

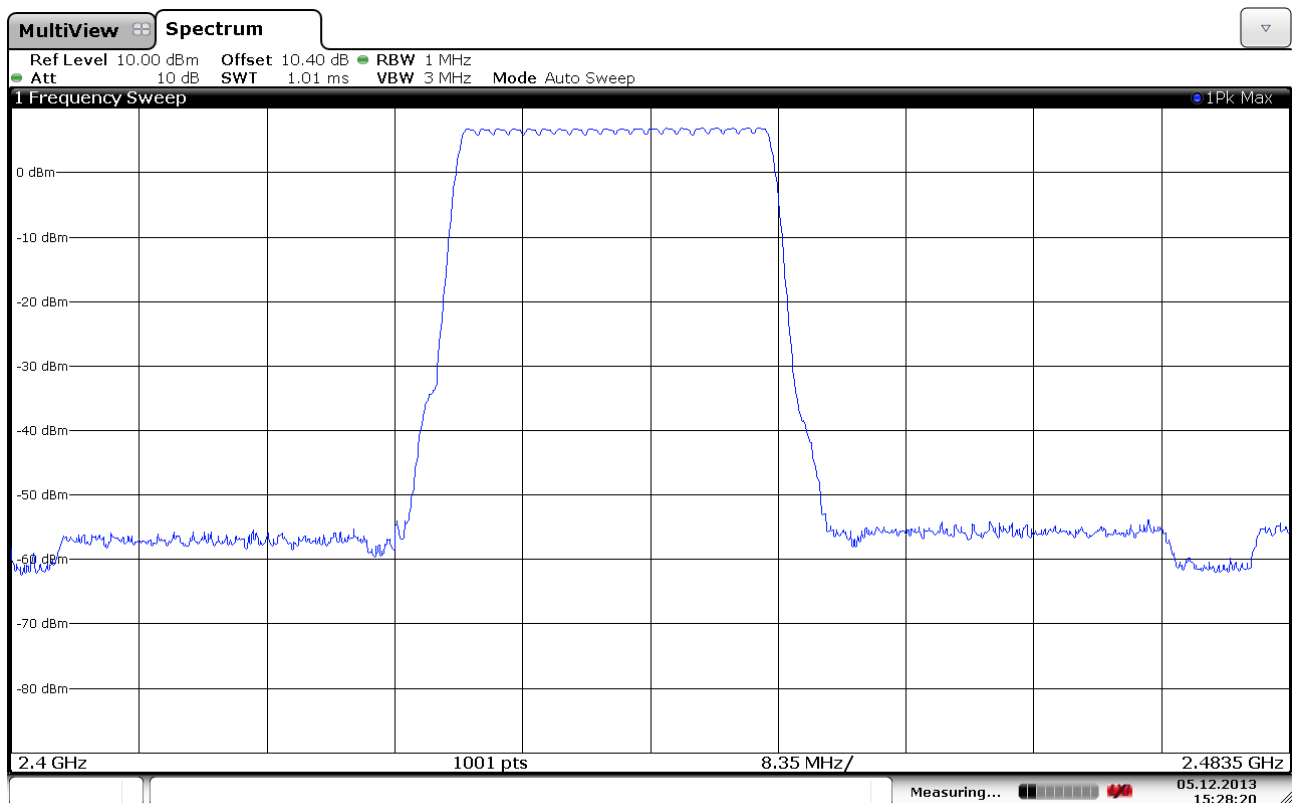

RF Channels in Use, 20 Channels, Middle

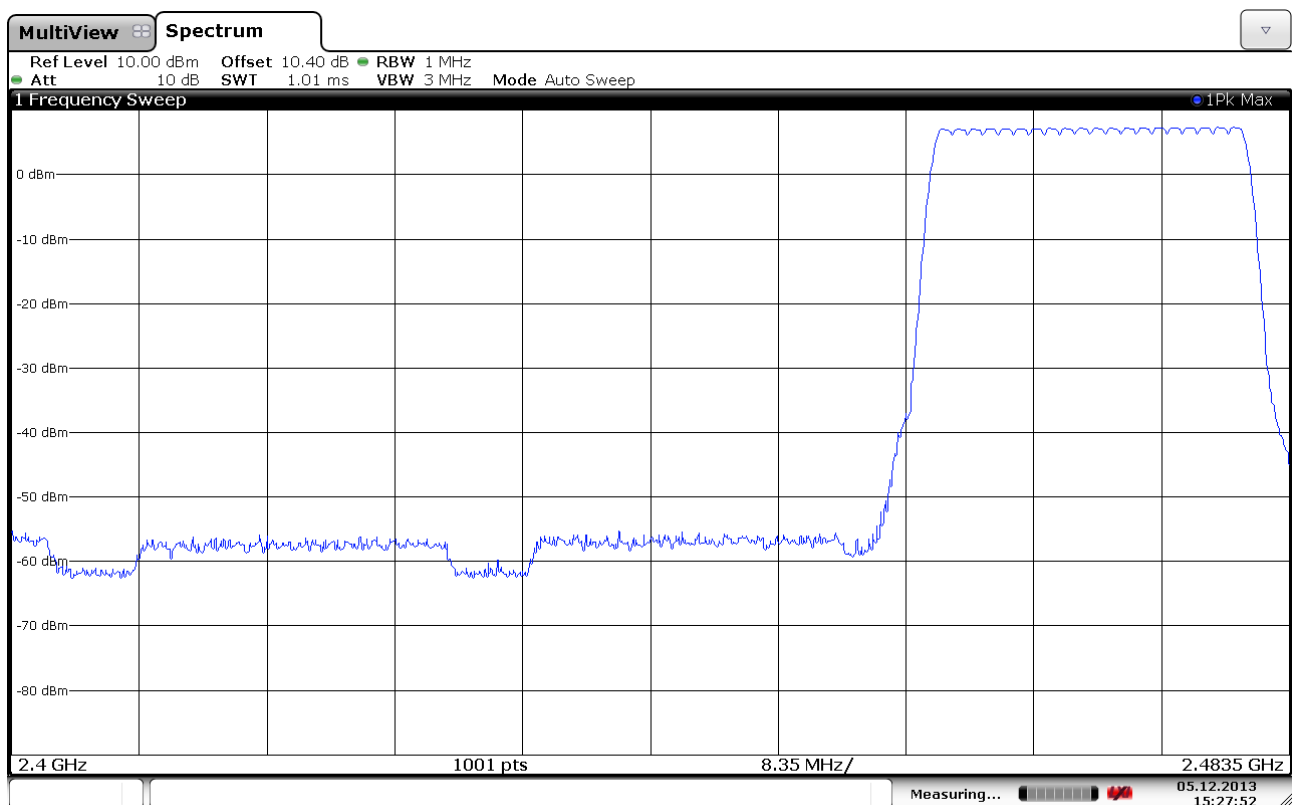

RF Channels in Use, 20 Channels, Upper

3.6 Peak Power Output

Para. No.: 15.247 (b)

Test Results: Complies

Measurement Data:

	2402 MHz	2441 MHz	2480 MHz
Peak Power (dBm)	7.3	8.4	8.8
Peak Power (Watts)	0.0053	0.0069	0.0076
Field Strength (dBμV/m)	101.9	103.1	104.0
EIRP, Calculated (Watts)	0.00463	0.00617	0.00759
Antenna gain (dBi)	-0.6	-0.5	0.0

Antenna gain = $10 \cdot \log(\text{EIRP} / \text{Conducted power})$ dBi

EIRP is calculated from measured field strength by the formulas in KDB 412172 D01 Determining ERP and EIRP v01.

See attached graph.

Detachable antenna?

☐ Yes ☒ No

If detachable, is the antenna connector non-standard?

☐ Yes ☐ No

Type of antenna connector: /

Requirements:


The maximum peak output power shall not exceed the following limits:

For frequency hopping systems employing at least 75 hopping channels: 1 Watt


For all other frequency hopping systems in the 2400 - 2483.5 MHz band: 0.125 Watts

For Digital Transmission Systems in the 2400 - 2483.5 MHz band: 1 Watt

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

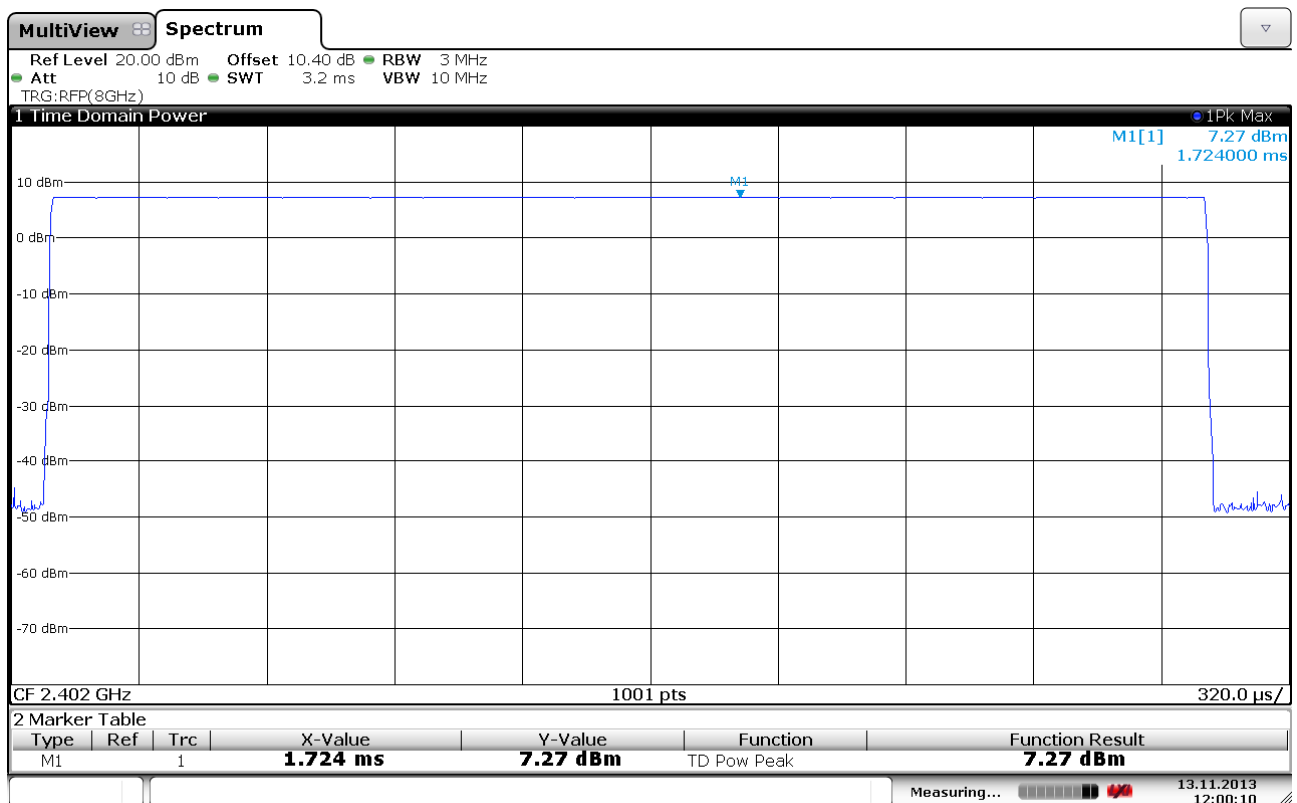


Conducted Output Power, 2402MHz

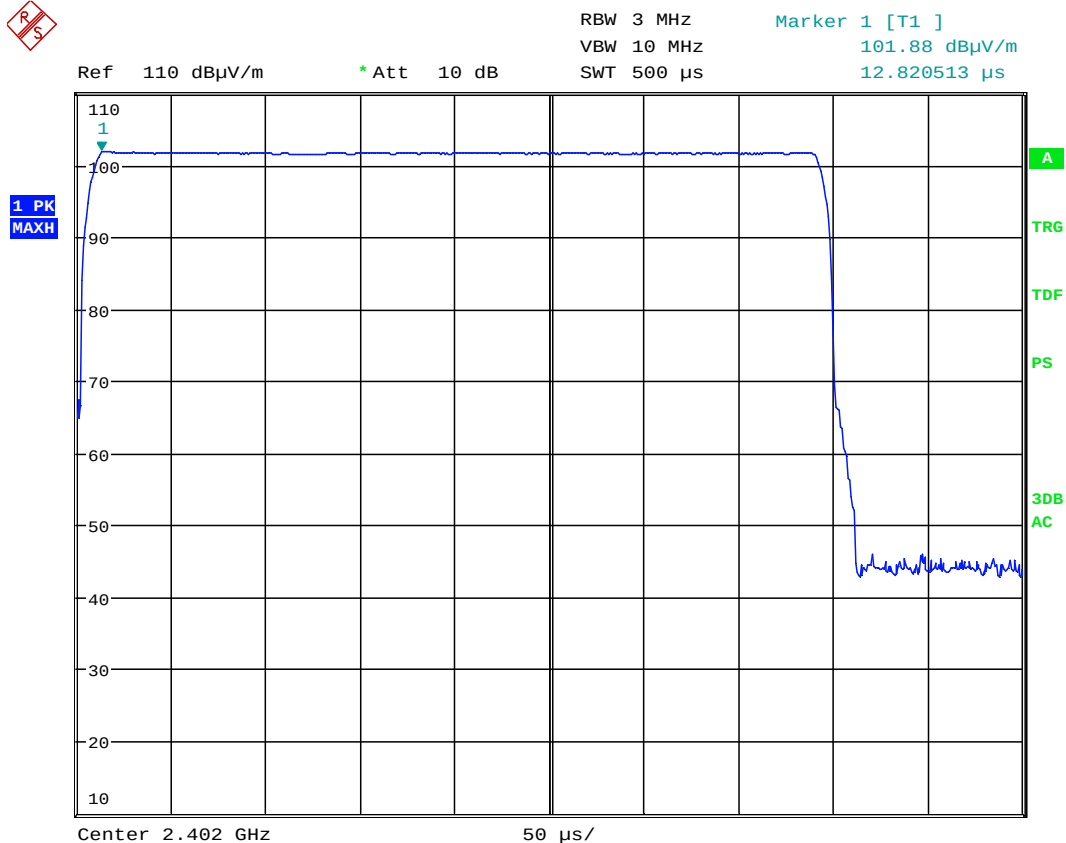


Date: 10.DEC.2014 12:41:55

Maximum Field Strength, 2402MHz (Max: HP)

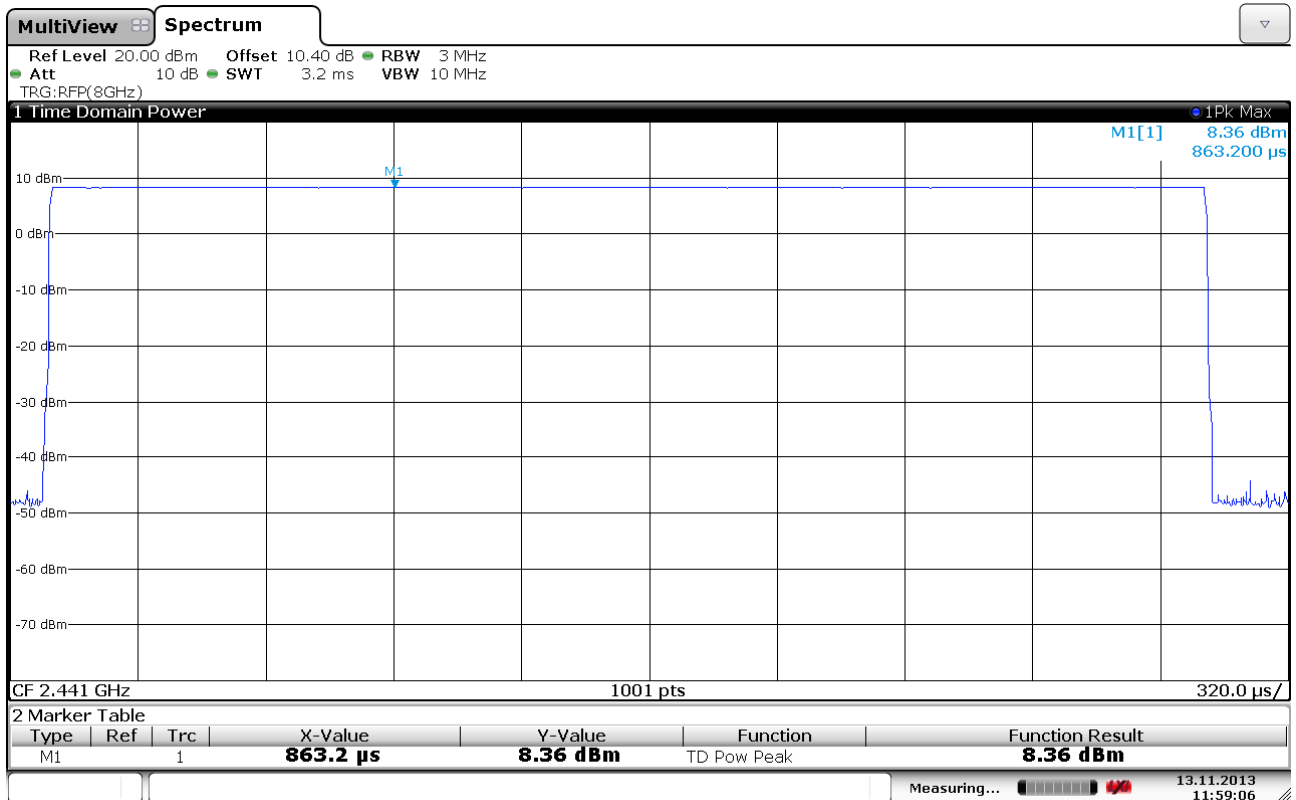

Conducted Output Power, 2441MHz

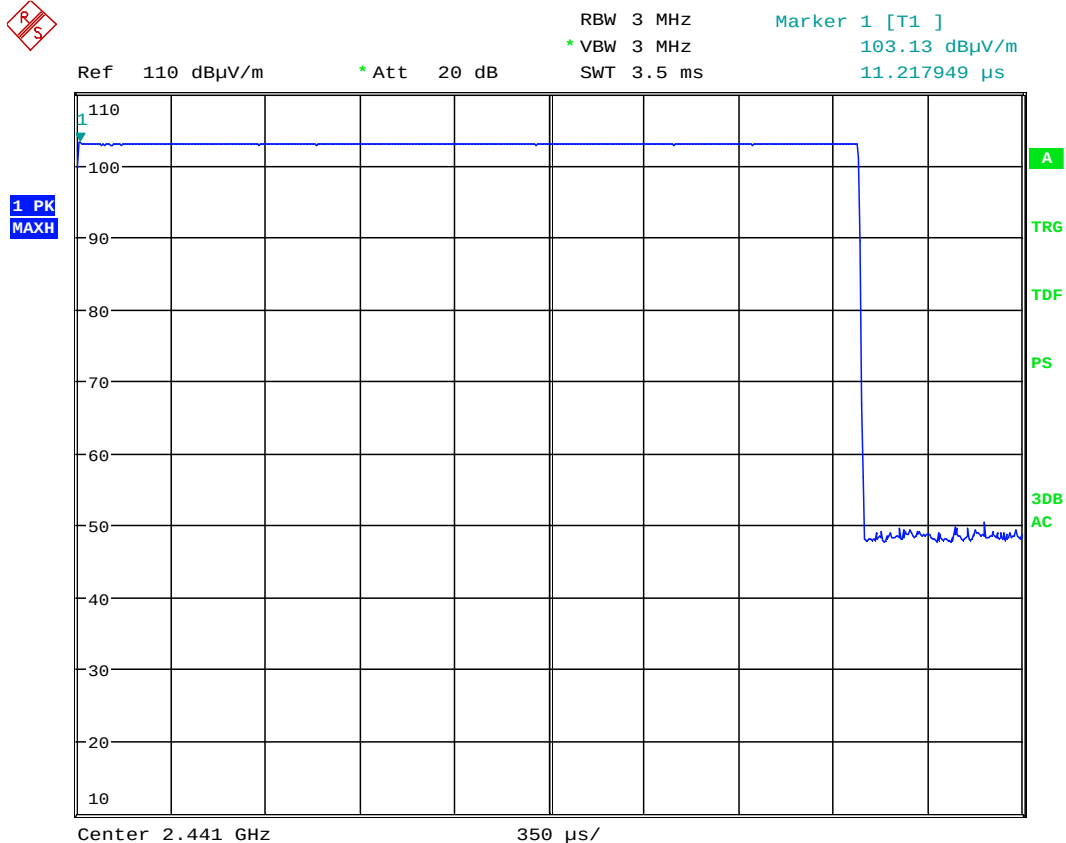

Date: 10.DEC.2014 13:36:20

Maximum Field Strength, 2441MHz (Max: HP)



Conducted Output Power, 2480MHz



MARKER 1

11.21794872 μ s

Ref 110 dB μ V/m

* Att 20 dB

RBW 3 MHz

* VBW 3 MHz


SWT 3.5 ms

Marker 1 [T1]

104.03 dB μ V/m

11.217949 μ s

1 PK
MAXH

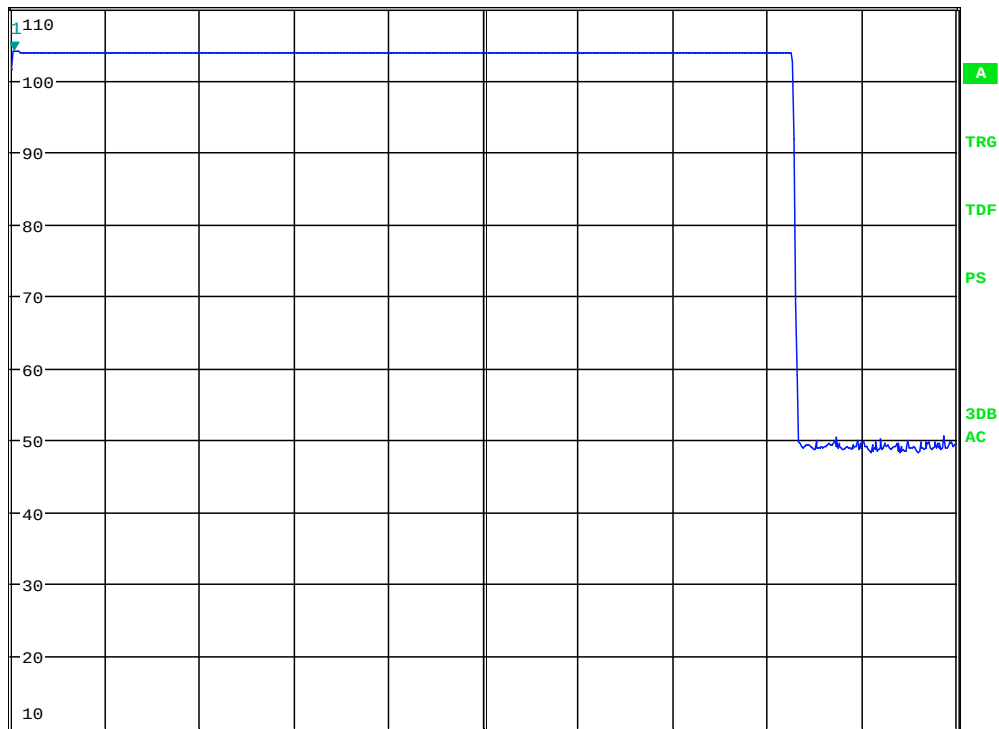

Center 2.48 GHz

350 μ s/

Date: 10.DEC.2014 13:43:08

Maximum Field Strength, 2480MHz (Max: HP)

3.7 Spurious Emissions (Radiated)

Para. No.: 15.247 (c)

Test Results: Complies

Measurement Data:

Band-edge conducted power, Hopping OFF:

	Measured field strength @3m (dBµV/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dBµV/m	dB	
Peak Detector	44.4	63.4	74	29.6	10.6
Average Detector	24.4	43.4	54	29.6	10.6

Band-edge conducted power, Hopping ON:

	Measured field strength @3m (dBµV/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dBµV/m	dB	
Peak Detector	44.5	62.2	74	29.5	11.8
Average Detector	24.5	42.2	54	29.5	11.8

Average Detector values are measured with Peak Detector and corrected for Duty Cycle.

All field strength values above are at 3m.

See attached plots.

Duty Cycle Correction Factor Calculation:

Burst Type	DH1	DH3	DH5
Max. Burst Length (ms)	0.4	1.7	3.0
Max. Frame Length (ms)	1.25	2.5	3.75
Duty Cycle Factor (dB), 20 Hopping Channels	35.9	29.4	28.0
Duty Cycle Factor (dB) 79 Hopping Channels	47.8	41.3	39.9

Duty Cycle Factor = $-20 * \log (\text{Max. Burst Length} / (\text{Number of Hopping Channels} * \text{Max. Frame Length}))$ (dB)

Maximum allowed Duty Cycle Correction is 20 dB

Maximum Duty Cycle Correction Factor according to Para 15.35 (b): 20 dB


RF conducted power to 25 GHz see attached graph.

Maximum RF level outside operating band:

RF ch 00: >50 dB/C, margin >30 dB

RF ch 39: >50 dB/C, margin >30 dB

RF ch 78: >50 dB/C, margin >30 dB

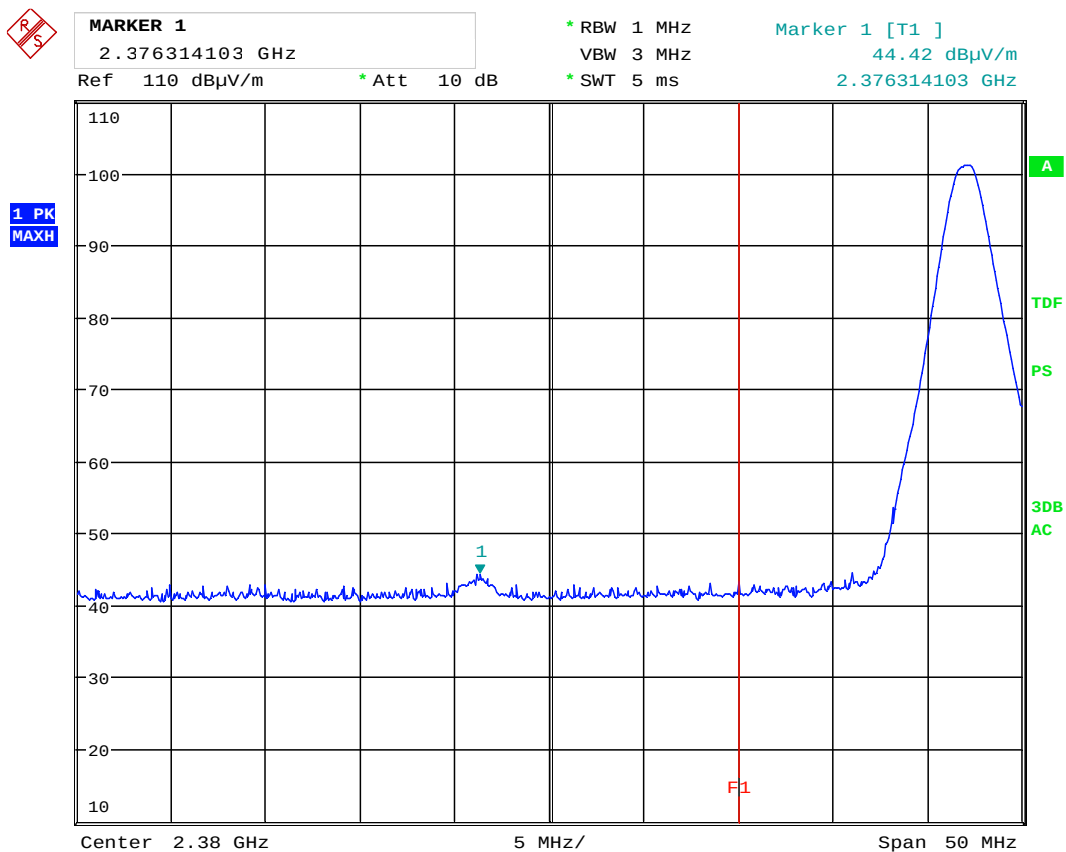

Date: 10.DEC.2014 13:08:21

Band Edge Lower Channel, Radiated, Peak, Hopping OFF



MARKER 1

2.37650641 GHz

Ref 110 dBμV/m

* Att 10 dB

* RBW 1 MHz

* VBW 3 MHz


SWT 2.5 ms

Marker 1 [T1]

44.52 dBμV/m


2.376506410 GHz

1 PK
MAXH

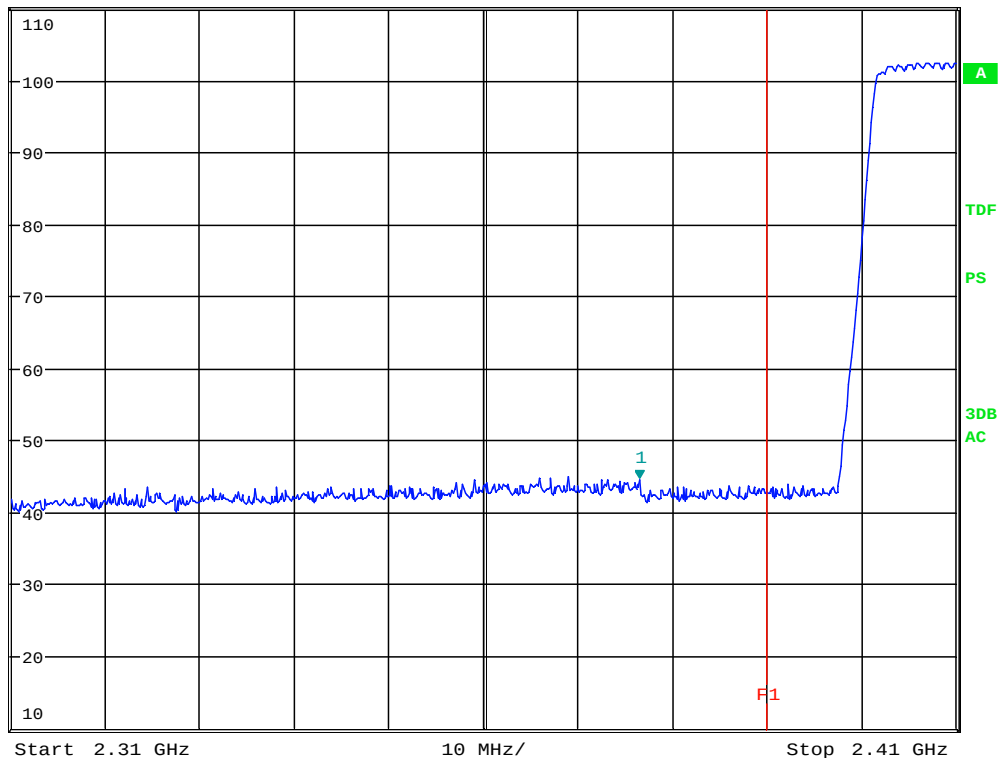


Date: 10.DEC.2014 14:05:48

Band Edge Lower Channel, Radiated, Peak, Hopping ON

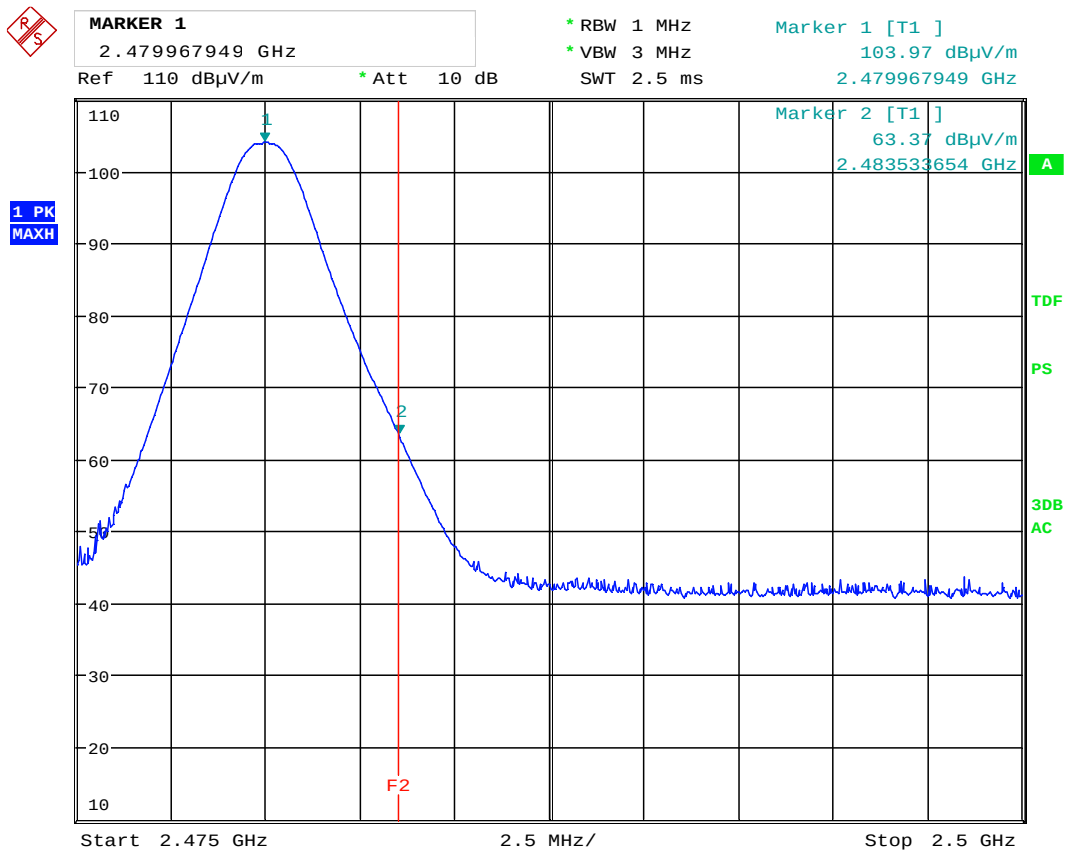


Date: 10.DEC.2014 13:45:00

Band Edge Upper Channel, Radiated, Peak, Hopping OFF

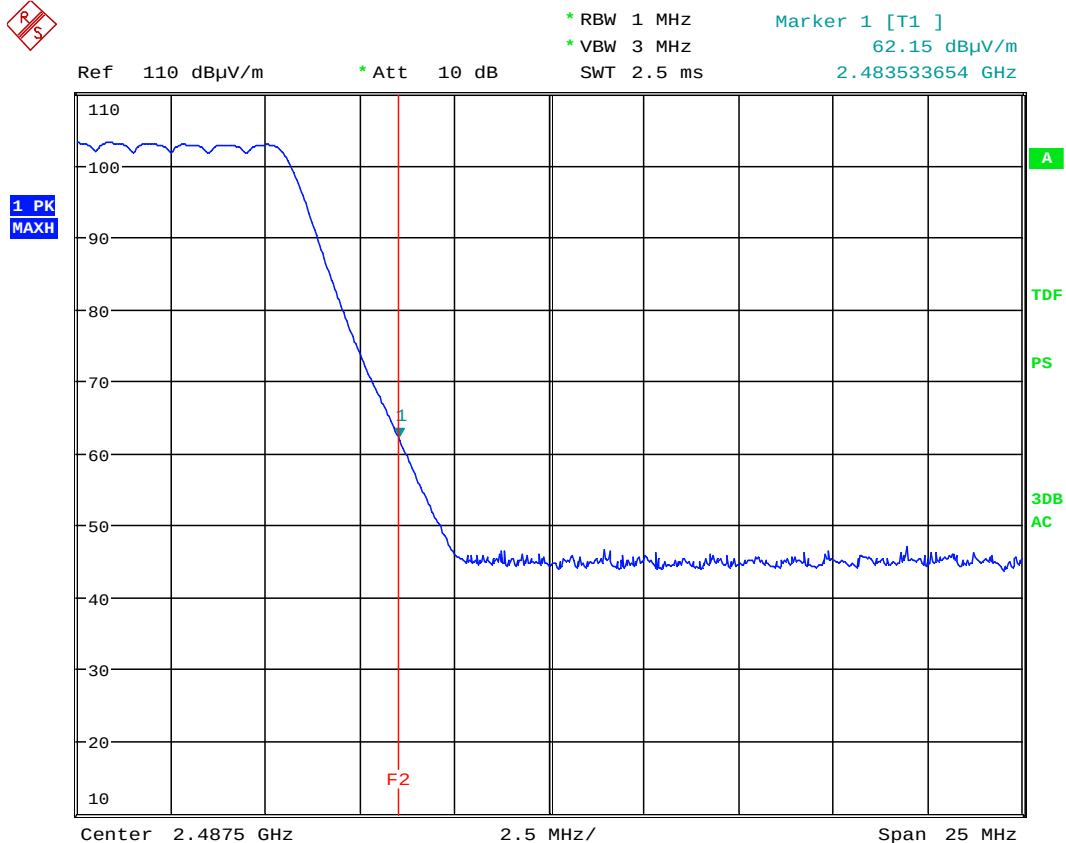


Date: 10.DEC.2014 14:04:28


Band Edge Upper Channel, Radiated, Peak, Hopping ON

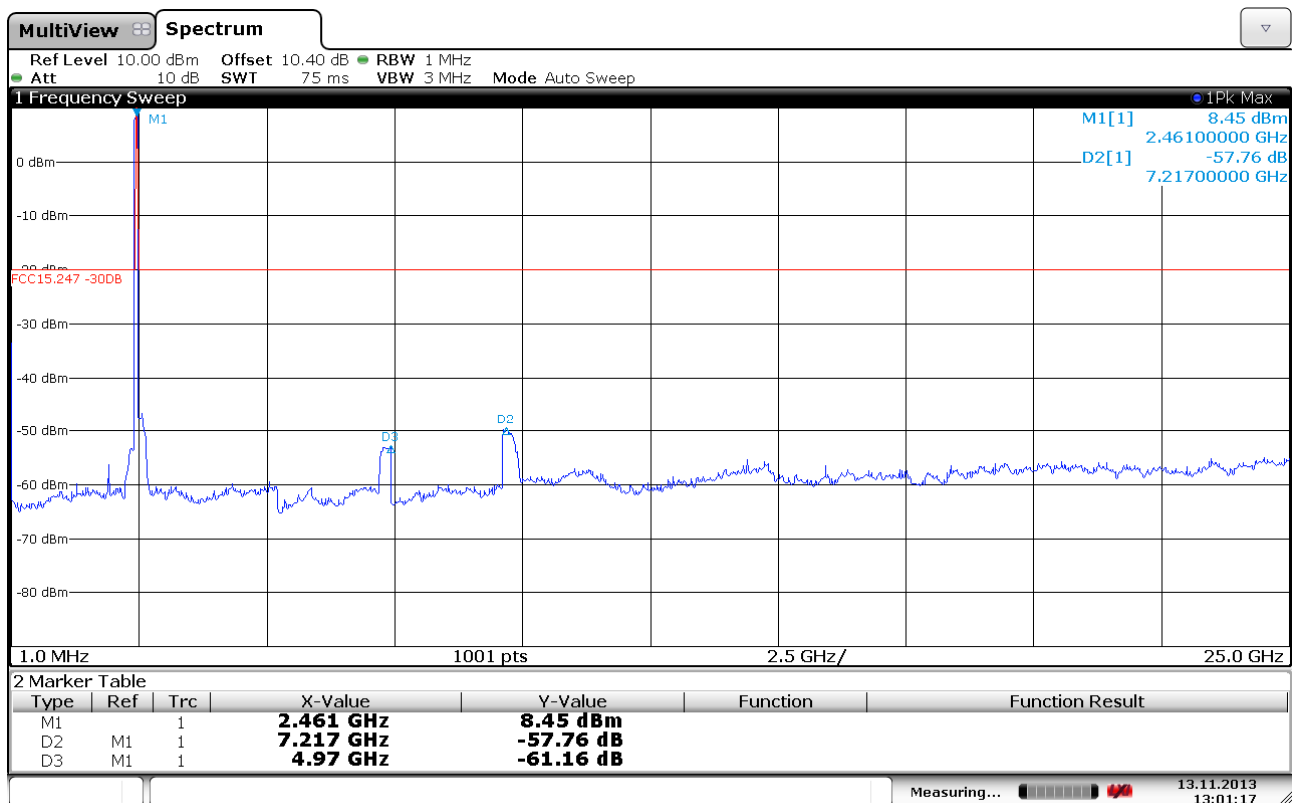

Conducted Emissions, 1MHz -25GHz, Hopping On

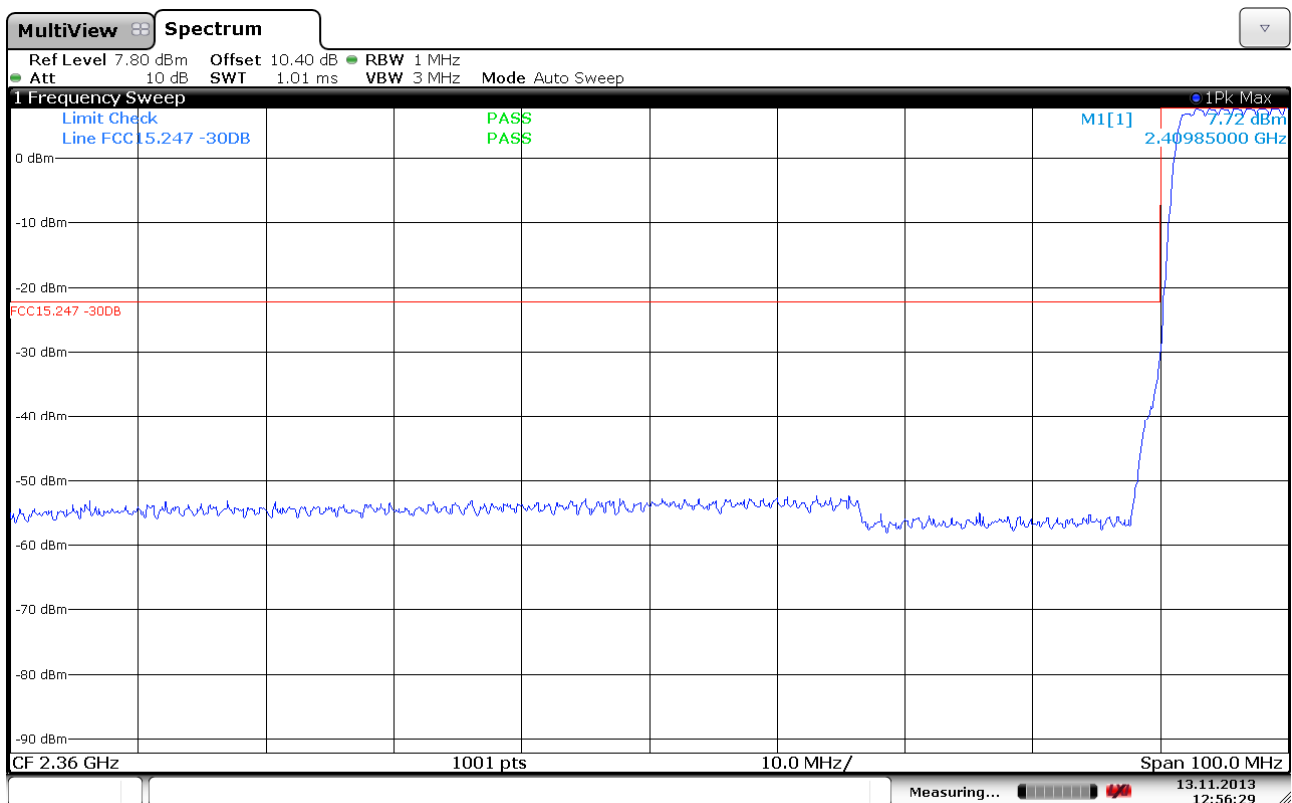

Conducted Emissions, 2310 -2410 MHz, Hopping ON

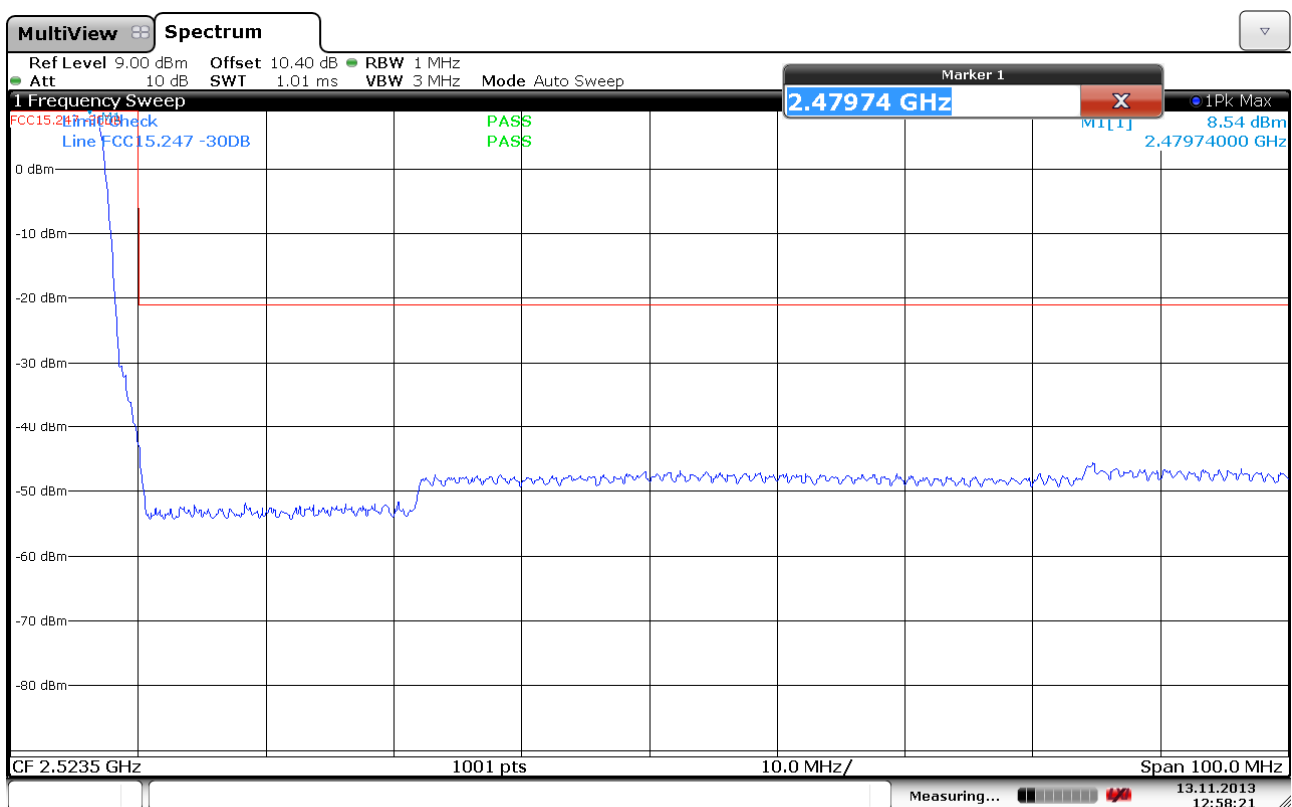


Conducted Emissions, 2473.5 -2573.5 MHz, Hopping ON

Radiated emissions 9 kHz-30 MHz.

Measuring distance 10 m, measured with Peak detector.

No component detected, see attached graph.

Limit is converted to 10 m using 40 dB/decade according to 15.31 (f) (2).

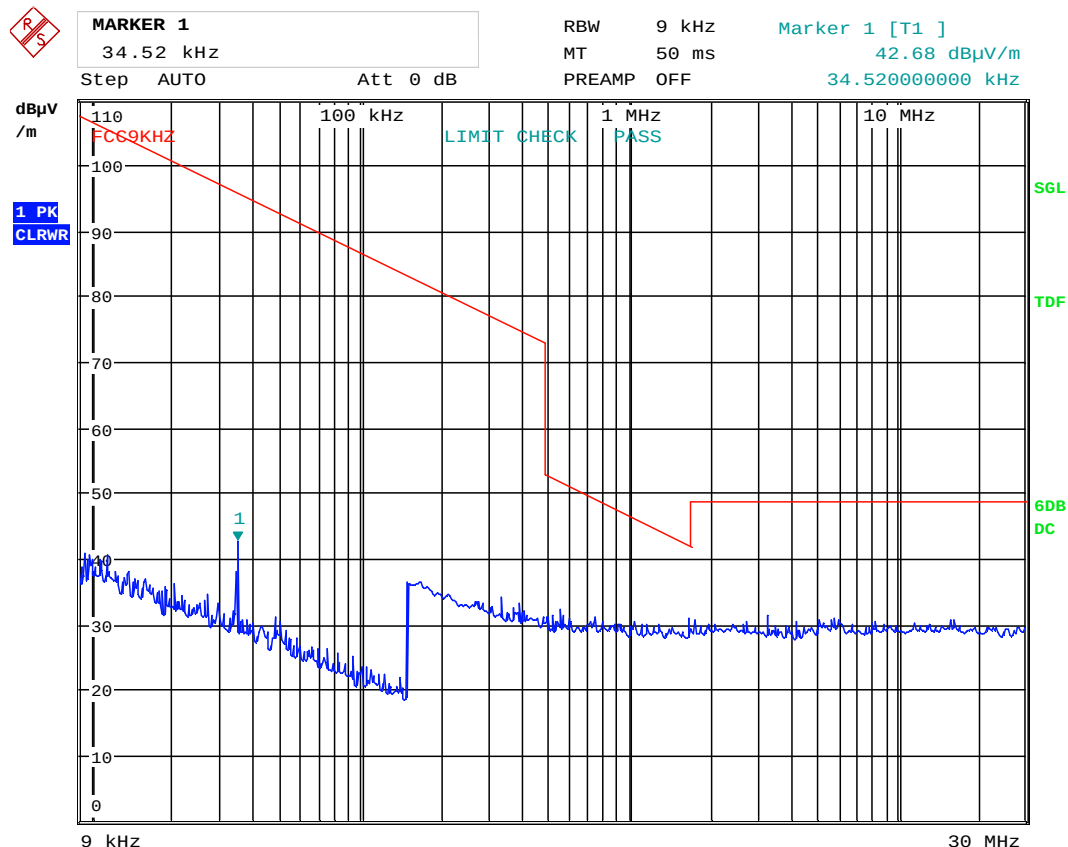

Date: 10.DEC.2014 16:59:21

Radiated emission 30 – 1000 MHz.

Detector: Quasi-Peak


Measuring distance 3 m according to ANSI C63.4-2003

Tested in hopping mode

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Polarization	Margin (dB)	Limit (dBμV/m)	Comment
30.763200	19.2	120.000	V	20.8	40.0	
55.831200	18.6	120.000	V	21.4	40.0	
169.183150	9.7	120.000	H	33.8	43.5	
898.028000	21.2	120.000	V	24.8	46.0	

See plot.

NTC FCC Pt15 Class B 30-1000M 3m

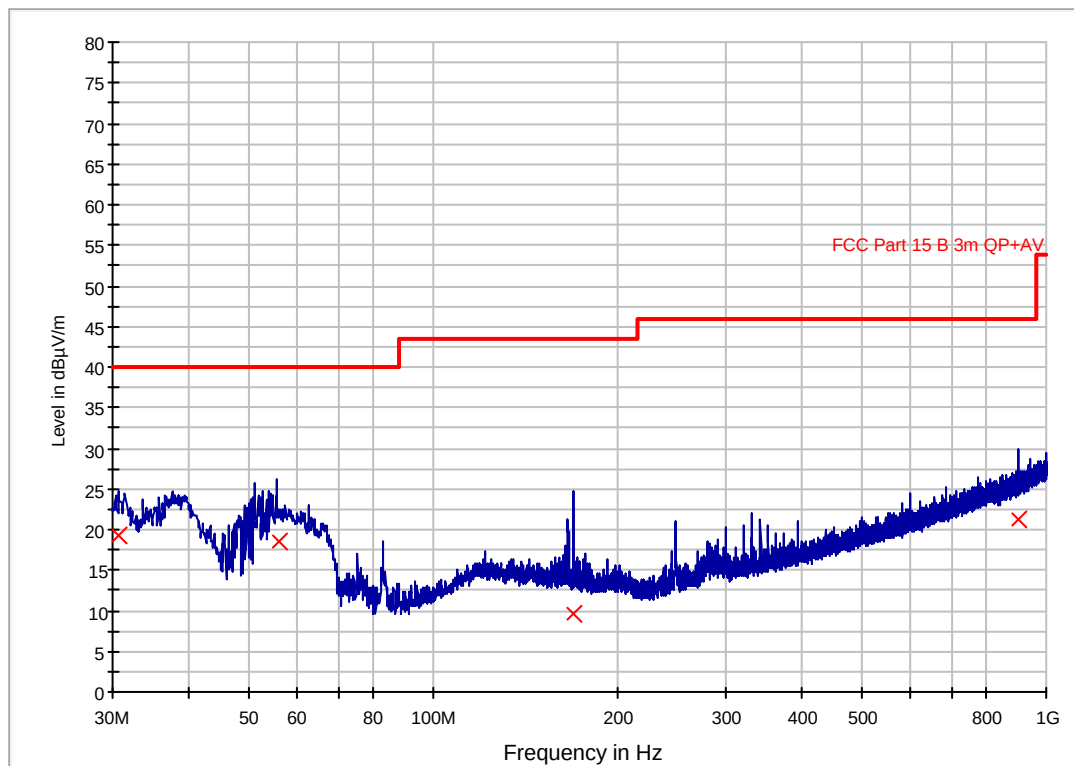

Radiated Emissions, 1-25 GHz

Measuring distance: 3m (1 – 8.5 GHz)
1m (5.5 – 18 GHz)

A pre-scan was performed above 18 GHz and no spurious emissions were detected.

Peak Detector:

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Limit	Margin
MHz	L,M,H	dB	dB μ V/m	dB μ V/m	dB
4882	M	0	50.3	74	23.8
5769.7	M	9.5	45.8	74	28.2

Average Detector:


Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Duty cycle corr. factor	Limit	Margin
MHz	L,M,H	dB	dB μ V/m	dB	dB μ V/m	dB
4882	M	0	30.3	20	54	23.8
5769.7	M	9.5	25.8	20	54	28.2

Average Detector values are calculated from Peak values by Duty Cycle Correction Factor.

Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor".

Distance correction factor is included on the plots for measurements @1m.

See plots.

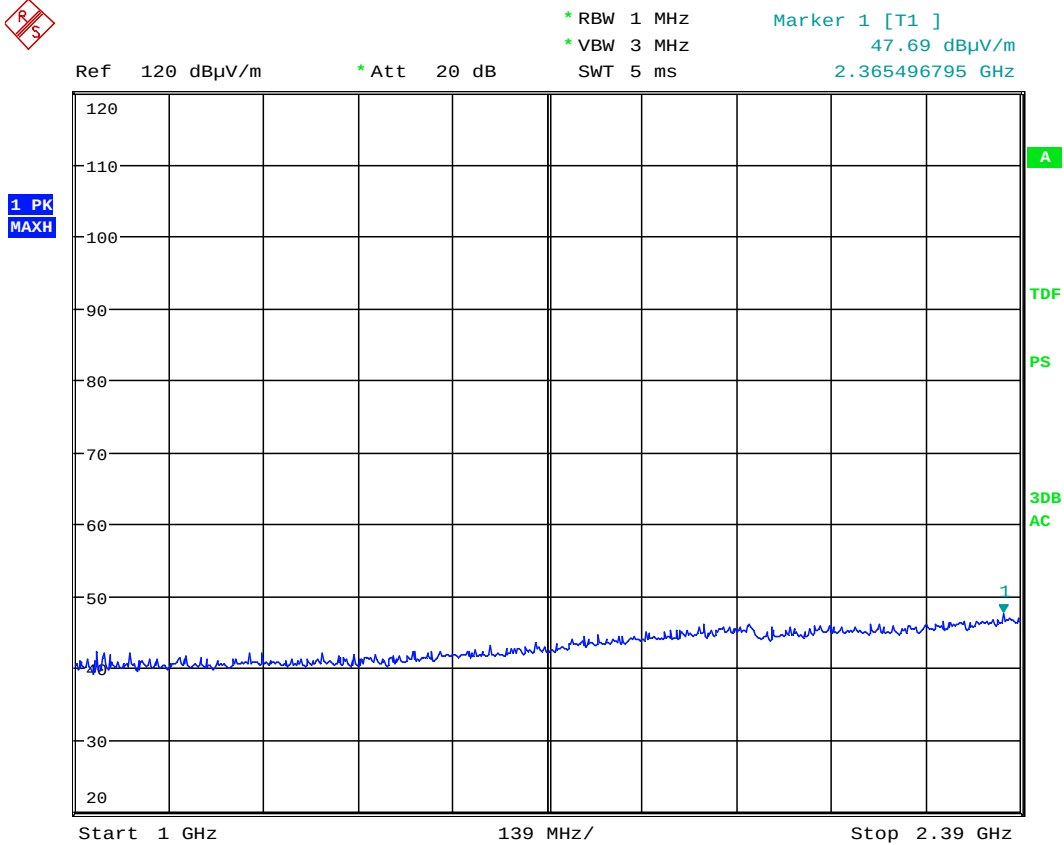

Date: 10.DEC.2014 13:11:50

Radiated Emissions, 1000 -2390MHz, VP



* RBW 1 MHz
* VBW 3 MHz
SWT 5 ms

Marker 1 [T1]
48.29 dBμV/m
2.385544872 GHz


Ref 120 dBμV/m

* Att 20 dB

SWT 5 ms

2.385544872 GHz

1 PK
MAXH

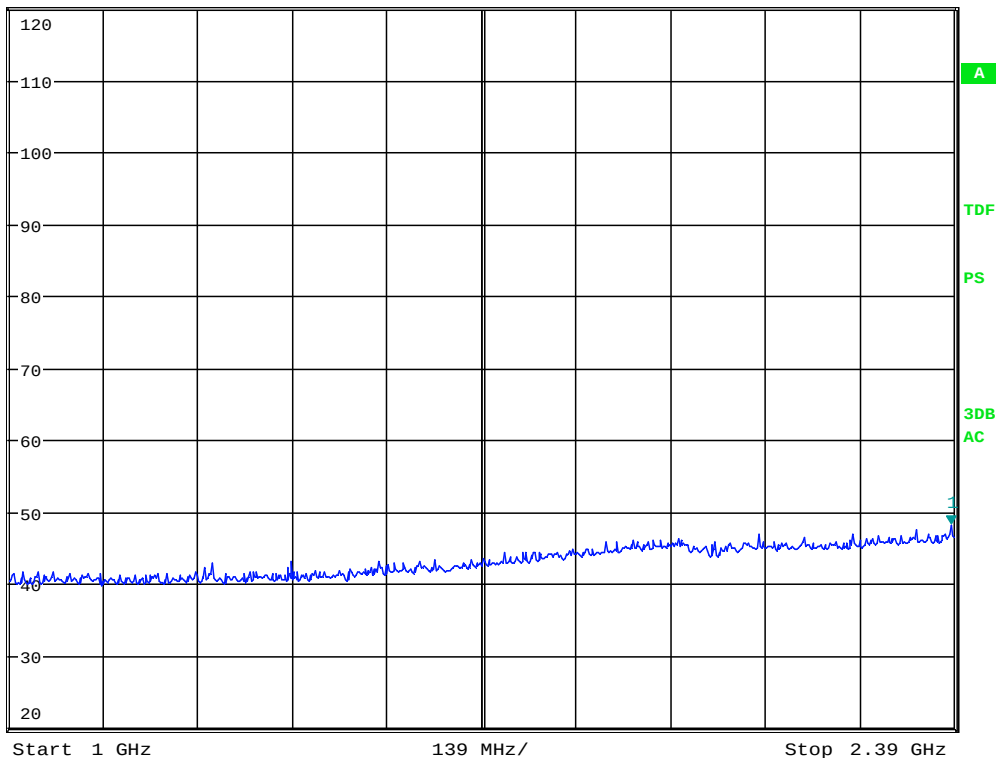

Date: 10.DEC.2014 13:17:54

Radiated Emissions, 1000 -2390MHz, HP



* RBW 1 MHz
* VBW 3 MHz
SWT 2.5 ms

Marker 1 [T1]
45.83 dBμV/m
2.584134615 GHz


Ref 97.5 dBμV/m

* Att 10 dB

SWT 2.5 ms


2.584134615 GHz

1 PK
MAXH

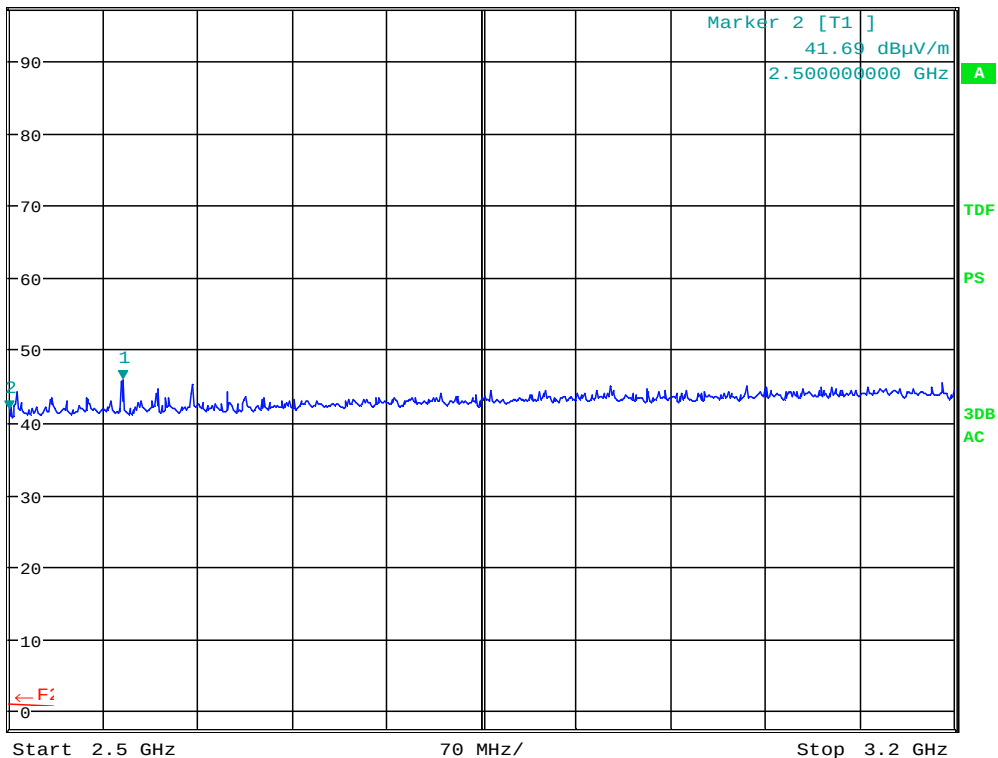

Date: 10.DEC.2014 13:49:04

Radiated Emissions, 2500 -3200MHz, VP

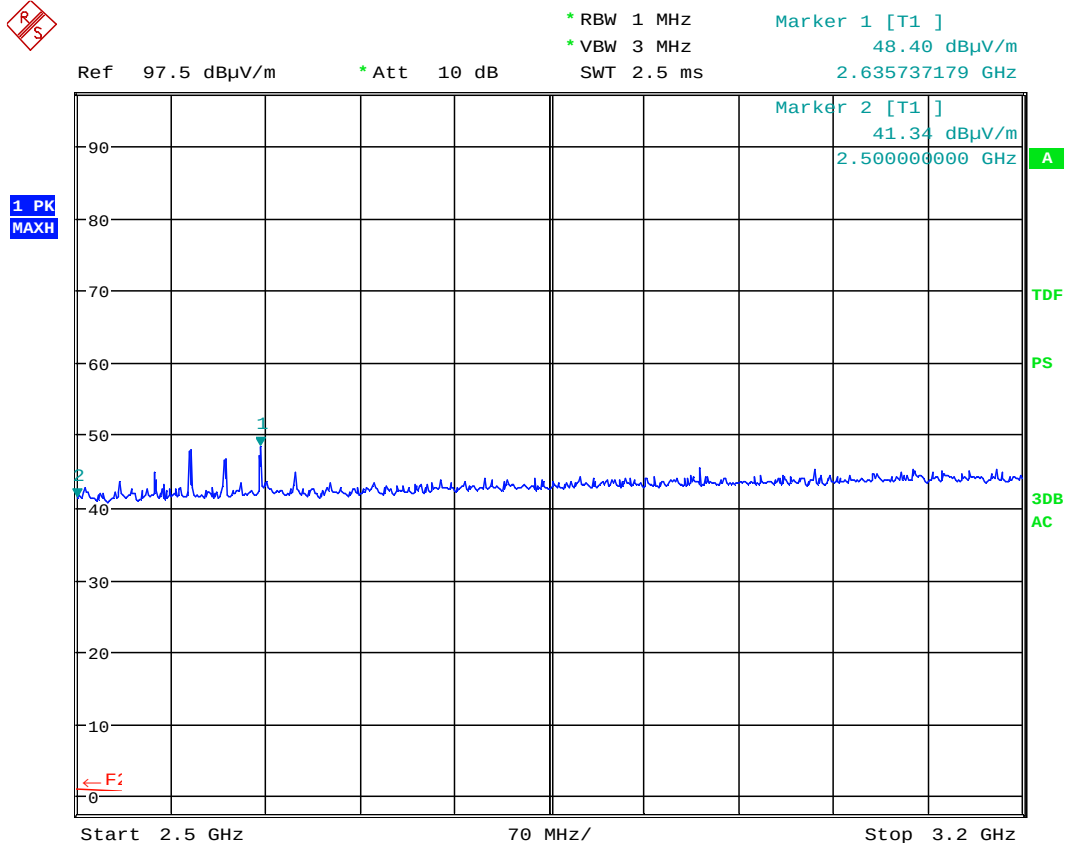

Date: 10.DEC.2014 13:51:06

Radiated Emissions, 2500 -3200MHz, HP



* RBW 1 MHz
* VBW 3 MHz
SWT 35 ms

Marker 1 [T1]
52.88 dB μ V/m
8.217948718 GHz


Ref 82 dB μ V/m

* Att 10 dB

SWT 35 ms

8.217948718 GHz

1 PK
MAXH

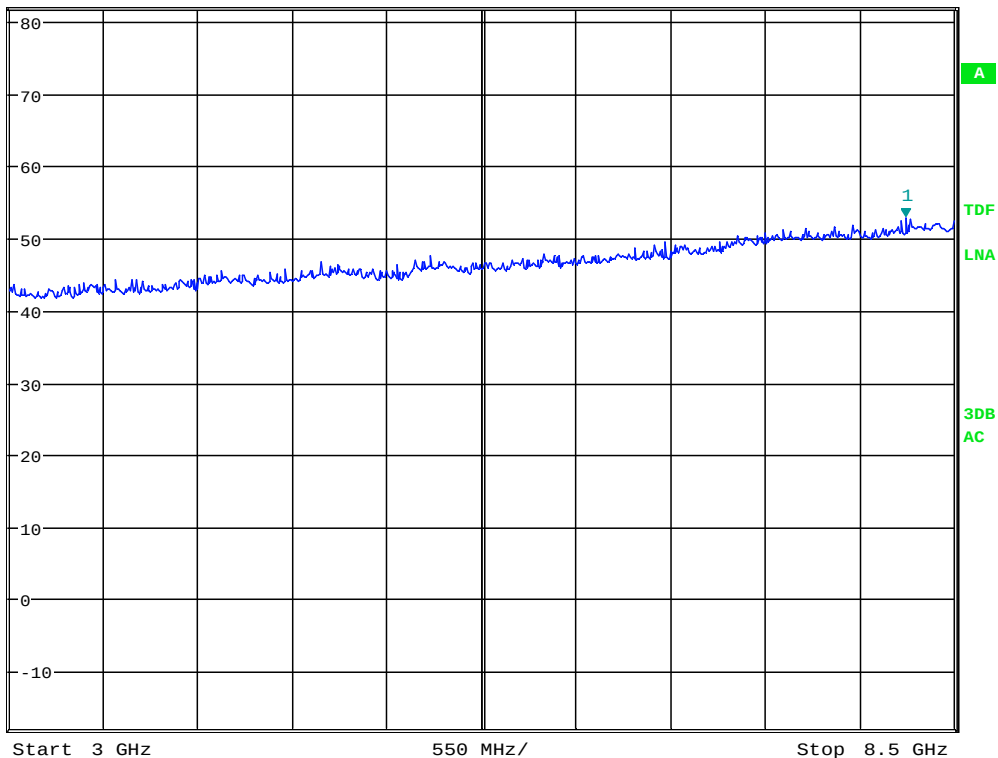


Date: 10.DEC.2014 14:17:06

Radiated Emissions, 3000 -8500MHz, VP



* RBW 1 MHz
* VBW 3 MHz
SWT 35 ms

Marker 1 [T1]
52.76 dBμV/m
8.288461538 GHz

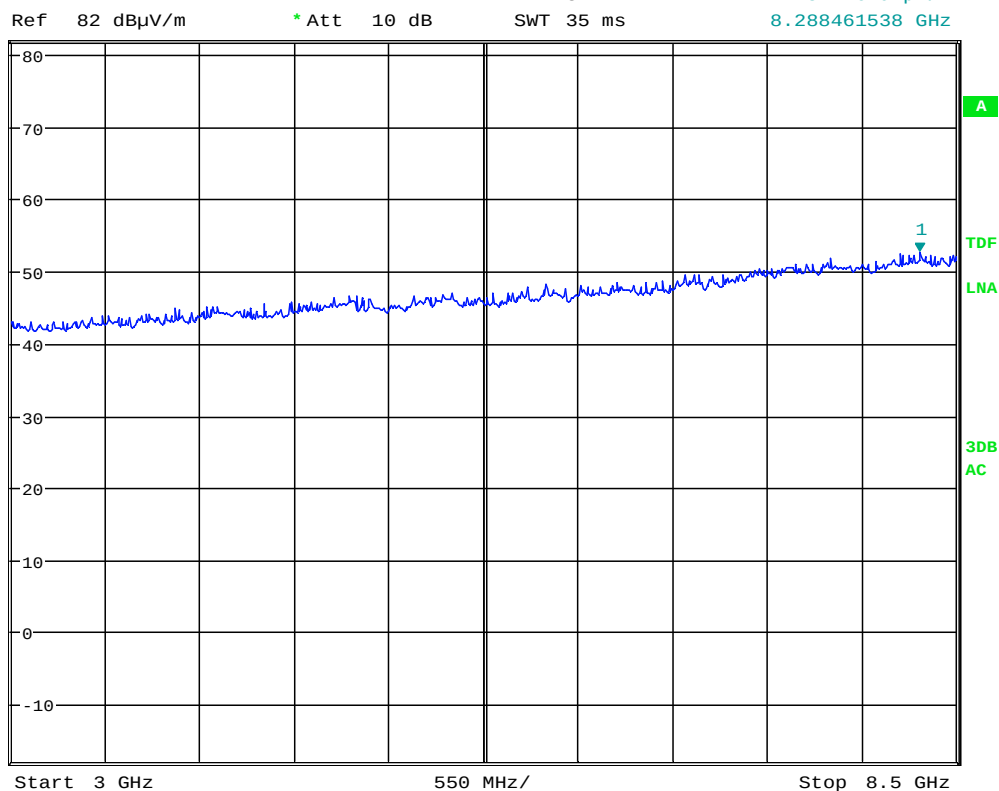


Date: 10.DEC.2014 14:18:59

Radiated Emissions, 3000 -8500MHz, HP



* RBW 1 MHz
* VBW 3 MHz
SWT 20 ms
Marker 1 [T1]
36.80 dBμV/m
8.254807692 GHz

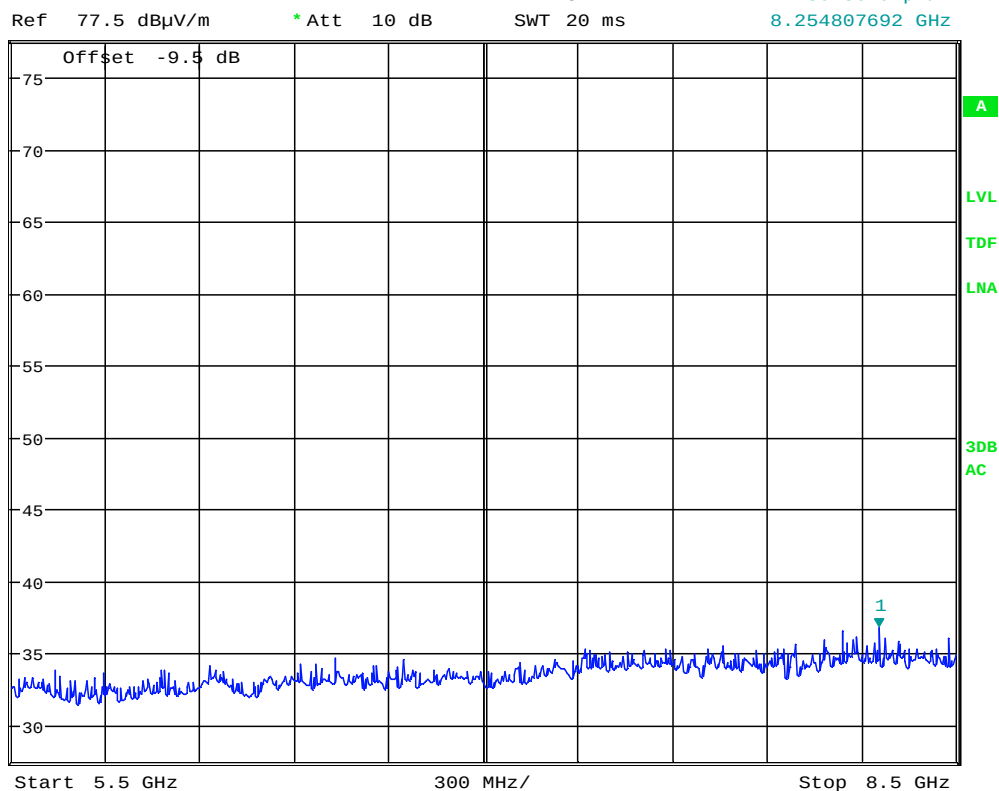

Date: 10.DEC.2014 14:58:47

Radiated Emissions, 5500 -8500MHz, VP, @1m




* RBW 1 MHz
* VBW 3 MHz
SWT 20 ms

Marker 1 [T1]
37.89 dBμV/m
5.769230769 GHz

Ref 77.5 dBμV/m * Att 10 dB

1 PK
MAXH

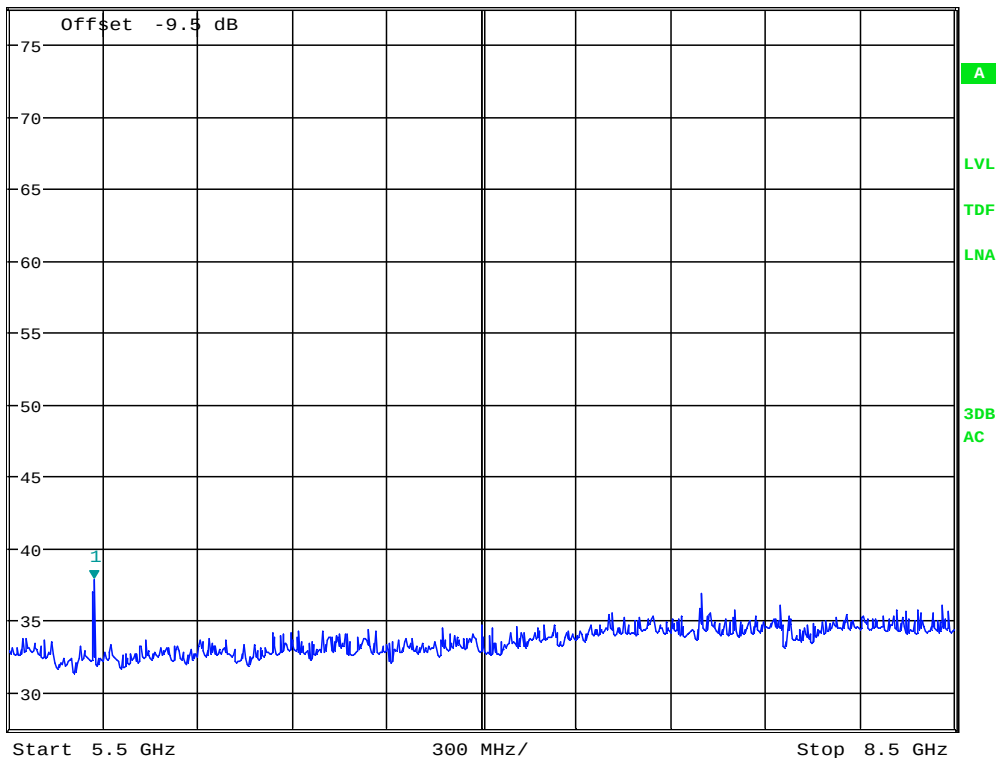

Date: 10.DEC.2014 15:00:40


Radiated Emissions, 5500 -8500MHz, HP, @1m



* RBW 1 MHz
* VBW 3 MHz
Marker 1 [T1]
45.87 dB μ V/m
11.304487179 GHz

Ref 72.5 dB μ V/m * Att 10 dB SWT 25 ms

1 PK
MAXH

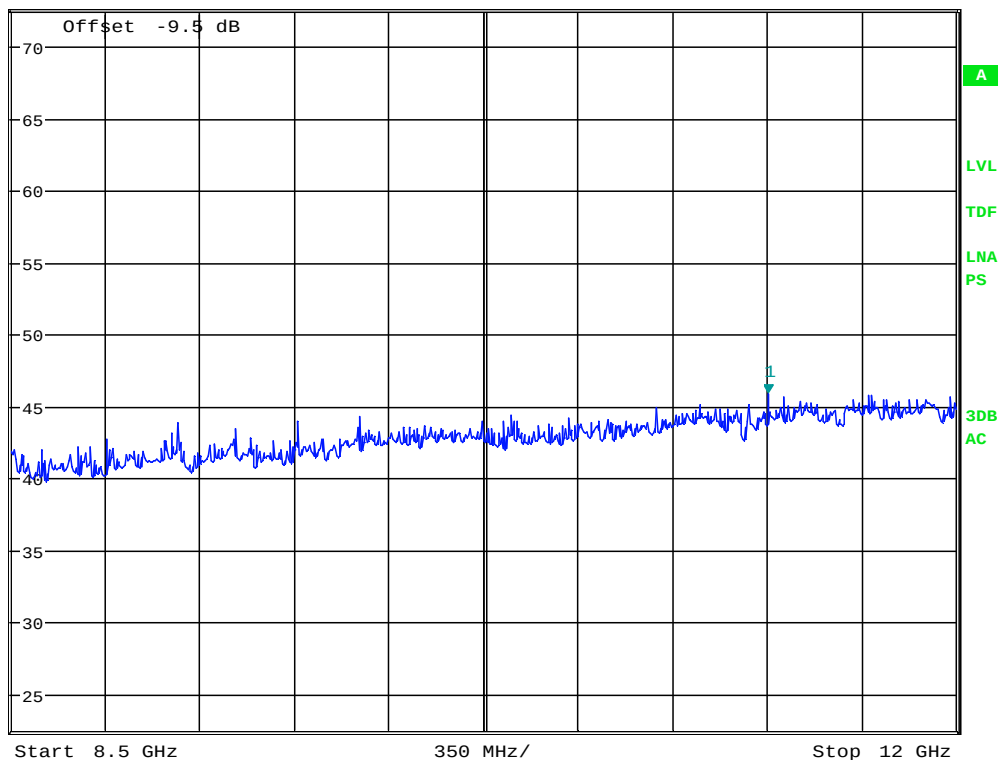


Date: 10.DEC.2014 15:31:15

Radiated Emissions, 8500 -12000MHz, VP, @1m



* RBW 1 MHz
* VBW 3 MHz
SWT 25 ms

Marker 1 [T1]
46.04 dBμV/m
11.842948718 GHz

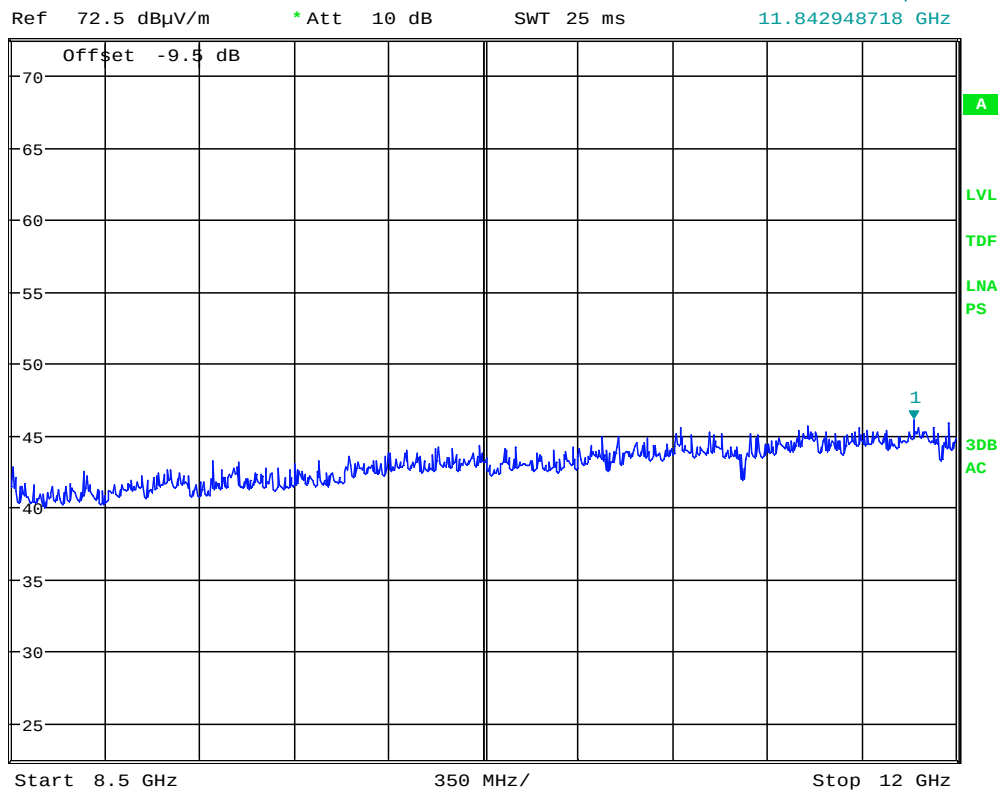

Date: 10.DEC.2014 15:33:07

Radiated Emissions, 8500 -12000MHz, HP, @1m

Radiated Emissions, 9608MHz, VP, @1m

Radiated Emissions, 9764MHz, VP, @1m

Radiated Emissions, 9920MHz, VP, @1m



* RBW 1 MHz
* VBW 3 MHz
SWT 35 ms

Marker 1 [T1]
46.36 dBμV/m
17.942307692 GHz




Date: 10.DEC.2014 15:49:02

Radiated Emissions, 12000 -18000MHz, VP, @1m




* RBW 1 MHz
* VBW 3 MHz
Marker 1 [T1]
46.28 dBμV/m
17.807692308 GHz

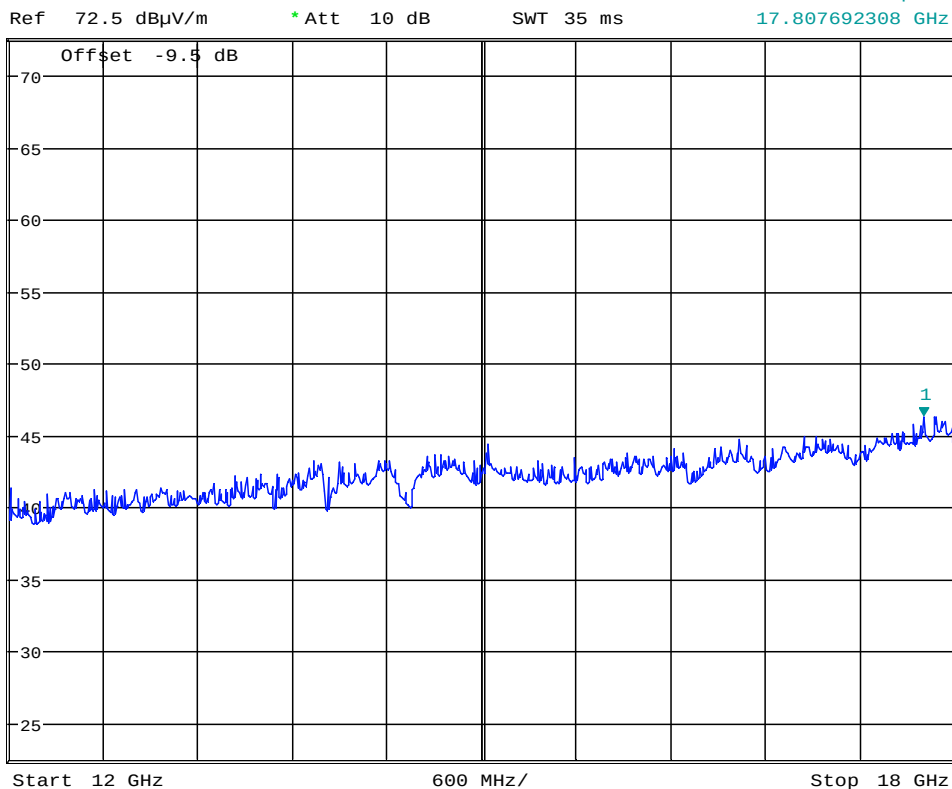


Date: 10.DEC.2014 15:50:54

Radiated Emissions, 12000 -18000MHz, HP, @1m

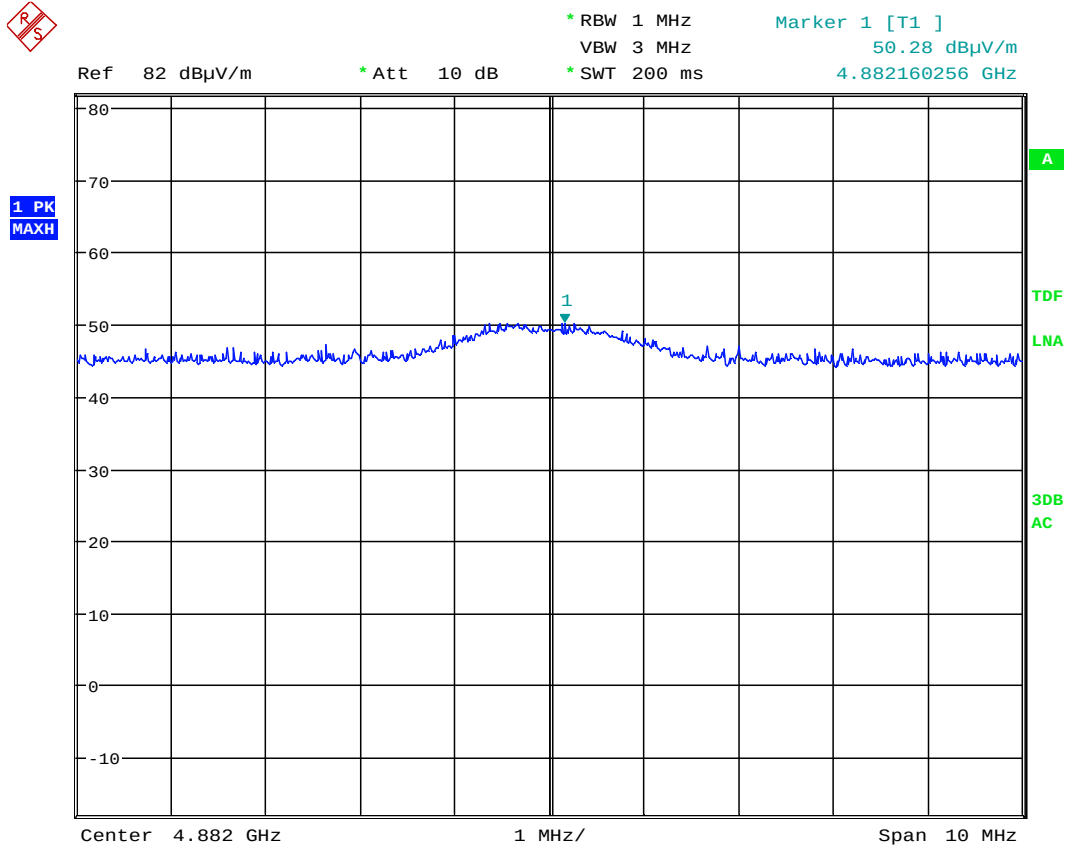

Date: 10.DEC.2014 14:34:50

Radiated Emissions, 4882 MHz, VP, @1m

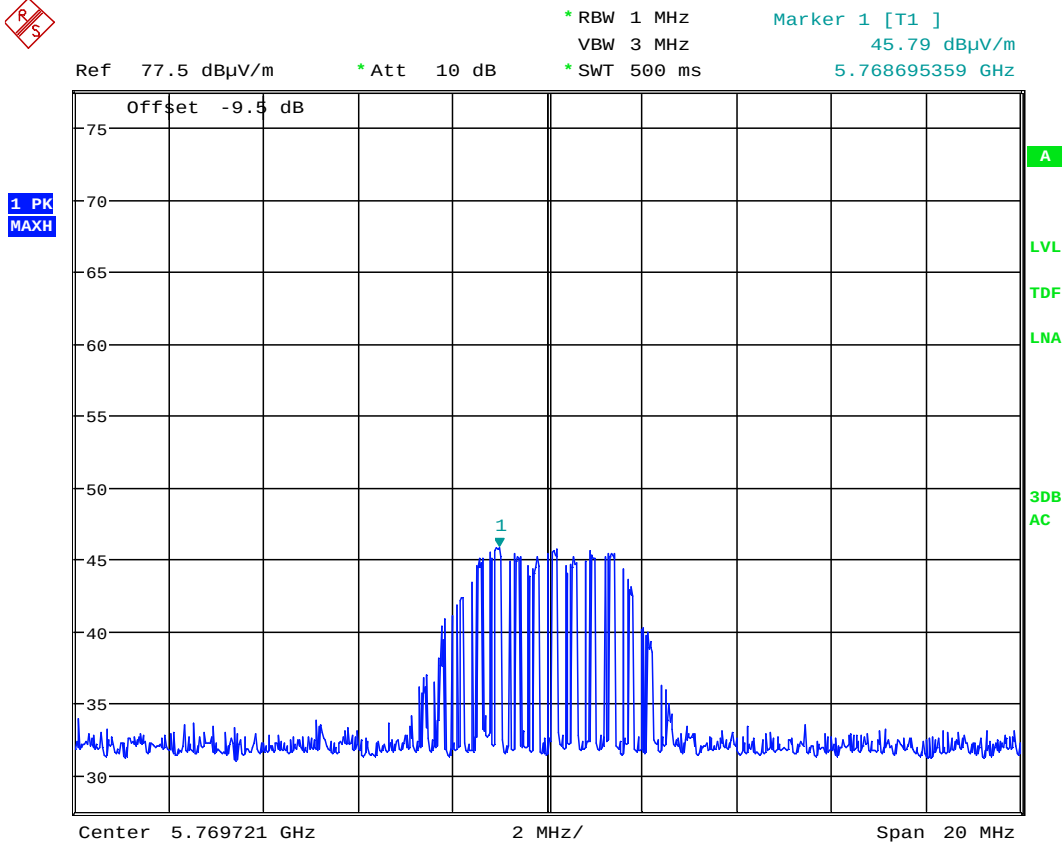

Date: 10.DEC.2014 15:11:11

Radiated Emissions, 5769.7 MHz, VP, @1m

4 LIST OF TEST EQUIPMENT


To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.

No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1*	FSW26	Spectrum Analyzer	Rohde & Schwarz	LR 1640	2014.09	2015.09
2	ESU40	Measuring Receiver	Rohde & Schwarz	LR 1639	2014.11	2015.11
3*	4768-10	Attenuator	Narda	LR 1356	Cal b4 use	
4	6HC3000/18000	Highpass Filter	Trilithic	LR 1614	Cal b4 use	
5	JB3	BiLog Antenna	Sunol Sciences	N-4525	2012.10.11	2015.10.11
6	LNA6900	Preamplifier	Teseq	LR 1593	2014.07	2015.07
7	3115	Horn Antenna	EMCO	LR 1330	2010.08.05	2015.08.05
8	8449A	Pre-amplifier	Hewlett Packard	LR 1322	2014-09	2015-09
9	643	Antenna Horn	Narda	LR 093	2009.01.26	2019.01.26
10	PM7320X	Antenna Horn	Sivers Lab	LR 102	2009.01.26	2019.01.26
11	DBF-520-20	Antenna Horn	Systron Donner	LR 100	2009.01.26	2019.01.26
12	638	Antenna Horn	Narda	LR 1480	2010.06.17	2015.06.17
14	HFH2-Z2	Loop Antenna	Rohde & Schwarz	LR 285	2010.10	2015.10.08
15	Model 87V	Multimeter	Fluke	N-4672	2014.09.17	2015.09
16	6812B	AC Power Source	Agilent	LR 1515	Cal b4 use	
17	ESHS10	Measuring Receiver	Rohde & Schwarz	N- 3528	2014.09.15	2015.09.15
18	ESH3-Z5	Two Line V-Network	Rohde & Schwarz	LR 1076	Cal b4 use	
19	ESH3-Z2	Pulse Limiter	Rohde & Schwarz	LR 1074	Cal b4 use	

*Used for Conducted tests performed from 2013.11.13 to 2013.12.05.

5 BLOCK DIAGRAM

5.1 Power Line Conducted Emission

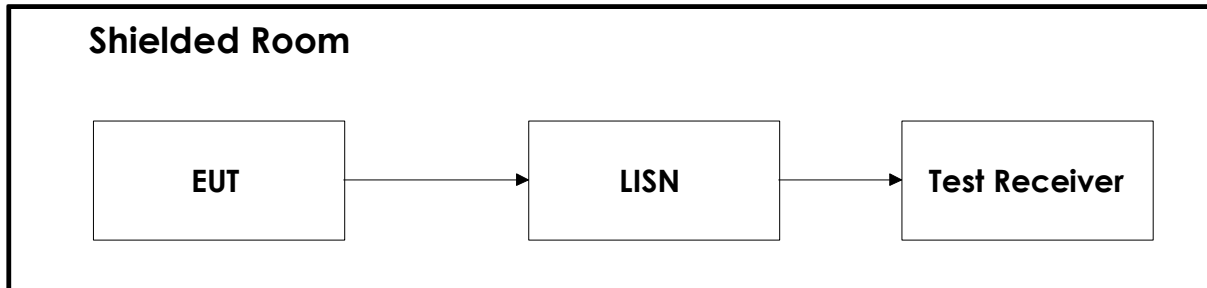

5.2 Test Site Radiated Emission

