



FCC RADIO TEST REPORT

FCC ID : ACJ9TGWL24A
Equipment : Radio Module
Brand Name : Panasonic
Model Name : FZ-40(mk3)
Applicant : Panasonic Corporation of North America
Two Riverfront Plaza, Newark, New Jersey, 07102-5490, USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Aug. 15, 2025 and testing was performed from Aug. 26, 2025 to Oct. 07, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	8
1.4 Applicable Standards.....	9
2 Test Configuration of Equipment Under Test	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example.....	13
3 Test Result	14
3.1 Output Power Measurement.....	14
3.2 Radiated Band Edges and Spurious Emission Measurement	15
3.3 Antenna Requirements	19
4 List of Measuring Equipment.....	20
5 Measurement Uncertainty	21
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission Test Result	
Appendix C. Duty Cycle Plots	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4D1251-01C	01	Initial issue of report	Nov. 10, 2025
FR4D1251-01C	02	Revised Summary of Test Result. This report is an updated version, replacing the report issued on Nov. 10, 2025.	Nov. 19, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(2)	6dB Bandwidth	-	See Note
-	2.1049	99% Occupied Bandwidth	-	See Note
3.1	15.247(b)	Power Output Measurement	Pass	-
-	15.247(e)	Power Spectral Density	-	See Note
-	15.247(d)	Conducted Band Edges	-	See Note
		Conducted Spurious Emission	-	See Note
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	5.48 dB under the limit at 2370.82 MHz
-	15.207	AC Conducted Emission	Pass	See Note
3.3	15.203	Antenna Requirement	Pass	-

Note:

- For host device, the spot check Radiated Spurious Emission and complies with the limit in this test report.
- For host device, the spot check Conducted Output Power is no difference after compared to module (Model: Panasonic WL24A).

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Julia Chang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Specification is subject to this standard	
General Specs	Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11a/ax/be
Tx / Rx Frequency	2400 MHz ~ 2483.5 MHz
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax/be : OFDMA (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Antenna Information				
Antenna	Brand Name	Panasonic	Peak Gain	Main Ant. (Chain B): 0.47 dBi Aux Ant. (Chain A): 2.58 dBi
	Model Name	Main Antenna: N1ZYYY000435 Aux Antenna: N1ZYYY000474	Type	PIFA Antenna

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

Specification of Accessory		
AC Adapter	Brand Name	Panasonic
	Model Name	CF-AA5713A
Battery	Brand Name	Panasonic
	Model Name	FZ-VZSU1XU

Remark:

1. MIMO Main+ Aux Ant. Directional Gain is a calculated result from MIMO Main Ant. and MIMO Aux Ant..The formula used in calculation is documented in section 1.1.1.
2. Power of MIMO Main Ant. + Aux Ant. is a calculated result from sum of the power Main Ant. and MIMO Aux Ant..
3. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
4. The product was installed into Portable Computer (Brand Name: Panasonic, Model Name: FZ-40(mk3) during test

1.1.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	ChainA	ChainB	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4GHz	2.58	0.47	2.58	4.60	0.00	0.00



Calculation example:

If a device has two antenna, $G_{ANT1} = 2.58\text{dBi}$; $G_{ANT2} = 0.47\text{dBi}$

Directional gain of power measurement = $\max(2.58, 0.47) + 0 = 2.58 \text{ dBi}$

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{\frac{2.58 \text{ dBi}}{20}} + 10^{\frac{0.47 \text{ dBi}}{20}} \right]^2 \right\} / 2 \\ = 4.60 \text{ dBi}$$

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, 03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		

2.2 Test Mode

MIMO Mode

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ax HE20(Covered by EHT20)	MCS0
802.11ax HE40(Covered by EHT40)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0


**SISO Mode**

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ax HE20(Covered by EHT20)	MCS0
802.11ax HE40(Covered by EHT40)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0

Remark:

The detailed Radiated test modes are shown in Appendix B.

2.3 Connection Diagram of Test System

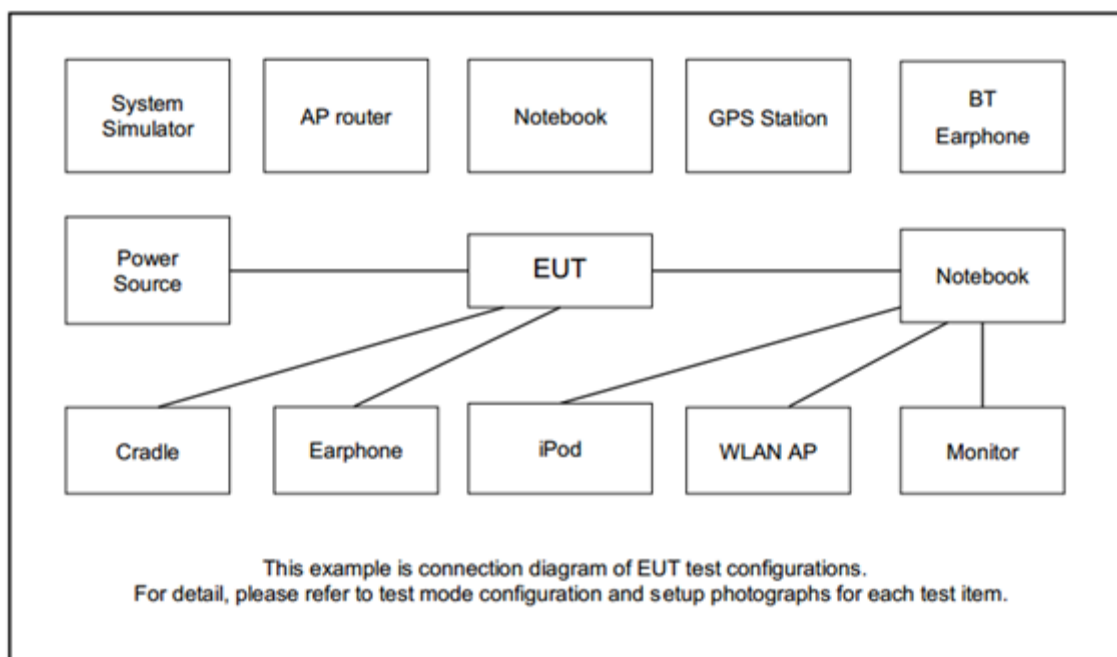

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Earphone	Moto	SJYN1181B	N/A	N/A	Unshielded, 1.25m



2.5 EUT Operation Test Setup

The RF test items, utility “DRTU Version:DRTU 0.8662.23.150.0” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.1.4 Test Setup

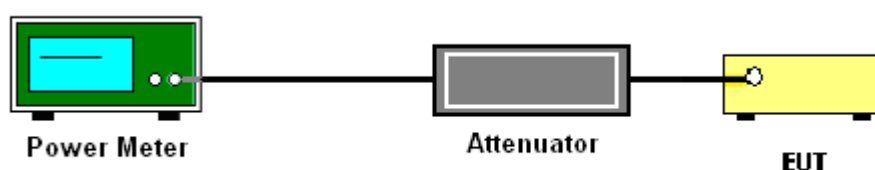

3.1.5 Test Result of Average Output Power

Please refer to Appendix A.

3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup


For radiated emissions below 30MHz

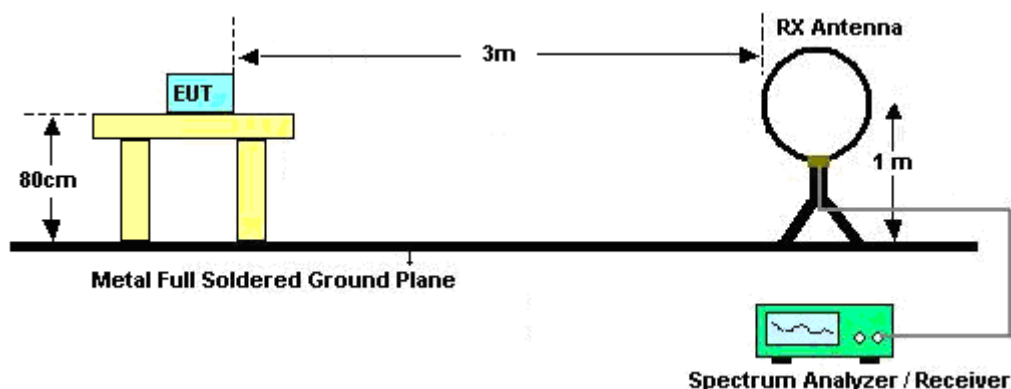


For radiated emissions from 30MHz to 1GHz

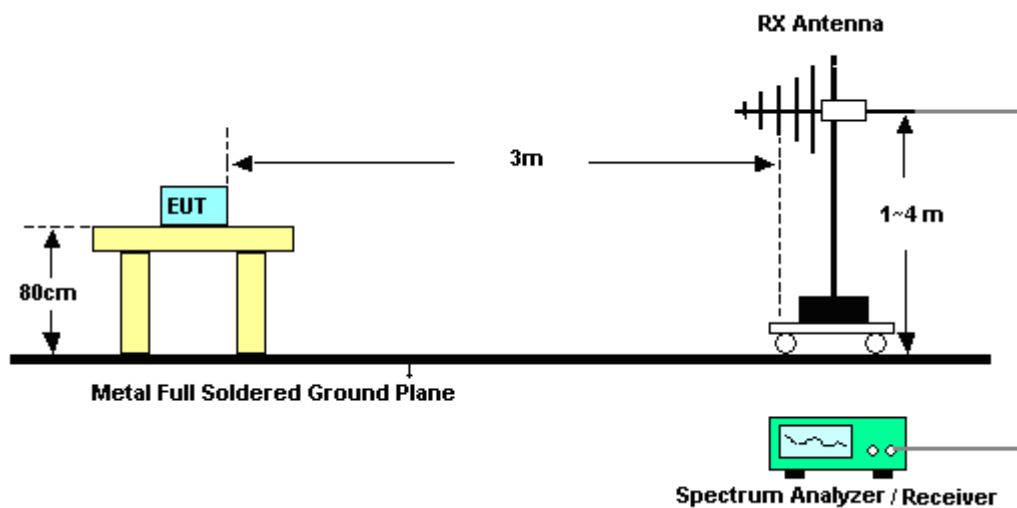

For radiated test from 1GHz to 18GHz

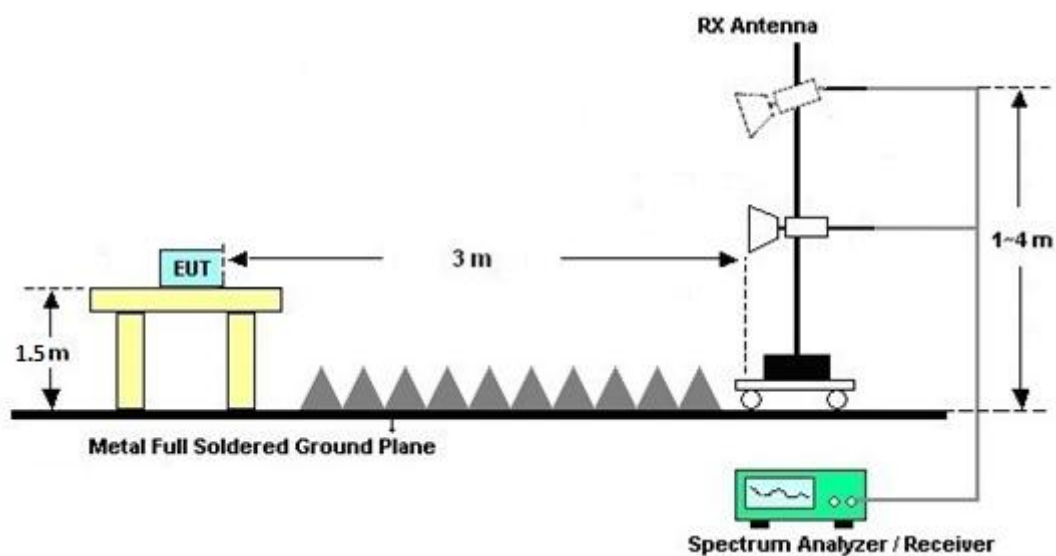

For radiated test above 18GHz

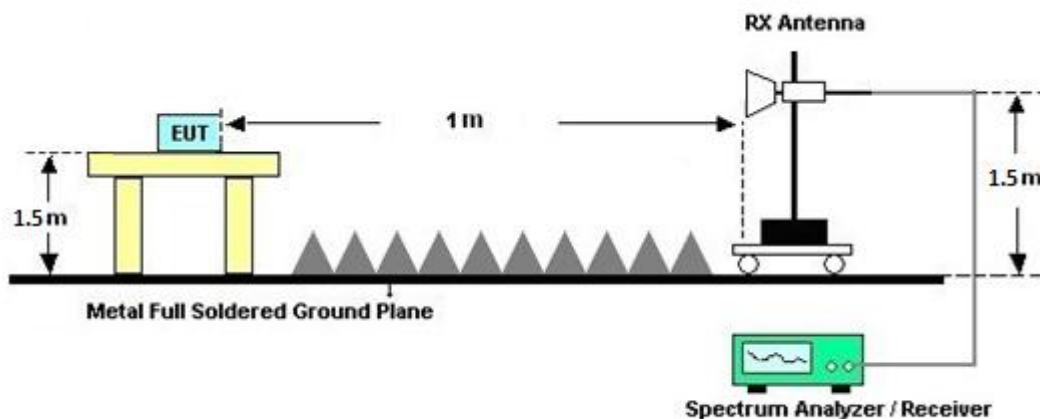

3.2.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site **v01r01**, and the result comes out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.2.7 Duty Cycle

Please refer to Appendix C.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.3 Antenna Requirements

3.3.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.3.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 16, 2024	Sep. 24, 2025 ~ Oct. 07, 2025	Oct. 15, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Nov. 18, 2024	Sep. 24, 2025 ~ Oct. 07, 2025	Nov. 17, 2025	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Aug. 26, 2025	Sep. 24, 2025 ~ Oct. 07, 2025	Aug. 25, 2026	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Sep. 24, 2025 ~ Oct. 07, 2025	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Sep. 24, 2025 ~ Oct. 07, 2025	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Sep. 24, 2025 ~ Oct. 07, 2025	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	N/A	Dec. 09, 2024	Sep. 24, 2025 ~ Oct. 07, 2025	Dec. 08, 2025	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	55606 & 08	30MHz~1GHz	Nov. 27, 2024	Sep. 24, 2025 ~ Oct. 07, 2025	Nov. 26, 2025	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz-18GHz	Nov. 01, 2024	Sep. 24, 2025 ~ Oct. 07, 2025	Oct. 31, 2025	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00994	18GHz-40GHz	Jan. 09, 2025	Sep. 24, 2025 ~ Oct. 07, 2025	Jan. 08, 2026	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Dec. 31, 2024	Sep. 24, 2025 ~ Oct. 07, 2025	Dec. 30, 2025	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 12, 2024	Sep. 24, 2025 ~ Oct. 07, 2025	Nov. 11, 2025	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 16, 2025	Sep. 24, 2025 ~ Oct. 07, 2025	Jan. 15, 2026	Radiation (03CH20-HY)
Hygrometer	TECEPEL	DTM-303A	TP211382	N/A	Mar. 31, 2025	Sep. 24, 2025 ~ Oct. 07, 2025	Mar. 30, 2026	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Sep. 24, 2025 ~ Oct. 07, 2025	N/A	Radiation (03CH20-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Aug.26, 2025~ Oct.07, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Aug.26, 2025~ Oct.07, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101565	10Hz~40GHz	Jan. 14, 2025	Aug.26, 2025~ Oct.07, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Aug.26, 2025~ Oct.07, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	Aug.26, 2025~ Oct.07, 2025	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	6.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.7 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Jhou	Temperature:	21~25	°C
Test Date:	2025/8/26~2025/10/07	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					ChainA	ChainB	SUM	ChainA	ChainB	ChainA	ChainB	ChainA	ChainB	ChainA	ChainB	
11b	1Mbps	1	1	2412	17.10	20.60		30.00	30.00	2.58	0.47	19.68	21.07	36.00	36.00	Pass
11b	1Mbps	1	6	2437	19.20	20.80		30.00	30.00	2.58	0.47	21.78	21.27	36.00	36.00	Pass
11b	1Mbps	1	11	2462	19.40	20.90		30.00	30.00	2.58	0.47	21.98	21.37	36.00	36.00	Pass
11b	1Mbps	1	12	2467	19.30	19.80		30.00	30.00	2.58	0.47	21.88	20.27	36.00	36.00	Pass
11b	1Mbps	1	13	2472	16.90	18.20		30.00	30.00	2.58	0.47	19.48	18.67	36.00	36.00	Pass
11g	6Mbps	1	1	2412	18.80	19.70		30.00	30.00	2.58	0.47	21.38	20.17	36.00	36.00	Pass
11g	6Mbps	1	6	2437	19.30	20.20		30.00	30.00	2.58	0.47	21.88	20.67	36.00	36.00	Pass
11g	6Mbps	1	11	2462	19.10	20.90		30.00	30.00	2.58	0.47	21.68	21.37	36.00	36.00	Pass
11g	6Mbps	1	12	2467	14.90	15.90		30.00	30.00	2.58	0.47	17.48	16.37	36.00	36.00	Pass
11g	6Mbps	1	13	2472	13.20	14.10		30.00	30.00	2.58	0.47	15.78	14.57	36.00	36.00	Pass
HT20	MCS0	1	1	2412	18.90	19.50		30.00	30.00	2.58	0.47	21.48	19.97	36.00	36.00	Pass
HT20	MCS0	1	6	2437	19.30	20.40		30.00	30.00	2.58	0.47	21.88	20.87	36.00	36.00	Pass
HT20	MCS0	1	11	2462	19.40	20.80		30.00	30.00	2.58	0.47	21.98	21.27	36.00	36.00	Pass
HT20	MCS0	1	12	2467	14.80	15.80		30.00	30.00	2.58	0.47	17.38	16.27	36.00	36.00	Pass
HT20	MCS0	1	13	2472	13.20	14.10		30.00	30.00	2.58	0.47	15.78	14.57	36.00	36.00	Pass
HT40	MCS0	1	3	2422	18.70	19.20		30.00	30.00	2.58	0.47	21.28	19.67	36.00	36.00	Pass
HT40	MCS0	1	6	2437	19.30	19.60		30.00	30.00	2.58	0.47	21.88	20.07	36.00	36.00	Pass
HT40	MCS0	1	9	2452	19.00	18.40		30.00	30.00	2.58	0.47	21.58	18.87	36.00	36.00	Pass
HT40	MCS0	1	10	2457	14.20	14.40		30.00	30.00	2.58	0.47	16.78	14.87	36.00	36.00	Pass
HT40	MCS0	1	11	2462	13.20	14.80		30.00	30.00	2.58	0.47	15.78	15.27	36.00	36.00	Pass

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					ChainA	ChainB	SUM	ChainA	ChainB	ChainA	ChainB	ChainA	ChainB	ChainA	ChainB	
HT20	MCS0	2	1	2412	17.60	17.50	20.56	30.00		2.58		23.14		36.00		Pass
HT20	MCS0	2	6	2437	19.20	19.40	22.31	30.00		2.58		24.89		36.00		Pass
HT20	MCS0	2	11	2462	18.40	18.30	21.36	30.00		2.58		23.94		36.00		Pass
HT20	MCS0	2	12	2467	13.40	13.20	16.31	30.00		2.58		18.89		36.00		Pass
HT20	MCS0	2	13	2472	12.00	12.00	15.01	30.00		2.58		17.59		36.00		Pass
HT40	MCS0	2	3	2422	17.60	17.60	20.61	30.00		2.58		23.19		36.00		Pass
HT40	MCS0	2	6	2437	18.40	18.60	21.51	30.00		2.58		24.09		36.00		Pass
HT40	MCS0	2	9	2452	17.60	17.70	20.66	30.00		2.58		23.24		36.00		Pass
HT40	MCS0	2	10	2457	11.40	11.40	14.41	30.00		2.58		16.99		36.00		Pass
HT40	MCS0	2	11	2462	12.40	12.50	15.46	30.00		2.58		18.04		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						ChainA	ChainB	SUM	ChainA	ChainB	ChainA	ChainB	ChainA	ChainB	ChainA	ChainB	
EHT20	MCS0	1	1	2412	Full	18.80	19.80		30.00	30.00	2.58	0.47	21.38	20.27	36.00	36.00	Pass
EHT20	MCS0	1	6	2437	Full	19.10	20.20		30.00	30.00	2.58	0.47	21.68	20.67	36.00	36.00	Pass
EHT20	MCS0	1	11	2462	Full	19.10	20.70		30.00	30.00	2.58	0.47	21.68	21.17	36.00	36.00	Pass
EHT20	MCS0	1	12	2467	Full	14.70	15.60		30.00	30.00	2.58	0.47	17.28	16.07	36.00	36.00	Pass
EHT20	MCS0	1	13	2472	Full	13.40	14.10		30.00	30.00	2.58	0.47	15.98	14.57	36.00	36.00	Pass
EHT40	MCS0	1	3	2422	Full	18.90	18.70		30.00	30.00	2.58	0.47	21.48	19.17	36.00	36.00	Pass
EHT40	MCS0	1	6	2437	Full	19.10	19.50		30.00	30.00	2.58	0.47	21.68	19.97	36.00	36.00	Pass
EHT40	MCS0	1	9	2452	Full	18.80	18.30		30.00	30.00	2.58	0.47	21.38	18.77	36.00	36.00	Pass
EHT40	MCS0	1	10	2457	Full	14.00	14.20		30.00	30.00	2.58	0.47	16.58	14.67	36.00	36.00	Pass
EHT40	MCS0	1	11	2462	Full	13.40	14.90		30.00	30.00	2.58	0.47	15.98	15.37	36.00	36.00	Pass

2.4GHz Band MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						ChainA	ChainB	SUM	ChainA	ChainB	ChainA	ChainB	ChainA	ChainB	ChainA	ChainB	
EHT20	MCS0	2	1	2412	Full	17.60	17.50	20.56	30.00		2.58		23.14		36.00		Pass
EHT20	MCS0	2	6	2437	Full	19.10	19.40	22.26	30.00		2.58		24.84		36.00		Pass
EHT20	MCS0	2	11	2462	Full	18.40	18.30	21.36	30.00		2.58		23.94		36.00		Pass
EHT20	MCS0	2	12	2467	Full	13.30	13.10	16.21	30.00		2.58		18.79		36.00		Pass
EHT20	MCS0	2	13	2472	Full	12.10	12.00	15.06	30.00		2.58		17.64		36.00		Pass
EHT40	MCS0	2	3	2422	Full	17.60	17.50	20.56	30.00		2.58		23.14		36.00		Pass
EHT40	MCS0	2	6	2437	Full	18.30	18.50	21.41	30.00		2.58		23.99		36.00		Pass
EHT40	MCS0	2	9	2452	Full	17.40	17.30	20.36	30.00		2.58		22.94		36.00		Pass
EHT40	MCS0	2	10	2457	Full	11.20	11.20	14.21	30.00		2.58		16.79		36.00		Pass
EHT40	MCS0	2	11	2462	Full	12.30	12.30	15.31	30.00		2.58		17.89		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	John Chuang 、 David Dai 、 Sam Chou	Temperature :	19.3~21.7°C
		Relative Humidity :	63.5~69.7%

Note symbol

-L	Low channel location
-R	High channel location

B1-1. Radiated Spurious Emission Test Modes

< Chain A >

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 6	2400-2483.5	Chain A	802.11b	11	2462	1Mbps	-	-
Mode 8	2400-2483.5	Chain A	802.11g	11	2462	6Mbps	-	-

**B1-2.Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11b	11	2488.56	45.50	54.00	-8.50	H	Avg.	Pass	-	Band Edge
	802.11b	11	-	-	-	-	-	-	-	-	Harmonic
8	802.11g	11	2484.23	48.30	54.00	-5.70	H	Avg.	Pass	-	Band Edge
	802.11g	11	-	-	-	-	-	-	-	-	Harmonic



Mode	6																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																			
ANT	Chain A																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2488.45</td><td>58.46</td><td>74.00</td><td>-15.54</td><td>48.30</td><td>27.98</td><td>8.80</td><td>36.30</td><td>9.68</td><td>300</td><td>159</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2488.45	58.46	74.00	-15.54	48.30	27.98	8.80	36.30	9.68	300	159	Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>112.31</td><td>-----</td><td>-----</td><td>102.53</td><td>27.64</td><td>8.75</td><td>36.29</td><td>9.68</td><td>300</td><td>159</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	112.31	-----	-----	102.53	27.64	8.75	36.29	9.68	300	159	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2488.45	58.46	74.00	-15.54	48.30	27.98	8.80	36.30	9.68	300	159	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2462.00	112.31	-----	-----	102.53	27.64	8.75	36.29	9.68	300	159	Peak																																																																									
Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2488.56</td><td>45.50</td><td>54.00</td><td>-8.50</td><td>35.33</td><td>27.99</td><td>8.80</td><td>36.30</td><td>9.68</td><td>300</td><td>159</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2488.56	45.50	54.00	-8.50	35.33	27.99	8.80	36.30	9.68	300	159	Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>109.36</td><td>-----</td><td>-----</td><td>99.53</td><td>27.68</td><td>8.76</td><td>36.29</td><td>9.68</td><td>300</td><td>159</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	109.36	-----	-----	99.53	27.68	8.76	36.29	9.68	300	159	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2488.56	45.50	54.00	-8.50	35.33	27.99	8.80	36.30	9.68	300	159	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2462.00	109.36	-----	-----	99.53	27.68	8.76	36.29	9.68	300	159	Average																																																																									



Mode	6																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																							
ANT	Chain A																																																																																							
Pol.	Vertical					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2488.30</td><td>56.85</td><td>74.00</td><td>-17.15</td><td>46.69</td><td>27.98</td><td>8.80</td><td>36.30</td><td>9.68</td><td>300</td><td>94 Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2488.30	56.85	74.00	-17.15	46.69	27.98	8.80	36.30	9.68	300	94 Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>109.20</td><td>-----</td><td>-----</td><td>99.37</td><td>27.68</td><td>8.76</td><td>36.29</td><td>9.68</td><td>300</td><td>94 Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2462.00	109.20	-----	-----	99.37	27.68	8.76	36.29	9.68	300	94 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																															
1 2488.30	56.85	74.00	-17.15	46.69	27.98	8.80	36.30	9.68	300	94 Peak																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																															
1 2462.00	109.20	-----	-----	99.37	27.68	8.76	36.29	9.68	300	94 Peak																																																																														
Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2488.52</td><td>43.98</td><td>54.00</td><td>-10.02</td><td>33.81</td><td>27.99</td><td>8.80</td><td>36.30</td><td>9.68</td><td>300</td><td>94 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2488.52	43.98	54.00	-10.02	33.81	27.99	8.80	36.30	9.68	300	94 Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>106.24</td><td>-----</td><td>-----</td><td>96.41</td><td>27.68</td><td>8.76</td><td>36.29</td><td>9.68</td><td>300</td><td>94 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2462.00	106.24	-----	-----	96.41	27.68	8.76	36.29	9.68	300	94 Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																															
1 2488.52	43.98	54.00	-10.02	33.81	27.99	8.80	36.30	9.68	300	94 Average																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																															
1 2462.00	106.24	-----	-----	96.41	27.68	8.76	36.29	9.68	300	94 Average																																																																														



Mode	8																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																									
ANT	Chain A																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2493.96</td><td>61.56</td><td>74.00</td><td>-12.44</td><td>51.37</td><td>28.00</td><td>8.81</td><td>36.30</td><td>9.68</td><td>300 161 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2493.96	61.56	74.00	-12.44	51.37	28.00	8.81	36.30	9.68	300 161 Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>115.16</td><td>-----</td><td>-----</td><td>105.33</td><td>27.68</td><td>8.76</td><td>36.29</td><td>9.68</td><td>300 161 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	115.16	-----	-----	105.33	27.68	8.76	36.29	9.68	300 161 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2493.96	61.56	74.00	-12.44	51.37	28.00	8.81	36.30	9.68	300 161 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2462.00	115.16	-----	-----	105.33	27.68	8.76	36.29	9.68	300 161 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2484.23</td><td>48.30</td><td>54.00</td><td>-5.70</td><td>38.18</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>300 161 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2484.23	48.30	54.00	-5.70	38.18	27.94	8.80	36.30	9.68	300 161 Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>106.98</td><td>-----</td><td>-----</td><td>97.11</td><td>27.72</td><td>8.76</td><td>36.29</td><td>9.68</td><td>300 161 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	106.98	-----	-----	97.11	27.72	8.76	36.29	9.68	300 161 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2484.23	48.30	54.00	-5.70	38.18	27.94	8.80	36.30	9.68	300 161 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2462.00	106.98	-----	-----	97.11	27.72	8.76	36.29	9.68	300 161 Average																																																																																	



Mode	8																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																			
ANT	Chain A																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2490.46</td><td>59.64</td><td>74.00</td><td>-14.36</td><td>49.45</td><td>28.00</td><td>8.81</td><td>36.30</td><td>9.68</td><td>300 96 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2490.46	59.64	74.00	-14.36	49.45	28.00	8.81	36.30	9.68	300 96 Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>112.43</td><td>-----</td><td>-----</td><td>102.56</td><td>27.72</td><td>8.76</td><td>36.29</td><td>9.68</td><td>300 96 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	112.43	-----	-----	102.56	27.72	8.76	36.29	9.68	300 96 Peak	
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1 2490.46	59.64	74.00	-14.36	49.45	28.00	8.81	36.30	9.68	300 96 Peak																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2462.00	112.43	-----	-----	102.56	27.72	8.76	36.29	9.68	300 96 Peak																																																																											
Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.51</td><td>46.61</td><td>54.00</td><td>-7.39</td><td>36.50</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td><td>300 96 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.51	46.61	54.00	-7.39	36.50	27.94	8.79	36.30	9.68	300 96 Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>104.74</td><td>-----</td><td>-----</td><td>94.87</td><td>27.72</td><td>8.76</td><td>36.29</td><td>9.68</td><td>300 96 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	104.74	-----	-----	94.87	27.72	8.76	36.29	9.68	300 96 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.51	46.61	54.00	-7.39	36.50	27.94	8.79	36.30	9.68	300 96 Average																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2462.00	104.74	-----	-----	94.87	27.72	8.76	36.29	9.68	300 96 Average																																																																											



B2-1.Radiated Spurious Emission Test Modes





< Chain B >

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 5	2400-2483.5	Chain B	802.11b	11	2462	1Mbps	-	-
Mode 7	2400-2483.5	Chain B	802.11g	11	2462	6Mbps	-	-

**B2-2.Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
5	802.11b	11	2484.72	41.39	54.00	-12.61	H	Avg.	Pass	-	Band Edge
	802.11b	11	7386.00	37.80	54.00	-16.20	V	Avg.	Pass	-	Harmonic
7	802.11g	11	2483.58	43.28	54.00	-10.72	H	Avg.	Pass	-	Band Edge
	802.11g	11	-	-	-	-	-	-	-	-	Harmonic

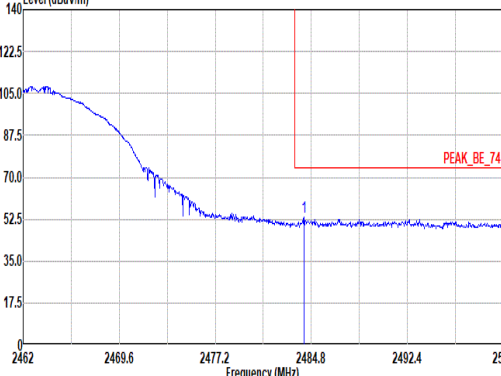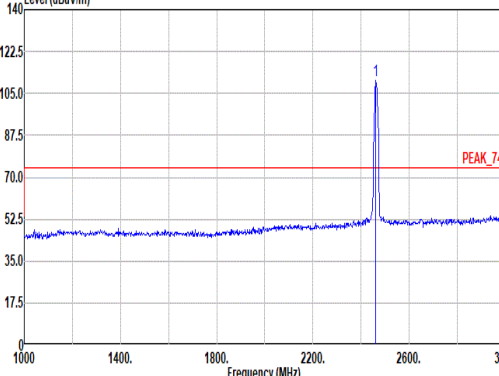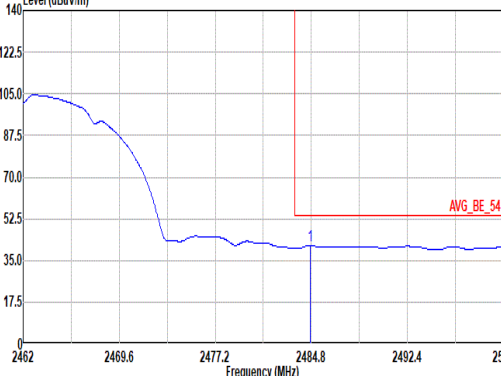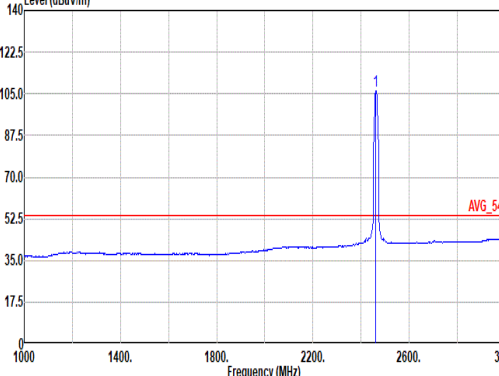

	5																																																																																																									
Mode	Band Edge																																																																																																									
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																									
ANT	Chain B																																																																																																									
Pol.	Horizontal						Fundamental																																																																																																			
Peak	Level (dBuV/m) Date: 2025-09-24  PEAK_BE_74 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.23</td><td>53.14</td><td>74.00</td><td>-20.86</td><td>43.02</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>400</td><td>118</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.23	53.14	74.00	-20.86	43.02	27.94	8.80	36.30	9.68	400	118	Peak	Level (dBuV/m) Date: 2025-09-24  PEAK_74 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>110.23</td><td>-----</td><td>-----</td><td>100.45</td><td>27.64</td><td>8.75</td><td>36.29</td><td>9.68</td><td>400</td><td>118</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.23	-----	-----	100.45	27.64	8.75	36.29	9.68	400	118	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2484.23	53.14	74.00	-20.86	43.02	27.94	8.80	36.30	9.68	400	118	Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2462.00	110.23	-----	-----	100.45	27.64	8.75	36.29	9.68	400	118	Peak																																																																																														
Avg	Level (dBuV/m) Date: 2025-09-24  AVG_BE_54 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.72</td><td>41.39</td><td>54.00</td><td>-12.61</td><td>31.26</td><td>27.95</td><td>8.80</td><td>36.30</td><td>9.68</td><td>400</td><td>118</td><td>Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.72	41.39	54.00	-12.61	31.26	27.95	8.80	36.30	9.68	400	118	Average	Level (dBuV/m) Date: 2025-09-24  AVG_54 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.04</td><td>-----</td><td>-----</td><td>96.21</td><td>27.68</td><td>8.76</td><td>36.29</td><td>9.68</td><td>400</td><td>118</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.04	-----	-----	96.21	27.68	8.76	36.29	9.68	400	118	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2484.72	41.39	54.00	-12.61	31.26	27.95	8.80	36.30	9.68	400	118	Average																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2462.00	106.04	-----	-----	96.21	27.68	8.76	36.29	9.68	400	118	Average																																																																																														



		5																																																																																																		
Mode		Band Edge																																																																																																		
		2400-2483.5_802.11b_CH11_2462MHz																																																																																																		
ANT		Chain B																																																																																																		
Pol.	Vertical										Fundamental																																																																																									
Peak	Level (dBuV/m) Date: 2025-09-24 PEAK_BE_74 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2488.68</td><td>51.95</td><td>74.00</td><td>-22.05</td><td>41.78</td><td>27.99</td><td>8.80</td><td>36.30</td><td>9.68 300 234 Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2488.68	51.95	74.00	-22.05	41.78	27.99	8.80	36.30	9.68 300 234 Peak	Level (dBuV/m) Date: 2025-09-24 PEAK_74 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.03</td><td>-----</td><td>-----</td><td>96.25</td><td>27.64</td><td>8.75</td><td>36.29</td><td>9.68 300 234 Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2462.00	106.03	-----	-----	96.25	27.64	8.75	36.29	9.68 300 234 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																											
1	2488.68	51.95	74.00	-22.05	41.78	27.99	8.80	36.30	9.68 300 234 Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																											
1	2462.00	106.03	-----	-----	96.25	27.64	8.75	36.29	9.68 300 234 Peak																																																																																											
Avg	Level (dBuV/m) Date: 2025-09-24 AVG_BE_54 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2484.72</td><td>40.52</td><td>54.00</td><td>-13.48</td><td>30.39</td><td>27.95</td><td>8.80</td><td>36.30</td><td>9.68 300 234 Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2484.72	40.52	54.00	-13.48	30.39	27.95	8.80	36.30	9.68 300 234 Average	Level (dBuV/m) Date: 2025-09-24 AVG_54 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.97</td><td>-----</td><td>-----</td><td>93.14</td><td>27.68</td><td>8.76</td><td>36.29</td><td>9.68 300 234 Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2462.00	102.97	-----	-----	93.14	27.68	8.76	36.29	9.68 300 234 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																											
1	2484.72	40.52	54.00	-13.48	30.39	27.95	8.80	36.30	9.68 300 234 Average																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																											
1	2462.00	102.97	-----	-----	93.14	27.68	8.76	36.29	9.68 300 234 Average																																																																																											



Mode	5																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																							
ANT	Chain B																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.41</td><td>74.00</td><td>-29.59</td><td>35.99</td><td>32.94</td><td>12.47</td><td>37.61</td><td>0.62</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>48.33</td><td>74.00</td><td>-25.67</td><td>34.60</td><td>36.38</td><td>15.46</td><td>38.53</td><td>0.42</td><td>100</td><td>97</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>37.76</td><td>54.00</td><td>-16.24</td><td>24.03</td><td>36.38</td><td>15.46</td><td>38.53</td><td>0.42</td><td>100</td><td>97</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	44.41	74.00	-29.59	35.99	32.94	12.47	37.61	0.62	--	--	Peak	2	7386.00	48.33	74.00	-25.67	34.60	36.38	15.46	38.53	0.42	100	97	Peak	3	7386.00	37.76	54.00	-16.24	24.03	36.38	15.46	38.53	0.42	100	97	Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>43.45</td><td>74.00</td><td>-30.55</td><td>35.03</td><td>32.94</td><td>12.47</td><td>37.61</td><td>0.62</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>47.43</td><td>74.00</td><td>-26.57</td><td>33.70</td><td>36.38</td><td>15.46</td><td>38.53</td><td>0.42</td><td>200</td><td>38</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>37.80</td><td>54.00</td><td>-16.20</td><td>24.07</td><td>36.38</td><td>15.46</td><td>38.53</td><td>0.42</td><td>200</td><td>38</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	43.45	74.00	-30.55	35.03	32.94	12.47	37.61	0.62	--	--	Peak	2	7386.00	47.43	74.00	-26.57	33.70	36.38	15.46	38.53	0.42	200	38	Peak	3	7386.00	37.80	54.00	-16.20	24.07	36.38	15.46	38.53	0.42	200	38	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	4924.00	44.41	74.00	-29.59	35.99	32.94	12.47	37.61	0.62	--	--	Peak																																																																																																																																												
2	7386.00	48.33	74.00	-25.67	34.60	36.38	15.46	38.53	0.42	100	97	Peak																																																																																																																																												
3	7386.00	37.76	54.00	-16.24	24.03	36.38	15.46	38.53	0.42	100	97	Average																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	4924.00	43.45	74.00	-30.55	35.03	32.94	12.47	37.61	0.62	--	--	Peak																																																																																																																																												
2	7386.00	47.43	74.00	-26.57	33.70	36.38	15.46	38.53	0.42	200	38	Peak																																																																																																																																												
3	7386.00	37.80	54.00	-16.20	24.07	36.38	15.46	38.53	0.42	200	38	Average																																																																																																																																												



Mode	5	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	Chain B	
Pol.	Horizontal	Vertical
10G ~18G Avg	Level (dBuV/m) Date: 2025-09-24 Frequency (MHz) Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL	Level (dBuV/m) Date: 2025-09-24 Frequency (MHz) Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL



Mode	7																																																																																		
	Band Edge																																																																																		
	2400-2483.5_802.11g_CH11_2462MHz																																																																																		
ANT	Chain B																																																																																		
Pol.	Horizontal						Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.74</td><td>54.91</td><td>74.00</td><td>-19.09</td><td>44.80</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td><td>400</td><td>119</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.74	54.91	74.00	-19.09	44.80	27.94	8.79	36.30	9.68	400	119	Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>111.44</td><td>-----</td><td>-----</td><td>101.61</td><td>27.68</td><td>8.76</td><td>36.29</td><td>9.68</td><td>400</td><td>119</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	111.44	-----	-----	101.61	27.68	8.76	36.29	9.68	400	119	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2483.74	54.91	74.00	-19.09	44.80	27.94	8.79	36.30	9.68	400	119	Peak																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2462.00	111.44	-----	-----	101.61	27.68	8.76	36.29	9.68	400	119	Peak																																																																								
Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.58</td><td>43.28</td><td>54.00</td><td>-10.72</td><td>33.17</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td><td>400</td><td>119</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.58	43.28	54.00	-10.72	33.17	27.94	8.79	36.30	9.68	400	119	Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>103.19</td><td>-----</td><td>-----</td><td>93.32</td><td>27.72</td><td>8.76</td><td>36.29</td><td>9.68</td><td>400</td><td>119</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	103.19	-----	-----	93.32	27.72	8.76	36.29	9.68	400	119	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2483.58	43.28	54.00	-10.72	33.17	27.94	8.79	36.30	9.68	400	119	Average																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2462.00	103.19	-----	-----	93.32	27.72	8.76	36.29	9.68	400	119	Average																																																																								



Mode	7																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																									
ANT	Chain B																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.62</td><td>53.15</td><td>74.00 -20.85</td><td>43.04</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td><td>256</td><td>236 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.62	53.15	74.00 -20.85	43.04	27.94	8.79	36.30	9.68	256	236 Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>100.81</td><td>-----</td><td>90.98</td><td>27.68</td><td>8.76</td><td>36.29</td><td>9.68</td><td>256</td><td>236 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	100.81	-----	90.98	27.68	8.76	36.29	9.68	256	236 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.62	53.15	74.00 -20.85	43.04	27.94	8.79	36.30	9.68	256	236 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2462.00	100.81	-----	90.98	27.68	8.76	36.29	9.68	256	236 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.93</td><td>42.31</td><td>54.00 -11.69</td><td>32.19</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>256</td><td>236 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.93	42.31	54.00 -11.69	32.19	27.94	8.80	36.30	9.68	256	236 Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>100.67</td><td>-----</td><td>90.80</td><td>27.72</td><td>8.76</td><td>36.29</td><td>9.68</td><td>256</td><td>236 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	100.67	-----	90.80	27.72	8.76	36.29	9.68	256	236 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.93	42.31	54.00 -11.69	32.19	27.94	8.80	36.30	9.68	256	236 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2462.00	100.67	-----	90.80	27.72	8.76	36.29	9.68	256	236 Average																																																																																	



B3-1.Radiated Spurious Emission Test Modes

< Chain B+A >

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 9	2400-2483.5	Chain B+A	802.11be EHT20	11	2462	MCS0	Full RU	-
Mode 10	2400-2483.5	Chain B+A	802.11be EHT40	03	2422	MCS0	Full RU	-
Mode 11	2400-2483.5	Chain B+A	802.11be EHT40	03	2422	MCS0	Full RU	LF
Mode 14	2400-2483.5	Chain B+A	802.11be EHT40	03	2422	MCS0	Full RU	SHF

**B3-2.Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
9	802.11be EHT20	11	2483.55	47.99	54.00	-6.01	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	11	-	-	-	-	-	-	-	Full RU	Harmonic
10	802.11be EHT40	03	2370.82	48.52	54.00	-5.48	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	03	-	-	-	-	-	-	-	Full RU	Harmonic
11	LF	03	901.06	38.24	46.00	-7.76	V	Peak	Pass	-	LF
14	SHF	03	18574.00	42.59	74.00	-31.41	H	Peak	Pass	-	SHF



Mode	9																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz																																																																																																			
ANT	Chain B+A																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>60.66</td><td>74.00</td><td>-13.34</td><td>50.55</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td><td>200</td><td>159</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.74	60.66	74.00	-13.34	50.55	27.94	8.79	36.30	9.68	200	159	Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>115.97</td><td>-----</td><td>-----</td><td>106.10</td><td>27.72</td><td>8.76</td><td>36.29</td><td>9.68</td><td>200</td><td>159</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	115.97	-----	-----	106.10	27.72	8.76	36.29	9.68	200	159	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.74	60.66	74.00	-13.34	50.55	27.94	8.79	36.30	9.68	200	159	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	115.97	-----	-----	106.10	27.72	8.76	36.29	9.68	200	159	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>47.99</td><td>54.00</td><td>-6.01</td><td>37.88</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td><td>200</td><td>159</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	47.99	54.00	-6.01	37.88	27.94	8.79	36.30	9.68	200	159	Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.23</td><td>-----</td><td>-----</td><td>96.36</td><td>27.72</td><td>8.76</td><td>36.29</td><td>9.68</td><td>200</td><td>159</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.23	-----	-----	96.36	27.72	8.76	36.29	9.68	200	159	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.55	47.99	54.00	-6.01	37.88	27.94	8.79	36.30	9.68	200	159	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	106.23	-----	-----	96.36	27.72	8.76	36.29	9.68	200	159	Average																																																																																								



Mode	9																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz																																																																																	
ANT	Chain B+A																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2483.70</td><td>57.72</td><td>74.00</td><td>-16.28</td><td>47.61</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td><td>300 101 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2483.70	57.72	74.00	-16.28	47.61	27.94	8.79	36.30	9.68	300 101 Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2462.00</td><td>111.72</td><td>-----</td><td>-----</td><td>101.85</td><td>27.72</td><td>8.76</td><td>36.29</td><td>9.68</td><td>300 101 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2462.00	111.72	-----	-----	101.85	27.72	8.76	36.29	9.68	300 101 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2483.70	57.72	74.00	-16.28	47.61	27.94	8.79	36.30	9.68	300 101 Peak																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2462.00	111.72	-----	-----	101.85	27.72	8.76	36.29	9.68	300 101 Peak																																																																									
Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2483.51</td><td>45.94</td><td>54.00</td><td>-8.06</td><td>35.83</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td><td>300 101 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2483.51	45.94	54.00	-8.06	35.83	27.94	8.79	36.30	9.68	300 101 Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2462.00</td><td>103.97</td><td>-----</td><td>-----</td><td>94.10</td><td>27.72</td><td>8.76</td><td>36.29</td><td>9.68</td><td>300 101 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2462.00	103.97	-----	-----	94.10	27.72	8.76	36.29	9.68	300 101 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2483.51	45.94	54.00	-8.06	35.83	27.94	8.79	36.30	9.68	300 101 Average																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2462.00	103.97	-----	-----	94.10	27.72	8.76	36.29	9.68	300 101 Average																																																																									



Mode	10																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz																																																																																									
ANT	Chain B+A																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2362.08</td><td>61.28</td><td>74.00</td><td>-12.72</td><td>51.99</td><td>27.30</td><td>8.57</td><td>36.26</td><td>9.68</td><td>121 54 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2362.08	61.28	74.00	-12.72	51.99	27.30	8.57	36.26	9.68	121 54 Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2422.00</td><td>113.02</td><td>-----</td><td>-----</td><td>103.45</td><td>27.50</td><td>8.66</td><td>36.27</td><td>9.68</td><td>121 54 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2422.00	113.02	-----	-----	103.45	27.50	8.66	36.27	9.68	121 54 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																	
1 2362.08	61.28	74.00	-12.72	51.99	27.30	8.57	36.26	9.68	121 54 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																	
1 2422.00	113.02	-----	-----	103.45	27.50	8.66	36.27	9.68	121 54 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2370.82</td><td>48.52</td><td>54.00</td><td>-5.48</td><td>39.22</td><td>27.29</td><td>8.59</td><td>36.26</td><td>9.68</td><td>121 54 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2370.82	48.52	54.00	-5.48	39.22	27.29	8.59	36.26	9.68	121 54 Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2422.00</td><td>103.22</td><td>-----</td><td>-----</td><td>93.65</td><td>27.50</td><td>8.66</td><td>36.27</td><td>9.68</td><td>121 54 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2422.00	103.22	-----	-----	93.65	27.50	8.66	36.27	9.68	121 54 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																	
1 2370.82	48.52	54.00	-5.48	39.22	27.29	8.59	36.26	9.68	121 54 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																	
1 2422.00	103.22	-----	-----	93.65	27.50	8.66	36.27	9.68	121 54 Average																																																																																	



Mode	10																																													
	Band Edge - R																																													
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz																																													
ANT	Chain B+A																																													
Pol.	Horizontal					Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-09-24 PEAK_BE_74 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2491.73</td><td>56.24</td><td>74.00</td><td>-17.76</td><td>46.05</td><td>28.00</td><td>8.81</td><td>36.30</td><td>9.68</td><td>121</td><td>54</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2491.73	56.24	74.00	-17.76	46.05	28.00	8.81	36.30	9.68	121	54	Peak	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1 2491.73	56.24	74.00	-17.76	46.05	28.00	8.81	36.30	9.68	121	54	Peak																																			
Avg	Level (dBuV/m) Date: 2025-09-24 AVG_BE_54 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.54</td><td>44.94</td><td>54.00</td><td>-9.06</td><td>34.83</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td><td>121</td><td>54</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.54	44.94	54.00	-9.06	34.83	27.94	8.79	36.30	9.68	121	54	Average	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1 2483.54	44.94	54.00	-9.06	34.83	27.94	8.79	36.30	9.68	121	54	Average																																			



Mode	10																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz																																																																																																			
ANT	Chain B+A																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2368.46</td><td>58.10</td><td>74.00</td><td>-15.90</td><td>48.00</td><td>27.30</td><td>8.58</td><td>36.26</td><td>9.68</td><td>400</td><td>88</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2368.46	58.10	74.00	-15.90	48.00	27.30	8.58	36.26	9.68	400	88	Peak	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>108.89</td><td>-----</td><td>-----</td><td>99.30</td><td>27.50</td><td>8.69</td><td>36.28</td><td>9.68</td><td>400</td><td>88</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	108.89	-----	-----	99.30	27.50	8.69	36.28	9.68	400	88	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2368.46	58.10	74.00	-15.90	48.00	27.30	8.58	36.26	9.68	400	88	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2422.00	108.89	-----	-----	99.30	27.50	8.69	36.28	9.68	400	88	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2369.47</td><td>45.92</td><td>54.00</td><td>-8.08</td><td>36.62</td><td>27.30</td><td>8.58</td><td>36.26</td><td>9.68</td><td>400</td><td>88</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2369.47	45.92	54.00	-8.08	36.62	27.30	8.58	36.26	9.68	400	88	Average	Level (dBuV/m) Date: 2025-09-24 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>98.96</td><td>-----</td><td>-----</td><td>89.39</td><td>27.50</td><td>8.66</td><td>36.27</td><td>9.68</td><td>400</td><td>88</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	98.96	-----	-----	89.39	27.50	8.66	36.27	9.68	400	88	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2369.47	45.92	54.00	-8.08	36.62	27.30	8.58	36.26	9.68	400	88	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2422.00	98.96	-----	-----	89.39	27.50	8.66	36.27	9.68	400	88	Average																																																																																								



Mode	10																																													
	Band Edge - R																																													
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz																																													
ANT	Chain B+A																																													
Pol.	Vertical					Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-09-24 PEAK_BE_74 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2486.19</td><td>55.43</td><td>74.00</td><td>-18.57</td><td>45.29</td><td>27.96</td><td>8.80</td><td>36.30</td><td>9.68</td><td>400</td><td>88</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2486.19	55.43	74.00	-18.57	45.29	27.96	8.80	36.30	9.68	400	88	Peak	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1 2486.19	55.43	74.00	-18.57	45.29	27.96	8.80	36.30	9.68	400	88	Peak																																			
Avg	Level (dBuV/m) Date: 2025-09-24 AVG_BE_54 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.54</td><td>43.61</td><td>54.00</td><td>-10.39</td><td>33.50</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td><td>400</td><td>88</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.54	43.61	54.00	-10.39	33.50	27.94	8.79	36.30	9.68	400	88	Average	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1 2483.54	43.61	54.00	-10.39	33.50	27.94	8.79	36.30	9.68	400	88	Average																																			



Mode	11																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz																																																																																																																																																																																					
ANT	Chain B+A																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	Level (dBuV/m) Date: 2025-09-25 Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 00_241127 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>31.94</td><td>24.32</td><td>40.00</td><td>-15.68</td><td>35.39</td><td>23.56</td><td>0.99</td><td>35.75</td><td>0.13 -- -- Peak</td></tr><tr><td>2</td><td>158.04</td><td>26.94</td><td>43.50</td><td>-16.56</td><td>43.43</td><td>16.71</td><td>2.24</td><td>35.59</td><td>0.15 -- -- Peak</td></tr><tr><td>3</td><td>268.62</td><td>24.53</td><td>46.00</td><td>-21.47</td><td>37.43</td><td>19.46</td><td>2.91</td><td>35.36</td><td>0.09 -- -- Peak</td></tr><tr><td>4</td><td>515.00</td><td>27.37</td><td>46.00</td><td>-18.63</td><td>33.99</td><td>24.00</td><td>4.01</td><td>34.72</td><td>0.09 -- -- Peak</td></tr><tr><td>5</td><td>738.10</td><td>32.08</td><td>46.00</td><td>-13.92</td><td>33.02</td><td>27.98</td><td>4.81</td><td>33.94</td><td>0.21 -- -- Peak</td></tr><tr><td>6</td><td>900.09</td><td>37.56</td><td>46.00</td><td>-8.44</td><td>36.31</td><td>29.08</td><td>5.30</td><td>33.33</td><td>0.20 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	31.94	24.32	40.00	-15.68	35.39	23.56	0.99	35.75	0.13 -- -- Peak	2	158.04	26.94	43.50	-16.56	43.43	16.71	2.24	35.59	0.15 -- -- Peak	3	268.62	24.53	46.00	-21.47	37.43	19.46	2.91	35.36	0.09 -- -- Peak	4	515.00	27.37	46.00	-18.63	33.99	24.00	4.01	34.72	0.09 -- -- Peak	5	738.10	32.08	46.00	-13.92	33.02	27.98	4.81	33.94	0.21 -- -- Peak	6	900.09	37.56	46.00	-8.44	36.31	29.08	5.30	33.33	0.20 -- -- Peak	Level (dBuV/m) Date: 2025-09-25 Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 00_241127 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>31.94</td><td>24.94</td><td>40.00</td><td>-15.06</td><td>36.01</td><td>23.56</td><td>0.99</td><td>35.75</td><td>0.13 -- -- Peak</td></tr><tr><td>2</td><td>159.01</td><td>29.41</td><td>43.50</td><td>-14.09</td><td>45.99</td><td>16.00</td><td>2.25</td><td>35.59</td><td>0.16 -- -- Peak</td></tr><tr><td>3</td><td>271.53</td><td>24.92</td><td>46.00</td><td>-21.08</td><td>38.26</td><td>19.00</td><td>2.92</td><td>35.35</td><td>0.09 -- -- Peak</td></tr><tr><td>4</td><td>449.04</td><td>29.42</td><td>46.00</td><td>-16.58</td><td>37.40</td><td>23.04</td><td>3.76</td><td>34.90</td><td>0.12 -- -- Peak</td></tr><tr><td>5</td><td>673.11</td><td>36.93</td><td>46.00</td><td>-9.07</td><td>39.87</td><td>26.48</td><td>4.58</td><td>34.19</td><td>0.19 -- -- Peak</td></tr><tr><td>6</td><td>901.06</td><td>38.24</td><td>46.00</td><td>-7.76</td><td>36.98</td><td>29.09</td><td>5.30</td><td>33.33</td><td>0.20 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	31.94	24.94	40.00	-15.06	36.01	23.56	0.99	35.75	0.13 -- -- Peak	2	159.01	29.41	43.50	-14.09	45.99	16.00	2.25	35.59	0.16 -- -- Peak	3	271.53	24.92	46.00	-21.08	38.26	19.00	2.92	35.35	0.09 -- -- Peak	4	449.04	29.42	46.00	-16.58	37.40	23.04	3.76	34.90	0.12 -- -- Peak	5	673.11	36.93	46.00	-9.07	39.87	26.48	4.58	34.19	0.19 -- -- Peak	6	901.06	38.24	46.00	-7.76	36.98	29.09	5.30	33.33	0.20 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	31.94	24.32	40.00	-15.68	35.39	23.56	0.99	35.75	0.13 -- -- Peak																																																																																																																																																																													
2	158.04	26.94	43.50	-16.56	43.43	16.71	2.24	35.59	0.15 -- -- Peak																																																																																																																																																																													
3	268.62	24.53	46.00	-21.47	37.43	19.46	2.91	35.36	0.09 -- -- Peak																																																																																																																																																																													
4	515.00	27.37	46.00	-18.63	33.99	24.00	4.01	34.72	0.09 -- -- Peak																																																																																																																																																																													
5	738.10	32.08	46.00	-13.92	33.02	27.98	4.81	33.94	0.21 -- -- Peak																																																																																																																																																																													
6	900.09	37.56	46.00	-8.44	36.31	29.08	5.30	33.33	0.20 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	31.94	24.94	40.00	-15.06	36.01	23.56	0.99	35.75	0.13 -- -- Peak																																																																																																																																																																													
2	159.01	29.41	43.50	-14.09	45.99	16.00	2.25	35.59	0.16 -- -- Peak																																																																																																																																																																													
3	271.53	24.92	46.00	-21.08	38.26	19.00	2.92	35.35	0.09 -- -- Peak																																																																																																																																																																													
4	449.04	29.42	46.00	-16.58	37.40	23.04	3.76	34.90	0.12 -- -- Peak																																																																																																																																																																													
5	673.11	36.93	46.00	-9.07	39.87	26.48	4.58	34.19	0.19 -- -- Peak																																																																																																																																																																													
6	901.06	38.24	46.00	-7.76	36.98	29.09	5.30	33.33	0.20 -- -- Peak																																																																																																																																																																													




Mode	14																																																																																							
	SHF																																																																																							
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz																																																																																							
ANT	Chain B+A																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak	Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 1m SHF_00994_250109 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>18574.00</td><td>42.59</td><td>74.00</td><td>-31.41</td><td>53.44</td><td>38.45</td><td>24.95</td><td>64.71</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	18574.00	42.59	74.00	-31.41	53.44	38.45	24.95	64.71	-9.54	--	Peak	Date: 2025-09-24 Site : 03CH20-HY Condition: PEAK_74 1m SHF_00994_250109 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>20233.00</td><td>42.49</td><td>74.00</td><td>-31.51</td><td>51.35</td><td>38.50</td><td>26.03</td><td>63.85</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	20233.00	42.49	74.00	-31.51	51.35	38.50	26.03	63.85	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	18574.00	42.59	74.00	-31.41	53.44	38.45	24.95	64.71	-9.54	--	Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	20233.00	42.49	74.00	-31.51	51.35	38.50	26.03	63.85	-9.54	--	Peak																																																																													



Appendix C. Duty Cycle Plots


Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Chain A	802.11b	99.22	8354	0.12	10Hz
Chain B	802.11b	99.57	8354	0.12	10Hz
Chain A	802.11g	97.90	2094	0.48	0.51kHz
Chain B	802.11g	97.57	2087	0.48	0.51kHz
Chain B+A	2.4GHz 802.11ax HE20 Full RU	98.52	3990	0.25	10Hz
Chain B+A	2.4GHz 802.11ax HE20 Full RU	98.88	3990	0.25	10Hz

<Chain A>

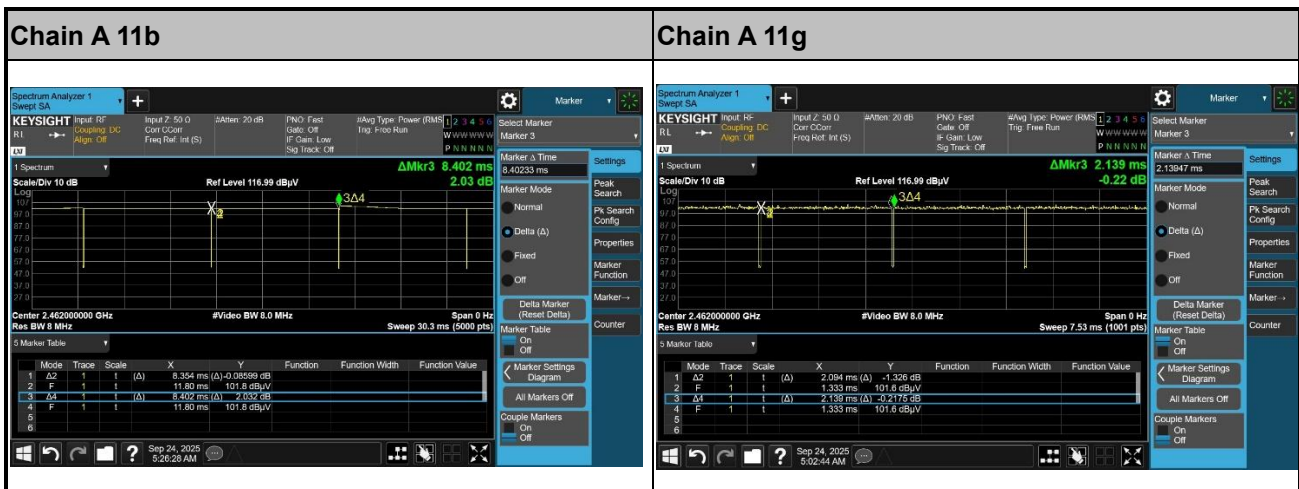



<Chain B>

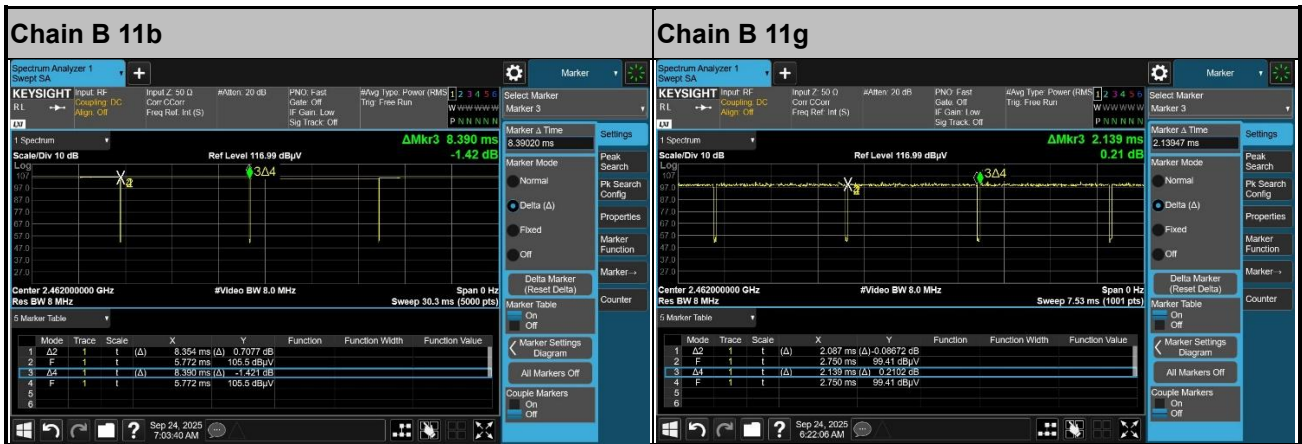

<Chain B+A>

