

#01_WLAN2.4GHz_802.11b 1Mbps_Left_0mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437.000 MHz

Medium: HSL_600-7200_260423 Medium parameters used: $f=2437.000$ MHz; $\sigma=1.78$ S/m; $\epsilon_r=42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.02, 7.24, 7.0); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2025-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (60.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.514 W/kg; SAR (10g) = 0.238 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.505 W/kg; SAR (8g) = 0.254 W/kg; SAR (10g) = 0.230 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

TSL Correction: Positive only

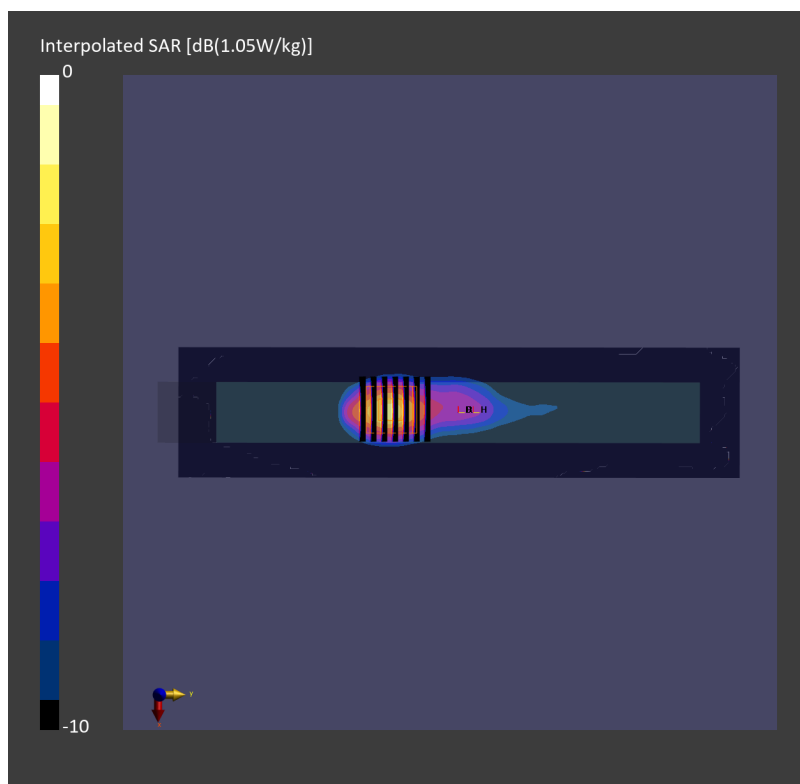

#02_WLAN5GHz_802.11ac-VHT160 MCS0_Left_0mm_Ch50

Communication System: IEEE 802.11ac WiFi; Frequency: 5250.000 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.56$ S/m; $\epsilon_r = 38.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.63, 5.81, 5.62); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2025-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (60.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.244 W/kg; SAR (10g) = 0.087 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.14 dB

SAR (1g) = 0.293 W/kg; SAR (8g) = 0.110 W/kg; SAR (10g) = 0.097 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.4 %

TSL Correction: Positive only

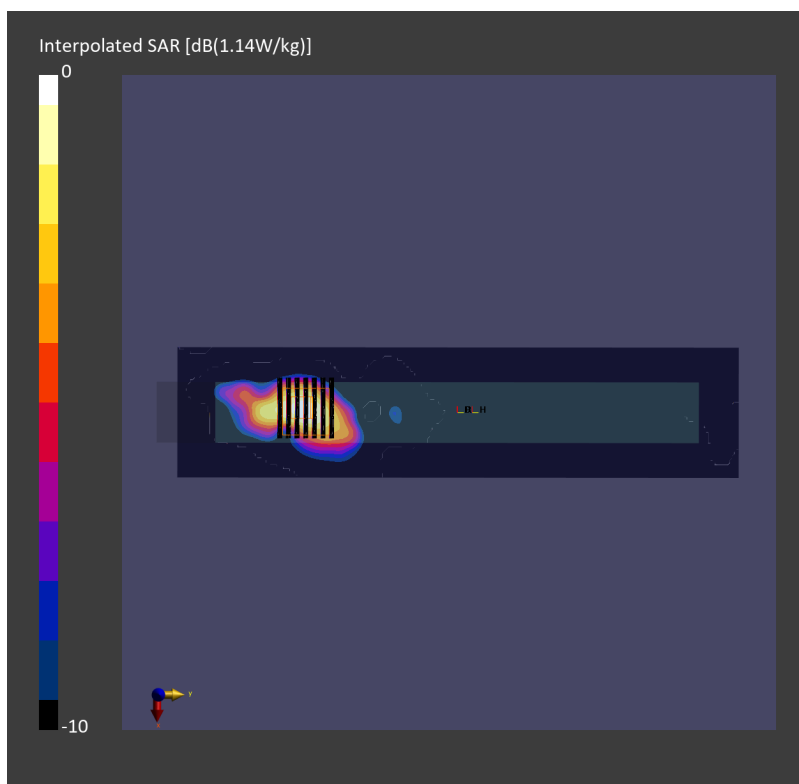

#03_WLAN5GHz_802.11ac-VHT160 MCS0_Left_0mm_Ch114

Communication System: IEEE 802.11ac WiFi; Frequency: 5570.000 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.92$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.21, 5.37, 5.19); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2025-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (60.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.286 W/kg; SAR (10g) = 0.092 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.12 dB

SAR (1g) = 0.306 W/kg; SAR (8g) = 0.104 W/kg; SAR (10g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.2 %

TSL Correction: Positive only

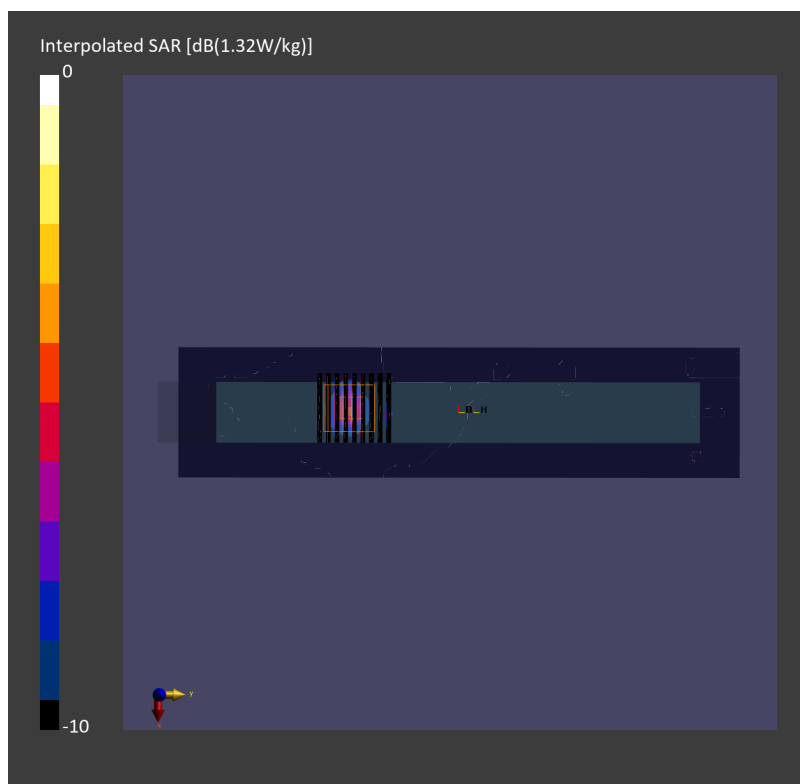

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Left_0mm_Ch155;Tablet

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f=5775.000$ MHz; $\sigma=5.17$ S/m; $\epsilon_r=37.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.1, 5.27, 5.09); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2025-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (60.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.263 W/kg; SAR (10g) = 0.085 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.15 dB

SAR (1g) = 0.295 W/kg; SAR (8g) = 0.10 W/kg; SAR (10g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.5 %

TSL Correction: Positive only

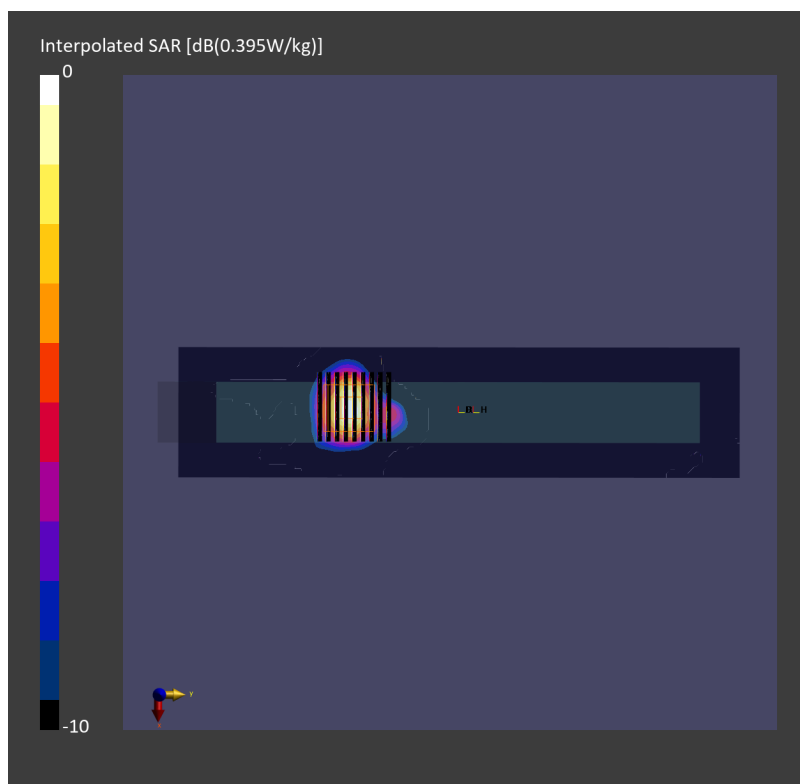

#05_WLAN5GHz_802.11ac-VHT160 MCS0_Left_0mm_Ch163;Tablet

Communication System: IEEE 802.11ac WiFi; Frequency: 5815.000 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f=5815.000$ MHz; $\sigma=5.21$ S/m; $\epsilon_r=37.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.1, 5.27, 5.09); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2025-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (60.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.296 W/kg; SAR (10g) = 0.095 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.08 dB

SAR (1g) = 0.339 W/kg; SAR (8g) = 0.118 W/kg; SAR (10g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.6 %

TSL Correction: Positive only

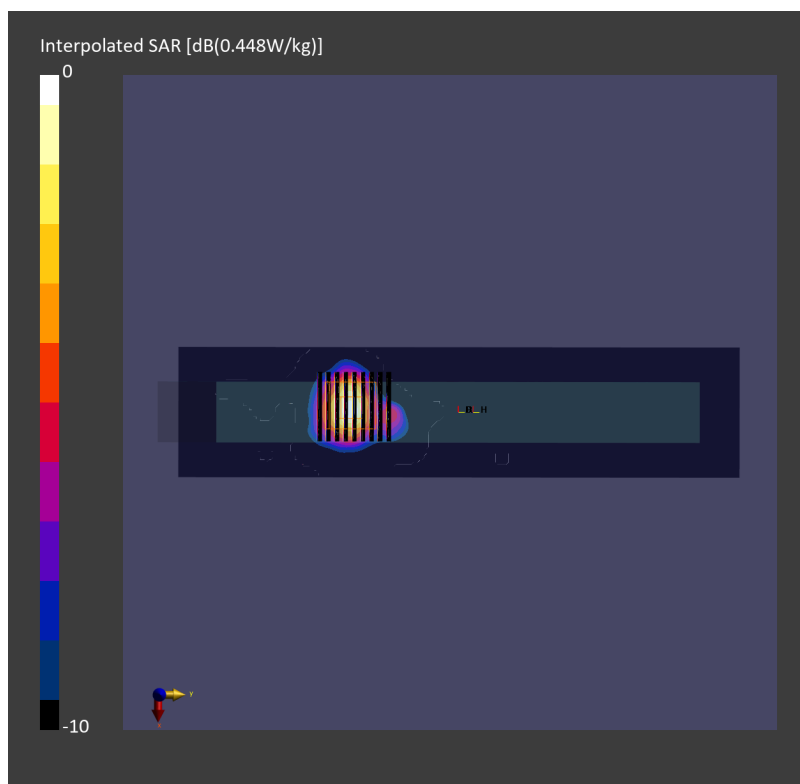

#06_WLAN6GHz_802.11be-EHT320 MCS0_Left_0mm_Ch31;Main

Communication System: IEEE 802.11be; Frequency: 6105.000 MHz

Medium: HSL_600-7200_260424 Medium parameters used: $f = 6105.000$ MHz; $\sigma = 5.56$ S/m; $\epsilon_r = 36.8$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.26, 5.42, 5.25); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2025-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (68.0 mm x 255.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.100 W/kg; SAR (10g) = 0.031 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 27.2 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.24 dB


SAR (1g) = 0.107 W/kg; SAR (8g) = 0.037 W/kg; SAR (10g) = 0.033 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.8 %

psAPD (1.0cm², sq) = 1.07 [W/m²]; psAPD (4.0cm², sq) = 0.747 [W/m²]

TSL Correction: Positive only

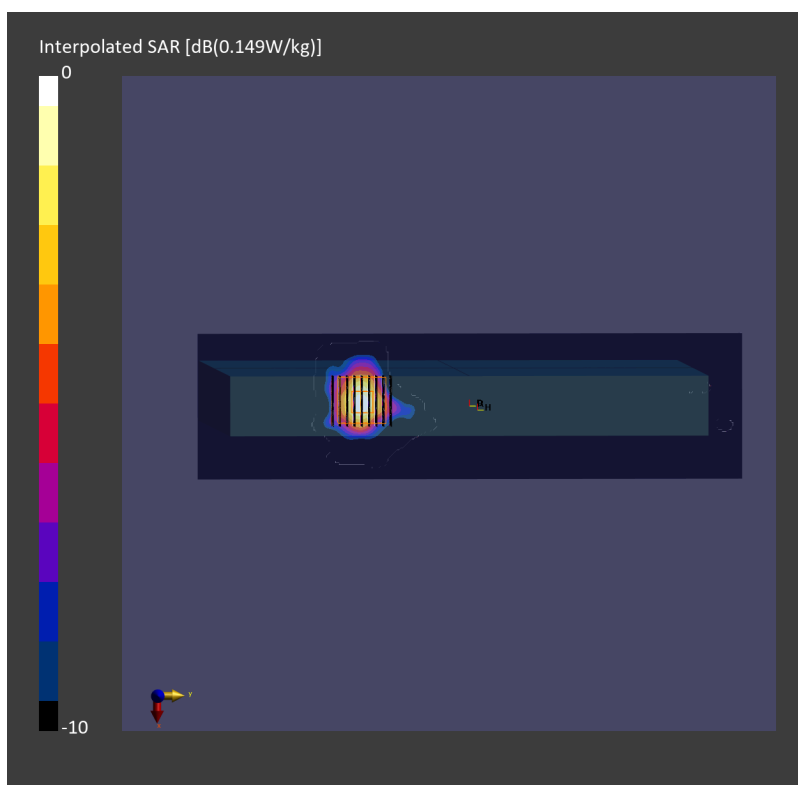

#06_WLAN6GHz_802.11be-EHT320 MCS0_Left_0mm_Ch63;Aux

Communication System: IEEE 802.11be; Frequency: 6265.000 MHz

Medium: HSL_600-7200_260424 Medium parameters used: $f = 6265.000$ MHz; $\sigma = 5.77$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.26, 5.42, 5.25); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2025-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (68.0 mm x 255.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.090 W/kg; SAR (10g) = 0.019 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.12 dB


SAR (1g) = 0.115 W/kg; SAR (8g) = 0.034 W/kg; SAR (10g) = 0.029 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.5 %

psAPD (1.0cm², sq) = 1.15 [W/m²]; psAPD (4.0cm², sq) = 0.665 [W/m²]

TSL Correction: Positive only

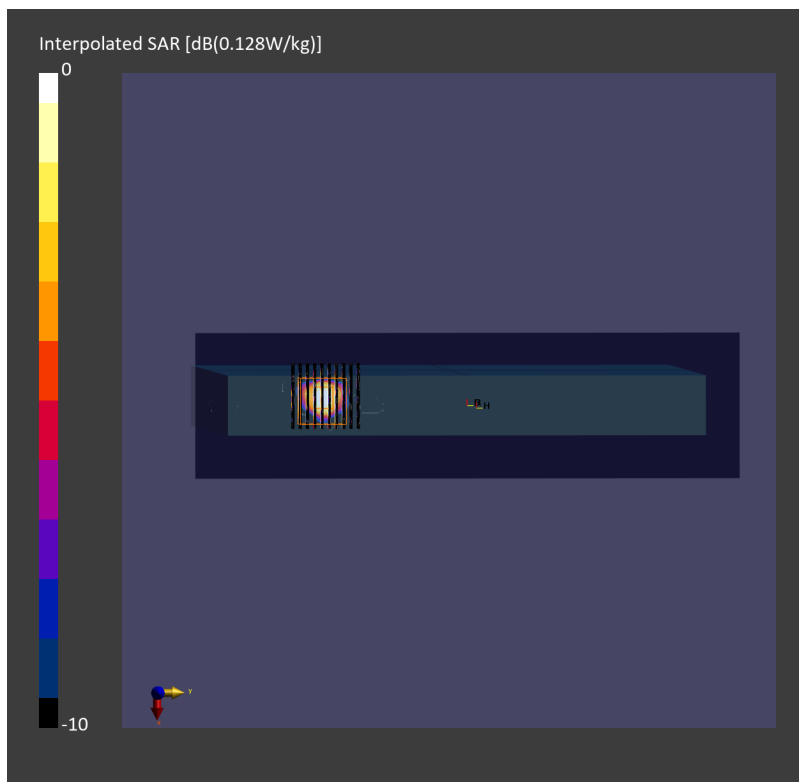

#08_Bluetooth_1Mbps_Left_0mm_Ch0;Aux

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2402.000 MHz

Medium: HSL_600-7200_260423 Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.02, 7.24, 7.0); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2025-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (60.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.201 W/kg; SAR (10g) = 0.092 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.215 W/kg; SAR (8g) = 0.106 W/kg; SAR (10g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

TSL Correction: Positive only

