



FCC RADIO TEST REPORT

FCC ID : ACJ9TGWL24B
Equipment : Radio Module
Brand Name : Panasonic
Model Name : WL24B
Applicant : Panasonic Corporation of North America
Two Riverfront Plaza, Newark, New Jersey,
07102-5490, USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Mar. 16, 2026 and testing was performed from Mar. 27, 2026 to May 06, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
3 Test Result.....	11
3.1 Output Power Measurement.....	11
3.2 Radiated Band Edges and Spurious Emission Measurement	12
3.3 Antenna Requirements	16
4 List of Measuring Equipment	17
5 Measurement Uncertainty	18
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission Test Result	
Appendix C. Duty Cycle Plots	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR572320-03B	01	Initial issue of report	May 22, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(2)	6dB Bandwidth	Pass	See Note
-	2.1049	99% Occupied Bandwidth	Pass	See Note
3.1	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
-	15.247(e)	Power Spectral Density	Pass	See Note
-	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	See Note
3.2	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	8.69 dB under the limit at 2483.52 MHz
-	15.207	AC Conducted Emission	Pass	See Note
3.3	15.203	Antenna Requirement	Pass	-

Note:

- For host device, Radiated Spurious Emission is verified and complies with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: Panasonic WL24B)

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Aya Yang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11ax/be		
Antenna Type Bluetooth: <Aux Ant. (Chain A)>: PIFA Antenna <Main Ant. (Chain B)>: PIFA Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Aux Ant. (Chain A): 1.25 dBi Main Ant. (Chain B): 2.38 dBi

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. The product was installed into Personal Computer (Brand Name: Panasonic, Model Name: FZ-34 during test.

1.1.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Chain A	Chain B	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Bluetooth	1.25	2.38	2.38	4.84	0.00	0.00

Calculation example:

If a device has two antenna, $G_{ANT1} = 1.25$ dBi; $G_{ANT2} = 2.38$ dBi

Directional gain of power measurement = $\max(1.25, 2.38) + 0 = 2.38$ dBi

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{(1.25 \text{ dBi} / 20)} + 10^{(2.38 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

$$= 4.84 \text{ dBi}$$

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and Laptop /Tablet/Convertible mode and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Keyboard), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps_Chain A/ Chain B/ Chain A+B
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps_Chain A/ Chain B/ Chain A+B
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps_Chain A/ Chain B/ Chain A+B
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps_Chain A/ Chain B/ Chain A+B
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps_Chain A/ Chain B/ Chain A+B
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps_Chain A/ Chain B/ Chain A+B
Remark: The detailed Radiated test modes are shown in Appendix B.	

2.3 Connection Diagram of Test System

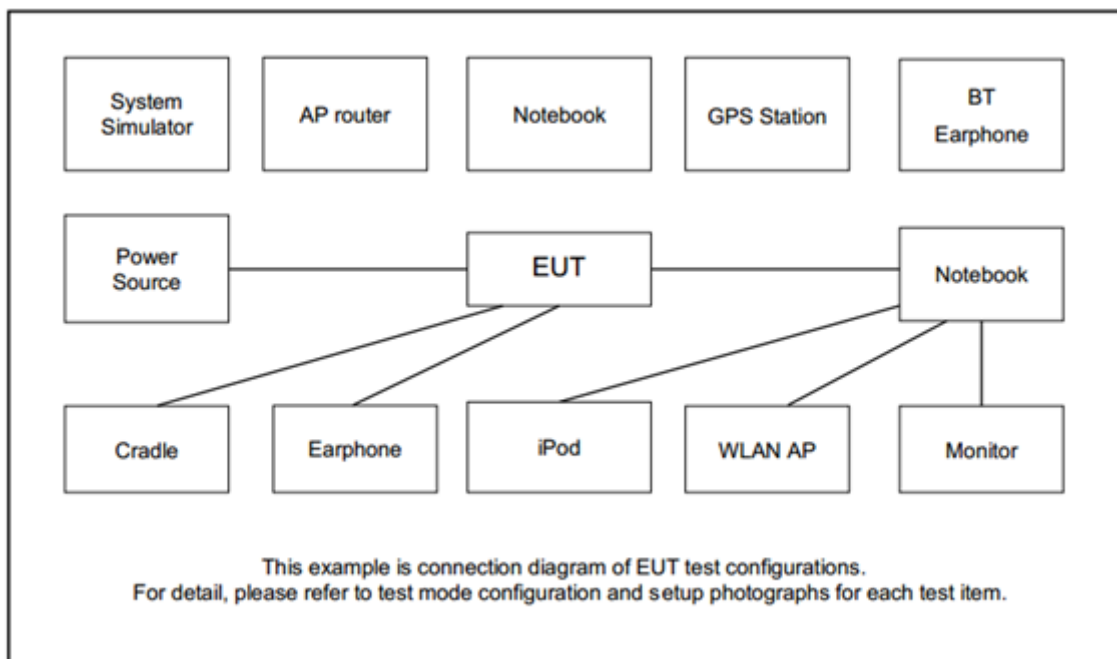

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	ipod earphone	Apple	A1285	Doc	unshielded, 1.2m	NA

2.5 EUT Operation Test Setup

The RF test items, utility "DRTU.09489.24.10.0" was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.2 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.1.4 Test Setup

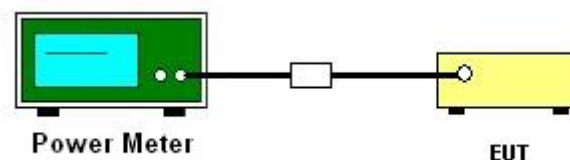

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.2.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup


For radiated test below 30MHz

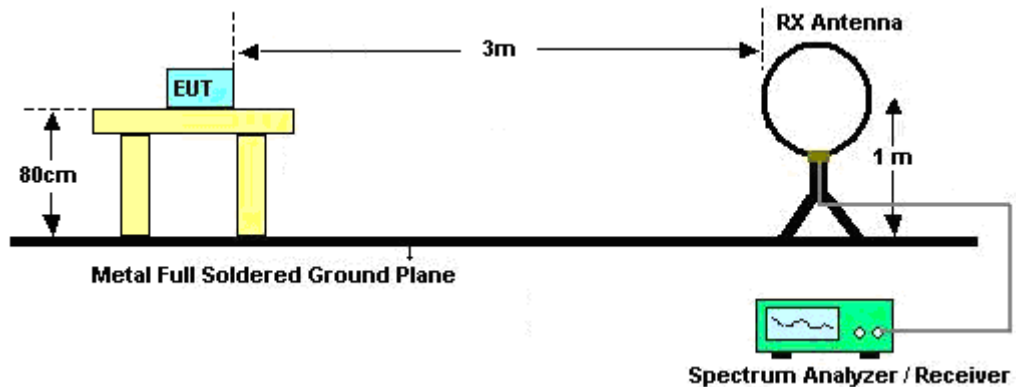


For radiated test from 30MHz to 1GHz

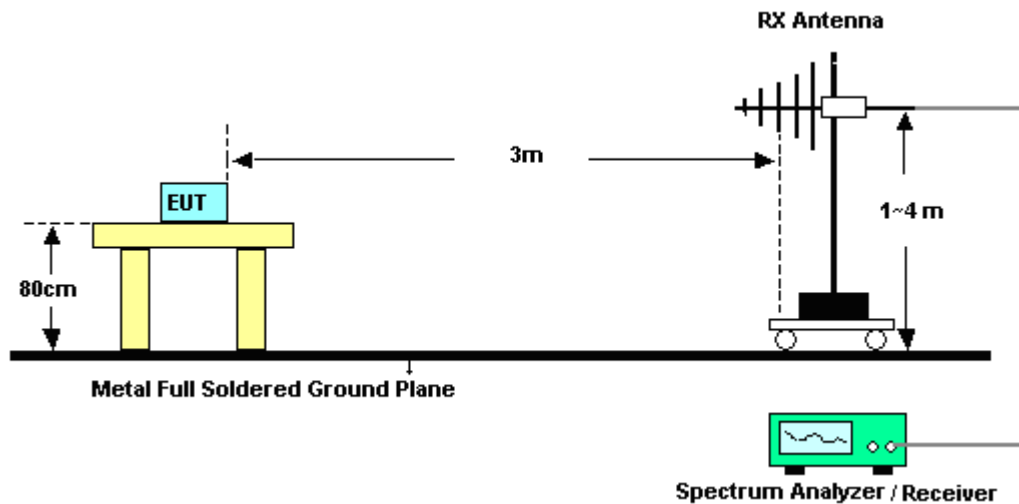

For radiated test from 1GHz to 18GHz

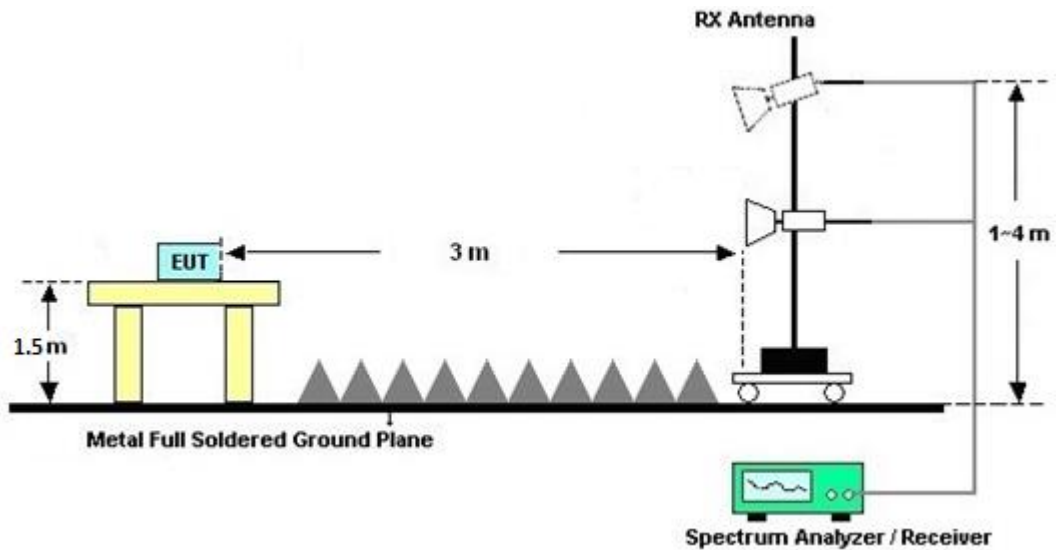

For radiated test above 18GHz

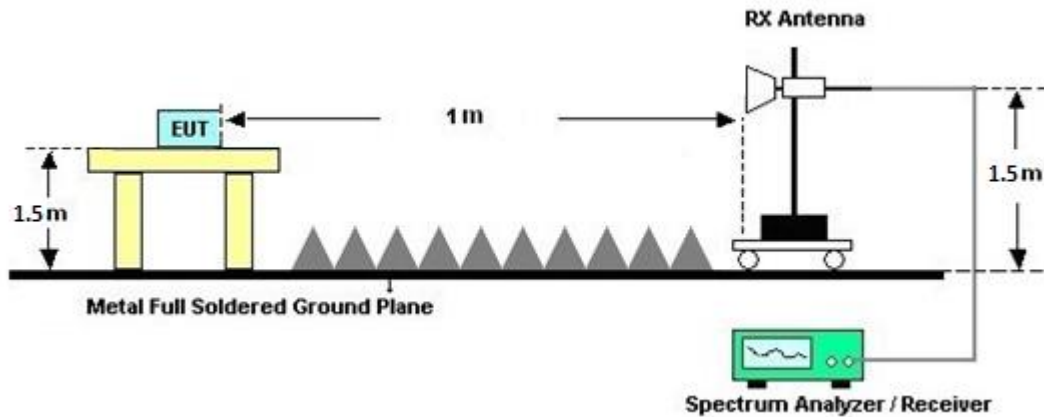

3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.2.7 Duty Cycle

Please refer to Appendix C.

3.2.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.3 Antenna Requirements

3.3.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.3.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Mar. 27, 2026 Apr. 07, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Mar. 27, 2026 Apr. 07, 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Mar. 27, 2026 Apr. 07, 2026	Aug. 28, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	Mar. 27, 2026 Apr. 07, 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final version_24051 3	N/A	Conducted Other Test Item	N/A	Mar. 27, 2026 Apr. 07, 2026	N/A	Conducted (TH05-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02294	1GHz~18GHz	Jun. 06, 2025	Apr,30, 2026~ May 06, 2026	Jun. 05, 2026	Radiation (03CH15-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 15, 2026	Apr,30, 2026~ May 06, 2026	Mar. 16, 2027	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	41912 & 05	30MHz~1GHz	Mar. 16, 2026	Apr,30, 2026~ May 06, 2026	Mar. 15, 2027	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1225	18GHz~40GHz	Jul. 02, 2025	Apr,30, 2026~ May 06, 2026	Jul. 01, 2026	Radiation (03CH15-HY)
Amplifier	EMEC	EM1G18G	060837	1GHz~18GHz	Feb. 11, 2026	Apr,30, 2026~ May 06, 2026	Feb. 10, 2027	Radiation (03CH15-HY)
Preamplifier	EM Electronics	EM01G18G	060802	1GHz~18GHz	Feb. 11, 2026	Apr,30, 2026~ May 06, 2026	Feb. 10, 2027	Radiation (03CH15-HY)
Preamplifier	EM Electronics	EM18G40G	060801	18GHz~40GHz	May. 26, 2025	Apr,30, 2026~ May 06, 2026	May. 25, 2026	Radiation (03CH15-HY)
Spectrum Analyzer	Keysight	N9010B	MY60241058	10Hz~44Gz	Jul. 15, 2025	Apr,30, 2026~ May 06, 2026	Jul. 14, 2026	Radiation (03CH15-HY)
EMI Test Reveiver	Keysight	N9038A(MXE)	MY54130085	20Hz~8.4GHz	Oct. 15, 2025	Apr,30, 2026~ May 06, 2026	Oct. 14, 2026	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr,30, 2026~ May 06, 2026	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr,30, 2026~ May 06, 2026	N/A	Radiation (03CH15-HY)
Software	Audix	E3_V9_23062 1	RK-002394	N/A	N/A	Apr,30, 2026~ May 06, 2026	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY519228/2, 803950/2,508 407/2E	30MHz~40GHz	Sep. 24, 2025	Apr,30, 2026~ May 06, 2026	Sep. 23, 2026	Radiation (03CH15-HY)
Hygrometer	TECPEL	DTM-302	SN2	N/A	Aug. 26, 2025	Apr,30, 2026~ May 06, 2026	Aug. 25, 2026	Radiation (03CH15-HY)
Filter	wright	WHKX8-5872. 5-6750-18000- 40ST	SN6	6.75GHz High Pass Filter	Jun. 03, 2025	Apr,30, 2026~ May 06, 2026	Jun. 02, 2026	Radiation (03CH15-HY)
Filter	wright	WLJ4-1000-15 30-6000-40ST	SN4	1.53GHz Low Pass Filter	Jun. 03, 2025	Apr,30, 2026~ May 06, 2026	Jun. 02, 2026	Radiation (03CH15-HY)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	6.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.90 dB
---	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Cheng Huang	Temperature:	21~25	°C
Test Date:	2026/3/27~2026/04/07	Relative Humidity:	51~54	%

<Chain A>

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	1Mbps	1	0	2402	9.89	30.00
BLE	1Mbps	1	19	2440	9.68	30.00
BLE	1Mbps	1	39	2480	10.00	30.00

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	8.45
BLE	1Mbps	1	19	2440	8.38
BLE	1Mbps	1	39	2480	8.74

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	2Mbps	1	0	2402	9.79	30.00
BLE	2Mbps	1	19	2440	9.55	30.00
BLE	2Mbps	1	39	2480	9.92	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	8.45
BLE	2Mbps	1	19	2440	8.38
BLE	2Mbps	1	39	2480	8.74

<Chain B>

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	1Mbps	1	0	2402	6.91	30.00
BLE	1Mbps	1	19	2440	6.82	30.00
BLE	1Mbps	1	39	2480	7.15	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	5.66
BLE	1Mbps	1	19	2440	5.59
BLE	1Mbps	1	39	2480	5.96

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	2Mbps	1	0	2402	6.85	30.00
BLE	2Mbps	1	19	2440	6.75	30.00
BLE	2Mbps	1	39	2480	7.05	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	5.66
BLE	2Mbps	1	19	2440	5.59
BLE	2Mbps	1	39	2480	5.96

<Chain A+B>

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	1Mbps	2	0	2402	10.78	30.00
BLE	1Mbps	2	19	2440	10.61	30.00
BLE	1Mbps	2	39	2480	10.99	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	1Mbps	2	0	2402	9.62
BLE	1Mbps	2	19	2440	9.46
BLE	1Mbps	2	39	2480	9.82

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	2Mbps	2	0	2402	10.70	30.00
BLE	2Mbps	2	19	2440	10.56	30.00
BLE	2Mbps	2	39	2480	10.86	30.00

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	2Mbps	2	0	2402	9.58
BLE	2Mbps	2	19	2440	9.44
BLE	2Mbps	2	39	2480	9.81



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Sam Pan, Quentin Liu, Bigshow Wang	Temperature :	21.6 ~ 21.9°C
		Relative Humidity :	56 ~ 59 %

Note symbol

-L	Low channel location
-R	High channel location



C1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 5	2400-2483.5	Chain A	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
Mode 6	2400-2483.5	Chain B	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
Mode 7	2400-2483.5	Chain A+B	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
Mode 8	2400-2483.5	Chain A+B	Bluetooth-LE_GSKF	39	2480	2Mbps	-	LF
Mode 8	2400-2483.5	Chain A+B	Bluetooth-LE_GSKF	39	2480	2Mbps	-	SHF

C2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
5	Bluetooth-LE_GSKF	39	2496.06	44.78	54.00	-9.22	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	-	-	-	-	-	-	-	-	Harmonic
6	Bluetooth-LE_GSKF	39	2494.44	44.87	54.00	-9.13	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	-	-	-	-	-	-	-	-	Harmonic
7	Bluetooth-LE_GSKF	39	2483.52	45.31	54.00	-8.69	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	36.53	54.00	-17.47	H	Avg.	Pass	-	Harmonic
8	Bluetooth-LE_GSKF	39	716.76	35.75	46.00	-10.25	H	Peak	Pass	-	LF
	Bluetooth-LE_GSKF	39	24760.70	39.79	68.20	-28.41	H	Peak	Pass	-	SHF



Mode	5																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																			
ANT	Chain A																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-05-04 PEAK_BE_74 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2495.66</td><td>53.21</td><td>74.00</td><td>-20.79</td><td>43.63</td><td>27.00</td><td>8.77</td><td>36.91</td><td>9.92</td><td>400</td><td>244</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2495.66	53.21	74.00	-20.79	43.63	27.00	8.77	36.91	9.92	400	244	Peak	Level (dBuV/m) Date: 2026-05-04 PEAK_74 Site : 03CH15-HY Condition: PEAK_74 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>97.00</td><td>-----</td><td>-----</td><td>87.73</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>400</td><td>244</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	97.00	-----	-----	87.73	27.60	8.74	36.91	9.92	400	244	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2495.66	53.21	74.00	-20.79	43.63	27.00	8.77	36.91	9.92	400	244	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	97.00	-----	-----	87.73	27.60	8.74	36.91	9.92	400	244	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-05-04 AVG_BE_54 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2496.06</td><td>44.78</td><td>54.00</td><td>-9.22</td><td>35.20</td><td>27.00</td><td>8.77</td><td>36.91</td><td>9.92</td><td>400</td><td>244</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2496.06	44.78	54.00	-9.22	35.20	27.00	8.77	36.91	9.92	400	244	Average	Level (dBuV/m) Date: 2026-05-04 AVG_54 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>95.82</td><td>-----</td><td>-----</td><td>86.47</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>400</td><td>244</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	95.82	-----	-----	86.47	27.60	8.74	36.91	9.92	400	244	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2496.06	44.78	54.00	-9.22	35.20	27.00	8.77	36.91	9.92	400	244	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	95.82	-----	-----	86.47	27.60	8.74	36.91	9.92	400	244	Average																																																																									



		5																																																																																												
Mode		Band Edge																																																																																												
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																												
ANT		Chain A																																																																																												
Pol.	Vertical											Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>44.51</td><td>27.00</td><td>8.76</td><td>36.91</td><td>9.92</td><td>100</td><td>44</td><td>Peak</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	54.08	74.00	-19.92	44.51	27.00	8.76	36.91	9.92	100	44	Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: PEAK_74 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>103.20</td><td>-----</td><td>-----</td><td>93.85</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>100</td><td>44</td><td>Peak</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	103.20	-----	-----	93.85	27.60	8.74	36.91	9.92	100	44	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1 2480.00	54.08	74.00	-19.92	44.51	27.00	8.76	36.91	9.92	100	44	Peak																																																																																			
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1 2480.00	103.20	-----	-----	93.85	27.60	8.74	36.91	9.92	100	44	Peak																																																																																			
Avg	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2484.36</td><td>44.63</td><td>54.00</td><td>-9.37</td><td>35.18</td><td>27.69</td><td>8.75</td><td>36.91</td><td>9.92</td><td>100</td><td>44</td><td>Average</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.36	44.63	54.00	-9.37	35.18	27.69	8.75	36.91	9.92	100	44	Average	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>101.96</td><td>-----</td><td>-----</td><td>92.61</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>100</td><td>44</td><td>Average</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	101.96	-----	-----	92.61	27.60	8.74	36.91	9.92	100	44	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1 2484.36	44.63	54.00	-9.37	35.18	27.69	8.75	36.91	9.92	100	44	Average																																																																																			
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1 2480.00	101.96	-----	-----	92.61	27.60	8.74	36.91	9.92	100	44	Average																																																																																			







Mode	6																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																	
ANT	Chain B																																																																																	
Pol.	Horizontal					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2492.02</td><td>53.44</td><td>74.00</td><td>-20.56</td><td>43.86</td><td>27.00</td><td>8.77</td><td>36.91</td><td>9.92</td><td>303</td><td>302</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2492.02	53.44	74.00	-20.56	43.86	27.00	8.77	36.91	9.92	303	302	Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: PEAK_74 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>100.88</td><td>-----</td><td>-----</td><td>91.53</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>303</td><td>302</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	100.88	-----	-----	91.53	27.60	8.74	36.91	9.92	303	302	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 2492.02	53.44	74.00	-20.56	43.86	27.00	8.77	36.91	9.92	303	302	Peak																																																																							
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 2480.00	100.88	-----	-----	91.53	27.60	8.74	36.91	9.92	303	302	Peak																																																																							
Avg	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2494.44</td><td>44.87</td><td>54.00</td><td>-9.13</td><td>35.29</td><td>27.00</td><td>8.77</td><td>36.91</td><td>9.92</td><td>303</td><td>302</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2494.44	44.87	54.00	-9.13	35.29	27.00	8.77	36.91	9.92	303	302	Average	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>99.59</td><td>-----</td><td>-----</td><td>90.24</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>303</td><td>302</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	99.59	-----	-----	90.24	27.60	8.74	36.91	9.92	303	302	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 2494.44	44.87	54.00	-9.13	35.29	27.00	8.77	36.91	9.92	303	302	Average																																																																							
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 2480.00	99.59	-----	-----	90.24	27.60	8.74	36.91	9.92	303	302	Average																																																																							



FCC RADIO TEST REPORT

Report No. :FR572320-03B

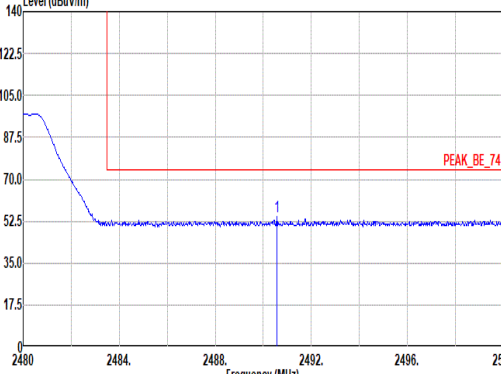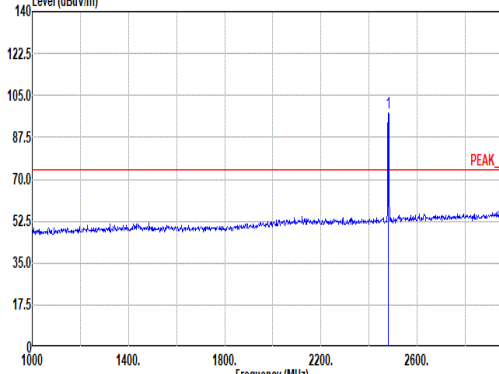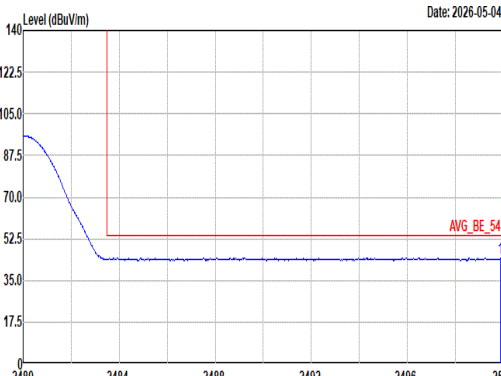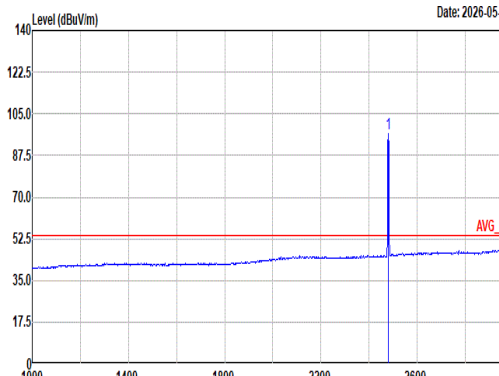Mode	6																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																									
ANT	Chain B																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-05-04  PEAK_BE_74 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2490.56</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>44.84</td><td>27.00</td><td>8.76</td><td>36.91</td><td>9.92</td><td>225 174 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2490.56	54.41	74.00	-19.59	44.84	27.00	8.76	36.91	9.92	225 174 Peak	Level (dBuV/m) Date: 2026-05-04  PEAK_74 Site : 03CH15-HY Condition: PEAK_74 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2480.00</td><td>97.55</td><td>-----</td><td>-----</td><td>88.20</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>225 174 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2480.00	97.55	-----	-----	88.20	27.60	8.74	36.91	9.92	225 174 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2490.56	54.41	74.00	-19.59	44.84	27.00	8.76	36.91	9.92	225 174 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2480.00	97.55	-----	-----	88.20	27.60	8.74	36.91	9.92	225 174 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-05-04  AVG_BE_54 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2499.86</td><td>44.53</td><td>54.00</td><td>-9.47</td><td>34.94</td><td>27.00</td><td>8.78</td><td>36.91</td><td>9.92</td><td>225 174 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2499.86	44.53	54.00	-9.47	34.94	27.00	8.78	36.91	9.92	225 174 Average	Level (dBuV/m) Date: 2026-05-04  AVG_54 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2480.00</td><td>96.54</td><td>-----</td><td>-----</td><td>87.19</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>225 174 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2480.00	96.54	-----	-----	87.19	27.60	8.74	36.91	9.92	225 174 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2499.86	44.53	54.00	-9.47	34.94	27.00	8.78	36.91	9.92	225 174 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2480.00	96.54	-----	-----	87.19	27.60	8.74	36.91	9.92	225 174 Average																																																																																	



		7																																																																																								
Mode	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																									
ANT	Chain A+B																																																																																									
Pol.	Horizontal																																																																																									
Peak	Fundamental																																																																																									
	Fundamental																																																																																									
Peak	Level (dBuV/m) Date: 2026-05-04 PEAK_BE_74 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2493.76</td><td>53.27</td><td>74.00</td><td>-20.73</td><td>43.69</td><td>27.00</td><td>8.77</td><td>36.91</td><td>9.92</td><td>293</td><td>301</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2493.76	53.27	74.00	-20.73	43.69	27.00	8.77	36.91	9.92	293	301	Peak	Level (dBuV/m) Date: 2026-05-04 PEAK_74 Site : 03CH15-HY Condition: PEAK_74 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>105.66</td><td>-----</td><td>-----</td><td>96.31</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>293</td><td>301</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	105.66	-----	-----	96.31	27.60	8.74	36.91	9.92	293	301	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2493.76	53.27	74.00	-20.73	43.69	27.00	8.77	36.91	9.92	293	301	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2480.00	105.66	-----	-----	96.31	27.60	8.74	36.91	9.92	293	301	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-05-04 AVG_BE_54 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.52</td><td>45.31</td><td>54.00</td><td>-8.69</td><td>35.88</td><td>27.67</td><td>8.75</td><td>36.91</td><td>9.92</td><td>293</td><td>301</td><td>Average</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.52	45.31	54.00	-8.69	35.88	27.67	8.75	36.91	9.92	293	301	Average	Level (dBuV/m) Date: 2026-05-04 AVG_54 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>104.30</td><td>-----</td><td>-----</td><td>94.95</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>293</td><td>301</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	104.30	-----	-----	94.95	27.60	8.74	36.91	9.92	293	301	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2483.52	45.31	54.00	-8.69	35.88	27.67	8.75	36.91	9.92	293	301	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2480.00	104.30	-----	-----	94.95	27.60	8.74	36.91	9.92	293	301	Average																																																																														



		7																																																																																										
Mode		Band Edge																																																																																										
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																										
ANT		Chain A+B																																																																																										
Pol.	Vertical										Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2497.00</td><td>53.82</td><td>74.00</td><td>-20.18</td><td>44.24</td><td>27.00</td><td>8.77</td><td>36.91</td><td>9.92</td><td>100</td><td>95</td><td>Peak</td></tr></table>										Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2497.00	53.82	74.00	-20.18	44.24	27.00	8.77	36.91	9.92	100	95	Peak	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: PEAK_74 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>103.75</td><td>-----</td><td>-----</td><td>94.40</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>100</td><td>95</td><td>Peak</td></tr></table>										Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	103.75	-----	-----	94.40	27.60	8.74	36.91	9.92	100	95	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1 2497.00	53.82	74.00	-20.18	44.24	27.00	8.77	36.91	9.92	100	95	Peak																																																																																	
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1 2480.00	103.75	-----	-----	94.40	27.60	8.74	36.91	9.92	100	95	Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.52</td><td>44.78</td><td>54.00</td><td>-9.22</td><td>35.35</td><td>27.67</td><td>8.75</td><td>36.91</td><td>9.92</td><td>100</td><td>95</td><td>Average</td></tr></table>										Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.52	44.78	54.00	-9.22	35.35	27.67	8.75	36.91	9.92	100	95	Average	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_250606 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>102.52</td><td>-----</td><td>-----</td><td>93.17</td><td>27.60</td><td>8.74</td><td>36.91</td><td>9.92</td><td>100</td><td>95</td><td>Average</td></tr></table>										Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	102.52	-----	-----	93.17	27.60	8.74	36.91	9.92	100	95	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1 2483.52	44.78	54.00	-9.22	35.35	27.67	8.75	36.91	9.92	100	95	Average																																																																																	
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1 2480.00	102.52	-----	-----	93.17	27.60	8.74	36.91	9.92	100	95	Average																																																																																	



Mode	7																																																																																																																																				
	Harmonic																																																																																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																				
ANT	Chain A+B																																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: PEAK_74 3m 91200-02294_250606 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.29</td><td>74.00</td><td>-32.71</td><td>54.09</td><td>33.04</td><td>12.44</td><td>58.80</td><td>0.52</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>7440.00</td><td>46.79</td><td>74.00</td><td>-27.21</td><td>54.43</td><td>36.32</td><td>15.40</td><td>59.69</td><td>0.33</td><td>209</td><td>0 Peak</td></tr><tr><td>3</td><td>7440.00</td><td>36.53</td><td>54.00</td><td>-17.47</td><td>44.17</td><td>36.32</td><td>15.40</td><td>59.69</td><td>0.33</td><td>209</td><td>0 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.29	74.00	-32.71	54.09	33.04	12.44	58.80	0.52	--	-- Peak	2	7440.00	46.79	74.00	-27.21	54.43	36.32	15.40	59.69	0.33	209	0 Peak	3	7440.00	36.53	54.00	-17.47	44.17	36.32	15.40	59.69	0.33	209	0 Average	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: PEAK_74 3m 91200-02294_250606 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.26</td><td>74.00</td><td>-33.74</td><td>53.06</td><td>33.04</td><td>12.44</td><td>58.80</td><td>0.52</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>7440.00</td><td>43.77</td><td>74.00</td><td>-30.23</td><td>51.41</td><td>36.32</td><td>15.40</td><td>59.69</td><td>0.33</td><td>--</td><td>-- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.26	74.00	-33.74	53.06	33.04	12.44	58.80	0.52	--	-- Peak	2	7440.00	43.77	74.00	-30.23	51.41	36.32	15.40	59.69	0.33	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	4960.00	41.29	74.00	-32.71	54.09	33.04	12.44	58.80	0.52	--	-- Peak																																																																																																																										
2	7440.00	46.79	74.00	-27.21	54.43	36.32	15.40	59.69	0.33	209	0 Peak																																																																																																																										
3	7440.00	36.53	54.00	-17.47	44.17	36.32	15.40	59.69	0.33	209	0 Average																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	4960.00	40.26	74.00	-33.74	53.06	33.04	12.44	58.80	0.52	--	-- Peak																																																																																																																										
2	7440.00	43.77	74.00	-30.23	51.41	36.32	15.40	59.69	0.33	--	-- Peak																																																																																																																										





Mode	7	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	Chain A+B	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_250606 HORIZONTAL	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_250606 VERTICAL
	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_250606 HORIZONTAL	Level (dBuV/m) Date: 2026-05-04 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_250606 VERTICAL



Mode	8																																																																																																																																																																																																																								
	LF																																																																																																																																																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																																																								
ANT	Chain A+B																																																																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																																																																		
QP/ Peak	Level (dBuV/m) Date: 2026-05-06 Site : 03CH15-HY Condition: QP 3m Bilog_41912 & 05_260318 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>22.24</td><td>40.00</td><td>-17.76</td><td>29.70</td><td>23.97</td><td>0.90</td><td>32.43</td><td>0.10</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>101.78</td><td>22.06</td><td>43.50</td><td>-21.44</td><td>36.46</td><td>16.11</td><td>1.78</td><td>32.41</td><td>0.12</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>230.79</td><td>29.15</td><td>46.00</td><td>-16.85</td><td>42.50</td><td>16.24</td><td>2.66</td><td>32.35</td><td>0.10</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>315.18</td><td>26.39</td><td>46.00</td><td>-19.61</td><td>36.15</td><td>19.25</td><td>3.11</td><td>32.29</td><td>0.17</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>716.76</td><td>35.75</td><td>46.00</td><td>-10.25</td><td>36.20</td><td>26.99</td><td>4.69</td><td>32.29</td><td>0.16</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>935.98</td><td>33.29</td><td>46.00</td><td>-12.71</td><td>28.61</td><td>30.21</td><td>5.33</td><td>31.17</td><td>0.31</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.97	22.24	40.00	-17.76	29.70	23.97	0.90	32.43	0.10	--	Peak	2	101.78	22.06	43.50	-21.44	36.46	16.11	1.78	32.41	0.12	--	Peak	3	230.79	29.15	46.00	-16.85	42.50	16.24	2.66	32.35	0.10	--	Peak	4	315.18	26.39	46.00	-19.61	36.15	19.25	3.11	32.29	0.17	--	Peak	5	716.76	35.75	46.00	-10.25	36.20	26.99	4.69	32.29	0.16	--	Peak	6	935.98	33.29	46.00	-12.71	28.61	30.21	5.33	31.17	0.31	--	Peak	Level (dBuV/m) Date: 2026-05-06 Site : 03CH15-HY Condition: QP 3m Bilog_41912 & 05_260318 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>40.67</td><td>23.85</td><td>40.00</td><td>-16.15</td><td>36.06</td><td>19.10</td><td>1.07</td><td>32.47</td><td>0.09</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>97.90</td><td>20.43</td><td>43.50</td><td>-23.07</td><td>35.32</td><td>15.68</td><td>1.74</td><td>32.41</td><td>0.10</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>230.79</td><td>27.93</td><td>46.00</td><td>-18.07</td><td>41.28</td><td>16.24</td><td>2.66</td><td>32.35</td><td>0.10</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>470.38</td><td>24.75</td><td>46.00</td><td>-21.25</td><td>29.79</td><td>23.39</td><td>3.80</td><td>32.33</td><td>0.10</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>705.12</td><td>34.97</td><td>46.00</td><td>-11.03</td><td>35.77</td><td>26.69</td><td>4.66</td><td>32.30</td><td>0.15</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>959.26</td><td>33.08</td><td>46.00</td><td>-12.92</td><td>27.19</td><td>31.09</td><td>5.41</td><td>30.96</td><td>0.35</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	40.67	23.85	40.00	-16.15	36.06	19.10	1.07	32.47	0.09	--	Peak	2	97.90	20.43	43.50	-23.07	35.32	15.68	1.74	32.41	0.10	--	Peak	3	230.79	27.93	46.00	-18.07	41.28	16.24	2.66	32.35	0.10	--	Peak	4	470.38	24.75	46.00	-21.25	29.79	23.39	3.80	32.33	0.10	--	Peak	5	705.12	34.97	46.00	-11.03	35.77	26.69	4.66	32.30	0.15	--	Peak	6	959.26	33.08	46.00	-12.92	27.19	31.09	5.41	30.96	0.35	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	30.97	22.24	40.00	-17.76	29.70	23.97	0.90	32.43	0.10	--	Peak																																																																																																																																																																																																														
2	101.78	22.06	43.50	-21.44	36.46	16.11	1.78	32.41	0.12	--	Peak																																																																																																																																																																																																														
3	230.79	29.15	46.00	-16.85	42.50	16.24	2.66	32.35	0.10	--	Peak																																																																																																																																																																																																														
4	315.18	26.39	46.00	-19.61	36.15	19.25	3.11	32.29	0.17	--	Peak																																																																																																																																																																																																														
5	716.76	35.75	46.00	-10.25	36.20	26.99	4.69	32.29	0.16	--	Peak																																																																																																																																																																																																														
6	935.98	33.29	46.00	-12.71	28.61	30.21	5.33	31.17	0.31	--	Peak																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	40.67	23.85	40.00	-16.15	36.06	19.10	1.07	32.47	0.09	--	Peak																																																																																																																																																																																																														
2	97.90	20.43	43.50	-23.07	35.32	15.68	1.74	32.41	0.10	--	Peak																																																																																																																																																																																																														
3	230.79	27.93	46.00	-18.07	41.28	16.24	2.66	32.35	0.10	--	Peak																																																																																																																																																																																																														
4	470.38	24.75	46.00	-21.25	29.79	23.39	3.80	32.33	0.10	--	Peak																																																																																																																																																																																																														
5	705.12	34.97	46.00	-11.03	35.77	26.69	4.66	32.30	0.15	--	Peak																																																																																																																																																																																																														
6	959.26	33.08	46.00	-12.92	27.19	31.09	5.41	30.96	0.35	--	Peak																																																																																																																																																																																																														

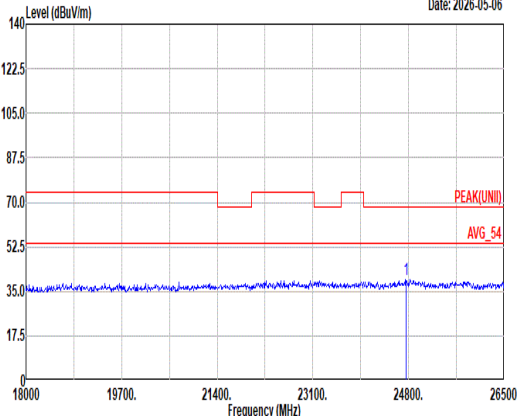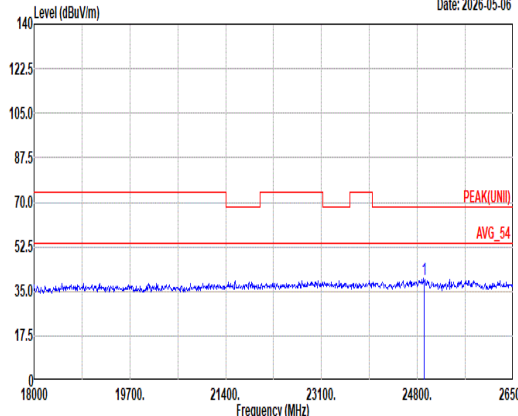


Mode	8																																																																																																
	SHF																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																
ANT	Chain A+B																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak	Date: 2026-05-06  Site : 03CH15-HY Condition: PEAK(UNII) 1m SHF_1224_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24760.70</td><td>39.79</td><td>68.20</td><td>-28.41</td><td>56.62</td><td>39.60</td><td>6.41</td><td>53.30</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24760.70	39.79	68.20	-28.41	56.62	39.60	6.41	53.30	-9.54	--	PEAK	Date: 2026-05-06  Site : 03CH15-HY Condition: PEAK(UNII) 1m SHF_1224_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24921.06</td><td>39.73</td><td>68.20</td><td>-28.47</td><td>56.45</td><td>39.70</td><td>6.42</td><td>53.30</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24921.06	39.73	68.20	-28.47	56.45	39.70	6.42	53.30	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	24760.70	39.79	68.20	-28.41	56.62	39.60	6.41	53.30	-9.54	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	24921.06	39.73	68.20	-28.47	56.45	39.70	6.42	53.30	-9.54	--	PEAK																																																																																						




Appendix C. Duty Cycle Plots

Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Chain A	Bluetooth - LE for 2Mbps	30.77	192	5.21	5.6kHz
Chain B	Bluetooth - LE for 2Mbps	30.95	195	5.13	5.5kHz
Chain A+B	Bluetooth - LE for 2Mbps	30.77	192	5.21	5.6kHz

<Chain A>

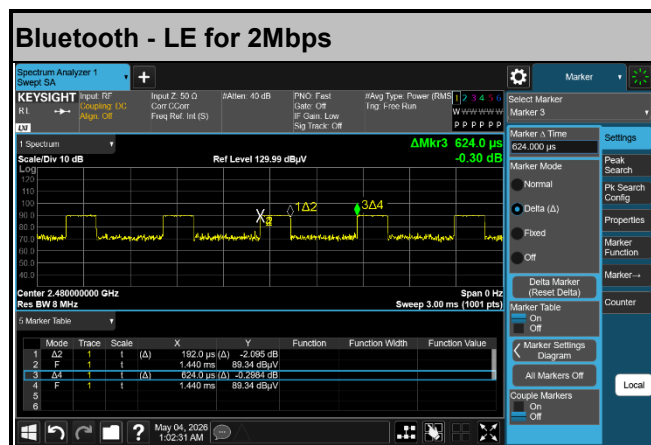

<Chain B>

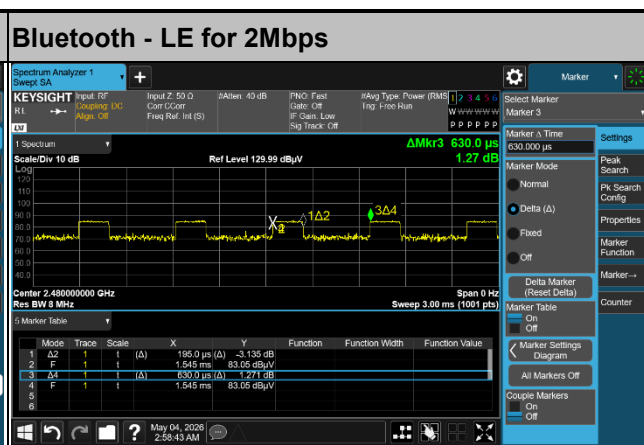

<Chain A + B>

