




FCC RADIO TEST REPORT

FCC ID : ACJ9TGWL24B
Equipment : Radio Module
Brand Name : Panasonic
Model Name : WL24B
Applicant : Panasonic Corporation of North America
Two Riverfront Plaza, Newark, New Jersey, 07102-5490, USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jun. 16, 2026 and testing was performed from Jun. 29, 2026 to Aug. 13, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
3 Test Result.....	11
3.1 Output Power Measurement.....	11
3.2 Radiated Band Edges and Spurious Emission Measurement	12
3.3 Antenna Requirements	16
4 List of Measuring Equipment	17
5 Measurement Uncertainty	19
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission Test Result	
Appendix C. Duty Cycle Plots	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR612317-02A	01	Initial issue of report	Sep. 07, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(1)	Number of Channels	Pass	See Note
-	15.247(a)(1)	Hopping Channel Separation	Pass	See Note
-	15.247(a)(1)	Dwell Time of Each Channel	Pass	See Note
-	15.247(a)(1)	20dB Bandwidth	Pass	See Note
-	2.1049	99% Occupied Bandwidth	Pass	See Note
3.1	15.247(b)(1) 15.247(b)(4)	Peak Output Power	Pass	-
-	15.247(d)	Conducted Band Edges	Pass	See Note
-	15.247(d)	Conducted Spurious Emission	Pass	See Note
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	13.86 dB under the limit at 938.89 MHz
-	15.207	AC Conducted Emission	Pass	See Note
3.3	15.203	Antenna Requirement	Pass	-

Note:

- For host device, Radiated Spurious Emission is verified and complies with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: Panasonic WL24B)

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng
Report Producer: Aya Yang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11ax/be		
Antenna Type Bluetooth: <Aux Ant. (Chain A)>: Monopole Antenna <Main Ant. (Chain B)>: PIFA Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Aux Ant. (Chain A): 1.07 dBi Main Ant. (Chain B): 2.33 dBi

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. The product was installed into Personal Computer (Brand Name: Panasonic, Model Name: FZ-G3 during test.

1.1.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

	Port 0	Port 1	DG	DG	Power	PSD
	Chain A	Chain B	for	for	Limit	Limit
	(dBi)	(dBi)	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Bluetooth	1.07	2.33	2.33	4.73	0.00	0.00

Calculation example:

If a device has two antenna, $G_{ANT1} = 1.07$ dBi; $G_{ANT2} = 2.33$ dBi

Directional gain of power measurement = $\max(1.07, 2.33) + 0 = 2.33$ dBi

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{(1.07 \text{ dBi} / 20)} + 10^{(2.33 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

$$= 4.73 \text{ dBi}$$

$$\text{Power and PSD limit reduction} = \text{Composite gain} - 6 \text{ dBi, (min = 0)}$$



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Keyboard), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
Conducted Test Cases	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Remark: The detailed Radiated test modes are shown in Appendix B.			

2.3 Connection Diagram of Test System

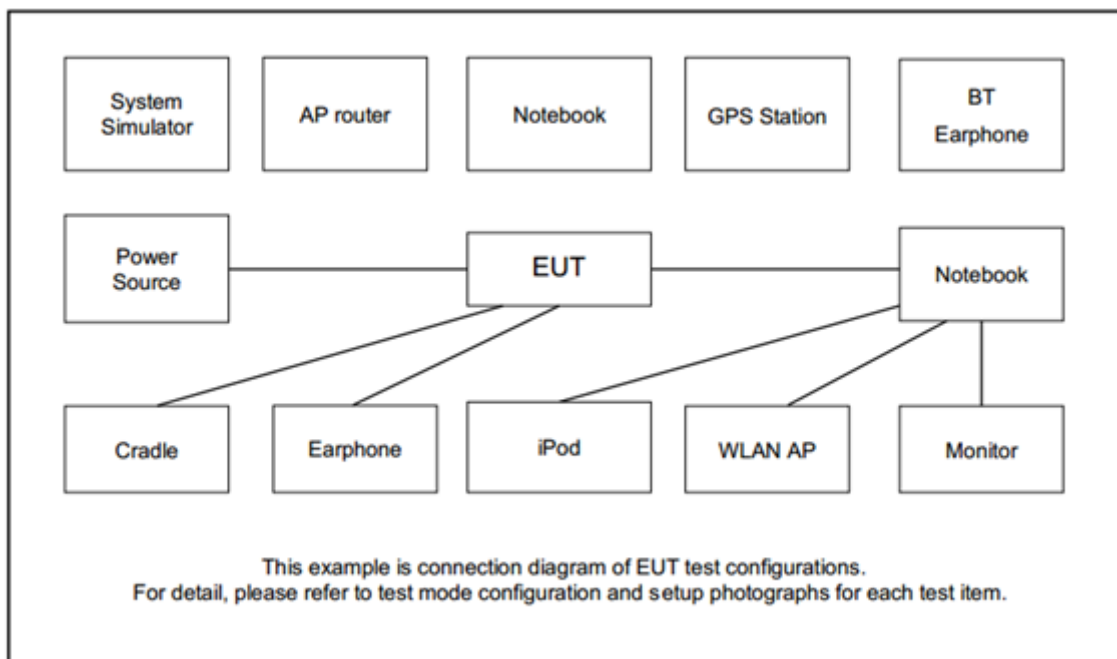

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Earphone	SAMSUNG	SOUND BY AKG	N/A	N/A	Unshielded, 1.2 m

2.5 EUT Operation Test Setup

The RF test items, utility "DRTU.10339.24.40.0" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10 clause 7.8.5.
1. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

3.1.4 Test Setup

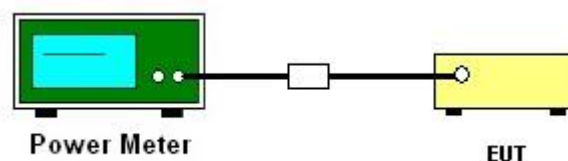

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 \cdot \log$ (Duty cycle)
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.


Note: The average levels are calculated from the peak level corrected with duty cycle correction factor (-24.807dB) derived from $20 \log$ (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.2.4 Test Setup


For radiated test below 30MHz

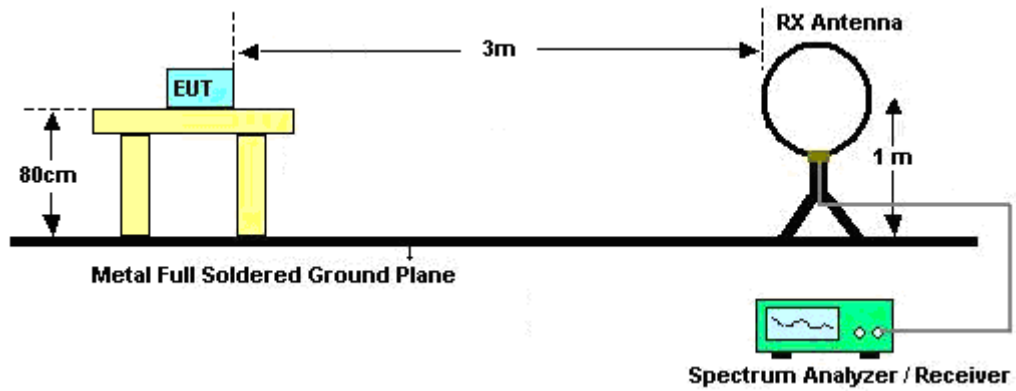


For radiated test from 30MHz to 1GHz

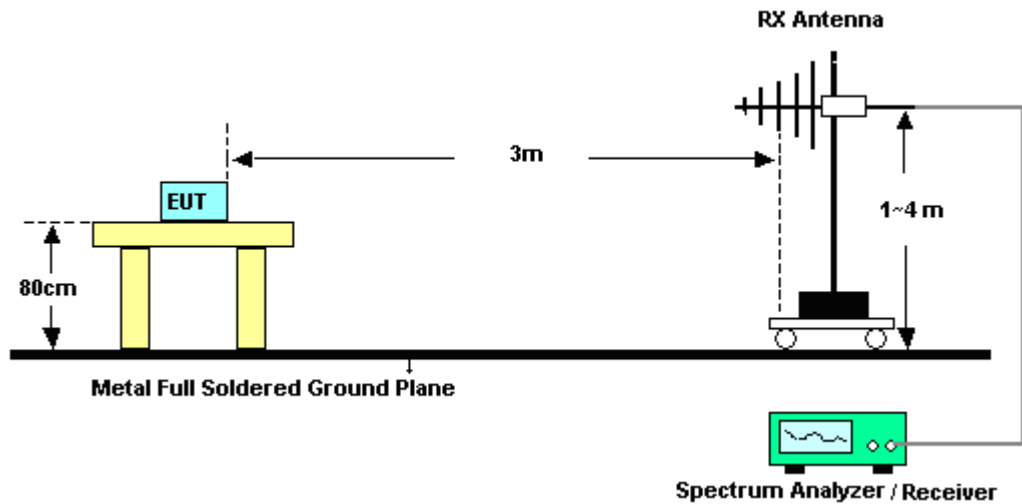

For radiated test from 1GHz to 18GHz

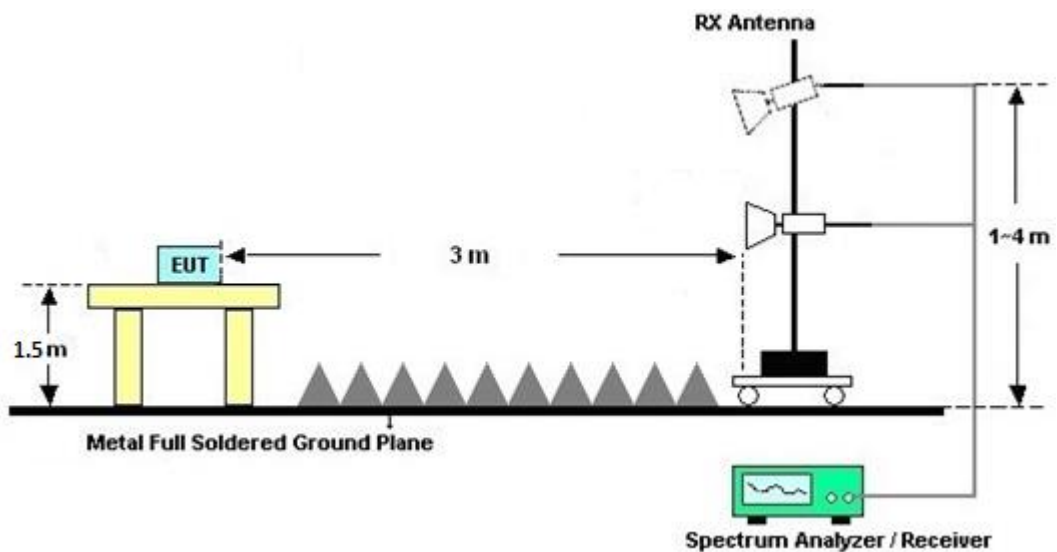

For radiated test above 18GHz

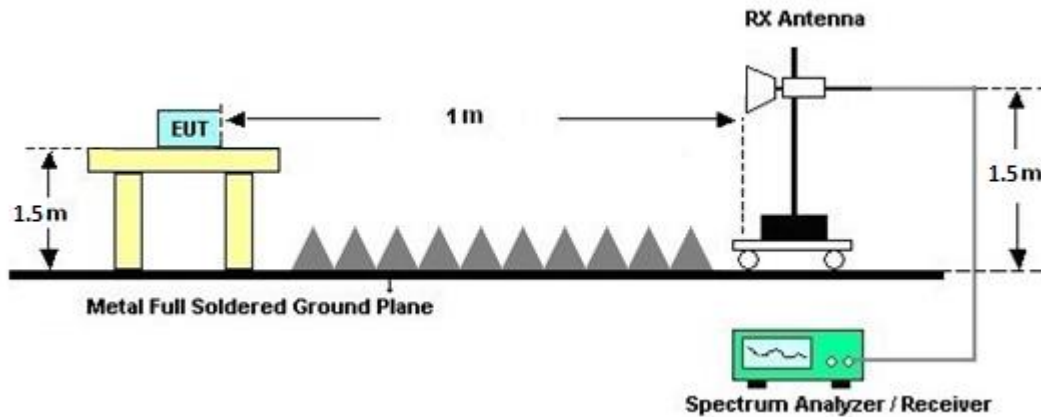

3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site **v01r01**, and the result comes out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.2.7 Duty Cycle

Please refer to Appendix C.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.3 Antenna Requirements

3.3.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.3.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Jun. 29, 2026	Nov. 03, 2026	Conducted (TH05-HY)
USB RF Power Sensor	DARE	RPR3006W	17I00015SNO 37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Jun. 29, 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Nov. 12, 2025	Jun. 29, 2026	Nov. 11, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	Jun. 29, 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	Jun. 29, 2026	N/A	Conducted (TH05-HY)
Bilog Antenna with 6dB pad	TESEQ & VGT	CBL 6111D & VFA_Z-04002- N-06	66925 & 24006	30MHz~1GHz	Apr. 12, 2026	Aug. 06, 2026~ Aug. 13, 2026	Apr. 11, 2027	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Aug. 06, 2026~ Aug. 13, 2026	Dec. 10, 2026	Radiation (03CH11-HY)
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Sep. 15, 2025	Aug. 06, 2026~ Aug. 13, 2026	Sep. 14, 2026	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1230	18GHz~40GHz	Nov. 05, 2025	Aug. 06, 2026~ Aug. 13, 2026	Nov. 04, 2026	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 06, 2025	Aug. 06, 2026~ Aug. 13, 2026	Dec. 05, 2026	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 23, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 22, 2027	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900249	1GHz~18GHz	Jan. 20, 2026	Aug. 06, 2026~ Aug. 13, 2026	Jan. 19, 2027	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 08, 2026	Aug. 06, 2026~ Aug. 13, 2026	Jun. 07, 2027	Radiation (03CH11-HY)
Signal Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	May 28 2026	Aug. 06, 2026~ Aug. 13, 2026	May 27, 2027	Radiation (03CH11-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290045	20Hz~8.4GHz	Apr. 30, 2026	Aug. 06, 2026~ Aug. 13, 2026	Apr. 29, 2027	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Aug. 06, 2026~ Aug. 13, 2026	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Aug. 06, 2026~ Aug. 13, 2026	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Aug. 06, 2026~ Aug. 13, 2026	N/A	Radiation (03CH11-HY)
Software	Audix	E3	RK-002391	N/A	N/A	Aug. 06, 2026~ Aug. 13, 2026	N/A	Radiation (03CH11-HY)
USB Data Logger	TECPEL	TR-32	HE17XM6804	N/A	Dec. 15, 2025	Aug. 06, 2026~ Aug. 13, 2026	Dec. 14, 2026	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 26, 2025	Aug. 06, 2026~ Aug. 13, 2026	Aug. 25, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 04, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 04, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 04, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	805139 2	9K~30M	Mar. 04, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	805139 2	30M~40G	Mar. 04, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 09, 2025	Aug. 06, 2026~ Aug. 13, 2026	Sep. 08, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN3	3GHz High Pass Filter	Sep. 09, 2025	Aug. 06, 2026~ Aug. 13, 2026	Sep. 08, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 09, 2025	Aug. 06, 2026~ Aug. 13, 2026	Sep. 08, 2026	Radiation (03CH11-HY)



5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	6.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.90 dB
---	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.70 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.90 dB
---	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Eason Huang	Temperature:	21~25	°C
Test Date:	2026/6/29	Relative Humidity:	51~54	%

<Chain A>

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	8.98	20.97	Pass
	39	1	8.98	20.97	Pass
	78	1	8.98	20.97	Pass
2DH1	0	1	8.78	20.97	Pass
	39	1	8.78	20.97	Pass
	78	1	8.88	20.97	Pass
3DH1	0	1	8.88	20.97	Pass
	39	1	8.88	20.97	Pass
	78	1	8.78	20.97	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)	Duty Factor (dB)
DH1	0	1	8.78	5.29	8.50
	39	1	8.78	5.29	
	78	1	8.88	5.29	
2DH1	0	1	8.58	5.17	8.50
	39	1	8.58	5.17	
	78	1	8.68	5.17	
3DH1	0	1	8.68	5.19	8.50
	39	1	8.68	5.19	
	78	1	8.78	5.19	

<Chain B>

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	7.88	20.97	Pass
	39	1	7.98	20.97	Pass
	78	1	7.88	20.97	Pass
2DH1	0	1	7.78	20.97	Pass
	39	1	7.88	20.97	Pass
	78	1	7.78	20.97	Pass
3DH1	0	1	7.78	20.97	Pass
	39	1	7.88	20.97	Pass
	78	1	7.78	20.97	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)	Duty Factor (dB)
DH1	0	1	7.68	5.27	7.50
	39	1	7.78	5.27	
	78	1	7.68	5.27	
2DH1	0	1	7.58	5.19	7.50
	39	1	7.68	5.19	
	78	1	7.58	5.19	
3DH1	0	1	7.58	5.17	7.50
	39	1	7.68	5.17	
	78	1	7.58	5.17	

<ChainA+B>

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	2	12.13	20.97	Pass
	39	2	12.28	20.97	Pass
	78	2	12.13	20.97	Pass
2DH1	0	2	13.68	20.97	Pass
	39	2	13.78	20.97	Pass
	78	2	13.68	20.97	Pass
3DH1	0	2	14.18	20.97	Pass
	39	2	14.28	20.97	Pass
	78	2	14.18	20.97	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	2	10.32	5.29
	39	2	10.42	5.29
	78	2	10.32	5.29
2DH1	0	2	10.32	5.19
	39	2	10.42	5.19
	78	2	10.32	5.19
3DH1	0	2	10.42	5.19
	39	2	10.52	5.19
	78	2	10.42	5.19

Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Fu Chen, Troye Hsieh	Temperature :	19.1~21.9°C
		Relative Humidity :	50.1~66.9%

Note symbol

-L	Low channel location
-R	High channel location

B1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	Chain A	Bluetooth BR_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	Chain B	Bluetooth BR_GFSK	78	2480	1Mbps	-	-
Mode 3	2400-2483.5	Chain A+B	Bluetooth BR_GFSK	78	2480	1Mbps	-	-
Mode 4	2400-2483.5	Chain A+B	Bluetooth BR_GFSK	78	2480	1Mbps	-	SHF
Mode 5	2400-2483.5	Chain A+B	Bluetooth BR_GFSK	78	2480	1Mbps	-	LF

B2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth BR_GFSK	00	2379.18	54.22	74.00	-19.78	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	00	-	-	-	-	-	-	-	-	Harmonic
2	Bluetooth BR_GFSK	78	2493.50	54.40	74.00	-19.60	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	78	-	-	-	-	-	-	-	-	Harmonic
3	Bluetooth BR_GFSK	78	2499.72	54.58	74.00	-19.42	V	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	78	7440.00	44.41	74.00	-29.59	H	Peak	Pass	-	Harmonic
4	Bluetooth BR_GFSK	78	24855.73	41.39	74.00	-32.61	V	Peak	Pass	-	SHF
5	Bluetooth BR_GFSK	78	938.89	32.14	46.00	-13.86	V	Peak	Pass	-	LF



Mode	1																																																																																																															
	Band Edge																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																															
ANT	Chain A																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91280_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2379.18</td><td>54.22</td><td>74.00</td><td>-19.78</td><td>43.35</td><td>27.20</td><td>6.63</td><td>33.08</td><td>10.12</td><td>239</td><td>222 Peak</td></tr><tr><td>2</td><td>2379.18</td><td>29.41</td><td>54.00</td><td>-24.59</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.18	54.22	74.00	-19.78	43.35	27.20	6.63	33.08	10.12	239	222 Peak	2	2379.18	29.41	54.00	-24.59	--	--	--	--	--	--	AVERAGE	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>99.56</td><td>74.75</td><td>24.81</td><td>88.52</td><td>27.32</td><td>6.66</td><td>33.06</td><td>10.12</td><td>239</td><td>222 Peak</td></tr><tr><td>2</td><td>2402.00</td><td>74.75</td><td>74.75</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.56	74.75	24.81	88.52	27.32	6.66	33.06	10.12	239	222 Peak	2	2402.00	74.75	74.75	0.00	--	--	--	--	--	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2379.18	54.22	74.00	-19.78	43.35	27.20	6.63	33.08	10.12	239	222 Peak																																																																																																					
2	2379.18	29.41	54.00	-24.59	--	--	--	--	--	--	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2402.00	99.56	74.75	24.81	88.52	27.32	6.66	33.06	10.12	239	222 Peak																																																																																																					
2	2402.00	74.75	74.75	0.00	--	--	--	--	--	--	Average																																																																																																					



Mode	1											
	Band Edge											
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz											
ANT	Chain A											
Pol.	Vertical						Fundamental					
Peak												



FCC RADIO TEST REPORT

Report No. :FR612317-02A

Mode	2																																																																																																																									
	Band Edge																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																									
ANT	Chain B																																																																																																																									
Pol.	Horizontal						Fundamental																																																																																																																			
Peak	Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91280_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.50</td><td>54.40</td><td>74.00</td><td>-19.60</td><td>42.67</td><td>27.80</td><td>6.80</td><td>32.99</td><td>10.12</td><td>117</td><td>107 Peak</td></tr><tr><td>2</td><td>2493.50</td><td>29.60</td><td>54.00</td><td>-24.40</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.50	54.40	74.00	-19.60	42.67	27.80	6.80	32.99	10.12	117	107 Peak	2	2493.50	29.60	54.00	-24.40	--	--	--	--	--	--	AVERAGE	Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>96.95</td><td>-----</td><td>-----</td><td>85.46</td><td>27.60</td><td>6.78</td><td>33.01</td><td>10.12</td><td>117</td><td>107 Peak</td></tr><tr><td>2</td><td>2480.00</td><td>72.15</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.95	-----	-----	85.46	27.60	6.78	33.01	10.12	117	107 Peak	2	2480.00	72.15	-----	-----	--	--	--	--	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	2493.50	54.40	74.00	-19.60	42.67	27.80	6.80	32.99	10.12	117	107 Peak																																																																																																															
2	2493.50	29.60	54.00	-24.40	--	--	--	--	--	--	AVERAGE																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	2480.00	96.95	-----	-----	85.46	27.60	6.78	33.01	10.12	117	107 Peak																																																																																																															
2	2480.00	72.15	-----	-----	--	--	--	--	--	--	Average																																																																																																															





Mode	2																																																																																																															
	Band Edge																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																															
ANT	Chain B																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91280_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.26</td><td>54.20</td><td>74.00</td><td>-19.80</td><td>42.47</td><td>27.80</td><td>6.80</td><td>32.99</td><td>10.12</td><td>200</td><td>218 Peak</td></tr><tr><td>2</td><td>2497.26</td><td>29.40</td><td>54.00</td><td>-24.60</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.26	54.20	74.00	-19.80	42.47	27.80	6.80	32.99	10.12	200	218 Peak	2	2497.26	29.40	54.00	-24.60	--	--	--	--	--	--	AVERAGE	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>104.19</td><td>-----</td><td>-----</td><td>92.70</td><td>27.60</td><td>6.78</td><td>33.01</td><td>10.12</td><td>200</td><td>218 Peak</td></tr><tr><td>2</td><td>2480.00</td><td>79.38</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	104.19	-----	-----	92.70	27.60	6.78	33.01	10.12	200	218 Peak	2	2480.00	79.38	-----	-----	--	--	--	--	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2497.26	54.20	74.00	-19.80	42.47	27.80	6.80	32.99	10.12	200	218 Peak																																																																																																					
2	2497.26	29.40	54.00	-24.60	--	--	--	--	--	--	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2480.00	104.19	-----	-----	92.70	27.60	6.78	33.01	10.12	200	218 Peak																																																																																																					
2	2480.00	79.38	-----	-----	--	--	--	--	--	--	Average																																																																																																					





Mode	3																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	Chain A+B																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91280_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.54</td><td>54.56</td><td>74.00</td><td>-19.44</td><td>42.83</td><td>27.00</td><td>6.00</td><td>32.99</td><td>10.12</td><td>316</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>2494.54</td><td>29.75</td><td>54.00</td><td>-24.25</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.54	54.56	74.00	-19.44	42.83	27.00	6.00	32.99	10.12	316	360	Peak	2	2494.54	29.75	54.00	-24.25	--	--	--	--	--	--	--	AVERAGE	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.06</td><td>-----</td><td>-----</td><td>90.37</td><td>27.60</td><td>6.78</td><td>33.01</td><td>10.12</td><td>316</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>2480.00</td><td>77.05</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.06	-----	-----	90.37	27.60	6.78	33.01	10.12	316	360	Peak	2	2480.00	77.05	-----	-----	--	--	--	--	--	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2494.54	54.56	74.00	-19.44	42.83	27.00	6.00	32.99	10.12	316	360	Peak																																																																																																																		
2	2494.54	29.75	54.00	-24.25	--	--	--	--	--	--	--	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2480.00	101.06	-----	-----	90.37	27.60	6.78	33.01	10.12	316	360	Peak																																																																																																																		
2	2480.00	77.05	-----	-----	--	--	--	--	--	--	--	Average																																																																																																																		

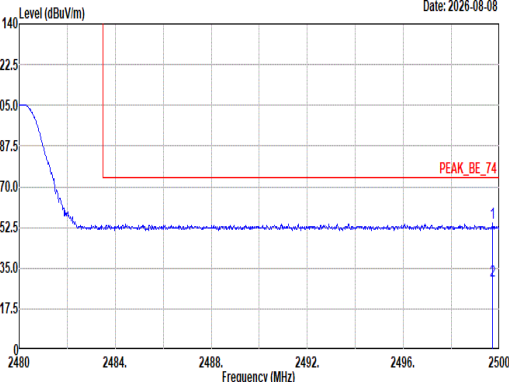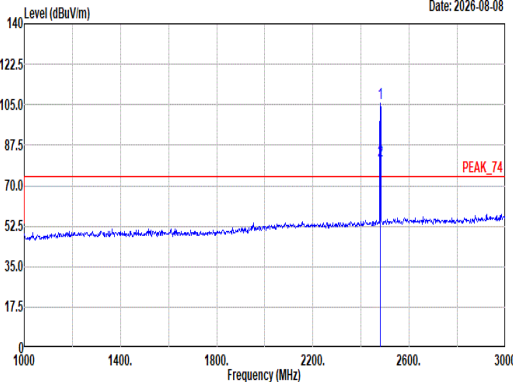

Mode	3																																																																																																																								
	Band Edge																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																								
ANT	Chain A+B																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																		
Peak																																																																																																																									
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91280_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2499.72</td><td>54.58</td><td>74.00</td><td>-19.42</td><td>42.85</td><td>27.80</td><td>6.80</td><td>32.99</td><td>10.12</td><td>100</td><td>161 Peak</td></tr><tr><td>2</td><td>2499.72</td><td>29.77</td><td>54.00</td><td>-24.23</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.72	54.58	74.00	-19.42	42.85	27.80	6.80	32.99	10.12	100	161 Peak	2	2499.72	29.77	54.00	-24.23	--	--	--	--	--	--	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>105.52</td><td>-----</td><td>-----</td><td>94.03</td><td>27.60</td><td>6.78</td><td>33.01</td><td>10.12</td><td>100</td><td>161 Peak</td></tr><tr><td>2</td><td>2480.00</td><td>80.71</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.52	-----	-----	94.03	27.60	6.78	33.01	10.12	100	161 Peak	2	2480.00	80.71	-----	-----	--	--	--	--	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2499.72	54.58	74.00	-19.42	42.85	27.80	6.80	32.99	10.12	100	161 Peak																																																																																																														
2	2499.72	29.77	54.00	-24.23	--	--	--	--	--	--	AVERAGE																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2480.00	105.52	-----	-----	94.03	27.60	6.78	33.01	10.12	100	161 Peak																																																																																																														
2	2480.00	80.71	-----	-----	--	--	--	--	--	--	Average																																																																																																														

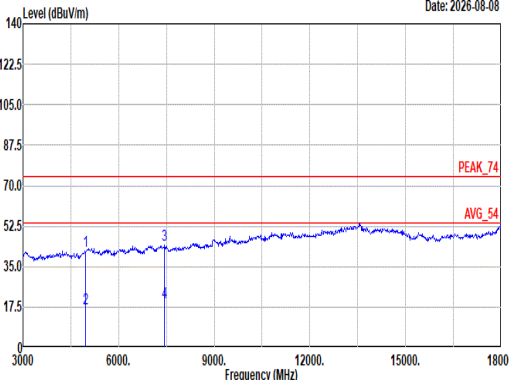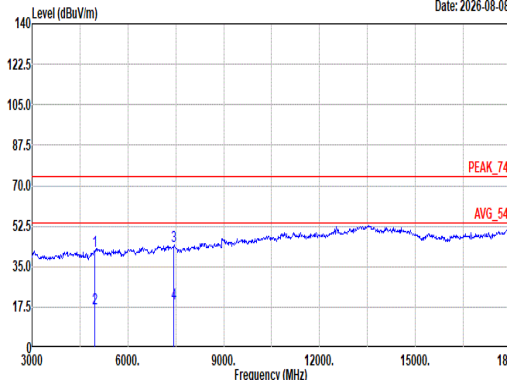

Mode	3																																																																																										
	Harmonic																																																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																										
ANT	Chain A+B																																																																																										
Pol.	Horizontal						Vertical																																																																																				
Peak Avg																																																																																											
	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL						Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.87</td><td>74.00</td><td>-32.13</td><td>63.96</td><td>32.94</td><td>11.06</td><td>67.05</td><td>0.96</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>17.07</td><td>54.00</td><td>-36.93</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>44.41</td><td>74.00</td><td>-29.59</td><td>60.25</td><td>36.30</td><td>13.87</td><td>66.19</td><td>0.18</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>19.60</td><td>54.00</td><td>-34.40</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.87	74.00	-32.13	63.96	32.94	11.06	67.05	0.96	--	Peak	2	4960.00	17.07	54.00	-36.93	--	--	--	--	--	--	Average	3	7440.00	44.41	74.00	-29.59	60.25	36.30	13.87	66.19	0.18	--	Peak	4	7440.00	19.60	54.00	-34.40	--	--	--	--	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	4960.00	41.87	74.00	-32.13	63.96	32.94	11.06	67.05	0.96	--	Peak																																																																																
2	4960.00	17.07	54.00	-36.93	--	--	--	--	--	--	Average																																																																																
3	7440.00	44.41	74.00	-29.59	60.25	36.30	13.87	66.19	0.18	--	Peak																																																																																
4	7440.00	19.60	54.00	-34.40	--	--	--	--	--	--	Average																																																																																



Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
ANT	Chain A+B	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL
	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL




Mode	4																																																																																																
	SHF																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																
ANT	Chain A+B																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak	Date: 2026-08-12 Site : 03CH11-HY Condition: PEAK_74 1m SHF_1230_251205 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24941.12</td><td>40.95</td><td>74.00</td><td>-33.05</td><td>38.35</td><td>39.36</td><td>26.02</td><td>53.24</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24941.12	40.95	74.00	-33.05	38.35	39.36	26.02	53.24	-9.54	--	PEAK	Date: 2026-08-12 Site : 03CH11-HY Condition: PEAK_74 1m SHF_1230_251205 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24855.73</td><td>41.39</td><td>74.00</td><td>-32.61</td><td>38.97</td><td>39.29</td><td>25.96</td><td>53.29</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24855.73	41.39	74.00	-32.61	38.97	39.29	25.96	53.29	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	24941.12	40.95	74.00	-33.05	38.35	39.36	26.02	53.24	-9.54	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	24855.73	41.39	74.00	-32.61	38.97	39.29	25.96	53.29	-9.54	--	PEAK																																																																																						



Mode	5																																																																																																																																																																																																															
	LF																																																																																																																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																																															
ANT	Chain A+B																																																																																																																																																																																																															
Pol.	Horizontal								Vertical																																																																																																																																																																																																							
QPI Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH11-HY Condition: QP 3m Bilog_66925 & 24006_260412 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>Aux2</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><td>1</td><td>34.85</td><td>21.62</td><td>40.00</td><td>-18.38</td><td>30.96</td><td>21.84</td><td>0.77</td><td>31.97</td><td>0.02</td><td>0.00</td><td>-- -- Peak</td></tr><tr><td>2</td><td>158.04</td><td>27.62</td><td>43.50</td><td>-15.88</td><td>41.51</td><td>16.48</td><td>1.67</td><td>32.08</td><td>0.04</td><td>0.00</td><td>-- -- Peak</td></tr><tr><td>3</td><td>265.71</td><td>26.62</td><td>46.00</td><td>-19.38</td><td>36.41</td><td>19.90</td><td>2.17</td><td>31.93</td><td>0.07</td><td>0.00</td><td>-- -- Peak</td></tr><tr><td>4</td><td>278.32</td><td>28.87</td><td>46.00</td><td>-17.13</td><td>39.80</td><td>18.71</td><td>2.22</td><td>31.94</td><td>0.08</td><td>0.00</td><td>-- -- Peak</td></tr><tr><td>5</td><td>757.50</td><td>30.20</td><td>46.00</td><td>-15.80</td><td>29.69</td><td>28.07</td><td>3.75</td><td>31.86</td><td>0.55</td><td>0.00</td><td>-- -- Peak</td></tr><tr><td>6</td><td>950.53</td><td>31.85</td><td>46.00</td><td>-14.15</td><td>27.23</td><td>30.78</td><td>4.14</td><td>30.70</td><td>0.40</td><td>0.00</td><td>-- -- Peak</td></tr></table>									Freq	Limit	Read	Ant	Cable	Preamp	Aux	Aux2	APos	TPos	Remark		MHz	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor		1	34.85	21.62	40.00	-18.38	30.96	21.84	0.77	31.97	0.02	0.00	-- -- Peak	2	158.04	27.62	43.50	-15.88	41.51	16.48	1.67	32.08	0.04	0.00	-- -- Peak	3	265.71	26.62	46.00	-19.38	36.41	19.90	2.17	31.93	0.07	0.00	-- -- Peak	4	278.32	28.87	46.00	-17.13	39.80	18.71	2.22	31.94	0.08	0.00	-- -- Peak	5	757.50	30.20	46.00	-15.80	29.69	28.07	3.75	31.86	0.55	0.00	-- -- Peak	6	950.53	31.85	46.00	-14.15	27.23	30.78	4.14	30.70	0.40	0.00	-- -- Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH11-HY Condition: QP 3m Bilog_66925 & 24006_260412 VERTICAL <table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>Aux2</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><td>1</td><td>60.07</td><td>25.43</td><td>40.00</td><td>-14.57</td><td>44.68</td><td>11.65</td><td>0.99</td><td>31.98</td><td>0.09</td><td>0.00</td><td>-- -- Peak</td></tr><tr><td>2</td><td>123.12</td><td>22.34</td><td>43.50</td><td>-21.16</td><td>35.33</td><td>17.59</td><td>1.46</td><td>32.09</td><td>0.05</td><td>0.00</td><td>-- -- Peak</td></tr><tr><td>3</td><td>264.74</td><td>20.82</td><td>46.00</td><td>-25.18</td><td>30.40</td><td>20.11</td><td>2.17</td><td>31.93</td><td>0.07</td><td>0.00</td><td>-- -- Peak</td></tr><tr><td>4</td><td>472.32</td><td>25.15</td><td>46.00</td><td>-20.85</td><td>30.74</td><td>23.39</td><td>2.94</td><td>32.00</td><td>0.08</td><td>0.00</td><td>-- -- Peak</td></tr><tr><td>5</td><td>734.22</td><td>29.51</td><td>46.00</td><td>-16.49</td><td>29.45</td><td>27.68</td><td>3.69</td><td>31.90</td><td>0.59</td><td>0.00</td><td>-- -- Peak</td></tr><tr><td>6</td><td>938.89</td><td>32.14</td><td>46.00</td><td>-13.86</td><td>28.20</td><td>30.21</td><td>4.13</td><td>30.82</td><td>0.42</td><td>0.00</td><td>-- -- Peak</td></tr></table>									Freq	Limit	Read	Ant	Cable	Preamp	Aux	Aux2	APos	TPos	Remark		MHz	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor		1	60.07	25.43	40.00	-14.57	44.68	11.65	0.99	31.98	0.09	0.00	-- -- Peak	2	123.12	22.34	43.50	-21.16	35.33	17.59	1.46	32.09	0.05	0.00	-- -- Peak	3	264.74	20.82	46.00	-25.18	30.40	20.11	2.17	31.93	0.07	0.00	-- -- Peak	4	472.32	25.15	46.00	-20.85	30.74	23.39	2.94	32.00	0.08	0.00	-- -- Peak	5	734.22	29.51	46.00	-16.49	29.45	27.68	3.69	31.90	0.59	0.00	-- -- Peak	6	938.89	32.14	46.00	-13.86	28.20	30.21	4.13	30.82	0.42	0.00	-- -- Peak
		Freq	Limit	Read	Ant	Cable	Preamp	Aux	Aux2	APos	TPos	Remark																																																																																																																																																																																																				
		MHz	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																																																																																																					
1	34.85	21.62	40.00	-18.38	30.96	21.84	0.77	31.97	0.02	0.00	-- -- Peak																																																																																																																																																																																																					
2	158.04	27.62	43.50	-15.88	41.51	16.48	1.67	32.08	0.04	0.00	-- -- Peak																																																																																																																																																																																																					
3	265.71	26.62	46.00	-19.38	36.41	19.90	2.17	31.93	0.07	0.00	-- -- Peak																																																																																																																																																																																																					
4	278.32	28.87	46.00	-17.13	39.80	18.71	2.22	31.94	0.08	0.00	-- -- Peak																																																																																																																																																																																																					
5	757.50	30.20	46.00	-15.80	29.69	28.07	3.75	31.86	0.55	0.00	-- -- Peak																																																																																																																																																																																																					
6	950.53	31.85	46.00	-14.15	27.23	30.78	4.14	30.70	0.40	0.00	-- -- Peak																																																																																																																																																																																																					
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	Aux2	APos	TPos	Remark																																																																																																																																																																																																					
	MHz	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																																																																																																						
1	60.07	25.43	40.00	-14.57	44.68	11.65	0.99	31.98	0.09	0.00	-- -- Peak																																																																																																																																																																																																					
2	123.12	22.34	43.50	-21.16	35.33	17.59	1.46	32.09	0.05	0.00	-- -- Peak																																																																																																																																																																																																					
3	264.74	20.82	46.00	-25.18	30.40	20.11	2.17	31.93	0.07	0.00	-- -- Peak																																																																																																																																																																																																					
4	472.32	25.15	46.00	-20.85	30.74	23.39	2.94	32.00	0.08	0.00	-- -- Peak																																																																																																																																																																																																					
5	734.22	29.51	46.00	-16.49	29.45	27.68	3.69	31.90	0.59	0.00	-- -- Peak																																																																																																																																																																																																					
6	938.89	32.14	46.00	-13.86	28.20	30.21	4.13	30.82	0.42	0.00	-- -- Peak																																																																																																																																																																																																					

Appendix C. Duty Cycle Plots

<Chain A>

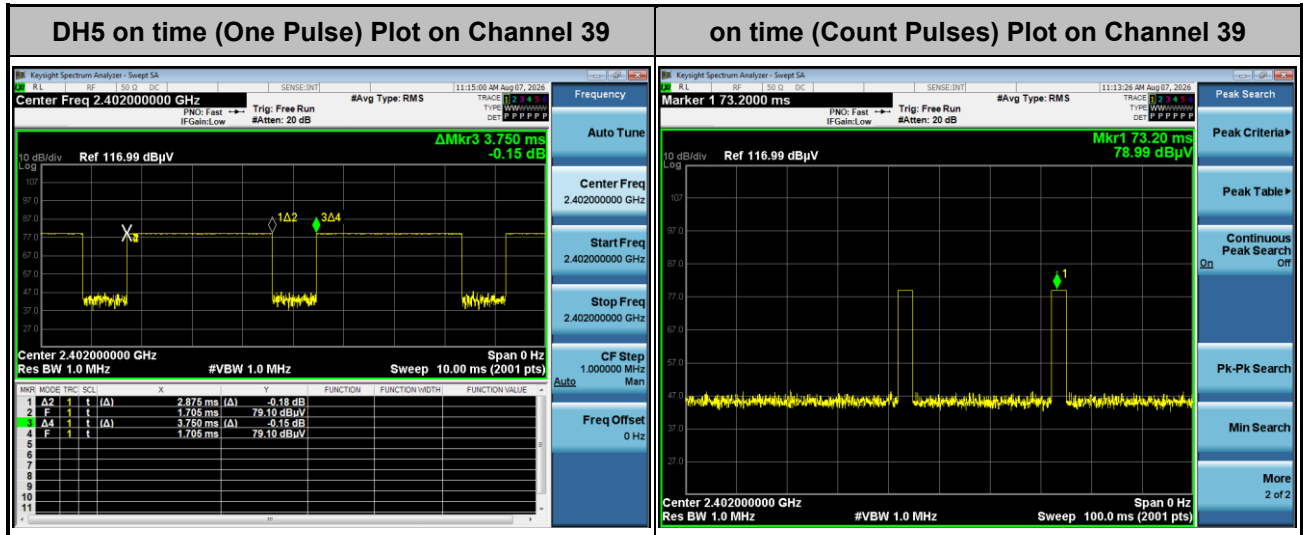

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.875 / 100 = 5.75 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.807 \text{ dB}$
3. **DH5** has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$2.875 \text{ ms} \times 20 \text{ channels} = 57.5 \text{ ms}$$


There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.6 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.875 \text{ ms} \times 2 = 5.75 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.75 \text{ ms}/100 \text{ ms}) = -24.807 \text{ dB}$$
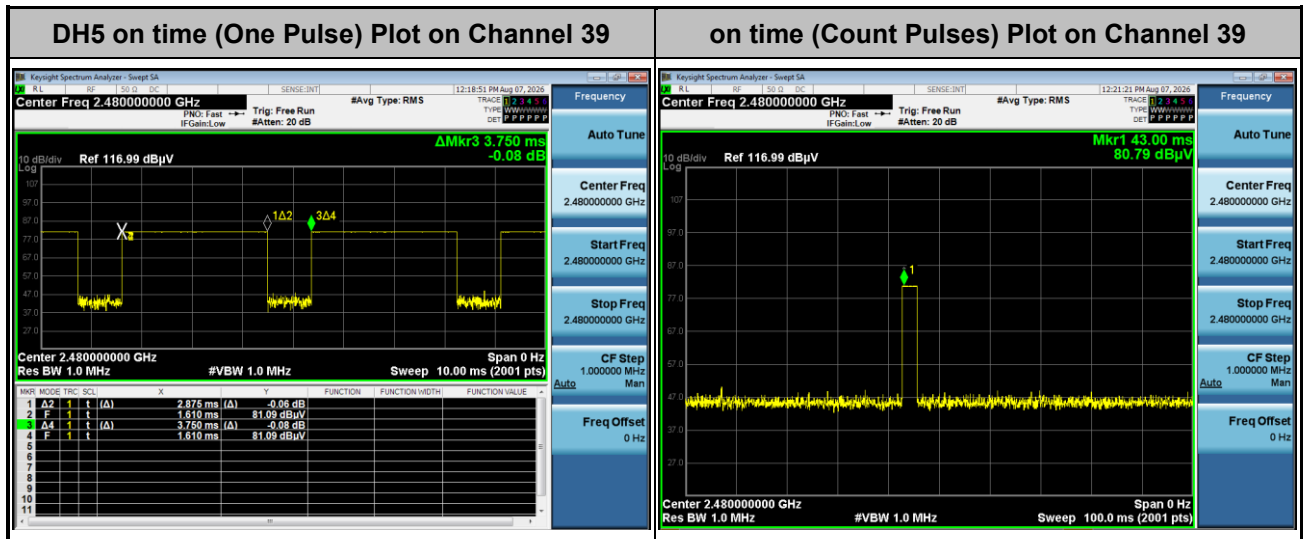
<Chain B>

Note:

4. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.75 / 100 = 5.75 \%$
5. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.807 \text{ dB}$
6. **DH5** has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$2.875 \text{ ms} \times 20 \text{ channels} = 57.5 \text{ ms}$$


There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.6 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.875 \text{ ms} \times 2 = 5.75 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.75 \text{ ms}/100 \text{ ms}) = -24.807 \text{ dB}$$
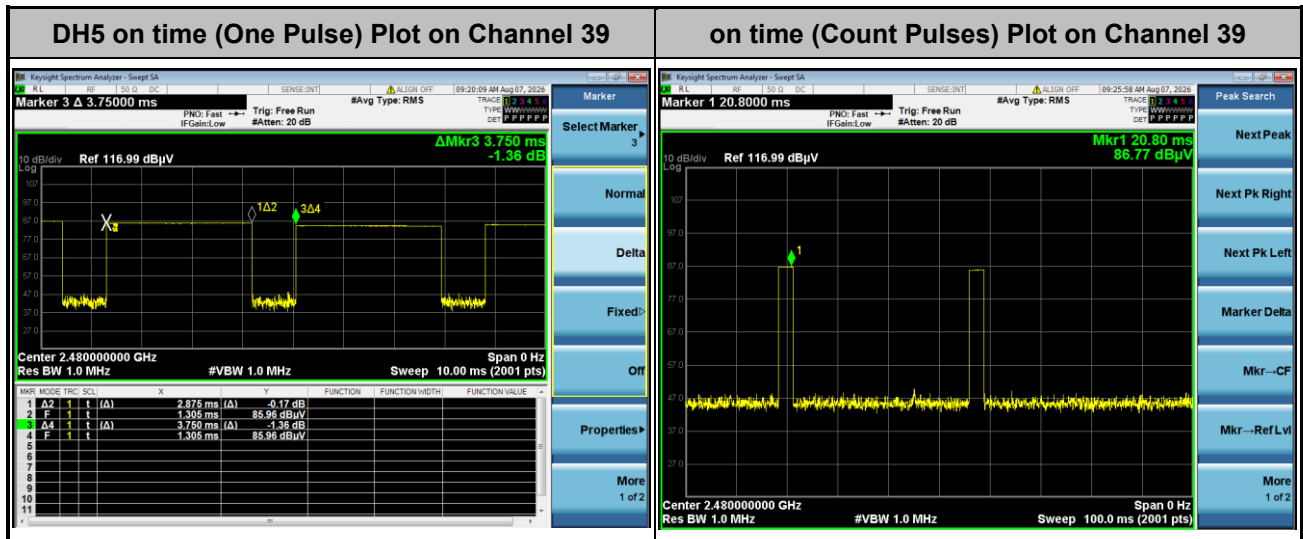
<Chain A+B>

Note:

7. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.875 / 100 = 5.75 \%$
8. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.807 \text{ dB}$
9. **DH5** has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$2.875 \text{ ms} \times 20 \text{ channels} = 57.5 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.6 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.875 \text{ ms} \times 2 = 5.75 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.75 \text{ ms}/100 \text{ ms}) = -24.807 \text{ dB}$$