



FCC RADIO TEST REPORT

FCC ID : ACJ9TGWL24B
Equipment : Radio Module
Brand Name : Panasonic
Model Name : WL24B
Applicant : Panasonic Corporation of North America
Two Riverfront Plaza, Newark, New Jersey, 07102-5490, USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jun. 16, 2026 and testing was performed from Jun. 25, 2026 to Aug. 27, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
3 Test Result	11
3.1 Output Power Measurement.....	11
3.2 Radiated Band Edges and Spurious Emission Measurement	12
3.3 Antenna Requirements.....	16
4 List of Measuring Equipment.....	17
5 Measurement Uncertainty	18
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission Test Result	
Appendix C. Duty Cycle Plots	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR612317-02C	01	Initial issue of report	Sep. 07, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(2)	6dB Bandwidth	Pass	See Note
-	2.1049	99% Occupied Bandwidth	Pass	See Note
3.1	15.247(b)	Power Output Measurement	Pass	-
-	15.247(e)	Power Spectral Density	Pass	See Note
-	15.247(d)	Conducted Band Edges	Pass	See Note
		Conducted Spurious Emission	Pass	See Note
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	1.51 dB under the limit at 2486.78 MHz
-	15.207	AC Conducted Emission	Pass	See Note
3.3	15.203	Antenna Requirement	Pass	-

Note:

- For host device, the spot check Radiated Spurious Emission and complies with the limit in this test report.
- For host device, the spot check Conducted Output Power is no difference after compared to module (Model: Panasonic WL24B).

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Freda Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11ax/be.		
Antenna Type WLAN: <Aux Ant. (Chain A)>: Monopole Antenna <Main Ant. (Chain B)>: PIFA Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Aux Ant. (Chain A): 1.07 dBi Main Ant. (Chain B): 2.33 dBi

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. The product was installed into Personal Computer (Brand Name: Panasonic, Model Name: FZ-G3 during test.

1.1.1 Antenna Directional Gain

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Chain A (dBi)	Chain B (dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4GHz	1.07	2.33	2.33	4.73	0.00	FALSE

Calculation example:

If a device has two antenna, $G_{ANT1} = 1.07$ dBi; $G_{ANT2} = 2.33$ dBi

Directional gain of power measurement = $\max(1.07, 2.33) + 0 = 2.33$ dBi

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{(1.07 \text{ dBi} / 20)} + 10^{(2.33 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

$$= 4.73 \text{ dBi}$$

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		

2.2 Test Mode

The final test modes include the worst data rates for each modulation shown in the table below.

SISO Mode

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20(Covered by EHT20)	MCS0
802.11ax HE40(Covered by EHT20)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0


MIMO Mode

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20(Covered by EHT20)	MCS0
802.11ax HE40(Covered by EHT20)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0

Remark:

1. The detailed Radiated test modes are shown in Appendix C.
2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

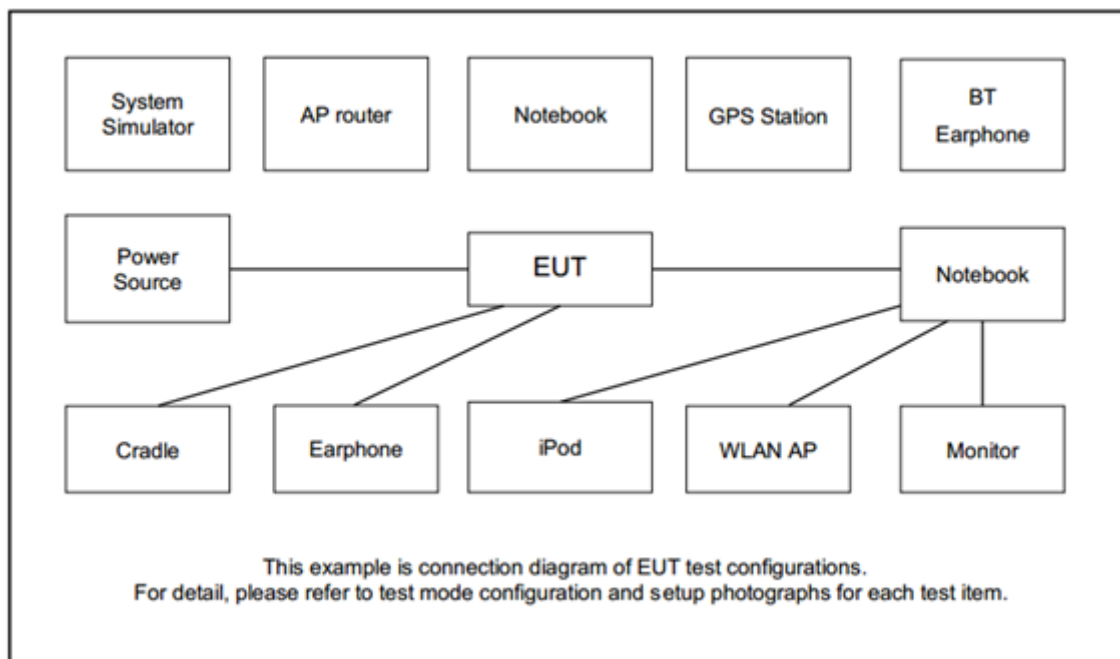

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	SAMSUNG Type-C Earphone	SAMSUNG	SOUND BY AKG	N/A	Unshielded, 1.2 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "DRTU.10339.24.40.0" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.2 PKPM1
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.
6. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.1.4 Test Setup

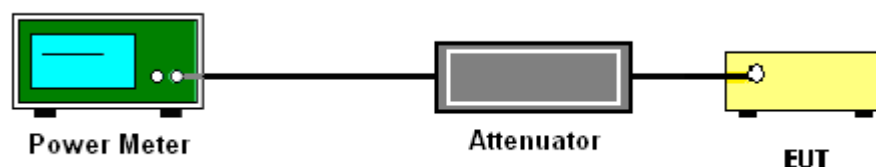

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average Output Power

Please refer to Appendix A.

3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup


For radiated emissions below 30MHz

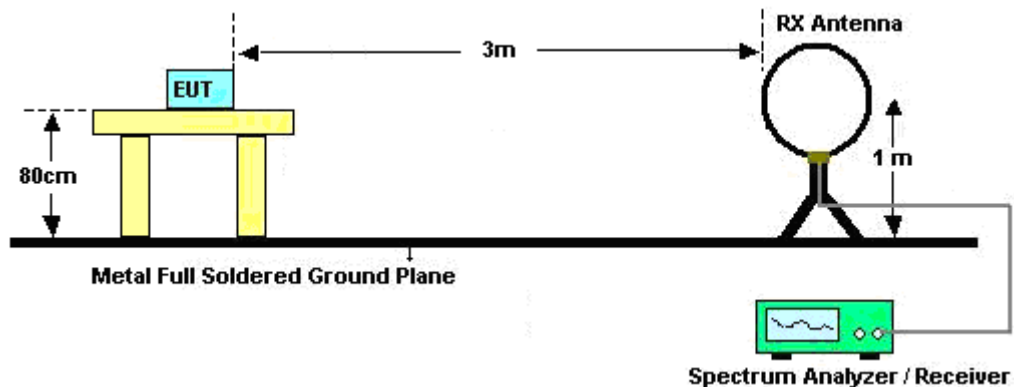


For radiated emissions from 30MHz to 1GHz

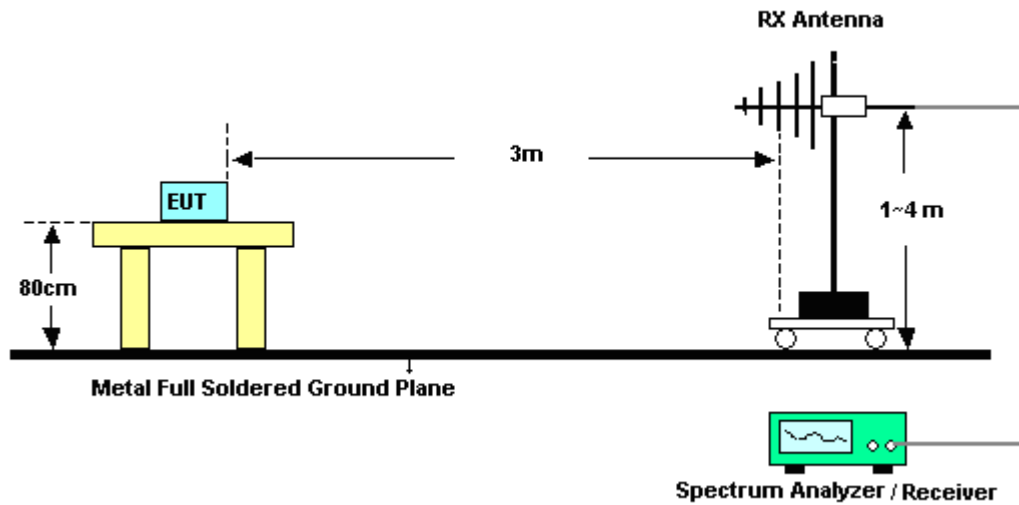

For radiated test from 1GHz to 18GHz

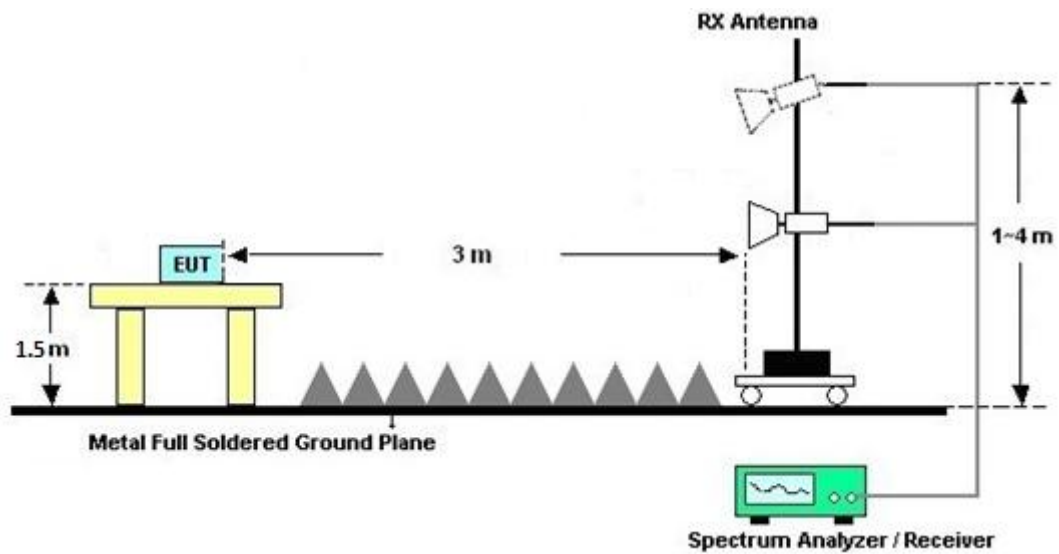

For radiated test above 18GHz

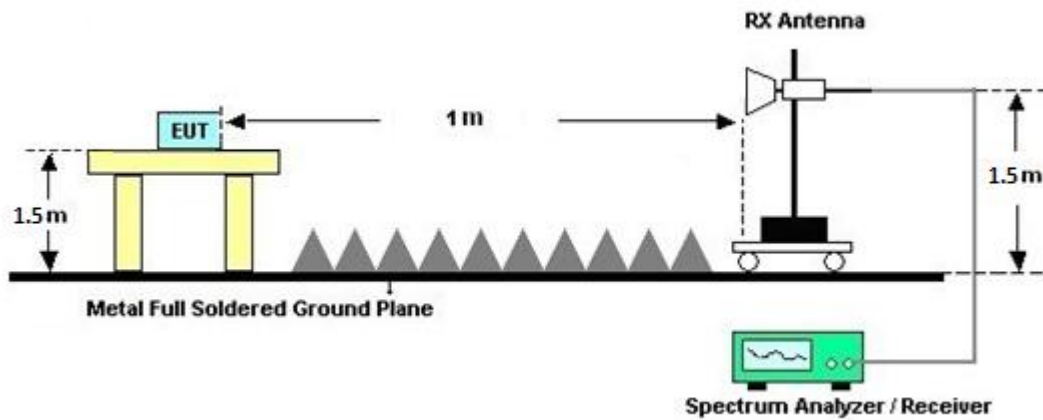

3.2.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.2.7 Duty Cycle

Please refer to Appendix C.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.3 Antenna Requirements

3.3.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.3.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna with 6dB pad	TESEQ & VGT	CBL 6111D & VFA_Z-04002-N-06	66925 & 24006	30MHz~1GHz	Apr. 12, 2026	Aug. 06, 2026~ Aug. 13, 2026	Apr. 11, 2027	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Aug. 06, 2026~ Aug. 13, 2026	Dec. 10, 2026	Radiation (03CH11-HY)
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Sep. 15, 2025	Aug. 06, 2026~ Aug. 13, 2026	Sep. 14, 2026	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1230	18GHz~40GHz	Nov. 05, 2025	Aug. 06, 2026~ Aug. 13, 2026	Nov. 04, 2026	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 06, 2025	Aug. 06, 2026~ Aug. 13, 2026	Dec. 05, 2026	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 23, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 22, 2027	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18G-56-01-A70	EC1900249	1GHz~18GHz	Jan. 20, 2026	Aug. 06, 2026~ Aug. 13, 2026	Jan. 19, 2027	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 08, 2026	Aug. 06, 2026~ Aug. 13, 2026	Jun. 07, 2027	Radiation (03CH11-HY)
Signal Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	May 28 2026	Aug. 06, 2026~ Aug. 13, 2026	May 27, 2027	Radiation (03CH11-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290045	20Hz~8.4GHz	Apr. 30, 2026	Aug. 06, 2026~ Aug. 13, 2026	Apr. 29, 2027	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Aug. 06, 2026~ Aug. 13, 2026	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Aug. 06, 2026~ Aug. 13, 2026	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Aug. 06, 2026~ Aug. 13, 2026	N/A	Radiation (03CH11-HY)
Software	Audix	E3	RK-002391	N/A	N/A	Aug. 06, 2026~ Aug. 13, 2026	N/A	Radiation (03CH11-HY)
USB Data Logger	TECPEL	TR-32	HE17XM6804	N/A	Dec. 15, 2025	Aug. 06, 2026~ Aug. 13, 2026	Dec. 14, 2026	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 26, 2025	Aug. 06, 2026~ Aug. 13, 2026	Aug. 25, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 04, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 04, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 04, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	805139 2	9K~30M	Mar. 04, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	805139 2	30M~40G	Mar. 04, 2026	Aug. 06, 2026~ Aug. 13, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 09, 2025	Aug. 06, 2026~ Aug. 13, 2026	Sep. 08, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 09, 2025	Aug. 06, 2026~ Aug. 13, 2026	Sep. 08, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 09, 2025	Aug. 06, 2026~ Aug. 13, 2026	Sep. 08, 2026	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Jun. 25, 2026~ Aug. 27, 2026	Nov. 03, 2026	Conducted (TH05-HY)
USB RF Power Sensor	DARE	RPR3006W	17I00015SNO 37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Jun. 25, 2026~ Aug. 27, 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Nov. 12, 2025	Jun. 25, 2026~ Aug. 27, 2026	Nov. 11, 2026	Conducted (TH05-HY)
Switch Control Mainframe	EM Electronics	EMSW18SE	SW191204 (BOX8)	N/A	Dec. 29, 2025	Jun. 25, 2026~ Aug. 27, 2026	Dec. 28, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final version_240513	N/A	Conducted Other Test Item	N/A	Jun. 25, 2026~ Aug. 27, 2026	N/A	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Eason Huang	Temperature:	21~25	°C
Test Date:	2026/6/25~08/27	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Chain A	Chain B	SUM	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	
11b	1Mbps	1	1	2412	17.08	18.88		30.00	30.00	1.07	2.33	18.15	21.21	36.00	36.00	Pass
11b	1Mbps	1	6	2437	18.98	18.98		30.00	30.00	1.07	2.33	20.05	21.31	36.00	36.00	Pass
11b	1Mbps	1	11	2462	18.98	18.88		30.00	30.00	1.07	2.33	20.05	21.21	36.00	36.00	Pass
11b	1Mbps	1	12	2467	18.98	18.98		30.00	30.00	1.07	2.33	20.05	21.31	36.00	36.00	Pass
11b	1Mbps	1	13	2472	16.58	17.38		30.00	30.00	1.07	2.33	17.65	19.71	36.00	36.00	Pass
11g	6Mbps	1	1	2412	18.78	18.98		30.00	30.00	1.07	2.33	19.85	21.31	36.00	36.00	Pass
11g	6Mbps	1	6	2437	18.78	18.78		30.00	30.00	1.07	2.33	19.85	21.11	36.00	36.00	Pass
11g	6Mbps	1	11	2462	18.78	18.88		30.00	30.00	1.07	2.33	19.85	21.21	36.00	36.00	Pass
11g	6Mbps	1	12	2467	14.98	14.78		30.00	30.00	1.07	2.33	16.05	17.11	36.00	36.00	Pass
11g	6Mbps	1	13	2472	13.38	13.38		30.00	30.00	1.07	2.33	14.45	15.71	36.00	36.00	Pass
HT20	MCS0	1	1	2412	18.68	18.68		30.00	30.00	1.07	2.33	19.75	21.01	36.00	36.00	Pass
HT20	MCS0	1	6	2437	18.88	18.88		30.00	30.00	1.07	2.33	19.95	21.21	36.00	36.00	Pass
HT20	MCS0	1	11	2462	18.88	18.98		30.00	30.00	1.07	2.33	19.95	21.31	36.00	36.00	Pass
HT20	MCS0	1	12	2467	14.88	14.78		30.00	30.00	1.07	2.33	15.95	17.11	36.00	36.00	Pass
HT20	MCS0	1	13	2472	13.38	13.38		30.00	30.00	1.07	2.33	14.45	15.71	36.00	36.00	Pass
HT40	MCS0	1	3	2422	18.88	18.58		30.00	30.00	1.07	2.33	19.95	20.91	36.00	36.00	Pass
HT40	MCS0	1	6	2437	18.88	18.98		30.00	30.00	1.07	2.33	19.95	21.31	36.00	36.00	Pass
HT40	MCS0	1	9	2452	18.68	18.38		30.00	30.00	1.07	2.33	19.75	20.71	36.00	36.00	Pass
HT40	MCS0	1	10	2457	14.18	14.38		30.00	30.00	1.07	2.33	15.25	16.71	36.00	36.00	Pass
HT40	MCS0	1	11	2462	13.38	15.08		30.00	30.00	1.07	2.33	14.45	17.41	36.00	36.00	Pass

2.4GHz Band MIMO																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Chain A	Chain B	SUM	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	
HT20	MCS0	2	1	2412	17.48	17.58	20.54	30.00		2.33		22.87		36.00		Pass
HT20	MCS0	2	6	2437	18.78	18.78	21.79	30.00		2.33		24.12		36.00		Pass
HT20	MCS0	2	11	2462	17.38	17.48	20.44	30.00		2.33		22.77		36.00		Pass
HT20	MCS0	2	12	2467	13.28	13.48	16.39	30.00		2.33		18.72		36.00		Pass
HT20	MCS0	2	13	2472	12.38	12.48	15.44	30.00		2.33		17.77		36.00		Pass
HT40	MCS0	2	3	2422	17.58	17.58	20.59	30.00		2.33		22.92		36.00		Pass
HT40	MCS0	2	6	2437	17.98	17.98	20.99	30.00		2.33		23.32		36.00		Pass
HT40	MCS0	2	9	2452	17.58	17.68	20.64	30.00		2.33		22.97		36.00		Pass
HT40	MCS0	2	10	2457	11.08	11.28	14.19	30.00		2.33		16.52		36.00		Pass
HT40	MCS0	2	11	2462	12.18	12.18	15.19	30.00		2.33		17.52		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Chain A	Chain B	SUM	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	
11b	1Mbps	1	1	2412	18.78	22.38		30.00	30.00	1.07	2.33	19.85	24.71	36.00	36.00	Pass
11b	1Mbps	1	6	2437	22.38	22.48		30.00	30.00	1.07	2.33	23.45	24.81	36.00	36.00	Pass
11b	1Mbps	1	11	2462	22.38	22.38		30.00	30.00	1.07	2.33	23.45	24.71	36.00	36.00	Pass
11b	1Mbps	1	12	2467	22.38	22.48		30.00	30.00	1.07	2.33	23.45	24.81	36.00	36.00	Pass
11b	1Mbps	1	13	2472	18.28	20.88		30.00	30.00	1.07	2.33	19.35	23.21	36.00	36.00	Pass
11g	6Mbps	1	1	2412	20.08	20.08		30.00	30.00	1.07	2.33	21.15	22.41	36.00	36.00	Pass
11g	6Mbps	1	6	2437	20.08	19.88		30.00	30.00	1.07	2.33	21.15	22.21	36.00	36.00	Pass
11g	6Mbps	1	11	2462	20.08	19.98		30.00	30.00	1.07	2.33	21.15	22.31	36.00	36.00	Pass
11g	6Mbps	1	12	2467	16.38	15.98		30.00	30.00	1.07	2.33	17.45	18.31	36.00	36.00	Pass
11g	6Mbps	1	13	2472	14.48	14.48		30.00	30.00	1.07	2.33	15.55	16.81	36.00	36.00	Pass
HT20	MCS0	1	1	2412	20.08	19.88		30.00	30.00	1.07	2.33	21.15	22.21	36.00	36.00	Pass
HT20	MCS0	1	6	2437	20.28	20.18		30.00	30.00	1.07	2.33	21.35	22.51	36.00	36.00	Pass
HT20	MCS0	1	11	2462	20.28	20.28		30.00	30.00	1.07	2.33	21.35	22.61	36.00	36.00	Pass
HT20	MCS0	1	12	2467	16.18	15.98		30.00	30.00	1.07	2.33	17.25	18.31	36.00	36.00	Pass
HT20	MCS0	1	13	2472	14.48	14.48		30.00	30.00	1.07	2.33	15.55	16.81	36.00	36.00	Pass
HT40	MCS0	1	3	2422	20.28	20.08		30.00	30.00	1.07	2.33	21.35	22.41	36.00	36.00	Pass
HT40	MCS0	1	6	2437	20.38	20.28		30.00	30.00	1.07	2.33	21.45	22.61	36.00	36.00	Pass
HT40	MCS0	1	9	2452	20.68	19.98		30.00	30.00	1.07	2.33	21.75	22.31	36.00	36.00	Pass
HT40	MCS0	1	10	2457	16.58	16.78		30.00	30.00	1.07	2.33	17.65	19.11	36.00	36.00	Pass
HT40	MCS0	1	11	2462	15.88	17.48		30.00	30.00	1.07	2.33	16.95	19.81	36.00	36.00	Pass

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Chain A	Chain B	SUM	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	
HT20	MCS0	2	1	2412	18.98	18.88	21.94	30.00		2.33		24.27		36.00		Pass
HT20	MCS0	2	6	2437	20.08	20.08	23.09	30.00		2.33		25.42		36.00		Pass
HT20	MCS0	2	11	2462	18.88	18.78	21.84	30.00		2.33		24.17		36.00		Pass
HT20	MCS0	2	12	2467	14.58	14.78	17.69	30.00		2.33		20.02		36.00		Pass
HT20	MCS0	2	13	2472	13.48	13.68	16.59	30.00		2.33		18.92		36.00		Pass
HT40	MCS0	2	3	2422	19.08	19.08	22.09	30.00		2.33		24.42		36.00		Pass
HT40	MCS0	2	6	2437	19.68	19.68	22.69	30.00		2.33		25.02		36.00		Pass
HT40	MCS0	2	9	2452	19.28	19.28	22.29	30.00		2.33		24.62		36.00		Pass
HT40	MCS0	2	10	2457	13.48	13.58	16.54	30.00		2.33		18.87		36.00		Pass
HT40	MCS0	2	11	2462	14.38	14.38	17.39	30.00		2.33		19.72		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	
						Chain A	Chain B	SUM	Chain A	Chain B	Chain A	Chain B
EHT20	MCS0	1	1	2412	Full	18.58	18.98		1.07	2.33	19.65	21.31
EHT20	MCS0	1	6	2437	Full	18.68	18.78		1.07	2.33	19.75	21.11
EHT20	MCS0	1	11	2462	Full	18.98	18.78		1.07	2.33	20.05	21.11
EHT20	MCS0	1	12	2467	Full	14.78	14.98		1.07	2.33	15.85	17.31
EHT20	MCS0	1	13	2472	Full	13.28	13.68		1.07	2.33	14.35	16.01
EHT40	MCS0	1	3	2422	Full	18.98	18.98		1.07	2.33	20.05	21.31
EHT40	MCS0	1	6	2437	Full	18.68	18.68		1.07	2.33	19.75	21.01
EHT40	MCS0	1	9	2452	Full	18.58	18.28		1.07	2.33	19.65	20.61
EHT40	MCS0	1	10	2457	Full	14.08	14.28		1.07	2.33	15.15	16.61
EHT40	MCS0	1	11	2462	Full	13.28	14.98		1.07	2.33	14.35	17.31

2.4GHz Band MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	
						Chain A	Chain B	SUM	Chain A	Chain B	Chain A	Chain B
EHT20	MCS0	2	1	2412	Full	17.38	17.38	20.39	2.33		22.72	
EHT20	MCS0	2	6	2437	Full	18.58	18.68	21.64	2.33		23.97	
EHT20	MCS0	2	11	2462	Full	17.58	17.68	20.64	2.33		22.97	
EHT20	MCS0	2	12	2467	Full	13.18	13.48	16.34	2.33		18.67	
EHT20	MCS0	2	13	2472	Full	12.18	12.48	15.34	2.33		17.67	
EHT40	MCS0	2	3	2422	Full	17.48	17.48	20.49	2.33		22.82	
EHT40	MCS0	2	6	2437	Full	17.98	17.98	20.99	2.33		23.32	
EHT40	MCS0	2	9	2452	Full	17.58	17.68	20.64	2.33		22.97	
EHT40	MCS0	2	10	2457	Full	11.48	11.48	14.49	2.33		16.82	
EHT40	MCS0	2	11	2462	Full	12.18	12.48	15.34	2.33		17.67	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna																	
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Chain A	Chain B	SUM	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	
EHT20	MCS0	1	1	2412	Full	19.98	20.58		30.00	30.00	1.07	2.33	21.05	22.91	36.00	36.00	Pass
EHT20	MCS0	1	6	2437	Full	19.98	20.38		30.00	30.00	1.07	2.33	21.05	22.71	36.00	36.00	Pass
EHT20	MCS0	1	11	2462	Full	20.38	20.38		30.00	30.00	1.07	2.33	21.45	22.71	36.00	36.00	Pass
EHT20	MCS0	1	12	2467	Full	16.08	16.48		30.00	30.00	1.07	2.33	17.15	18.81	36.00	36.00	Pass
EHT20	MCS0	1	13	2472	Full	14.58	15.18		30.00	30.00	1.07	2.33	15.65	17.51	36.00	36.00	Pass
EHT40	MCS0	1	3	2422	Full	20.68	20.58		30.00	30.00	1.07	2.33	21.75	22.91	36.00	36.00	Pass
EHT40	MCS0	1	6	2437	Full	20.38	20.28		30.00	30.00	1.07	2.33	21.45	22.61	36.00	36.00	Pass
EHT40	MCS0	1	9	2452	Full	20.28	19.88		30.00	30.00	1.07	2.33	21.35	22.21	36.00	36.00	Pass
EHT40	MCS0	1	10	2457	Full	16.58	17.08		30.00	30.00	1.07	2.33	17.65	19.41	36.00	36.00	Pass
EHT40	MCS0	1	11	2462	Full	15.78	17.38		30.00	30.00	1.07	2.33	16.85	19.71	36.00	36.00	Pass

2.4GHz Band MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Chain A	Chain B	SUM	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	Chain A	Chain B	
EHT20	MCS0	2	1	2412	Full	18.98	18.88	21.94	30.00		2.33		24.27		36.00		Pass
EHT20	MCS0	2	6	2437	Full	19.98	20.08	23.04	30.00		2.33		25.37		36.00		Pass
EHT20	MCS0	2	11	2462	Full	19.08	19.18	22.14	30.00		2.33		24.47		36.00		Pass
EHT20	MCS0	2	12	2467	Full	14.58	14.88	17.74	30.00		2.33		20.07		36.00		Pass
EHT20	MCS0	2	13	2472	Full	13.58	13.88	16.74	30.00		2.33		19.07		36.00		Pass
EHT40	MCS0	2	3	2422	Full	18.98	18.98	21.99	30.00		2.33		24.32		36.00		Pass
EHT40	MCS0	2	6	2437	Full	19.68	19.68	22.69	30.00		2.33		25.02		36.00		Pass
EHT40	MCS0	2	9	2452	Full	19.08	19.18	22.14	30.00		2.33		24.47		36.00		Pass
EHT40	MCS0	2	10	2457	Full	14.08	14.08	17.09	30.00		2.33		19.42		36.00		Pass
EHT40	MCS0	2	11	2462	Full	14.88	15.18	18.04	30.00		2.33		20.37		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Fu Chen and Troye Hsieh	Temperature :	19.1~21.9°C
		Relative Humidity :	50.1~66.9%

Note symbol

-L	Low channel location
-R	High channel location



B1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 11	2400-2483.5	Chain A	802.11b	11	2462	MCS0	-	-
Mode 12	2400-2483.5	Chain B	802.11b	01	2412	MCS0	-	-
Mode 13	2400-2483.5	Chain A+B	802.11be EHT20	11	2462	MCS0	Full RU	-
Mode 14	2400-2483.5	Chain A+B	802.11be EHT40	03	2422	MCS0	Full RU	-
Mode 15	2400-2483.5	Chain A	802.11b	11	2462	MCS0	-	SHF
Mode 16	2400-2483.5	Chain A	802.11b	11	2462	MCS0	-	LF

B2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
11	802.11b	11	2486.78	52.49	54.00	-1.51	V	Avg.	Pass	-	Band Edge
	802.11b	11	4924.00	44.52	74.00	-29.48	V	Peak	Pass	-	Harmonic
12	802.11b	01	2385.27	47.47	54.00	-6.53	V	Avg.	Pass	-	Band Edge
	802.11b	01	-	-	-	-	-	-	-	-	Harmonic
13	802.11be EHT20	11	2483.66	48.18	54.00	-5.82	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	11	7386.00	43.72	74.00	-30.28	V	Peak	Pass	Full RU	Harmonic
14	802.11be EHT40	03	2389.30	47.12	54.00	-6.88	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	03	-	-	-	-	-	-	-	Full RU	Harmonic
15	802.11b	11	24638.50	41.78	74.00	-32.22	V	Peak	Pass	-	SHF
16	802.11b	11	949.56	32.56	46.00	-13.44	H	Peak	Pass	-	LF



Mode	11																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																			
ANT	Chain A																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.47</td><td>57.40</td><td>74.00</td><td>-16.60</td><td>45.76</td><td>27.73</td><td>6.79</td><td>33.00</td><td>10.12</td><td>285</td><td>243</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.47	57.40	74.00	-16.60	45.76	27.73	6.79	33.00	10.12	285	243	Peak	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>107.50</td><td>-----</td><td>-----</td><td>96.11</td><td>27.54</td><td>6.75</td><td>33.02</td><td>10.12</td><td>285</td><td>243</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.50	-----	-----	96.11	27.54	6.75	33.02	10.12	285	243	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2486.47	57.40	74.00	-16.60	45.76	27.73	6.79	33.00	10.12	285	243	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	107.50	-----	-----	96.11	27.54	6.75	33.02	10.12	285	243	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.70</td><td>50.31</td><td>54.00</td><td>-3.69</td><td>38.67</td><td>27.73</td><td>6.79</td><td>33.00</td><td>10.12</td><td>285</td><td>243</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.70	50.31	54.00	-3.69	38.67	27.73	6.79	33.00	10.12	285	243	Average	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>103.88</td><td>-----</td><td>-----</td><td>92.49</td><td>27.54</td><td>6.75</td><td>33.02</td><td>10.12</td><td>285</td><td>243</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.88	-----	-----	92.49	27.54	6.75	33.02	10.12	285	243	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2486.70	50.31	54.00	-3.69	38.67	27.73	6.79	33.00	10.12	285	243	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	103.88	-----	-----	92.49	27.54	6.75	33.02	10.12	285	243	Average																																																																																								



		11																			
Mode		Band Edge																			
		2400-2483.5_802.11b_CH11_2462MHz																			
ANT		Chain A																			
Pol.		Vertical										Fundamental									
Peak		Level (dBuV/m) Date: 2026-08-07 </																			







Mode	11																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																								
ANT	Chain A																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.15</td><td>74.00</td><td>-31.85</td><td>64.59</td><td>32.80</td><td>10.88</td><td>67.08</td><td>0.96</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.92</td><td>74.00</td><td>-30.08</td><td>59.67</td><td>36.41</td><td>13.80</td><td>66.15</td><td>0.19</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	42.15	74.00	-31.85	64.59	32.80	10.88	67.08	0.96	--	Peak	2	7386.00	43.92	74.00	-30.08	59.67	36.41	13.80	66.15	0.19	--	Peak	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.52</td><td>74.00</td><td>-29.48</td><td>66.96</td><td>32.80</td><td>10.88</td><td>67.08</td><td>0.96</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.92</td><td>74.00</td><td>-30.08</td><td>59.67</td><td>36.41</td><td>13.80</td><td>66.15</td><td>0.19</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	44.52	74.00	-29.48	66.96	32.80	10.88	67.08	0.96	--	Peak	2	7386.00	43.92	74.00	-30.08	59.67	36.41	13.80	66.15	0.19	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4924.00	42.15	74.00	-31.85	64.59	32.80	10.88	67.08	0.96	--	Peak																																																																																																														
2	7386.00	43.92	74.00	-30.08	59.67	36.41	13.80	66.15	0.19	--	Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4924.00	44.52	74.00	-29.48	66.96	32.80	10.88	67.08	0.96	--	Peak																																																																																																														
2	7386.00	43.92	74.00	-30.08	59.67	36.41	13.80	66.15	0.19	--	Peak																																																																																																														



Mode	11	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	Chain A	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL
	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL

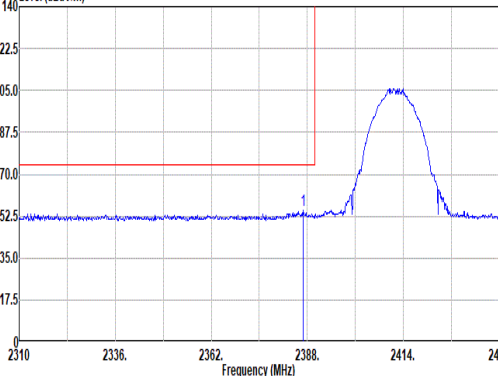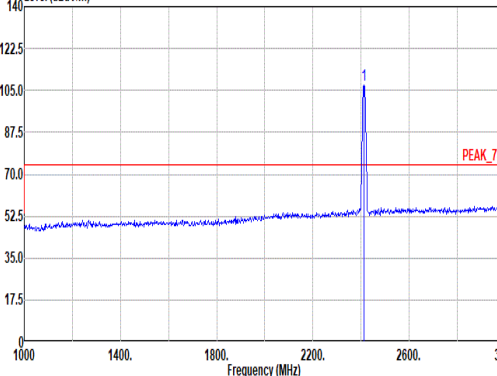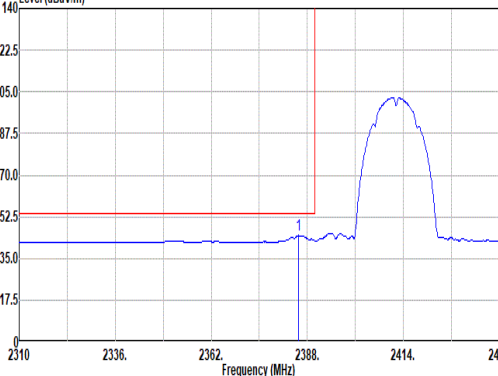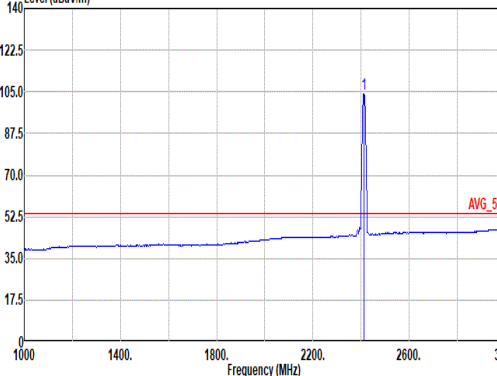

		12																																																																																															
Mode		Band Edge																																																																																															
		2400-2483.5_802.11b_CH01_2412MHz																																																																																															
ANT		Chain B																																																																																															
Pol.		Horizontal					Fundamental																																																																																										
Peak		Level (dBuV/m) Date: 2026-08-07  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.83</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>43.77</td><td>27.27</td><td>6.64</td><td>33.08</td><td>10.12</td><td>365</td><td>0 Peak</td></tr></tbody></table> Level (dBuV/m) Date: 2026-08-07  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>107.17</td><td>-----</td><td>-----</td><td>96.03</td><td>27.40</td><td>6.68</td><td>33.06</td><td>10.12</td><td>365</td><td>0 Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.83	54.72	74.00	-19.28	43.77	27.27	6.64	33.08	10.12	365	0 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.17	-----	-----	96.03	27.40	6.68	33.06	10.12	365	0 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2386.83	54.72	74.00	-19.28	43.77	27.27	6.64	33.08	10.12	365	0 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	107.17	-----	-----	96.03	27.40	6.68	33.06	10.12	365	0 Peak																																																																																						
Avg		Level (dBuV/m) Date: 2026-08-07  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2385.53</td><td>44.66</td><td>54.00</td><td>-9.34</td><td>33.72</td><td>27.26</td><td>6.64</td><td>33.08</td><td>10.12</td><td>365</td><td>0 Average</td></tr></tbody></table> Level (dBuV/m) Date: 2026-08-07  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>104.06</td><td>-----</td><td>-----</td><td>92.93</td><td>27.40</td><td>6.67</td><td>33.06</td><td>10.12</td><td>365</td><td>0 Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.53	44.66	54.00	-9.34	33.72	27.26	6.64	33.08	10.12	365	0 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.06	-----	-----	92.93	27.40	6.67	33.06	10.12	365	0 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2385.53	44.66	54.00	-9.34	33.72	27.26	6.64	33.08	10.12	365	0 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	104.06	-----	-----	92.93	27.40	6.67	33.06	10.12	365	0 Average																																																																																						







Mode	12																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																	
ANT	Chain B																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.53</td><td>55.04</td><td>74.00</td><td>-18.96</td><td>44.10</td><td>27.26</td><td>6.64</td><td>33.08</td><td>10.12</td><td>200</td><td>230 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.53	55.04	74.00	-18.96	44.10	27.26	6.64	33.08	10.12	200	230 Peak	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>112.59</td><td>-----</td><td>-----</td><td>101.45</td><td>27.40</td><td>6.68</td><td>33.06</td><td>10.12</td><td>200</td><td>230 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	112.59	-----	-----	101.45	27.40	6.68	33.06	10.12	200	230 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2385.53	55.04	74.00	-18.96	44.10	27.26	6.64	33.08	10.12	200	230 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	112.59	-----	-----	101.45	27.40	6.68	33.06	10.12	200	230 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.27</td><td>47.47</td><td>54.00</td><td>-6.53</td><td>36.54</td><td>27.25</td><td>6.64</td><td>33.08</td><td>10.12</td><td>200</td><td>230 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.27	47.47	54.00	-6.53	36.54	27.25	6.64	33.08	10.12	200	230 Average	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>108.07</td><td>-----</td><td>-----</td><td>96.93</td><td>27.40</td><td>6.68</td><td>33.06</td><td>10.12</td><td>200</td><td>230 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.07	-----	-----	96.93	27.40	6.68	33.06	10.12	200	230 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2385.27	47.47	54.00	-6.53	36.54	27.25	6.64	33.08	10.12	200	230 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	108.07	-----	-----	96.93	27.40	6.68	33.06	10.12	200	230 Average																																																																																							



Mode	13																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz																																																																																																
ANT	Chain A+B																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.23</td><td>57.28</td><td>74.00</td><td>-16.72</td><td>45.70</td><td>27.68</td><td>6.78</td><td>33.00</td><td>10.12</td><td>317</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.23	57.28	74.00	-16.72	45.70	27.68	6.78	33.00	10.12	317	0 Peak	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>107.97</td><td>-----</td><td>-----</td><td>96.62</td><td>27.50</td><td>6.75</td><td>33.02</td><td>10.12</td><td>317</td><td>0 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.97	-----	-----	96.62	27.50	6.75	33.02	10.12	317	0 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2484.23	57.28	74.00	-16.72	45.70	27.68	6.78	33.00	10.12	317	0 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	107.97	-----	-----	96.62	27.50	6.75	33.02	10.12	317	0 Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>45.82</td><td>54.00</td><td>-8.18</td><td>34.25</td><td>27.67</td><td>6.78</td><td>33.00</td><td>10.12</td><td>317</td><td>0 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	45.82	54.00	-8.18	34.25	27.67	6.78	33.00	10.12	317	0 Average	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>100.02</td><td>-----</td><td>-----</td><td>88.60</td><td>27.56</td><td>6.76</td><td>33.02</td><td>10.12</td><td>317</td><td>0 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.02	-----	-----	88.60	27.56	6.76	33.02	10.12	317	0 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.51	45.82	54.00	-8.18	34.25	27.67	6.78	33.00	10.12	317	0 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	100.02	-----	-----	88.60	27.56	6.76	33.02	10.12	317	0 Average																																																																																						

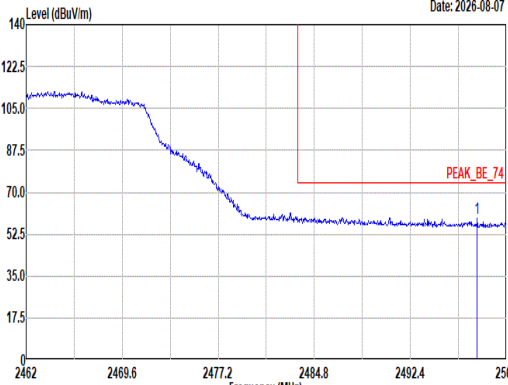
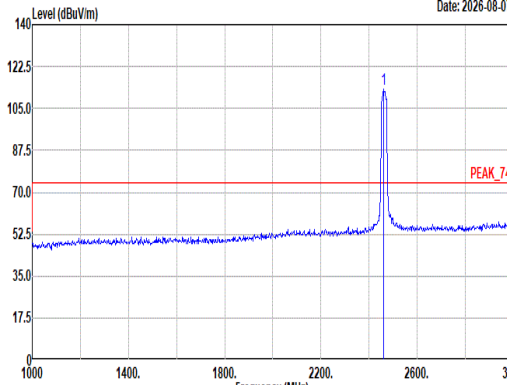
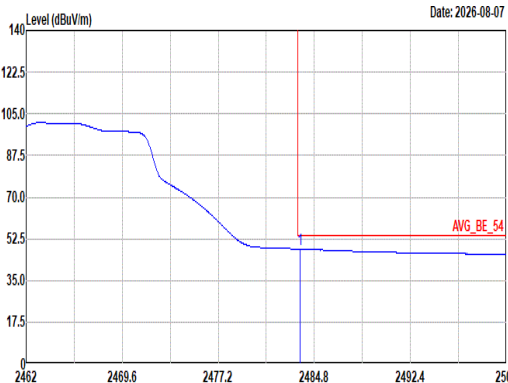
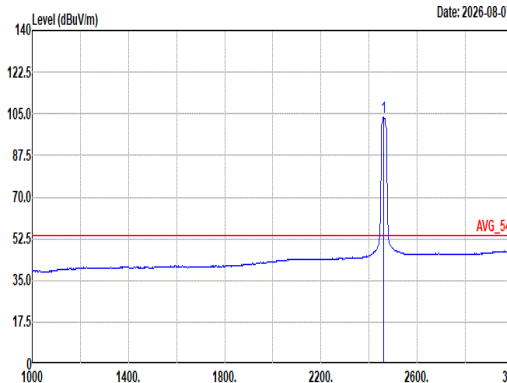


		13																																																																																																		
Mode	Band Edge																																																																																																			
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz																																																																																																			
ANT	Chain A+B																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-08-07  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.68</td><td>59.38</td><td>74.00</td><td>-14.62</td><td>47.65</td><td>27.00</td><td>6.80</td><td>32.99</td><td>10.12</td><td>200</td><td>255</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.68	59.38	74.00	-14.62	47.65	27.00	6.80	32.99	10.12	200	255	Peak	Level (dBuV/m) Date: 2026-08-07  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>112.84</td><td>-----</td><td>-----</td><td>101.49</td><td>27.50</td><td>6.75</td><td>33.02</td><td>10.12</td><td>200</td><td>255</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	112.84	-----	-----	101.49	27.50	6.75	33.02	10.12	200	255	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2497.68	59.38	74.00	-14.62	47.65	27.00	6.80	32.99	10.12	200	255	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	112.84	-----	-----	101.49	27.50	6.75	33.02	10.12	200	255	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-08-07  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>48.18</td><td>54.00</td><td>-5.82</td><td>36.61</td><td>27.67</td><td>6.78</td><td>33.00</td><td>10.12</td><td>200</td><td>255</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	48.18	54.00	-5.82	36.61	27.67	6.78	33.00	10.12	200	255	Average	Level (dBuV/m) Date: 2026-08-07  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>103.65</td><td>-----</td><td>-----</td><td>92.31</td><td>27.50</td><td>6.74</td><td>33.02</td><td>10.12</td><td>200</td><td>255</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.65	-----	-----	92.31	27.50	6.74	33.02	10.12	200	255	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.66	48.18	54.00	-5.82	36.61	27.67	6.78	33.00	10.12	200	255	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	103.65	-----	-----	92.31	27.50	6.74	33.02	10.12	200	255	Average																																																																																								



Mode	13																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz																																																																																																					
ANT	Chain A+B																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.16</td><td>74.00</td><td>-31.84</td><td>64.60</td><td>32.80</td><td>10.88</td><td>67.08</td><td>0.96 -- -- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.25</td><td>74.00</td><td>-30.75</td><td>59.00</td><td>36.41</td><td>13.80</td><td>66.15</td><td>0.19 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4924.00	42.16	74.00	-31.84	64.60	32.80	10.88	67.08	0.96 -- -- Peak	2	7386.00	43.25	74.00	-30.75	59.00	36.41	13.80	66.15	0.19 -- -- Peak	Level (dBuV/m) Date: 2026-08-08 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4924.00</td><td>43.33</td><td>74.00</td><td>-30.67</td><td>65.77</td><td>32.80</td><td>10.88</td><td>67.08</td><td>0.96 -- -- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.72</td><td>74.00</td><td>-30.28</td><td>59.47</td><td>36.41</td><td>13.80</td><td>66.15</td><td>0.19 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4924.00	43.33	74.00	-30.67	65.77	32.80	10.88	67.08	0.96 -- -- Peak	2	7386.00	43.72	74.00	-30.28	59.47	36.41	13.80	66.15	0.19 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																													
1	4924.00	42.16	74.00	-31.84	64.60	32.80	10.88	67.08	0.96 -- -- Peak																																																																																													
2	7386.00	43.25	74.00	-30.75	59.00	36.41	13.80	66.15	0.19 -- -- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																													
1	4924.00	43.33	74.00	-30.67	65.77	32.80	10.88	67.08	0.96 -- -- Peak																																																																																													
2	7386.00	43.72	74.00	-30.28	59.47	36.41	13.80	66.15	0.19 -- -- Peak																																																																																													

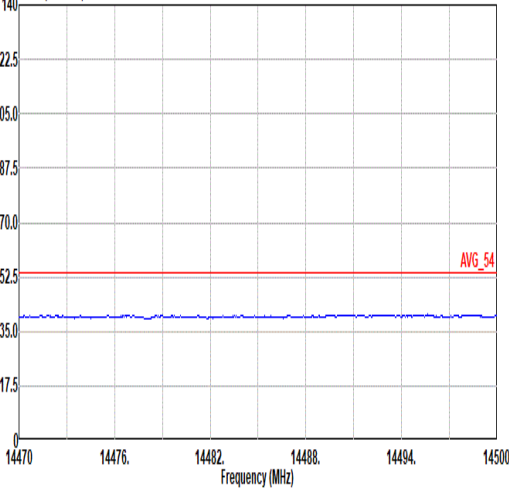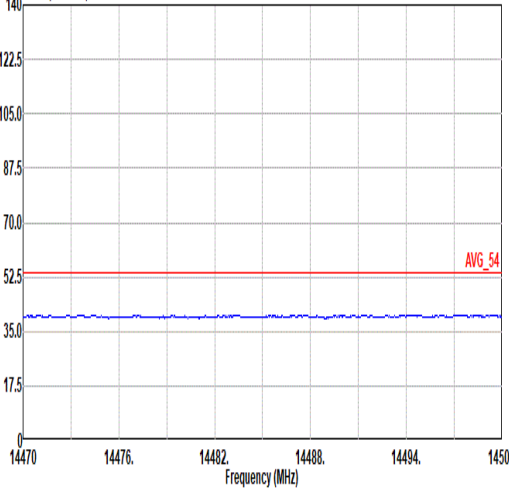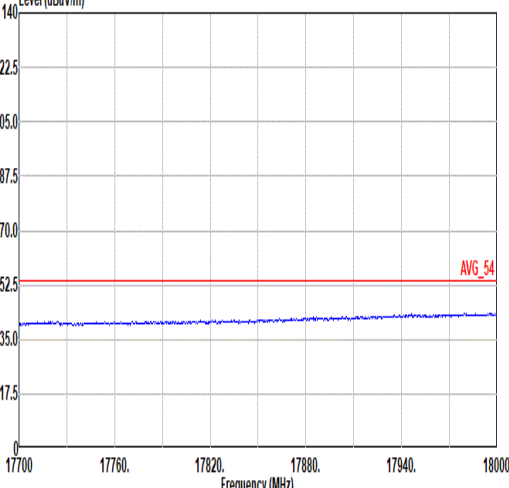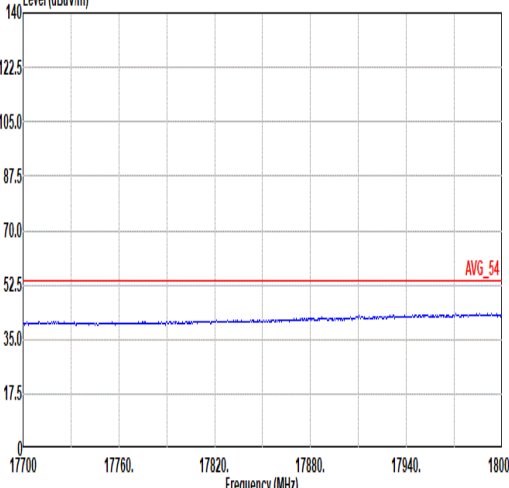

Mode	13	
	Harmonic	
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz	
ANT	Chain A+B	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-08-08  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-08-08  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL
	Level (dBuV/m) Date: 2026-08-08  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-08-08  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL



Mode	14																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz																																																																																																			
ANT	Chain A+B																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.07</td><td>54.85</td><td>74.00</td><td>-19.15</td><td>43.87</td><td>27.29</td><td>6.64</td><td>33.07</td><td>10.12</td><td>353</td><td>360</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2389.07	54.85	74.00	-19.15	43.87	27.29	6.64	33.07	10.12	353	360	Peak	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>105.56</td><td>-----</td><td>-----</td><td>94.42</td><td>27.40</td><td>6.68</td><td>33.06</td><td>10.12</td><td>353</td><td>360</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2422.00	105.56	-----	-----	94.42	27.40	6.68	33.06	10.12	353	360	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																										
1	2389.07	54.85	74.00	-19.15	43.87	27.29	6.64	33.07	10.12	353	360	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																										
1	2422.00	105.56	-----	-----	94.42	27.40	6.68	33.06	10.12	353	360	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>44.39</td><td>54.00</td><td>-9.61</td><td>33.40</td><td>27.29</td><td>6.65</td><td>33.07</td><td>10.12</td><td>353</td><td>360</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2389.30	44.39	54.00	-9.61	33.40	27.29	6.65	33.07	10.12	353	360	Average	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>95.40</td><td>-----</td><td>-----</td><td>84.17</td><td>27.46</td><td>6.70</td><td>33.05</td><td>10.12</td><td>353</td><td>360</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2422.00	95.40	-----	-----	84.17	27.46	6.70	33.05	10.12	353	360	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																										
1	2389.30	44.39	54.00	-9.61	33.40	27.29	6.65	33.07	10.12	353	360	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																										
1	2422.00	95.40	-----	-----	84.17	27.46	6.70	33.05	10.12	353	360	Average																																																																																								



Mode	14																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz																																																					
ANT	Chain A+B																																																					
Pol.	Horizontal							Fundamental																																														
Peak	Level (dBuV/m) Date: 2026-08-07 PEAK_BE_74 1 Frequency (MHz) Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.44</td><td>55.32</td><td>74.00</td><td>-18.68</td><td>43.59</td><td>27.00</td><td>6.80</td><td>32.99</td><td>10.12</td><td>353</td><td>360 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2498.44	55.32	74.00	-18.68	43.59	27.00	6.80	32.99	10.12	353	360 Peak	Blank			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	2498.44	55.32	74.00	-18.68	43.59	27.00	6.80	32.99	10.12	353	360 Peak																																											
Avg	Level (dBuV/m) Date: 2026-08-07 AVG_BE_54 1 Frequency (MHz) Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.24</td><td>43.76</td><td>54.00</td><td>-10.24</td><td>32.07</td><td>27.78</td><td>6.79</td><td>33.00</td><td>10.12</td><td>353</td><td>360 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2489.24	43.76	54.00	-10.24	32.07	27.78	6.79	33.00	10.12	353	360 Average	Blank			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	2489.24	43.76	54.00	-10.24	32.07	27.78	6.79	33.00	10.12	353	360 Average																																											



		14																																																																																																		
Mode		Band Edge - L																																																																																																		
		2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz																																																																																																		
ANT		Chain A+B																																																																																																		
Pol.	Vertical										Fundamental																																																																																									
Peak	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2388.29</td><td>58.86</td><td>74.00</td><td>-15.14</td><td>47.89</td><td>27.28</td><td>6.64</td><td>33.07</td><td>10.12</td><td>100 109 Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2388.29	58.86	74.00	-15.14	47.89	27.28	6.64	33.07	10.12	100 109 Peak	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>107.87</td><td>-----</td><td>-----</td><td>96.71</td><td>27.40</td><td>6.69</td><td>33.05</td><td>10.12</td><td>100 109 Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2422.00	107.87	-----	-----	96.71	27.40	6.69	33.05	10.12	100 109 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																											
1 2388.29	58.86	74.00	-15.14	47.89	27.28	6.64	33.07	10.12	100 109 Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																											
1 2422.00	107.87	-----	-----	96.71	27.40	6.69	33.05	10.12	100 109 Peak																																																																																											
Avg	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2389.30</td><td>47.12</td><td>54.00</td><td>-6.88</td><td>36.13</td><td>27.29</td><td>6.65</td><td>33.07</td><td>10.12</td><td>100 109 Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2389.30	47.12	54.00	-6.88	36.13	27.29	6.65	33.07	10.12	100 109 Average	Level (dBuV/m) Date: 2026-08-07 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>99.48</td><td>-----</td><td>-----</td><td>88.19</td><td>27.50</td><td>6.71</td><td>33.04</td><td>10.12</td><td>100 109 Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2422.00	99.48	-----	-----	88.19	27.50	6.71	33.04	10.12	100 109 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																											
1 2389.30	47.12	54.00	-6.88	36.13	27.29	6.65	33.07	10.12	100 109 Average																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																											
1 2422.00	99.48	-----	-----	88.19	27.50	6.71	33.04	10.12	100 109 Average																																																																																											





Mode	14										
	Band Edge - R										
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz										
ANT	Chain A+B										
Pol.	Vertical						Fundamental				
Peak											



Mode	15										
	SHF										
	2400-2483.5_802.11b_CH11_2462MHz										
ANT	Chain A										
Pol.	Horizontal						Vertical				
Peak	<										

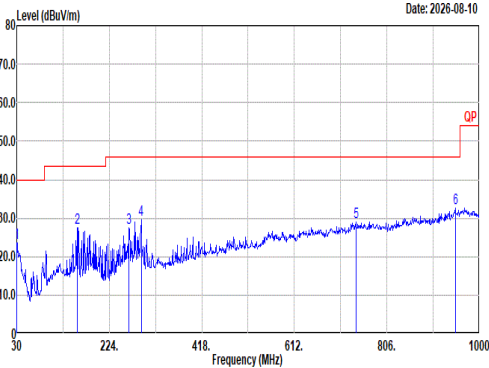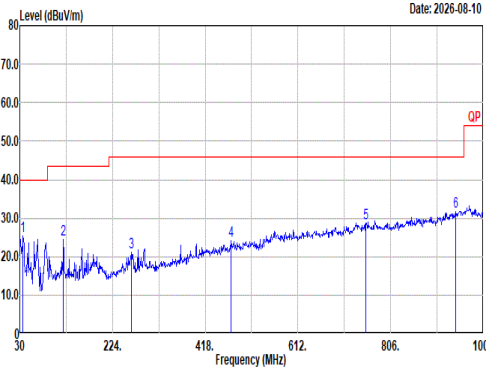


Mode	16																																																																																																																										
	LF																																																																																																																										
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																										
ANT	Chain A																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																				
QPI Peak																																																																																																																											
	Site : 03CH11-HY Condition: QP 3m Bilog_66925 & 24006_260412 HORIZONTAL																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>Aux2</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.00</td><td>23.44</td><td>40.00</td><td>-16.56</td><td>30.67</td><td>23.82</td><td>0.72</td><td>31.86</td><td>0.09</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>157.07</td><td>27.53</td><td>43.50</td><td>-15.97</td><td>41.40</td><td>16.51</td><td>1.66</td><td>32.08</td><td>0.04</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>265.71</td><td>27.35</td><td>46.00</td><td>-18.65</td><td>37.14</td><td>19.90</td><td>2.17</td><td>31.93</td><td>0.07</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>290.93</td><td>29.60</td><td>46.00</td><td>-16.40</td><td>40.19</td><td>19.00</td><td>2.27</td><td>31.94</td><td>0.08</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>741.01</td><td>28.92</td><td>46.00</td><td>-17.08</td><td>28.65</td><td>27.87</td><td>3.71</td><td>31.89</td><td>0.58</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>949.56</td><td>32.56</td><td>46.00</td><td>-13.44</td><td>27.93</td><td>30.80</td><td>4.14</td><td>30.71</td><td>0.40</td><td>0.00</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	Aux2	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.00	23.44	40.00	-16.56	30.67	23.82	0.72	31.86	0.09	0.00	--	Peak	2	157.07	27.53	43.50	-15.97	41.40	16.51	1.66	32.08	0.04	0.00	--	Peak	3	265.71	27.35	46.00	-18.65	37.14	19.90	2.17	31.93	0.07	0.00	--	Peak	4	290.93	29.60	46.00	-16.40	40.19	19.00	2.27	31.94	0.08	0.00	--	Peak	5	741.01	28.92	46.00	-17.08	28.65	27.87	3.71	31.89	0.58	0.00	--	Peak	6	949.56	32.56	46.00	-13.44	27.93	30.80	4.14	30.71	0.40	0.00	--
	Limit	Read	Ant	Cable	Preamp	Aux	Aux2	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	30.00	23.44	40.00	-16.56	30.67	23.82	0.72	31.86	0.09	0.00	--	Peak																																																																																																															
2	157.07	27.53	43.50	-15.97	41.40	16.51	1.66	32.08	0.04	0.00	--	Peak																																																																																																															
3	265.71	27.35	46.00	-18.65	37.14	19.90	2.17	31.93	0.07	0.00	--	Peak																																																																																																															
4	290.93	29.60	46.00	-16.40	40.19	19.00	2.27	31.94	0.08	0.00	--	Peak																																																																																																															
5	741.01	28.92	46.00	-17.08	28.65	27.87	3.71	31.89	0.58	0.00	--	Peak																																																																																																															
6	949.56	32.56	46.00	-13.44	27.93	30.80	4.14	30.71	0.40	0.00	--	Peak																																																																																																															
Site : 03CH11-HY Condition: QP 3m Bilog_66925 & 24006_260412 VERTICAL																																																																																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>Aux2</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>36.79</td><td>25.47</td><td>40.00</td><td>-14.53</td><td>35.65</td><td>20.99</td><td>0.80</td><td>32.00</td><td>0.03</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>121.18</td><td>24.36</td><td>43.50</td><td>-19.14</td><td>37.46</td><td>17.49</td><td>1.45</td><td>32.09</td><td>0.05</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>263.77</td><td>21.13</td><td>46.00</td><td>-24.87</td><td>30.54</td><td>20.28</td><td>2.17</td><td>31.93</td><td>0.07</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>472.32</td><td>24.05</td><td>46.00</td><td>-21.95</td><td>29.64</td><td>23.39</td><td>2.94</td><td>32.00</td><td>0.08</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>753.62</td><td>28.81</td><td>46.00</td><td>-17.19</td><td>28.33</td><td>28.05</td><td>3.75</td><td>31.87</td><td>0.55</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>942.77</td><td>31.82</td><td>46.00</td><td>-14.18</td><td>27.70</td><td>30.36</td><td>4.13</td><td>30.78</td><td>0.41</td><td>0.00</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	Aux2	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	36.79	25.47	40.00	-14.53	35.65	20.99	0.80	32.00	0.03	0.00	--	Peak	2	121.18	24.36	43.50	-19.14	37.46	17.49	1.45	32.09	0.05	0.00	--	Peak	3	263.77	21.13	46.00	-24.87	30.54	20.28	2.17	31.93	0.07	0.00	--	Peak	4	472.32	24.05	46.00	-21.95	29.64	23.39	2.94	32.00	0.08	0.00	--	Peak	5	753.62	28.81	46.00	-17.19	28.33	28.05	3.75	31.87	0.55	0.00	--	Peak	6	942.77	31.82	46.00	-14.18	27.70	30.36	4.13	30.78	0.41	0.00	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	Aux2	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	36.79	25.47	40.00	-14.53	35.65	20.99	0.80	32.00	0.03	0.00	--	Peak																																																																																																															
2	121.18	24.36	43.50	-19.14	37.46	17.49	1.45	32.09	0.05	0.00	--	Peak																																																																																																															
3	263.77	21.13	46.00	-24.87	30.54	20.28	2.17	31.93	0.07	0.00	--	Peak																																																																																																															
4	472.32	24.05	46.00	-21.95	29.64	23.39	2.94	32.00	0.08	0.00	--	Peak																																																																																																															
5	753.62	28.81	46.00	-17.19	28.33	28.05	3.75	31.87	0.55	0.00	--	Peak																																																																																																															
6	942.77	31.82	46.00	-14.18	27.70	30.36	4.13	30.78	0.41	0.00	--	Peak																																																																																																															


Appendix C. Duty Cycle Plots

Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Chain A	802.11b	99.40	-	-	10Hz
Chain B	802.11b	99.40	-	-	10Hz
Chain A+B	2.4GHz 802.11be EHT20 Full RU	98.76	-	-	10Hz
Chain A+B	2.4GHz 802.11be EHT40 Full RU	98.69	-	-	10Hz

<Chain A>

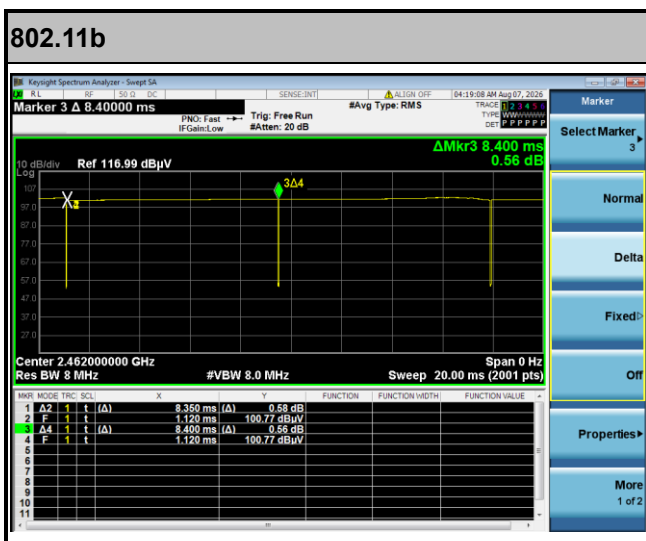


<Chain B>

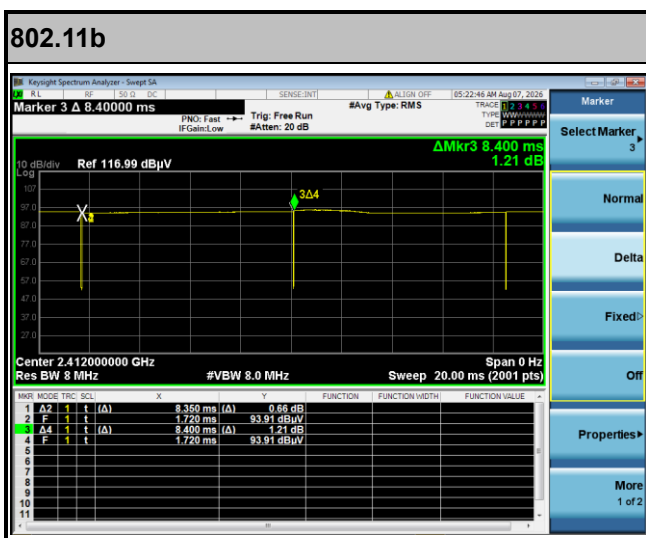



<Chain A+B>

802.11be EHT20 Full RU

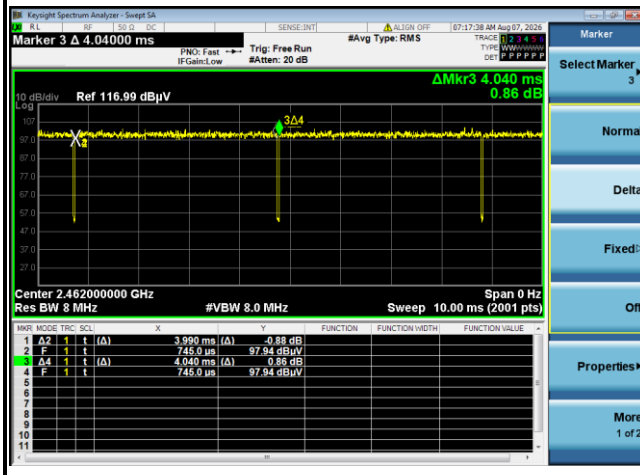

802.11be EHT40 Full RU

