

FCC SAR TEST REPORT

FCC ID : ACJ9TGWW24A
Equipment : Radio Module
Brand Name : Panasonic
Model Name : WW24A
Applicant : Panasonic Corporation of North America
Two Riverfront Plaza, Newark, New Jersey,
07102-5490, USA
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Laptop (Brand Name: Panasonic, Model Name: FZ-40(mk3)) during test.

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.


Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Equipment Under Test (EUT) Information.....	4
1.1 General Information	4
2. Guidance Applied.....	5
3. Maximum Tune-up Limit (Unit: dBm).....	5
4. Antenna Location.....	6
5. Simultaneous Transmission Analysis.....	9
5.1 Body Exposure Conditions	10
5.2 SPLSR Evaluation and Analysis	11
6. Uncertainty Assessment	12
7. References.....	12

History of this test report

Report No.	Version	Description	Issued Date
FA4D1252-01	01	Initial issue of report	Dec. 09, 2025



1. Equipment Under Test (EUT) Information

1.1 General Information

Product Feature & Specification	
Equipment Name	Radio Module
Brand Name	Panasonic
Model Name	WW24A
FCC ID	ACJ9TGWW24A
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n13: 777 MHz ~ 787 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n70 : 1695 MHz ~ 1710 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz, 3450 MHz ~ 3550 MHz
Mode	RMC 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) LTE: QPSK, 16QAM, 64QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM

Host Information	
Equipment Name	Laptop
Brand Name	Panasonic
Model Name	FZ-40(mk3)
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6GHz Band: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz RFID: 13.56 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax/be HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE RFID: ASK
EUT Stage	Identical Prototype
Remark: 1. The WLAN/Bluetooth module is also integrated into this host. The WLAN/Bluetooth power and SAR testing data can be found in the Sporton SAR Test Report, Report No.: FA4D1251-01 (FCC ID: ACJ9TGWL24A), and these results are used for simultaneous transmission analysis. 2. The RFID module is integrated into this host, the RFID test report is referenced from Sporton FCC SAR report, report no.: FA4D1251-01 (FCC ID: ACJ9TGWL24A); the SAR result is used to do simultaneous transmission analysis.	

2. Guidance Applied


The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02

3. Maximum Tune-up Limit (Unit: dBm)

Mode		Maximum Average power(dBm)
WCDMA	Band II	24.5
	Band IV	24.5
	Band V	24.5
LTE	Band 2	24.5
	Band 4	24.5
	Band 5	24.5
	Band 7	24.0
	Band 12	24.0
	Band 13	24.5
	Band 14	24.0
	Band 17	24.0
	Band 25	24.0
	Band 26	24.0
	Band 41	24.0
	Band 41_HPUE	26.0
	Band 48	19.0
	Band 66	24.5
	Band 71	24.0
5G NR	n2	25.5
	n5	25.5
	n7	25.5
	n12	25.5
	n13	25.5
	n14	25.5
	n25	25.5
	n26	25.5
	n41	22.0
	n48	19.5
	n66	25.5
	n70	25.5
	n71	25.5
	n77	25.5
	n77_HPUE	27.5

4. Antenna Location

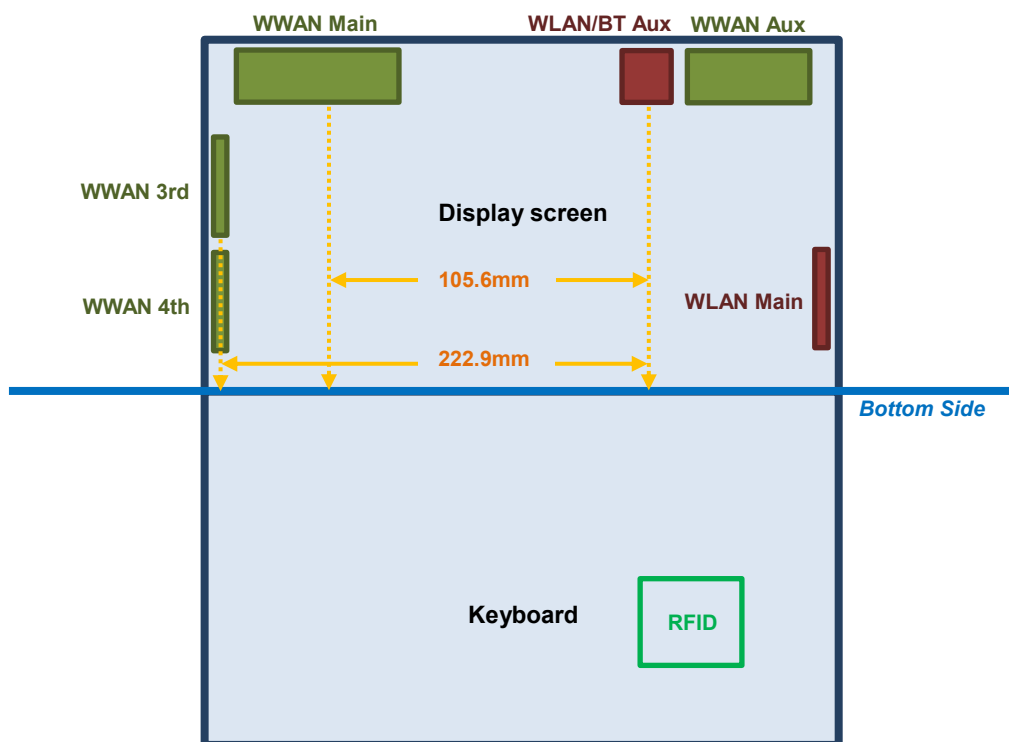

The separation distance for antenna to edge :

Antenna	To Bottom Side (mm)
WWAN Main Antenna	276.8
WWAN Aux Antenna	276.8
WWAN 3rd Antenna	176.4
WWAN 4th Antenna	96.4
WLAN Main Antenna	96.4
WLAN/BT Aux Antenna	276.8



<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·(f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·10] mW at > 1500 MHz and ≤ 6 GHz

<Main>

Exposure Position	Wireless Interface	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE/FR1 Band 71/n71	LTE/FR1 Band 12/17/n12	LTE/FR1 Band 13/n13	LTE/FR1 Band 14/n14	LTE/FR1 Band 5/n5	LTE/FR1 Band 26/n26	FR1 Band n70	LTE Band 66/4	LTE/FR1 Band 2/n2	LTE/FR1 Band 25/n25	LTE/FR1 Band 7/n7	LTE/FR1 Band 41/38/n41	LTE Band 42	FR1 Band n48	LTE Band 43	FR1 Band n77/78
	Calculated Frequency (MHz)	846	1750	1907	695	715	784	795	848	848	1708	1779	1909	1914	2567	2687	3597	3697	3797	3975
	Maximum power (dBm)	24.5	24.5	24.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	22.0	24.0	19.5	24.0	27.5
	Maximum rated power(mW)	281.84	281.84	281.84	354.81	354.81	354.81	354.81	354.81	354.81	354.81	354.81	354.81	354.81	354.81	158.49	251.19	89.13	251.19	562.34
	Separation distance(mm)	276.8																		
Bottom Side	exclusion threshold	1442.0	2381.0	2377.0	1231.0	1258.0	1355.0	1370.0	1445.0	1445.0	2383.0	2380.0	2377.0	2376.0	2362.0	2360.0	2347.0	2346.0	2345.0	2343.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

<Aux>

Exposure Position	Wireless Interface	FR1 Band n41	FR1 Band n48	FR1 Band n77/n78
	Calculated Frequency (MHz)	2687	3697	3975
	Maximum power (dBm)	22.0	19.5	27.5
	Maximum rated power(mW)	158.49	89.13	562.34
Bottom Side	Separation distance(mm)	276.8		
	exclusion threshold	2360.0	2346.0	2343.0
	Testing required?	No	No	No

<3rd>

Exposure Position	Wireless Interface	FR1 Band n41	LTE/FR1 Band 48/n48	FR1 Band n77/78
	Calculated Frequency (MHz)	2687	3697	3975
	Maximum power (dBm)	22.0	19.5	27.5
	Maximum rated power(mW)	158.49	89.13	562.34
Bottom Side	Separation distance(mm)	176.4		
	exclusion threshold	1356.0	1342.0	1339.0
	Testing required?	No	No	No

<4th>

Exposure Position	Wireless Interface	FR1 Band n41	LTE/FR1 Band 48/n48	FR1 Band n77/n78
	Calculated Frequency (MHz)	2687	3697	3975
	Maximum power (dBm)	22.0	19.5	27.5
	Maximum rated power(mW)	150.74	89.13	528.17
Bottom Side	Separation distance(mm)	96.4		
	exclusion threshold	556.0	542.0	539.2
	Testing required?	No	No	No

5. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
WWAN Main + WWAN Aux + WLAN + RFID		
1.	WWAN Main + WWAN Aux + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI21A	Yes
2.	WWAN Main + WWAN Aux + 2.4GHz WLAN Main + BT Aux + RFID RI21A	Yes
3.	WWAN Main + WWAN Aux + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI21A	Yes
4.	WWAN Main + WWAN Aux + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI23A	Yes
5.	WWAN Main + WWAN Aux + 2.4GHz WLAN Main + BT Aux + RFID RI23A	Yes
6.	WWAN Main + WWAN Aux + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI23A	Yes
WWAN Main + WWAN 3rd + WLAN + RFID		
7.	WWAN Main + WWAN 3rd + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI21A	Yes
8.	WWAN Main + WWAN 3rd + 2.4GHz WLAN Main + BT Aux + RFID RI21A	Yes
9.	WWAN Main + WWAN 3rd + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI21A	Yes
10.	WWAN Main + WWAN 3rd + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI23A	Yes
11.	WWAN Main + WWAN 3rd + 2.4GHz WLAN Main + BT Aux + RFID RI23A	Yes
12.	WWAN Main + WWAN 3rd + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI23A	Yes
WWAN Main + WWAN 4th + WLAN + RFID		
13.	WWAN Main + WWAN 4th + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI21A	Yes
14.	WWAN Main + WWAN 4th + 2.4GHz WLAN Main + BT Aux + RFID RI21A	Yes
15.	WWAN Main + WWAN 4th + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI21A	Yes
16.	WWAN Main + WWAN 4th + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI23A	Yes
17.	WWAN Main + WWAN 4th + 2.4GHz WLAN Main + BT Aux + RFID RI23A	Yes
18.	WWAN Main + WWAN 4th + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI23A	Yes
WWAN Aux + WWAN 3rd + WLAN + RFID		
19.	WWAN Aux + WWAN 3rd + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI21A	Yes
20.	WWAN Aux + WWAN 3rd + 2.4GHz WLAN Main + BT Aux + RFID RI21A	Yes
21.	WWAN Aux + WWAN 3rd + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI21A	Yes
22.	WWAN Aux + WWAN 3rd + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI23A	Yes
23.	WWAN Aux + WWAN 3rd + 2.4GHz WLAN Main + BT Aux + RFID RI23A	Yes
24.	WWAN Aux + WWAN 3rd + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI23A	Yes
WWAN Aux + WWAN 4th + WLAN + RFID		
25.	WWAN Aux + WWAN 4th + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI21A	Yes
26.	WWAN Aux + WWAN 4th + 2.4GHz WLAN Main + BT Aux + RFID RI21A	Yes
27.	WWAN Aux + WWAN 4th + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI21A	Yes
28.	WWAN Aux + WWAN 4th + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI23A	Yes
29.	WWAN Aux + WWAN 4th + 2.4GHz WLAN Main + BT Aux + RFID RI23A	Yes
30.	WWAN Aux + WWAN 4th + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI23A	Yes
WWAN 3rd + WWAN 4th + WLAN + RFID		
31.	WWAN 3rd + WWAN 4th + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI21A	Yes
32.	WWAN 3rd + WWAN 4th + 2.4GHz WLAN Main + BT Aux + RFID RI21A	Yes
33.	WWAN 3rd + WWAN 4th + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI21A	Yes
34.	WWAN 3rd + WWAN 4th + 2.4GHz WLAN Main + 2.4GHz WLAN Aux + RFID RI23A	Yes
35.	WWAN 3rd + WWAN 4th + 2.4GHz WLAN Main + BT Aux + RFID RI23A	Yes
36.	WWAN 3rd + WWAN 4th + 5/6GHz WLAN Main + 5/6GHz WLAN Aux + BT Aux + RFID RI23A	Yes

General Note:

1. Per KDB 447498 D01v06 SAR test exclusion in section5, the standalone SAR testing is not required for this device, the estimated 1g SAR 0.4 W/kg is used for simultaneous transmission analysis when the separation distance is > 50mm.
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 5.2.

5.1 Body Exposure Conditions

WWAN Ant	WWAN Ant	Exposure Position	1	2	3	4	5	6	7	8	9	1+2+3+4+8 Summed 1g SAR (W/kg)	1+2+3+7+8 Summed 1g SAR (W/kg)	1+2+5+6+7+8 Summed 1g SAR (W/kg)	1+2+3+4+9 Summed 1g SAR (W/kg)	1+2+3+7+9 Summed 1g SAR (W/kg)	1+2+5+6+7+9 Summed 1g SAR (W/kg)	SPLSR	Case No
			Maximum WWAN 1g SAR (W/kg)	Maximum WWAN 1g SAR (W/kg)	2.4GHz WLAN Main 1g SAR (W/kg)	2.4GHz WLAN Aux 1g SAR (W/kg)	5/6GHz WLAN Main 1g SAR (W/kg)	5/6GHz WLAN Aux 1g SAR (W/kg)	BT Aux 1g SAR (W/kg)	RFID R121A 1g SAR (W/kg)	RFID R123A 1g SAR (W/kg)								
Ant Main	Ant Aux	Bottom Side at 0mm	0.4	0.4	0.038	0.4	0.268	0.4	0.4	0.001	0.001	1.239	1.239	1.869	1.239	1.239	1.869	0.02	Case 16
Ant Main	Ant 3rd	Bottom Side at 0mm	0.4	0.4	0.038	0.4	0.268	0.4	0.4	0.001	0.001	1.239	1.239	1.869	1.239	1.239	1.869	0.02	Case 17
Ant Main	Ant 4th	Bottom Side at 0mm	0.4	0.4	0.038	0.4	0.268	0.4	0.4	0.001	0.001	1.239	1.239	1.869	1.239	1.239	1.869	0.01	Case 18
Ant Aux	Ant 3rd	Bottom Side at 0mm	0.4	0.4	0.038	0.4	0.268	0.4	0.4	0.001	0.001	1.239	1.239	1.869	1.239	1.239	1.869	0.01	Case 19
Ant Aux	Ant 4th	Bottom Side at 0mm	0.4	0.4	0.038	0.4	0.268	0.4	0.4	0.001	0.001	1.239	1.239	1.869	1.239	1.239	1.869	0.01	Case 20
Ant 3rd	Ant 4th	Bottom Side at 0mm	0.4	0.4	0.038	0.4	0.268	0.4	0.4	0.001	0.001	1.239	1.239	1.869	1.239	1.239	1.869	0.01	Case 21

5.2 SPLSR Evaluation and Analysis

General Note:

1. According to antenna location the minimum distance between each transmit antenna is using for SPLSR analysis.
2. Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Therefore, the adjacent transmit antennas will be summed first, and then the SPLSR calculation will be evaluated with the farther transmitted antennas.
3. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary

Case	Band	Position	SAR (W/kg)	Gap (mm)	min distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 16	WWAN Main	Bottom Side	0.4	0	105.6	1.87	0.02	Not required
	WWAN Aux+5/6GHz WLAN Main+5/6GHz WLAN Aux+BT Aux+RFID RI21A / RI23A		1.47	0				
Case 17	WWAN Main+WWAN 3rd	Bottom Side	0.8	0	105.6	1.87	0.02	Not required
	5/6GHz WLAN Main+5/6GHz WLAN Aux+BT Aux+ RFID RI21A / RI23A		1.07	0				
Case 18	WWAN Main+WWAN 4th	Bottom Side	0.8	0	105.6	1.87	0.02	Not required
	5/6GHz WLAN Main+5/6GHz WLAN Aux+BT Aux+ RFID RI21A / RI23A		1.07	0				
Case 19	WWAN 3rd	Bottom Side	0.4	0	235.4	1.87	0.01	Not required
	WWAN Aux+5/6GHz WLAN Main+5/6GHz WLAN Aux+BT Aux+ RFID RI21A / RI23A		1.47	0				
Case 20	WWAN 4th	Bottom Side	0.4	0	235.4	1.87	0.01	Not required
	WWAN Aux+5/6GHz WLAN Main+5/6GHz WLAN Aux+BT Aux+ RFID RI21A / RI23A		1.47	0				
Case 21	WWAN 3rd+WWAN 4th	Bottom Side	0.8	0	235.4	1.87	0.01	Not required
	5/6GHz WLAN Main+5/6GHz WLAN Aux+BT Aux+ RFID RI21A / RI23A		1.07	0				

6. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

7. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [6] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.