

#01_WCDMA II_RMC 12.2Kbps_Back_0mm_Ch9538

Communication System: UMTS-FDD; Frequency: 1907.600 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 1907.600$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.08, 7.83, 7.89); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.327 W/kg; SAR (10g) = 0.190 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.336 W/kg; SAR (8g) = 0.211 W/kg; SAR (10g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 84.8 %

TSL Correction: Positive only

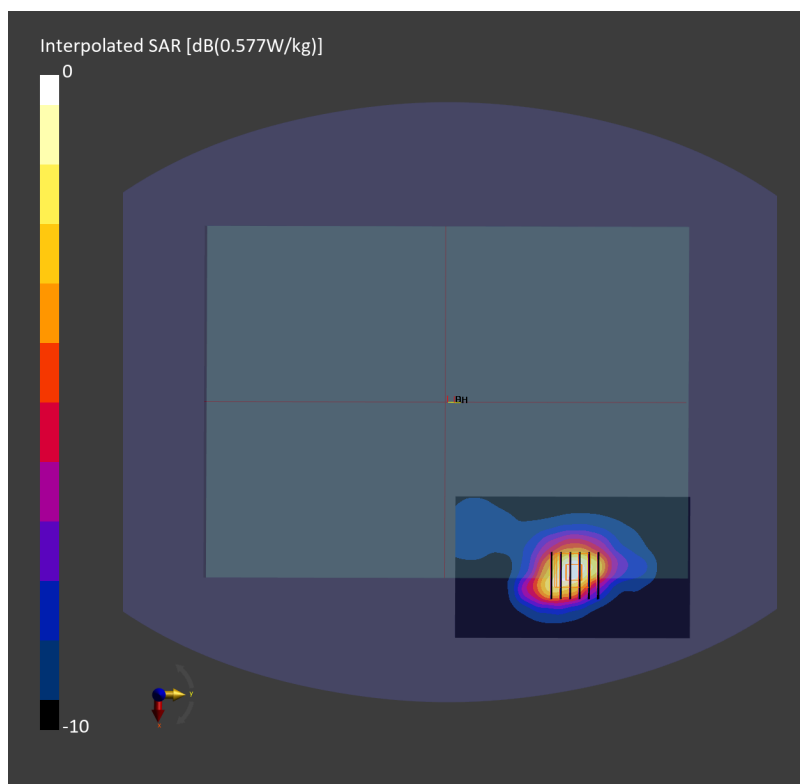

#02_WCDMA IV_RMC 12.2Kbps_Right_0mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.26, 8.0, 8.07); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.373 W/kg; SAR (10g) = 0.209 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 36.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.417 W/kg; SAR (8g) = 0.234 W/kg; SAR (10g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 71.2 %

TSL Correction: Positive only

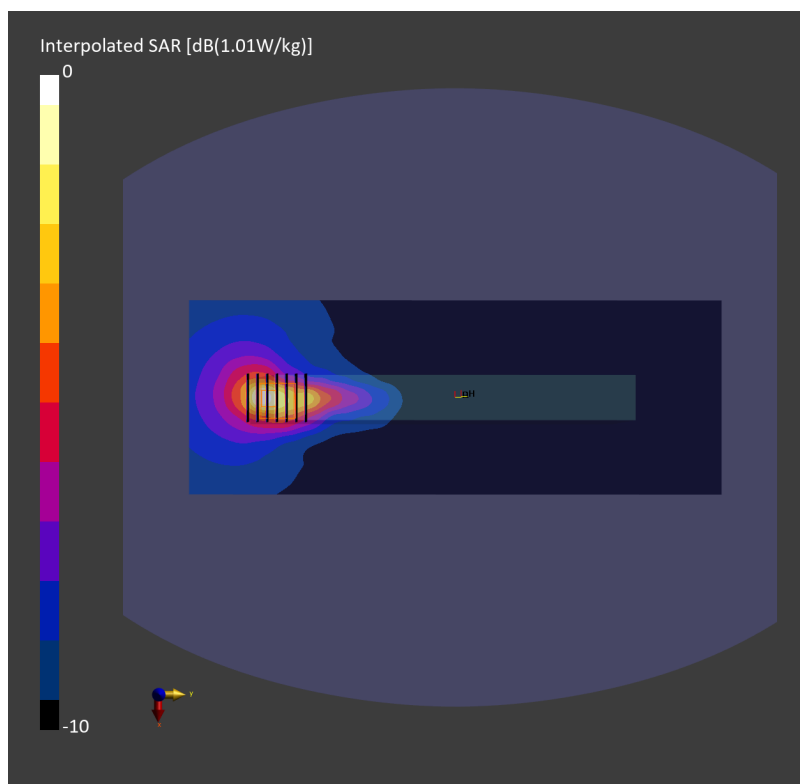

#03_WCDMA V_RMC 12.2Kbps_Top_0mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.951$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.97, 9.66, 9.74); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 360.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.367 W/kg; SAR (10g) = 0.226 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.392 W/kg; SAR (8g) = 0.238 W/kg; SAR (10g) = 0.221 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.8 %

TSL Correction: Positive only

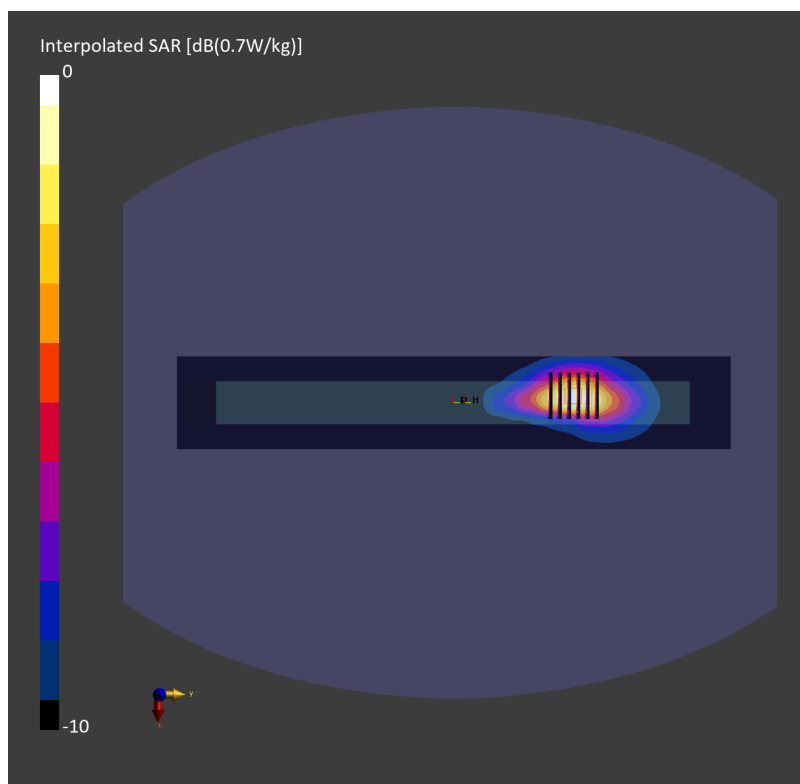

#04_LTE Band 2_20M_QPSK_1_99_Top_38mm_Ch18900

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.08, 7.83, 7.89); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 360.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.254 W/kg; SAR (10g) = 0.157 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.263 W/kg; SAR (8g) = 0.178 W/kg; SAR (10g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

TSL Correction: Positive only

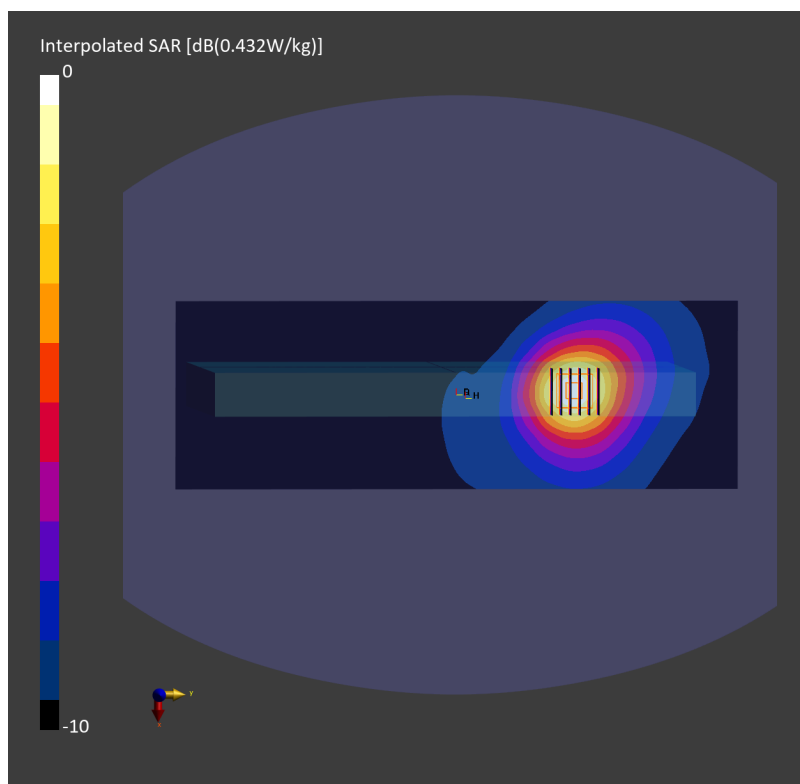

#05_LTE Band 4_20M_QPSK_1_0_Back_0mm_Ch20175

Communication System: LTE-FDD; Frequency: 1732.500 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 1732.500$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.26, 8.0, 8.07); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.168 W/kg; SAR (10g) = 0.095 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.180 W/kg; SAR (8g) = 0.110 W/kg; SAR (10g) = 0.102 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 84.2 %

TSL Correction: Positive only

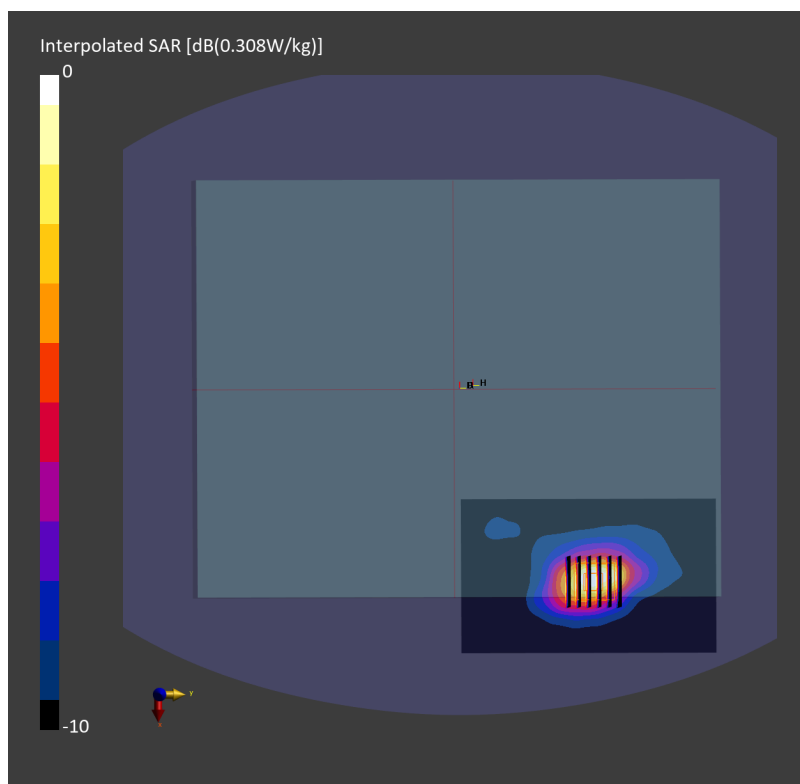

#06_LTE Band 5_10M_QPSK_1_25_Right_0mm_Ch20525

Communication System: LTE-FDD; Frequency: 836.500 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.951$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.97, 9.66, 9.74); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.196 W/kg; SAR (10g) = 0.121 W/kg;

TSL Correction: Positive only

Zoom Scan (32.4 mm x 32.4 mm x 31.2 mm): Measurement Grid: 5.4 mm x 5.4 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.219 W/kg; SAR (8g) = 0.125 W/kg; SAR (10g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.1 %

TSL Correction: Positive only

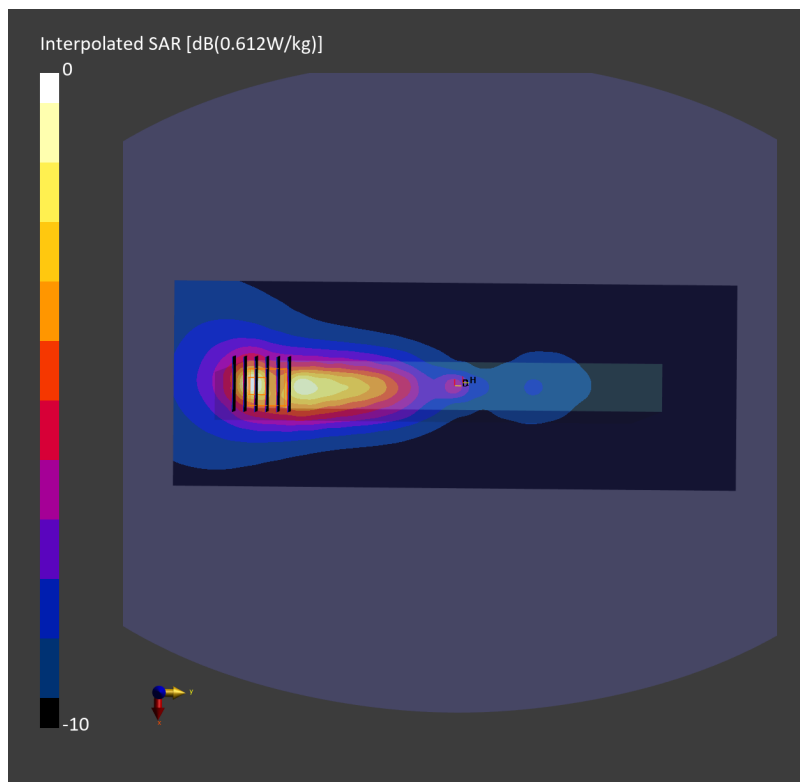

#07_LTE Band 7_20M_QPSK_1_99_Back_30mm_Ch21350

Communication System: LTE-FDD; Frequency: 2560.000 MHz

Medium: HSL_600-7200_260423 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.62, 7.39, 7.44); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.214 W/kg; SAR (10g) = 0.124 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.217 W/kg; SAR (8g) = 0.135 W/kg; SAR (10g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

TSL Correction: Positive only

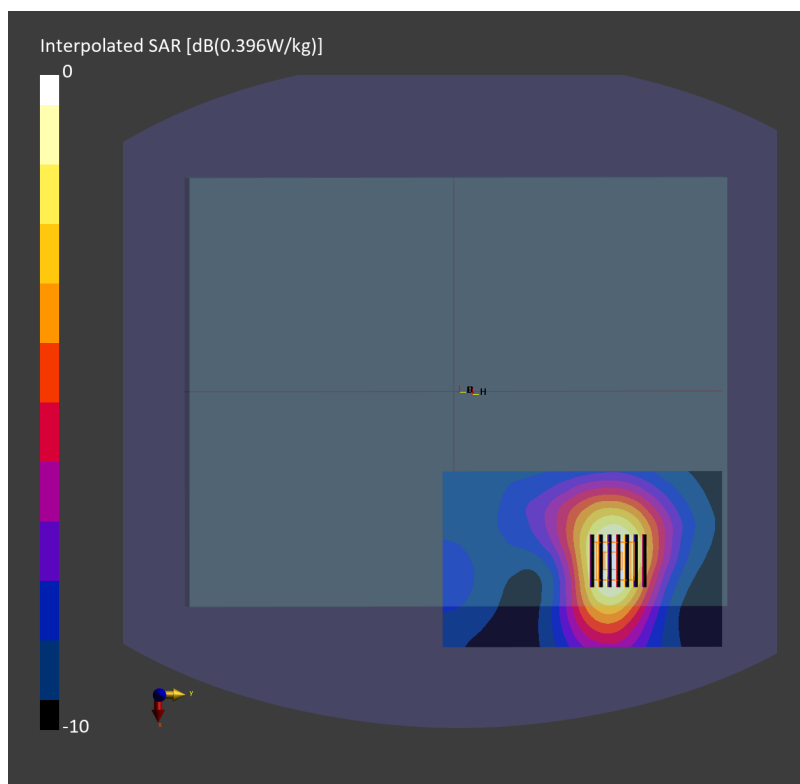

#08_LTE Band 12_10M_QPSK_1_49_Right_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.98, 9.68, 9.75); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.215 W/kg; SAR (10g) = 0.144 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.241 W/kg; SAR (8g) = 0.156 W/kg; SAR (10g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

TSL Correction: Positive only

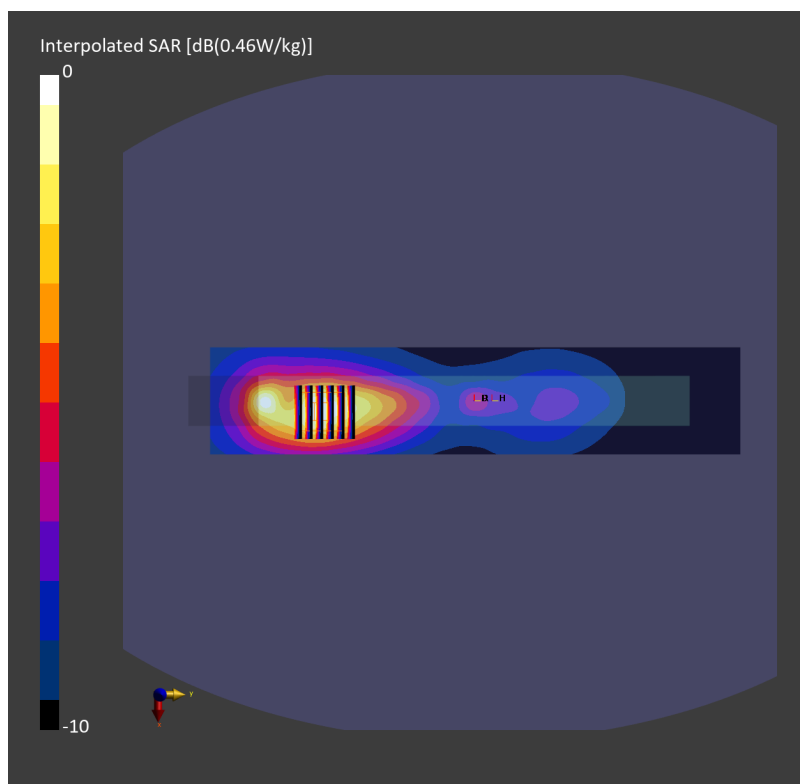

#09_LTE Band 13_10M_QPSK_1_0_Right_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.98, 9.68, 9.75); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.266 W/kg; SAR (10g) = 0.176 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 54.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.309 W/kg; SAR (8g) = 0.190 W/kg; SAR (10g) = 0.177 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

TSL Correction: Positive only

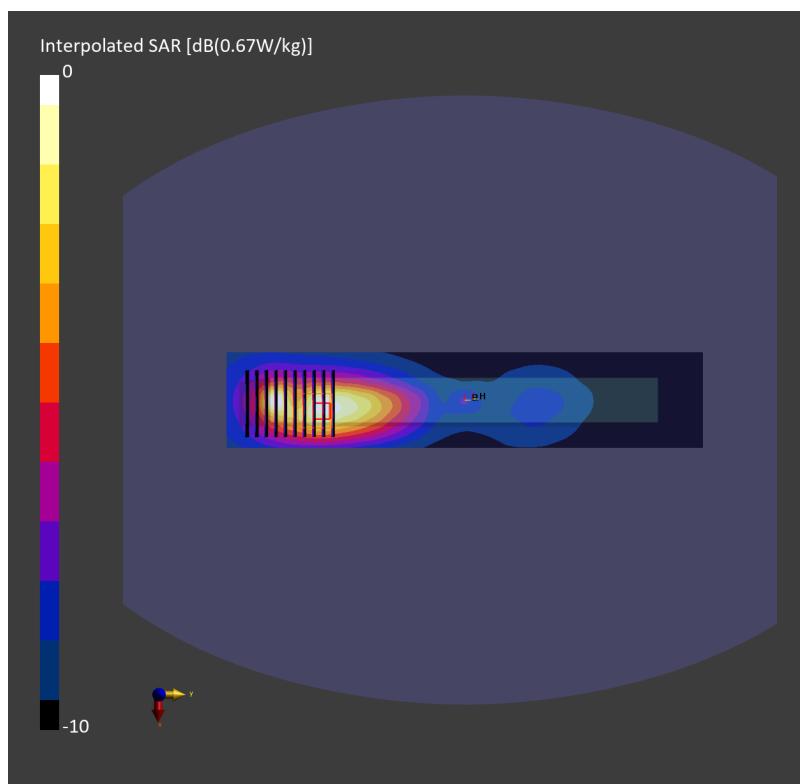

#10_LTE Band 14_10M_QPSK_1_25_Right_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.98, 9.68, 9.75); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.225 W/kg; SAR (10g) = 0.149 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 54.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.264 W/kg; SAR (8g) = 0.160 W/kg; SAR (10g) = 0.150 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 71.8 %

TSL Correction: Positive only

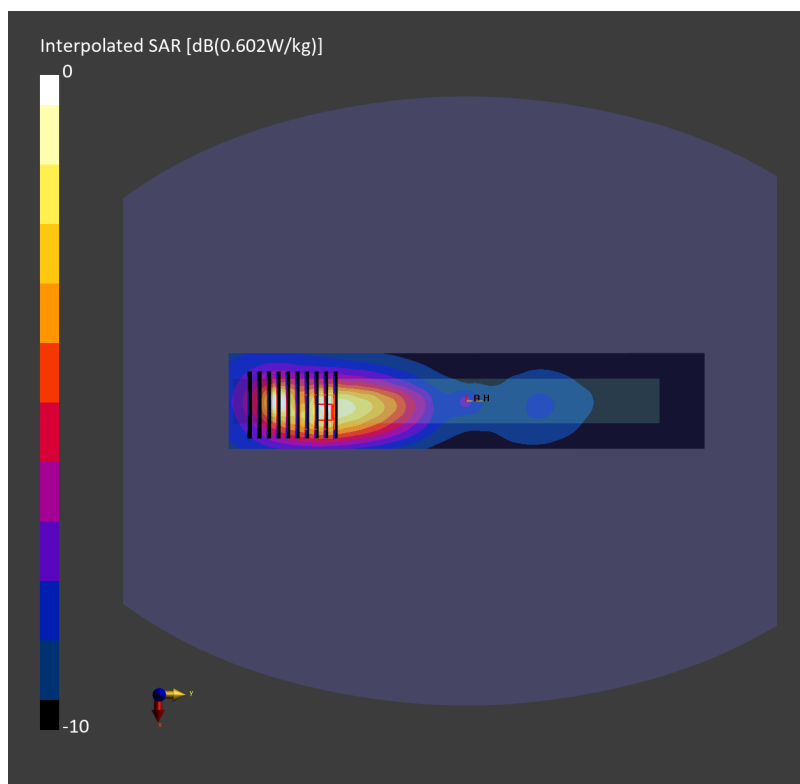

#11_LTE Band 17_10M_QPSK_1_49_Top_0mm_Ch23790

Communication System: LTE-FDD; Frequency: 710.000 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 710.000$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.98, 9.68, 9.75); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 360.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.169 W/kg; SAR (10g) = 0.111 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.192 W/kg; SAR (8g) = 0.120 W/kg; SAR (10g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 84.6 %

TSL Correction: Positive only

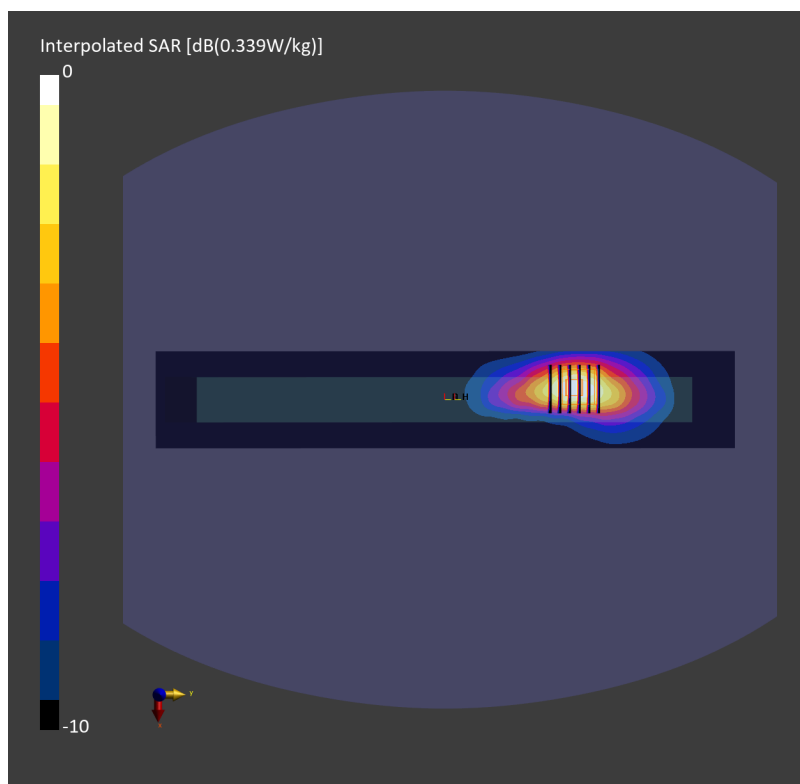

#12_LTE Band 25_20M_QPSK_1_0_Back_30mm_Ch26590

Communication System: LTE-FDD; Frequency: 1905.000 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.08, 7.83, 7.89); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.252 W/kg; SAR (10g) = 0.154 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.257 W/kg; SAR (8g) = 0.173 W/kg; SAR (10g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 87.6 %

TSL Correction: Positive only

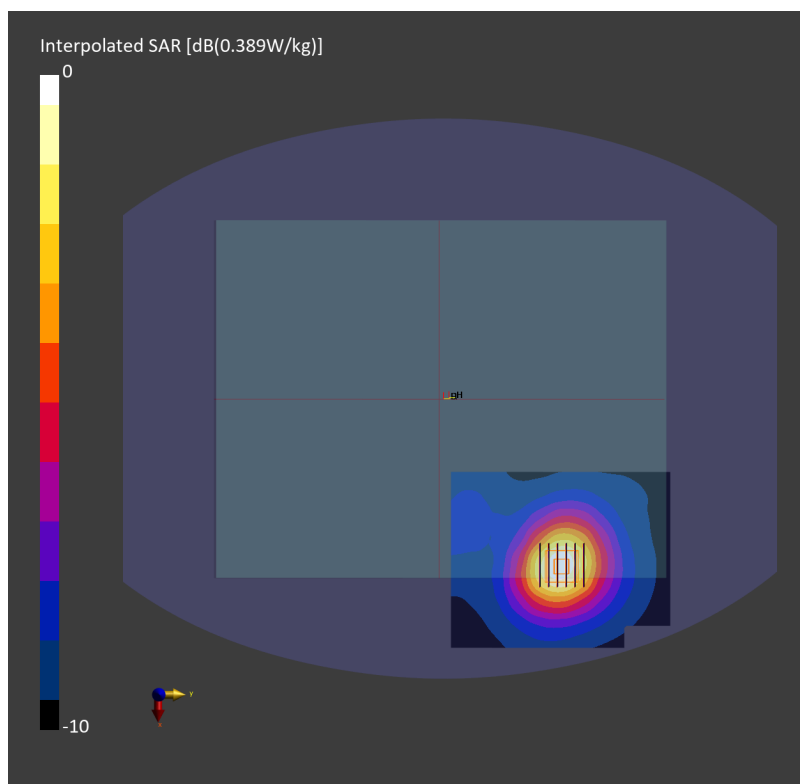

#13_LTE Band 26_15M_QPSK_36_39_Top_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.97, 9.66, 9.74); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10160-CAF

Area Scan (60.0 mm x 360.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.174 W/kg; SAR (10g) = 0.113 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.201 W/kg; SAR (8g) = 0.122 W/kg; SAR (10g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 84.6 %

TSL Correction: Positive only

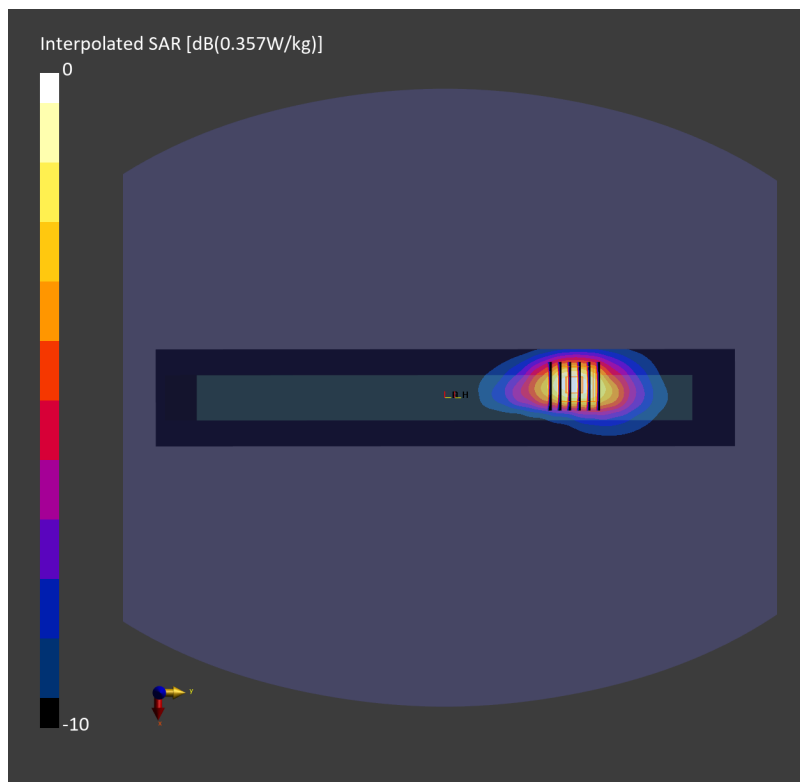

#14_LTE Band 66_20M_QPSK_1_0_Right_0mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.26, 8.0, 8.07); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.341 W/kg; SAR (10g) = 0.187 W/kg;

TSL Correction: No correction

Zoom Scan (30.0 mm x 36.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.346 W/kg; SAR (8g) = 0.195 W/kg; SAR (10g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 71.2 %

TSL Correction: No correction

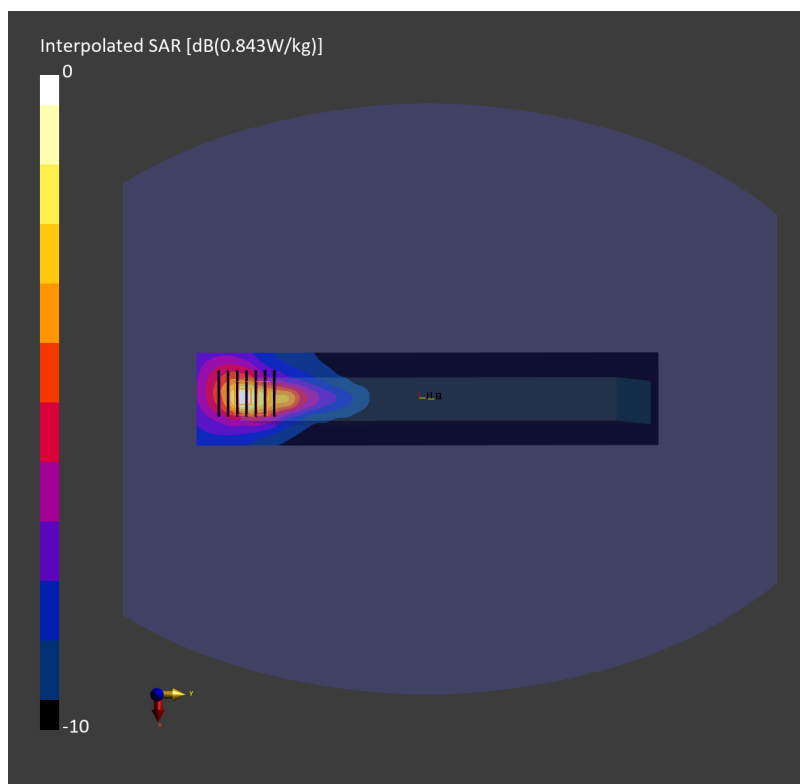

#15_LTE Band 71_20M_QPSK_1_49_Right_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.98, 9.68, 9.75); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.136 W/kg; SAR (10g) = 0.091 W/kg;

TSL Correction: Positive only

Zoom Scan (54.0 mm x 60.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.160 W/kg; SAR (8g) = 0.101 W/kg; SAR (10g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 72.9 %

TSL Correction: Positive only

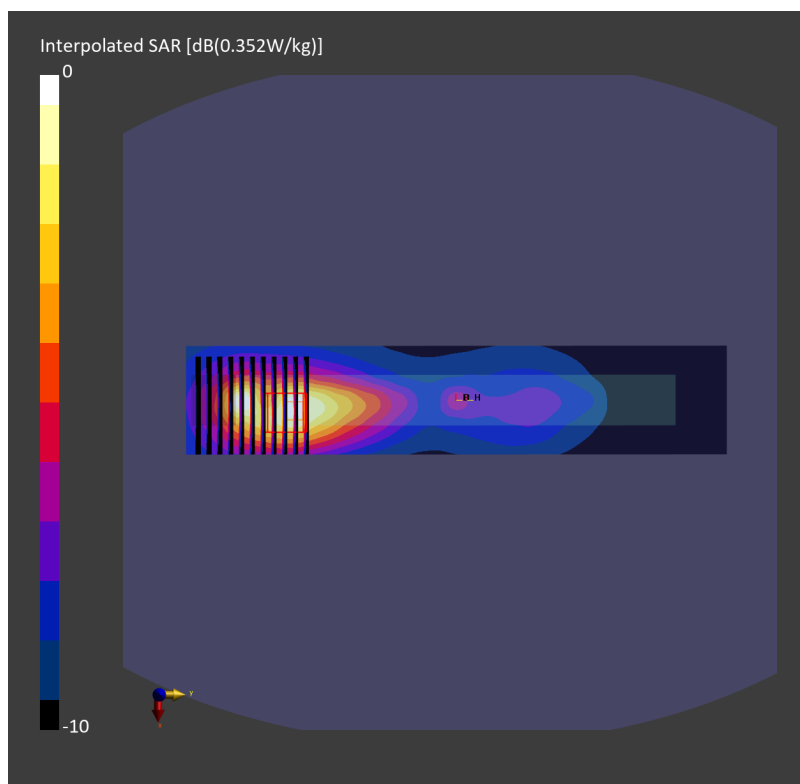

#16_LTE Band 106_3M_QPSK_8_0_Top_0mm_Ch134322

Communication System: LTE-FDD; Frequency: 899.000 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 899.000$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.55, 9.25, 9.33); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 10298-AAE

Area Scan (90.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.202 W/kg; SAR (10g) = 0.120 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.201 W/kg; SAR (8g) = 0.121 W/kg; SAR (10g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 84.1 %

TSL Correction: Positive only

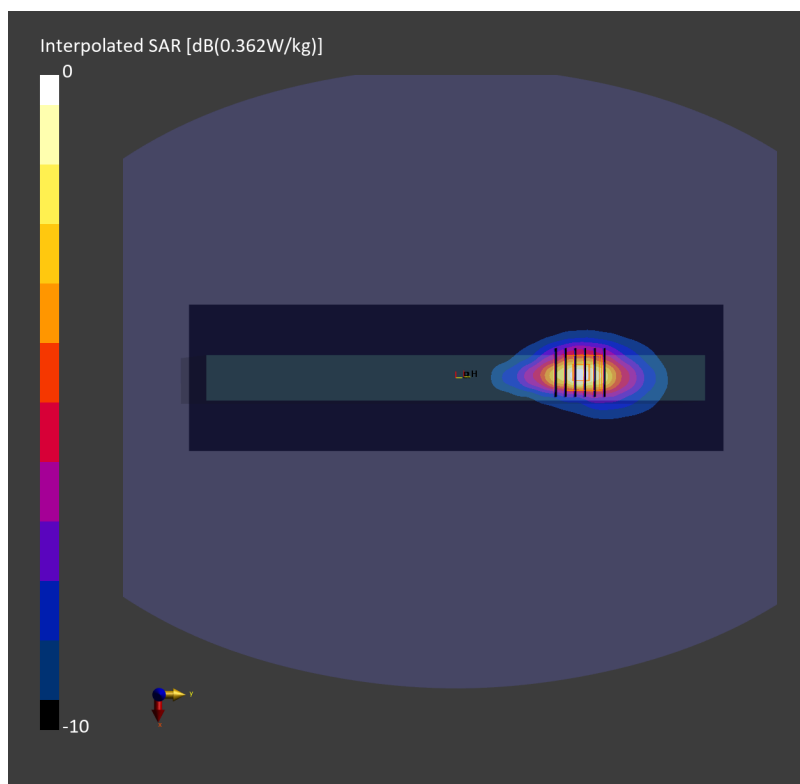

#17_LTE Band 48_20M_QPSK_1_99_Right_0mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260424 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(6.87, 6.66, 6.71); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (60.0 mm x 300.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.304 W/kg; SAR (10g) = 0.115 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.370 W/kg; SAR (8g) = 0.142 W/kg; SAR (10g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

TSL Correction: Positive only

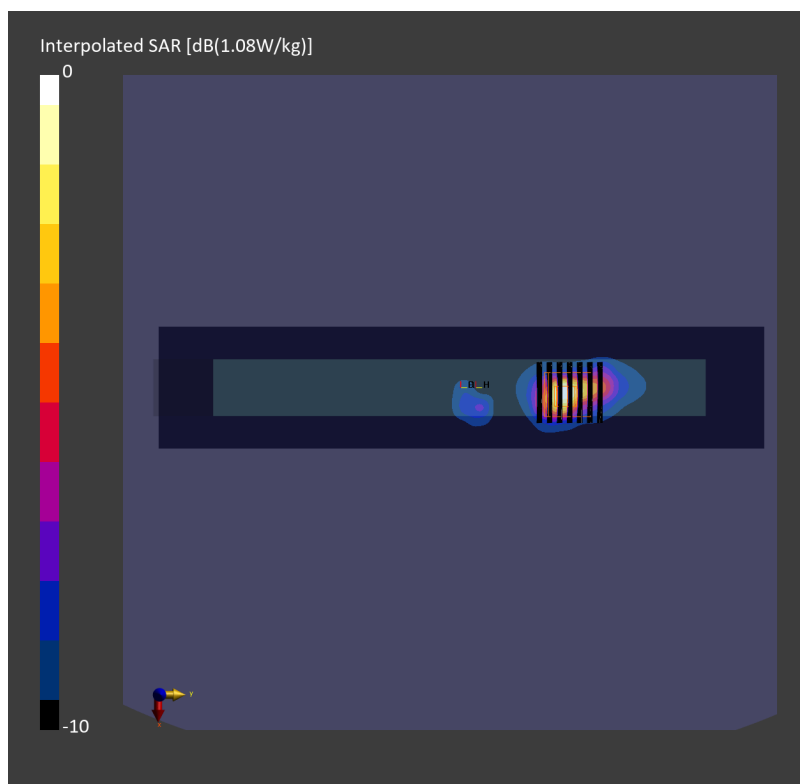

#18_FR1 n7_40M_BPSK_1_108_Right_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260423 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.62, 7.39, 7.44); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.309 W/kg; SAR (10g) = 0.148 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.312 W/kg; SAR (8g) = 0.163 W/kg; SAR (10g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

TSL Correction: Positive only

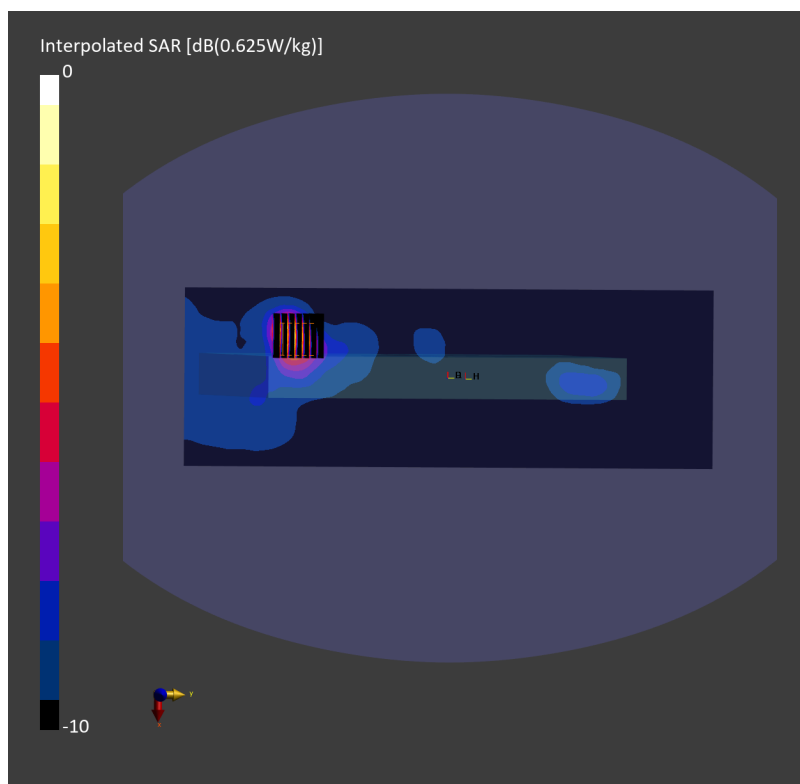

#19_FR1 n12_15M_BPSK_36_22_Top_0mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.98, 9.68, 9.75); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.512 W/kg; SAR (10g) = 0.324 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 36.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.555 W/kg; SAR (8g) = 0.346 W/kg; SAR (10g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 84.3 %

TSL Correction: Positive only

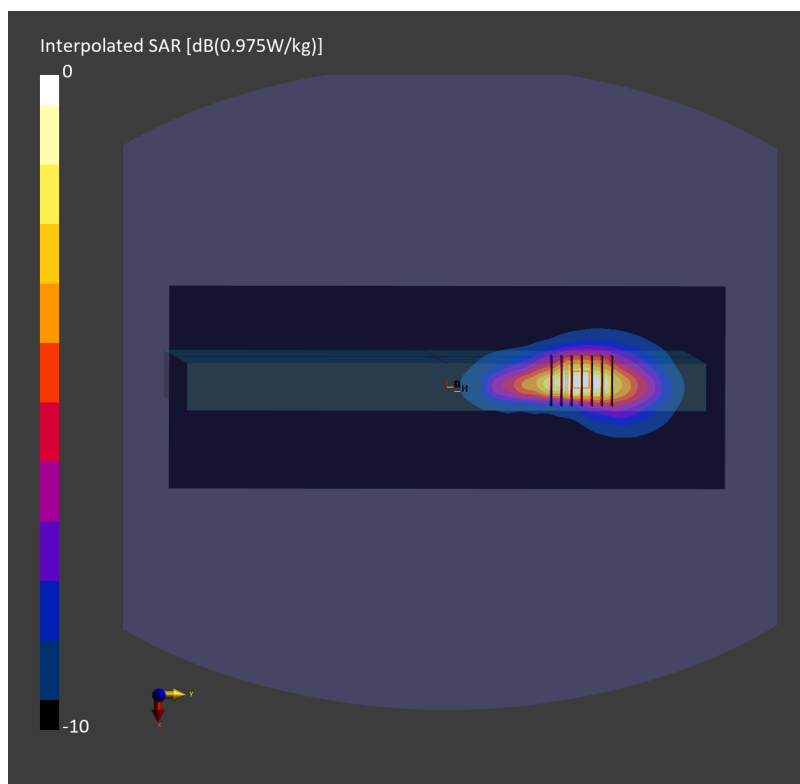

#20_FR1 n13_10M_BPSK_25_14_Top_0mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.98, 9.68, 9.75); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.587 W/kg; SAR (10g) = 0.371 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.648 W/kg; SAR (8g) = 0.399 W/kg; SAR (10g) = 0.372 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 84.1 %

TSL Correction: Positive only

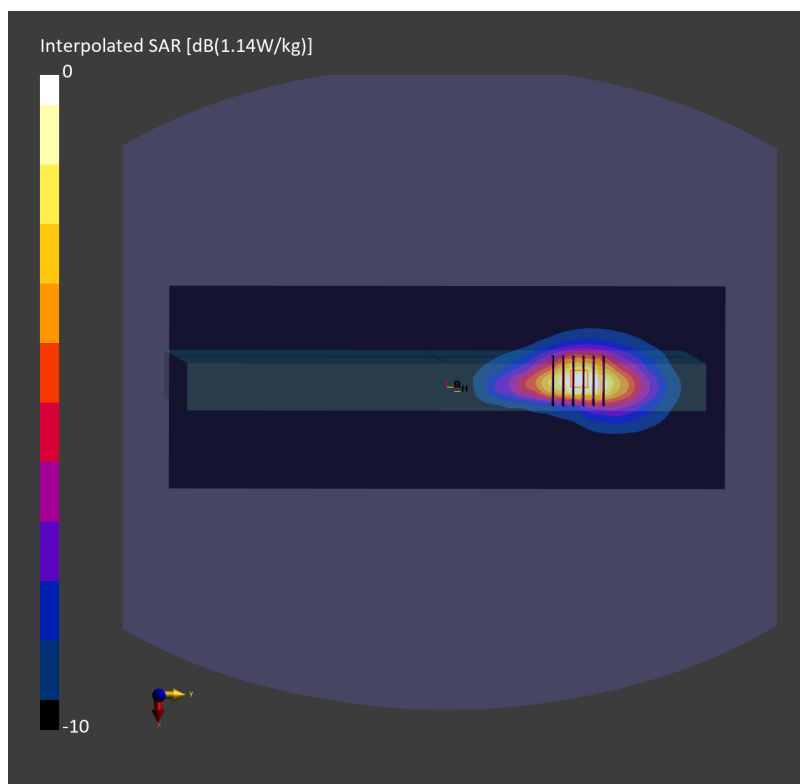

#21_FR1 n14_10M_BPSK_1_26_Top_0mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.98, 9.68, 9.75); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.547 W/kg; SAR (10g) = 0.345 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.605 W/kg; SAR (8g) = 0.371 W/kg; SAR (10g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

TSL Correction: Positive only

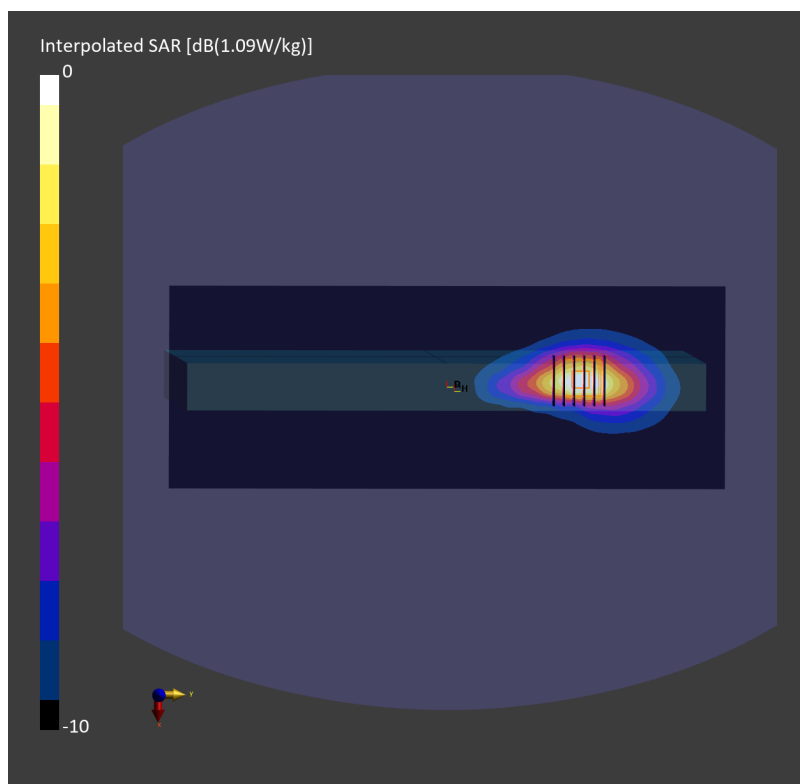

#22_FR1 n25_40M_BPSK_1_1_Back_0mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.08, 7.83, 7.89); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.392 W/kg; SAR (10g) = 0.230 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.410 W/kg; SAR (8g) = 0.256 W/kg; SAR (10g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.6 %

TSL Correction: Positive only

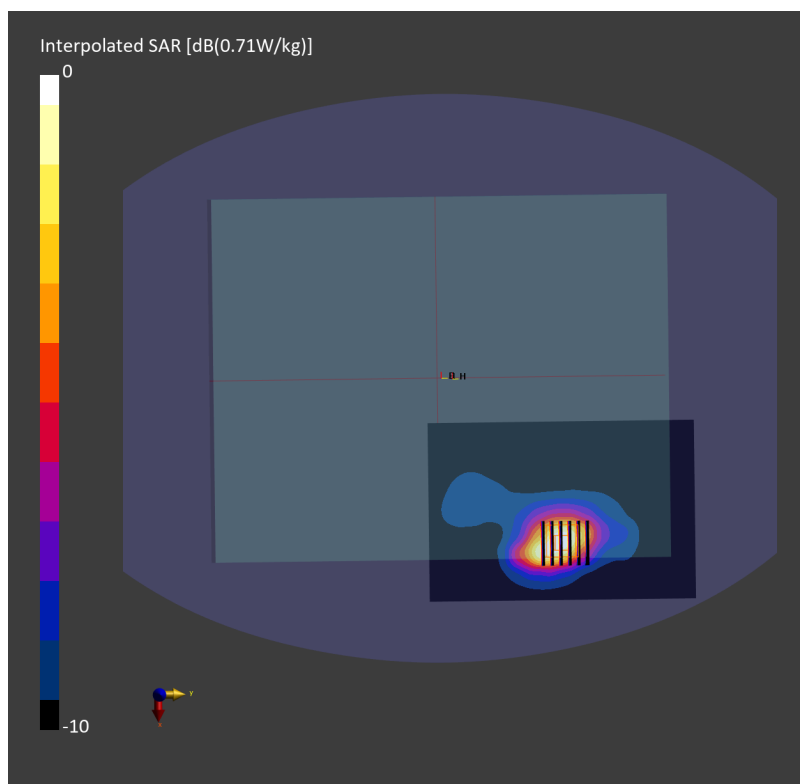

#23_FR1 n26_20M_BPSK_50_28_Top_0mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.97, 9.66, 9.74); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.553 W/kg; SAR (10g) = 0.346 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.609 W/kg; SAR (8g) = 0.370 W/kg; SAR (10g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

TSL Correction: Positive only

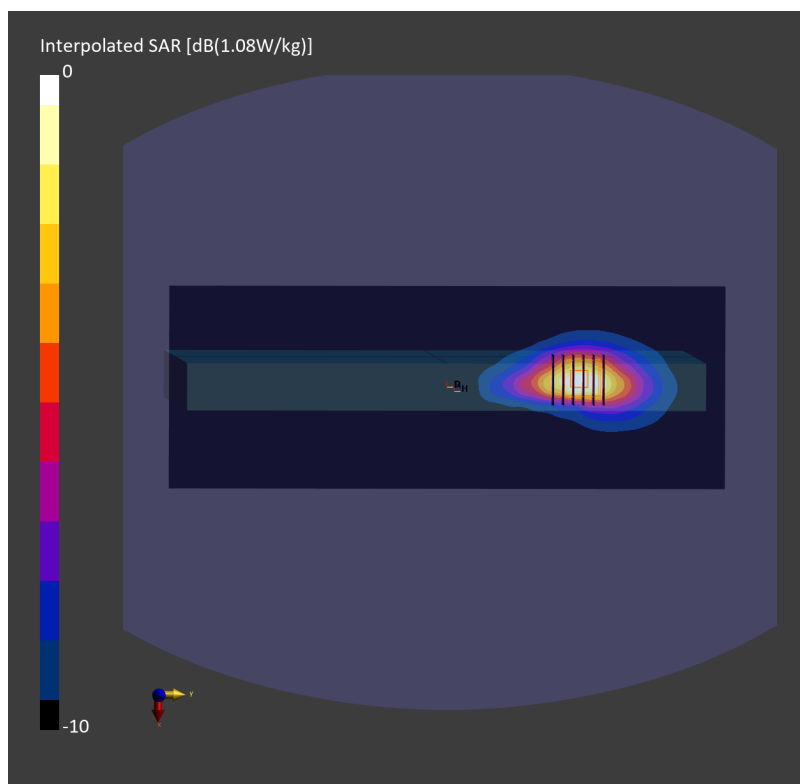

#24_FR1 n66_40M_BPSK_108_54_Right_0mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.26, 8.0, 8.07); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 360.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.434 W/kg; SAR (10g) = 0.237 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.442 W/kg; SAR (8g) = 0.246 W/kg; SAR (10g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 73.8 %

TSL Correction: Positive only

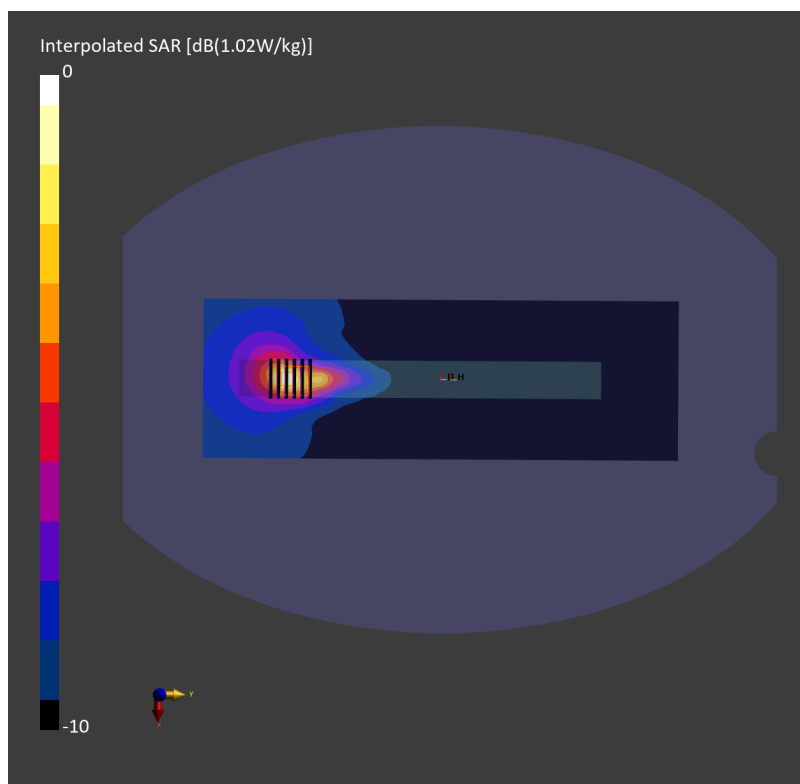

#25_FR1 n70_15M_BPSK_1_1_Right_0mm_Ch340500

Communication System: 5G NR; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260422 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.26, 8.0, 8.07); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 360.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.405 W/kg; SAR (10g) = 0.222 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.413 W/kg; SAR (8g) = 0.230 W/kg; SAR (10g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 73.8 %

TSL Correction: Positive only

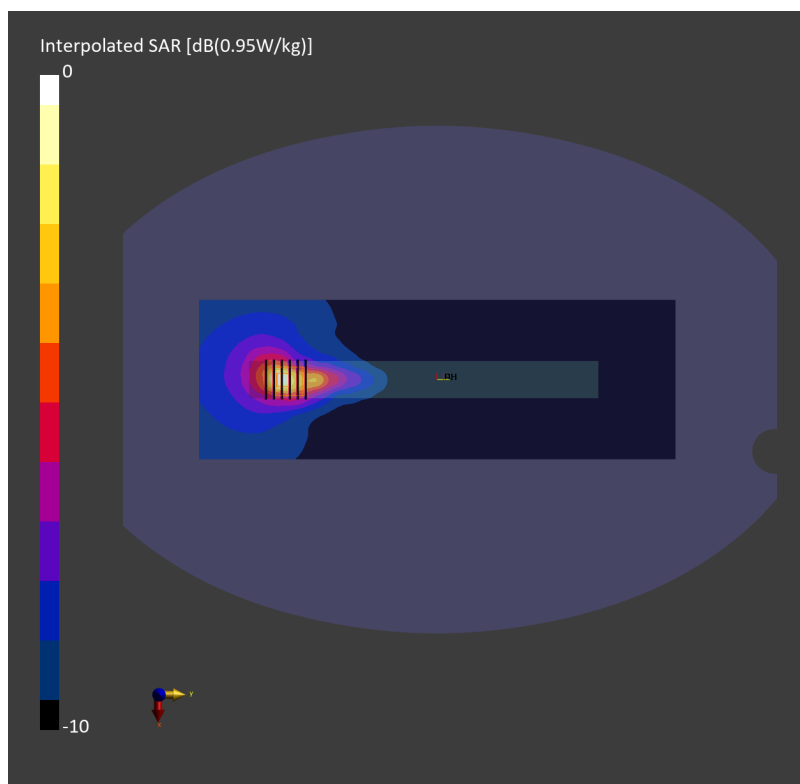

#26_FR1 n71_20M_BPSK_1_1_Top_0mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260421 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.98, 9.68, 9.75); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.482 W/kg; SAR (10g) = 0.306 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 36.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.520 W/kg; SAR (8g) = 0.325 W/kg; SAR (10g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

TSL Correction: Positive only

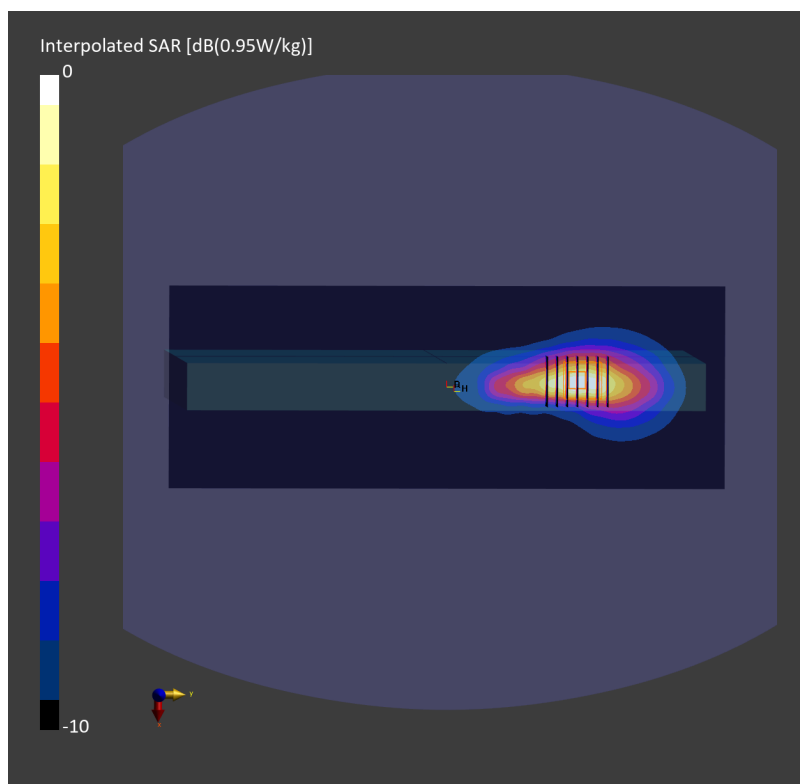

#27_FR1 n41_100M_BPSK_135_69_Back_22mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260423 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.62, 7.39, 7.44); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (100.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.612 W/kg; SAR (10g) = 0.334 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.624 W/kg; SAR (8g) = 0.373 W/kg; SAR (10g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 17.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.1 %

TSL Correction: Positive only

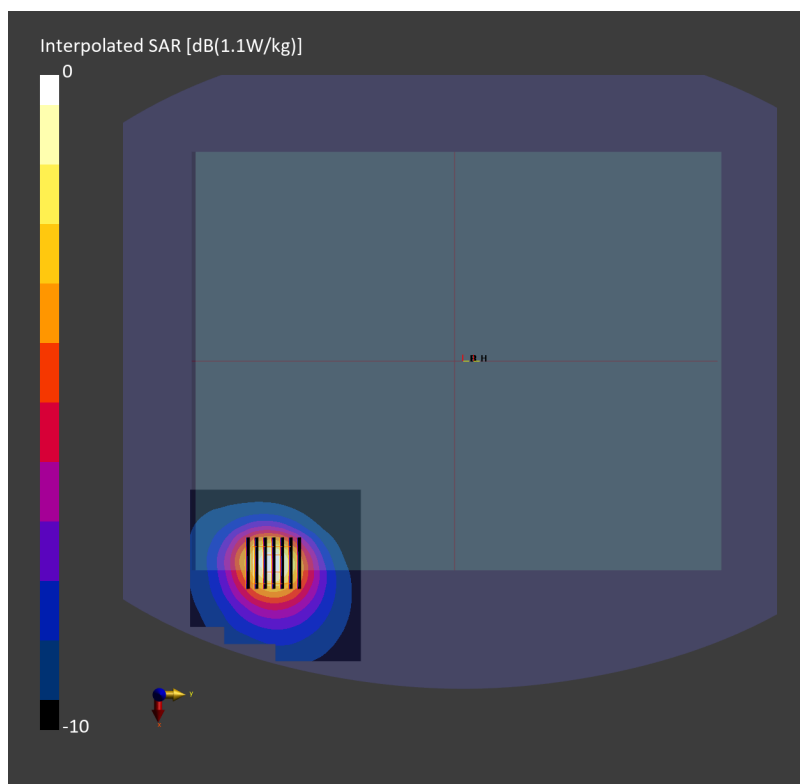

#28_FR1 n48_40M_BPSK_1_1_Right_29mm_Ch641666

Communication System: 5G NR; Frequency: 3624.99 MHz

Medium: HSL_600-7200_260424 Medium parameters used: $f = 3624.99$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(6.87, 6.66, 6.71); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (100.0 mm x 340.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.217 W/kg; SAR (10g) = 0.107 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.04 dB

SAR (1g) = 0.220 W/kg; SAR (8g) = 0.118 W/kg; SAR (10g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 19.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.4 %

TSL Correction: Positive only

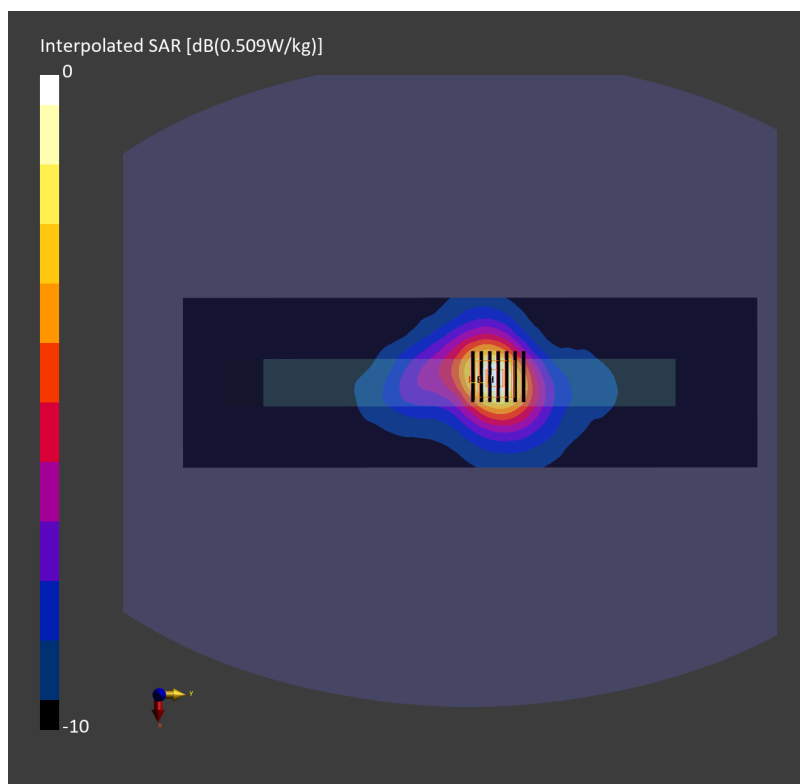

#29_FR1 n77_100M_BPSK_135_69_Left_0mm_Ch656000;Aux

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260424 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.03$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(6.84, 6.63, 6.68); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (100.0 mm x 300.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.636 W/kg; SAR (10g) = 0.245 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.636 W/kg; SAR (8g) = 0.262 W/kg; SAR (10g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 73.0 %

TSL Correction: Positive only

