



C			B		A	
REV.	MARK.	DCR/ECN NO.	DATE	UPDATE DESCRIPTION		SIGNATURE.
00			20210119	First Release		Rain Zhao

Label From Vender
(Label with static text only)

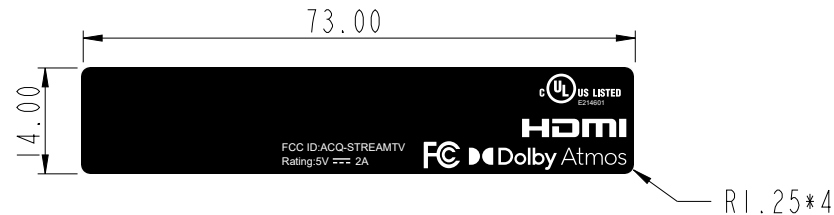

Print At Foxconn MGF (Example)

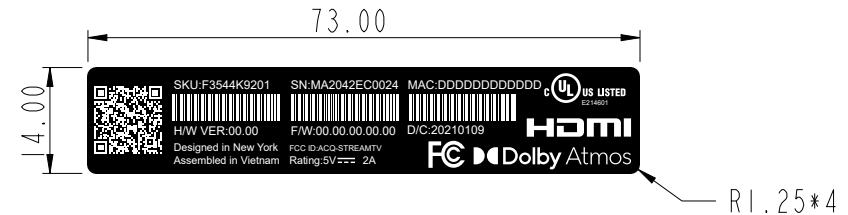

Notes:

1-Material : WBET38-BV/GJ/TLT50(FS) +PET25N

2-This adhesive of label need to paste on the TPU material

3-The total thickness of label is 0.2 ± 0.05 mm

4- Label Color: Secondary Black. Label Text:color is white and finish is matte.

5-Printing color is as color defined in artwork

6-Package Style: Reel

7-This part must comply with ROHS.

8-The label include serial number, MAC address, UL, FCC, tampering, QR code

9-The label surface reflectivity >70% (contrast between print and print surface).

10- Label must meet durability test as defined in UL spec, and must be UL recognized components

Label Environmental Characteristics

1-The labeling is resistant to smudging or staining.

2-The labeling is able to remain in position under humidity conditions of 5%-98%.

3-The labeling is water resistant, such that label remains in position and suffers no adverse effect when subjected a water dip test of being dipped in 20 deg. C water for a day.

4-The labeling is water resistant, such that label remains in position and suffers no adverse effect when subjected a cloth wiped test of being wiping on the label by cotton broadcloth using a force of 200g per square cm during 100 times reciprocating after the water dip test.


5-The labeling is chemical-resistant, such that label remains in position and suffers no adverse effect after rubbing the label by hand for 15 seconds with a piece of cloth soaked in petroleum spirit.


6-The labeling is heat resistant, such that label remains in position and suffers no adverse

effect when exposed to a maximum temperature of 75 degrees C.

7-The labeling is heat resistant, such that label remains in position and suffers no adverse effect when exposed to the product's specified storage conditions and periods.

8-The product line need to use the type of ink ribbon is TR3370

MATERIAL (SPEC.)		SEE NOTES		SCALE 1:1		 Foxconn Industrial Internet 富士康工业互联网																																																																																									
FINISH		SEE NOTES		SHEET 1/1																																																																																											
<table><tr><th>Select</th><th colspan="2">A</th><th>B</th><th>C</th><th>EPS</th><th>EPE</th><th>BAG</th><th>CTN</th><th>LABEL</th><th>USR</th></tr><tr><th>Dim. Tol.</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>0-6</td><td>0.05</td><td>0.05</td><td>0.10</td><td></td><td></td><td></td><td></td><td></td><td>0.20</td><td>0.05</td></tr><tr><td>6-30</td><td>0.10</td><td>0.15</td><td>0.20</td><td>0.50</td><td>0.50</td><td>3.00</td><td></td><td></td><td>0.20</td><td>0.05</td></tr><tr><td>30-120</td><td>0.15</td><td>0.20</td><td>0.30</td><td>0.50</td><td>0.50</td><td>5.00</td><td>2.00</td><td></td><td>0.25</td><td>0.10</td></tr><tr><td>120-300</td><td>0.20</td><td>0.30</td><td>0.40</td><td>1.00</td><td>1.00</td><td>10.00</td><td>3.00</td><td></td><td>0.30</td><td>0.15</td></tr><tr><td>300-450</td><td>0.25</td><td>0.40</td><td>0.50</td><td>2.00</td><td>2.00</td><td>15.00</td><td>5.00</td><td>0.50</td><td>0.50</td><td>0.20</td></tr><tr><td>450-600</td><td>0.30</td><td>0.50</td><td>0.60</td><td>3.00</td><td>3.00</td><td>20.00</td><td>5.00</td><td>0.80</td><td>0.20</td><td></td></tr></table>		Select	A		B	C	EPS	EPE	BAG	CTN	LABEL	USR	Dim. Tol.											0-6	0.05	0.05	0.10						0.20	0.05	6-30	0.10	0.15	0.20	0.50	0.50	3.00			0.20	0.05	30-120	0.15	0.20	0.30	0.50	0.50	5.00	2.00		0.25	0.10	120-300	0.20	0.30	0.40	1.00	1.00	10.00	3.00		0.30	0.15	300-450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.50	0.20	450-600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20		UNIT mm		PART NAME F354 Product Label			
Select	A		B	C	EPS	EPE	BAG	CTN	LABEL	USR																																																																																					
Dim. Tol.																																																																																															
0-6	0.05	0.05	0.10						0.20	0.05																																																																																					
6-30	0.10	0.15	0.20	0.50	0.50	3.00			0.20	0.05																																																																																					
30-120	0.15	0.20	0.30	0.50	0.50	5.00	2.00		0.25	0.10																																																																																					
120-300	0.20	0.30	0.40	1.00	1.00	10.00	3.00		0.30	0.15																																																																																					
300-450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.50	0.20																																																																																					
450-600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20																																																																																						
SIZE A4		MODEL U62X104.00		PART NO. 500.02573.005		DESIGNED Rain Zhao																																																																																									
		CUSTOMER MODEL		CUSTOMER PART NO.		APPROVED Tim Yu																																																																																									
DRAFT TOLERANCE ±0.2		CRITICAL DIM. MARK *																																																																																													

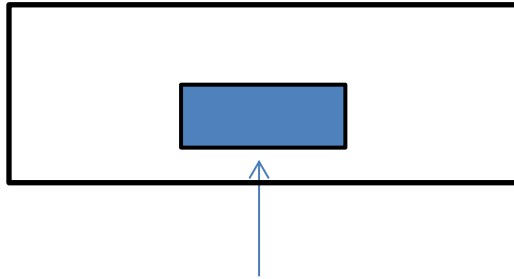

FCC ID: ACQ-STREAMTV