



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313  
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372  
3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372  
13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

December 8, 2014

ARRIS Group  
6450 Sequence Dr.  
San Diego, CA 92121

Dear Joni Washek,

Enclosed is the EMC Wireless test report for compliance testing of the ARRIS Group, VAP3400 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407 and Industry Canada RSS-210 Issue 8 December 2010 for Intentional Radiators DFS Bands.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\ARRIS Group\EMCS83255A-DFS Rev2)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

### **Electromagnetic Compatibility Criteria Test Report**

for the

**ARRIS Group  
Model VAP3400**

**Tested under**  
the Certification Rules  
contained in  
Title 47 of the CFR, Part 15.407  
and RSS-210 Issue 8 December 2010  
for Intentional Radiators DFS Bands

**MET Report: EMCS83255A-DFS Rev2**

December 8, 2014

**Prepared For:**

**ARRIS Group  
6450 Sequence Dr.  
San Diego, CA 92121**

**Prepared By:**  
**MET Laboratories, Inc.**  
914 W. Patapsco Ave.  
Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the

**ARRIS Group  
Model VAP3400**

**Tested under**  
the Certification Rules  
contained in  
Title 47 of the CFR, Part 15.407  
and RSS-210 Issue 8 December 2010  
for Intentional Radiators DFS Bands



Andy Shen, Project Engineer  
Electromagnetic Compatibility Lab



Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15.407 DFS Bands of the FCC Rules and Industry Canada standards RSS-210 Issue 8 December 2010 under normal use and maintenance.



Asad Bajwa, Director  
Electromagnetic Compatibility Lab

## Report Status Sheet

| Revision | Report Date       | Reason for Revision                                   |
|----------|-------------------|-------------------------------------------------------|
| Ø        | October 23, 2014  | Initial Issue.                                        |
| 1        | November 14, 2014 | Retested with -64 dBm threshold level                 |
| 2        | December 8, 2014  | Revised to correct 802.11n 80 MHz to 802.11ac 80 MHz. |

## Table of Contents

|             |                                                                                              |           |
|-------------|----------------------------------------------------------------------------------------------|-----------|
| <b>I.</b>   | <b>Executive Summary .....</b>                                                               | <b>1</b>  |
|             | A. Purpose of Test .....                                                                     | 2         |
|             | B. Executive Summary .....                                                                   | 2         |
| <b>II.</b>  | <b>Equipment Configuration .....</b>                                                         | <b>3</b>  |
|             | A. Overview.....                                                                             | 4         |
|             | B. References.....                                                                           | 4         |
|             | C. Test Site .....                                                                           | 5         |
|             | D. Description of Test Sample.....                                                           | 5         |
|             | E. Equipment Configuration.....                                                              | 5         |
|             | F. Support Equipment .....                                                                   | 5         |
|             | G. Ports and Cabling Information.....                                                        | 5         |
|             | H. Mode of Operation.....                                                                    | 7         |
|             | I. Method of Monitoring EUT Operation .....                                                  | 8         |
|             | J. Modifications .....                                                                       | 8         |
|             | a) Modifications to EUT .....                                                                | 8         |
|             | b) Modifications to Test Standard.....                                                       | 8         |
|             | K. Disposition of EUT .....                                                                  | 8         |
| <b>III.</b> | <b>DFS Requirements and Radar Waveform Description &amp; Calibration .....</b>               | <b>9</b>  |
|             | A. DFS Requirements .....                                                                    | 10        |
|             | B. Radar Test Waveforms .....                                                                | 12        |
|             | C. Radar Waveform Calibration .....                                                          | 15        |
| <b>IV.</b>  | <b>DFS Test Procedure and Test Results .....</b>                                             | <b>23</b> |
|             | A. DFS Test Setup .....                                                                      | 24        |
|             | B. UNII Detection Bandwidth .....                                                            | 26        |
|             | C. Initial Channel Availability Check Time .....                                             | 32        |
|             | D. Radar Burst at the Beginning of Channel Availability Check Time .....                     | 33        |
|             | E. Radar Burst at the End of Channel Availability Check Time .....                           | 35        |
|             | F. In-Service Monitoring for Channel Move Time, Channel Closing Time, and Non-Occupancy..... | 37        |
|             | G. Statistical Performance Check .....                                                       | 40        |
| <b>V.</b>   | <b>Test Equipment .....</b>                                                                  | <b>62</b> |
| <b>VI.</b>  | <b>Certification &amp; User's Manual Information.....</b>                                    | <b>64</b> |
|             | A. Certification Information .....                                                           | 65        |
|             | B. Label and User's Manual Information .....                                                 | 69        |

## List of Tables

|                                                                                        |    |
|----------------------------------------------------------------------------------------|----|
| Table 1. Executive Summary of EMC Part 15.407 Compliance Testing .....                 | 2  |
| Table 2. EUT Summary.....                                                              | 4  |
| Table 3. References .....                                                              | 4  |
| Table 4. Equipment Configuration .....                                                 | 5  |
| Table 5. Support Equipment.....                                                        | 5  |
| Table 6. Ports and Cabling Information .....                                           | 5  |
| Table 7. Applicability of DFS Requirements Prior to Use of a Channel.....              | 10 |
| Table 8. Applicability of DFS Requirements During Normal Operation .....               | 10 |
| Table 9. DFS Detection Thresholds for Master or Client Devices Incorporating DFS ..... | 11 |
| Table 10. DFS Response Requirement Values.....                                         | 11 |
| Table 11. UNII Detection Bandwidth, Test Results, 5290 MHz, 80 MHz .....               | 28 |
| Table 12. UNII Detection Bandwidth, Test Results, 5300 MHz, 20 MHz .....               | 29 |
| Table 13. UNII Detection Bandwidth, Test Results, 5510 MHz, 40 MHz .....               | 30 |
| Table 14. Statistical Performance Check – Radar Type 0, 802.11n 20 MHz .....           | 41 |
| Table 15. Statistical Performance Check – Radar Type 1, 802.11n 20 MHz .....           | 42 |
| Table 16. Statistical Performance Check – Radar Type 2, 802.11n 20 MHz .....           | 43 |
| Table 17. Statistical Performance Check – Radar Type 3, 802.11n 20 MHz .....           | 44 |
| Table 18. Statistical Performance Check – Radar Type 4, 802.11n 20 MHz .....           | 45 |
| Table 19. Statistical Performance Check – Radar Type 5, 802.11n 20 MHz .....           | 46 |
| Table 20. Statistical Performance Check – Radar Type 6, 802.11n 20 MHz .....           | 47 |
| Table 21. Statistical Performance Check – Radar Type 0, 802.11n 40 MHz .....           | 48 |
| Table 22. Statistical Performance Check – Radar Type 1, 802.11n 40 MHz .....           | 49 |
| Table 23. Statistical Performance Check – Radar Type 2, 802.11n 40 MHz .....           | 50 |
| Table 24. Statistical Performance Check – Radar Type 3, 802.11n 40 MHz .....           | 51 |
| Table 25. Statistical Performance Check – Radar Type 4, 802.11n 40 MHz .....           | 52 |
| Table 26. Statistical Performance Check – Radar Type 5, 802.11n 40 MHz .....           | 53 |
| Table 27. Statistical Performance Check – Radar Type 6, 802.11n 40 MHz .....           | 54 |
| Table 28. Statistical Performance Check – Radar Type 0, 802.11ac 80 MHz.....           | 55 |
| Table 29. Statistical Performance Check – Radar Type 1, 802.11ac 80 MHz.....           | 56 |
| Table 30. Statistical Performance Check – Radar Type 2, 802.11ac 80 MHz.....           | 57 |
| Table 31. Statistical Performance Check – Radar Type 3, 802.11ac 80 MHz.....           | 58 |
| Table 32. Statistical Performance Check – Radar Type 4, 802.11ac 80 MHz.....           | 59 |
| Table 33. Statistical Performance Check – Radar Type 5, 802.11ac 80 MHz.....           | 60 |
| Table 34. Statistical Performance Check – Radar Type 6, 802.11ac 80 MHz.....           | 61 |
| Table 35. DFS Test Equipment List .....                                                | 63 |

## List of Figures

|                                                          |    |
|----------------------------------------------------------|----|
| Figure 1. Block Diagram of Equipment Configuration ..... | 6  |
| Figure 2. Long Pulse Radar Test Signal Waveform.....     | 14 |
| Figure 3. Calibration Test setup .....                   | 15 |
| Figure 4. Test Setup Diagram.....                        | 24 |

## List of Photographs

|                                                     |    |
|-----------------------------------------------------|----|
| Photograph 1. DFS Radar Test Signal Generator ..... | 15 |
| Photograph 2. DFS, Test Setup .....                 | 25 |

## List of Plots

|                                                                                         |    |
|-----------------------------------------------------------------------------------------|----|
| Plot 1. Radar Type 0 Calibration, 5290 MHz.....                                         | 16 |
| Plot 2. Radar Type 0 Calibration, 5300 MHz.....                                         | 16 |
| Plot 3. Radar Type 0 Calibration, 5510 MHz.....                                         | 16 |
| Plot 4. Radar Type 1 Calibration, 5290 MHz.....                                         | 17 |
| Plot 5. Radar Type 1 Calibration, 5300 MHz.....                                         | 17 |
| Plot 6. Radar Type 1 Calibration, 5510 MHz.....                                         | 17 |
| Plot 7. Radar Type 2 Calibration, 5290 MHz.....                                         | 18 |
| Plot 8. Radar Type 2 Calibration, 5300 MHz.....                                         | 18 |
| Plot 9. Radar Type 2 Calibration, 5510 MHz.....                                         | 18 |
| Plot 10. Radar Type 3 Calibration, 5290 MHz.....                                        | 19 |
| Plot 11. Radar Type 3 Calibration, 5300 MHz.....                                        | 19 |
| Plot 12. Radar Type 3 Calibration, 5510 MHz.....                                        | 19 |
| Plot 13. Radar Type 4 Calibration, 5290 MHz.....                                        | 20 |
| Plot 14. Radar Type 4 Calibration, 5300 MHz.....                                        | 20 |
| Plot 15. Radar Type 4 Calibration, 5510 MHz.....                                        | 20 |
| Plot 16. Radar Type 5 Calibration, 5290 MHz.....                                        | 21 |
| Plot 17. Radar Type 5 Calibration, 5300 MHz.....                                        | 21 |
| Plot 18. Radar Type 5 Calibration, 5510 MHz.....                                        | 21 |
| Plot 19. Radar Type 6 Calibration, 5290 MHz.....                                        | 22 |
| Plot 20. Radar Type 6 Calibration, 5300 MHz.....                                        | 22 |
| Plot 21. Radar Type 6 Calibration, 5510 MHz.....                                        | 22 |
| Plot 22. Occupied Bandwidth, 802.11n 20 MHz, Lower Band, Port JA1 .....                 | 31 |
| Plot 23. Occupied Bandwidth, 802.11n 40 MHz, Upper Band, Port JA1 .....                 | 31 |
| Plot 24. Occupied Bandwidth, 802.11ac 80 MHz, Lower Band, Port JA1 .....                | 31 |
| Plot 25. Initial Channel Availability Check Time, 5300 MHz, 150 seconds, Port JA1 ..... | 32 |
| Plot 26. Radar Burst at the Beginning of CACT, 5300 MHz, 150 seconds, Port JA1 .....    | 34 |
| Plot 27. Radar Burst at the End of CACT, 5300 MHz, 150 seconds, Port JA10 .....         | 36 |
| Plot 28. Channel Closing Transmission Time Aggregate, Port JA1.....                     | 38 |
| Plot 29. Channel Move Time, 1 second, Port JA1.....                                     | 38 |
| Plot 30. Channel Move Time, 5 second, Port JA1.....                                     | 38 |
| Plot 31. Non-Occupancy Period, 30minutes .....                                          | 39 |

## List of Terms and Abbreviations

|              |                                               |
|--------------|-----------------------------------------------|
| AC           | Alternating Current                           |
| ACF          | Antenna Correction Factor                     |
| Cal          | Calibration                                   |
| <i>d</i>     | Measurement Distance                          |
| dB           | Decibels                                      |
| dB $\mu$ A   | Decibels above one <b>microamp</b>            |
| dB $\mu$ V   | Decibels above one <b>microvolt</b>           |
| dB $\mu$ A/m | Decibels above one <b>microamp per meter</b>  |
| dB $\mu$ V/m | Decibels above one <b>microvolt per meter</b> |
| DC           | Direct Current                                |
| E            | Electric Field                                |
| DSL          | Digital Subscriber Line                       |
| ESD          | Electrostatic Discharge                       |
| EUT          | Equipment Under Test                          |
| <i>f</i>     | Frequency                                     |
| FCC          | Federal Communications Commission             |
| GRP          | Ground Reference Plane                        |
| H            | Magnetic Field                                |
| HCP          | Horizontal Coupling Plane                     |
| Hz           | Hertz                                         |
| IEC          | International Electrotechnical Commission     |
| kHz          | kilohertz                                     |
| kPa          | kilopascal                                    |
| kV           | kilovolt                                      |
| LISN         | Line Impedance Stabilization Network          |
| MHz          | Megahertz                                     |
| $\mu$ H      | <b>microhenry</b>                             |
| $\mu$        | <b>microfarad</b>                             |
| $\mu$ s      | <b>microseconds</b>                           |
| PRF          | Pulse Repetition Frequency                    |
| RF           | Radio Frequency                               |
| RMS          | Root-Mean-Square                              |
| TWT          | Traveling Wave Tube                           |
| V/m          | Volts <b>per meter</b>                        |
| VCP          | Vertical Coupling Plane                       |

# I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the ARRIS Group VAP3400, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the VAP3400. ARRIS Group should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the VAP3400, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with ARRIS Group, purchase order number AR1046014. All tests were conducted using measurement procedure ANSI C63.4-2003.

| FCC Reference      | Description                                    | Results   |
|--------------------|------------------------------------------------|-----------|
| 15.407 (h)         | DFS Calibration                                | Compliant |
| 15.407 (h)         | DFS Channel Bandwidth                          | Compliant |
| 15.407 (h)(2)(ii)  | Initial Channel Availability Check Time (CACT) | Compliant |
| 15.407 (h)(2)(ii)  | Radar Burst at the Beginning of CACT           | Compliant |
| 15.407 (h)(2)(ii)  | Radar Burst at the End of CACT                 | Compliant |
| 15.407 (h)(2)(iii) | Channel Move Time and Channel Closing Time     | Compliant |
| 15.407 (h)(2)(iv)  | Non-Occupancy Period                           | Compliant |
| 15.407 (h)(2)      | Statistical Performance Check                  | Compliant |

**Table 1. Executive Summary of EMC Part 15.407 Compliance Testing**

## II. Equipment Configuration

## A. Overview

MET Laboratories, Inc. was contracted by ARRIS Group to perform testing on the VAP3400, under ARRIS Group's purchase order number AR1046014.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the ARRIS Group VAP3400.

The results obtained relate only to the item(s) tested.

|                                       |                                                         |                              |
|---------------------------------------|---------------------------------------------------------|------------------------------|
| <b>Model(s) Tested:</b>               | VAP3400                                                 |                              |
| <b>Model(s) Covered:</b>              | VAP3400                                                 |                              |
| <b>EUT Specifications:</b>            | Primary Power: 120 VAC, 60 Hz                           |                              |
|                                       | FCC ID: ACQ-VAP3400<br>IC: 109AS-VAP3400                |                              |
|                                       | Type of Modulations:                                    | OFDM                         |
|                                       | Equipment Code:                                         | NII                          |
|                                       | Peak RF Output Power:                                   | EIRP >200 mW                 |
|                                       | EUT Frequency Ranges:                                   | 5250-5350 MHz; 5470-5725 MHz |
| <b>Analysis:</b>                      | The results obtained relate only to the item(s) tested. |                              |
| <b>Environmental Test Conditions:</b> | Temperature: 15-35° C                                   |                              |
|                                       | Relative Humidity: 30-60%                               |                              |
|                                       | Barometric Pressure: 860-1060 mbar                      |                              |
| <b>Evaluated by:</b>                  | Andy Shen                                               |                              |
| <b>Report Date(s):</b>                | December 8, 2014                                        |                              |

**Table 2. EUT Summary**

Note: This device can be configured as a Master and also as a Client with radar detection capability. This test report is for the Master.

## B. References

|                                    |                                                                                                                                        |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>CFR 47, Part 15, Subpart B</b>  | Electromagnetic Compatibility: Criteria for Radio Frequency Devices                                                                    |
| <b>CFR 47, Part 15, Subpart E</b>  | Unlicensed National Information Infrastructure Devices (UNII)                                                                          |
| <b>RSS-210, Issue 8, Dec. 2010</b> | Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment                                       |
| <b>ANSI C63.4:2003</b>             | Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz |
| <b>ISO/IEC 17025:2005</b>          | General Requirements for the Competence of Testing and Calibration Laboratories                                                        |

**Table 3. References**

## C. Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick St., Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## D. Description of Test Sample

The ARRIS Group VAP3400, is an 802.11ac based video bridge product designed to operate inside residences and businesses. It includes a 10/100/1000BaseT Ethernet port and a 4x4 5 GHz RF Wi-Fi port. It includes a web GUI for configuration and status and a remote management application based on the TR-069 standard.

- VAP3400 802.11ac 1 Gigabit Ethernet Port Video Access Point (Dongle)
- VAP3400 802.11ac 1 Gigabit Ethernet Port AP (dongle) and CLIENT (dongle) as a pair

## E. Equipment Configuration

All cards, racks, etc., incorporated as part of the EUT is included in the following list.

| Ref. ID | Name / Description | Model Number | Part Number | Serial Number | Revision |
|---------|--------------------|--------------|-------------|---------------|----------|
| N/A     | VAP3400            | VAP3400      | N/A         | M91422SA05Q   | N/A      |
| N/A     | VAP3400            | VAP3400      | N/A         | M91422SA0M44  | N/A      |

Table 4. Equipment Configuration

## F. Support Equipment

ARRIS Group supplied support equipment necessary for the operation and testing of the VAP3400. All support equipment supplied is listed in the following Support Equipment List.

| Ref. ID | Name / Description | Manufacturer             | Model Number |
|---------|--------------------|--------------------------|--------------|
| N/A     | AC Adapter         | Asian Power Devices INC, | WA-12M12FU   |
| N/A     | AC Adapter         | Asian Power Devices INC, | WA-12M12FU   |
| N/A     | ETHERNET CABLE     | N/A                      | N/A          |
| N/A     | ETHERNET CABLE     | N/A                      | N/A          |

Table 5. Support Equipment

## G. Ports and Cabling Information

| Ref. ID | Port Name on EUT | Cable Description             | Qty. | Length (m) | Shielded (Y/N) | Termination Point |
|---------|------------------|-------------------------------|------|------------|----------------|-------------------|
| 1       | Ethernet RJ-45   | Standard Cat-5 Ethernet cable | 1    | 1.8        | Y              | N/A               |
| 2       | VDC Power        | Included power supply         | 1    | 1.8        | Y              | N/A               |

Table 6. Ports and Cabling Information

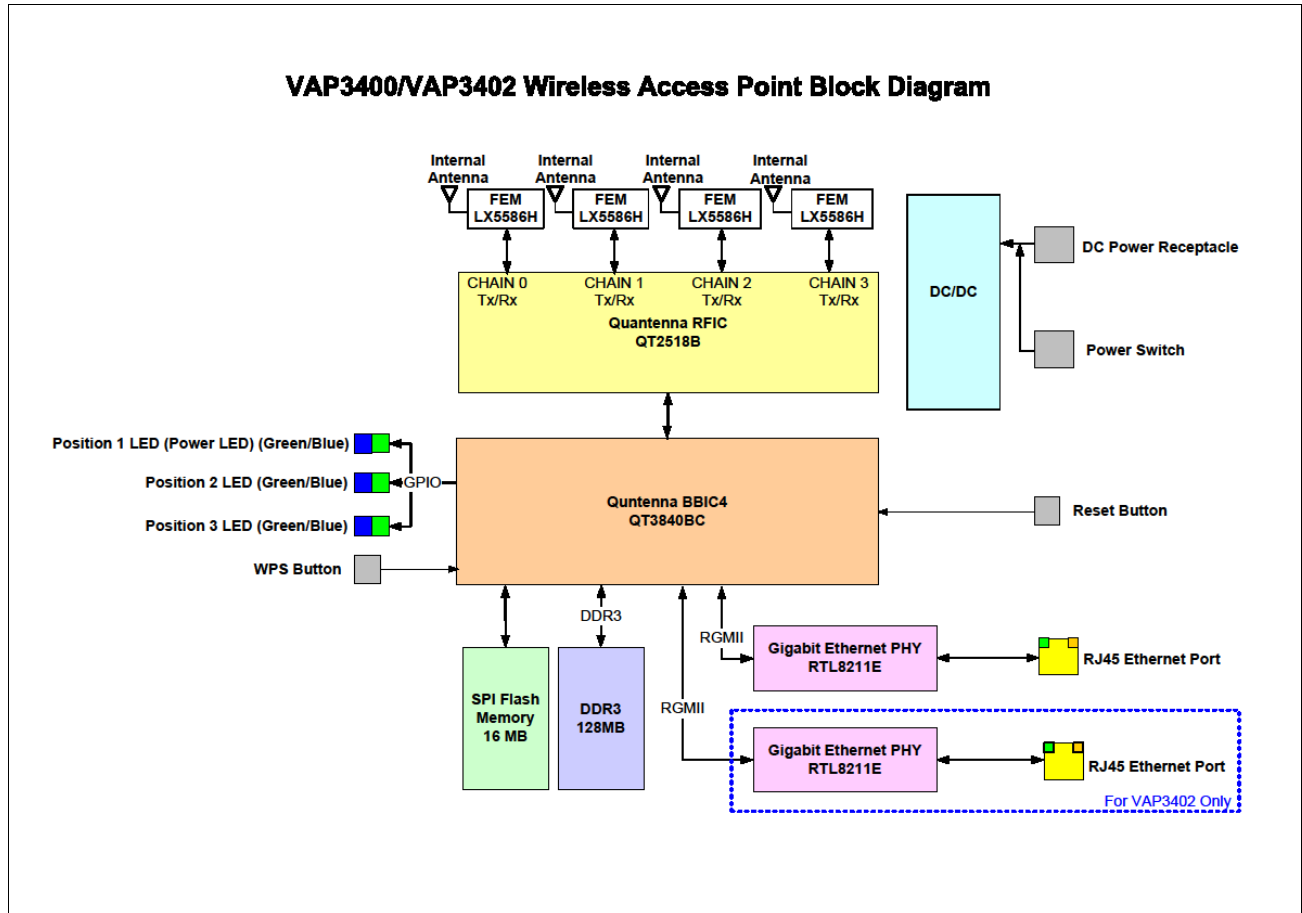


Figure 1. Block Diagram of Equipment Configuration

## H. Mode of Operation

The VAP3400 will automatically configure itself as either an AP or a STA as part of its power-on and initialization process.

### AP mode:


The VAP3400 will bridge IP packets from a source through the Ethernet port and then out the RF WiFi interface. In order to operate as an AP it must be connected via Ethernet to a router/gateway or other device that supports DHCP.

### STA mode:

The VAP3400 will bridge IP packets from a source through the RF Wi-Fi interface and then out the Ethernet port. In order to operate as a STA it must be associated to the AP and the AP must be connected to a DHCP server (router/gateway or other equipment).

The main application for the VAP3400 is for the IPTV network operators to be able to use 802.11n wireless connectivity to distribute video within the home. Key benefits of doing so are reduced installation time, easier installation and reduced clutter (no wiring).

The typical home setup will consist of one or more wireless STBs (VIP2200W) that communicates wirelessly with the access point (VAP3400). The AP, in turn, connects to the IPTV network through a residential gateway. There may be other wired STB's present (e.g. VIP2200/ VIP2250) in the LAN. Further, the same VAP3400 device can operate as either an AP, when connected to the residential gateway or as a client, when connected to a non-wireless STB.

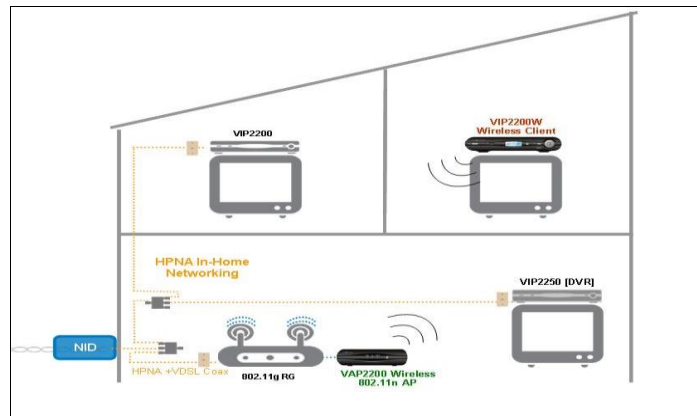

## **I. Method of Monitoring EUT Operation**

The VAP3400's Ethernet port has standard link and traffic LEDs that can be monitored. The Wi-Fi status LED on the front panel indicates the relative signal strength being received by the STA on the other end of the RF link. Green is good, cyan is minimally acceptable, blue is bad.

## **J. Modifications**

### **a) Modifications to EUT**

No modifications were made to the EUT.

### **b) Modifications to Test Standard**

No modifications were made to the test standard.

## **K. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to ARRIS Group upon completion of testing.

### **III. DFS Requirements and Radar Waveform Description & Calibration**

## A. DFS Requirements

| Requirement                            | Operational Mode |                                |                             |
|----------------------------------------|------------------|--------------------------------|-----------------------------|
|                                        | Master           | Client Without Radar Detection | Client With Radar Detection |
| <i>Non-Occupancy Period</i>            | Yes              | Not required                   | Yes                         |
| <i>DFS Detection Threshold</i>         | Yes              | Not required                   | Yes                         |
| <i>Channel Availability Check Time</i> | Yes              | Not required                   | Not required                |
| <i>U-NII Detection Bandwidth</i>       | Yes              | Not required                   | Yes                         |

Table 7. Applicability of DFS Requirements Prior to Use of a Channel

| Requirement                                                                                                                                                                                                                                                                                                                                                  | Operational Mode                                    |                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                              | Master Device or Client with Radar Detection        | Client Without Radar Detection                       |
| <i>DFS Detection Threshold</i>                                                                                                                                                                                                                                                                                                                               | Yes                                                 | Not required                                         |
| <i>Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                                                     | Yes                                                 | Yes                                                  |
| <i>Channel Move Time</i>                                                                                                                                                                                                                                                                                                                                     | Yes                                                 | Yes                                                  |
| <i>U-NII Detection Bandwidth</i>                                                                                                                                                                                                                                                                                                                             | Yes                                                 | Not required                                         |
| <b>Additional requirements for devices with multiple bandwidth modes</b>                                                                                                                                                                                                                                                                                     | <b>Master Device or Client with Radar Detection</b> | <b>Client Without Radar Detection</b>                |
| <i>U-NII Detection Bandwidth and Statistical Performance Check</i>                                                                                                                                                                                                                                                                                           | All BW modes must be tested                         | Not required                                         |
| <i>Channel Move Time and Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                               | Test using widest BW mode available                 | Test using the widest BW mode available for the link |
| <i>All other tests</i>                                                                                                                                                                                                                                                                                                                                       | Any single BW mode                                  | Not required                                         |
| <b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. |                                                     |                                                      |

Table 8. Applicability of DFS Requirements During Normal Operation

| Maximum Transmit Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Value<br>(See Notes 1, 2, and 3) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| EIRP $\geq$ 200 milliwatt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -64 dBm                          |
| EIRP < 200 milliwatt and<br>power spectral density < 10 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -62 dBm                          |
| EIRP < 200 milliwatt that do not meet the power spectral<br>density requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -64 dBm                          |
| <p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note3:</b> EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p> |                                  |

Table 9. DFS Detection Thresholds for Master or Client Devices Incorporating DFS

| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Value                                                                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <i>Non-occupancy period</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Minimum 30 minutes                                                                                                    |
| <i>Channel Availability Check Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 60 seconds                                                                                                            |
| <i>Channel Move Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10 seconds<br>See Note 1.                                                                                             |
| <i>Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 200 milliseconds + an<br>aggregate of 60<br>milliseconds over<br>remaining 10 second<br>period.<br>See Notes 1 and 2. |
| <i>U-NII Detection Bandwidth</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Minimum 100% of the U-<br>NII 99% transmission<br>power bandwidth. See<br>Note 3.                                     |
| <p><b>Note 1:</b> <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 2:</b> The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p><b>Note 3:</b> During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> |                                                                                                                       |

Table 10. DFS Response Requirement Values

## B. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

### Short Pulse Radar Test Waveforms

| Radar Type                                                                                                                                  | Pulse Width (μsec) | PRI (μsec)                                                                                                                                                    | Number of Pulses                                                                                                              | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------|
| 0                                                                                                                                           | 1                  | 1428                                                                                                                                                          | 18                                                                                                                            | See Note 1                                 | See Note 1               |
| 1                                                                                                                                           | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a                                                                     | Roundup $\left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$ | 60%                                        | 30                       |
|                                                                                                                                             |                    | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A |                                                                                                                               |                                            |                          |
| 2                                                                                                                                           | 1-5                | 150-230                                                                                                                                                       | 23-29                                                                                                                         | 60%                                        | 30                       |
| 3                                                                                                                                           | 6-10               | 200-500                                                                                                                                                       | 16-18                                                                                                                         | 60%                                        | 30                       |
| 4                                                                                                                                           | 11-20              | 200-500                                                                                                                                                       | 12-16                                                                                                                         | 60%                                        | 30                       |
| Aggregate (Radar Types 1-4)                                                                                                                 |                    |                                                                                                                                                               |                                                                                                                               | 80%                                        | 120                      |
| <b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. |                    |                                                                                                                                                               |                                                                                                                               |                                            |                          |

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

### Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Bursts | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|-------------------|------------|-----------------------------|------------------|--------------------------------------------|----------------|
| 5          | 50-100             | 5-20              | 1000-2000  | 1-3                         | 8-20             | 80%                                        | 30             |

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst\_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst\_Count. Each interval is of length  $(12,000,000 / \text{Burst\_Count})$  microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst\_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

### A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst\_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

## Graphical Representation of a Long Pulse radar Test Waveform

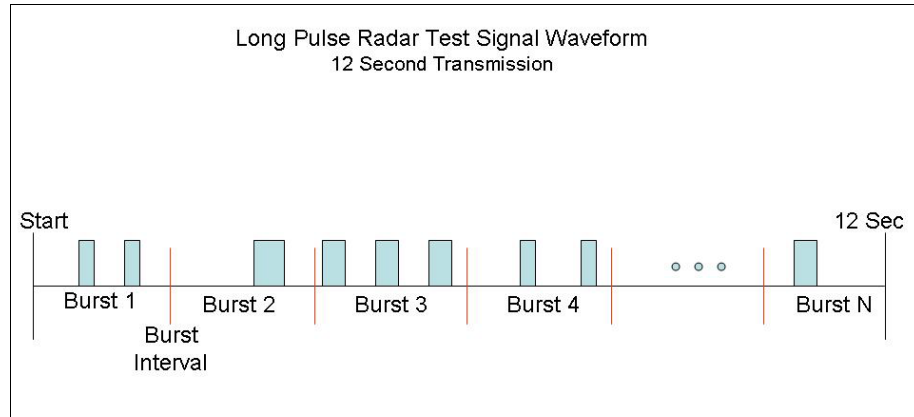


Figure 2. Long Pulse Radar Test Signal Waveform

## Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--------------------------------------------|----------------|
| 6          | 1                  | 333        | 9              | .333               | 300                            | 70%                                        | 30             |

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected<sup>1</sup> from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

### C. Radar Waveform Calibration

The following equipment setup was used to calibrate the radiated Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer's resolution bandwidth (RBW) was set to 3 MHz and the video bandwidth (VBW) was set to 3 MHz. The calibration setup is diagrammed in Figure 3, and the radar test signal generator is shown in Photograph 1.



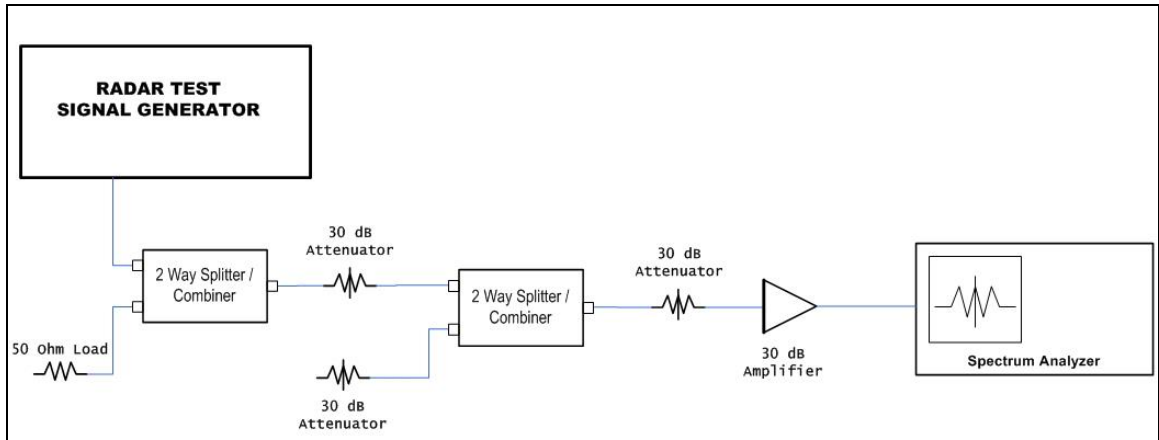


Figure 3. Calibration Test setup

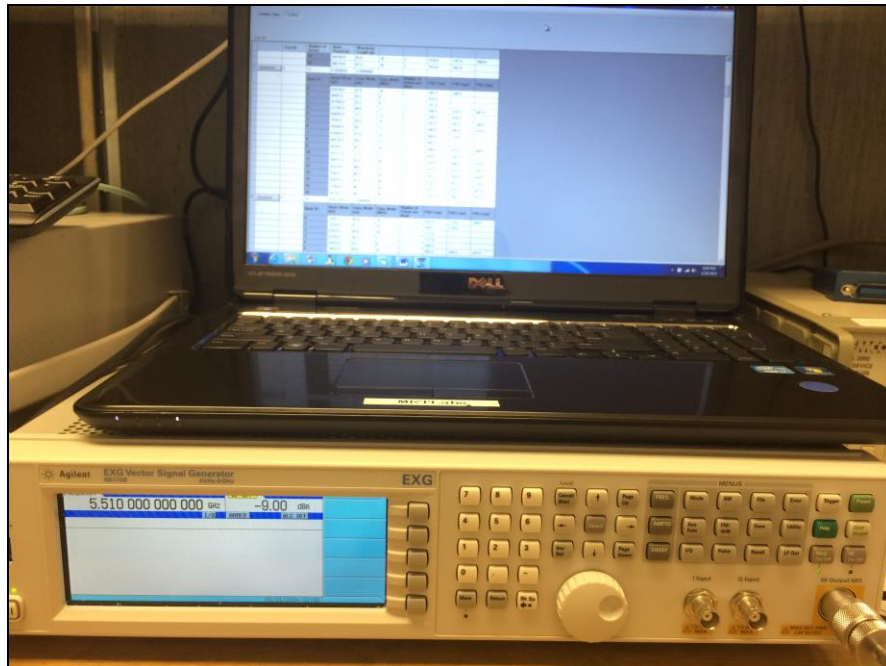


Photograph 1. DFS Radar Test Signal Generator


## Radar Waveform Calibration, Type 0

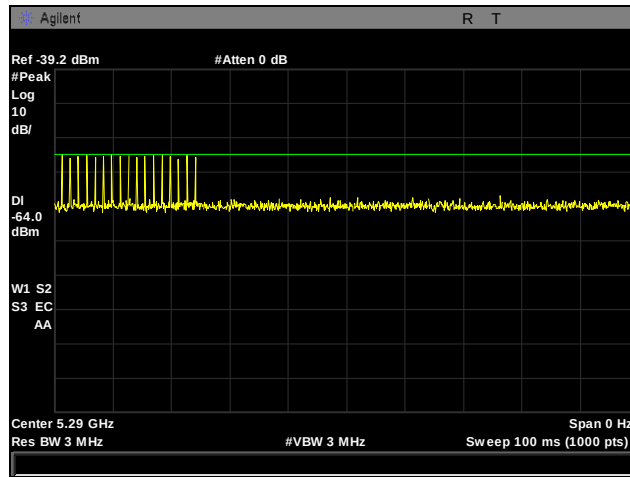

Plot 1. Radar Type 0 Calibration, 5290 MHz

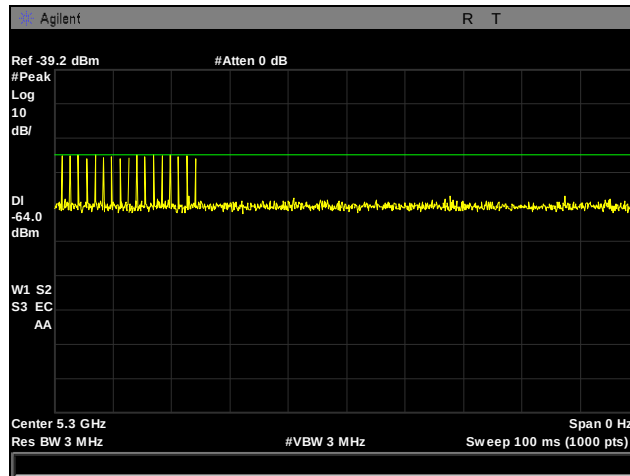


Plot 2. Radar Type 0 Calibration, 5300 MHz

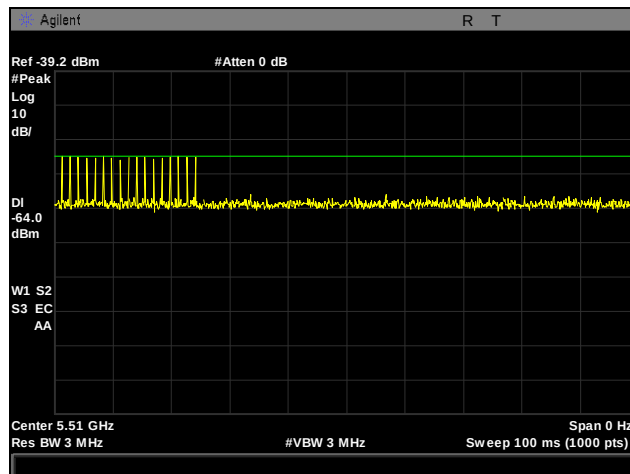


Plot 3. Radar Type 0 Calibration, 5510 MHz


## Radar Waveform Calibration, Type 1

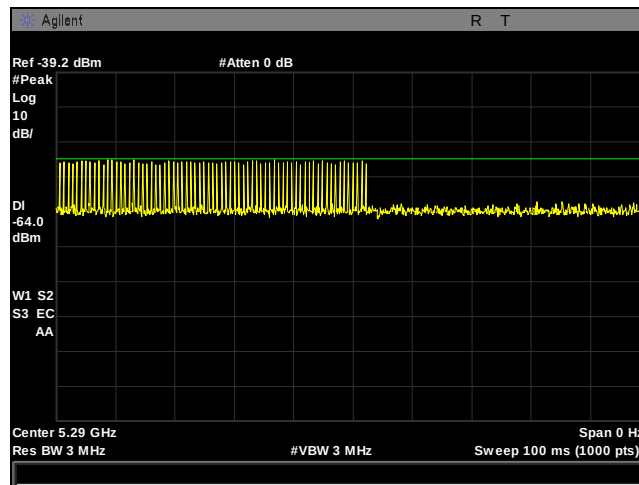

Plot 4. Radar Type 1 Calibration, 5290 MHz

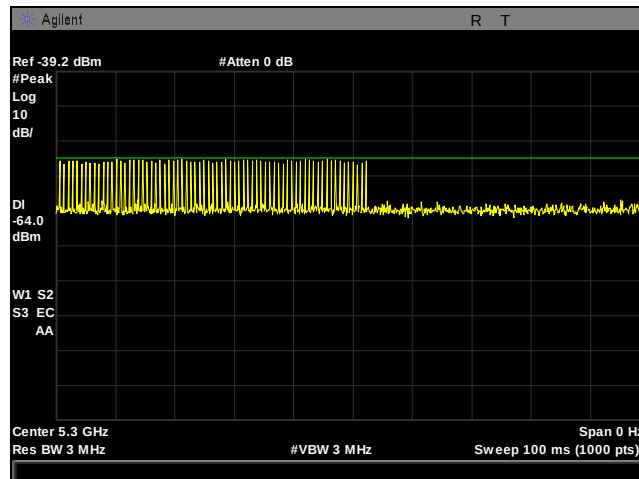


Plot 5. Radar Type 1 Calibration, 5300 MHz

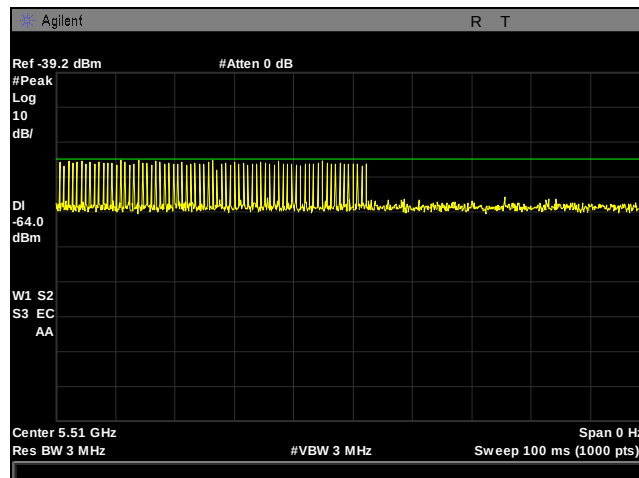


Plot 6. Radar Type 1 Calibration, 5510 MHz


## Radar Waveform Calibration, Type 2

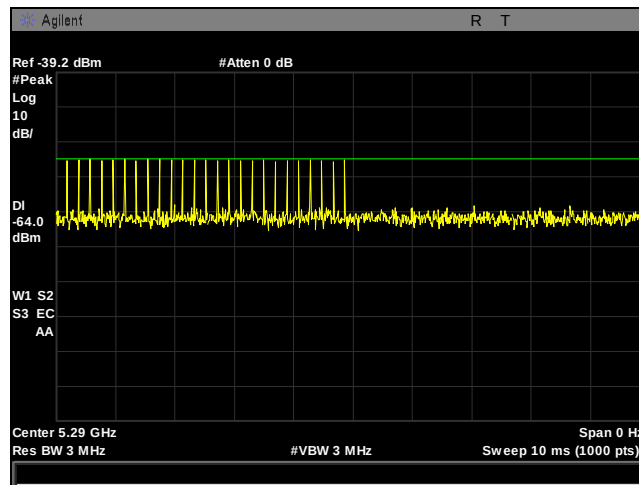

Plot 7. Radar Type 2 Calibration, 5290 MHz

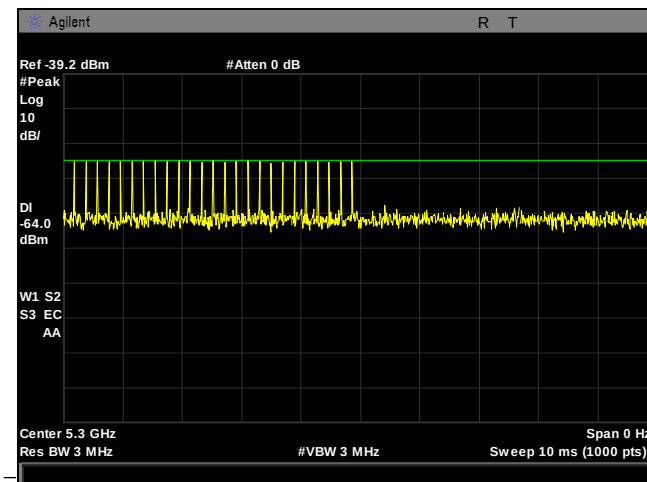


Plot 8. Radar Type 2 Calibration, 5300 MHz

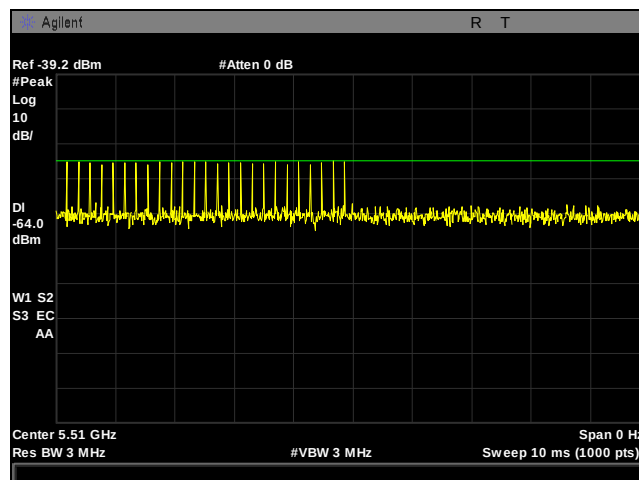


Plot 9. Radar Type 2 Calibration, 5510 MHz


## Radar Waveform Calibration, Type 3

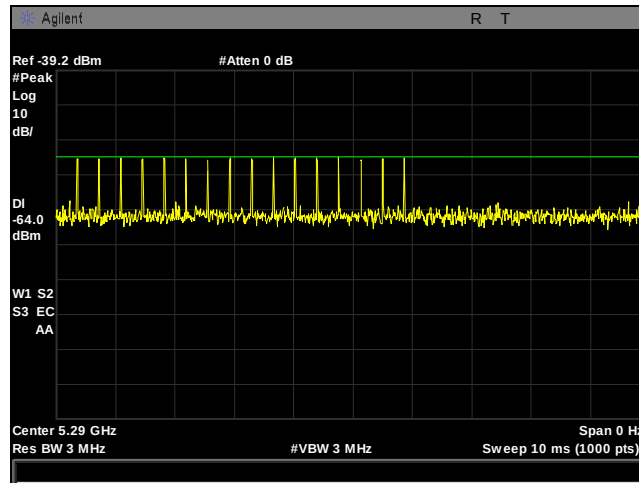

Plot 10. Radar Type 3 Calibration, 5290 MHz

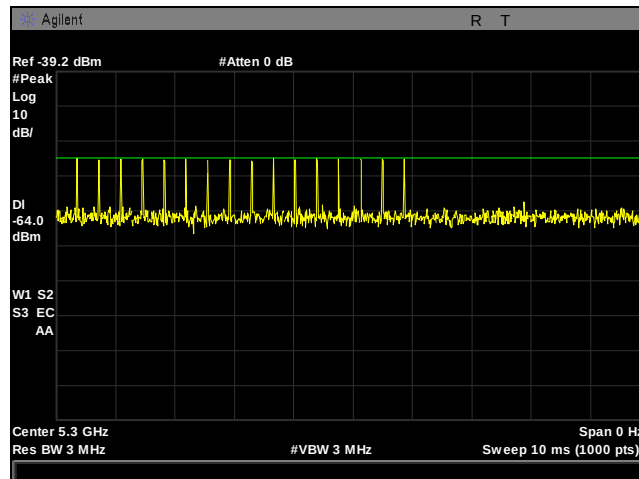


Plot 11. Radar Type 3 Calibration, 5300 MHz

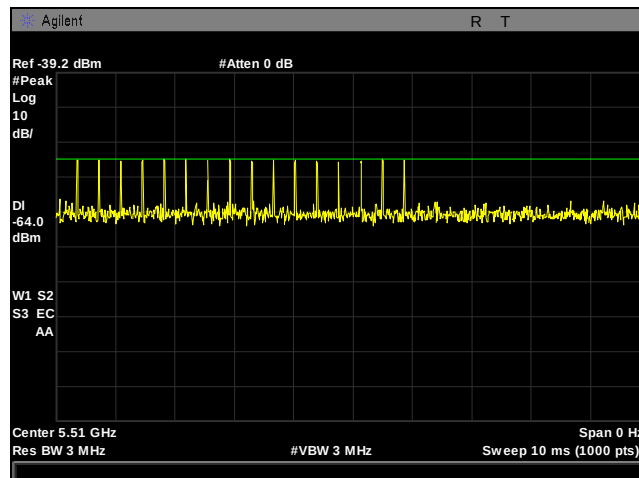


Plot 12. Radar Type 3 Calibration, 5510 MHz


## Radar Waveform Calibration, Type 4

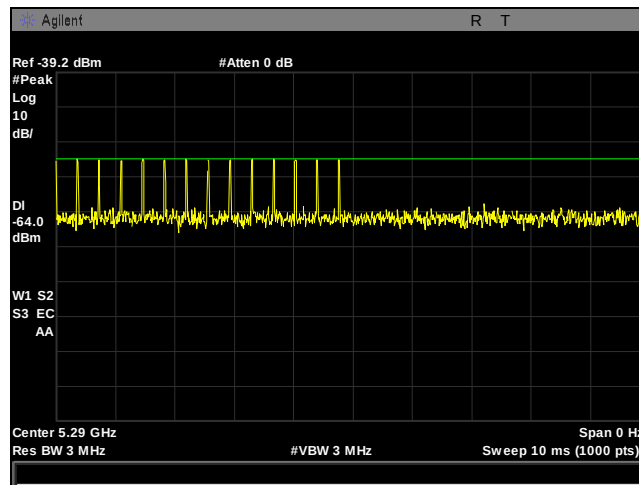

Plot 13. Radar Type 4 Calibration, 5290 MHz

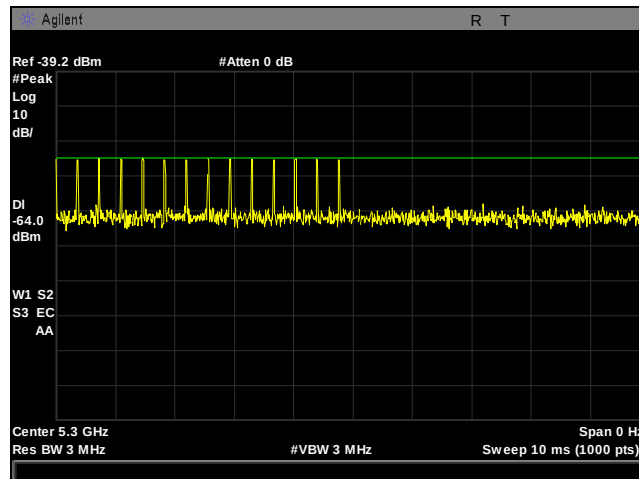


Plot 14. Radar Type 4 Calibration, 5300 MHz

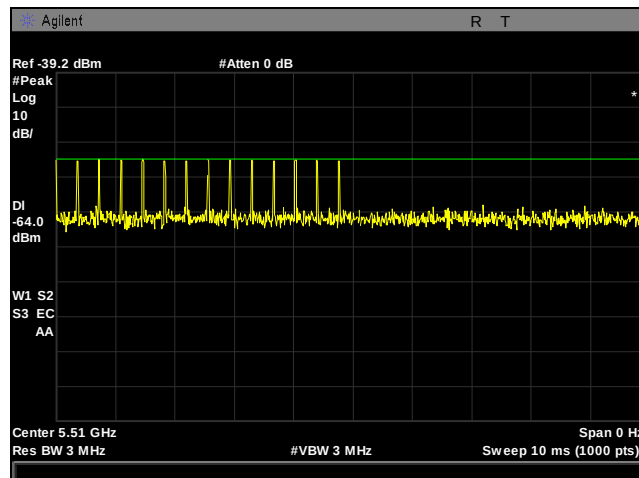


Plot 15. Radar Type 4 Calibration, 5510 MHz


## Radar Waveform Calibration, Type 5

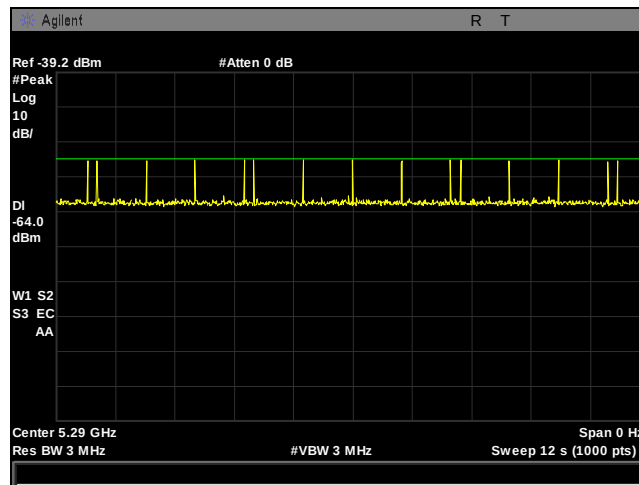

Plot 16. Radar Type 5 Calibration, 5290 MHz

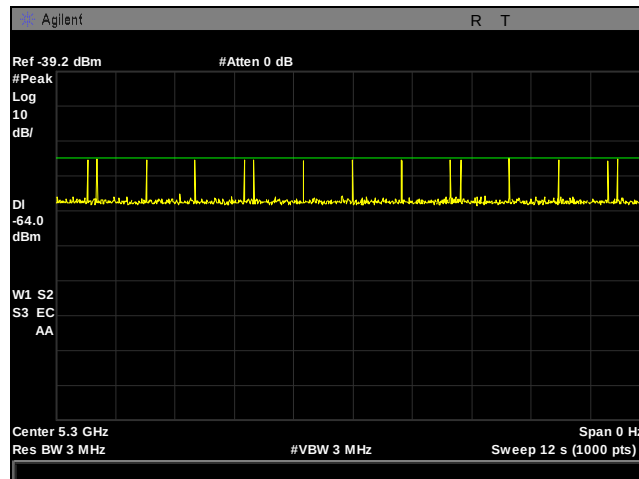


Plot 17. Radar Type 5 Calibration, 5300 MHz

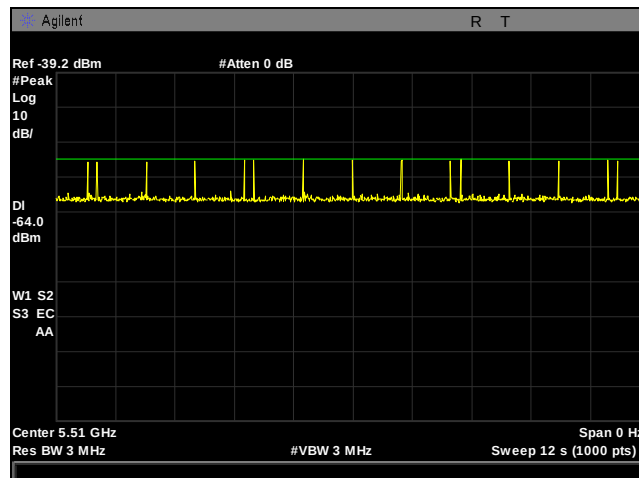


Plot 18. Radar Type 5 Calibration, 5510 MHz


## Radar Waveform Calibration, Type 6

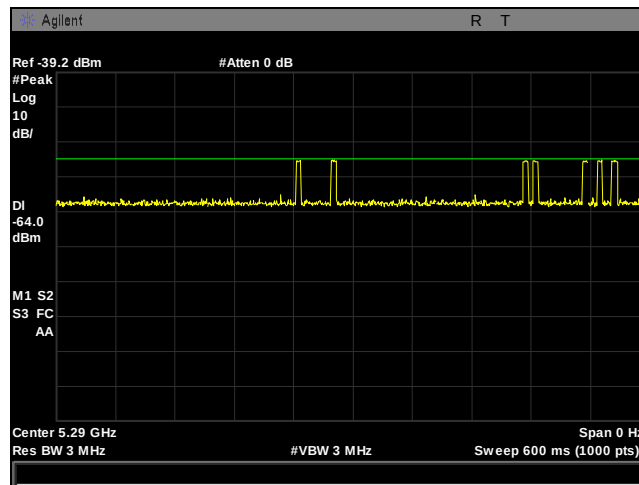

Plot 19. Radar Type 6 Calibration, 5290 MHz

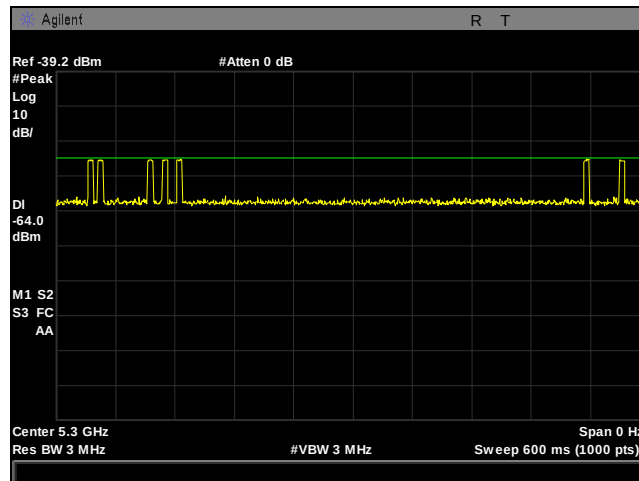

Plot 20. Radar Type 6 Calibration, 5300 MHz

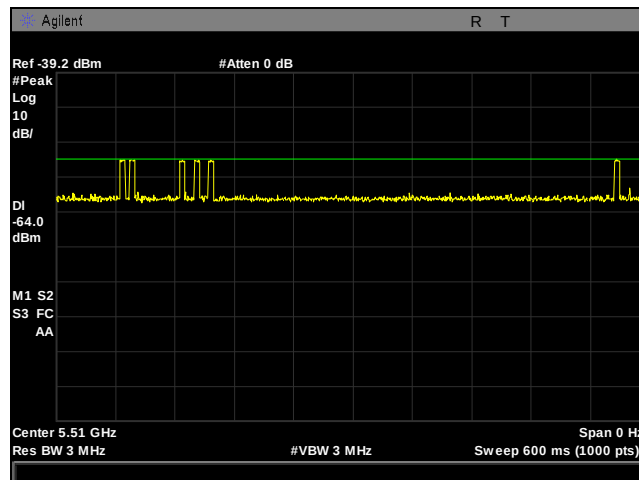

Plot 21. Radar Type 6 Calibration, 5510 MHz

## **IV. DFS Test Procedure and Test Results**

## A. DFS Test Setup

1. A spectrum analyzer is used as a monitor to verify that the Unit Under Test (UUT) has vacated the Channel within the Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and subsequent Channel move. It is also used to monitor UUT transmissions during the Channel Availability Check Time.
2. The test setup, which consists of test equipment and equipment under test (EUT), is diagrammed in Figure 4 and pictured in Photograph 2.

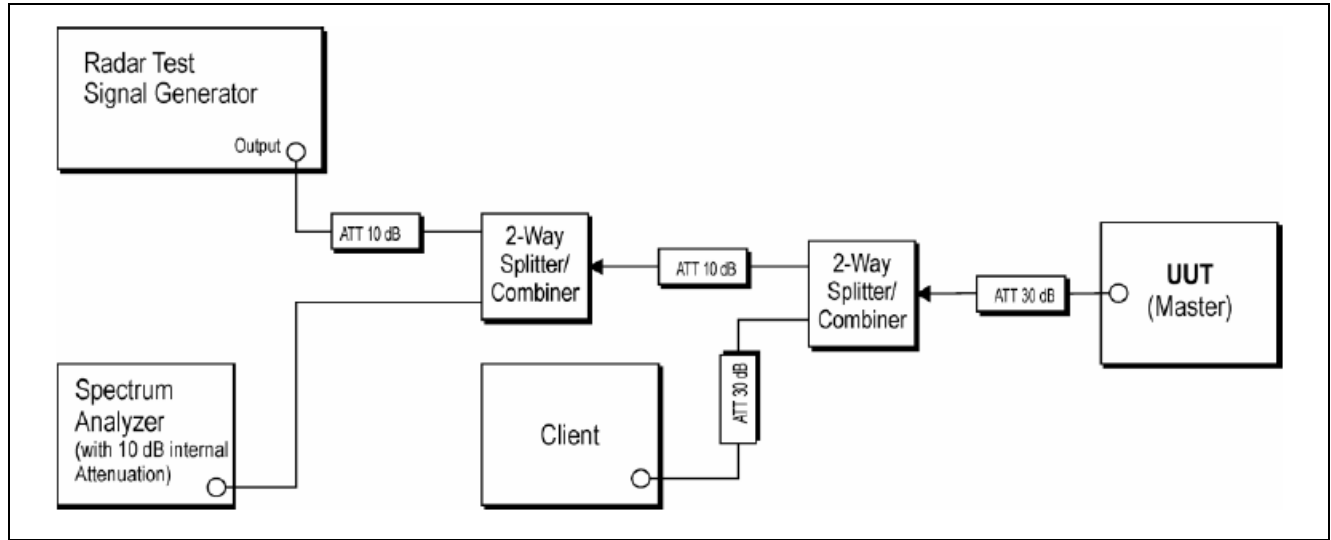


Figure 4. Test Setup Diagram



Photograph 2. DFS, Test Setup

## **B. UNII Detection Bandwidth**

**Test Requirement(s):** § 15.407 A minimum 100% detection rate is required across an EUT's 99% bandwidth.

**Test Procedure:** All UNII channels for this device have identical channel bandwidths.

A single burst of the short pulse radar type 1 is produced at 5500 MHz, 5290MHz, and 5300MHz at the -63dBm test level. The UUT is set up as a standalone device (no associated client, and no data traffic).

A single radar burst is generated for a minimum of 10 trials, and the response of the UUT is recorded. The UUT must detect the radar waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted  $F_H$ .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted  $F_L$ .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

**Test Results:** The EUT was compliant with the requirements of this section.

**Test Engineer:** Andy Shen

**Test Date:** 09/18/14

## UNII Detection Bandwidth – Test Results

| EUT Frequency- 5290MHz |                                                     |   |   |   |   |   |   |   |   |    |                    |
|------------------------|-----------------------------------------------------|---|---|---|---|---|---|---|---|----|--------------------|
| Radar Frequency (MHz)  | DFS Detection Trials (1=Detection, 0= No Detection) |   |   |   |   |   |   |   |   |    | Detection Rate (%) |
|                        | 1                                                   | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |                    |
| 5252                   | 0                                                   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  |
| 5253.9(FL)             | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5254                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5255                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5256                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5257                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5258                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5259                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 6260                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5261                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5262                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5263                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5264                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5265                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5266                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5267                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5268                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5269                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5270                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5271                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5272                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5273                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5274                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5275                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5276                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5277                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5278                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5279                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5280                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5281                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5282                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5283                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5284                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5285                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5286                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5287                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5288                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5289                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5290                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5291                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5292                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5293                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5294                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5295                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5296                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5297                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5298                   | 1                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |

| EUT Frequency- 5290MHz                                                                 |   |   |   |   |   |   |   |   |   |    |                    |
|----------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
| DFS Detection Trials (1=Detection, 0= No Detection)                                    |   |   |   |   |   |   |   |   |   |    |                    |
| Radar Frequency (MHz)                                                                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Rate (%) |
| 5299                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5300                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5301                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5302                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5303                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5304                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5305                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5306                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5307                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5308                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5309                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5310                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5311                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5312                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5313                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5314                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5315                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5316                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5317                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5318                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5319                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5320                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5321                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5322                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5323                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5324                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5325                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5326                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5327                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5328                                                                                   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5329(FH)                                                                               | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5330                                                                                   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  |
| Overall Detection Percentage                                                           |   |   |   |   |   |   |   |   |   |    | %                  |
| Detection Bandwidth = $f_h - f_l = 5329\text{MHz} - 5253.9\text{MHz} = 75.1\text{MHz}$ |   |   |   |   |   |   |   |   |   |    |                    |
| EUT 99% Bandwidth = 74.0825                                                            |   |   |   |   |   |   |   |   |   |    |                    |
| OBW* 100% = 74.0825                                                                    |   |   |   |   |   |   |   |   |   |    |                    |

Table 11. UNII Detection Bandwidth, Test Results, 5290 MHz, 80 MHz


| EUT Frequency- 5300MHz                                                                      |   |   |   |   |   |   |   |   |   |    |                    |
|---------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
| DFS Detection Trials (1=Detection, 0= No Detection)                                         |   |   |   |   |   |   |   |   |   |    |                    |
| Radar Frequency (MHz)                                                                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Rate (%) |
| 5289                                                                                        | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  |
| 5290.43 (FL)                                                                                | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5291                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5292                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5293                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5294                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5295                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5296                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5297                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5298                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5299                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5300                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5301                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5302                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5303                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5304                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5305                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5306                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5307                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5308                                                                                        | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5309.75 (FH)                                                                                | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5310                                                                                        | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 60                 |
| Overall Detection Percentage                                                                |   |   |   |   |   |   |   |   |   |    | %                  |
| Detection Bandwidth = $f_h - f_l = 5309.75\text{MHz} - 5290.43\text{MHz} = 19.32\text{MHz}$ |   |   |   |   |   |   |   |   |   |    |                    |
| EUT 99% Bandwidth = 19.14MHz                                                                |   |   |   |   |   |   |   |   |   |    |                    |
| OBW* 100% = 19.14                                                                           |   |   |   |   |   |   |   |   |   |    |                    |

Table 12. UNII Detection Bandwidth, Test Results, 5300 MHz, 20 MHz


| EUT Frequency- 5510MHz                                                                        |   |   |   |   |   |   |   |   |   |    |                    |
|-----------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
| DFS Detection Trials (1=Detection, 0= No Detection)                                           |   |   |   |   |   |   |   |   |   |    |                    |
| Radar Frequency (MHz)                                                                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Rate (%) |
| 5490                                                                                          | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  |
| 5491.535(FL)                                                                                  | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5492                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5493                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5494                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5495                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5496                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5497                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5498                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1  | 90                 |
| 5499                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5500                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5501                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5502                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5503                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5504                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5505                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5506                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5507                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5508                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5509                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5510                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5511                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5512                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5513                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1  | 90                 |
| 5514                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5515                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5516                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5517                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5518                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5519                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5520                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5521                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5522                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5523                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5524                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5525                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5526                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5527                                                                                          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5528.465(FH)                                                                                  | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5529                                                                                          | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  |
| Overall Detection Percentage                                                                  |   |   |   |   |   |   |   |   |   |    | %                  |
| Detection Bandwidth = $f_h - f_l = 5528.465\text{MHz} - 5491.535\text{MHz} = 36.93\text{MHz}$ |   |   |   |   |   |   |   |   |   |    |                    |
| EUT 99% Bandwidth = 36.93                                                                     |   |   |   |   |   |   |   |   |   |    |                    |
| OBW* 100% = 36.93                                                                             |   |   |   |   |   |   |   |   |   |    |                    |

Table 13. UNII Detection Bandwidth, Test Results, 5510 MHz, 40 MHz


## UNII Detection Bandwidth Plots

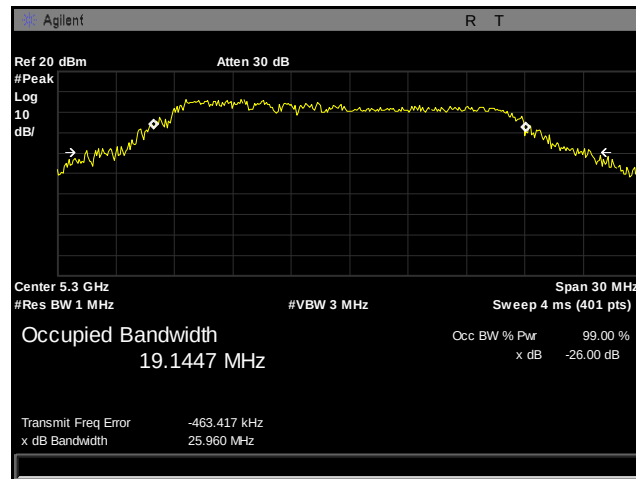

Plot 22. Occupied Bandwidth, 802.11n 20 MHz, Lower Band, Port JA1

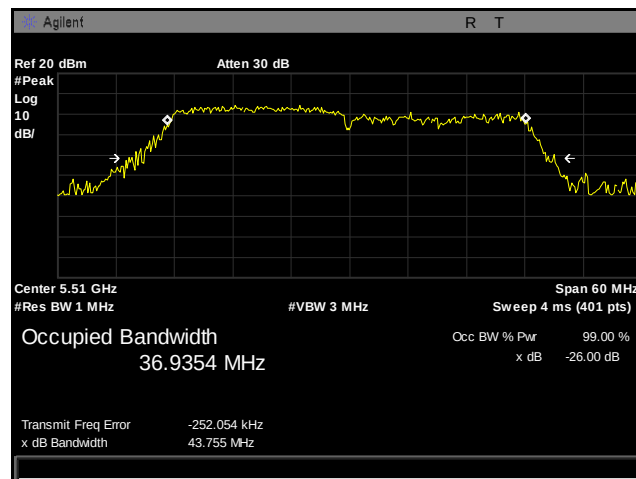

Plot 23. Occupied Bandwidth, 802.11n 40 MHz, Upper Band, Port JA1

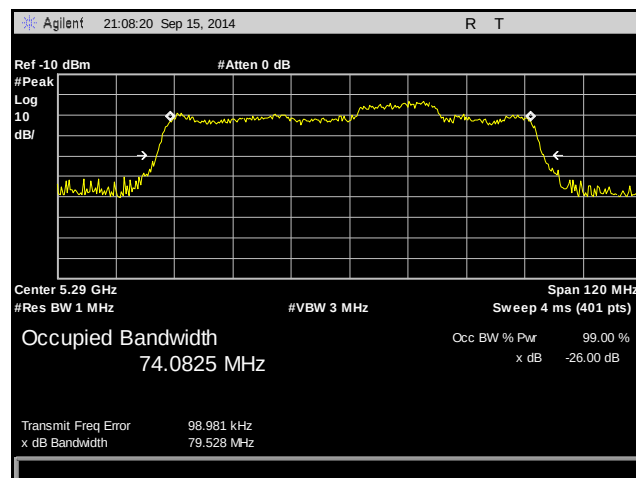

Plot 24. Occupied Bandwidth, 802.11ac 80 MHz, Lower Band, Port JA1

## C. Initial Channel Availability Check Time

**Test Requirements:** § 15.407 The Initial Channel Availability Check Time tests that the UUT does not emit beacon, control, or data signals on the test channel until the power-up sequence has been completed and the U-NII device has checked for radar waveforms, for one minute, on the test channel. This test does not use any of the radar waveforms and only needs to be performed once.


The UUT should not make any transmissions over the test channel, for at least 1 minute after completion of its power-on cycle.

**Test Procedure:** The U-NII device is powered on and instructed to operate at 5300 MHz. At the same time the UUT is powered on, the spectrum analyzer is set to 5300MHz with a zero span and a 2.5 minute sweep time. The analyzer is triggered at the same time power is applied to the U-NII device.

**Test Results:** The Equipment was compliant with § 15.407 Initial Channel Availability Check Time. Calibrate Radar waveform injected into the AP, when the AP detected the radar, AP and Client moved out of the DFS channel.

**Test Engineer:** Andy Shen

**Test Date:** 09/17/14

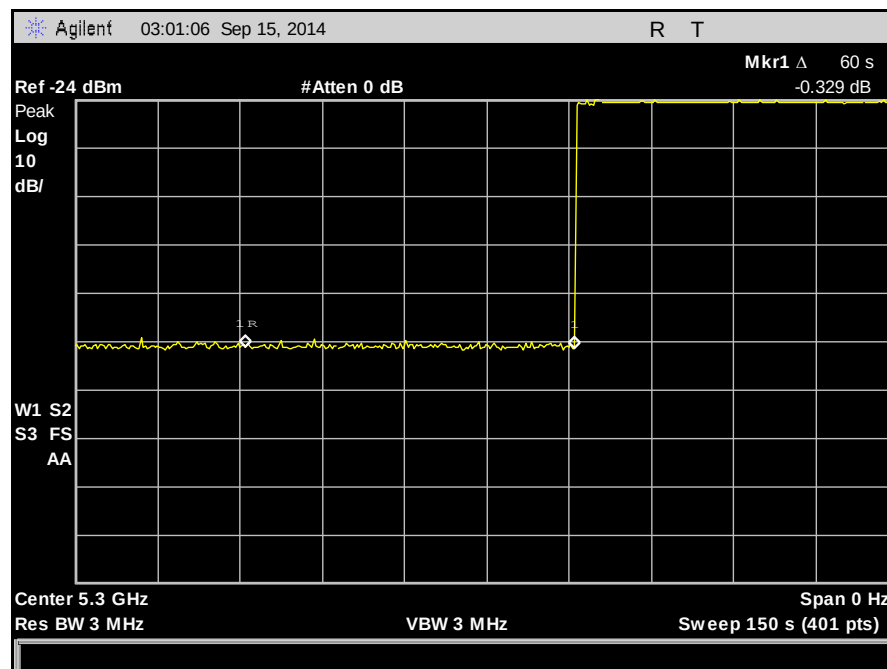

Plot 25. Initial Channel Availability Check Time, 5300 MHz, 150 seconds, Port JA1

## **D. Radar Burst at the Beginning of Channel Availability Check Time**

**Test Requirements:** § 15.407 A Radar Burst at the Beginning of the Channel Availability Check Time tests that the UUT does not emit beacon, control, or data signals on the test Channel if it has detected a radar burst during that time period until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-63dBm) occurs at the beginning of the Channel Availability Check Time.

**Test Procedure:** The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds.

A single Burst of short pulse radar type 1, at -63 dBm, will commence within a 6 second window starting at T1.

Visual indication of the UUT of successful detection of the radar Burst will be recorded and reported. Observation of transmission at 5300MHz will continue for 2.5 minutes after the radar Burst has been generated.

Verify that during the 2.5 minute measurement window, no UUT transmissions occur at 5300MHz.


**Test Results** Plot 26 below indicates that there were no UUT transmissions during the 2.5 minute measurement window when a radar burst was injected 6 seconds into the CACT. Therefore, the UUT detected the presence of a radar during the CACT and moved away from that channel.

The equipment was compliant with § 15.407 Radar Burst at the Beginning of the Channel Availability Check Time.

**Test Engineer:** Andy Shen

**Test Date:** 09/17/14

## Radar Burst at the Beginning of Channel Availability Check Time – Plot

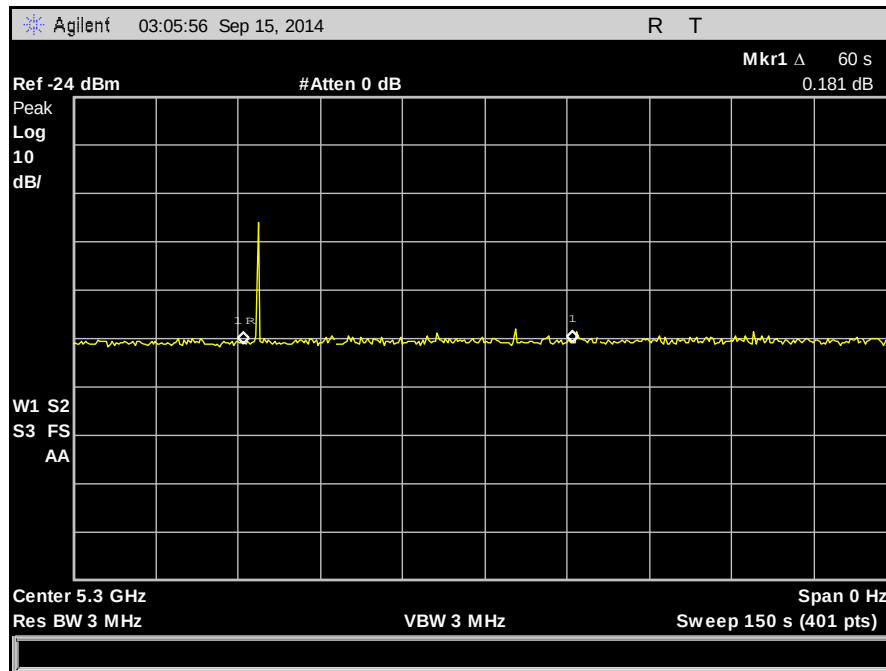

Plot 26. Radar Burst at the Beginning of CACT, 5300 MHz, 150 seconds, Port JA1

## **E. Radar Burst at the End of Channel Availability Check Time**

**Test Requirements:** § 15.407 A Radar Burst at the End of the Channel Availability Check Time tests that the UUT does not emit beacon, control, or data signals on the test Channel if it has detected a radar burst during that time period until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-63dBm) occurs at the end of the Channel Availability Check Time.

**Test Procedure:** The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-63dBm) occurs at the end of the Channel Availability Check Time.

The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds.

A single Burst of short pulse of radar type 1 at -63 dBm will commence within a 6 second window starting at T1+ 54 seconds.

Visual indication on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5300MHz will continue for 2.5 minutes after the radar Burst has been generated.

Verify that during the 2.5 minute measurement window no UUT transmissions occurred at 5300MHz.


**Test Results:** Plot 27 indicates that no UUT transmissions occurred during the 2.5 minute measurement window when a radar burst was injected 2 seconds before the end of the CACT. Therefore, the UUT detected the presence of a radar and moved away from that channel.

The equipment was compliant with § 15.407 Radar Burst at the End of the Channel Availability Check Time.

**Test Engineer:** Andy Shen

**Test Date:** 09/17/14

## Radar Burst at the End of Channel Availability Check Time – Plot

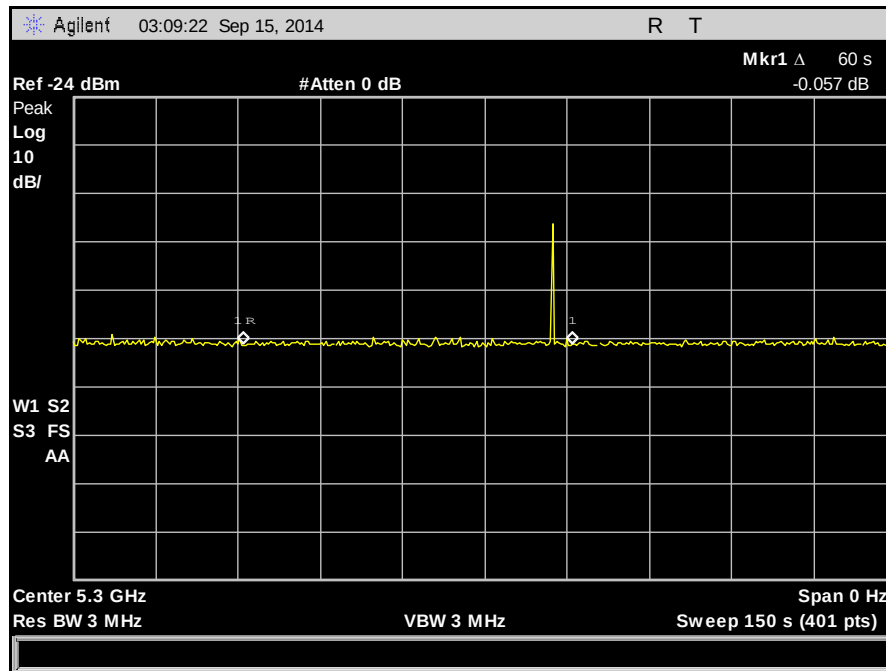

Plot 27. Radar Burst at the End of CACT, 5300 MHz, 150 seconds, Port JA10

## **F. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time, and Non-Occupancy Period**

**Test Requirements:** § 15.407 (Refer to DFS Response Requirement Values table in section III-A of this report.) The UUT shall continuously monitor for radar transmissions in the operating test channel. When a radar burst occurs in the test channel, it has 10 seconds to move to another channel. This 10 second window is termed Channel Move Time (CMT).

When a radar burst occurs, the UUT has 200 milliseconds, plus an aggregate of 60 milliseconds over remaining 10 second period, to cease transmission in the operating test channel. This 200 ms + 60 ms over remaining 10 second period requirement is termed Channel Closing Transmission Time (CCT).

After radar burst and subsequent move to another channel, the UUT shall not resume transmission, on the channel it moved from, for a period of 30 minutes. This requirement is termed Non-Occupancy Period (NOP).

**Test Procedure:** These tests define how the following DFS parameters are verified during In-Service Monitoring: Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5300 MHz. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at -63dBm.


Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time results to the limits defined in the *DFS Response Requirement Values table*.

**Test Results:** The EUT was compliant with § 15.407 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time, and Non-Occupancy Period. Calibrate Radar waveform injected into the AP, when the AP detected the radar, AP and Client moved out of the DFS channel.


**Test Engineer:** Andy Shen

**Test Date:** 09/17/14


## Channel Move Time – Plots

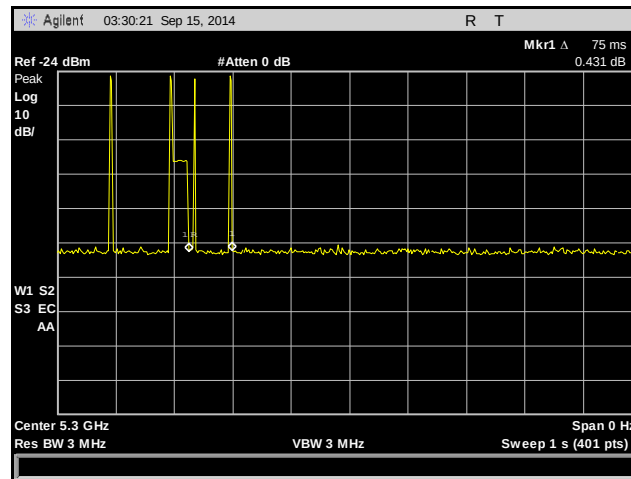

Plot 28. Channel Closing Transmission Time Aggregate, Port JA1

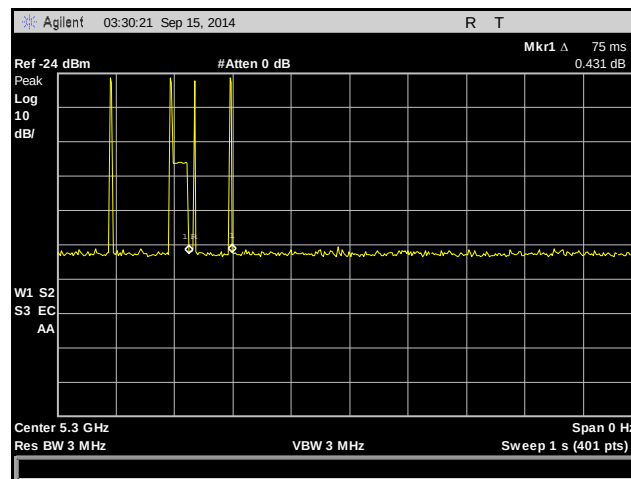


Plot 29. Channel Move Time, 1 second, Port JA1

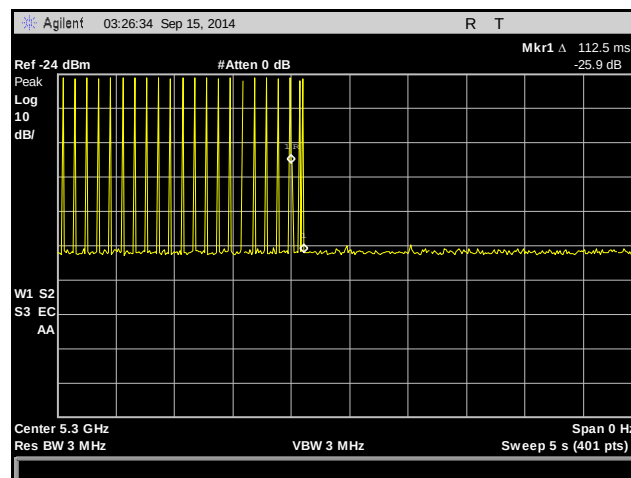

Plot 30. Channel Move Time, 5 second, Port JA1

## Non-Occupancy Period – Plot

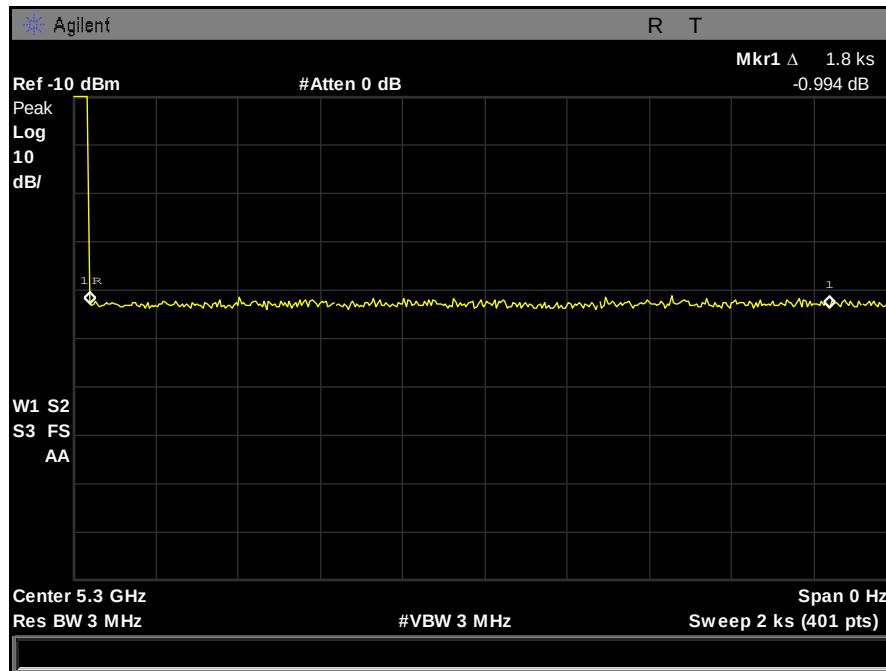

Plot 31. Non-Occupancy Period, 30minutes

## G. Statistical Performance Check

**Test Requirements:** § 15.407 During In-Service Monitoring, the EUT requires a minimum percentage of successful radar detections from all required radar waveforms at a level equal to the DFS Detection Threshold + 1dB.

**Test Procedure:** Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test. The Radar Waveform generator sends the individual waveform for each of the radar types 1-6 at -63dbm. Statistical data is gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

$$\frac{TotalWaveformDetections}{TotalWaveformTrials} \times 100$$

The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.

**Test Results:** The equipment was compliant with § 15.407 Statistical Performance Check.

**Test Engineer:** Andy Shen

**Test Date:** 09/18/14

### Statistical Performance Check – 20 MHz

| Radar Type           | Trial # | Pulses per Burst | Pulse Width (μsec) | PRI (μsec) | Detection       |
|----------------------|---------|------------------|--------------------|------------|-----------------|
|                      |         |                  |                    |            | 1 = Yes, 0 = No |
| 0                    | 1       | 18               | 1                  | 1428       | 1               |
|                      | 2       | 18               | 1                  | 1428       | 1               |
|                      | 3       | 18               | 1                  | 1428       | 1               |
|                      | 4       | 18               | 1                  | 1428       | 1               |
|                      | 5       | 18               | 1                  | 1428       | 1               |
|                      | 6       | 18               | 1                  | 1428       | 1               |
|                      | 7       | 18               | 1                  | 1428       | 1               |
|                      | 8       | 18               | 1                  | 1428       | 1               |
|                      | 9       | 18               | 1                  | 1428       | 1               |
|                      | 10      | 18               | 1                  | 1428       | 1               |
|                      | 11      | 18               | 1                  | 1428       | 1               |
|                      | 12      | 18               | 1                  | 1428       | 1               |
|                      | 13      | 18               | 1                  | 1428       | 1               |
|                      | 14      | 18               | 1                  | 1428       | 1               |
|                      | 15      | 18               | 1                  | 1428       | 1               |
|                      | 16      | 18               | 1                  | 1428       | 1               |
|                      | 17      | 18               | 1                  | 1428       | 1               |
|                      | 18      | 18               | 1                  | 1428       | 1               |
|                      | 19      | 18               | 1                  | 1428       | 1               |
|                      | 20      | 18               | 1                  | 1428       | 1               |
|                      | 21      | 18               | 1                  | 1428       | 1               |
|                      | 22      | 18               | 1                  | 1428       | 1               |
|                      | 23      | 18               | 1                  | 1428       | 1               |
|                      | 24      | 18               | 1                  | 1428       | 1               |
|                      | 25      | 18               | 1                  | 1428       | 1               |
|                      | 26      | 18               | 1                  | 1428       | 1               |
|                      | 27      | 18               | 1                  | 1428       | 1               |
|                      | 28      | 18               | 1                  | 1428       | 1               |
|                      | 29      | 18               | 1                  | 1428       | 1               |
|                      | 30      | 18               | 1                  | 1428       | 1               |
| Detection Percentage |         |                  |                    |            | 100% (> 60%)    |

Table 14. Statistical Performance Check – Radar Type 0, 802.11n 20 MHz

| Radar Type           | Trial # | Pulses per Burst | Pulse Width (µsec) | PRI (µsec) | Detection       |
|----------------------|---------|------------------|--------------------|------------|-----------------|
|                      |         |                  |                    |            | 1 = Yes, 0 = No |
| 1                    | 1       | 86               | 1                  | 618        | 1               |
|                      | 2       | 72               | 1                  | 738        | 0               |
|                      | 3       | 102              | 1                  | 518        | 1               |
|                      | 4       | 67               | 1                  | 798        | 1               |
|                      | 5       | 58               | 1                  | 918        | 1               |
|                      | 6       | 61               | 1                  | 878        | 1               |
|                      | 7       | 59               | 1                  | 898        | 1               |
|                      | 8       | 78               | 1                  | 678        | 1               |
|                      | 9       | 63               | 1                  | 838        | 1               |
|                      | 10      | 62               | 1                  | 858        | 1               |
|                      | 11      | 83               | 1                  | 638        | 1               |
|                      | 12      | 70               | 1                  | 758        | 1               |
|                      | 13      | 95               | 1                  | 558        | 1               |
|                      | 14      | 57               | 1                  | 938        | 1               |
|                      | 15      | 89               | 1                  | 598        | 0               |
|                      | 16      | 20               | 1                  | 1603       | 1               |
|                      | 17      | 92               | 1                  | 2771       | 0               |
|                      | 18      | 75               | 1                  | 574        | 1               |
|                      | 19      | 33               | 1                  | 713        | 1               |
|                      | 20      | 22               | 1                  | 1625       | 0               |
|                      | 21      | 80               | 1                  | 2436       | 1               |
|                      | 22      | 53               | 1                  | 666        | 1               |
|                      | 23      | 25               | 1                  | 998        | 0               |
|                      | 24      | 67               | 1                  | 2196       | 0               |
|                      | 25      | 52               | 1                  | 790        | 1               |
|                      | 26      | 40               | 1                  | 1028       | 0               |
|                      | 27      | 27               | 1                  | 1332       | 1               |
|                      | 28      | 19               | 1                  | 2021       | 1               |
|                      | 29      | 25               | 1                  | 2884       | 1               |
|                      | 30      | 23               | 1                  | 2113       | 1               |
| Detection Percentage |         |                  |                    |            | 76% (> 60%)     |

Table 15. Statistical Performance Check – Radar Type 1, 802.11n 20 MHz

| Radar Type | Trial #              | Pulse Width<br>1 to 5 $\mu$ sec | PRI 150 to 230 $\mu$ sec | Pulses per Burst<br>23 to 29 | Detection       |
|------------|----------------------|---------------------------------|--------------------------|------------------------------|-----------------|
|            |                      |                                 |                          |                              | 1 = Yes, 0 = No |
| 2          | 1                    | 1.9                             | 155                      | 28                           | 1               |
|            | 2                    | 4.8                             | 185                      | 29                           | 1               |
|            | 3                    | 3.3                             | 163                      | 29                           | 1               |
|            | 4                    | 4.8                             | 158                      | 28                           | 1               |
|            | 5                    | 1.7                             | 204                      | 26                           | 1               |
|            | 6                    | 1.5                             | 230                      | 28                           | 1               |
|            | 7                    | 1.2                             | 181                      | 26                           | 1               |
|            | 8                    | 1.4                             | 194                      | 28                           | 1               |
|            | 9                    | 1.2                             | 194                      | 28                           | 1               |
|            | 10                   | 3.6                             | 197                      | 23                           | 1               |
|            | 11                   | 2.5                             | 213                      | 29                           | 1               |
|            | 12                   | 1.7                             | 190                      | 29                           | 1               |
|            | 13                   | 1.2                             | 206                      | 27                           | 1               |
|            | 14                   | 3.5                             | 193                      | 24                           | 1               |
|            | 15                   | 1.4                             | 169                      | 24                           | 1               |
|            | 16                   | 1.4                             | 182                      | 23                           | 1               |
|            | 17                   | 4.7                             | 221                      | 25                           | 1               |
|            | 18                   | 4                               | 197                      | 29                           | 1               |
|            | 19                   | 1.5                             | 230                      | 23                           | 1               |
|            | 20                   | 3.2                             | 178                      | 23                           | 1               |
|            | 21                   | 3.7                             | 158                      | 25                           | 1               |
|            | 22                   | 3.1                             | 150                      | 27                           | 1               |
|            | 23                   | 2.3                             | 217                      | 27                           | 1               |
|            | 24                   | 3.3                             | 164                      | 29                           | 1               |
|            | 25                   | 5                               | 195                      | 25                           | 1               |
|            | 26                   | 4.9                             | 162                      | 26                           | 1               |
|            | 27                   | 3.5                             | 164                      | 24                           | 1               |
|            | 28                   | 3.8                             | 201                      | 29                           | 1               |
|            | 29                   | 4.8                             | 162                      | 25                           | 1               |
|            | 30                   | 1.2                             | 151                      | 23                           | 1               |
|            | Detection Percentage |                                 |                          |                              | 100% (> 60%)    |

Table 16. Statistical Performance Check – Radar Type 2, 802.11n 20 MHz

| Radar Type | Trial #              | Pulse Width<br>6 to 10 $\mu$ sec | PRI 200 to 500 $\mu$ sec | Pulses per Burst 16 to 18 | Detection       |
|------------|----------------------|----------------------------------|--------------------------|---------------------------|-----------------|
|            |                      |                                  |                          |                           | 1 = Yes, 0 = No |
| 3          | 1                    | 9.3                              | 255                      | 17                        | 1               |
|            | 2                    | 6.7                              | 423                      | 18                        | 1               |
|            | 3                    | 6.9                              | 494                      | 16                        | 1               |
|            | 4                    | 7                                | 341                      | 18                        | 1               |
|            | 5                    | 9.9                              | 211                      | 18                        | 1               |
|            | 6                    | 8.6                              | 337                      | 17                        | 1               |
|            | 7                    | 9.2                              | 322                      | 18                        | 1               |
|            | 8                    | 7.8                              | 228                      | 16                        | 1               |
|            | 9                    | 8.4                              | 203                      | 17                        | 1               |
|            | 10                   | 8.3                              | 284                      | 16                        | 1               |
|            | 11                   | 7.7                              | 362                      | 18                        | 1               |
|            | 12                   | 6.5                              | 233                      | 17                        | 1               |
|            | 13                   | 8                                | 432                      | 16                        | 1               |
|            | 14                   | 9.9                              | 238                      | 17                        | 1               |
|            | 15                   | 8.4                              | 304                      | 17                        | 1               |
|            | 16                   | 9.2                              | 488                      | 16                        | 1               |
|            | 17                   | 7                                | 415                      | 17                        | 1               |
|            | 18                   | 8.5                              | 273                      | 17                        | 1               |
|            | 19                   | 8                                | 269                      | 18                        | 1               |
|            | 20                   | 6.7                              | 422                      | 18                        | 1               |
|            | 21                   | 6.2                              | 401                      | 18                        | 1               |
|            | 22                   | 7.9                              | 378                      | 16                        | 1               |
|            | 23                   | 9.1                              | 387                      | 16                        | 1               |
|            | 24                   | 8                                | 322                      | 18                        | 1               |
|            | 25                   | 7.5                              | 401                      | 18                        | 1               |
|            | 26                   | 6                                | 355                      | 16                        | 1               |
|            | 27                   | 6.4                              | 497                      | 18                        | 1               |
|            | 28                   | 8.5                              | 237                      | 18                        | 1               |
|            | 29                   | 7.8                              | 223                      | 16                        | 1               |
|            | 30                   | 8.8                              | 289                      | 16                        | 1               |
|            | Detection Percentage |                                  |                          |                           | 100% (> 60%)    |

Table 17. Statistical Performance Check – Radar Type 3, 802.11n 20 MHz

| Radar Type | Trial #              | Pulse Width<br>11 to 20 $\mu$ sec | PRI 200 to 500 $\mu$ sec | Pulses per<br>Burst 12 to 16 | Detection       |
|------------|----------------------|-----------------------------------|--------------------------|------------------------------|-----------------|
|            |                      |                                   |                          |                              | 1 = Yes, 0 = No |
| 4          | 1                    | 17.6                              | 273                      | 15                           | 1               |
|            | 2                    | 15.9                              | 310                      | 16                           | 1               |
|            | 3                    | 18.4                              | 494                      | 15                           | 1               |
|            | 4                    | 16                                | 333                      | 15                           | 1               |
|            | 5                    | 15.9                              | 302                      | 14                           | 1               |
|            | 6                    | 16.9                              | 354                      | 15                           | 1               |
|            | 7                    | 12.3                              | 331                      | 14                           | 1               |
|            | 8                    | 13                                | 307                      | 14                           | 1               |
|            | 9                    | 15.8                              | 436                      | 12                           | 1               |
|            | 10                   | 18                                | 277                      | 16                           | 1               |
|            | 11                   | 16.4                              | 272                      | 15                           | 1               |
|            | 12                   | 15.3                              | 420                      | 16                           | 1               |
|            | 13                   | 13.4                              | 440                      | 14                           | 1               |
|            | 14                   | 17.3                              | 224                      | 16                           | 1               |
|            | 15                   | 11.3                              | 426                      | 13                           | 1               |
|            | 16                   | 13                                | 250                      | 14                           | 1               |
|            | 17                   | 11.1                              | 271                      | 16                           | 1               |
|            | 18                   | 13                                | 238                      | 16                           | 1               |
|            | 19                   | 13.4                              | 270                      | 13                           | 1               |
|            | 20                   | 17.1                              | 205                      | 13                           | 1               |
|            | 21                   | 19.6                              | 297                      | 14                           | 1               |
|            | 22                   | 15.8                              | 355                      | 12                           | 1               |
|            | 23                   | 14.2                              | 222                      | 15                           | 1               |
|            | 24                   | 19.1                              | 296                      | 12                           | 1               |
|            | 25                   | 13.3                              | 310                      | 14                           | 1               |
|            | 26                   | 16.2                              | 293                      | 13                           | 1               |
|            | 27                   | 12.1                              | 402                      | 12                           | 1               |
|            | 28                   | 13.9                              | 266                      | 16                           | 1               |
|            | 29                   | 16.8                              | 278                      | 13                           | 1               |
|            | 30                   | 15.4                              | 461                      | 13                           | 1               |
|            | Detection Percentage |                                   |                          |                              | 100% (> 60%)    |

Table 18. Statistical Performance Check – Radar Type 4, 802.11n 20 MHz

| Radar Type           | Trial # | Filename*     | Detection       |
|----------------------|---------|---------------|-----------------|
|                      |         |               | 1 = Yes, 0 = No |
| 5                    | 1       | bin5-trial 1  | 1               |
|                      | 2       | bin5-trial 2  | 1               |
|                      | 3       | bin5-trial 3  | 1               |
|                      | 4       | bin5-trial 4  | 0               |
|                      | 5       | bin5-trial 5  | 1               |
|                      | 6       | bin5-trial 6  | 1               |
|                      | 7       | bin5-trial 7  | 1               |
|                      | 8       | bin5-trial 8  | 1               |
|                      | 9       | bin5-trial 9  | 1               |
|                      | 10      | bin5-trial 10 | 1               |
|                      | 11      | bin5-trial 11 | 1               |
|                      | 12      | bin5-trial 12 | 0               |
|                      | 13      | bin5-trial 13 | 1               |
|                      | 14      | bin5-trial 14 | 1               |
|                      | 15      | bin5-trial 15 | 1               |
|                      | 16      | bin5-trial 16 | 1               |
|                      | 17      | bin5-trial 17 | 1               |
|                      | 18      | bin5-trial 18 | 0               |
|                      | 19      | bin5-trial 19 | 1               |
|                      | 20      | bin5-trial 20 | 1               |
|                      | 21      | bin5-trial 21 | 1               |
|                      | 22      | bin5-trial 22 | 1               |
|                      | 23      | bin5-trial 23 | 1               |
|                      | 24      | bin5-trial 24 | 1               |
|                      | 25      | bin5-trial 25 | 1               |
|                      | 26      | bin5-trial 26 | 1               |
|                      | 27      | bin5-trial 27 | 1               |
|                      | 28      | bin5-trial 28 | 1               |
|                      | 29      | bin5-trial 29 | 1               |
|                      | 30      | bin5-trial 30 | 1               |
| Detection Percentage |         |               | 90 % (> 80 %)   |

**Table 19. Statistical Performance Check – Radar Type 5, 802.11n 20 MHz**

Note: See Appendix for Bin 5 test data.

| Radar Type           | Trial # | Frequency (MHz) | Pulses/Hop | Pulse Width (µsec) | PRI (µsec) | Detection       |
|----------------------|---------|-----------------|------------|--------------------|------------|-----------------|
|                      |         |                 |            |                    |            | 1 = Yes, 0 = No |
| 6                    | 1       |                 | 9          | 1                  | 333        | 1               |
|                      | 2       |                 | 9          | 1                  | 333        | 1               |
|                      | 3       |                 | 9          | 1                  | 333        | 1               |
|                      | 4       |                 | 9          | 1                  | 333        | 0               |
|                      | 5       |                 | 9          | 1                  | 333        | 1               |
|                      | 6       |                 | 9          | 1                  | 333        | 1               |
|                      | 7       |                 | 9          | 1                  | 333        | 1               |
|                      | 8       |                 | 9          | 1                  | 333        | 1               |
|                      | 9       |                 | 9          | 1                  | 333        | 1               |
|                      | 10      |                 | 9          | 1                  | 333        | 1               |
|                      | 11      |                 | 9          | 1                  | 333        | 1               |
|                      | 12      |                 | 9          | 1                  | 333        | 1               |
|                      | 13      |                 | 9          | 1                  | 333        | 1               |
|                      | 14      |                 | 9          | 1                  | 333        | 1               |
|                      | 15      |                 | 9          | 1                  | 333        | 0               |
|                      | 16      |                 | 9          | 1                  | 333        | 1               |
|                      | 17      |                 | 9          | 1                  | 333        | 1               |
|                      | 18      |                 | 9          | 1                  | 333        | 1               |
|                      | 19      |                 | 9          | 1                  | 333        | 1               |
|                      | 20      |                 | 9          | 1                  | 333        | 0               |
|                      | 21      |                 | 9          | 1                  | 333        | 1               |
|                      | 22      |                 | 9          | 1                  | 333        | 1               |
|                      | 23      |                 | 9          | 1                  | 333        | 1               |
|                      | 24      |                 | 9          | 1                  | 333        | 0               |
|                      | 25      |                 | 9          | 1                  | 333        | 1               |
|                      | 26      |                 | 9          | 1                  | 333        | 1               |
|                      | 27      |                 | 9          | 1                  | 333        | 1               |
|                      | 28      |                 | 9          | 1                  | 333        | 0               |
|                      | 29      |                 | 9          | 1                  | 333        | 1               |
|                      | 30      |                 | 9          | 1                  | 333        | 1               |
| Detection Percentage |         |                 |            |                    |            | 83% (> 60%)     |

Table 20. Statistical Performance Check – Radar Type 6, 802.11n 20 MHz

### Statistical Performance Check – 40 MHz

| Radar Type           | Trial # | Pulses per Burst | Pulse Width (μsec) | PRI (μsec) | Detection       |
|----------------------|---------|------------------|--------------------|------------|-----------------|
|                      |         |                  |                    |            | 1 = Yes, 0 = No |
| 0                    | 1       | 18               | 1                  | 1428       | 1               |
|                      | 2       | 18               | 1                  | 1428       | 1               |
|                      | 3       | 18               | 1                  | 1428       | 1               |
|                      | 4       | 18               | 1                  | 1428       | 1               |
|                      | 5       | 18               | 1                  | 1428       | 1               |
|                      | 6       | 18               | 1                  | 1428       | 1               |
|                      | 7       | 18               | 1                  | 1428       | 1               |
|                      | 8       | 18               | 1                  | 1428       | 1               |
|                      | 9       | 18               | 1                  | 1428       | 1               |
|                      | 10      | 18               | 1                  | 1428       | 1               |
|                      | 11      | 18               | 1                  | 1428       | 1               |
|                      | 12      | 18               | 1                  | 1428       | 1               |
|                      | 13      | 18               | 1                  | 1428       | 1               |
|                      | 14      | 18               | 1                  | 1428       | 1               |
|                      | 15      | 18               | 1                  | 1428       | 1               |
|                      | 16      | 18               | 1                  | 1428       | 1               |
|                      | 17      | 18               | 1                  | 1428       | 1               |
|                      | 18      | 18               | 1                  | 1428       | 1               |
|                      | 19      | 18               | 1                  | 1428       | 1               |
|                      | 20      | 18               | 1                  | 1428       | 1               |
|                      | 21      | 18               | 1                  | 1428       | 1               |
|                      | 22      | 18               | 1                  | 1428       | 1               |
|                      | 23      | 18               | 1                  | 1428       | 1               |
|                      | 24      | 18               | 1                  | 1428       | 1               |
|                      | 25      | 18               | 1                  | 1428       | 1               |
|                      | 26      | 18               | 1                  | 1428       | 1               |
|                      | 27      | 18               | 1                  | 1428       | 1               |
|                      | 28      | 18               | 1                  | 1428       | 1               |
|                      | 29      | 18               | 1                  | 1428       | 1               |
|                      | 30      | 18               | 1                  | 1428       | 1               |
| Detection Percentage |         |                  |                    |            | 100% (> 60%)    |

Table 21. Statistical Performance Check – Radar Type 0, 802.11n 40 MHz

| Radar Type           | Trial # | Pulses per Burst | Pulse Width (µsec) | PRI (µsec) | Detection       |
|----------------------|---------|------------------|--------------------|------------|-----------------|
|                      |         |                  |                    |            | 1 = Yes, 0 = No |
| 1                    | 1       | 86               | 1                  | 618        | 1               |
|                      | 2       | 72               | 1                  | 738        | 0               |
|                      | 3       | 102              | 1                  | 518        | 1               |
|                      | 4       | 67               | 1                  | 798        | 1               |
|                      | 5       | 58               | 1                  | 918        | 1               |
|                      | 6       | 61               | 1                  | 878        | 1               |
|                      | 7       | 59               | 1                  | 898        | 1               |
|                      | 8       | 78               | 1                  | 678        | 1               |
|                      | 9       | 63               | 1                  | 838        | 1               |
|                      | 10      | 62               | 1                  | 858        | 1               |
|                      | 11      | 83               | 1                  | 638        | 1               |
|                      | 12      | 70               | 1                  | 758        | 1               |
|                      | 13      | 95               | 1                  | 558        | 1               |
|                      | 14      | 57               | 1                  | 938        | 1               |
|                      | 15      | 89               | 1                  | 598        | 0               |
|                      | 16      | 20               | 1                  | 1603       | 1               |
|                      | 17      | 92               | 1                  | 2771       | 0               |
|                      | 18      | 75               | 1                  | 574        | 1               |
|                      | 19      | 33               | 1                  | 713        | 0               |
|                      | 20      | 22               | 1                  | 1625       | 1               |
|                      | 21      | 80               | 1                  | 2436       | 1               |
|                      | 22      | 53               | 1                  | 666        | 1               |
|                      | 23      | 25               | 1                  | 998        | 0               |
|                      | 24      | 67               | 1                  | 2196       | 0               |
|                      | 25      | 52               | 1                  | 790        | 1               |
|                      | 26      | 40               | 1                  | 1028       | 0               |
|                      | 27      | 27               | 1                  | 1332       | 1               |
|                      | 28      | 19               | 1                  | 2021       | 1               |
|                      | 29      | 25               | 1                  | 2884       | 1               |
|                      | 30      | 23               | 1                  | 2113       | 1               |
| Detection Percentage |         |                  |                    |            | 76% (> 60%)     |

Table 22. Statistical Performance Check – Radar Type 1, 802.11n 40 MHz

| Radar Type | Trial #              | Pulse Width<br>1 to 5 $\mu$ sec | PRI 150 to 230 $\mu$ sec | Pulses per Burst<br>23 to 29 | Detection       |
|------------|----------------------|---------------------------------|--------------------------|------------------------------|-----------------|
|            |                      |                                 |                          |                              | 1 = Yes, 0 = No |
| 2          | 1                    | 1.9                             | 155                      | 28                           | 1               |
|            | 2                    | 4.8                             | 185                      | 29                           | 1               |
|            | 3                    | 3.3                             | 163                      | 29                           | 1               |
|            | 4                    | 4.8                             | 158                      | 28                           | 1               |
|            | 5                    | 1.7                             | 204                      | 26                           | 1               |
|            | 6                    | 1.5                             | 230                      | 28                           | 1               |
|            | 7                    | 1.2                             | 181                      | 26                           | 1               |
|            | 8                    | 1.4                             | 194                      | 28                           | 1               |
|            | 9                    | 1.2                             | 194                      | 28                           | 1               |
|            | 10                   | 3.6                             | 197                      | 23                           | 1               |
|            | 11                   | 2.5                             | 213                      | 29                           | 1               |
|            | 12                   | 1.7                             | 190                      | 29                           | 1               |
|            | 13                   | 1.2                             | 206                      | 27                           | 1               |
|            | 14                   | 3.5                             | 193                      | 24                           | 1               |
|            | 15                   | 1.4                             | 169                      | 24                           | 1               |
|            | 16                   | 1.4                             | 182                      | 23                           | 1               |
|            | 17                   | 4.7                             | 221                      | 25                           | 1               |
|            | 18                   | 4                               | 197                      | 29                           | 1               |
|            | 19                   | 1.5                             | 230                      | 23                           | 1               |
|            | 20                   | 3.2                             | 178                      | 23                           | 1               |
|            | 21                   | 3.7                             | 158                      | 25                           | 1               |
|            | 22                   | 3.1                             | 150                      | 27                           | 1               |
|            | 23                   | 2.3                             | 217                      | 27                           | 1               |
|            | 24                   | 3.3                             | 164                      | 29                           | 1               |
|            | 25                   | 5                               | 195                      | 25                           | 1               |
|            | 26                   | 4.9                             | 162                      | 26                           | 1               |
|            | 27                   | 3.5                             | 164                      | 24                           | 1               |
|            | 28                   | 3.8                             | 201                      | 29                           | 1               |
|            | 29                   | 4.8                             | 162                      | 25                           | 1               |
|            | 30                   | 1.2                             | 151                      | 23                           | 1               |
|            | Detection Percentage |                                 |                          |                              | 100% (> 60%)    |

Table 23. Statistical Performance Check – Radar Type 2, 802.11n 40 MHz

| Radar Type           | Trial # | Pulse Width<br>6 to 10 $\mu$ sec | PRI 200 to 500 $\mu$ sec | Pulses per Burst 16 to 18 | Detection       |
|----------------------|---------|----------------------------------|--------------------------|---------------------------|-----------------|
|                      |         |                                  |                          |                           | 1 = Yes, 0 = No |
| 3                    | 1       | 9.3                              | 255                      | 17                        | 1               |
|                      | 2       | 6.7                              | 423                      | 18                        | 1               |
|                      | 3       | 6.9                              | 494                      | 16                        | 1               |
|                      | 4       | 7                                | 341                      | 18                        | 1               |
|                      | 5       | 9.9                              | 211                      | 18                        | 1               |
|                      | 6       | 8.6                              | 337                      | 17                        | 1               |
|                      | 7       | 9.2                              | 322                      | 18                        | 1               |
|                      | 8       | 7.8                              | 228                      | 16                        | 1               |
|                      | 9       | 8.4                              | 203                      | 17                        | 1               |
|                      | 10      | 8.3                              | 284                      | 16                        | 1               |
|                      | 11      | 7.7                              | 362                      | 18                        | 1               |
|                      | 12      | 6.5                              | 233                      | 17                        | 1               |
|                      | 13      | 8                                | 432                      | 16                        | 1               |
|                      | 14      | 9.9                              | 238                      | 17                        | 1               |
|                      | 15      | 8.4                              | 304                      | 17                        | 1               |
|                      | 16      | 9.2                              | 488                      | 16                        | 1               |
|                      | 17      | 7                                | 415                      | 17                        | 1               |
|                      | 18      | 8.5                              | 273                      | 17                        | 1               |
|                      | 19      | 8                                | 269                      | 18                        | 1               |
|                      | 20      | 6.7                              | 422                      | 18                        | 1               |
|                      | 21      | 6.2                              | 401                      | 18                        | 1               |
|                      | 22      | 7.9                              | 378                      | 16                        | 1               |
|                      | 23      | 9.1                              | 387                      | 16                        | 1               |
|                      | 24      | 8                                | 322                      | 18                        | 1               |
|                      | 25      | 7.5                              | 401                      | 18                        | 1               |
|                      | 26      | 6                                | 355                      | 16                        | 1               |
|                      | 27      | 6.4                              | 497                      | 18                        | 1               |
|                      | 28      | 8.5                              | 237                      | 18                        | 1               |
|                      | 29      | 7.8                              | 223                      | 16                        | 1               |
|                      | 30      | 8.8                              | 289                      | 16                        | 1               |
| Detection Percentage |         |                                  |                          |                           | 100% (> 60%)    |

Table 24. Statistical Performance Check – Radar Type 3, 802.11n 40 MHz

| Radar Type | Trial #              | Pulse Width<br>11 to 20 $\mu$ sec | PRI 200 to 500 $\mu$ sec | Pulses per<br>Burst 12 to 16 | Detection       |
|------------|----------------------|-----------------------------------|--------------------------|------------------------------|-----------------|
|            |                      |                                   |                          |                              | 1 = Yes, 0 = No |
| 4          | 1                    | 17.6                              | 273                      | 15                           | 1               |
|            | 2                    | 15.9                              | 310                      | 16                           | 1               |
|            | 3                    | 18.4                              | 494                      | 15                           | 1               |
|            | 4                    | 16                                | 333                      | 15                           | 1               |
|            | 5                    | 15.9                              | 302                      | 14                           | 1               |
|            | 6                    | 16.9                              | 354                      | 15                           | 1               |
|            | 7                    | 12.3                              | 331                      | 14                           | 1               |
|            | 8                    | 13                                | 307                      | 14                           | 1               |
|            | 9                    | 15.8                              | 436                      | 12                           | 1               |
|            | 10                   | 18                                | 277                      | 16                           | 1               |
|            | 11                   | 16.4                              | 272                      | 15                           | 1               |
|            | 12                   | 15.3                              | 420                      | 16                           | 1               |
|            | 13                   | 13.4                              | 440                      | 14                           | 1               |
|            | 14                   | 17.3                              | 224                      | 16                           | 1               |
|            | 15                   | 11.3                              | 426                      | 13                           | 1               |
|            | 16                   | 13                                | 250                      | 14                           | 1               |
|            | 17                   | 11.1                              | 271                      | 16                           | 1               |
|            | 18                   | 13                                | 238                      | 16                           | 1               |
|            | 19                   | 13.4                              | 270                      | 13                           | 1               |
|            | 20                   | 17.1                              | 205                      | 13                           | 1               |
|            | 21                   | 19.6                              | 297                      | 14                           | 1               |
|            | 22                   | 15.8                              | 355                      | 12                           | 1               |
|            | 23                   | 14.2                              | 222                      | 15                           | 1               |
|            | 24                   | 19.1                              | 296                      | 12                           | 1               |
|            | 25                   | 13.3                              | 310                      | 14                           | 1               |
|            | 26                   | 16.2                              | 293                      | 13                           | 1               |
|            | 27                   | 12.1                              | 402                      | 12                           | 1               |
|            | 28                   | 13.9                              | 266                      | 16                           | 1               |
|            | 29                   | 16.8                              | 278                      | 13                           | 1               |
|            | 30                   | 15.4                              | 461                      | 13                           | 1               |
|            | Detection Percentage |                                   |                          |                              | 100% (> 60%)    |

Table 25. Statistical Performance Check – Radar Type 4, 802.11n 40 MHz

| Radar Type           | Trial # | Filename*     | Detection       |
|----------------------|---------|---------------|-----------------|
|                      |         |               | 1 = Yes, 0 = No |
| 5                    | 1       | bin5-trial 1  | 1               |
|                      | 2       | bin5-trial 2  | 1               |
|                      | 3       | bin5-trial 3  | 1               |
|                      | 4       | bin5-trial 4  | 0               |
|                      | 5       | bin5-trial 5  | 1               |
|                      | 6       | bin5-trial 6  | 1               |
|                      | 7       | bin5-trial 7  | 1               |
|                      | 8       | bin5-trial 8  | 1               |
|                      | 9       | bin5-trial 9  | 1               |
|                      | 10      | bin5-trial 10 | 1               |
|                      | 11      | bin5-trial 11 | 1               |
|                      | 12      | bin5-trial 12 | 1               |
|                      | 13      | bin5-trial 13 | 1               |
|                      | 14      | bin5-trial 14 | 1               |
|                      | 15      | bin5-trial 15 | 1               |
|                      | 16      | bin5-trial 16 | 1               |
|                      | 17      | bin5-trial 17 | 1               |
|                      | 18      | bin5-trial 18 | 0               |
|                      | 19      | bin5-trial 19 | 1               |
|                      | 20      | bin5-trial 20 | 1               |
|                      | 21      | bin5-trial 21 | 0               |
|                      | 22      | bin5-trial 22 | 1               |
|                      | 23      | bin5-trial 23 | 1               |
|                      | 24      | bin5-trial 24 | 1               |
|                      | 25      | bin5-trial 25 | 0               |
|                      | 26      | bin5-trial 26 | 1               |
|                      | 27      | bin5-trial 27 | 1               |
|                      | 28      | bin5-trial 28 | 1               |
|                      | 29      | bin5-trial 29 | 1               |
|                      | 30      | bin5-trial 30 | 1               |
| Detection Percentage |         |               | 87% (> 80%)     |

**Table 26. Statistical Performance Check – Radar Type 5, 802.11n 40 MHz**

Note: See Appendix for Bin 5 test data.

| Radar Type           | Trial # | Frequency (MHz) | Pulses/Hop | Pulse Width (μsec) | PRI (μsec) | Detection       |
|----------------------|---------|-----------------|------------|--------------------|------------|-----------------|
|                      |         |                 |            |                    |            | 1 = Yes, 0 = No |
| 6                    | 1       |                 | 9          | 1                  | 333        | 1               |
|                      | 2       |                 | 9          | 1                  | 333        | 1               |
|                      | 3       |                 | 9          | 1                  | 333        | 1               |
|                      | 4       |                 | 9          | 1                  | 333        | 1               |
|                      | 5       |                 | 9          | 1                  | 333        | 1               |
|                      | 6       |                 | 9          | 1                  | 333        | 1               |
|                      | 7       |                 | 9          | 1                  | 333        | 1               |
|                      | 8       |                 | 9          | 1                  | 333        | 1               |
|                      | 9       |                 | 9          | 1                  | 333        | 1               |
|                      | 10      |                 | 9          | 1                  | 333        | 1               |
|                      | 11      |                 | 9          | 1                  | 333        | 0               |
|                      | 12      |                 | 9          | 1                  | 333        | 1               |
|                      | 13      |                 | 9          | 1                  | 333        | 1               |
|                      | 14      |                 | 9          | 1                  | 333        | 1               |
|                      | 15      |                 | 9          | 1                  | 333        | 0               |
|                      | 16      |                 | 9          | 1                  | 333        | 1               |
|                      | 17      |                 | 9          | 1                  | 333        | 1               |
|                      | 18      |                 | 9          | 1                  | 333        | 1               |
|                      | 19      |                 | 9          | 1                  | 333        | 1               |
|                      | 20      |                 | 9          | 1                  | 333        | 1               |
|                      | 21      |                 | 9          | 1                  | 333        | 1               |
|                      | 22      |                 | 9          | 1                  | 333        | 0               |
|                      | 23      |                 | 9          | 1                  | 333        | 1               |
|                      | 24      |                 | 9          | 1                  | 333        | 0               |
|                      | 25      |                 | 9          | 1                  | 333        | 1               |
|                      | 26      |                 | 9          | 1                  | 333        | 1               |
|                      | 27      |                 | 9          | 1                  | 333        | 1               |
|                      | 28      |                 | 9          | 1                  | 333        | 0               |
|                      | 29      |                 | 9          | 1                  | 333        | 1               |
|                      | 30      |                 | 9          | 1                  | 333        | 0               |
| Detection Percentage |         |                 |            |                    |            | 80% (> 60%)     |

Table 27. Statistical Performance Check – Radar Type 6, 802.11n 40 MHz

### Statistical Performance Check – 80 MHz

| Radar Type           | Trial # | Pulses per Burst | Pulse Width (μsec) | PRI (μsec) | Detection       |
|----------------------|---------|------------------|--------------------|------------|-----------------|
|                      |         |                  |                    |            | 1 = Yes, 0 = No |
| 0                    | 1       | 18               | 1                  | 1428       | 1               |
|                      | 2       | 18               | 1                  | 1428       | 1               |
|                      | 3       | 18               | 1                  | 1428       | 1               |
|                      | 4       | 18               | 1                  | 1428       | 1               |
|                      | 5       | 18               | 1                  | 1428       | 1               |
|                      | 6       | 18               | 1                  | 1428       | 1               |
|                      | 7       | 18               | 1                  | 1428       | 1               |
|                      | 8       | 18               | 1                  | 1428       | 1               |
|                      | 9       | 18               | 1                  | 1428       | 1               |
|                      | 10      | 18               | 1                  | 1428       | 1               |
|                      | 11      | 18               | 1                  | 1428       | 1               |
|                      | 12      | 18               | 1                  | 1428       | 1               |
|                      | 13      | 18               | 1                  | 1428       | 1               |
|                      | 14      | 18               | 1                  | 1428       | 1               |
|                      | 15      | 18               | 1                  | 1428       | 1               |
|                      | 16      | 18               | 1                  | 1428       | 1               |
|                      | 17      | 18               | 1                  | 1428       | 1               |
|                      | 18      | 18               | 1                  | 1428       | 1               |
|                      | 19      | 18               | 1                  | 1428       | 1               |
|                      | 20      | 18               | 1                  | 1428       | 1               |
|                      | 21      | 18               | 1                  | 1428       | 1               |
|                      | 22      | 18               | 1                  | 1428       | 1               |
|                      | 23      | 18               | 1                  | 1428       | 1               |
|                      | 24      | 18               | 1                  | 1428       | 1               |
|                      | 25      | 18               | 1                  | 1428       | 1               |
|                      | 26      | 18               | 1                  | 1428       | 1               |
|                      | 27      | 18               | 1                  | 1428       | 1               |
|                      | 28      | 18               | 1                  | 1428       | 1               |
|                      | 29      | 18               | 1                  | 1428       | 1               |
|                      | 30      | 18               | 1                  | 1428       | 1               |
| Detection Percentage |         |                  |                    |            | 100% (> 60%)    |

Table 28. Statistical Performance Check – Radar Type 0, 802.11ac 80 MHz

| Radar Type           | Trial # | Pulses per Burst | Pulse Width (µsec) | PRI (µsec) | Detection       |
|----------------------|---------|------------------|--------------------|------------|-----------------|
|                      |         |                  |                    |            | 1 = Yes, 0 = No |
| 1                    | 1       | 86               | 1                  | 618        | 1               |
|                      | 2       | 72               | 1                  | 738        | 0               |
|                      | 3       | 102              | 1                  | 518        | 1               |
|                      | 4       | 67               | 1                  | 798        | 1               |
|                      | 5       | 58               | 1                  | 918        | 1               |
|                      | 6       | 61               | 1                  | 878        | 1               |
|                      | 7       | 59               | 1                  | 898        | 1               |
|                      | 8       | 78               | 1                  | 678        | 1               |
|                      | 9       | 63               | 1                  | 838        | 1               |
|                      | 10      | 62               | 1                  | 858        | 1               |
|                      | 11      | 83               | 1                  | 638        | 1               |
|                      | 12      | 70               | 1                  | 758        | 1               |
|                      | 13      | 95               | 1                  | 558        | 1               |
|                      | 14      | 57               | 1                  | 938        | 1               |
|                      | 15      | 89               | 1                  | 598        | 0               |
|                      | 16      | 20               | 1                  | 1603       | 1               |
|                      | 17      | 92               | 1                  | 2771       | 0               |
|                      | 18      | 75               | 1                  | 574        | 1               |
|                      | 19      | 33               | 1                  | 713        | 1               |
|                      | 20      | 22               | 1                  | 1625       | 0               |
|                      | 21      | 80               | 1                  | 2436       | 1               |
|                      | 22      | 53               | 1                  | 666        | 1               |
|                      | 23      | 25               | 1                  | 998        | 0               |
|                      | 24      | 67               | 1                  | 2196       | 0               |
|                      | 25      | 52               | 1                  | 790        | 1               |
|                      | 26      | 40               | 1                  | 1028       | 0               |
|                      | 27      | 27               | 1                  | 1332       | 1               |
|                      | 28      | 19               | 1                  | 2021       | 1               |
|                      | 29      | 25               | 1                  | 2884       | 1               |
|                      | 30      | 23               | 1                  | 2113       | 1               |
| Detection Percentage |         |                  |                    |            | 76% (> 60%)     |

Table 29. Statistical Performance Check – Radar Type 1, 802.11ac 80 MHz

| Radar Type | Trial #              | Pulse Width<br>1 to 5 $\mu$ sec | PRI 150 to 230 $\mu$ sec | Pulses per Burst<br>23 to 29 | Detection       |
|------------|----------------------|---------------------------------|--------------------------|------------------------------|-----------------|
|            |                      |                                 |                          |                              | 1 = Yes, 0 = No |
| 2          | 1                    | 1.9                             | 155                      | 28                           | 1               |
|            | 2                    | 4.8                             | 185                      | 29                           | 1               |
|            | 3                    | 3.3                             | 163                      | 29                           | 1               |
|            | 4                    | 4.8                             | 158                      | 28                           | 1               |
|            | 5                    | 1.7                             | 204                      | 26                           | 1               |
|            | 6                    | 1.5                             | 230                      | 28                           | 1               |
|            | 7                    | 1.2                             | 181                      | 26                           | 1               |
|            | 8                    | 1.4                             | 194                      | 28                           | 1               |
|            | 9                    | 1.2                             | 194                      | 28                           | 1               |
|            | 10                   | 3.6                             | 197                      | 23                           | 1               |
|            | 11                   | 2.5                             | 213                      | 29                           | 1               |
|            | 12                   | 1.7                             | 190                      | 29                           | 1               |
|            | 13                   | 1.2                             | 206                      | 27                           | 1               |
|            | 14                   | 3.5                             | 193                      | 24                           | 1               |
|            | 15                   | 1.4                             | 169                      | 24                           | 1               |
|            | 16                   | 1.4                             | 182                      | 23                           | 1               |
|            | 17                   | 4.7                             | 221                      | 25                           | 1               |
|            | 18                   | 4                               | 197                      | 29                           | 1               |
|            | 19                   | 1.5                             | 230                      | 23                           | 1               |
|            | 20                   | 3.2                             | 178                      | 23                           | 1               |
|            | 21                   | 3.7                             | 158                      | 25                           | 1               |
|            | 22                   | 3.1                             | 150                      | 27                           | 1               |
|            | 23                   | 2.3                             | 217                      | 27                           | 1               |
|            | 24                   | 3.3                             | 164                      | 29                           | 1               |
|            | 25                   | 5                               | 195                      | 25                           | 1               |
|            | 26                   | 4.9                             | 162                      | 26                           | 1               |
|            | 27                   | 3.5                             | 164                      | 24                           | 1               |
|            | 28                   | 3.8                             | 201                      | 29                           | 1               |
|            | 29                   | 4.8                             | 162                      | 25                           | 1               |
|            | 30                   | 1.2                             | 151                      | 23                           | 1               |
|            | Detection Percentage |                                 |                          |                              | 100% (> 60%)    |

Table 30. Statistical Performance Check – Radar Type 2, 802.11ac 80 MHz

| Radar Type           | Trial # | Pulse Width<br>6 to 10 $\mu$ sec | PRI 200 to 500 $\mu$ sec | Pulses per Burst 16 to 18 | Detection       |
|----------------------|---------|----------------------------------|--------------------------|---------------------------|-----------------|
|                      |         |                                  |                          |                           | 1 = Yes, 0 = No |
| 3                    | 1       | 9.3                              | 255                      | 17                        | 1               |
|                      | 2       | 6.7                              | 423                      | 18                        | 1               |
|                      | 3       | 6.9                              | 494                      | 16                        | 1               |
|                      | 4       | 7                                | 341                      | 18                        | 1               |
|                      | 5       | 9.9                              | 211                      | 18                        | 1               |
|                      | 6       | 8.6                              | 337                      | 17                        | 1               |
|                      | 7       | 9.2                              | 322                      | 18                        | 1               |
|                      | 8       | 7.8                              | 228                      | 16                        | 1               |
|                      | 9       | 8.4                              | 203                      | 17                        | 1               |
|                      | 10      | 8.3                              | 284                      | 16                        | 1               |
|                      | 11      | 7.7                              | 362                      | 18                        | 1               |
|                      | 12      | 6.5                              | 233                      | 17                        | 1               |
|                      | 13      | 8                                | 432                      | 16                        | 1               |
|                      | 14      | 9.9                              | 238                      | 17                        | 1               |
|                      | 15      | 8.4                              | 304                      | 17                        | 1               |
|                      | 16      | 9.2                              | 488                      | 16                        | 1               |
|                      | 17      | 7                                | 415                      | 17                        | 1               |
|                      | 18      | 8.5                              | 273                      | 17                        | 1               |
|                      | 19      | 8                                | 269                      | 18                        | 1               |
|                      | 20      | 6.7                              | 422                      | 18                        | 1               |
|                      | 21      | 6.2                              | 401                      | 18                        | 1               |
|                      | 22      | 7.9                              | 378                      | 16                        | 1               |
|                      | 23      | 9.1                              | 387                      | 16                        | 1               |
|                      | 24      | 8                                | 322                      | 18                        | 1               |
|                      | 25      | 7.5                              | 401                      | 18                        | 1               |
|                      | 26      | 6                                | 355                      | 16                        | 1               |
|                      | 27      | 6.4                              | 497                      | 18                        | 1               |
|                      | 28      | 8.5                              | 237                      | 18                        | 1               |
|                      | 29      | 7.8                              | 223                      | 16                        | 1               |
|                      | 30      | 8.8                              | 289                      | 16                        | 1               |
| Detection Percentage |         |                                  |                          |                           | 100% (> 60%)    |

Table 31. Statistical Performance Check – Radar Type 3, 802.11ac 80 MHz

| Radar Type | Trial #              | Pulse Width<br>11 to 20 $\mu$ sec | PRI 200 to 500 $\mu$ sec | Pulses per<br>Burst 12 to 16 | Detection       |
|------------|----------------------|-----------------------------------|--------------------------|------------------------------|-----------------|
|            |                      |                                   |                          |                              | 1 = Yes, 0 = No |
| 4          | 1                    | 17.6                              | 273                      | 15                           | 1               |
|            | 2                    | 15.9                              | 310                      | 16                           | 1               |
|            | 3                    | 18.4                              | 494                      | 15                           | 1               |
|            | 4                    | 16                                | 333                      | 15                           | 1               |
|            | 5                    | 15.9                              | 302                      | 14                           | 1               |
|            | 6                    | 16.9                              | 354                      | 15                           | 1               |
|            | 7                    | 12.3                              | 331                      | 14                           | 1               |
|            | 8                    | 13                                | 307                      | 14                           | 1               |
|            | 9                    | 15.8                              | 436                      | 12                           | 1               |
|            | 10                   | 18                                | 277                      | 16                           | 1               |
|            | 11                   | 16.4                              | 272                      | 15                           | 1               |
|            | 12                   | 15.3                              | 420                      | 16                           | 1               |
|            | 13                   | 13.4                              | 440                      | 14                           | 1               |
|            | 14                   | 17.3                              | 224                      | 16                           | 1               |
|            | 15                   | 11.3                              | 426                      | 13                           | 1               |
|            | 16                   | 13                                | 250                      | 14                           | 1               |
|            | 17                   | 11.1                              | 271                      | 16                           | 1               |
|            | 18                   | 13                                | 238                      | 16                           | 1               |
|            | 19                   | 13.4                              | 270                      | 13                           | 1               |
|            | 20                   | 17.1                              | 205                      | 13                           | 1               |
|            | 21                   | 19.6                              | 297                      | 14                           | 1               |
|            | 22                   | 15.8                              | 355                      | 12                           | 1               |
|            | 23                   | 14.2                              | 222                      | 15                           | 1               |
|            | 24                   | 19.1                              | 296                      | 12                           | 1               |
|            | 25                   | 13.3                              | 310                      | 14                           | 1               |
|            | 26                   | 16.2                              | 293                      | 13                           | 1               |
|            | 27                   | 12.1                              | 402                      | 12                           | 1               |
|            | 28                   | 13.9                              | 266                      | 16                           | 1               |
|            | 29                   | 16.8                              | 278                      | 13                           | 1               |
|            | 30                   | 15.4                              | 461                      | 13                           | 1               |
|            | Detection Percentage |                                   |                          |                              | 100% (> 60%)    |

Table 32. Statistical Performance Check – Radar Type 4, 802.11ac 80 MHz

| Radar Type           | Trial # | Filename*     | Detection       |
|----------------------|---------|---------------|-----------------|
|                      |         |               | 1 = Yes, 0 = No |
| 5                    | 1       | bin5-trial 1  | 1               |
|                      | 2       | bin5-trial 2  | 1               |
|                      | 3       | bin5-trial 3  | 1               |
|                      | 4       | bin5-trial 4  | 0               |
|                      | 5       | bin5-trial 5  | 1               |
|                      | 6       | bin5-trial 6  | 1               |
|                      | 7       | bin5-trial 7  | 1               |
|                      | 8       | bin5-trial 8  | 1               |
|                      | 9       | bin5-trial 9  | 1               |
|                      | 10      | bin5-trial 10 | 1               |
|                      | 11      | bin5-trial 11 | 1               |
|                      | 12      | bin5-trial 12 | 1               |
|                      | 13      | bin5-trial 13 | 1               |
|                      | 14      | bin5-trial 14 | 1               |
|                      | 15      | bin5-trial 15 | 1               |
|                      | 16      | bin5-trial 16 | 1               |
|                      | 17      | bin5-trial 17 | 1               |
|                      | 18      | bin5-trial 18 | 0               |
|                      | 19      | bin5-trial 19 | 1               |
|                      | 20      | bin5-trial 20 | 1               |
|                      | 21      | bin5-trial 21 | 0               |
|                      | 22      | bin5-trial 22 | 1               |
|                      | 23      | bin5-trial 23 | 1               |
|                      | 24      | bin5-trial 24 | 1               |
|                      | 25      | bin5-trial 25 | 1               |
|                      | 26      | bin5-trial 26 | 1               |
|                      | 27      | bin5-trial 27 | 1               |
|                      | 28      | bin5-trial 28 | 1               |
|                      | 29      | bin5-trial 29 | 1               |
|                      | 30      | bin5-trial 30 | 1               |
| Detection Percentage |         |               | 90 % (> 80 %)   |

**Table 33. Statistical Performance Check – Radar Type 5, 802.11ac 80 MHz**

Note: See Appendix for Bin 5 test data.

| Radar Type           | Trial # | Frequency (MHz) | Pulses/Hop | Pulse Width (µsec) | PRI (µsec) | Detection       |
|----------------------|---------|-----------------|------------|--------------------|------------|-----------------|
|                      |         |                 |            |                    |            | 1 = Yes, 0 = No |
| 6                    | 1       |                 | 9          | 1                  | 333        | 1               |
|                      | 2       |                 | 9          | 1                  | 333        | 1               |
|                      | 3       |                 | 9          | 1                  | 333        | 1               |
|                      | 4       |                 | 9          | 1                  | 333        | 0               |
|                      | 5       |                 | 9          | 1                  | 333        | 1               |
|                      | 6       |                 | 9          | 1                  | 333        | 1               |
|                      | 7       |                 | 9          | 1                  | 333        | 1               |
|                      | 8       |                 | 9          | 1                  | 333        | 1               |
|                      | 9       |                 | 9          | 1                  | 333        | 1               |
|                      | 10      |                 | 9          | 1                  | 333        | 1               |
|                      | 11      |                 | 9          | 1                  | 333        | 1               |
|                      | 12      |                 | 9          | 1                  | 333        | 1               |
|                      | 13      |                 | 9          | 1                  | 333        | 1               |
|                      | 14      |                 | 9          | 1                  | 333        | 1               |
|                      | 15      |                 | 9          | 1                  | 333        | 1               |
|                      | 16      |                 | 9          | 1                  | 333        | 1               |
|                      | 17      |                 | 9          | 1                  | 333        | 1               |
|                      | 18      |                 | 9          | 1                  | 333        | 1               |
|                      | 19      |                 | 9          | 1                  | 333        | 1               |
|                      | 20      |                 | 9          | 1                  | 333        | 0               |
|                      | 21      |                 | 9          | 1                  | 333        | 1               |
|                      | 22      |                 | 9          | 1                  | 333        | 0               |
|                      | 23      |                 | 9          | 1                  | 333        | 1               |
|                      | 24      |                 | 9          | 1                  | 333        | 0               |
|                      | 25      |                 | 9          | 1                  | 333        | 1               |
|                      | 26      |                 | 9          | 1                  | 333        | 1               |
|                      | 27      |                 | 9          | 1                  | 333        | 1               |
|                      | 28      |                 | 9          | 1                  | 333        | 0               |
|                      | 29      |                 | 9          | 1                  | 333        | 1               |
|                      | 30      |                 | 9          | 1                  | 333        | 1               |
| Detection Percentage |         |                 |            |                    |            | 83% (> 60%)     |

Table 34. Statistical Performance Check – Radar Type 6, 802.11ac 80 MHz

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

| Asset  | Equipment                 | Manufacturer         | Model  | Calibration Date | Calibration Due Date |
|--------|---------------------------|----------------------|--------|------------------|----------------------|
| 1T4871 | VECTOR SIGNAL GENERATOR   | AGILENT              | N5172B | 6/16/2014        | 12/16/2015           |
| 1S2460 | 1-26GHZ SPECTRUM ANALYZER | AGILENT TECHNOLOGIES | E4407B | 2/27/2014        | 8/27/2015            |

**Table 35. DFS Test Equipment List**

## **V. Certification & User's Manual Information**

---

## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### **§ 2.801 Radio-frequency device defined.**

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### **§ 2.803 Marketing of radio frequency devices prior to equipment authorization.**

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

---

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

---

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.
- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

---

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



ARRIS Group  
VAP3400

Electromagnetic Compatibility  
End of Report  
CFR Title 47, Part 15.407; RSS-210 DFS Bands

---

# End of Report