FCC Test Report

FCC ID	:	**ACQ-VIP7802ATSC**
Equipment	:	**WiFi Set Top Box**
Model No.	:	**VIP7802ATSC**
Brand Name	:	**ARRIS**
Applicant	:	**ARRIS**
Address	:	**101 Tournament Drive, Horsham, Pennsylvania, United States 19044**
Standard	:	**47 CFR FCC Part 15.247**
Received Date	:	**Nov. 30, 2021**
Tested Date	:	**Dec. 31, 2021 ~ Jan. 19, 2022**

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:	**Approved by:**
Along Chen / Assistant Manager	**Gary Chang / Manager**

Table of Contents

1 GENERAL DESCRIPTION 5

1.1 Information 5
1.2 Local Support Equipment List 8
1.3 Test Setup Chart 8
1.4 The Equipment List 9
1.5 Test Standards 10
1.6 Reference Guidance 10
1.7 Deviation from Test Standard and Measurement Procedure 10
1.8 Measurement Uncertainty 10

2 TEST CONFIGURATION 11

2.1 Testing Facility 11
2.2 The Worst Test Modes and Channel Details 11

3 TRANSMITTER TEST RESULTS 12

3.1 Conducted Emissions 12
3.2 Unwanted Emissions into Restricted Frequency Bands 15
3.3 Unwanted Emissions into Non-Restricted Frequency Bands 32
3.4 Conducted Output Power 40
3.5 Number of Hopping Frequency 43
3.6 20dB and Occupied Bandwidth 47
3.7 Channel Separation 54
3.8 Number of Dwell Time 61

4 TEST LABORATORY INFORMATION 67

Release Record

Report No.	Version	Description	Issued Date
FR1N3001AD	Rev. 01	Initial issue	Feb. 10, 2022

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 1.411MHz 42.08 (Margin -3.92dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 333.61MHz 42.25 (Margin -3.75dB) - PK	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 6.09	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	**Bluetooth Mode**	**Ch. Frequency (MHz)**	**Channel Number**	**Data Rate**
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps
Note 1: RF output power specifies that Maximum Peak Conducted Output Power. Note 2: Bluetooth BR uses a GFSK. Note 3: Bluetooth EDR uses a combination of π/4-DQPSK and 8DPSK.				

1.1.2 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)	Remarks
1	PIFA	N/A	2.7	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter

1.1.4 Accessories

Accessories		
No.	**Equipment**	**Description**
1	Adapter	Brand: APD Model: WB-18R12FU-ABAK Power Rating: I/P: 100-120Vac, 60Hz O/P: 12V⎓1.5A Power Line: 1.75m non-shielded without core
2	Remote Control	Model: T4HU2120/36K

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	Bluetooth Simulator, Brand: R&S, Model: CMW270	
Modulation Mode	**Duty Cycle Of Test Signal (%)**	**Duty Factor (dB)**
DH5	78.08%	1.07
2DH5	77.61%	1.10
3DH5	78.38%	1.06

1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	**2441**	**2480**
GFSK/1Mbps	default	default	default
π/4-DQPSK /2Mbps	default	default	default
8DPSK/3Mbps	default	default	default

1.2 Local Support Equipment List

Support Equipment List					
No.	**Equipment**	**Brand**	**Model**	**FCC ID**	**Remarks**
1	Notebook	DELL	Latitude E5470	---	---
2	TV	CHIMEI	TL-24LF500D	---	---
3	75ohm load	ICC	75 ohm load	---	Provided by applicant.
4	Debug Board	---	---	---	---
5	USB Load cable	---	---	---	Provided by applicant.

1.3 Test Setup Chart

Test Setup Diagram

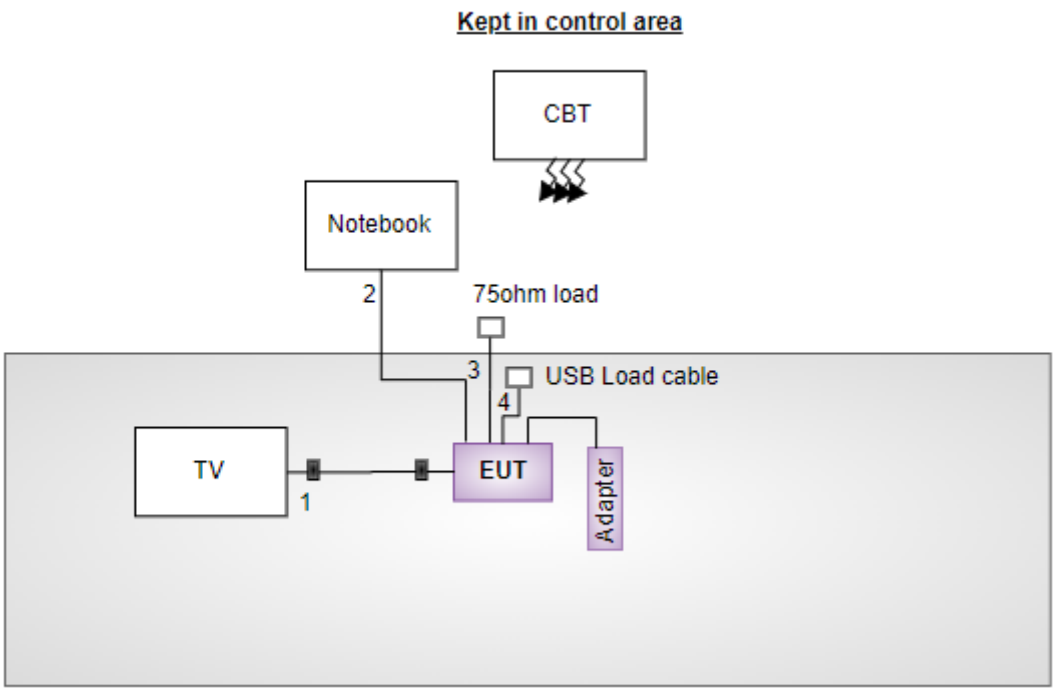

No.	Signal cable / Length (m)
1	HDMI, 1m shielded with tow cores..
2	RJ45, 10m non-shielded.
3	Coaxial, 1m non-shielded with load.
4	USB cable, 0.2m non-shielded with load

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Jan. 18, 2022				
Instrument	**Brand**	**Model No.**	**Serial No.**	**Calibration Date**	**Calibration Until**
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
LISN	R&S	ENV216	101579	Mar. 17, 2021	Mar. 16, 2022
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127477	Feb .25, 2021	Feb .24, 2022
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 19, 2021	Oct. 18, 2022
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Dec. 31, 2021 ~ Jan. 06, 2022				
Instrument	**Brand**	**Model No.**	**Serial No.**	**Calibration Date**	**Calibration Until**
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Spectrum Analyzer	R&S	FSV40	101063	Apr. 19, 2021	Apr. 18, 2022
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 03, 2021	Dec. 02, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2021	Nov. 03, 2022
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022
LF cable 11M	EMC	EMCCFD400-NW-NW-11000	200801	Oct. 05, 2021	Oct. 04, 2022
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	160502	Oct. 05, 2021	Oct. 04, 2022
RF Cable	EMC	EMC104-35M-35M-8000	210920	Oct. 05, 2021	Oct. 04, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Wireless connectivity tester	R&S	CMW270	100856	Nov. 01, 2021	Oct. 31, 2022
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Jan. 19, 2022				
Instrument	**Brand**	**Model No.**	**Serial No.**	**Calibration Date**	**Calibration Until**
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Power Sensor	Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Measurement Software	Sporton	SENSE-15247_FS	V5.10.7.11	NA	NA
Wireless connectivity tester	R&S	CMW270	100856	Nov. 01, 2021	Oct. 31, 2022
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	**Uncertainty**
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.41 dB
Radiated emission > 1GHz	±4.59 dB
Time	±0.1%

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions Radiated Emissions ≤ 1GHz	8DPSK	2402	3Mbps	---
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	---
Conducted Output Power	GFSK π/4 DQPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	---
Number of Hopping Channels	GFSK π/4 DQPSK 8DPSK	2402~2480 2402~2480 2402~2480	1Mbps 2Mbps 3Mbps	---
Hopping Channel Separation 20dB and Occupied bandwidth	GFSK π/4 DQPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	---
Dwell Time	GFSK π/4 DQPSK 8DPSK	2402 2402 2402	1Mbps 2Mbps 3Mbps	---

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	**Quasi-Peak**	**Average**
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

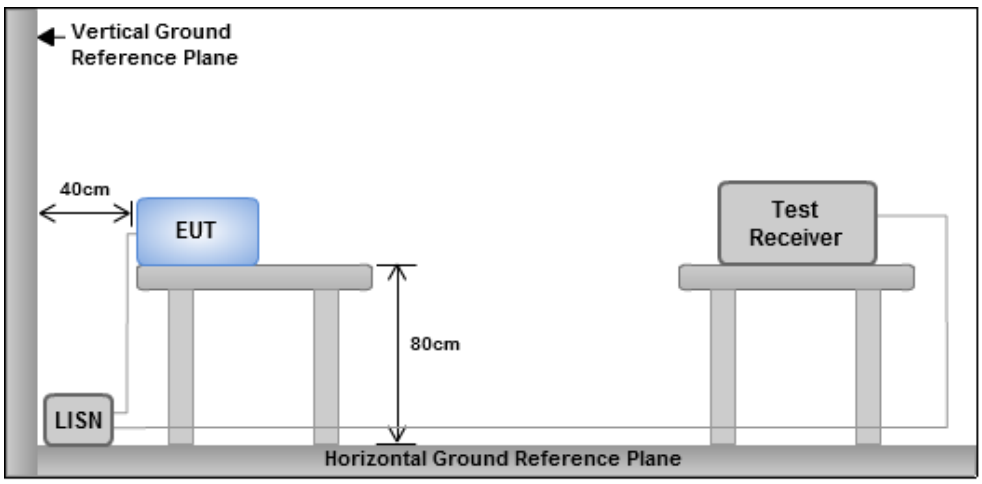

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

Modulation	8DPSK	Test Freq. (MHz)	2402
Power Phase	Line		

Test by : Joe Liao Temperature: 20°C Humidity: 60%

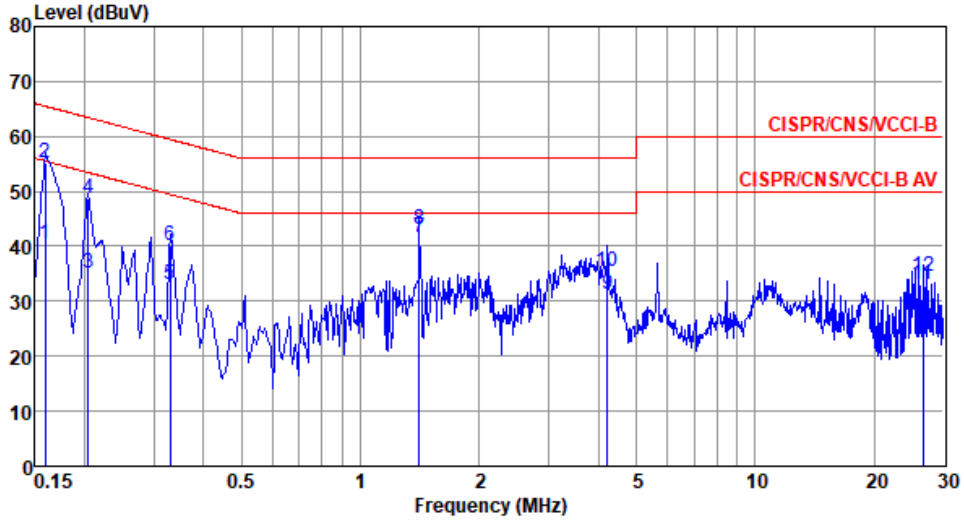

	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Cable loss	Aux	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	dB	dB	
1	0.159	40.45	55.52	-15.07	30.51	9.66	0.08	0.20	Average
2	0.159	55.25	65.52	-10.27	45.31	9.66	0.08	0.20	QP
3	0.204	35.20	53.45	-18.25	25.25	9.65	0.08	0.22	Average
4	0.204	48.85	63.45	-14.60	38.90	9.65	0.08	0.22	QP
5	0.330	33.08	49.44	-16.36	23.04	9.64	0.08	0.32	Average
6	0.330	40.16	59.44	-19.28	30.12	9.64	0.08	0.32	QP
7*	1.411	41.64	46.00	-4.36	31.43	9.65	0.18	0.38	Average
8	1.411	42.96	56.00	-13.04	32.75	9.65	0.18	0.38	QP
9	4.224	31.27	46.00	-14.73	20.96	9.67	0.22	0.42	Average
10	4.224	35.49	56.00	-20.51	25.18	9.67	0.22	0.42	QP
11	26.632	33.05	50.00	-16.95	21.92	9.65	0.73	0.75	Average
12	26.632	34.46	60.00	-25.54	23.33	9.65	0.73	0.75	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation	8DPSK	Test Freq. (MHz)	2402
Power Phase	Neutral		

Test by : Joe Liao Temperature: 20°C Humidity: 60%

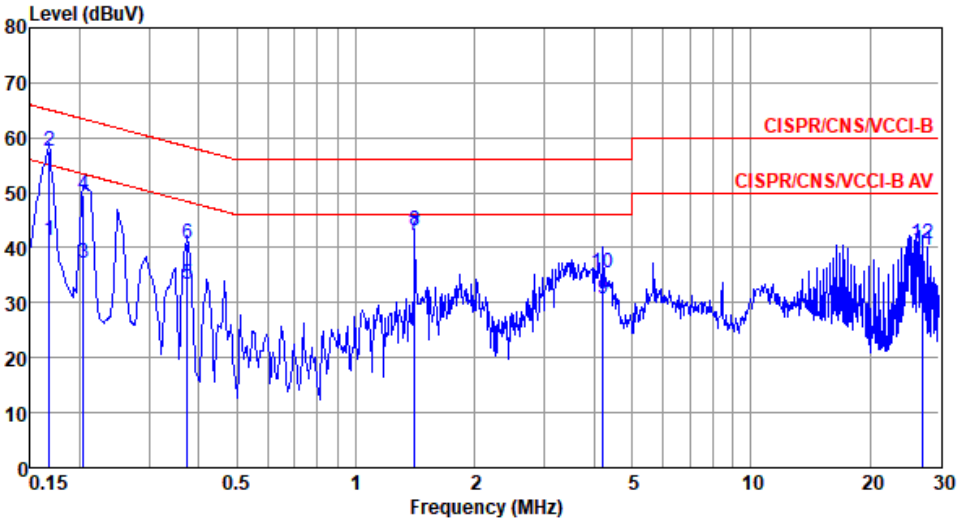

	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Cable loss	Aux	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	dB	dB	
1	0.168	41.38	55.08	-13.70	31.44	9.69	0.08	0.17	Average
2	0.168	57.51	65.08	-7.57	47.57	9.69	0.08	0.17	QP
3	0.204	37.30	53.45	-16.15	27.36	9.68	0.08	0.18	Average
4	0.204	49.67	63.45	-13.78	39.73	9.68	0.08	0.18	QP
5	0.375	33.45	48.39	-14.94	23.51	9.67	0.08	0.19	Average
6	0.375	40.61	58.39	-17.78	30.67	9.67	0.08	0.19	QP
7*	1.411	42.08	46.00	-3.92	31.93	9.68	0.18	0.29	Average
8	1.411	43.09	56.00	-12.91	32.94	9.68	0.18	0.29	QP
9	4.224	30.65	46.00	-15.35	20.40	9.70	0.22	0.33	Average
10	4.224	35.38	56.00	-20.62	25.13	9.70	0.22	0.33	QP
11	27.280	39.70	50.00	-10.30	28.43	9.85	0.74	0.68	Average
12	27.280	40.60	60.00	-19.40	29.33	9.85	0.74	0.68	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	**Field Strength (uV/m)**	**Field Strength (dBuV/m)**	**Measure Distance (m)**
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit
Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. Radiated emission above 1GHz / Peak value
   RBW=1MHz, VBW=3MHz and Peak detector
3. Radiated emission above 1GHz / Average value for harmonics
   The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:

$$20\log(\text{Duty cycle}) = 20\log\frac{1\text{s} / 1600 * 5}{100\text{ ms}} = -30.1\text{dB}$$

4. Radiated emission above 1GHz / Average value for other emissions
   RBW=1MHz, VBW=1/T and Peak detector

3.2.3 Test Setup

Radiated Emissions below 1 GHz

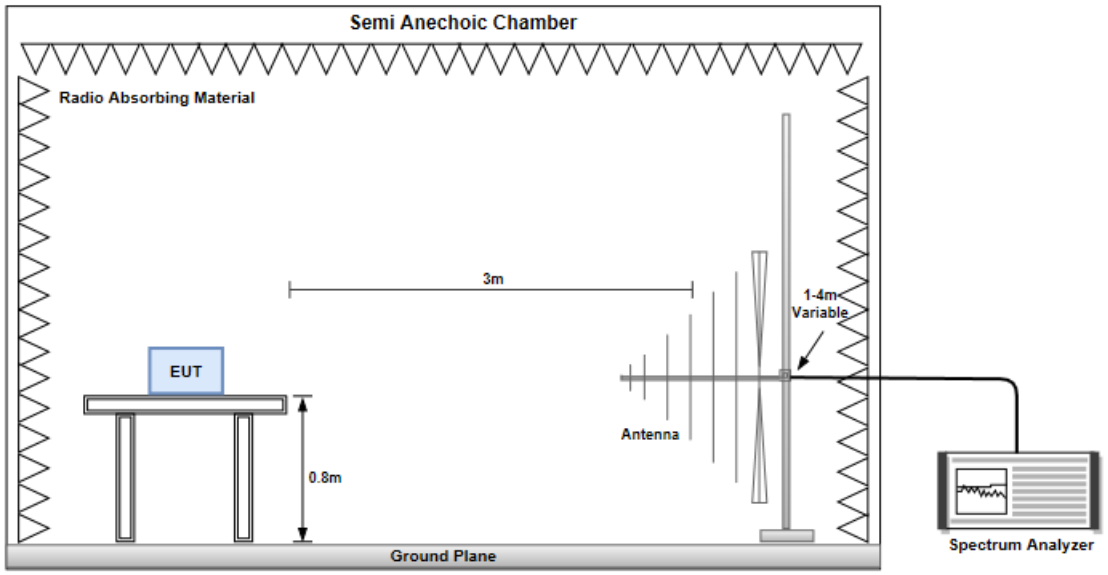

Radiated Emissions above 1 GHz

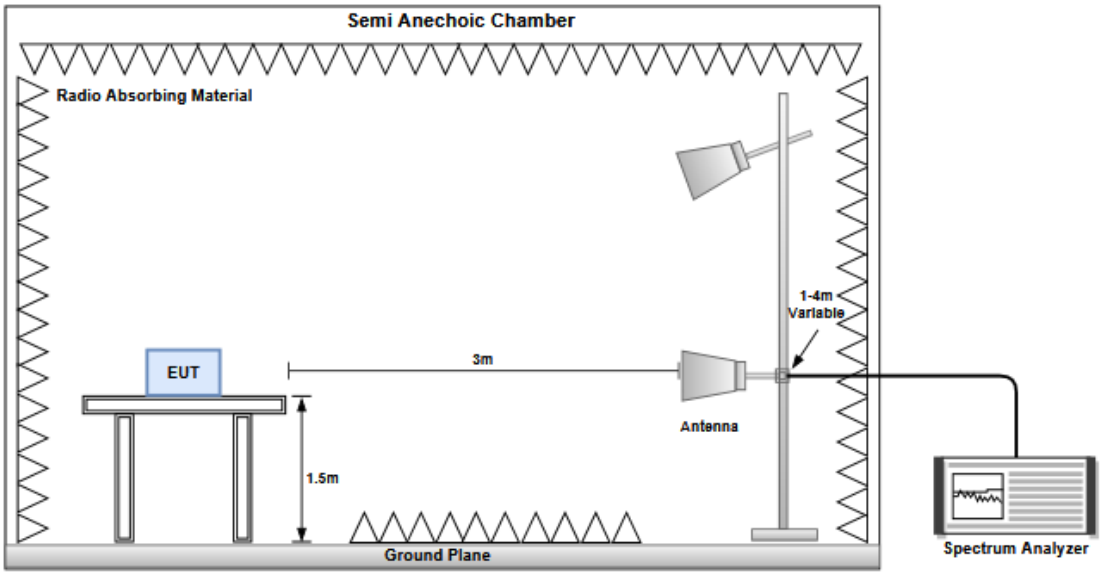

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :Roger Lu Temperature(℃):23 Humidity(%):65

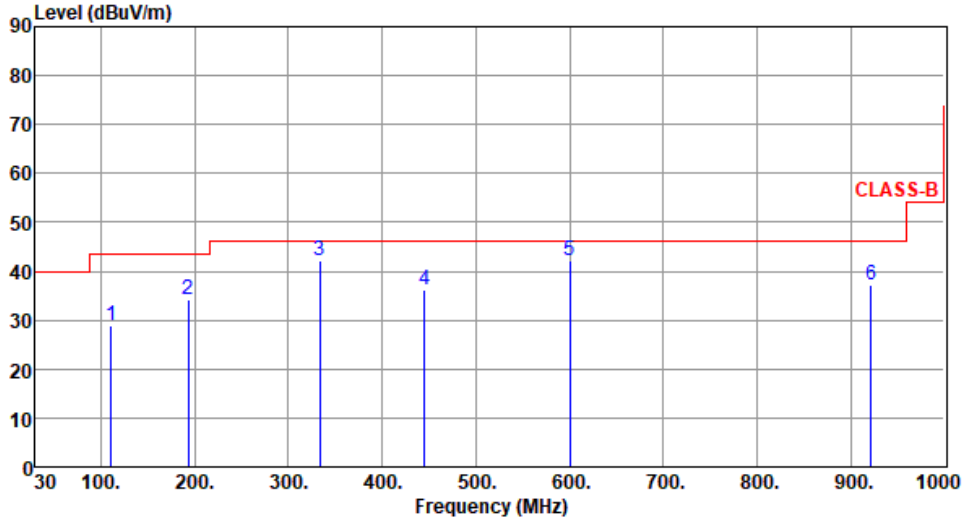

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	110.51	29.06	43.50	-14.44	40.74	-11.68	Peak	---	---
2	192.96	34.23	43.50	-9.27	45.93	-11.70	Peak	---	---
3	333.61	42.25	46.00	-3.75	49.61	-7.36	Peak	---	---
4	445.16	36.14	46.00	-9.86	40.50	-4.36	Peak	---	---
5	600.36	42.12	46.00	-3.88	43.13	-1.01	Peak	---	---
6	921.43	37.18	46.00	-8.82	33.21	3.97	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(℃):23 Humidity(%):65

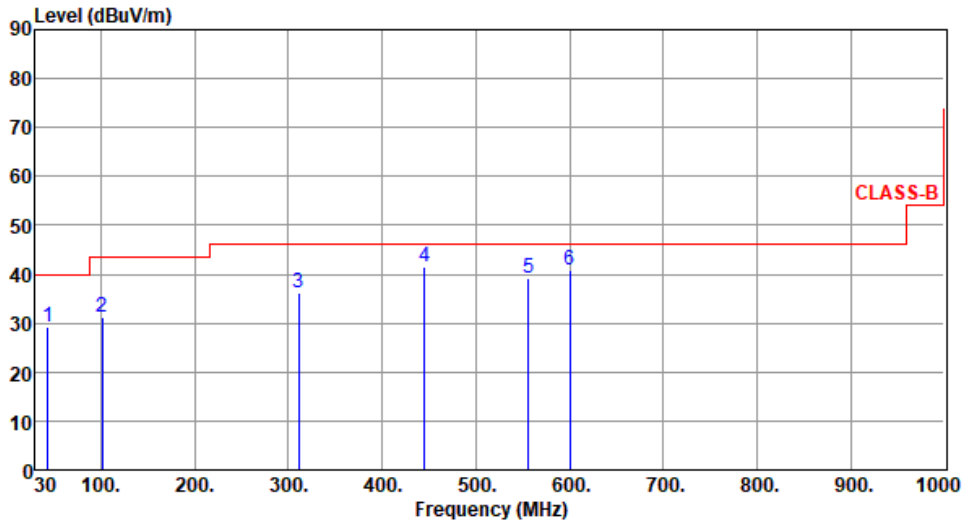

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	43.58	29.08	40.00	-10.92	37.63	-8.55	Peak	---	---
2	101.78	31.17	43.50	-12.33	44.09	-12.92	Peak	---	---
3	311.30	36.16	46.00	-9.84	43.92	-7.76	Peak	---	---
4	445.31	41.62	46.00	-4.38	45.97	-4.35	QP	100	153
5	555.74	39.22	46.00	-6.78	41.53	-2.31	Peak	---	---
6	600.36	40.86	46.00	-5.14	41.87	-1.01	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

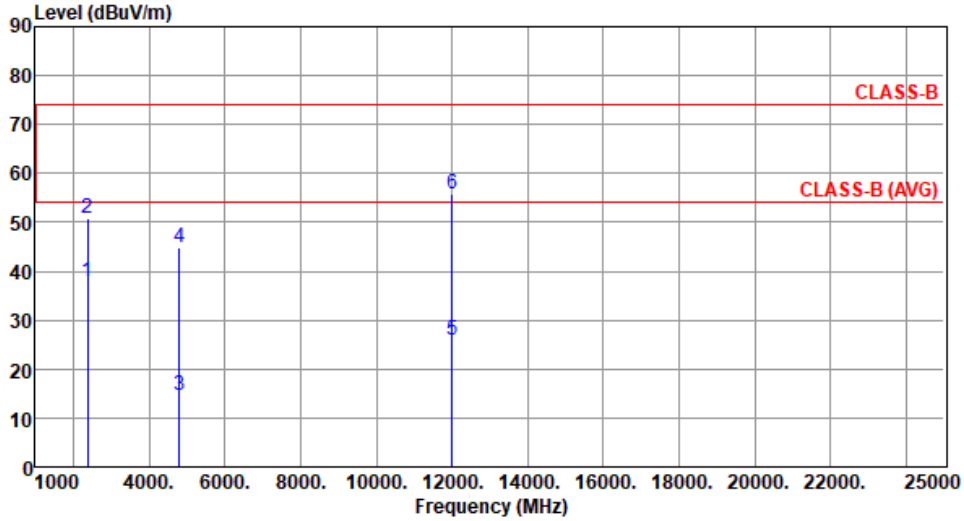

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.81	54.00	-16.19	40.56	-2.75	Average	124	185
2	2390.00	50.84	74.00	-23.16	53.59	-2.75	Peak	124	185
3	4804.00	14.68	54.00	-39.32	10.55	4.13	Average	100	20
4	4804.00	44.78	74.00	-29.22	40.65	4.13	Peak	100	20
5	12010.00	25.84	54.00	-28.16	12.22	13.62	Average	100	60
6	12010.00	55.94	74.00	-18.06	42.32	13.62	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

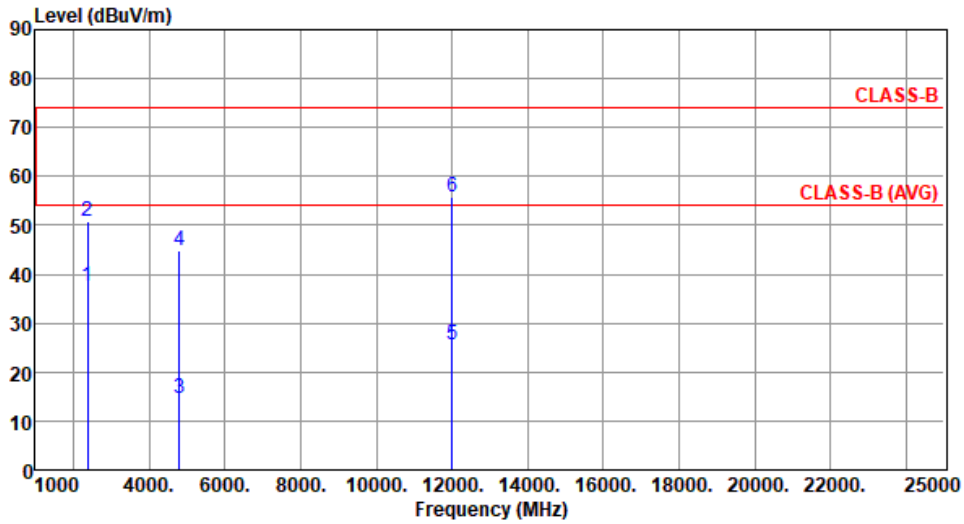

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.67	54.00	-16.33	40.42	-2.75	Average	100	186
2	2390.00	50.71	74.00	-23.29	53.46	-2.75	Peak	100	186
3	4804.00	14.57	54.00	-39.43	10.44	4.13	Average	100	30
4	4804.00	44.67	74.00	-29.33	40.54	4.13	Peak	100	30
5	12010.00	25.64	54.00	-28.36	12.02	13.62	Average	100	50
6	12010.00	55.74	74.00	-18.26	42.12	13.62	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

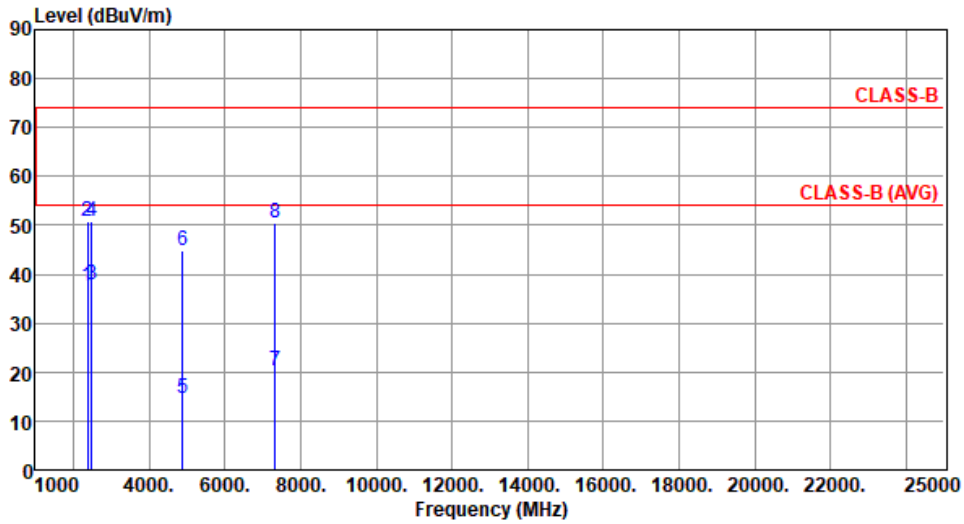

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.51	54.00	-16.49	40.26	-2.75	Average	108	184
2	2390.00	50.84	74.00	-23.16	53.59	-2.75	Peak	108	184
3	2483.50	37.75	54.00	-16.25	40.45	-2.70	Average	108	184
4	2483.50	50.95	74.00	-23.05	53.65	-2.70	Peak	108	184
5	4882.00	14.57	54.00	-39.43	10.45	4.12	Average	100	55
6	4882.00	44.67	74.00	-29.33	40.55	4.12	Peak	100	55
7	7323.00	20.37	54.00	-33.63	11.10	9.27	Average	100	20
8	7323.00	50.47	74.00	-23.53	41.20	9.27	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

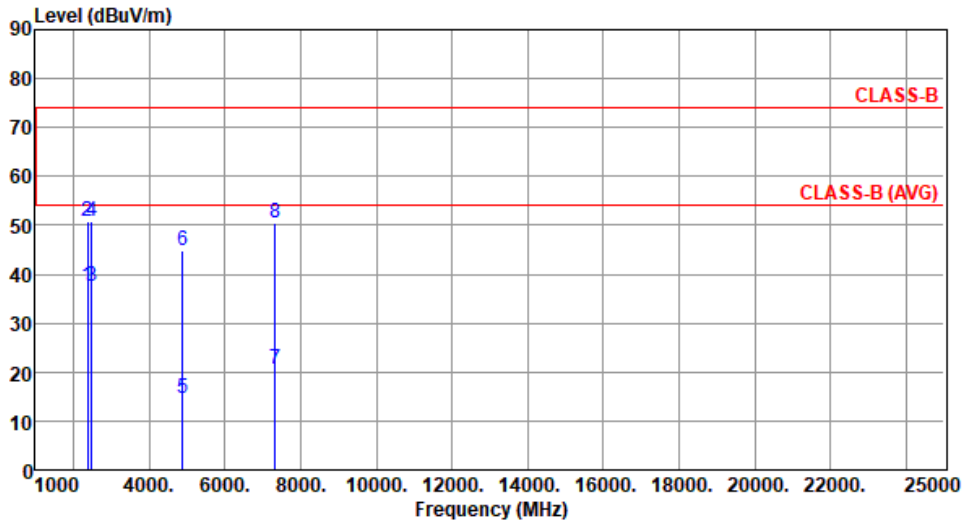

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.40	54.00	-16.60	40.15	-2.75	Average	100	183
2	2390.00	50.71	74.00	-23.29	53.46	-2.75	Peak	100	183
3	2483.50	37.52	54.00	-16.48	40.22	-2.70	Average	100	183
4	2483.50	50.75	74.00	-23.25	53.45	-2.70	Peak	100	183
5	4882.00	14.58	54.00	-39.42	10.46	4.12	Average	100	60
6	4882.00	44.68	74.00	-29.32	40.56	4.12	Peak	100	60
7	7323.00	20.44	54.00	-33.56	11.17	9.27	Average	100	55
8	7323.00	50.54	74.00	-23.46	41.27	9.27	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

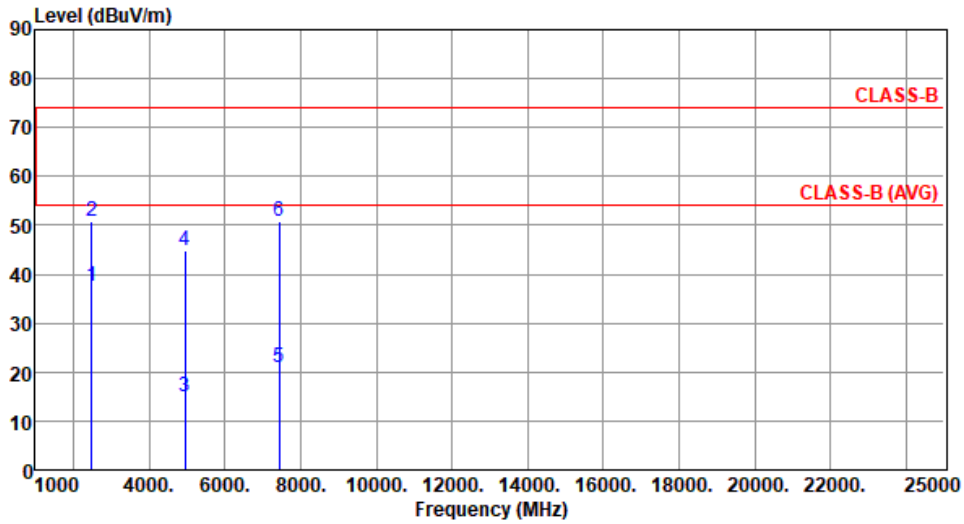

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	37.56	54.00	-16.44	40.26	-2.70	Average	101	188
2	2483.50	50.70	74.00	-23.30	53.40	-2.70	Peak	101	188
3	4960.00	14.78	54.00	-39.22	10.75	4.03	Average	100	60
4	4960.00	44.88	74.00	-29.12	40.85	4.03	Peak	100	60
5	7440.00	20.86	54.00	-33.14	11.49	9.37	Average	100	20
6	7440.00	50.96	74.00	-23.04	41.59	9.37	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

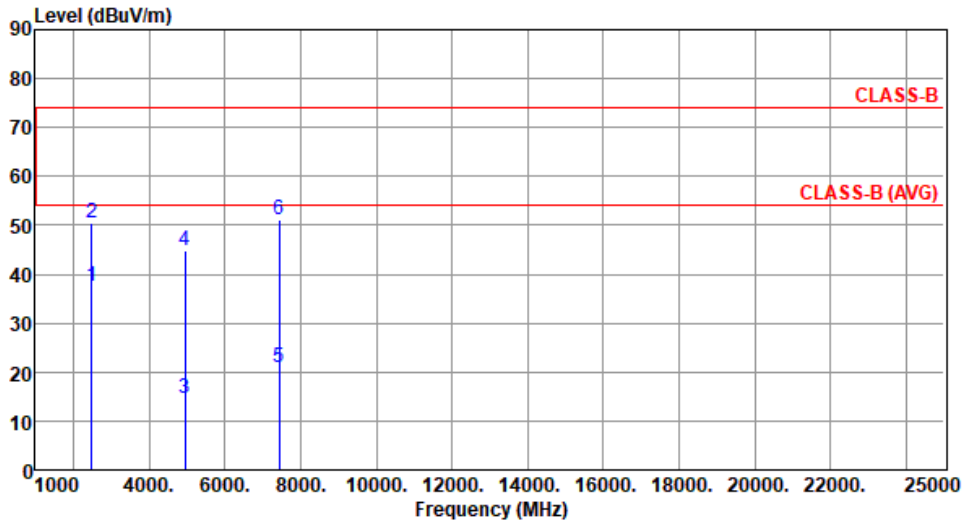

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	37.45	54.00	-16.55	40.15	-2.70	Average	105	184
2	2483.50	50.56	74.00	-23.44	53.26	-2.70	Peak	105	184
3	4960.00	14.57	54.00	-39.43	10.54	4.03	Average	100	55
4	4960.00	44.67	74.00	-29.33	40.64	4.03	Peak	100	55
5	7440.00	20.97	54.00	-33.03	11.60	9.37	Average	100	30
6	7440.00	51.07	74.00	-22.93	41.70	9.37	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):22 Humidity(%):67

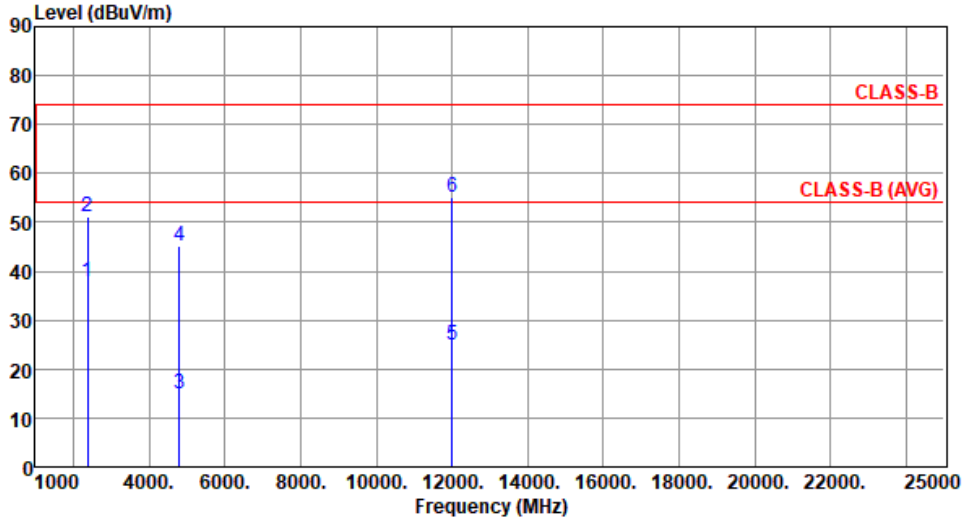

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.89	54.00	-16.11	40.64	-2.75	Average	100	186
2	2390.00	51.14	74.00	-22.86	53.89	-2.75	Peak	100	186
3	4804.00	14.98	54.00	-39.02	10.85	4.13	Average	100	60
4	4804.00	45.08	74.00	-28.92	40.95	4.13	Peak	100	60
5	12010.00	24.89	54.00	-29.11	11.27	13.62	Average	100	40
6	12010.00	54.99	74.00	-19.01	41.37	13.62	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

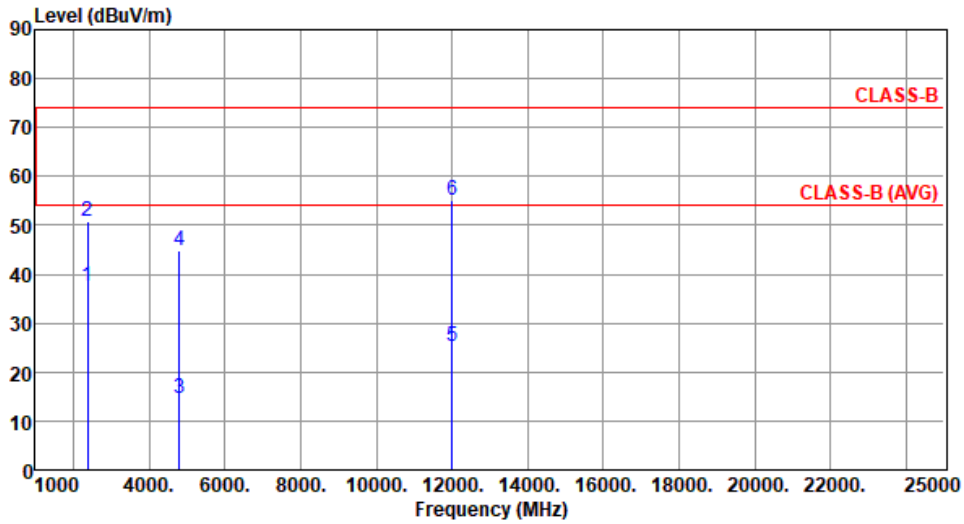

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.50	54.00	-16.50	40.25	-2.75	Average	100	183
2	2390.00	50.71	74.00	-23.29	53.46	-2.75	Peak	100	183
3	4804.00	14.59	54.00	-39.41	10.46	4.13	Average	100	30
4	4804.00	44.69	74.00	-29.31	40.56	4.13	Peak	100	30
5	12010.00	25.16	54.00	-28.84	11.54	13.62	Average	100	60
6	12010.00	55.26	74.00	-18.74	41.64	13.62	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

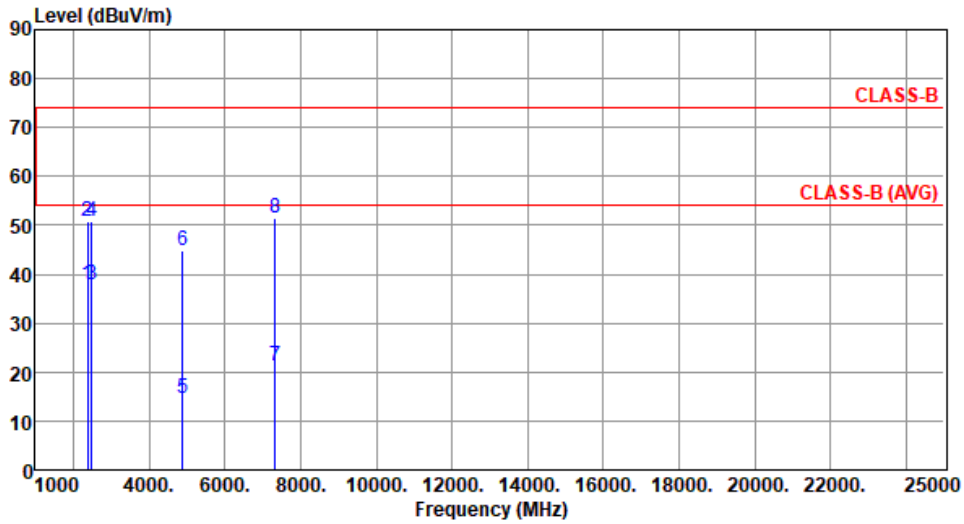

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.81	54.00	-16.19	40.56	-2.75	Average	102	186
2	2390.00	50.83	74.00	-23.17	53.58	-2.75	Peak	102	186
3	2483.50	37.96	54.00	-16.04	40.66	-2.70	Average	102	186
4	2483.50	50.94	74.00	-23.06	53.64	-2.70	Peak	102	186
5	4882.00	14.70	54.00	-39.30	10.58	4.12	Average	100	20
6	4882.00	44.80	74.00	-29.20	40.68	4.12	Peak	100	20
7	7323.00	21.33	54.00	-32.67	12.06	9.27	Average	100	60
8	7323.00	51.43	74.00	-22.57	42.16	9.27	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

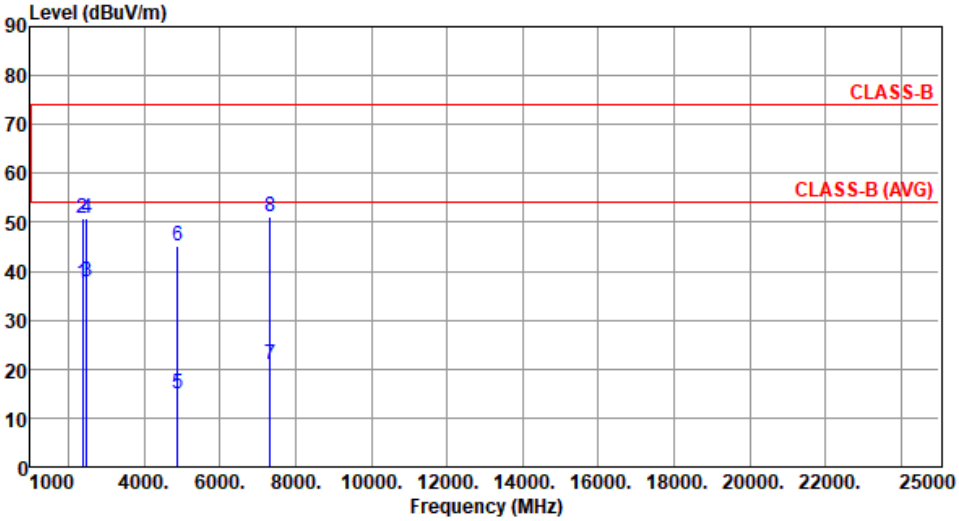

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.67	54.00	-16.33	40.42	-2.75	Average	100	187
2	2390.00	50.71	74.00	-23.29	53.46	-2.75	Peak	100	187
3	2483.50	37.73	54.00	-16.27	40.43	-2.70	Average	100	187
4	2483.50	50.86	74.00	-23.14	53.56	-2.70	Peak	100	187
5	4882.00	15.04	54.00	-38.96	10.92	4.12	Average	100	60
6	4882.00	45.14	74.00	-28.86	41.02	4.12	Peak	100	60
7	7323.00	20.94	54.00	-33.06	11.67	9.27	Average	100	55
8	7323.00	51.04	74.00	-22.96	41.77	9.27	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	**Test Freq. (MHz)**	2480
Polarization	Horizontal		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

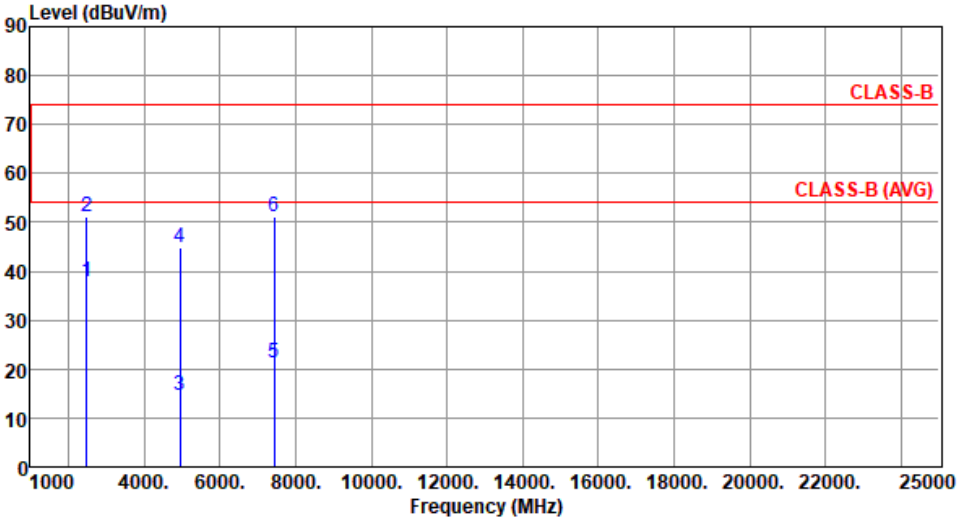

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	37.88	54.00	-16.12	40.58	-2.70	Average	101	189
2	2483.50	50.98	74.00	-23.02	53.68	-2.70	Peak	101	189
3	4960.00	14.57	54.00	-39.43	10.54	4.03	Average	100	20
4	4960.00	44.67	74.00	-29.33	40.64	4.03	Peak	100	20
5	7440.00	21.14	54.00	-32.86	11.77	9.37	Average	100	30
6	7440.00	51.24	74.00	-22.76	41.87	9.37	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	**Test Freq. (MHz)**	2480
Polarization	Vertical		

Test By :Roger Lu Temperature(℃):22 Humidity(%):67

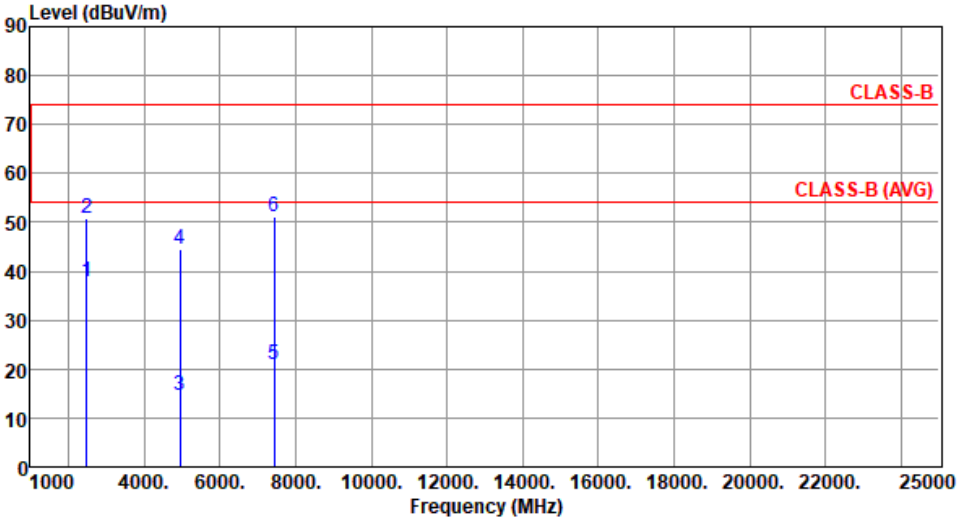

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	37.72	54.00	-16.28	40.42	-2.70	Average	100	181
2	2483.50	50.76	74.00	-23.24	53.46	-2.70	Peak	100	181
3	4960.00	14.49	54.00	-39.51	10.46	4.03	Average	100	60
4	4960.00	44.59	74.00	-29.41	40.56	4.03	Peak	100	60
5	7440.00	20.97	54.00	-33.03	11.60	9.37	Average	100	50
6	7440.00	51.07	74.00	-22.93	41.70	9.37	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures

Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.3.3 Test Setup



3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

Ambient Condition	21°C / 66%	Tested By	Aska Huang

BT-BR(1Mbps) **CSENdB-FS**

2402MHz

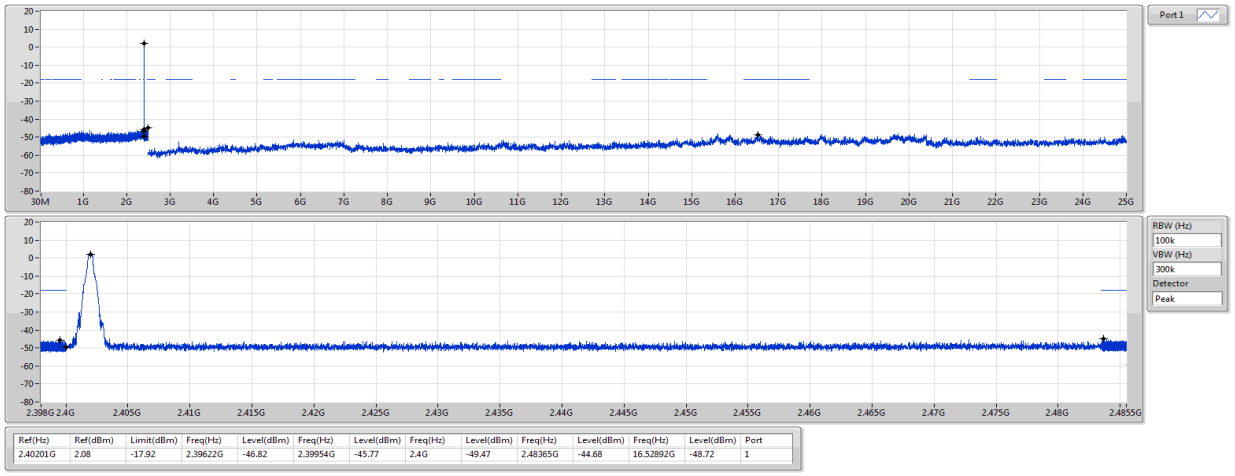

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.40201G	2.08	-17.92	2.39622G	-46.82	2.39954G	-45.77	2.4G	-49.47	2.48365G	-44.68	16.52892G	-48.72	1

BT-BR(1Mbps) **CSENdB-FS**

2441MHz

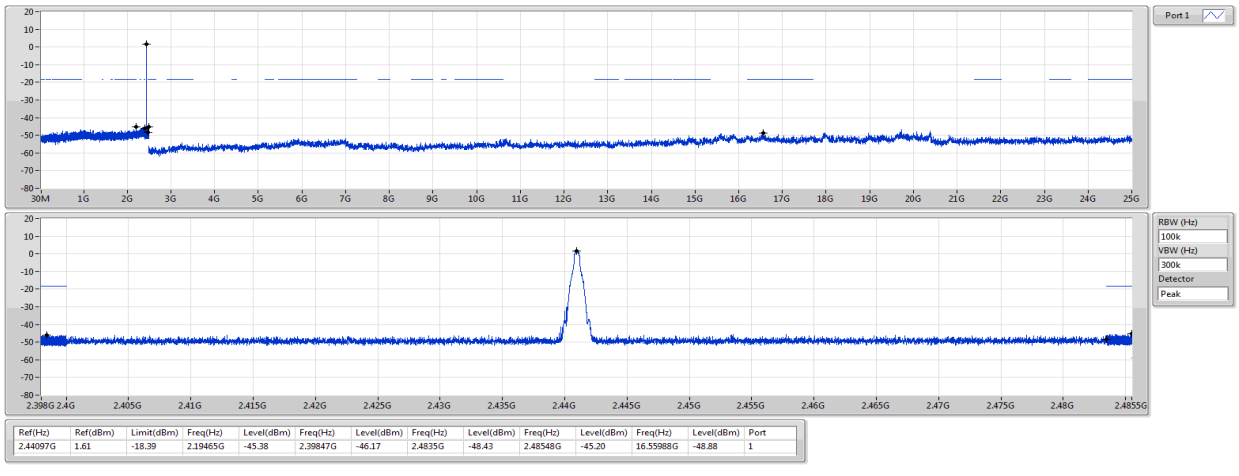

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44097G	1.61	-18.39	2.19465G	-45.38	2.39847G	-46.17	2.4835G	-48.43	2.48548G	-45.20	16.55988G	-48.88	1

BT-BR(1Mbps) **CSENdB-FS**

2480MHz

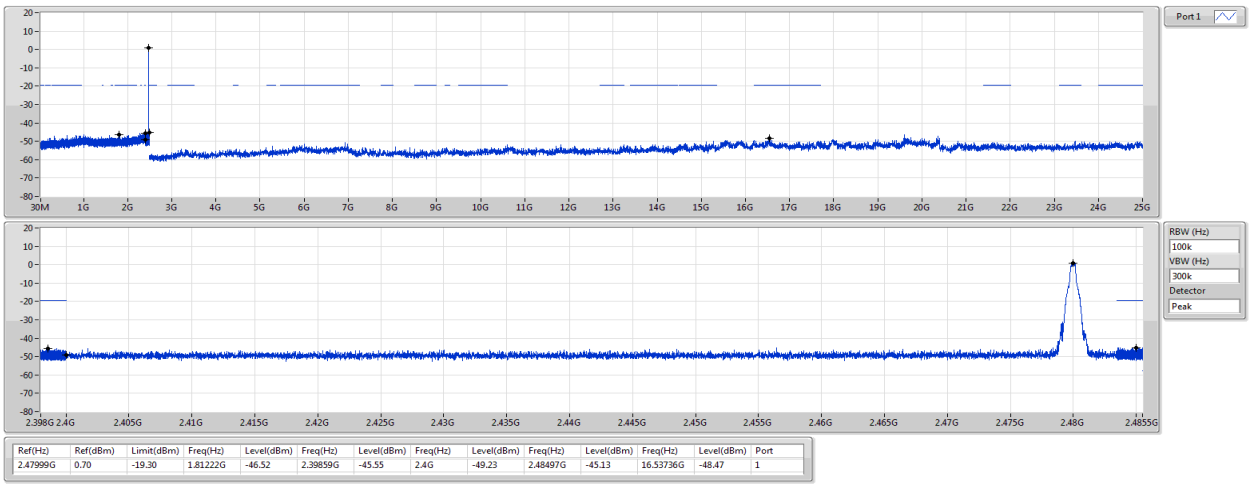

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47999G	0.70	-19.30	1.81222G	-46.52	2.39859G	-45.55	2.4G	-49.23	2.48497G	-45.13	16.53736G	-48.47	1

BT-EDR(2Mbps) **CSENdB-FS**

2402MHz

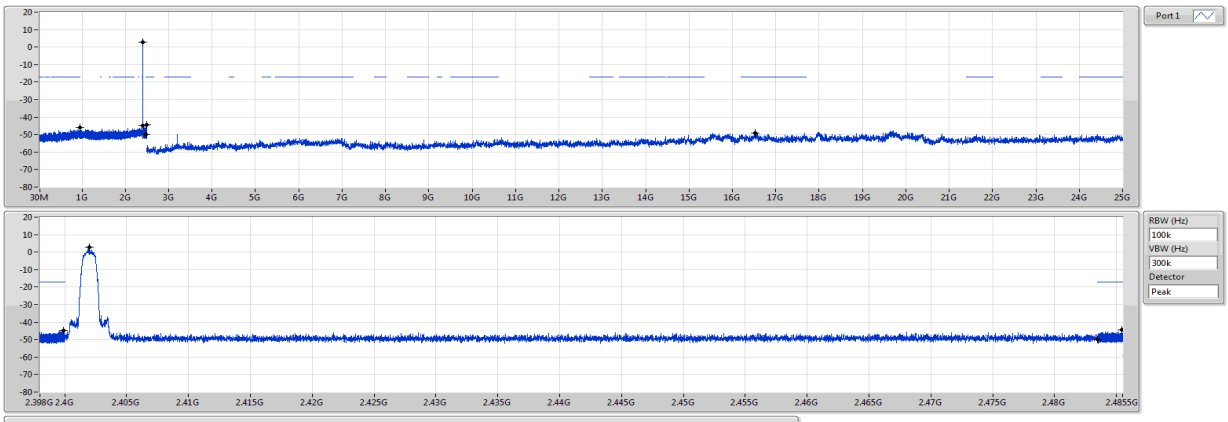

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.40199G	2.77	-17.23	952.04M	-46.17	2.39993G	-44.97	2.4835G	-49.83	2.48541G	-44.45	16.53173G	-49.09	1

BT-EDR(2Mbps) **CSENdB-FS**

2441MHz

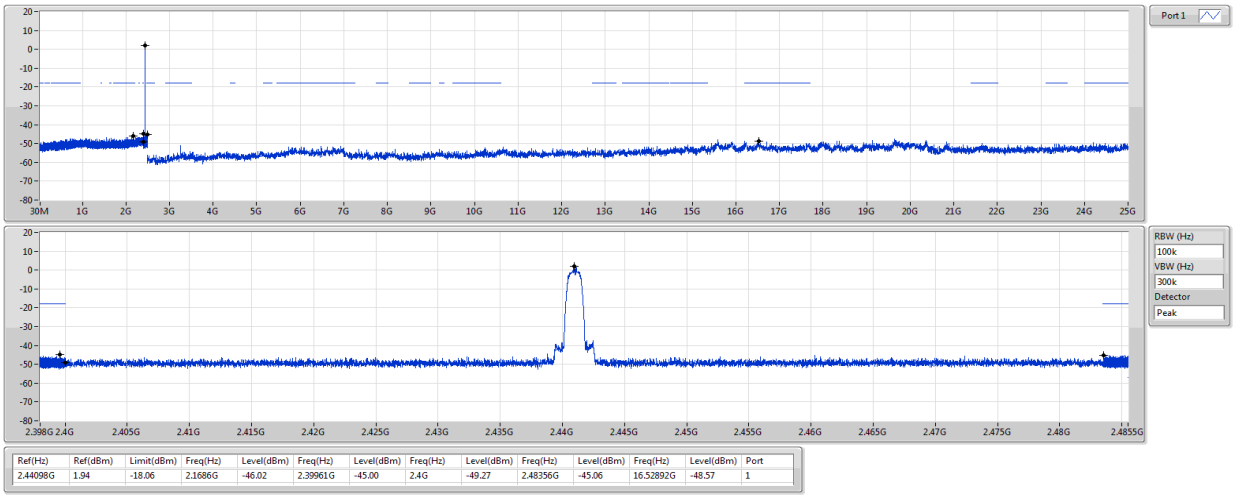

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44098G	1.94	-18.06	2.1686G	-46.02	2.39961G	-45.00	2.4G	-49.27	2.48356G	-45.06	16.52892G	-48.57	1

BT-EDR(2Mbps) **CSENdB-FS**

2480MHz

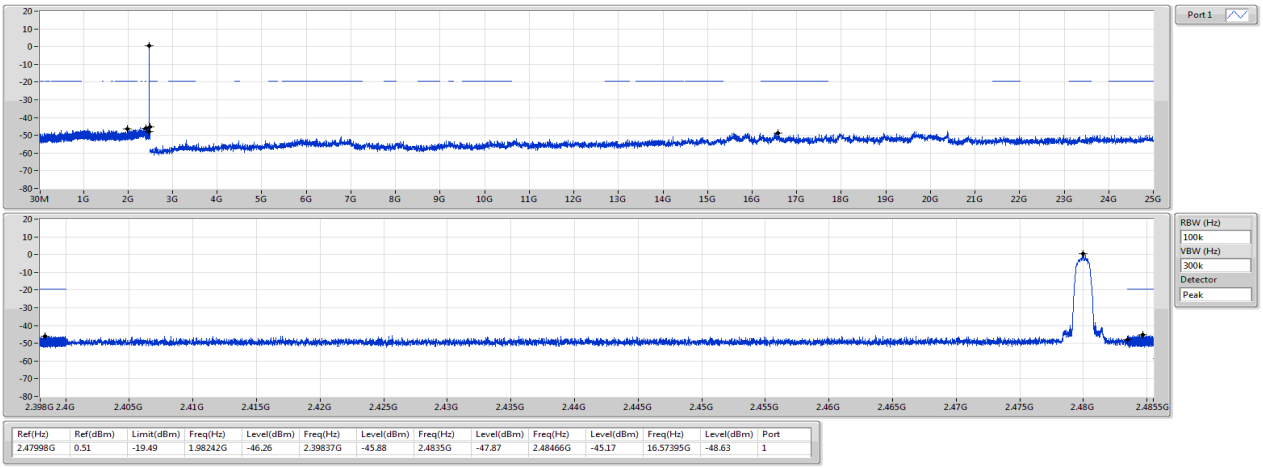

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47998G	0.51	-19.49	1.98242G	-46.26	2.39837G	-45.88	2.4835G	-47.87	2.48466G	-45.17	16.57395G	-48.63	1

BT-EDR(3Mbps) **CSENdB-FS**

2402MHz

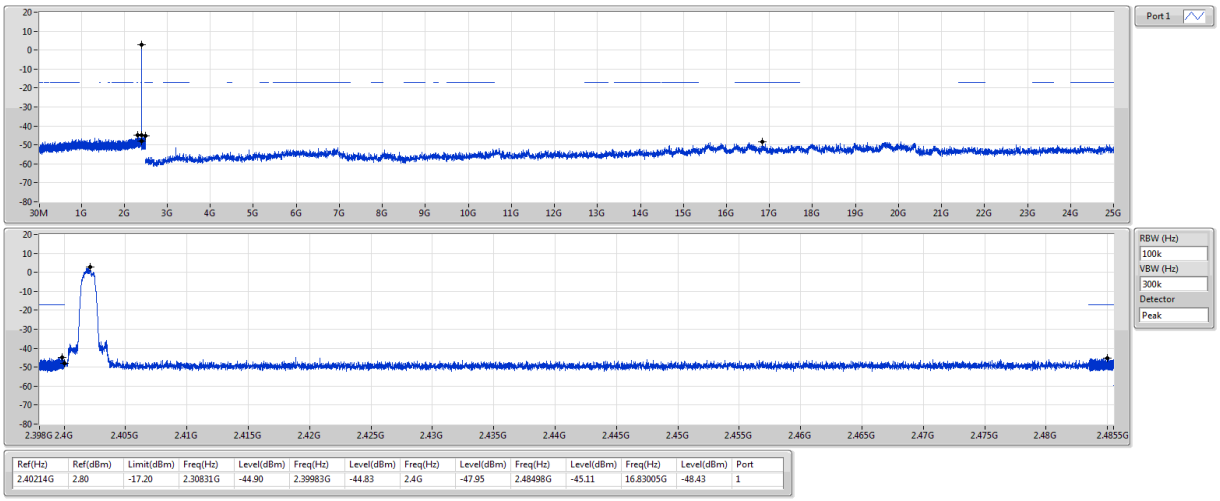

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.40214G	2.80	-17.20	2.30831G	-44.90	2.39983G	-44.83	2.4G	-47.95	2.48498G	-45.11	16.83005G	-48.43	1

BT-EDR(3Mbps) **CSENdB-FS**

2441MHz

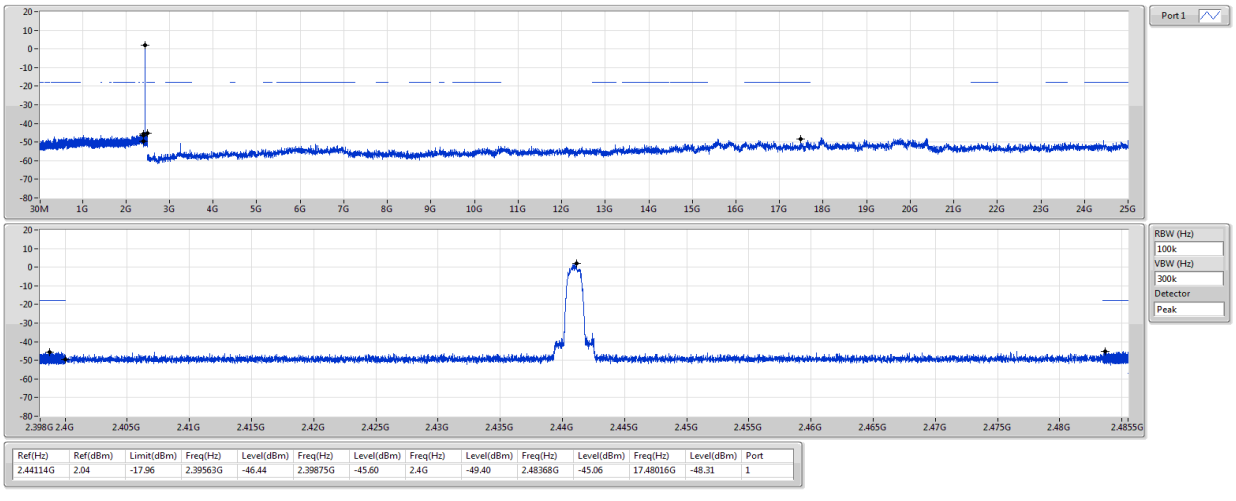

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44114G	2.04	-17.96	2.39563G	-46.44	2.39875G	-45.60	2.4G	-49.40	2.48368G	-45.06	17.48016G	-48.31	1

BT-EDR(3Mbps) **CSENdB-FS**

2480MHz

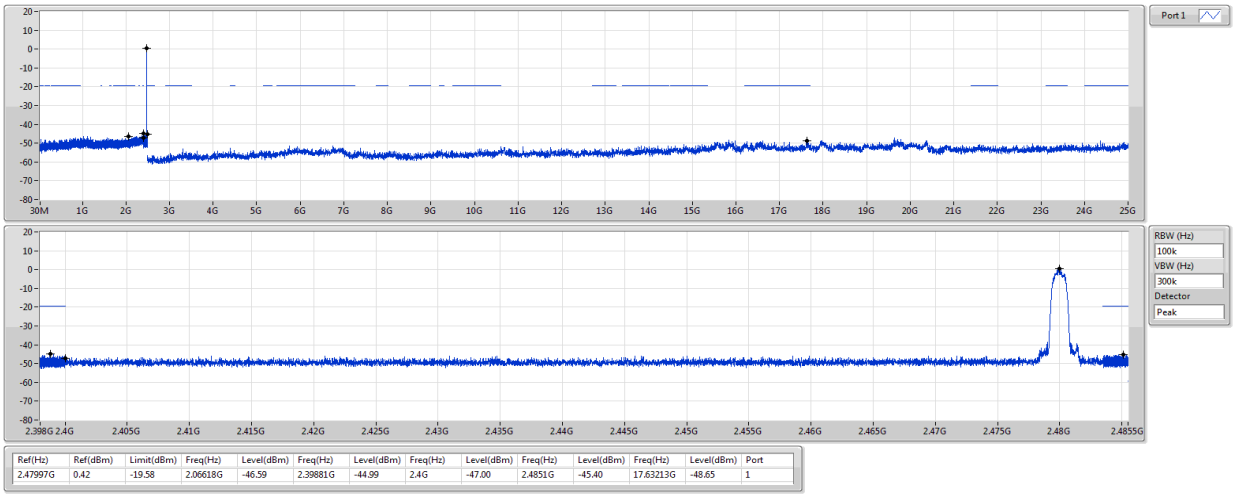

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47997G	0.42	-19.58	2.06618G	-46.59	2.39881G	-44.99	2.4G	-47.00	2.4851G	-45.40	17.63213G	-48.65	1

BT-BR(1Mbps)

2402MHz

Hopping Ch Bandedge (Non-restricted Band)

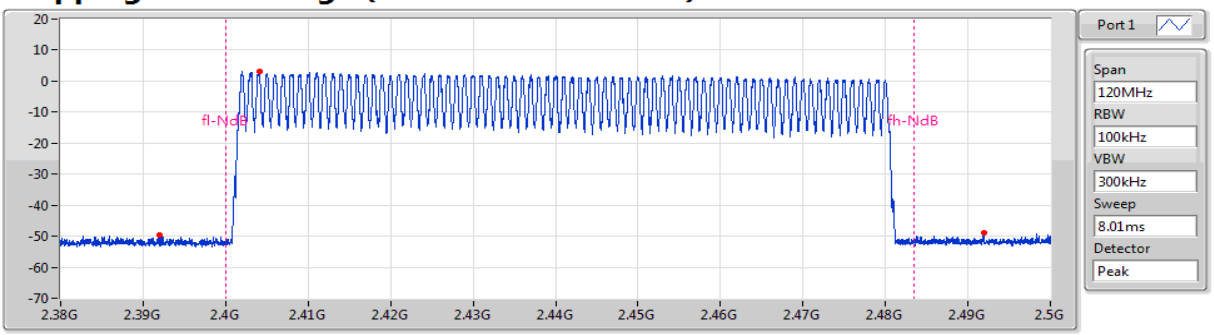

Limit(dBm)	Ref(Hz)	Ref(dBm)	BE-l(Hz)	BE-l(dBm)	BE-h(Hz)	BE-h(dBm)
-17	2.404135G	3	2.39191G	-49.76	2.491975G	-49.03

BT-EDR(2Mbps)

2402MHz

Hopping Ch Bandedge (Non-restricted Band)

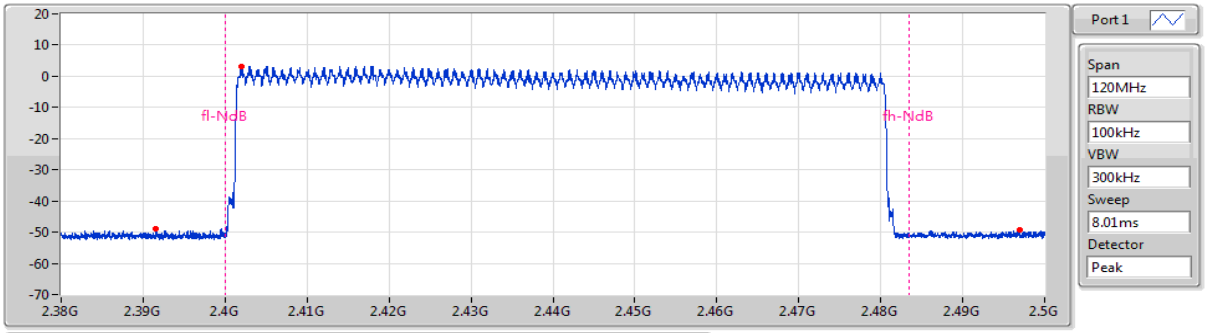

Limit(dBm)	Ref(Hz)	Ref(dBm)	BE-l(Hz)	BE-l(dBm)	BE-h(Hz)	BE-h(dBm)
-16.71	2.40199G	3.29	2.39155G	-48.74	2.496925G	-49.23

BT-EDR(3Mbps)

2402MHz

Hopping Ch Bandedge (Non-restricted Band)

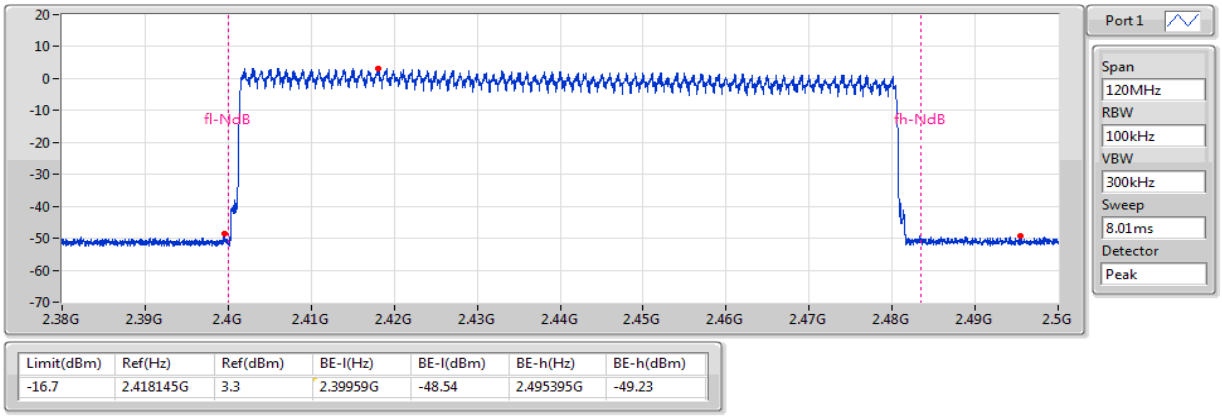

Limit(dBm)	Ref(Hz)	Ref(dBm)	BE-l(Hz)	BE-l(dBm)	BE-h(Hz)	BE-h(dBm)
-16.7	2.418145G	3.3	2.39959G	-48.54	2.495395G	-49.23

3.4 Conducted Output Power

3.4.1 Limit of Conducted Output Power

☐ 1 Watt
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.

☒ 0.125 Watt
For all other frequency hopping systems in the 2400–2483.5 MHz band.

☐ 0.125 Watt
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power senor and meter is 50MHz

2 If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup

3.4.4 Test Result of Conducted Output Power

Ambient Condition	21°C / 66%	Tested By	Aska Huang

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	3.16	0.00207
BT-EDR(2Mbps)	5.58	0.00361
BT-EDR(3Mbps)	6.09	0.00406

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	2.70	3.16	21.00
2441MHz	Pass	2.70	2.48	21.00
2480MHz	Pass	2.70	1.39	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	2.70	5.58	21.00
2441MHz	Pass	2.70	4.56	21.00
2480MHz	Pass	2.70	3.51	21.00
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	2.70	6.09	21.00
2441MHz	Pass	2.70	5.13	21.00
2480MHz	Pass	2.70	3.89	21.00

Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	2.89	0.00195
BT-EDR(2Mbps)	3.34	0.00216
BT-EDR(3Mbps)	3.31	0.00214

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	2.70	2.89	-
2441MHz	Pass	2.70	2.22	-
2480MHz	Pass	2.70	1.09	-
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	2.70	3.34	-
2441MHz	Pass	2.70	2.23	-
2480MHz	Pass	2.70	1.03	-
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	2.70	3.31	-
2441MHz	Pass	2.70	2.22	-
2480MHz	Pass	2.70	1.04	-

Note: Average power is for reference only.

3.5 Number of Hopping Frequency

3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

3.5.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2 Allow trace to stabilize.

3.5.3 Test Setup



3.5.4 Test Result of Number of Hopping Frequency

Ambient Condition	21°C / 66%	Tested By	Aska Huang

Summary

Mode	Max-Hop No
2.4-2.4835GHz	-
BT-BR(1Mbps)	79
BT-EDR(2Mbps)	79
BT-EDR(3Mbps)	79

Result

Mode	Result	Hopping No	Limit
BT-BR(1Mbps)	-	-	-
2402MHz	Pass	79	15
BT-EDR(2Mbps)	-	-	-
2402MHz	Pass	79	15
BT-EDR(3Mbps)	-	-	-
2402MHz	Pass	79	15

BT-BR(1Mbps) **Hopping-FS**

2402MHz

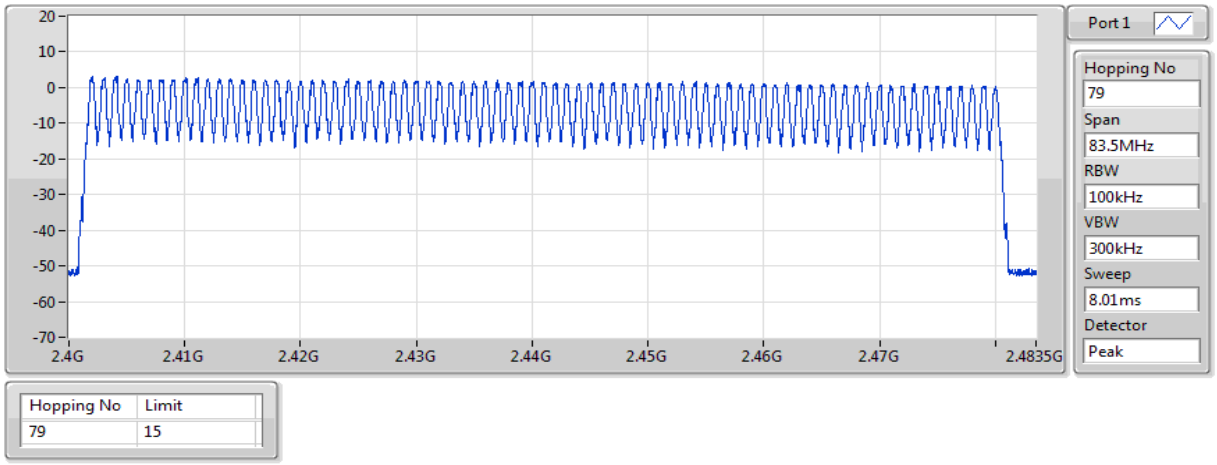

Hopping No	Limit
79	15

BT-EDR(2Mbps) **Hopping-FS**

2402MHz

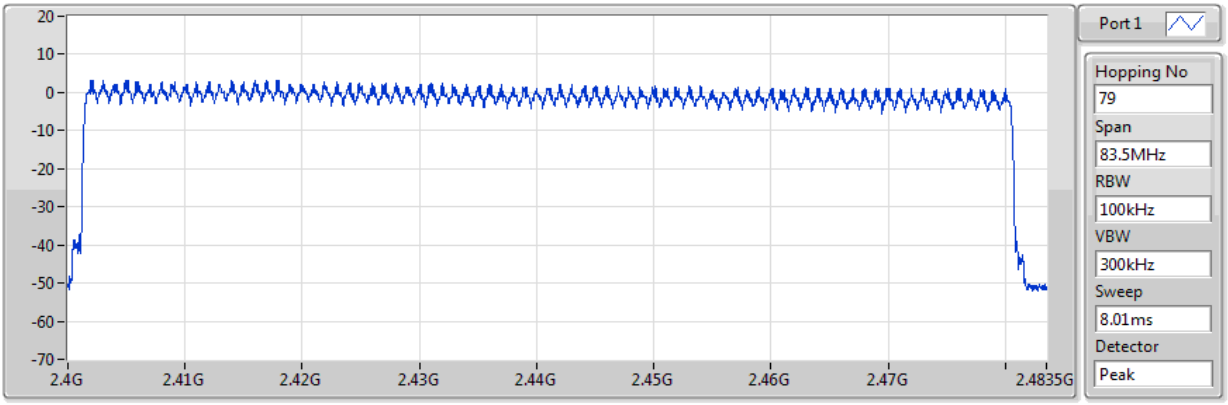

Hopping No	Limit
79	15

BT-EDR(3Mbps) **Hopping-FS**

2402MHz

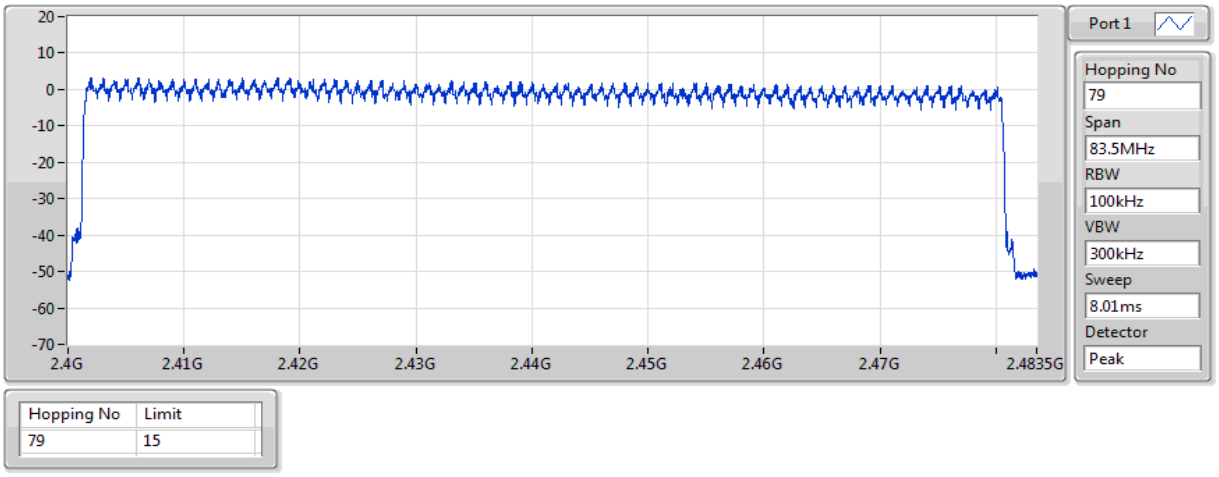

Hopping No	Limit
79	15

3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures

20dB Bandwidth

1. Set RBW=20kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak , Trace max hold
2 Allow trace to stabilize
3 Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set RBW=20kHz, VBW=100kHz, Sweep time = Auto, Detector=Sample , Trace max hold
2 Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup



3.6.3 Test result of 20dB and Occupied Bandwidth

Ambient Condition	21°C / 66%	Tested By	Aska Huang

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-BR(1Mbps)	949.275k	879.161k	879KF1D	920.29k	875.543k
BT-EDR(2Mbps)	1.333M	1.205M	1M21G1D	1.319M	1.201M
BT-EDR(3Mbps)	1.308M	1.208M	1M21G1D	1.286M	1.201M

Max-N dB = Maximum 20dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 20dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	Inf	920.29k	875.543k
2441MHz	Pass	Inf	927.536k	875.543k
2480MHz	Pass	Inf	949.275k	879.161k
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.333M	1.205M
2441MHz	Pass	Inf	1.319M	1.201M
2480MHz	Pass	Inf	1.33M	1.205M
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.286M	1.208M
2441MHz	Pass	Inf	1.29M	1.208M
2480MHz	Pass	Inf	1.308M	1.201M

Port X-N dB = Port X 20dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

BT-BR(1Mbps) **EBW-FS**

2402MHz

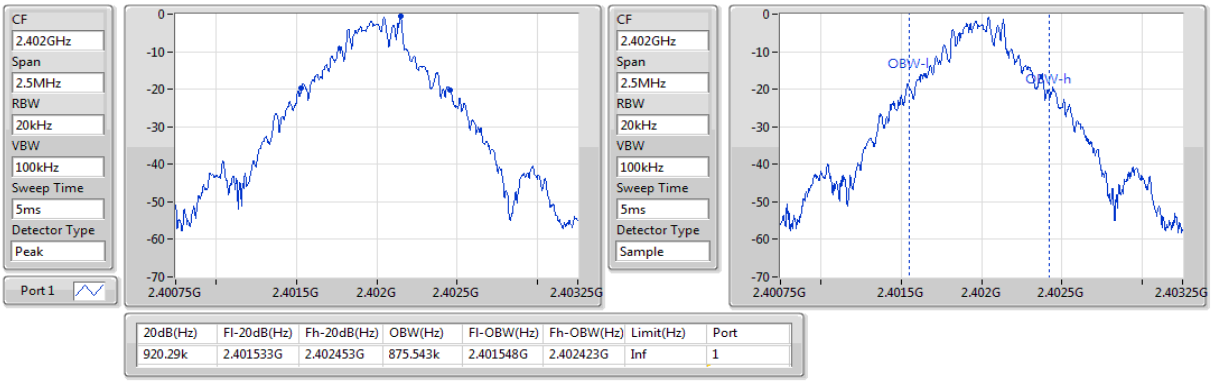

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
920.29k	2.401533G	2.402453G	875.543k	2.401548G	2.402423G	Inf	1

BT-BR(1Mbps) **EBW-FS**

2441MHz

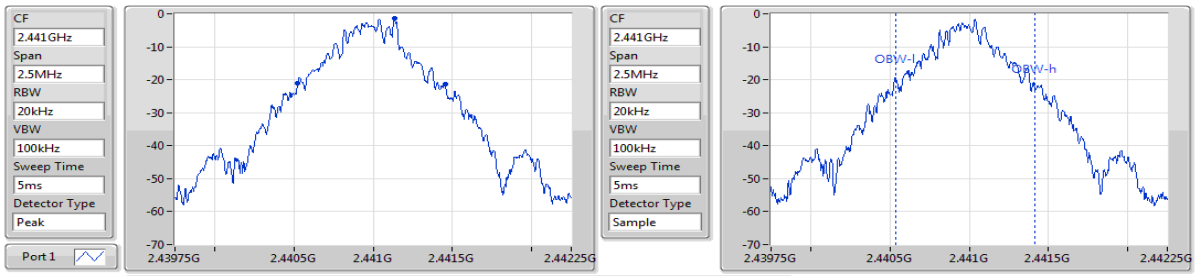

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
927.536k	2.440525G	2.441453G	875.543k	2.440537G	2.441412G	Inf	1

BT-BR(1Mbps) **EBW-FS**

2480MHz

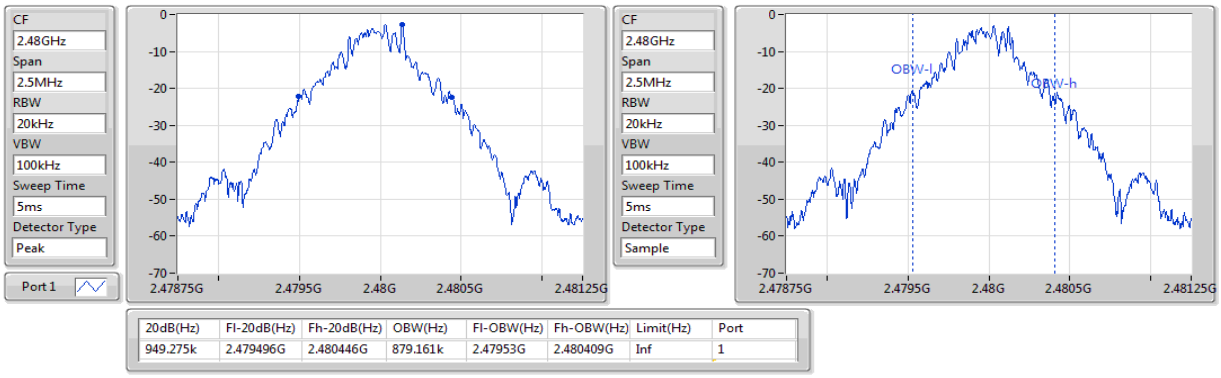

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
949.275k	2.479496G	2.480446G	879.161k	2.47953G	2.480409G	Inf	1

BT-EDR(2Mbps) **EBW-FS**

2402MHz

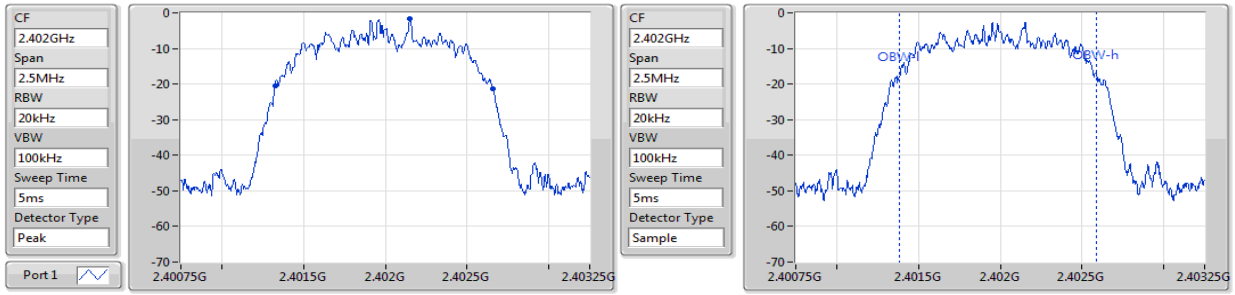

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.333M	2.401326G	2.402659G	1.205M	2.401385G	2.40259G	Inf	1

BT-EDR(2Mbps) **EBW-FS**

2441MHz

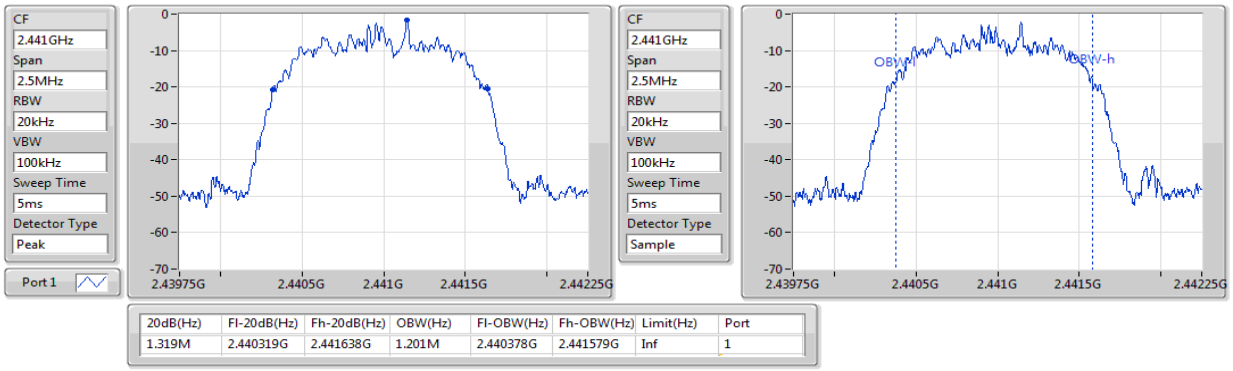

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.319M	2.440319G	2.441638G	1.201M	2.440378G	2.441579G	Inf	1

BT-EDR(2Mbps) **EBW-FS**

2480MHz

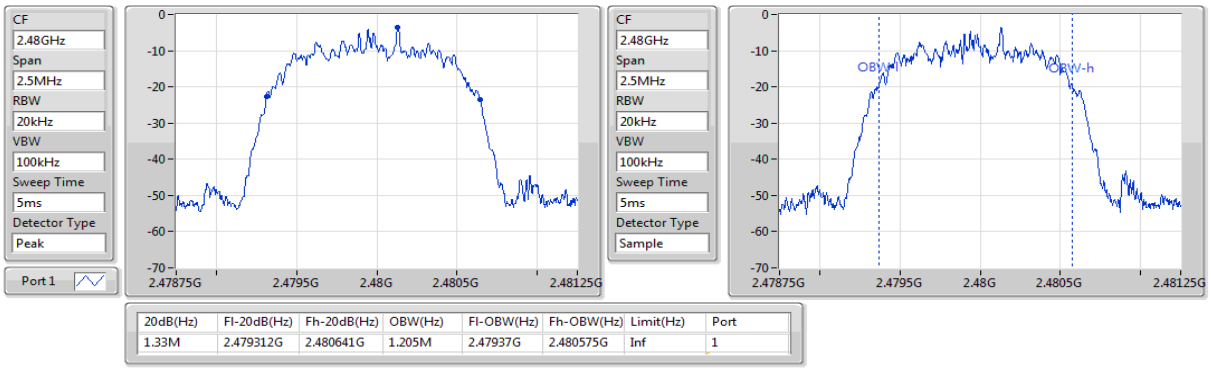

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.33M	2.479312G	2.480641G	1.205M	2.47937G	2.480575G	Inf	1

BT-EDR(3Mbps) **EBW-FS**

2402MHz

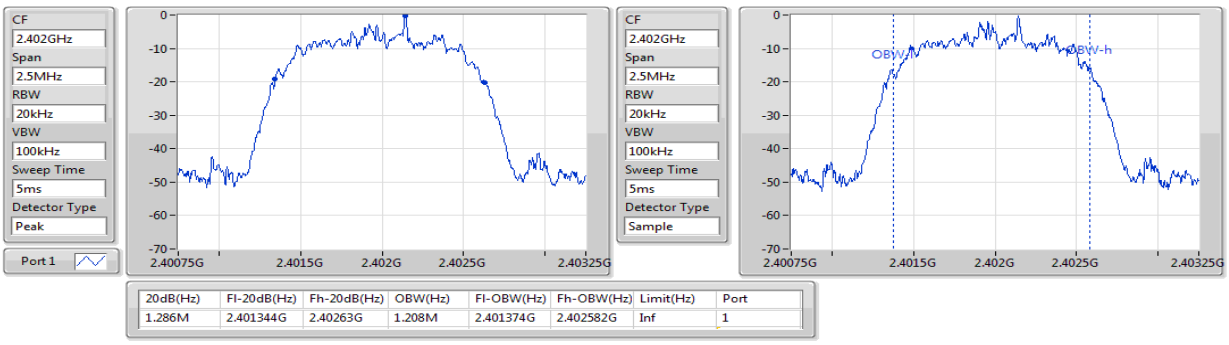

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.286M	2.401344G	2.40263G	1.208M	2.401374G	2.402582G	Inf	1

BT-EDR(3Mbps) **EBW-FS**

2441MHz

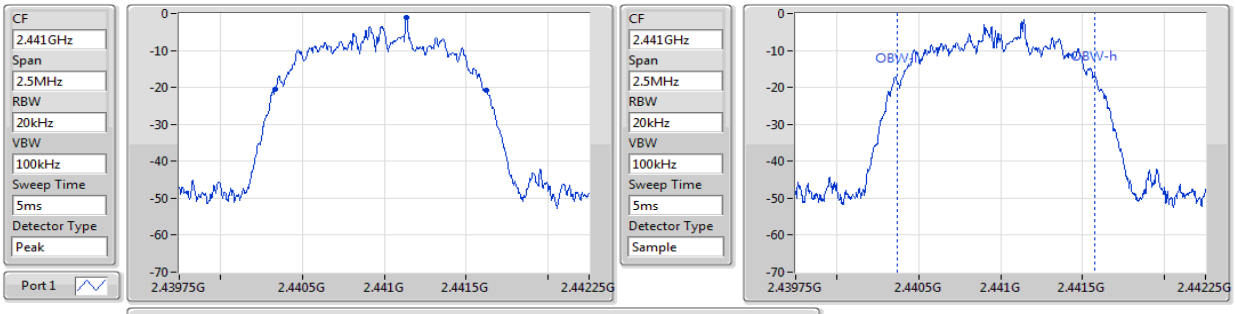

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.29M	2.440333G	2.441623G	1.208M	2.440367G	2.441575G	Inf	1

BT-EDR(3Mbps) **EBW-FS**

2480MHz

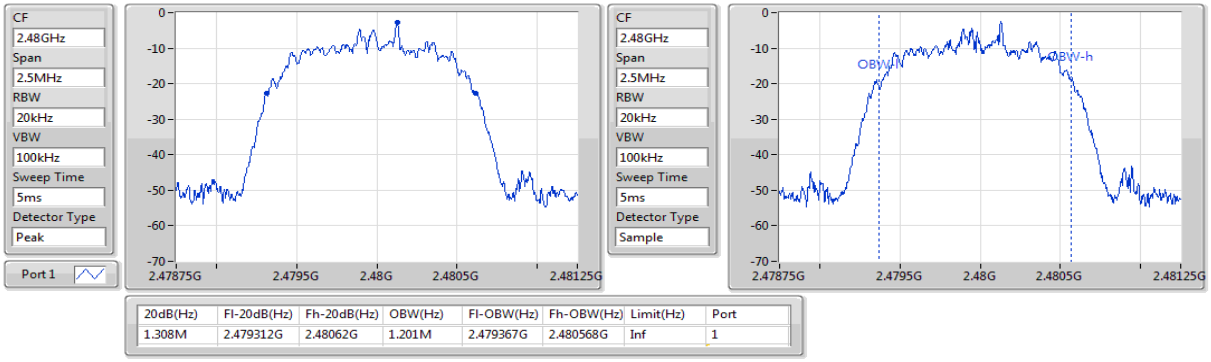

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.308M	2.479312G	2.48062G	1.201M	2.479367G	2.480568G	Inf	1

3.7 Channel Separation

3.7.1 Limit of Channel Separation

☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures

1. Set RBW=30kHz, VBW=100kHz,Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup



3.7.4 Test result of Channel Separation

Ambient Condition	21°C / 66%	Tested By	Aska Huang

Summary

Mode	Max-Space (Hz)	Min-Space (Hz)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	1M	1M
BT-EDR(2Mbps)	1.004348M	1M
BT-EDR(3Mbps)	1.004348M	1.004348M

Result

Mode	Result	Fl (Hz)	Fh (Hz)	Ch.Space (Hz)	Limit (Hz)
BT-BR(1Mbps)	-	-	-	-	-
2402MHz	Pass	2.402143G	2.403143G	1M	612.91314k
2441MHz	Pass	2.441135G	2.442135G	1M	617.738976k
2480MHz	Pass	2.47913G	2.48013G	1M	632.21715k
BT-EDR(2Mbps)	-	-	-	-	-
2402MHz	Pass	2.402148G	2.403148G	1M	887.778k
2441MHz	Pass	2.441139G	2.442139G	1M	878.454k
2480MHz	Pass	2.47913G	2.480135G	1.004348M	885.78k
BT-EDR(3Mbps)	-	-	-	-	-
2402MHz	Pass	2.402139G	2.403143G	1.004348M	856.476k
2441MHz	Pass	2.441135G	2.442139G	1.004348M	859.14k
2480MHz	Pass	2.479126G	2.48013G	1.004348M	871.128k

BT-BR(1Mbps) **Channel Separation-FS**

2.402G/2.403GHz

Fl(Hz)	Fh(Hz)	Ch.Space(Hz)	Limit(Hz)
2.402143G	2.403143G	1M	612.91314k

BT-BR(1Mbps) **Channel Separation-FS**

2.441G/2.442GHz

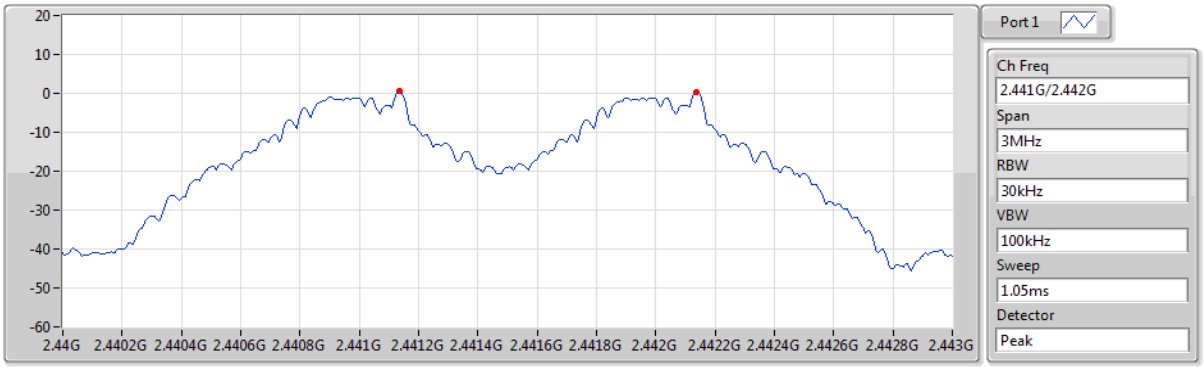

Fl(Hz)	Fh(Hz)	Ch.Space(Hz)	Limit(Hz)
2.441135G	2.442135G	1M	617.738976k

BT-BR(1Mbps) **Channel Separation-FS**

2.48G/2.479GHz

Fl(Hz)	Fh(Hz)	Ch.Space(Hz)	Limit(Hz)
2.47913G	2.48013G	1M	632.21715k

BT-EDR(2Mbps) **Channel Separation-FS**

2.402G/2.403GHz

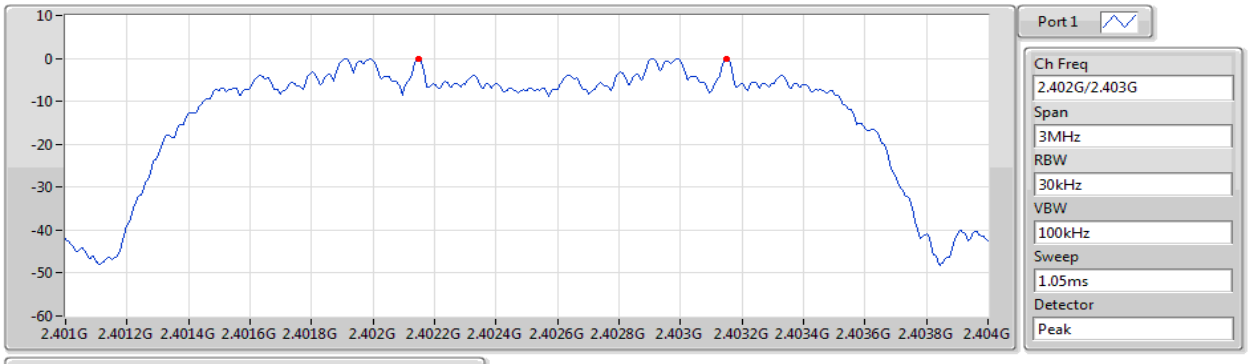

Fl(Hz)	Fh(Hz)	Ch.Space(Hz)	Limit(Hz)
2.402148G	2.403148G	1M	887.778k

BT-EDR(2Mbps) **Channel Separation-FS**

2.441G/2.442GHz

Fl(Hz)	Fh(Hz)	Ch.Space(Hz)	Limit(Hz)
2.441139G	2.442139G	1M	878.454k

BT-EDR(2Mbps) **Channel Separation-FS**

2.48G/2.479GHz

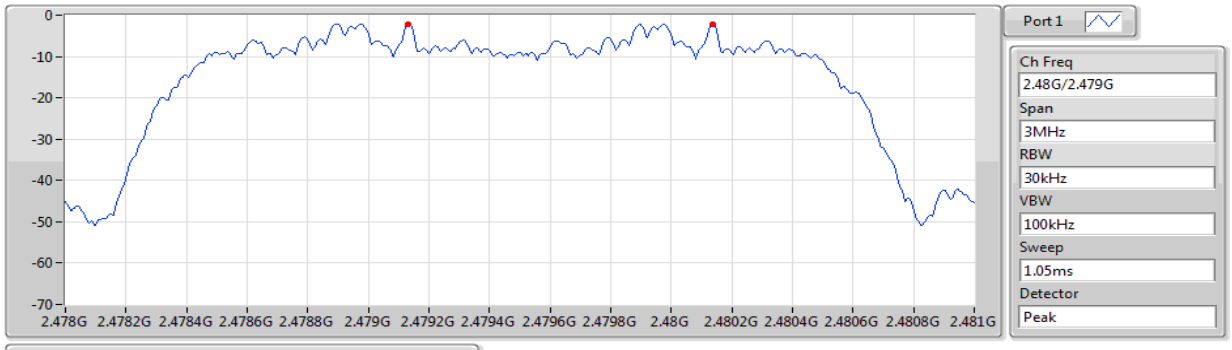

Fl(Hz)	Fh(Hz)	Ch.Space(Hz)	Limit(Hz)
2.47913G	2.480135G	1.004348M	885.78k

BT-EDR(3Mbps) **Channel Separation-FS**

2.402G/2.403GHz

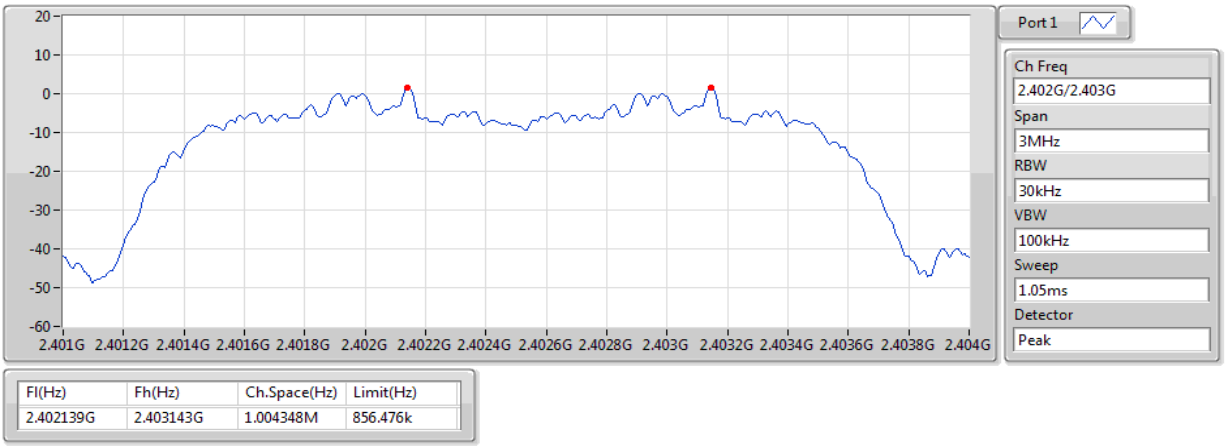

Fl(Hz)	Fh(Hz)	Ch.Space(Hz)	Limit(Hz)
2.402139G	2.403143G	1.004348M	856.476k

BT-EDR(3Mbps) **Channel Separation-FS**

2.441G/2.442GHz

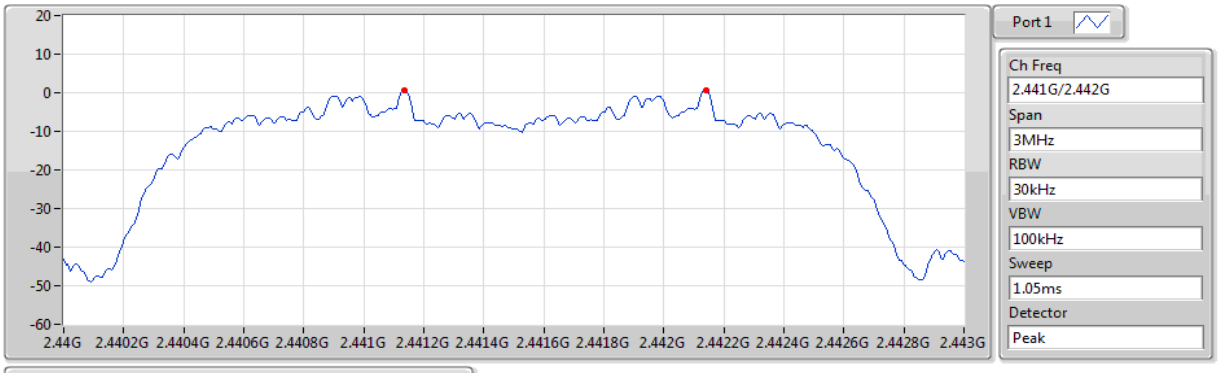

Fl(Hz)	Fh(Hz)	Ch.Space(Hz)	Limit(Hz)
2.441135G	2.442139G	1.004348M	859.14k

BT-EDR(3Mbps) **Channel Separation-FS**

2.48G/2.479GHz

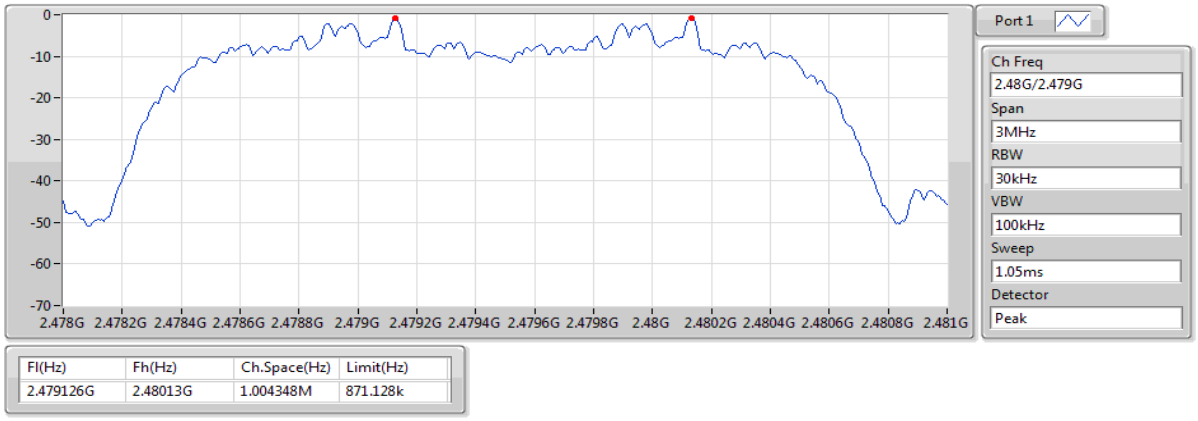

Fl(Hz)	Fh(Hz)	Ch.Space(Hz)	Limit(Hz)
2.479126G	2.48013G	1.004348M	871.128k

3.8 Number of Dwell Time

3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures

1. Set RBW=300 kHz, VBW=1 MHz, Sweep time=8 ms, Detector=Peak, Span=0 Hz,Trace max hold.
2 Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. Set RBW=300 kHz, VBW=1 MHz, Sweep time=5 s / 2 s, Detector=Peak, Span=0 Hz,Trace max hold.
4. Enable gating and trigger function of spectrum analyzer to measure burst on number of transmission.
5 Set RBW=300 kHz, VBW=1 MHz, Sweep time=31.6 s / 8 s, Detector=Peak, Span=0 Hz,Trace max hold.
6 Enable gating and trigger function of spectrum analyzer to measure burst on number of transmission of entire time cycle.

3.8.3 Test Setup



3.8.4 Test Result of Dwell Time

Ambient Condition	21°C / 66%	Tested By	Aska Huang

Summary

Mode	Max-Dwell (s)
2.4-2.4835GHz	-
BT-BR(1Mbps)	328.82328m_DH5
BT-EDR(2Mbps)	347.30138m_DH5
BT-EDR(3Mbps)	347.60158m_DH5
BT-BR-AFH(1Mbps)	289.075m_DH5-AFH
BT-EDR-AFH(2Mbps)	312.39m_DH5-AFH
BT-EDR-AFH(3Mbps)	312.714m_DH5-AFH

Result/ Non AFH mode

Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 5 s
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.32882	0.4	2.89050	18
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.34730	0.4	2.89225	19
BT-EDR(3Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.34760	0.4	2.89475	19

Note 1: Dwell time =Number of transmission in a 5 second x Tx On Time x 6.32

Note 2: DH5 was the worst mode.

Result/ AFH mode

Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 2 s
BT-BR-AFH(1Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.28908	0.4	2.89075	25
BT-EDR-AFH(2Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.31239	0.4	2.89250	27
BT-EDR-AFH(3Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.31271	0.4	2.89550	27

Note 1: Dwell time =Number of transmission in a 2 second x Tx On Time x 4

Note 2: DH5 was the worst mode.

BT-BR(1Mbps) **Dwell-FS**

2402MHz

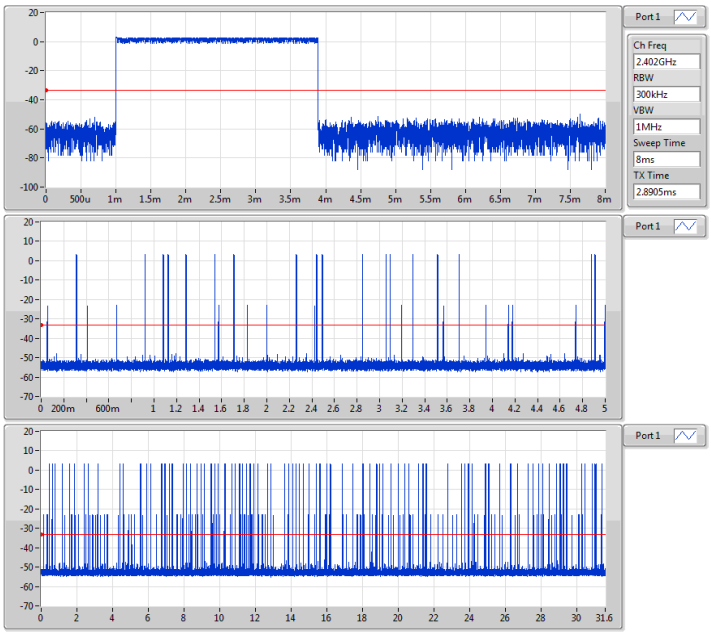

BT-EDR(2Mbps) **Dwell-FS**

2402MHz

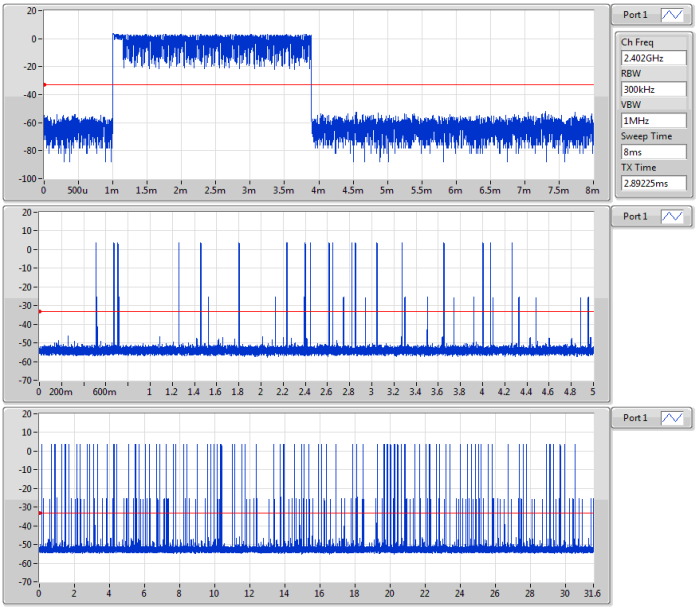

BT-EDR(3Mbps) **Dwell-FS**

2402MHz

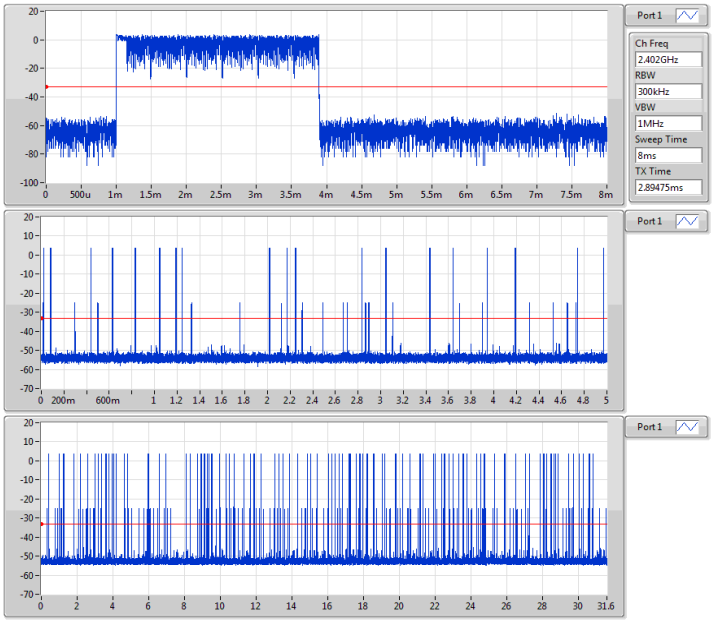

BT-BR-AFH(1Mbps) **Dwell-FS**

2402MHz

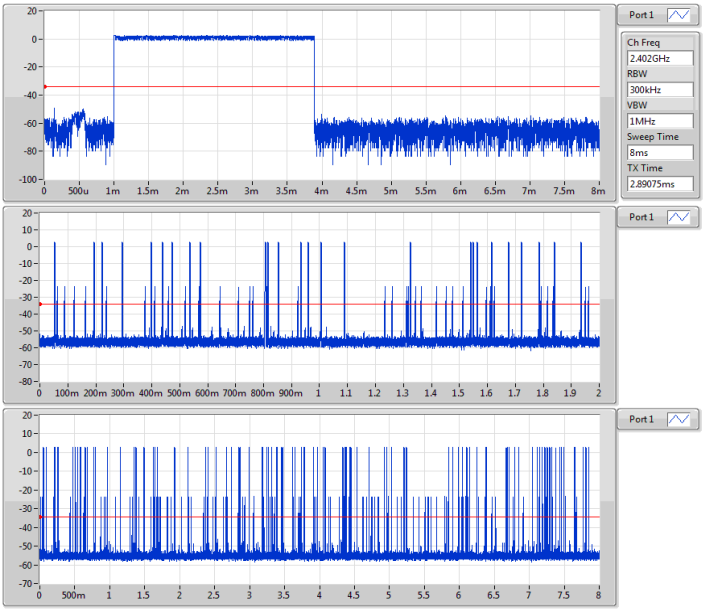

BT-EDR-AFH(2Mbps) **Dwell-FS**

2402MHz

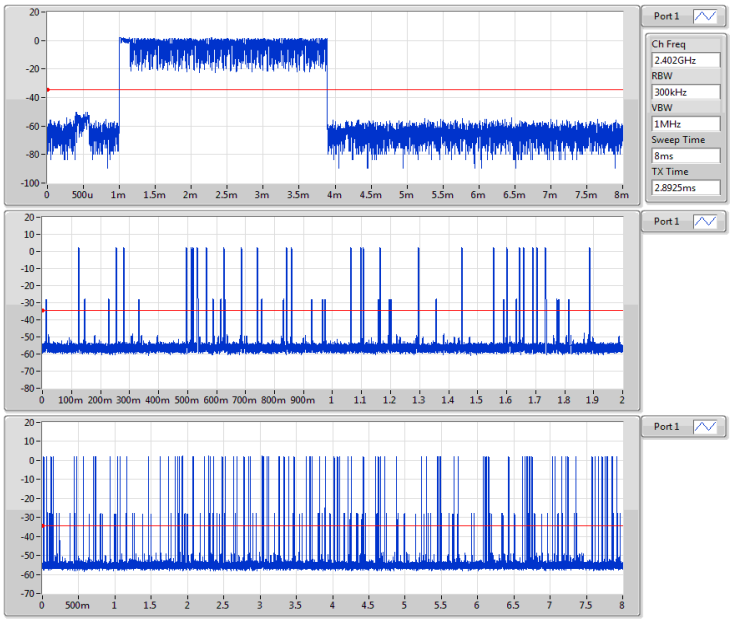

BT-EDR-AFH(3Mbps) **Dwell-FS**

2402MHz

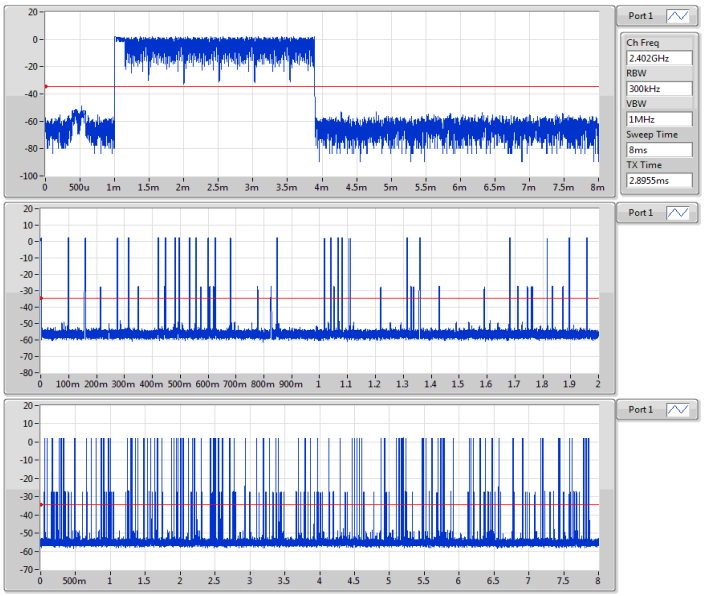

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou	**Kwei Shan**	**Kwei Shan Site II**
Tel: 886-2-2601-1640	Tel: 886-3-271-8666	Tel: 886-3-271-8640
No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan (R.O.C.)	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.) No.2-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666
Fax: 886-3-318-0345
Email: ICC_Service@icertifi.com.tw

==END==