


EUT : IPC1500 (NC801A)
 Power : 110V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11b
 Rate : 11 Mbps

Pol/Phase : VERTICAL
 Temperature : 25 °C
 Humidity : 65 %
 Atmospheric Pressure: 1020 mmHg
 Memo : 2dBi

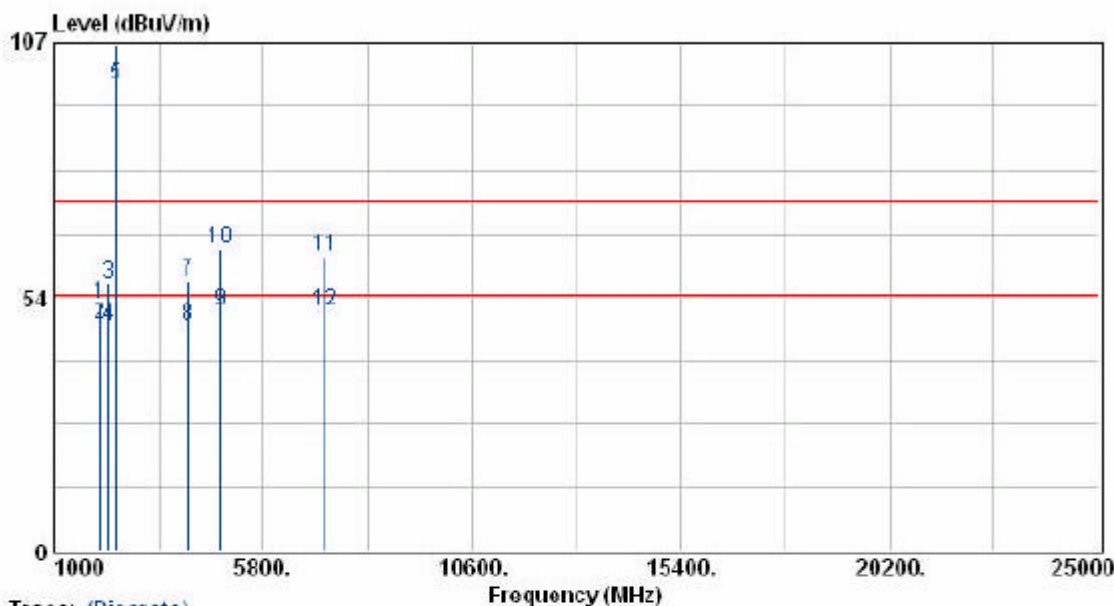


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant. High (cm)
2038.00	52.87	-0.67	52.20	74.00	-21.80	Peak	193	100
2038.00	48.48	-0.67	47.81	54.00	-6.19	Average	193	100
2244.00	56.53	0.04	56.57	74.00	-17.43	Peak	196	100
2244.00	47.50	0.04	47.54	54.00	-6.46	Average	196	100
2409.80	97.54	0.62	98.16	54.00	44.16	Average	78	100
2409.80	106.10	0.62	106.72	74.00	32.72	Peak	78	100
4076.00	50.70	6.05	56.75	74.00	-17.25	Peak	240	100
4076.00	41.60	6.05	47.65	54.00	-6.35	Average	240	100
4823.10	43.17	7.36	50.53	54.00	-3.47	Average	78	100
4823.10	56.55	7.36	63.91	74.00	-10.09	Peak	78	100
7235.30	51.01	11.05	62.06	74.00	-11.94	Peak	78	100
7235.30	39.69	11.05	50.74	54.00	-3.26	Average	78	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.

EUT : IPC1500 (NC801A)
 Power : 110V
 Test Mode : Transmit/Receive
 Operation Channel : 6
 Modulation Type : 802.11b
 Rate : 11 Mbps

Pol/Phase : HORIZONTAL
 Temperature : 25 °C
 Humidity : 65 %
 Atmospheric Pressure : 1020 mmHg
 Memo : 2dBi

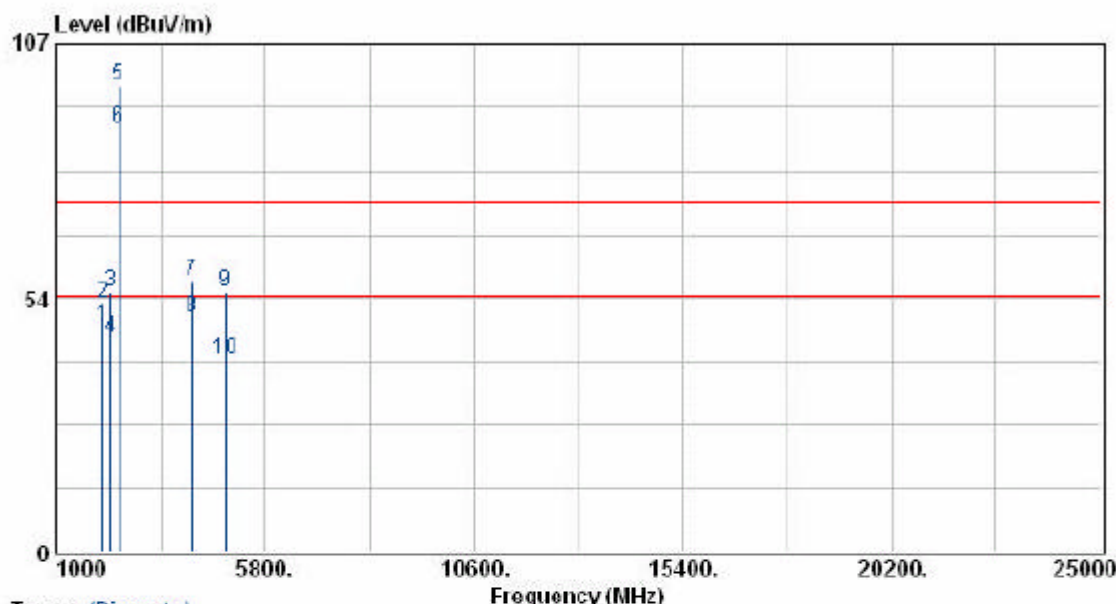


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
2063.00	47.27	0.12	47.39	54.00	-6.61	Average	85	100
2063.00	52.22	0.12	52.33	74.00	-21.67	Peak	85	100
2244.00	54.16	0.74	54.90	74.00	-19.10	Peak	132	100
2244.00	44.45	0.74	45.19	54.00	-8.81	Average	132	100
2434.50	96.52	1.40	97.92	74.00	23.92	Peak	114	100
2434.50	87.87	1.40	89.27	54.00	35.27	Average	114	100
4126.00	50.63	6.69	57.32	74.00	-16.68	Peak	209	100
4126.00	42.71	6.69	49.40	54.00	-4.60	Average	209	100
4874.00	46.55	8.32	54.87	74.00	-19.13	Peak	114	100
4874.00	31.96	8.32	40.28	54.00	-13.72	Average	114	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.

EUT : IPC1500 (NC801A)
 Power : 110V
 Test Mode : Transmit/Receive
 Operation Channel : 6
 Modulation Type : 802.11b
 Rate : 11 Mbps

Pol/Phase : VERTICAL
 Temperature : 25 °C
 Humidity : 65 %
 Atmospheric Pressure : 1020 mmHg
 Memo : 2dBi

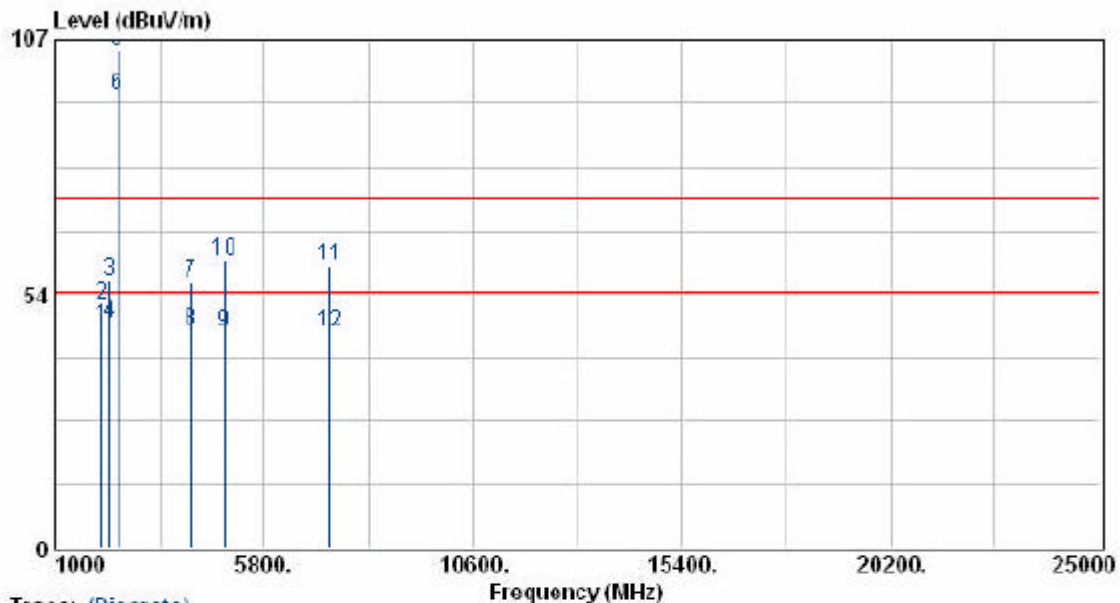


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
2063.00	47.45	-0.58	46.87	54.00	-7.13	Average	193	100
2063.00	52.06	-0.58	51.48	74.00	-22.52	Peak	193	100
2244.00	56.36	0.04	56.40	74.00	-17.60	Peak	196	100
2244.00	47.49	0.04	47.53	54.00	-6.47	Average	196	100
2434.80	103.96	0.70	104.66	74.00	30.66	Peak	78	100
2434.80	94.60	0.70	95.30	54.00	41.30	Average	78	100
4126.00	49.79	6.07	55.85	74.00	-18.15	Peak	246	100
4126.00	40.02	6.07	46.09	54.00	-7.91	Average	246	100
4873.20	37.87	7.54	45.41	54.00	-8.59	Average	78	100
4873.20	53.32	7.54	60.86	74.00	-13.14	Peak	78	100
7308.20	48.33	11.14	59.47	74.00	-14.53	Peak	78	100
7308.20	34.24	11.14	45.38	54.00	-8.62	Average	78	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.

EUT : IPC1500 (NC801A)
 Power : 110V
 Test Mode : Transmit/Receive
 Operation Channel: 11
 Modulation Type : 802.11b
 Rate : 11 Mbps

Pol/Phase : HORIZONTAL
 Temperature : 25 °C
 Humidity : 65 %
 Atmospheric Pressure: 1020 mmHg
 Memo : 2dBi

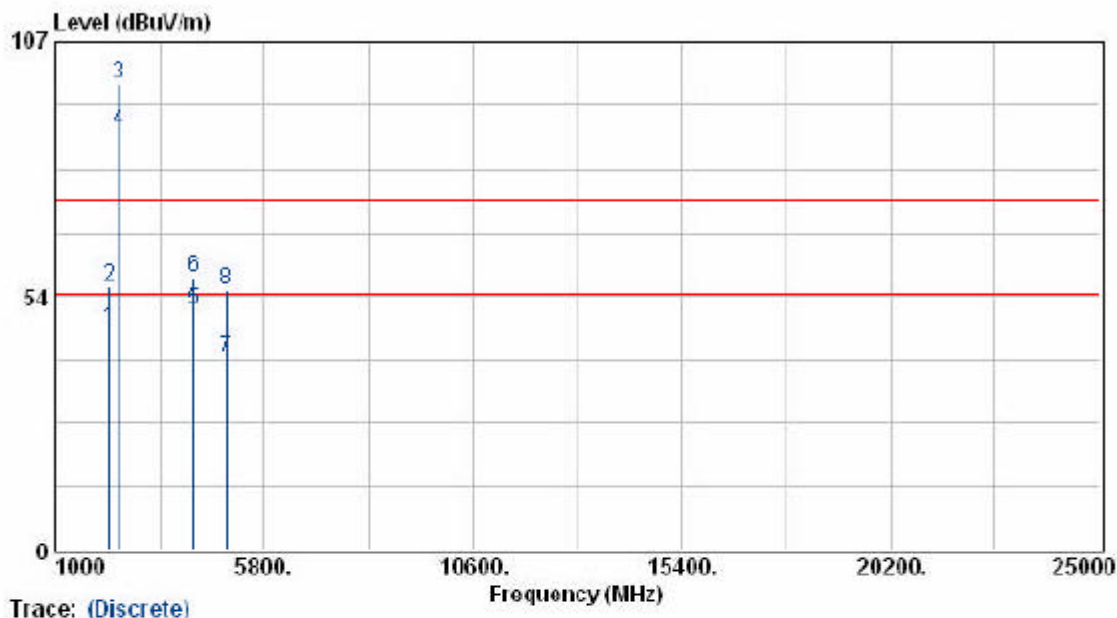


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
2244.00	45.86	0.74	46.60	54.00	-7.40	Average	132	100
2244.00	54.98	0.74	55.72	74.00	-18.28	Peak	132	100
2464.40	96.65	1.51	98.16	74.00	24.16	Peak	114	100
2464.40	86.84	1.51	88.35	54.00	34.35	Average	114	100
4176.00	43.70	6.72	50.42	54.00	-3.58	Average	209	100
4176.00	50.96	6.72	57.68	74.00	-16.32	Peak	209	100
4923.90	32.02	8.51	40.53	54.00	-13.47	Average	114	100
4923.90	46.25	8.51	54.76	74.00	-19.24	Peak	114	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.

EUT : IPC1500 (NC801A)
 Power : 110V
 Test Mode : Transmit/Receive
 Operation Channel: 11
 Modulation Type : 002.11b
 Rate : 11 Mbps

Pol/Phase : VERTICAL
 Temperature : 25 °C
 Humidity : 65 %
 Atmospheric Pressure: 1020 mmHg
 Memo : 2dBi

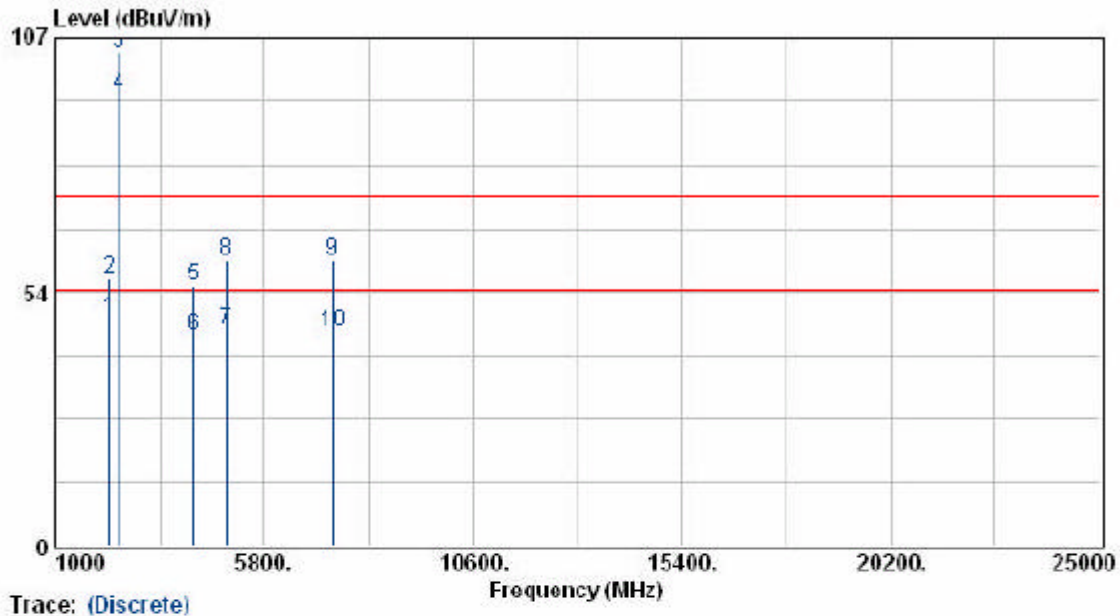

Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
2244.00	47.72	0.04	47.76	54.00	-6.24	Average	196	100
2244.00	56.39	0.04	56.43	74.00	-17.57	Peak	196	100
2461.40	103.15	0.80	103.95	74.00	29.95	Peak	78	100
2461.40	94.26	0.80	95.06	54.00	41.06	Average	78	100
4176.00	48.81	6.08	54.89	74.00	-19.11	Peak	246	100
4176.00	38.35	6.08	44.43	54.00	-9.57	Average	246	100
4924.80	37.74	7.73	45.47	54.00	-8.53	Average	78	100
4924.80	52.48	7.73	60.21	74.00	-13.79	Peak	78	100
7388.60	49.09	11.23	60.32	74.00	-13.68	Peak	78	100
7388.60	33.99	11.23	45.22	54.00	-8.78	Average	78	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.