

Test Report

(IEC 60945 and IEC 62388)

For

**Trade name: Furuno
Model: MARINE RADAR
Type: FAR-3210/-3310/-3220/-3320
with LAN Signal Converter**

Report No.: FLI 12-13-075

Date of Issue: 22 November 2013

Furuno Labotech International Co., Ltd.

1-16, Fukazu-cho, Nishinomiya-shi, Hyogo, 663-8203 Japan

Tel: +81 (0) 798 63 1094 Fax: +81 (0) 798 63 1098

URL: <http://www.furuno-labotech.co.jp>

Report Summary

FLI project number:	FLI 04-13-0329		
Test report number of initial issue:	FLI 12-13-075	Date of initial issue	22 November 2013
Test report number of revised/replaced issue:	---	Date of revised/replaced issue	---
Test report revision/ replacement history:	---		
Test standard(s)/ Test specifications:	IEC 60945: 2002 (ed. 4), Clause 7.1, 7.2, 8.2, 8.3, 8.4, 8.7, 8.8, 11, and 12, including IEC 60945 Corrigendum 1 (2008). IEC 62388: 2013 (ed.2.0), 17.3.2 Antenna shock test IEC 60068-2-1: 2007, IEC 60068-2-2: 2007, IEC 60068-2-6: 2007, IEC 60068-2-30: 2005, ISO 25862: 2009, IEC 61672-1: 2002.		
Customer:	Furuno Electric Co., Ltd. 9-52 Ashihara-Cho, Nishinomiya-City, 662-8580 Japan		
Manufacturer:	Furuno Electric Co., Ltd. 9-52 Ashihara-Cho, Nishinomiya-City, 662-8580 Japan		
Trade name:	FURUNO		
Model:	MARINE RADAR		
Type:	FAR-3210/-3310/-3220/-3320 (with LAN Signal Converter)		
Product function and intended use:	For marine safety navigation		
Number of test samples tested:	One		
Serial number:	R00002-000001		
Power rating:	100 - 230 VAC, 50-60 Hz, 8 A		
Product status:	Pre-production model		
Modifications made to samples during testing:	None.		
Date of receipt of samples:	2 September 2013		
Test period:	From 2 September 2013 to 2 October 2013		
Place of test:	Furuno Labotech International Co., Ltd. - LABOTECH EMC Center 1-16, Fukazu-cho, Nishinomiya-shi, Hyogo, 663-8203 Japan - Nishinomiya-Hama Lab. 2-20, Nishinomiya-Hama, Nishinomiya-shi, Hyogo, 662-0934 Japan		
Test results/ Compliance:	Passed. The test results of this report relate only to the samples tested.		
Tested by:	Akira Inoue, Ryoichi Ito, Osamu Araki, and Yasuharu Nakamura		
Written by:	Akiko Inoue		
Verified by:	Yoshihiro Ishii		
Approved by:	Date: 22 November 2013 Name: Yoshihiro Ishii Title: Senior Manager, Technical Department, Furuno Labotech International Co., Ltd. Signature: 		

Testing Laboratory Status

Furuno Labotech International Co., Ltd. (hereafter called "FLI") has been holding the following status after having been assessed according to the provisions of ISO/IEC 17025 and/or the relevant rules:

(1) JAB Accredited Testing Laboratory:

- accredited by Japan Accreditation Board (JAB),
- Laboratory accreditation number: RTL03220
- Date of initial accreditation: 14 January 2011
- Scope of accreditation: Electrical testing - EMC testing (*)

(2) Telefication Listed Testing Laboratory:

- listed by Telefication B. V., (The Netherlands)
- Laboratory assignment number: L116
- Date of initial listing: 26 July 1999 (*)
- for testing the following product categories/ test standards: EN 60945, IEC 61162-1/-2, and IEC 62288

(3) BSH Recognized Testing Laboratory:

- recognized by Bundesamt für Seeschifffahrt und Hydrographie (BSH), (Germany)
- Recognition certificate number: BSH/4613/06202/1864/11
- Date of initial recognition: 4 April 2003 (*)
- for testing the following product categories/ test standards:
 - IEC/EN 60945, IEC 62388, IEC 61162-1/-2, and IEC 62288

(4) TÜV Appointed EMC Test Laboratory:

- appointed by TÜV Rheinland Japan Ltd.,
- Laboratory assignment number: UA 50046428
- Date of initial appointment: 21 December 1998 (*)
- for carrying out the tests of:
 - EN 55011, CISPR 11, EN 55022, CISPR 22, EN 55024, CISPR 24, EN 55025, CISPR 25, EN/IEC 61000-3-2/-3, EN/IEC 61000-4-2/-3/-4/-5/-6/-8/-11, EN/IEC 61000-6-1/-2/-3/-4, EN/IEC 60945, EN/IEC 61326-1, EN/IEC 61326-2-6, EN/IEC 60601-1-2, JIS T 0601-1-2, JIS C 1806-1, ISO 11452-1/-2/-4.

(5) RMRS Recognized Testing Laboratory:

- recognized by Russian Maritime Register of Shipping (RMRS), (Russia)
- Laboratory recognition number: 11.02594.011
- Date of initial recognition: 27 January 2009 (*)
- for carrying out testing in the field of:
 - Electrical measurements and tests, EMC tests, Mechanical measurements and tests, Equipment protection degree tests, and Climatic tests for Ship's radio and navigational equipment and IEC 60945: 2002

(6) RRR Recognized Test Laboratory:

- recognized by Russian River Register (RRR), (Russia)
- Recognition certificate number: 154262
- Date of initial recognition: 31 May 2013
- for carrying out of tests of ships radio and navigation equipment

(7) DNV Recognized Environmental Test Laboratory:

- recognized by Det Norske Veritas AS (DNV), (Norway)
- Recognition certificate number: 262.1-015854-J-12
- Date of initial recognition: 12 July 2013
- Scope of recognition: Testing according to the standards IEC 60945, IEC 61162-1/-2/-450, IEC 62288, IEC 62388 and IEC 62252 Annex E
- Application: Provisions of Environmental, interference and safety testing.

Note: (*) – The current certificates may be found in the FLI web site (<http://www.furuno-labotech.co.jp>).

TABLE OF CONTENTS

Report Summary.....	2
Testing Laboratory Status	3
1 Principal Information.....	5
1.1 Equipment under test (EUT).....	5
1.2 EUT Operation mode and Performance Check.....	6
1.3 Test Conditions.....	7
1.4 Observation and comments.....	7
1.5 Measurement uncertainties	8
2 Test Results Summary	8
3 Test Results.....	9
3.1 Power supply	9
3.1.1 Extreme power supply	9
3.1.2 Excessive conditions	9
3.2 Dry heat	9
3.2.1 Storage test	9
3.2.2 Functional test	9
3.3 Damp heat - Functional test	9
3.4 Low temperature	9
3.4.1 Storage test (Not applicable)	9
3.4.2 Functional test	9
3.5 Vibration.....	10
3.5.1 EUT attitude/mounting and Test fixture:	10
3.5.2 Resonance search and Endurance tests	10
3.6 Antenna shock.....	10
3.6.1 EUT attitude/mounting and Test fixture:	10
3.6.2 Results:.....	10
3.7 Rain and spray (Not performed)	10
3.8 Corrosion (salt mist) (Not performed)	10
3.9 Special purpose tests	10
3.9.1 Acoustic noise and signals (Not performed).....	10
3.9.2 Compass safe distance (CSD) (Not performed).....	10
3.10 Safety precautions	11
3.10.1 Protection against accidental access to dangerous voltages.....	11
3.10.2 Electromagnetic radiofrequency radiation (Not performed)	11
3.10.3 Emission from visual display unit (VDU) (Not applicable)	11
3.10.4 X-radiation (Not performed).....	11
3.11 Environmental conditions during Testing	12
4 List of Measuring/Test Instruments	13
5 EUT Setup/Test Arrangement	15
6 Photographs of Test Setup/Arrangement.....	16
7 Temperature/humidity records taken during Dry heat/Damp heat/Low temperature tests	19
8 Vibration response plots taken during tests	21
9 Test results data of the EUT obtained during the climatic tests.	26

1 Principal Information

1.1 Equipment under test (EUT)

Configurations of the EUT units:

No. (*)	Item	Type	Unit serial number	Equipment category	Note
1	Antenna Unit			Exposed	TX: 25 kW _{pp} , TX/RX freq.: 9410 MHz Magnetron used: MG5436
	Transceiver (with LAN Signal Converter)	RTR-106	---		
	Gear Box (with built-in deicer)	RSB-128	R00002-00001		
	Performance Monitor	PM-32A	---		
	Antenna Radiator (*1)	XN24CF	---		
2	Power Supply Unit (with LAN Signal Converter)	PSU-014	000007	Protected	

(*): Item number(s) is(are) corresponding to the unit(s) shown in Clause 5 “EUT Setup/Test Arrangement” and Clause 6 “Photographs of Test Setup/Arrangement” of this report.

Note (*1): Antenna Radiator was replaced with Auxiliary Equipment, “Antenna Dummy Load (X-band)” except for “Vibration” and “Antenna shock” tests.

Size and Mass of the EUT unit(s):

No.	Name	Type	Dimensions (W × H × D, or ϕ × H) (mm)	Mass (kg)	Note
1	Antenna Unit	---	2595 × 572 × 511	55	with Performance Monitor, Transceiver, and Gear Box (with built-in deicer), and XN24CF contained.
2	Power Supply Unit	PSU-014	392×147×405	12	

Configurations of the Associated unit(s) (AU) forming the system except EUT:

No. (*)	Name	Type	Unit serial number	Manufacturer	Note
3	Junction Box	RJB-001	17907	Furuno	
4	Junction Box	RJB-001	17908	Furuno	
5	Processor Unit	EC-3000	4395-1704	Furuno	
6	Monitor Unit	MU-190	000023	Furuno	
7	Monitor Unit	MU-231	000010	Furuno	
8	Control Unit	RCU-025	000168	Furuno	
9	Control Unit	RCU-014	5453	Furuno	
10	Processor Unit	RPU-013	4317-2240	Furuno	
11	Display	U2412Mb	CN-007H8X-74261-31F-4L4S	DELL	

(*): Item number(s) is(are) corresponding to the unit(s) shown in Clause 5 “EUT Setup/Test Arrangement” of this report.

Auxiliary Equipment (AE) used for exercising and/or monitoring the operation and/or the performance of the EUT during testing:

No. (*)	Name	Type	Unit serial number	Manufacturer	Note
12	Antenna Dummy Load (X-band)	4D376	R0173001	SPC ELECTRONICS	Used for Climatic, Vibration, Antenna shock tests
			R45350002	SPC ELECTRONICS	Used for Excessive conditions, Protection against accidental access to dangerous voltages tests
13	USB Serial Adapter (RS-422)	COM-1PD(US B)H	8DRZD76002358	CONTEC	Used for Climatic, Vibration, Antenna shock tests
		ESU2-400	03064100027	QUATECH	Used for Excessive conditions, Protection against accidental access to dangerous voltages tests
14	PC	E5520-2500H D(7P	---	DELL	Used for Climatic, Vibration, Antenna shock tests
		DCCY1F	DTCNTBX	DELL	Used for Excessive conditions, Protection against accidental access to dangerous voltages tests

No. (*)	Name	Type	Unit serial number	Manufacturer	Note
15	Display	V193	ETLDQ0C035915 015764010	acer	Used for Excessive conditions, Protection against accidental access to dangerous voltages tests
16	Mouse	OXN967	H1702PFE	DELL	Used for Excessive conditions, Protection against accidental access to dangerous voltages tests
17	Keyboard	SK-8175	CN-0W213F-7161 612O-0BCH-A00	DELL	Used for Excessive conditions, Protection against accidental access to dangerous voltages tests

(*): Item number(s) is(are) corresponding to the unit(s) shown in Clause 5 “EUT Setup/Test Arrangement” of this report.

Software(s) contained in the EUT, AU:

No.	Category	Item/Type	Program name	Program number	Rev. number
1	EUT	Antenna Unit	App (SPU)	0359286	01.04
			App (MTR-DRV)	0359293	01.04
			App (PM)	0359296	01.04
2	EUT	Power Supply Unit	App (PSU-Control)	0359299	01.04
5	AU	Processor Unit	App	0359266	02.04

EUT documentation used for the tests:

No.	Item	Publication no.	Rev. number	Note
1	Installation Manual	IME-36160	Z2	

1.2 EUT Operation mode and Performance Check

1.2.1 EUT Operation mode

Operation state: TX-on

For Climatic test,

RANGE: 6 NM

TUNE: AUTO

GAIN: Manual, 83

A/C SEA: Manual, 0 (Min.)

A/C RAIN: Manual, 0 (Min.)

Range rings: ON

VRM1, 2: ON

EBL1, 2: ON

Brilliance of all attributes: 86

For “Excessive conditions”, “Protection against accidental access to dangerous voltages” tests

RANGE: 6NM

TUNE: AUTO

GAIN: Manual, 92 (Max)

A/C SEA: Manual, 0 (Min)

A/C RAIN: Manual, 0 (Min)

Range rings: ON

VRM1,2: ON

EBL1,2: ON

Brilliance of all attributes: 97

1.2.2 Performance Test (PT)

(1) Radar display on MU-190 and MU-231 (AUs):

- Noise echo level/area should not change. Radar display should be updated (scanning).

(2) Antenna rotation:

- Antenna should be rotated in a clockwise direction through 360° continuously and automatically with the rotation rate of 40 rpm or more for HSC Radar.

(3) Tuning indicator:

- Indicator bar of RX tuning indicator should be 50% or more.

- (4) Sub display:
 - Radar display on Display Unit (No. 11 AU) should be displayed and updated (scanning).
- (5) Own ship's information:
 - Own ship's information should be displayed on MU-190 and MU-231 (AUs).
- (6) Track ball control:
 - Cursor should be moved as intended.
- (7) TT-Test:
 - Target should be tracked and Echo trail functions should be activated as intended.
- (8) Startup:
 - Startup time from Power-ON to the ST-BY state should be 4 min. or less.
- (9) Magnetron:
 - Magnetron current indicated in System monitor should be more than 0 A.

1.2.3 Performance Check (PC)

Same as those for PT.

1.3 Test Conditions

1.3.1 Normal power supply conditions:

100 VAC, 60 Hz (for "Vibration", "Antenna shock" tests)
230 VAC, 50 Hz (for the tests other than the above)

1.3.2 Extreme power supply conditions:

Upper extreme conditions:

253 VAC, 52.5 Hz (230 VAC + 10 %, 50 Hz + 5 %).

Lower extreme conditions:

207 VAC, 47.5 Hz (230 VAC - 10 %, 50 Hz - 5 %). (*)

(*) specified by the customer.

1.4 Observation and comments

- (1) Test items to be performed were specified by the customer.
Test items under IEC 60945 Clause 6, 9, 10, 13, 14, and 15 are separately reported.

- (2) Unit combinations for Radar Systems of FAR-3210/-3310/-3220/-3320 are as follows.

(2) Unit combinations for Radar Systems of FAR-3210/ 3310/ 3220/ 3320 are as follows:								
Model	Band	TX power	Scanner	Transceiver	Radiator	Display	Power Supply Unit	
FAR-3210	X band	12 kW	RSB-128	RTR-105	XN12CF	MU-190	PSU-014	
FAR-3310					XN20CF	MU-231		
FAR-3220		25 kW		RTR-106	XN24CF	MU-190		
FAR-3320						MU-231		

- (3) Test to RTR-105 was not performed at the customer's request.
- (4) Corrosion (salt mist) test was not performed, because the evidence that the components, materials and finishes employed in the EUT satisfy the test was submitted by the manufacturer.
(See Furuno Electric Statement CW-037 dated 30 September 2013.)
- (5) "Emission from visual display unit (VDU)" test was not applicable, because the EUT had no display devices.
- (6) "X-radiation" test was not performed, because the evidence that the Magnetrons employed in the EUT satisfy the test was submitted by the manufacturer.

1.5 Measurement uncertainties

IEC 60945 Clause	Item	Measurement uncertainty (*)
7	Power supply	
7.1	Extreme power supply:	----
7.2	Excessive conditions:	----
8	Durability and resistance to environmental conditions	
8.2	Dry heat	----
8.2.1	- Storage test:	Temperature: $\pm 1.5^{\circ}\text{C}$
8.2.2	- Functional test:	Temperature: $\pm 1.5^{\circ}\text{C}$
8.3	Damp heat	
8.3.1	- Functional test:	Temperature: $\pm 1.5^{\circ}\text{C}$, Humidity: $\pm 4\%$
8.4	Low temperature	----
8.4.1	- Storage test:	Temperature: $\pm 1.5^{\circ}\text{C}$
8.4.2	- Functional tests:	Temperature: $\pm 1.5^{\circ}\text{C}$
8.7	Vibration:	Acceleration: $\pm 2.2 \text{ m/s}^2$
8.12	Corrosion:	----
12	Safety precautions	
12.1	Protection against accidental access to dangerous voltages:	Not applicable.

(*): confidence level = 95%, coverage factor $k = 2$

IEC 62388 Clause	Item	Measurement uncertainty (*)
17.3.2	Antenna shock test	Acceleration: $\pm 2.2 \text{ m/s}^2$

(*): confidence level = 95%, coverage factor $k = 2$

2 Test Results Summary

IEC 60945 Clause	Test Item	Result	Test Engineer
7	Power supply		
7.1	Extreme power supply:	Passed.	A. Inoue
7.2	Excessive conditions:	Passed.	Y. Nakamura and O. Araki
8	Durability and resistance to environmental conditions		
8.2	Dry heat		
8.2.1	- Storage test:	Passed.	A. Inoue
8.2.2	- Functional test:	Passed.	A. Inoue
8.3.1	Damp heat - Functional test:	Passed.	A. Inoue
8.4	Low temperature		
8.4.1	- Storage test:	Not applicable.	---
8.4.2	- Functional tests:	Passed.	A. Inoue
8.7	Vibration:	Passed.	R. Ito
8.8	Rain and spray:	Not performed.	----
8.12	Corrosion:	Not performed.	----
11	Special purpose tests		
11.1	Acoustic noise and signals:	Not performed.	----
11.2	Compass safe distance (CSD):	Not performed.	----
12	Safety precautions		
12.1	Protection against accidental access to dangerous voltages:	Passed.	Y. Nakamura and O. Araki
12.2	Electromagnetic radiofrequency radiation:	Not performed.	----
12.3	Emission from visual display unit (VDU):	Not applicable.	----
12.4	X-radiation:	Not performed.	----

IEC 62388 Clause	Test Item	Result	Test Engineer
17.3.2	Antenna shock test	Passed.	R. Ito

3 Test Results

3.1 Power supply

3.1.1 Extreme power supply

Environment	Normal power supply		Extreme power supply	
Dry heat	Performance test (PT)	Passed.	Performance check (PC)	Passed.
Damp heat	Performance check (PC)	Passed.	---	---
Low temperature	Performance test (PT)	Passed.	Performance check (PC)	Passed.
Normal temperature	Performance test (PT)	Passed.	Performance test (PT)	Passed.

3.1.2 Excessive conditions

	Item	Result	Description
1	Against Excessive current:	Passed.	7 A Fuse was activated, and the EUT was protected from damage.
2	Against Excessive voltage:	Passed.	Overvoltage protection circuits were provided in PSU-014, and activated at the voltages of 304.1 VAC (> 230 VAC+10%).
3	When subjected to the input of 300 VAC (> 230 VAC + 10%) of: - improper phase sequence (for AC), for 5 min.	Passed.	No abnormality or damage occurred.

After the tests, PC was successfully performed without errors or abnormality.

3.2 Dry heat

3.2.1 Storage test

For Antenna unit and PSU-014 (*),
after the test, PT/PC were performed at the Normal temperature. See Clause 3.1.1 of this report.

(*): PSU-014 was additionally tested under the temperature of +70°C specified to “Exposed equipment” at the same time at the customer’s request.

3.2.2 Functional test

See Clause 3.1.1 of this report.

3.3 Damp heat - Functional test

See Clause 3.1.1 of this report.

3.4 Low temperature

3.4.1 Storage test (Not applicable)

See Clause 3.1.1 of this report.

Not applicable to “Exposed” and “Protected” equipment.

3.4.2 Functional test

For Antenna Unit and PSU-014 (*),
see Clause 3.1.1 of this report.

(*): PSU-014 was additionally tested under the temperature of -25°C specified to “Exposed equipment” at the same time at the customer’s request.

3.5 Vibration

3.5.1 EUT attitude/mounting and Test fixture:

Unit	Attitude/mounting	Test fixture
Power Supply Unit PSU-014	Table-top	No.54 (*1)
	Wall-mounting	No. 35 and No. 63 (*1)
Antenna Unit RSB-128+RTR-106+XN24CF	Table-top	No. 44 (*1)

(*1): prepared by FLI.

3.5.2 Resonance search and Endurance tests

Position of Vibration Pick-up Sensors and Directions of Vibration: See Clause 6 of this report.

Unit	Vibration Direction	Resonance detected			Endurance test performed at freq. (Hz)	Results	Note
		Freq. (Hz)	Acceleration (m/s ²)	Magnitude ratio Q			
RSB-128+	X (left/right)	58.1	77.7	11.1	58.1	Passed.	
RTR-106+	Y (back/forth)	59.4	65.5	9.4	59.4	Passed.	
XN24CF (*)	Z (up/down)	100.0	11.8	--- (*)	100.0	Passed.	
PSU-014	X (left/right)	82.0	10.9	1.6	82.0	Passed.	
Table-top	Y (back/forth)	100.0	11.0	--- (*)	100.0	Passed.	
	Z (up/down)	94.5	26.5	3.8	94.5	Passed.	
PSU-014	X (left/right)	80.5	10.9	1.6	80.5	Passed.	
Wall-mounting	Y (back/forth)	93.5	21.3	3.0	93.5	Passed.	
	Z (up/down)	100.0	19.8	--- (*)	100.0	Passed.	

There was no damage, or degradation of performance during and after the tests.

(*): The Antenna Unit was tested with the combinations of RSB128 + RTR-106 + XN24CF for representing all combinations (TX power: max., Antenna length: max.).

3.6 Antenna shock

3.6.1 EUT attitude/mounting and Test fixture:

Unit	Attitude/mounting	Test fixture
Antenna Unit RSB-128+RTR-106+XN24CF	Table-top	No. 44 (*1)

(*1): prepared by FLI.

3.6.2 Results:

Unit	Test conditions	Results
Antenna Unit RSB-128+RTR-106+XN24CF	Acceleration: 100 m/s ² Duration: 25 ms Number of shocks: Three Direction: Z -upward	Passed.

There was no damage, or degradation of performance during and after the tests.

3.7 Rain and spray (Not performed)

Not performed at the customer's request because it has been already tested and reported in the test report FLI 12-13-058.

3.8 Corrosion (salt mist) (Not performed)

Not performed. See Clause 1.4 of this report.

3.9 Special purpose tests

3.9.1 Acoustic noise and signals (Not performed)

Not performed at the customer's request because it has been already tested and reported in the test report FLI 12-13-058.

3.9.2 Compass safe distance (CSD) (Not performed)

Not performed at the customer's request because it has been already tested and reported in the test report FLI 12-13-058.

3.10 Safety precautions

3.10.1 Protection against accidental access to dangerous voltages

IEC 60945 Clause	Requirement	Result	Note
4.6.1/12.1	There shall be no openings of the enclosure of the EUT to allow access to hazardous parts with the access probe (test finger), or there shall be adequate clearance between the access probe and hazardous parts.	Passed.	Dangerous voltages were provided in the EUT, but there were no openings to allow with test finger.
	All parts and wiring in the EUT shall be isolated automatically from all sources of electrical energy when protective covers are removed. Alternatively any further access to the interior of the EUT shall be only possible by means of a spanner or screwdriver.	Passed.	Screw driver needed.
	Warning labels shall be prominently displayed both within the EUT and on protective covers.	Passed.	Warning label provided on the protective cover.
	Means shall be provided for earthing exposed metallic parts of the EUT, but this shall not cause any terminal of the source of electrical energy to be earthed.	Passed.	Earth terminal provided.

3.10.2 Electromagnetic radiofrequency radiation (Not performed)

Not performed at the customer's request because it has been already tested and reported in the test report FLI 12-13-058.

3.10.3 Emission from visual display unit (VDU) (Not applicable)

Not applicable. The EUT had no display devices.

3.10.4 X-radiation (Not performed)

The test was waived according to the evidence submitted by the manufacture.

3.11 Environmental conditions during Testing

IEC 60945 Clause	Item	Date of test	Temperature, humidity (Before-test to After-test)	Power supply voltage (Before-test to After-test)
7	Power supply			
7.1	Extreme Power supply:	3 September 2013	24°C to 24°C, 69%RH to 69%RH.	255.0 VAC, 52.5 Hz to 255.0 VAC, 52.5 Hz. 207.0 VAC, 47.5 Hz to 207.0 VAC, 47.5 Hz.
		4 September 2013	26°C to 26°C, 73%RH to 73%RH.	255.0 VAC, 52.5 Hz to 255.0 VAC, 52.5 Hz. 207.0 VAC, 47.5 Hz to 207.0 VAC, 47.5 Hz.
		6 September 2013	25°C to 25°C, 72%RH to 72%RH.	255.0 VAC, 52.5 Hz to 255.0 VAC, 52.5 Hz. 207.0 VAC, 47.5 Hz to 207.0 VAC, 47.5 Hz.
7.2	Excessive conditions tests	2 October 2013	26°C to 26°C, 62% to 62%RH.	230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz.
8	Durability and resistance to environmental conditions			
8.2	Dry heat	---	---	---
8.2.1	- Storage test:	6 September 2013	25°C to 26°C, 72%RH to 69%RH.	230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz.
8.2.2	- Functional test:	4 September 2013	26°C to 26°C, 73%RH to 73%RH.	230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz.
8.3.1	Damp heat-Functional test:	5 September 2013	25°C to 25°C, 72%RH to 72%RH.	230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz.
8.4	Low temperature			
8.4.1	- Storage test:	Not applicable.	---	---
8.4.2	- Functional tests:	3 September 2013	24°C to 24°C, 69%RH to 69%RH.	230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz.
8.7	Vibration:	9 September 2013	25°C to 25°C, 61%RH to 61%RH	101.0 VAC, 60.0 Hz to 101.1 VAC, 60.0 Hz.
		10 September 2013	28°C to 28°C, 60%RH to 60%RH	101.0 VAC, 60.0 Hz to 101.1 VAC, 60.0 Hz.
		11 September 2013	25°C to 25°C, 61%RH to 61%RH	101.0 VAC, 60.0 Hz to 101.1 VAC, 60.0 Hz.
8.8	Rain and spray:	Not performed.	---	---
8.12	Corrosion:	Not performed.	---	---
11	Special purpose tests			
11.1	Acoustic noise and signals:	Not performed.	---	---
11.2	Compass safe distance (CSD):	Not performed.	---	---
12	Safety precautions			
12.1	Protection against accidental access to dangerous voltages:	2 October 2013	26°C to 26°C, 62%RH to 62%RH.	230.0 VAC, 50.0 Hz to 230.2 VAC, 50.0 Hz.
12.2	Electromagnetic radiofrequency radiation:	Not performed.	---	---
12.3	Emission from visual display unit (VDU):	Not applicable.	---	---
12.4	X-radiation measurement:	Not performed.	---	---

IEC 62388	Item	Date of test	Temperature, humidity (Before-test to After-test)	Power supply voltage (Before-test to After-test)
17.3.2	Antenna shock	11 September 2013	24°C to 25°C, 60%RH to 65%RH	101.0 VAC, 60.0 Hz to 101.1 VAC, 60.0 Hz.

4 List of Measuring/Test Instruments

Measuring/Test instruments have been appropriately calibrated/maintained according to the FLI programs/procedures and ISO/IEC 17025. Measuring/Test instruments used for the tests are listed below.

4.1 Dry heat/Damp heat/Low temperature

(*)	C/N	Instrument	Type	S/N	Manufacturer
--	HT370	Climatic chamber (L)	TBE-3HW5GE2F	3013000995	Tabai Espec
--	HT723	Paperless recorder/Dual communication logger DAQSTATION FX100	FX106-4-1	S5JA01445	Yokogawa
--	HT415	Climatic chamber (S)	PL-4KP	14004204	Tabai Espec
--	HT724	Paperless recorder/Dual communication logger DAQSTATION FX100	FX106-4-1	S5JA01450	Yokogawa
X	HT510	Climatic chamber (Hama-L)	TBE-3HW4PE2F	3013002540	Tabai Espec
X	HT725	Paperless recorder/Dual communication logger DAQSTATION FX100	FX106-4-1	S5JA01447	Yokogawa
--	HT364	Climatic/Air pressure chamber (Hama-AL)	MZH-21HS	581989	Tabai Espec
--	HT161	Temperature recorder (Hama-AL)	μR180	4177WA303	Yokogawa
X	HT414	Climatic chamber (Hama-S)	PL-4KP	14004203	Tabai Espec
X	HT726	Paperless recorder/Dual communication logger DAQSTATION FX100	FX106-4-1	S5JA01448	Yokogawa
--	HT446	Programmable AC power supply	4420/4471	306043-4420024	NF
--	HT432	DC power supply	PAN55-20	AK003307	Kikusui
X	HT462	Digital Multimeter	111	7812001	Fluke
X	HT434	AC power supply	PCR2000L	BB002789	Kikusui

(*): X – indicates instruments used for the tests, -- – not used.

4.2 Vibration

(*)	C/N	Instrument	Type	S/N	Manufacturer	Note
X	HT562	Vibration test system (3.5-ton type)	G-0235LS	SG-4420	Shinken	
X	HT367	Vibration test system (2.0-ton type)	VS-2000-20	S-4798	IMV	
--	HT373	Vibration test system (0.6-ton type)	VS-600-140	212540	IMV	
--	HT439	Pickup sensor	VP-15	2325T	IMV	
X	HT577	Pickup sensor (Reference)	V11-101S	0522	Shinken	Used for PSU-014
--	HT578	Pickup sensor	V11-101S	0521	SHINKEN	
X	HT661	Pickup sensor (Reference)	V11-101S	1112	Shinken	Used for RSB-128
X	HT662	Pickup sensor (Response)	VP-15	0025U	IMV	Used for PSU-014
X	HT663	Pickup sensor (Response)	VP-15	0026U	IMV	Used for RSB-128
--	HT434	AC/DC Power Supply	PCR2000L	BB002789	Kikusui	
--	HT431	DC Power Supply	PAN55-20	AK003303	Kikusui	
X	HT462	Digital Multimeter	111	78120001	Fluke	
--	HT430	DC Power supply	PAD55-20L	10091786	Kikusui	

(*): X – indicates instruments used for the tests, -- – not used.

4.3 Antenna shock

(*)	C/N	Instrument	Type	S/N	Manufacturer
X	HT562	Vibration test system (3.5-ton type)	G-0235LS	SG-4420	Shinken
--	HT367	Vibration test system (2.0-ton type)	VS-2000-20	S-4798	IMV
--	HT373	Vibration test system (0.6-ton type)	VS-600-140	212540	IMV
--	HT439	Pickup sensor	VP-15	2325T	IMV
--	HT577	Pickup sensor	V11-101S	0522	Shinken
--	HT578	Pickup sensor	V11-101S	0521	SHINKEN
X	HT661	Pickup sensor (Reference)	V11-101S	1112	Shinken
--	HT662	Pickup sensor	VP-15	0025U	IMV
--	HT663	Pickup sensor	VP-15	0026U	IMV
--	HT434	AC/DC Power Supply	PCR2000L	BB002789	Kikusui
--	HT431	DC Power Supply	PAN55-20	AK003303	Kikusui
X	HT462	Digital Multimeter	111	78120001	Fluke
--	HT430	DC Power supply	PAD55-20L	10091786	Kikusui

(*): X – indicates instruments used for the tests, -- – not used.


4.4 Safety precautions

4.4.1 Protection against accidental access to dangerous voltages

(*)	C/N	Instrument	Type	S/N	Manufacturer
X	HT435	Jointed test finger	P-10.09	D-008	EXCEL

(*): X – indicates instruments used for the tests, -- – not used.

5 EUT Setup/Test Arrangement

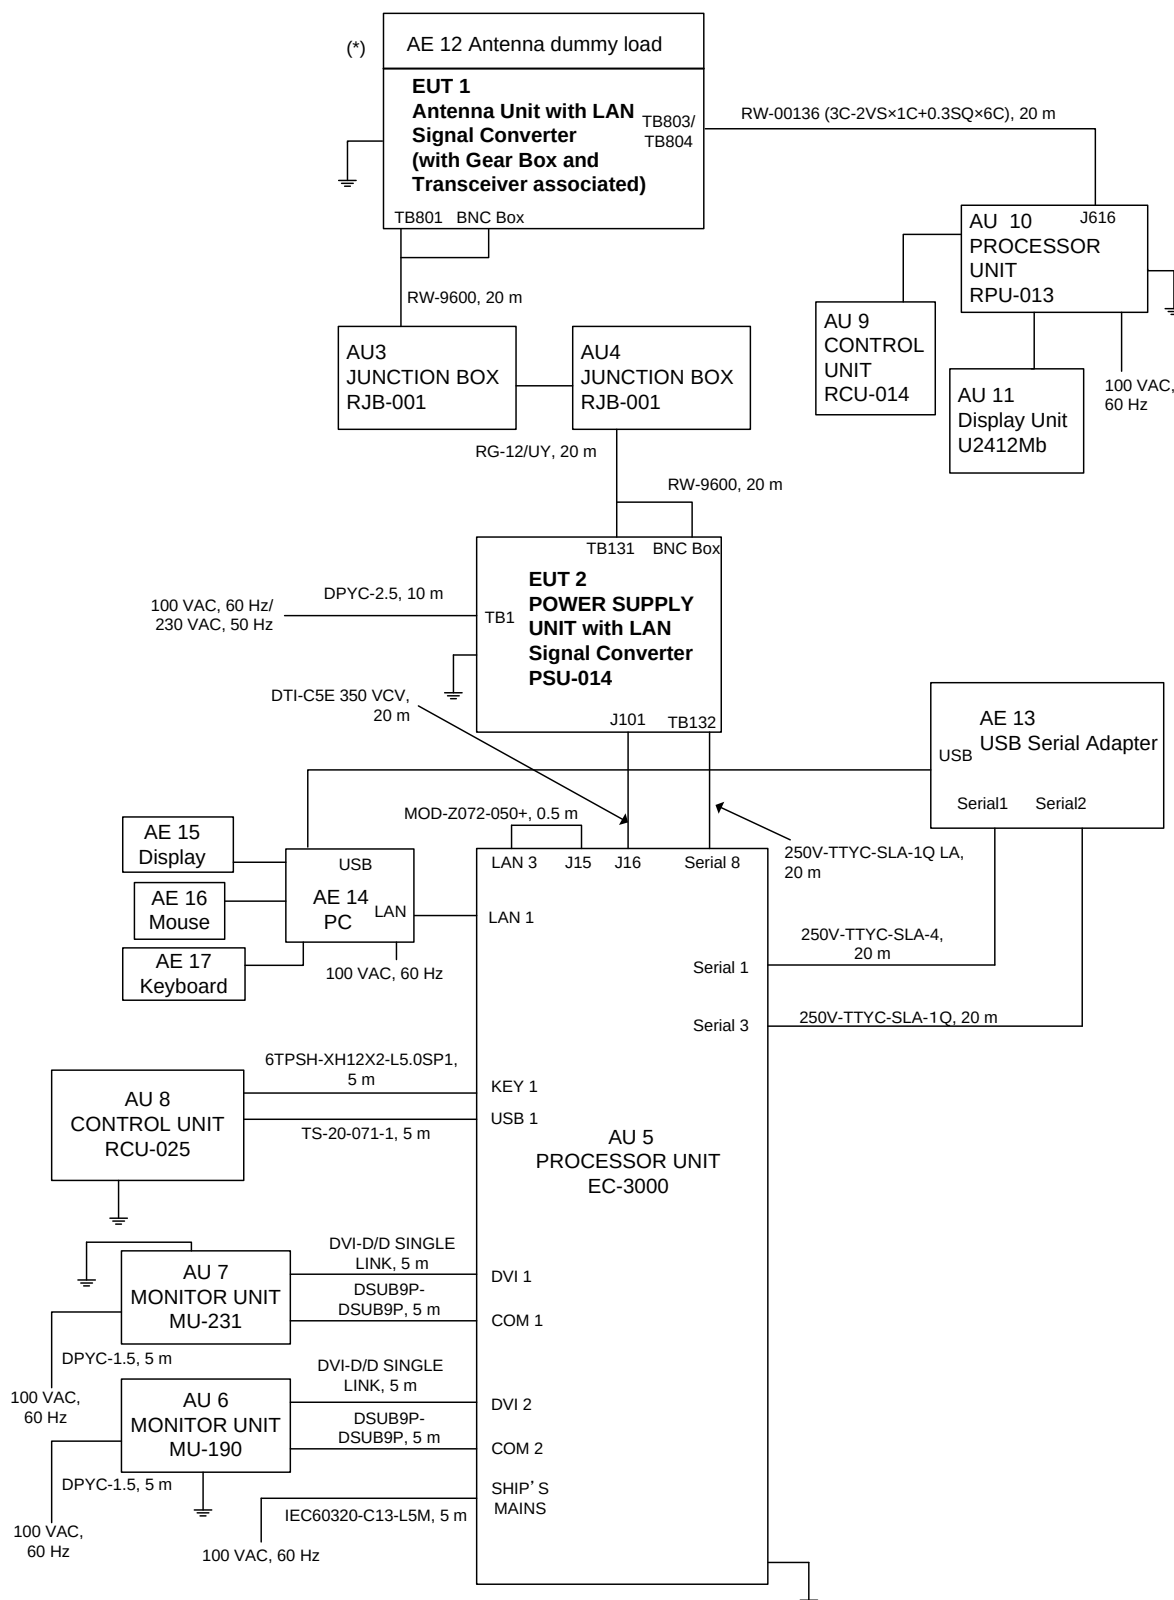

Note (1): AU - Auxiliary Unit, AE - Associated Equipment.

(2): AE15, AE16, AE17 were not connected for Vibration and Antenna shock tests.

(*) - Antenna radiator was used for Vibration and Antenna shock tests.

6 Photographs of Test Setup/Arrangement

6.1 Dry heat/Damp heat/Low temperature




Note: Antenna Unit, PSU-014, and RJB-001 were set inside the Chamber and tested at the same time.

6.2 Vibration

RSB-128+RTR-106+XN24CF



PSU-014 (Table-top),

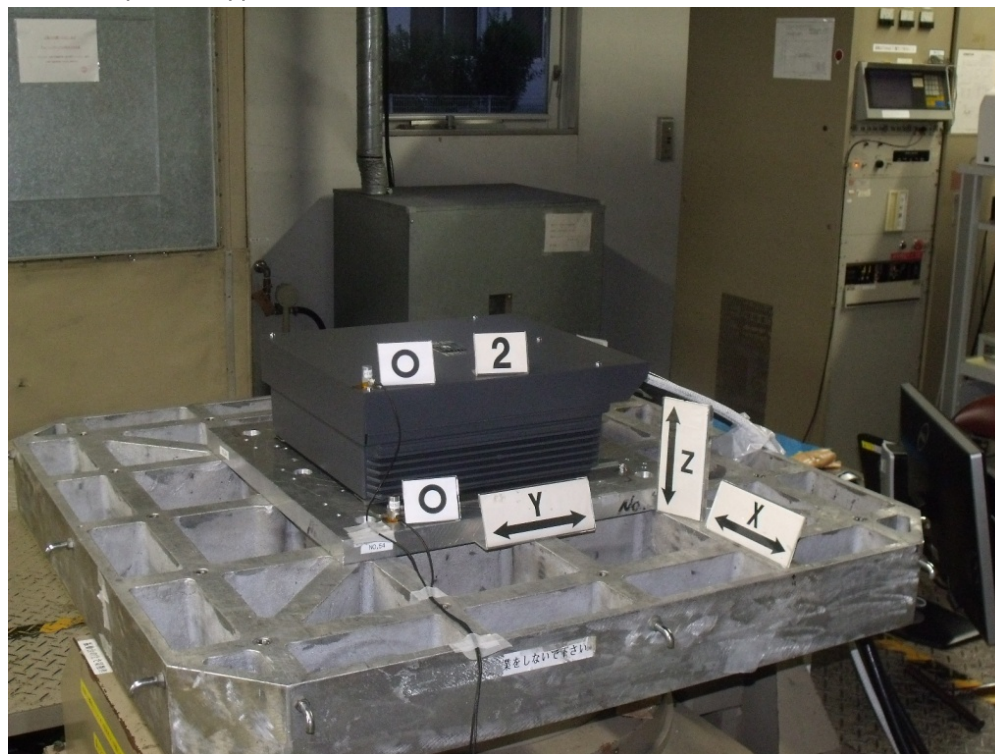


Note: ○ - Pick-up sensor, ↔ - Vibration direction.

6.3 Antenna shock


Form: FQ052/37

7 Temperature/humidity records taken during Dry heat/Damp heat/Low temperature tests


7.1. Dry heat - Storage,

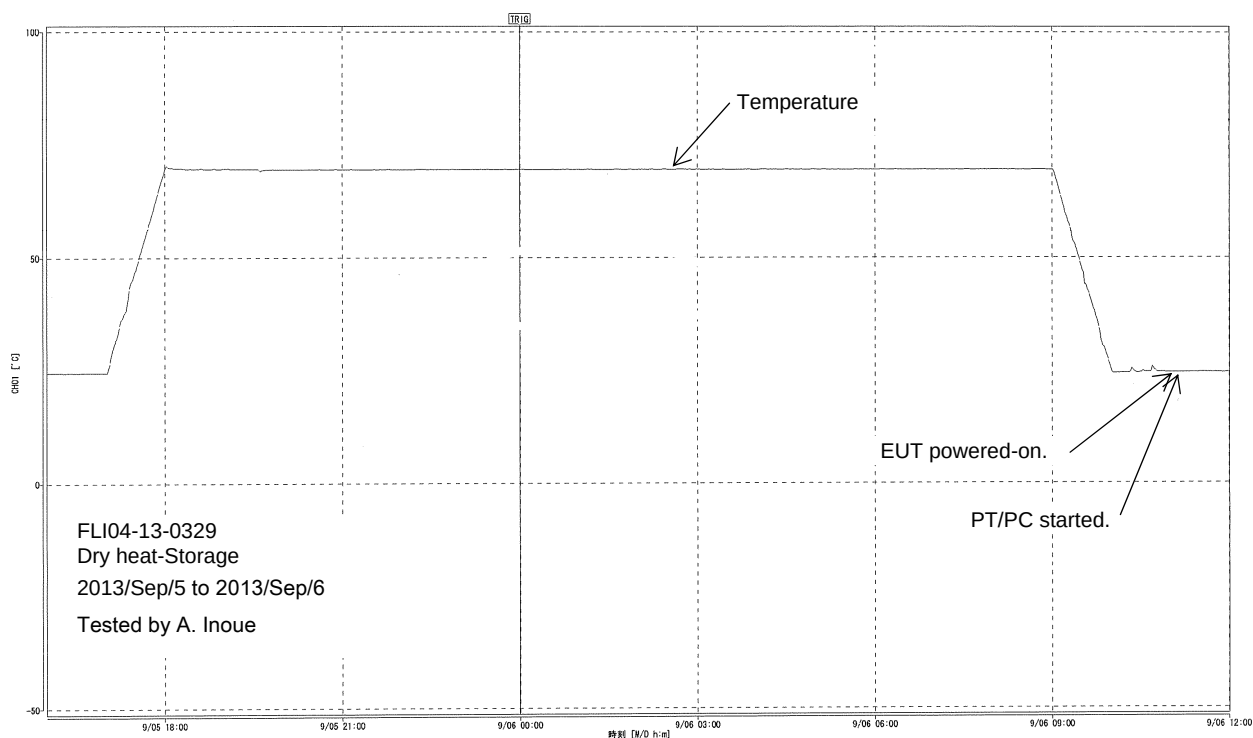


7.2 Dry heat - Functional,

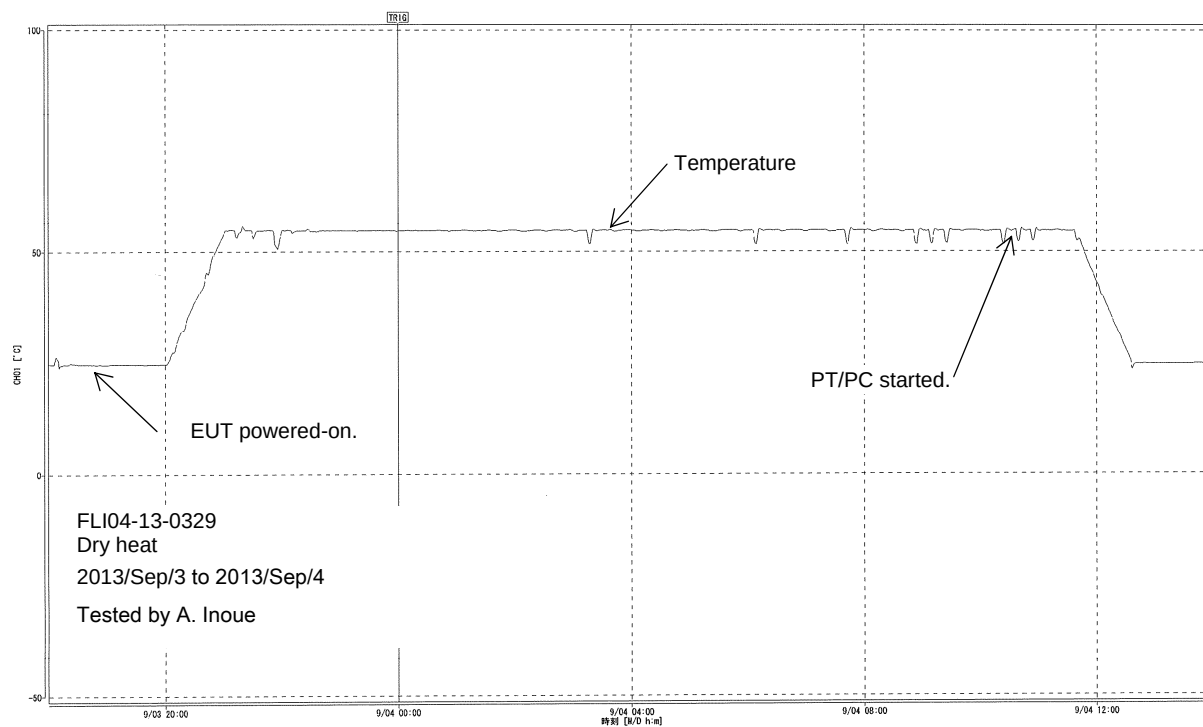

7.3 Damp heat,


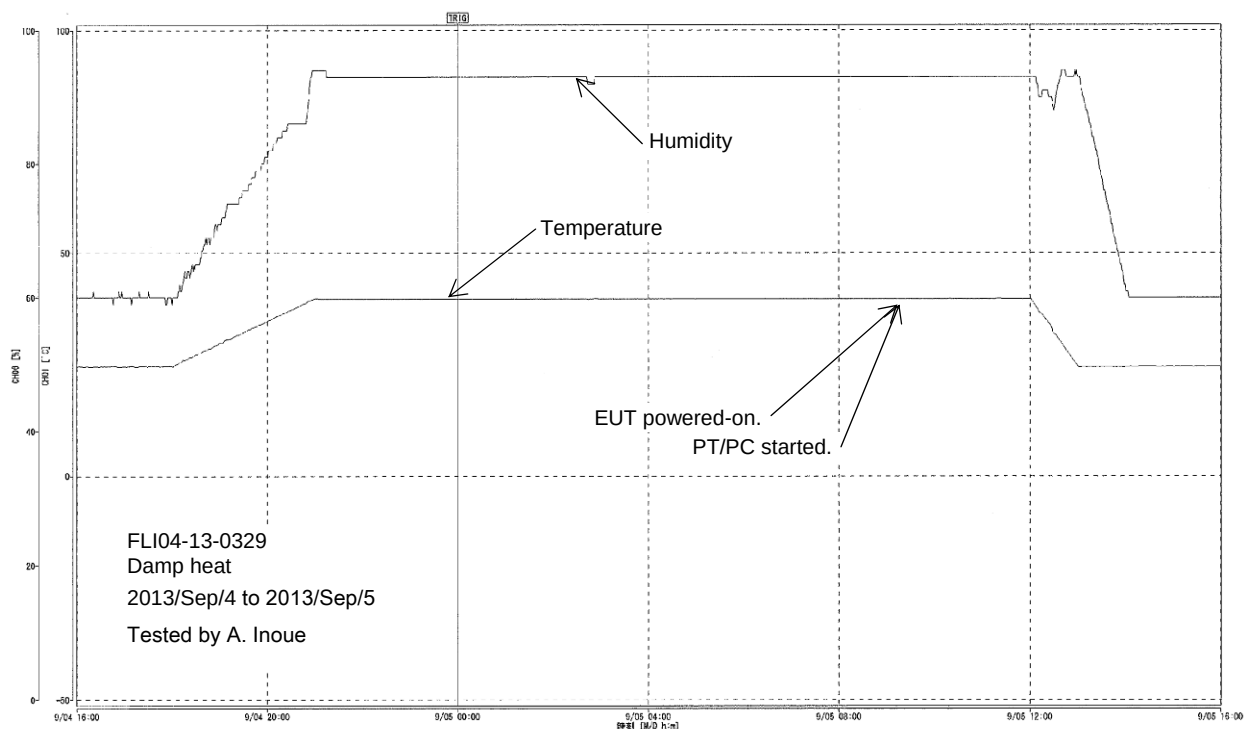



7.4 Low temperature - Functional,

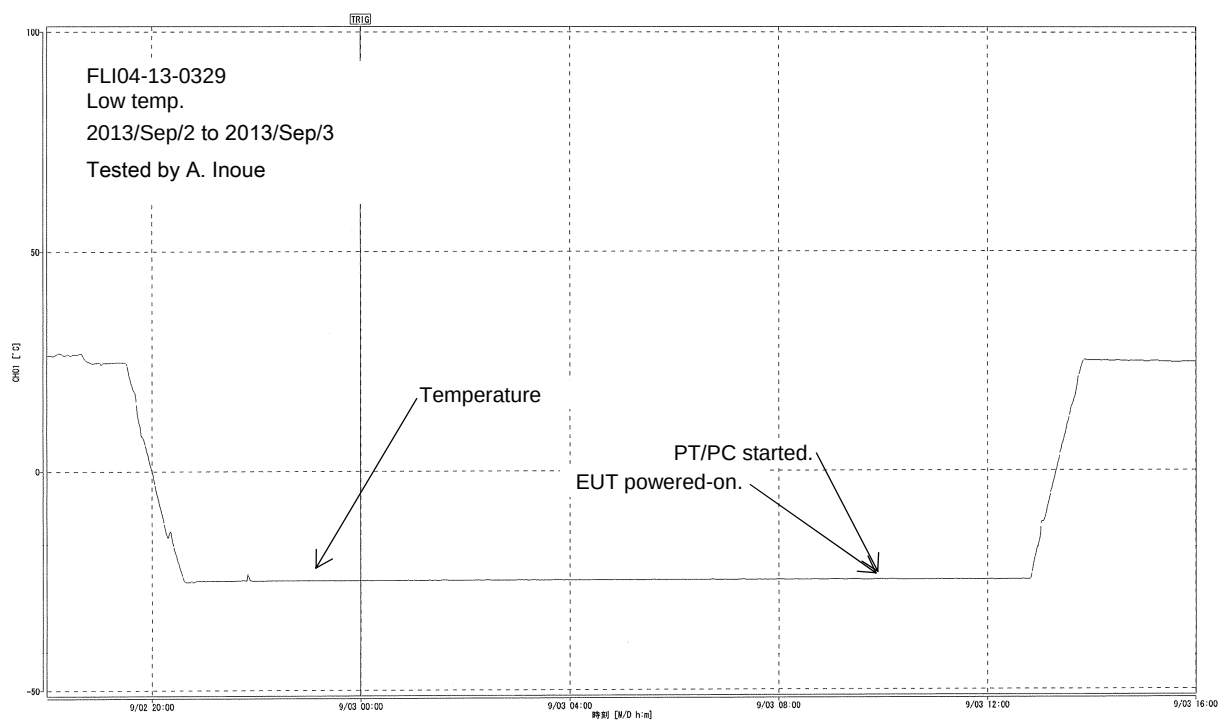


8 Vibration response plots taken during tests



8.1 for RSB-128+RTR-106+XN24CF,

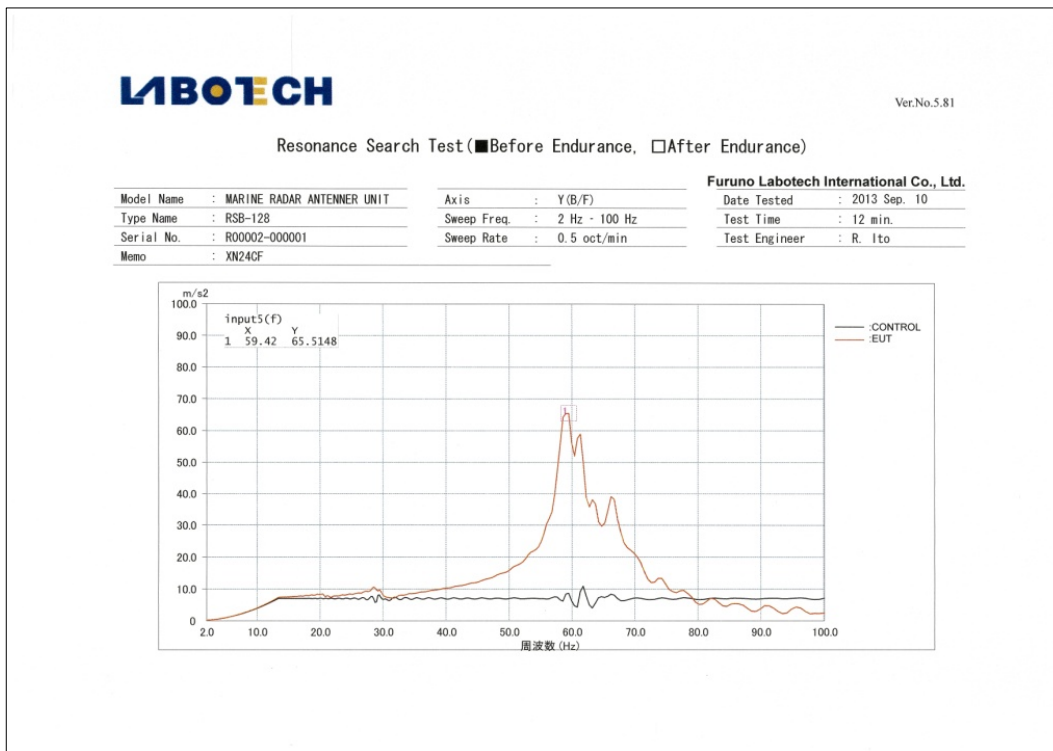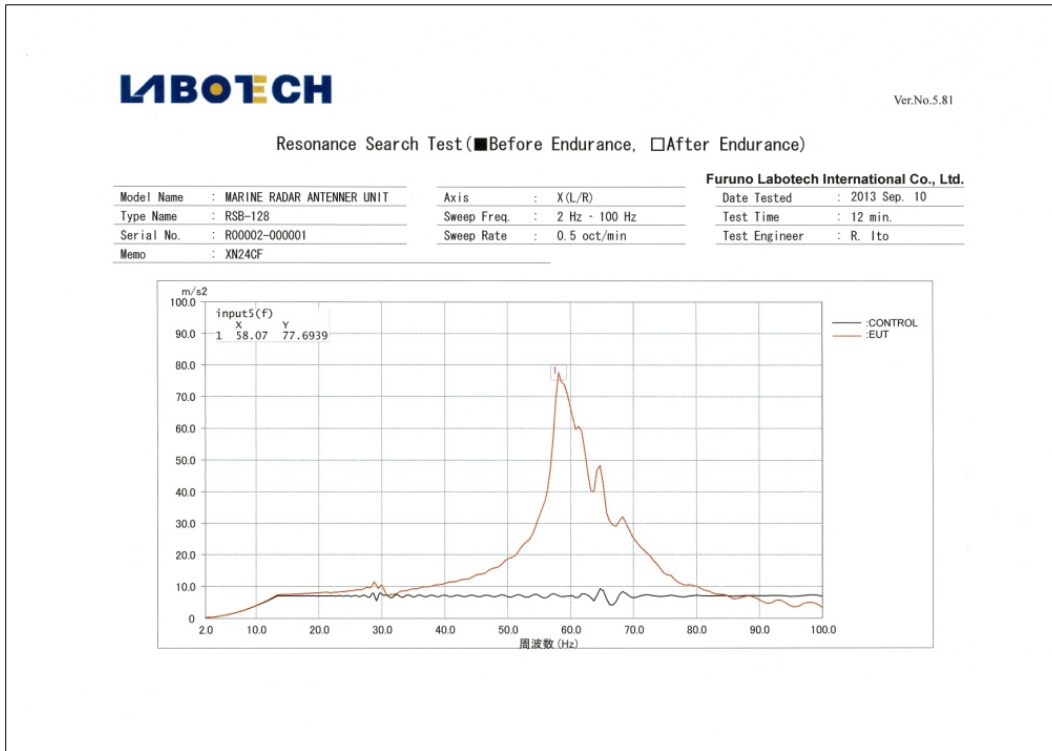


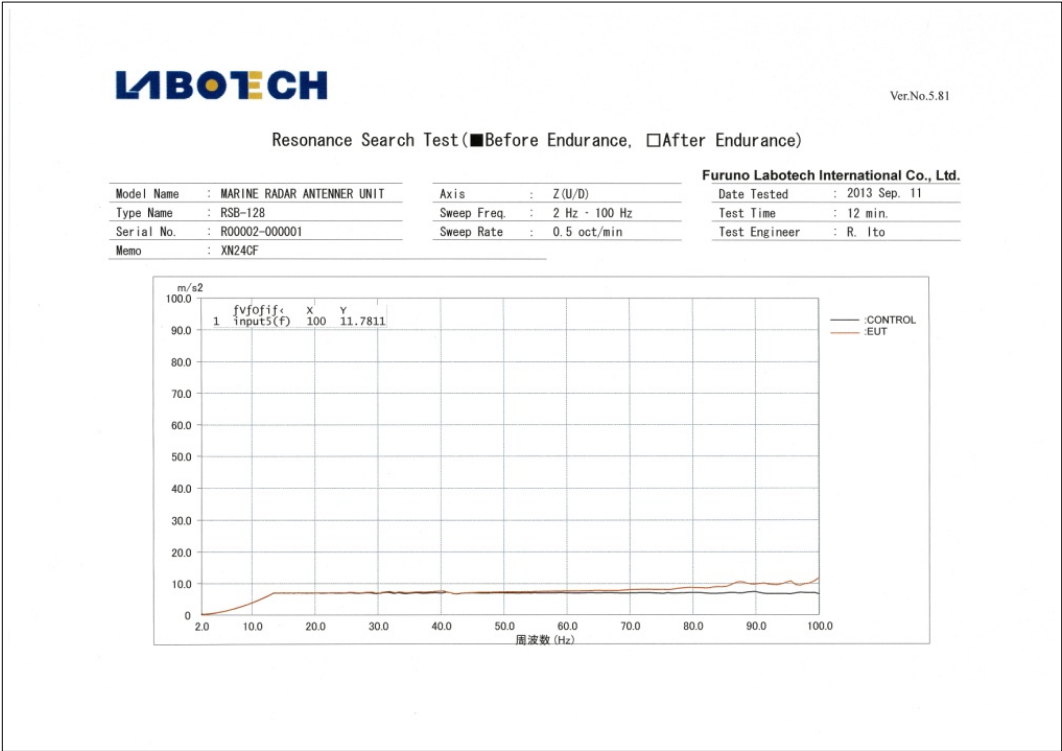



8.2 for PSU-014 (Table-top),

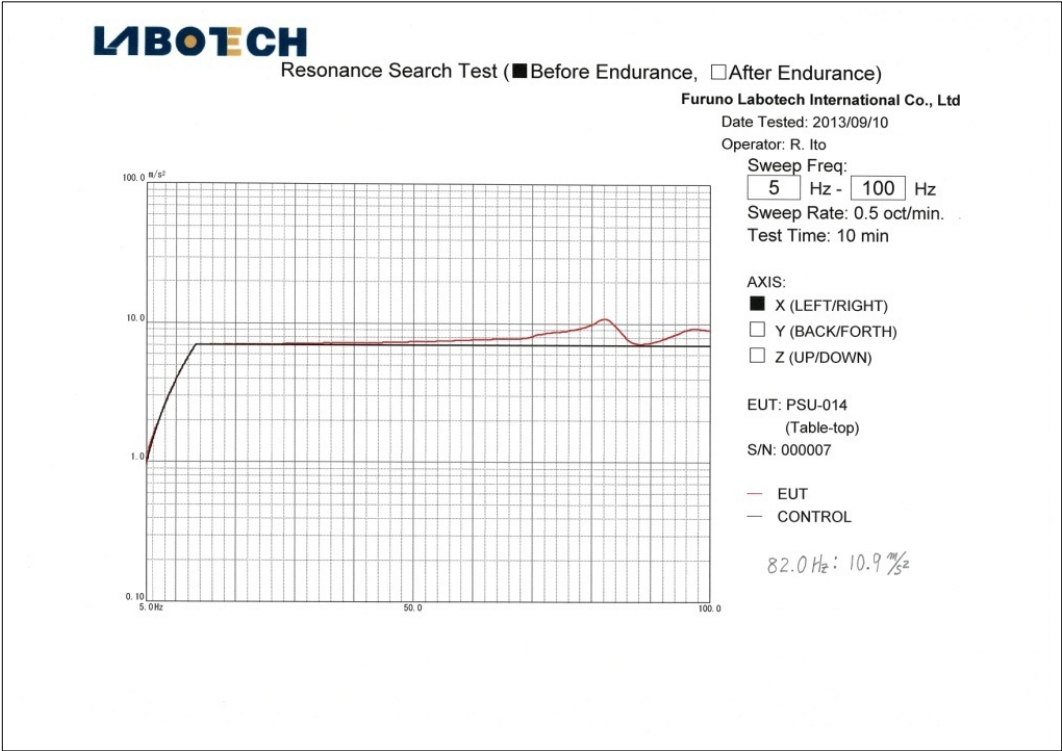

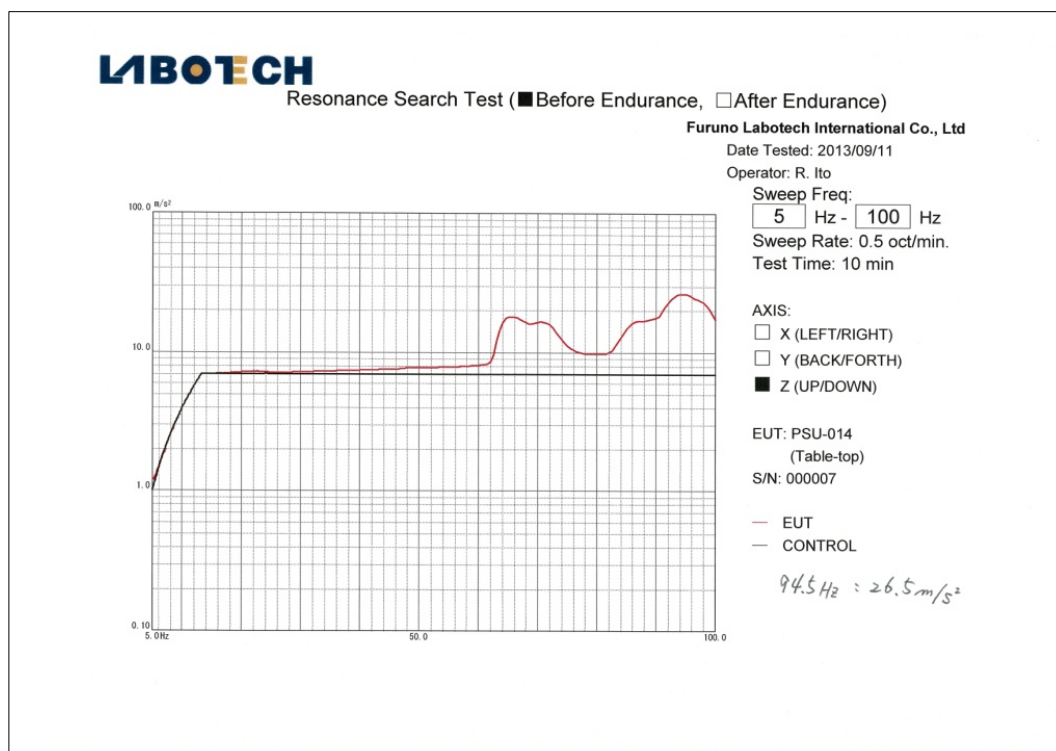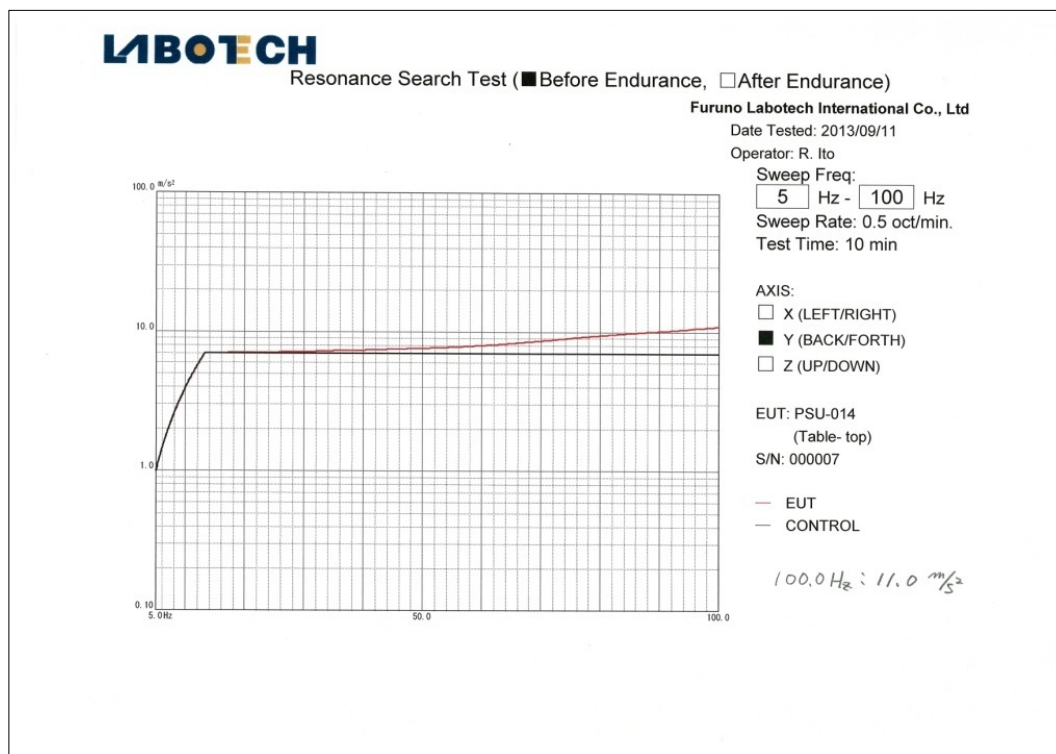


8.3 for PSU-014 (Wall-mounting),

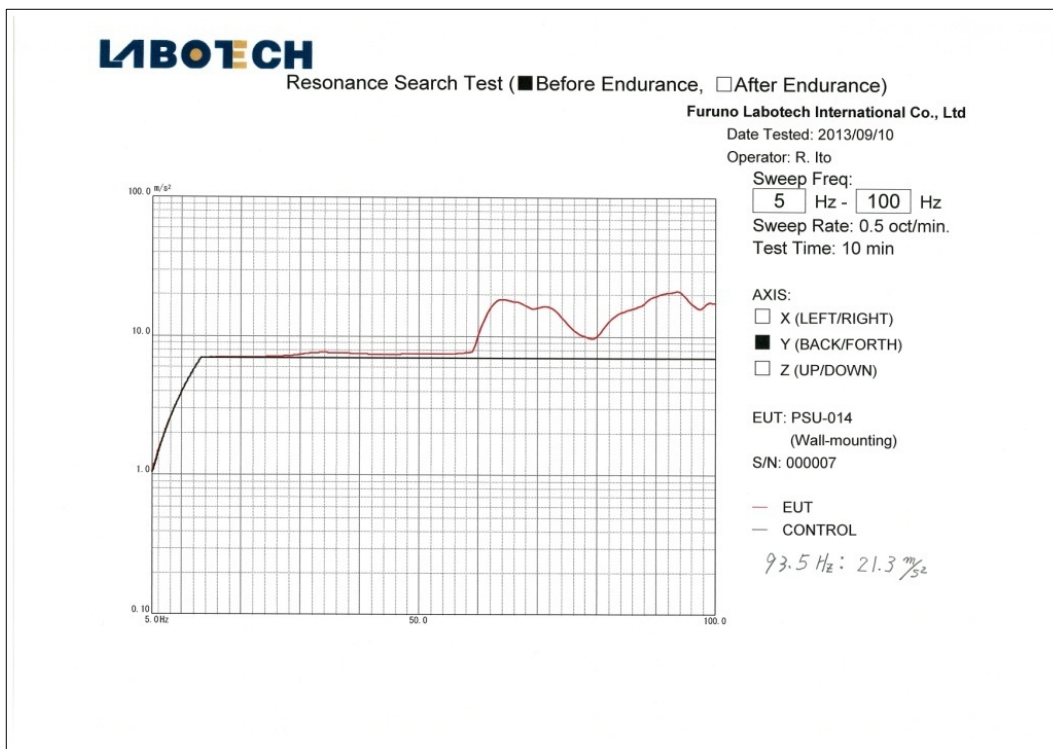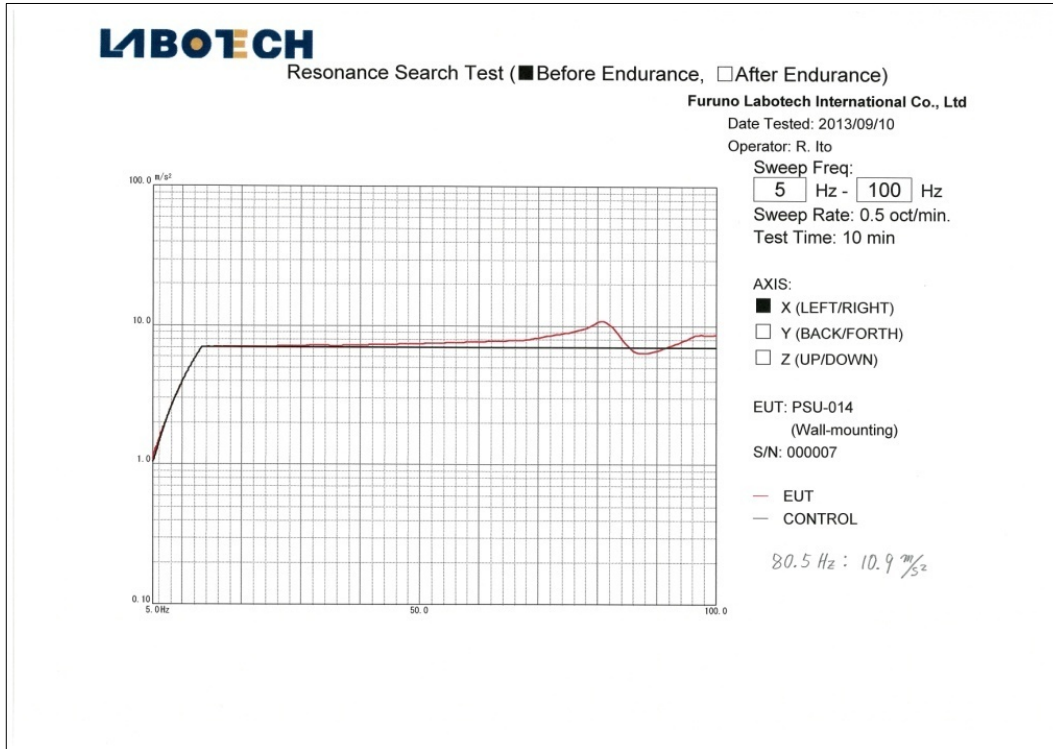

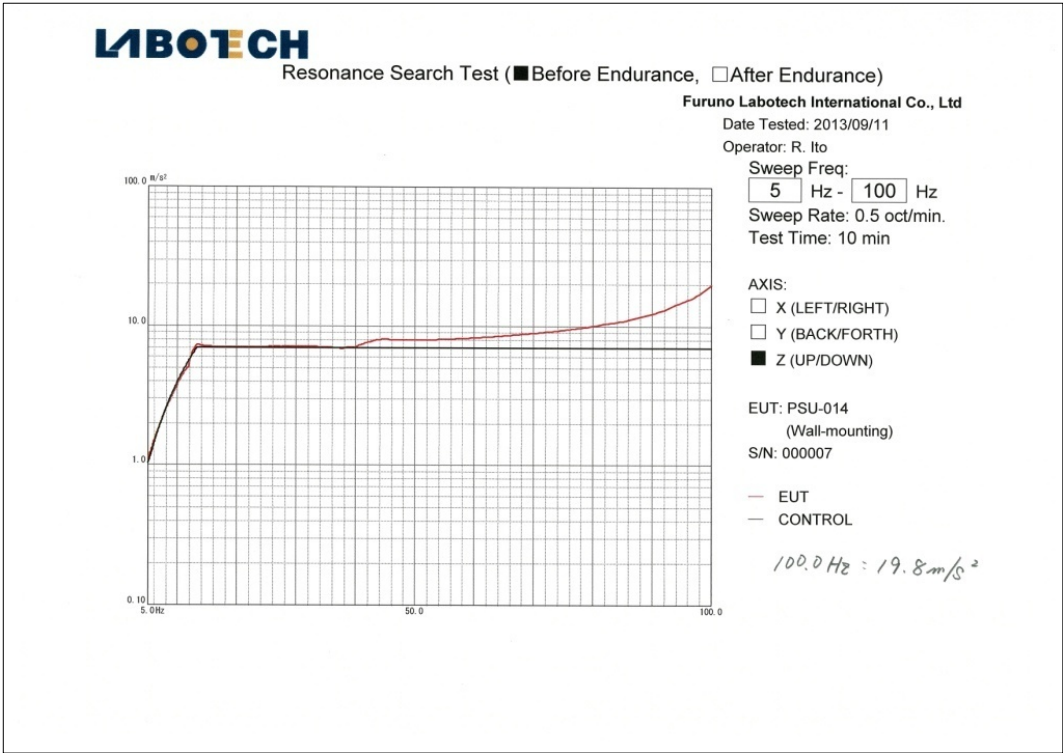

8.4 IE 62388 Shock test to Antenna Unit (RSB-128 + RTR-106 + XN24CF)

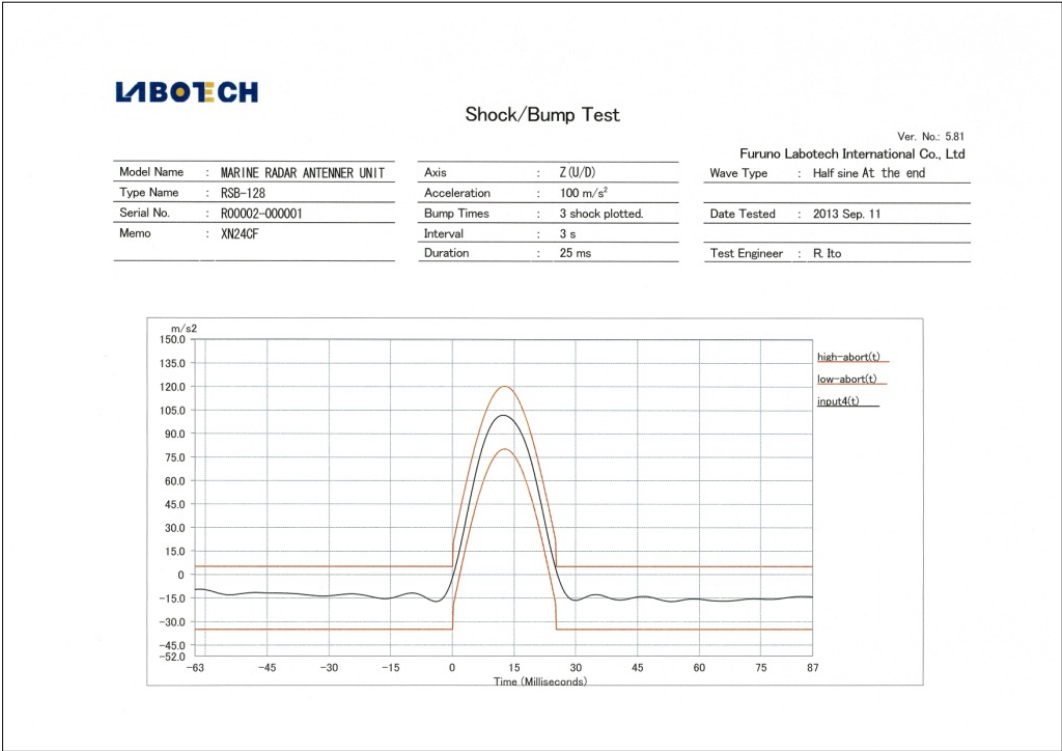

9 Test results data of the EUT obtained during the climatic tests.

9.1 Dry heat - Storage test

Item no.	Results			Limit
	Power supply voltage and frequency			
	230 VAC / 50 Hz	207 VAC / 47.5 Hz	253 VAC / 52.5 Hz	
1	Passed.	Passed.	Passed.	---
2 (rpm)	42.1	42.1	42.1	≥ 40
3	Passed.	Passed.	Passed.	--
4	Passed.	Passed.	Passed.	---
5	Passed.	Passed.	Passed.	---
6	Passed.	Passed.	Passed.	---
7	Passed.	Passed.	Passed.	---
8 (m:s)	2:01	2:01	2:00	< 4:00
9 (A)	7.98	7.98	7.96	---

Note: Item numbers are corresponding to those in Clause 1.2.2 Performance Test (PT).

9.2 Dry heat – Functional test

Item no.	Results			Limit
	Power supply voltage and frequency			
	230 VAC / 50 Hz	207 VAC / 47.5 Hz	253 VAC / 52.5 Hz	
1	Passed.	Passed.	Passed.	---
2 (rpm)	41.9	41.9	41.9	> 40
3	Passed.	Passed.	Passed.	--
4	Passed.	Passed.	Passed.	---
5	Passed.	Passed.	Passed.	---
6	Passed.	Passed.	Passed.	---
7	Passed.	Passed.	Passed.	---
8 (m:s)	1:57	2:00	2:00	≤ 4:00
9 (A)	7.93	7.91	7.93	---

9.3 Damp heat – Functional test

Item no.	Results			Limit
	Power supply voltage and frequency			
	230 VAC / 50 Hz	207 VAC / 47.5 Hz	253 VAC / 52.5 Hz	
1	Passed.	NA	NA	---
2 (rpm)	42.1			≥ 40
3	Passed.			--
4	Passed.			---
5	Passed.			---
6	Passed.			---
7	Passed.			---
8 (m:s)	2:01			$\leq 4:00$
9 (A)	7.98			---

Note: NA - Not applicable.

9.4 Low temperature – Functional test

Item no.	Results			Limit
	Power supply voltage and frequency			
	230 VAC / 50 Hz	207 VAC / 47.5 Hz	253 VAC / 52.5 Hz	
1	Passed.	Passed.	Passed.	---
2 (rpm)	41.9	41.9	41.9	> 40
3	Passed.	Passed.	Passed.	--
4	Passed.	Passed.	Passed.	---
5	Passed.	Passed.	Passed.	---
6	Passed.	Passed.	Passed.	---
7	Passed.	Passed.	Passed.	---
8 (m:s)	1:57	2:00	2:00	< 4:00
9 (A)	7.93	7.91	7.93	---