

# Test Report

(IEC 60945 and IEC 62388)

**For**

**Trade name: Furuno  
Model: MARINE RADAR  
Type: FAR-3230S/-3330S**

**Report No.: FLI 12-13-057**

**Date of Issue: 18 October 2013**

**Furuno Labotech International Co., Ltd.**

1-16, Fukazu-cho, Nishinomiya-shi, Hyogo, 663-8203 Japan

Tel: +81 (0) 798 63 1094 Fax: +81 (0) 798 63 1098

URL: <http://www.furuno-labotech.co.jp>

## Report Summary

|                                               |                                                                                                                                                                                                                                                                                                                              |                                |                 |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-----------------|
| FLI project number:                           | FLI 04-13-0306                                                                                                                                                                                                                                                                                                               |                                |                 |
| Test report number of initial issue:          | FLI 12-13-057                                                                                                                                                                                                                                                                                                                | Date of initial issue          | 18 October 2013 |
| Test report number of revised/replaced issue: | ---                                                                                                                                                                                                                                                                                                                          | Date of revised/replaced issue | ---             |
| Test report revision/ replacement history:    | ---                                                                                                                                                                                                                                                                                                                          |                                |                 |
| Test standard(s)/ Test specifications:        | IEC 60945: 2002 (ed. 4), Clause 7.1, 7.2, 8.2, 8.3, 8.4, 8.7, 8.8, 11, and 12, including IEC 60945 Corrigendum 1 (2008).<br>IEC 62388: 2013 (ed.2.0), 17.3.2 Antenna shock test<br>IEC 60068-2-1: 2007, IEC 60068-2-2: 2007, IEC 60068-2-30: 2005, IEC 60529: 2001, IEC 61672-1: 2002, IEC 60068-2-6: 2007, ISO 25862: 2009, |                                |                 |
| Customer:                                     | Furuno Electric Co., Ltd.<br>9-52 Ashihara-Cho, Nishinomiya-City, 662-8580 Japan                                                                                                                                                                                                                                             |                                |                 |
| Manufacturer:                                 | Furuno Electric Co., Ltd.<br>9-52 Ashihara-Cho, Nishinomiya-City, 662-8580 Japan                                                                                                                                                                                                                                             |                                |                 |
| Trade name:                                   | FURUNO                                                                                                                                                                                                                                                                                                                       |                                |                 |
| Model:                                        | MARINE RADAR                                                                                                                                                                                                                                                                                                                 |                                |                 |
| Type:                                         | FAR-3230S/-3330S                                                                                                                                                                                                                                                                                                             |                                |                 |
| Product function and intended use:            | For marine safety navigation                                                                                                                                                                                                                                                                                                 |                                |                 |
| Number of test samples tested:                | Three                                                                                                                                                                                                                                                                                                                        |                                |                 |
| Serial number:                                | R00005-000001, R00005-000003, and R00005-000004                                                                                                                                                                                                                                                                              |                                |                 |
| Power rating:                                 | 100-230 VAC, 50-60 Hz, 8 A                                                                                                                                                                                                                                                                                                   |                                |                 |
| Product status:                               | Pre-production model                                                                                                                                                                                                                                                                                                         |                                |                 |
| Modifications made to samples during testing: | None.                                                                                                                                                                                                                                                                                                                        |                                |                 |
| Date of receipt of samples:                   | 8 July 2013                                                                                                                                                                                                                                                                                                                  |                                |                 |
| Test period:                                  | From 11 July 2013 to 20 August 2013                                                                                                                                                                                                                                                                                          |                                |                 |
| Place of test:                                | Furuno Labotech International Co., Ltd.<br>- LABOTECH EMC Center<br>1-16, Fukazu-cho, Nishinomiya-shi, Hyogo, 663-8203 Japan<br>- Nishinomiya-Hama Lab.<br>2-20, Nishinomiya-Hama, Nishinomiya-shi, Hyogo, 662-0934 Japan<br>- Nishinomiya Lab.<br>9-52 Ashihara-cho, Nishinomiya-shi, Hyogo, 662-8580 Japan                 |                                |                 |
| Test results/ Compliance:                     | Passed.<br>The test results of this report relate only to the samples tested.                                                                                                                                                                                                                                                |                                |                 |
| Tested by:                                    | Akira Inoue, Tadayuki Ekawa, Ryoichi Ito, Yasuharu Nakamura, Fumiya Ueki, and Katsumi Imamura                                                                                                                                                                                                                                |                                |                 |
| Written by:                                   | Akiko Inoue                                                                                                                                                                                                                                                                                                                  |                                |                 |
| Verified by:                                  | Yoshihiro Ishii                                                                                                                                                                                                                                                                                                              |                                |                 |
| Approved by:                                  | Date: 18 October 2013<br>Name: Yoshihiro Ishii<br>Title: Senior Manager, Technical Department,<br>Furuno Labotech International Co., Ltd.<br>Signature:                                                                                  |                                |                 |

## Testing Laboratory Status

Furuno Labotech International Co., Ltd. (hereafter called "FLI") has been holding the following status after having been assessed according to the provisions of ISO/IEC 17025 and/or the relevant rules:

(1) JAB Accredited Testing Laboratory:

- accredited by Japan Accreditation Board (JAB),
- Laboratory accreditation number: RTL03220
- Date of initial accreditation: 14 January 2011
- Scope of accreditation: Electrical testing - EMC testing (\*)

(2) Telefication Listed Testing Laboratory:

- listed by Telefication B. V., (The Netherlands)
- Laboratory assignment number: L116
- Date of initial listing: 26 July 1999 (\*)
- for testing the following product categories/ test standards: EN 60945, IEC 61162-1/-2, and IEC 62288

(3) BSH Recognized Testing Laboratory:

- recognized by Bundesamt für Seeschifffahrt und Hydrographie (BSH), (Germany)
- Recognition certificate number: BSH/4613/06202/1864/11
- Date of initial recognition: 4 April 2003 (\*)
- for testing the following product categories/ test standards:
  - IEC/EN 60945, IEC 62388, IEC 61162-1/-2, and IEC 62288

(4) TÜV Appointed EMC Test Laboratory:

- appointed by TÜV Rheinland Japan Ltd.,
- Laboratory assignment number: UA 50046428
- Date of initial appointment: 21 December 1998 (\*)
- for carrying out the tests of:
  - EN 55011, CISPR 11, EN 55022, CISPR 22, EN 55024, CISPR 24, EN 55025, CISPR 25, EN/IEC 61000-3-2/-3, EN/IEC 61000-4-2/-3/-4/-5/-6/-8/-11, EN/IEC 61000-6-1/-2/-3/-4, EN/IEC 60945, EN/IEC 61326-1, EN/IEC 61326-2-6, EN/IEC 60601-1-2, JIS T 0601-1-2, JIS C 1806-1, ISO 11452-1/-2/-4.

(5) RMRS Recognized Testing Laboratory:

- recognized by Russian Maritime Register of Shipping (RMRS), (Russia)
- Laboratory recognition number: 11.02594.011
- Date of initial recognition: 27 January 2009 (\*)
- for carrying out testing in the field of:
  - Electrical measurements and tests, EMC tests, Mechanical measurements and tests, Equipment protection degree tests, and Climatic tests for Ship's radio and navigational equipment and IEC 60945: 2002

(6) RRR Recognized Test Laboratory:

- recognized by Russian River Register (RRR), (Russia)
- Recognition certificate number: 154262
- Date of initial recognition: 31 May 2013
- for carrying out of tests of ships radio and navigation equipment

(7) DNV Recognized Environmental Test Laboratory:

- recognized by Det Norske Veritas AS (DNV), (Norway)
- Recognition certificate number: 262.1-015854-J-12
- Date of initial recognition: 12 July 2013
- Scope of recognition: Testing according to the standards IEC 60945, IEC 61162-1/-2/-450, IEC 62288, IEC 62388 and IEC 62252 Annex E
- Application: Provisions of Environmental, interference and safety testing.

Note: (\*) – The current certificates may be found in the FLI web site (<http://www.furuno-labotech.co.jp>).

## TABLE OF CONTENTS

|                                                                                            |    |
|--------------------------------------------------------------------------------------------|----|
| Report Summary.....                                                                        | 2  |
| Testing Laboratory Status .....                                                            | 3  |
| 1 Principal Information.....                                                               | 5  |
| 1.1 Equipment under test (EUT).....                                                        | 5  |
| 1.2 EUT Operation mode and Performance Check/Test.....                                     | 6  |
| 1.3 Test Conditions.....                                                                   | 7  |
| 1.4 Observation and comments.....                                                          | 7  |
| 1.5 Measurement uncertainties .....                                                        | 8  |
| 2 Test Results Summary .....                                                               | 9  |
| 3 Test Results.....                                                                        | 10 |
| 3.1 Power supply .....                                                                     | 10 |
| 3.1.1 Extreme power supply .....                                                           | 10 |
| 3.1.2 Excessive conditions .....                                                           | 10 |
| 3.2 Dry heat .....                                                                         | 10 |
| 3.2.1 Storage test .....                                                                   | 10 |
| 3.2.2 Functional test .....                                                                | 10 |
| 3.3 Damp heat - Functional test .....                                                      | 10 |
| 3.4 Low temperature .....                                                                  | 10 |
| 3.4.1 Storage test .....                                                                   | 10 |
| 3.4.2 Functional test .....                                                                | 10 |
| 3.5 Vibration.....                                                                         | 10 |
| 3.5.1 EUT attitude/mounting and Test fixture:.....                                         | 10 |
| 3.5.2 Resonance search and Endurance tests .....                                           | 11 |
| 3.6 Antenna Shock .....                                                                    | 11 |
| 3.6.1 EUT attitude/mounting and Test fixture:.....                                         | 11 |
| 3.6.2 Result:.....                                                                         | 11 |
| 3.7 Rain and spray.....                                                                    | 11 |
| 3.8 Corrosion (salt mist) (Not performed) .....                                            | 11 |
| 3.9 Special purpose tests .....                                                            | 11 |
| 3.9.1 Acoustic noise and signals .....                                                     | 11 |
| 3.9.2 Compass safe distance (CSD) .....                                                    | 12 |
| 3.10 Safety precautions .....                                                              | 12 |
| 3.10.1 Protection against accidental access to dangerous voltages.....                     | 12 |
| 3.10.2 Electromagnetic radiofrequency radiation .....                                      | 12 |
| 3.10.3 Emission from visual display unit (VDU) .....                                       | 12 |
| 3.10.4 X-radiation (Not performed).....                                                    | 12 |
| 3.11 Environmental conditions during Testing .....                                         | 13 |
| 4 List of Measuring/Test Instruments .....                                                 | 14 |
| 5 EUT Setup/Test Arrangement .....                                                         | 16 |
| 6 Photographs of Test Setup/Arrangement.....                                               | 17 |
| 7 Temperature/humidity records taken during Dry heat/Damp heat/Low temperature tests ..... | 22 |
| 8 Vibration response plots taken during tests .....                                        | 26 |
| 9 Test results data of the EUT obtained during the climatic tests. ....                    | 31 |

# 1 Principal Information

## 1.1 Equipment under test (EUT)

Configurations of the EUT units:

| No. (*) | Item                            | Type    | Unit serial number | Equipment category | Note                                                                                                                                                          |
|---------|---------------------------------|---------|--------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | Antenna Unit                    |         |                    | Exposed            | TX: 30 kW <sub>pp</sub> ,<br>TX/RX freq.: 3050 MHz<br>Magnetron used: MG5223F<br><br>Used for other than Climatic tests.<br><br>Used only for Climatic tests. |
|         | Transceiver                     | RTR-107 | ---                |                    |                                                                                                                                                               |
|         | Gear Box (with built-in deicer) | RSB-129 | R00005-000004      |                    |                                                                                                                                                               |
|         | Performance Monitor             | PM-52A  | ---                |                    |                                                                                                                                                               |
|         | Antenna Radiator (*1)           | SN36CF  | ---                |                    |                                                                                                                                                               |
| 3       | Antenna Unit                    |         |                    | Protected          | Used only for Climatic tests.                                                                                                                                 |
|         | Transceiver                     | RTR-107 | ---                |                    |                                                                                                                                                               |
|         | Gear Box (with built-in deicer) | RSB-129 | R00005-000001      |                    |                                                                                                                                                               |
|         | Performance Monitor             | PM-52A  | ---                |                    |                                                                                                                                                               |
|         | Antenna Radiator (*1)           | SN36CF  | ---                |                    |                                                                                                                                                               |
| 2       | Power Supply Unit               | PSU-015 | 000003             | Protected          | Used for other than Climatic tests.                                                                                                                           |
| 4       |                                 |         | 000001             |                    | Used only for Climatic tests.                                                                                                                                 |

(\*): Item number(s) is(are) corresponding to the unit(s) shown in Clause 5 “EUT Setup/Test Arrangement” and Clause 6 “Photographs of Test Setup/Arrangement” of this report.

Note (\*1): Antenna Radiator was replaced with Auxiliary Equipment, “Antenna Dummy Load (S-band)” except for “Vibration”, “Antenna shock”, “Rain and Spray”, and “Electromagnetic radio frequency radiation” tests

Size and Mass of the EUT unit(s):

| No. | Name              | Type    | Dimensions<br>(W × H × D, or $\phi$ × H) (mm) | Mass<br>(kg) | Note                                                                                              |
|-----|-------------------|---------|-----------------------------------------------|--------------|---------------------------------------------------------------------------------------------------|
| 1   | Antenna Unit      | ---     | 3795 × 773 × 640                              | 141          | With Performance Monitor, Transceiver, and Gear Box (with built-in deicer), and SN36CF contained. |
| 2   | Power Supply Unit | PSU-015 | 392×147×405                                   | 10           |                                                                                                   |

Configurations of the Associated unit(s) (AU) forming the system except EUT:

| No. (*) | Name           | Type    | Unit serial number | Manufacturer | Note                              |
|---------|----------------|---------|--------------------|--------------|-----------------------------------|
| 1       | Processor Unit | EC-3000 | 4395-1205          | Furuno       | Used only for Rain and spray test |
|         |                |         | 4395-1207          |              |                                   |
| 2       | Monitor Unit   | MU-190  | 001436             | Furuno       | Used only for Rain and spray test |
|         |                |         | 000457             |              |                                   |
| 3       | Monitor Unit   | MU-231  | 002719             | Furuno       |                                   |
| 4       | Control Unit   | RCU-025 | 000169             | Furuno       | Used only for Rain and spray test |
|         |                |         | 000168             |              |                                   |
| 5       | Processor Unit | RPU-013 | 4366-4589          | Furuno       |                                   |
| 6       | Display Unit   | U2412Mb | CN-007H8X-742      | DELL         |                                   |
| 7       | CONTROL UNIT   | RCU-014 | 2-0153             | FEC          |                                   |

(\*): Item number(s) is(are) corresponding to the unit(s) shown in Clause 5 “EUT Setup/Test Arrangement” of this report.

Auxiliary Equipment (AE) used for exercising and/or monitoring the operation and/or the performance of the EUT during testing:

| No.<br>(*) | Name                        | Type           | Unit serial number | Manufacturer | Note                                |
|------------|-----------------------------|----------------|--------------------|--------------|-------------------------------------|
| 1          | Antenna Dummy Load (S-band) | TF300-A        | 85D11              | SANKEN       | Used for other than Climatic tests. |
|            |                             |                | 8210805027009      | SANKEN       |                                     |
| 2          | PC                          | Latitude E5520 | WTV3T A01          | DELL         |                                     |
| 3          | USB Serial Adapter (RS-422) | ESU2-400       | 03064100028        | QUATECH      |                                     |
| 4          | Keyboard                    | TK-FCM007WH    | 28067474           | ELECOM       |                                     |

(\*): Item number(s) is(are) corresponding to the unit(s) shown in Clause 5 “EUT Setup/Test Arrangement” of this report.

Software(s) contained in the EUT, AU:

| No. | Category | Item/Type                 | Program name      | Program number                              | Rev. number | Note                                 |
|-----|----------|---------------------------|-------------------|---------------------------------------------|-------------|--------------------------------------|
| 1   | EUT      | Antenna Unit              | App (SPU MAG)     | 0359281                                     | 01.03       | Used for Climatic tests.             |
|     |          |                           |                   |                                             | 01.03       | Used for other than the above tests. |
|     |          |                           | App (MTR-DRV)     | 0359293                                     | 01.03       |                                      |
|     |          |                           | App(PM)           | 0359296                                     | 01.03       | Used for Climatic tests.             |
|     |          |                           |                   |                                             | 01.03       | Used for other than the above tests. |
| 2   | EUT      | Power Supply Unit PSU-015 | App (PSU-Control) | 0359299                                     | 01.03       | Used for Climatic tests.             |
|     |          |                           |                   |                                             | 01.03       | Used for other than the above tests. |
| 3   | AU       | Processor Unit EC-3000    | App               | 0359266                                     | 02.03       |                                      |
| 6   | AU       | Control Unit RCU-025      | Key1              | 2450086                                     | 01.05       |                                      |
| 7   | AU       | Monitor Unit (19.0-inch)  | Monitor1          | 2651020                                     | 01.03       |                                      |
| 8   | AU       | Monitor Unit (23.1-inch)  | Monitor2          | 2651020                                     | 01.03       |                                      |
| 9   | AU       | Processor Unit            | RPU-013           | 0359204                                     | 03.51       |                                      |
| 10  | AU       | CONTROL UNIT              | RCU-014           | 0359203                                     | 01.04       |                                      |
| 11  | AE       | PC                        | Winiec            | Winexe=14<br>(Feb 27 2013)<br>Winiec.mcr=02 |             |                                      |

EUT documentation used for the tests:

| No. | Item                                                 | Publication no. | Rev. number |
|-----|------------------------------------------------------|-----------------|-------------|
| 1   | Installation Manual                                  | IME-36180       | Z3          |
| 2   | Supplier's specifications for Magnetron type MG5223F | 03S6963         | -1          |

## 1.2 EUT Operation mode and Performance Check/Test

### 1.2.1 EUT Operation mode

Operation state: TX-on.

RANGE: 0.125 NM  
TUNE: AUTO  
GAIN: Manual, 100 (Max)  
A/C SEA: Manual, 0 (Min)  
A/C RAIN: Manual, 0 (Min)  
Range rings: ON  
VRM1,2: ON  
EBL1,2: ON  
Brilliance of all attributes: MAX.

### 1.2.2 Performance Test (PT)

- (1) Radar display on MU-190 and MU-231 (AUs):
  - Noise echo level/area should not change. Radar display should be updated (sweeping).
- (2) Antenna rotation:
  - Antenna should be rotated in a clockwise direction through 360° continuously and automatically with the rotation rate of 40 rpm or more for HSC Radar.
- (3) Tuning indicator:
  - Indicator bar of RX tuning indicator should be 50% or more.
- (4) Sub display:
  - Radar display on Display Unit (AU6) should be displayed and updated (sweeping).
- (5) Own ship's information:
  - Own ship's information should be displayed on MU-190 and MU-231 (AUs).
- (6) Track ball control:
  - Cursor should be moved as intended.
- (7) TT-Test:
  - Target should be tracked and Echo trail functions should be activated as intended.
- (8) Startup:
  - Startup time from Power-ON to the ST-BY state should be 4 min. or less.
- (9) Magnetron:
  - Magnetron current indicated in System monitor should be more than 0 A.

### 1.2.3 Performance Check (PC)

Same as those for PT.

## 1.3 Test Conditions

#### 1.3.1 Normal power supply conditions:

100 VAC, 60 Hz (for "Vibration", "Antenna shock" and "Rain and Spray" tests),  
100 VAC, 60 Hz and 230 VAC, 50 Hz (for CSD test),  
230 VAC, 50 Hz (for the tests other than the above)

#### 1.3.2 Extreme power supply conditions:

Upper extreme conditions:

253 VAC, 52.5 Hz (230 VAC+10 %, 50 Hz+5 %).

Lower extreme conditions:

207 VAC, 47.5 Hz (230 VAC-10 %, 50 Hz-5 %). (\*)

(\*) specified by the customer.

## 1.4 Observation and comments

- (1) Test items to be performed were specified by the customer.  
Test items under IEC 60945 Clause 6, 9, 10, 13, 14, and 15 are separately reported.
- (2) The difference between the Radar Systems of FAR-3230S and FAR-3330S is Display used for each System; MU-190 (19.0-inch) for FAR-3230S, and MU-230 (23.1-inch) for FAR-3330S. For this time, Display was placed as the AU, not the EUT.  
And two Power Supply Units were selectable; PSU-014 for the antenna rotation rate of 24 rpm, and PSU-015 for 42 rpm (HSC). For this time PSU-015 was used for the test. (more current consuming than PSU-014)  
Note: PSU-014 has been already tested with the Radar FAR-3210/-3310/-3220/-3320 systems.

(3) Corrosion (salt mist) test was not performed, because the evidence that the components, materials and finishes employed in the EUT satisfy the test was submitted by the manufacturer.  
(See Furuno Electric Statement CW-038 dated 30 Septe4mebr 2013.)

(4) "Emission from visual display unit (VDU)" test was not applicable, because the EUT had no display devices.

(5) "X-radiation" test was not performed, because the evidence that the Magnetrons employed in the EUT satisfy the test was submitted by the manufacturer.

## 1.5 Measurement uncertainties

| IEC 60945 Clause | Item                                                        | Measurement uncertainty (*)                                  |
|------------------|-------------------------------------------------------------|--------------------------------------------------------------|
| 7                | Power supply                                                |                                                              |
| 7.1              | Extreme power supply:                                       | ----                                                         |
| 7.2              | Excessive conditions:                                       | ----                                                         |
| 8                | Durability and resistance to environmental conditions       |                                                              |
| 8.2              | Dry heat                                                    | ----                                                         |
| 8.2.1            | - Storage test:                                             | Temperature: $\pm 1.5^{\circ}\text{C}$                       |
| 8.2.2            | - Functional test:                                          | Temperature: $\pm 1.5^{\circ}\text{C}$                       |
| 8.3              | Damp heat                                                   |                                                              |
| 8.3.1            | - Functional test:                                          | Temperature: $\pm 1.5^{\circ}\text{C}$ , Humidity: $\pm 4\%$ |
| 8.4              | Low temperature                                             | ----                                                         |
| 8.4.1            | - Storage test:                                             | ----                                                         |
| 8.4.2            | - Functional tests:                                         | Temperature: $\pm 1.5^{\circ}\text{C}$                       |
| 8.7              | Vibration:                                                  | Acceleration: $\pm 2.2 \text{ m/s}^2$                        |
|                  | Shock:                                                      | Acceleration: $\pm 2.2 \text{ m/s}^2$                        |
| 8.8              | Rain and spray:                                             | Delivery rate: $\pm 3.1 \text{ l/min}$ for 100 l/min.        |
| 8.12             | Corrosion:                                                  | ----                                                         |
| 11               | Special purpose tests                                       |                                                              |
| 11.1             | Acoustic noise and signals:                                 | $\pm 2.4 \text{ dB}$                                         |
| 11.2             | Compass safe distance (CSD):                                | $\pm 7.4\%$                                                  |
| 12               | Safety precautions                                          |                                                              |
| 12.1             | Protection against accidental access to dangerous voltages: | Not applicable.                                              |
| 12.2             | Electromagnetic radiofrequency radiation:                   | $\pm 2.3 \text{ dB}$                                         |
| 12.4             | X-radiation:                                                | ----                                                         |

(\*): confidence level = 95%, coverage factor  $k = 2$

| IEC 62388 | Item               | Measurement uncertainty (*)           |
|-----------|--------------------|---------------------------------------|
| 17.3.2    | Antenna shock test | Acceleration: $\pm 2.2 \text{ m/s}^2$ |

(\*): confidence level = 95%, coverage factor  $k = 2$

## 2 Test Results Summary

| IEC 60945<br>Clause | Test Item                                                      | Result             | Test Engineer                                   |
|---------------------|----------------------------------------------------------------|--------------------|-------------------------------------------------|
| 7                   | Power supply                                                   |                    |                                                 |
| 7.1                 | Extreme power supply:                                          | Passed.            | T. Ekawa, and<br>Y. Nakamura.                   |
| 7.2                 | Excessive conditions:                                          | Passed.            | Y. Nakamura                                     |
| 8                   | Durability and resistance to environmental conditions          |                    |                                                 |
| 8.2                 | Dry heat                                                       |                    |                                                 |
| 8.2.1               | - Storage test:                                                | Passed.            | Y. Nakamura                                     |
| 8.2.2               | - Functional test:                                             | Passed.            | Y. Nakamura                                     |
| 8.3.1               | Damp heat - Functional test:                                   | Passed.            | Y. Nakamura                                     |
| 8.4                 | Low temperature                                                |                    |                                                 |
| 8.4.1               | - Storage test:                                                | Not<br>applicable. | ---                                             |
| 8.4.2               | - Functional tests:                                            | Passed.            | T.Ekawa                                         |
| 8.7                 | Vibration:                                                     | Passed.            | R. Ito, F. Ueki, and<br>K. Imamura              |
|                     | Shock:                                                         | Passed.            | R. Ito                                          |
| 8.8                 | Rain and spray:                                                | Passed             | F.Ueki, A.Inoue                                 |
| 8.12                | Corrosion:                                                     | Passed.            | T. Ekawa                                        |
| 11                  | Special purpose tests                                          |                    |                                                 |
| 11.1                | Acoustic noise and signals:                                    | Passed.            | Y. Nakamura                                     |
| 11.2                | Compass safe distance (CSD):                                   | Passed.            | K. Imamura, A. Inoue<br>Y. Nakamura, and R. Ito |
| 12                  | Safety precautions                                             |                    |                                                 |
| 12.1                | Protection against accidental access to<br>dangerous voltages: | Passed.            | Y. Nakamura                                     |
| 12.2                | Electromagnetic radiofrequency radiation:                      | Passed.            | K. Imamura                                      |
| 12.3                | Emission from visual display unit (VDU):                       | Not<br>applicable. | ----                                            |
| 12.4                | X-radiation:                                                   | Not<br>performed.. | Y. Nakamura                                     |

| IEC 62388<br>Clause | Test Item          | Result  | Test Engineer |
|---------------------|--------------------|---------|---------------|
| 17.3.2              | Antenna shock test | Passed. | R. Ito        |

### 3 Test Results

#### 3.1 Power supply

##### 3.1.1 Extreme power supply

| Environment        | Normal power supply    |        | Extreme power supply   |        |
|--------------------|------------------------|--------|------------------------|--------|
| Dry heat           | Performance test (PT)  | Passed | Performance check (PC) | Passed |
| Damp heat          | Performance check (PC) | Passed | ---                    | ---    |
| Low temperature    | Performance test (PT)  | Passed | Performance check (PC) | Passed |
| Normal temperature | Performance test (PT)  | Passed | Performance test (PT)  | Passed |

##### 3.1.2 Excessive conditions

|   | Item                                                                                                                                               | Result  | Description                                                                                          |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------------------------------------------------------------------------------------------------|
| 1 | Against Excessive current:                                                                                                                         | Passed. | 7 A (F2) and 3 A (F1) fuses for both AC lines were activated, and the EUT was protected from damage. |
| 2 | Against Excessive voltage:                                                                                                                         | Passed. | Overvoltage protection circuits were provided in PSU-015. (activated at 290 VAC to 310 VAC)          |
| 3 | When subjected to the input of 300 VAC (> 230 VAC + 10%) of:<br>- reversed polarity (for DC),<br>- improper phase sequence (for AC),<br>for 5 min. | Passed. | No abnormality or damage occurred.                                                                   |

After the tests, PC was successfully performed without errors or abnormality.

#### 3.2 Dry heat

##### 3.2.1 Storage test

For PSU-015,  
Not applicable to "Protected" equipment.

For Antenna unit,  
After the test, PT/PC were performed at the Normal temperature. See Clause 3.2 of this report.

##### 3.2.2 Functional test

See Clause 3.2 of this report.

#### 3.3 Damp heat - Functional test

See Clause 3.2 of this report.

#### 3.4 Low temperature

##### 3.4.1 Storage test

Not applicable to "Exposed", "Protected" equipment.

##### 3.4.2 Functional test

See Clause 3.2 of this report.

#### 3.5 Vibration

##### 3.5.1 EUT attitude/mounting and Test fixture:

| Unit                                       | Attitude/mounting | Test fixture          |
|--------------------------------------------|-------------------|-----------------------|
| Power Supply Unit<br>PSU-015               | Table-top         | No.45(*)              |
|                                            | Wall-mounting     | No.35(*) and No.63(*) |
| Antenna Unit<br>RSB-129 + RTR-107 + SN36CF | Table-top         | No. 9 (*)             |

(\*): prepared by FLI.

### 3.5.2 Resonance search and Endurance tests

Position of Vibration Pick-up Sensors and Directions of Vibration: See Clause 6 of this report.

| Unit                                             | Vibration Direction | Resonance detected |                                  |                   | Endurance test performed at freq. (Hz) | Results | Note |
|--------------------------------------------------|---------------------|--------------------|----------------------------------|-------------------|----------------------------------------|---------|------|
|                                                  |                     | Freq. (Hz)         | Acceleration (m/s <sup>2</sup> ) | Magnitude ratio Q |                                        |         |      |
| PSU-015<br>Table-top                             | X (left/right)      | 100.0              | 9.2                              | 1.3               | 100.0                                  | Passed. |      |
|                                                  | Y (back/forth)      | 100.0              | 13.1                             | 1.9               | 100.0                                  | Passed. |      |
|                                                  | Z (up/down)         | 68.6               | 31.6                             | 4.5               | 68.6                                   | Passed. |      |
| PSU-015<br>Wall-mounting                         | X (left/right)      | 100.0              | 7.9                              | 1.1               | 100.0                                  | Passed. |      |
|                                                  | Y (back/forth)      | 75.0               | 25.5                             | 3.6               | 75.0                                   | Passed. |      |
|                                                  | Z (up/down)         | 100.0              | 17.9                             | 2.6               | 100.0                                  | Passed. |      |
| Antenna Unit<br>RSB-129 +<br>RTR-107 +<br>SN36CF | X (left/right)      | 39.6               | 25.2                             | 3.6               | 39.6                                   | Passed. |      |
|                                                  | Y (back/forth)      | 59.0               | 23.1                             | 3.3               | 59.0                                   | Passed. |      |
|                                                  | Z (up/down)         | 96.2               | 9.2                              | 1.3               | 96.2                                   | Passed. |      |

There was no damage, or degradation of performance during and after the tests.

## 3.6 Antenna Shock

### 3.6.1 EUT attitude/mounting and Test fixture:

| Unit                                       | Attitude/mounting | Test fixture |
|--------------------------------------------|-------------------|--------------|
| Antenna Unit<br>RSB-129 + RTR-107 + SN36CF | Table-top         | No. 9 (*)    |

(\*): prepared by FLI.

### 3.6.2 Result:

| Unit                                       | Test conditions                                                                                          | Results |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------|---------|
| Antenna Unit<br>RSB-129 + RTR-107 + SN36CF | Acceleration: 100 m/s <sup>2</sup><br>Duration: 25 ms<br>Number of shocks: Three<br>Direction: Z -upward | Passed. |

There was no damage, or degradation of performance during and after the tests.

## 3.7 Rain and spray

| Unit                                       | Results     |
|--------------------------------------------|-------------|
| Antenna Unit<br>RSB-129 + RTR-107 + SN36CF | Passed. (*) |

(\*): Ingress of water was found at a part of the bottom (near the drain hole) of the enclosure, but there was no damage or degradation of performance during and after the test. There were no water drops found on the rubber gaskets of the enclosure side covers.

## 3.8 Corrosion (salt mist) (Not performed)

Not performed. See Clause 1.4 of this report.

## 3.9 Special purpose tests

### 3.9.1 Acoustic noise and signals

| Unit    | Acoustic noise pressure (dB (A))   |                |                | Limits                                |                                      |
|---------|------------------------------------|----------------|----------------|---------------------------------------|--------------------------------------|
|         | EUT powered off (Background noise) | EUT powered on | Alarm: on (*)  | Acoustic noise power (pressure) dB(A) | Audible alarm power (pressure) dB(A) |
| PSU-015 | 30 or under.                       | 51.8           | Not applicable | ≤ 60                                  | 75 to 85                             |

Note: (\*) The EUT had no audible alarm function or level control.

The tests to Antenna Unit were not applicable, because the unit was intended not to be installed in wheelhouses or bridge wings.

### 3.9.2 Compass safe distance (CSD)

#### Test Conditions:

- (1) with EUT powered-off in the received condition,
- (2) with EUT powered-off after normalization,
- (3) with EUT powered-on (100 VAC and 230 VAC).

#### Results:

| Unit                                          | CSD for Standard compass (m) | CSD for Steering compass (m) | CSD Marking              | Test conditions that the worst measured results were obtained |
|-----------------------------------------------|------------------------------|------------------------------|--------------------------|---------------------------------------------------------------|
| Antenna Unit<br>RSB-129 + RTR-107<br>+ SN36CF | 3.05                         | 1.90                         | Described in the manual. | (1)                                                           |
| PSU-015                                       | 1.45                         | 0.90                         | Described in the manual. | (3) 100 VAC.                                                  |

Normalization was done at about 23 m apart from the CSD test site.

## 3.10 Safety precautions

### 3.10.1 Protection against accidental access to dangerous voltages

| IEC 60945 Clause | Requirement                                                                                                                                                                                                                                                        | Result  | Note                                                                                               |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----------------------------------------------------------------------------------------------------|
| 4.6.1/12.1       | There shall be no openings of the enclosure of the EUT to allow access to hazardous parts with the access probe (test finger), or there shall be adequate clearance between the access probe and hazardous parts.                                                  | Passed. | Dangerous voltages were provided in the EUT, but there were no openings to allow with test finger. |
|                  | All parts and wiring in the EUT shall be isolated automatically from all sources of electrical energy when protective covers are removed. Alternatively any further access to the interior of the EUT shall be only possible by means of a spanner or screwdriver. | Passed. | Screw driver needed.                                                                               |
|                  | Warning labels shall be prominently displayed both within the EUT and on protective covers.                                                                                                                                                                        | Passed. | Warning label provided on the protective cover.                                                    |
|                  | Means shall be provided for earthing exposed metallic parts of the EUT, but this shall not cause any terminal of the source of electrical energy to be earthed.                                                                                                    | Passed. | Earth terminal provided.                                                                           |

### 3.10.2 Electromagnetic radiofrequency radiation

| Unit                                       | Distance to 100 W/m <sup>2</sup> (m) | Distance to 50 W/m <sup>2</sup> (m) | Distance to 10 W/m <sup>2</sup> (m) |
|--------------------------------------------|--------------------------------------|-------------------------------------|-------------------------------------|
| Antenna Unit<br>RSB-129 + RTR-107 + SN36CF | Not detected.                        | 0.5                                 | 4.6                                 |

Note: According to the results of the pre-tests performed with the radar pulse types of Short 1, Short 2, Middle 1, Middle 2, Middle 3, and Long, final tests were performed with Long pulse type (longest distance).

### 3.10.3 Emission from visual display unit (VDU)

Not applicable. The EUT had no display devices.

### 3.10.4 X-radiation (Not performed)

The test was waived according to the evidence submitted by the manufacture.

### 3.11 Environmental conditions during Testing

| IEC 60945 Clause | Item                                                        | Date of test    | Temperature, humidity (Before-test to After-test)       | Power supply voltage (Before-test to After-test)                                     |
|------------------|-------------------------------------------------------------|-----------------|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 7                | Power supply                                                |                 |                                                         |                                                                                      |
| 7.1              | Extreme Power supply:                                       | 12 July 2009    | 26 °C to 26 °C, 62 % to 65 %RH                          | 207.0 VAC, 50.0 Hz to 207.0 VAC, 50.0 Hz<br>253.0 VAC, 50.0 Hz to 253.0 VAC, 50.0 Hz |
|                  |                                                             | 13 July 2009    | 27 °C to 26 °C, 70 % to 65 %RH                          | 207.0 VAC, 50.0 Hz to 207.0 VAC, 50.0 Hz<br>253.0 VAC, 50.0 Hz to 253.0 VAC, 50.0 Hz |
|                  |                                                             | 15 July 2009    | 27 °C to 26 °C, 63 % to 58 %RH                          | 207.0 VAC, 50.0 Hz to 207.0 VAC, 50.0 Hz<br>253.0 VAC, 50.0 Hz to 253.0 VAC, 50.0 Hz |
| 7.2              | Excessive conditions tests                                  | 1 August 2013   | 25°C to 25°C, 57% to 57%RH                              | 230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz                                             |
| 8                | Durability and resistance to environmental conditions       |                 |                                                         |                                                                                      |
| 8.2              | Dry heat                                                    | ----            | ----                                                    | ----                                                                                 |
| 8.2.1            | - Storage test:                                             | 15 July 2013    | 27 °C to 26 °C, 63 % to 58 %RH                          | 230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz                                             |
| 8.2.2            | - Functional test:                                          | 13 July 2013    | 27 °C to 26 °C, 70 % to 65 %RH                          | 230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz                                             |
| 8.3.1            | Damp heat- Functional test:                                 | 14 July 2013    | 27 °C to 27 °C, 63 % to 63 %RH                          | 230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz                                             |
| 8.4              | Low temperature                                             |                 |                                                         |                                                                                      |
| 8.4.1            | - Storage test:                                             | Not applicable. | ----                                                    | ----                                                                                 |
| 8.4.2            | - Functional tests:                                         | 12 July 2013    | 26 °C to 26 °C, 62% to 65%RH                            | 230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz                                             |
| 8.7              | Vibration:                                                  | 22 July 2013    | 26°C to 25°C, 62% to 54%RH                              | 101.2 VAC, 60.0 Hz to 100.6 VAC, 60.0 Hz                                             |
|                  |                                                             | 23 July 2013    | 26°C to 26°C, 62% to 55%RH                              | 102.0 VAC, 60.0 Hz to 101.8 VAC, 60.0 Hz                                             |
|                  |                                                             | 24 July 2013    | 26°C to 26°C, 62% to 55%RH                              | 101.0 VAC, 60.0 Hz to 101.8 VAC, 60.0 Hz                                             |
| 8.8              | Rain and spray:                                             | 20 August 2013  | 34°C to 35°C, 62% to 57%RH<br>Water temp.: 34°C to 34°C | 101.0 VAC, 60.0 Hz to 100.2 VAC, 60.0 Hz                                             |
| 8.12             | Corrosion:                                                  | Not performed.  | ----                                                    | ----                                                                                 |
| 11               | Special purpose tests                                       |                 |                                                         |                                                                                      |
| 11.1             | Acoustic noise and signals:                                 | 31 July 2013    | 24°C to 24°C, 54% to 54%RH.                             | 230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz                                             |
| 11.2             | Compass safe distance (CSD):                                | 24 July 2013    | 25°C to 25°C, 61% to 61%RH.                             | 230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz<br>100.0 VAC, 60.0 Hz to 100.0 VAC, 60.0 Hz |
|                  |                                                             | 13 August 2013  | 25°C to 25°C, 61% to 61%RH.                             | 230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz<br>100.0 VAC, 60.0 Hz to 100.0 VAC, 60.0 Hz |
| 12               | Safety precautions                                          |                 |                                                         |                                                                                      |
| 12.1             | Protection against accidental access to dangerous voltages: | 1 August 2013   | 25°C to 25°C, 57% to 57%RH.                             | No power supply.                                                                     |
| 12.2             | Electromagnetic radiofrequency radiation:                   | 7 August 2013   | 23°C to 23°C, 67% to 67%RH.                             | 230.0 VAC, 50.0 Hz to 230.0 VAC, 50.0 Hz                                             |
| 12.3             | Emission from visual display unit (VDU):                    | Not applicable. | ----                                                    | ----                                                                                 |
| 12.4             | X-radiation measurement:                                    | Not performed   | ----                                                    | ----                                                                                 |

| IEC 62388 Clause | Item          | Date of test | Temperature, humidity (Before-test to After-test) | Power supply voltage (Before-test to After-test) |
|------------------|---------------|--------------|---------------------------------------------------|--------------------------------------------------|
| 17.3.2           | Antenna shock | 23 July 2013 | 26°C to 26°C, 62% to 55%RH                        | 101.0 VAC, 60.0 Hz to 101.1 VAC, 60.0 Hz         |

## 4 List of Measuring/Test Instruments

Measuring/Test instruments have been appropriately calibrated/maintained according to the FLI programs/procedures and ISO/IEC 17025. Measuring/Test instruments used for the tests are listed below.

### 4.1 Dry heat/Damp heat/Low temperature

| (*) | C/N   | Instrument                                                       | Type         | S/N            | Manufacturer |
|-----|-------|------------------------------------------------------------------|--------------|----------------|--------------|
| --  | HT370 | Climatic chamber (L)                                             | TBE-3HW5GE2F | 3013000995     | Tabai Espec  |
| --  | HT723 | Paperless recorder/Dual communication logger<br>DAQSTATION FX100 | FX106-4-1    | S5JA01445      | Yokogawa     |
| --  | HT415 | Climatic chamber (S)                                             | PL-4KP       | 14004204       | Tabai Espec  |
| --  | HT724 | Paperless recorder/Dual communication logger<br>DAQSTATION FX100 | FX106-4-1    | S5JA01450      | Yokogawa     |
| X   | HT510 | Climatic chamber (Hama-L)                                        | TBE-3HW4PE2F | 3013002540     | Tabai Espec  |
| X   | HT725 | Paperless recorder/Dual communication logger<br>DAQSTATION FX100 | FX106-4-1    | S5JA01447      | Yokogawa     |
| --  | HT364 | Climatic/Air pressure chamber (Hama-AL)                          | MZH-21HS     | 581989         | Tabai Espec  |
| --  | HT161 | Temperature recorder (Hama-AL)                                   | μR180        | 4177WA303      | Yokogawa     |
| X   | HT414 | Climatic chamber (Hama-S)                                        | PL-4KP       | 14004203       | Tabai Espec  |
| X   | HT726 | Paperless recorder/Dual communication logger<br>DAQSTATION FX100 | FX106-4-1    | S5JA01448      | Yokogawa     |
| --  | HT446 | Programmable AC power supply                                     | 4420/4471    | 306043-4420024 | NF           |
| X   | HT434 | AC/DC power supply                                               | PCR2000L     | BB002789       | Kikusui      |
| --  | HT431 | DC Power Supply                                                  | PAN55-20     | AK003303       | Kikusui      |
| --  | HT432 | DC power supply                                                  | PAN55-20     | AK003307       | Kikusui      |
| X   | HT462 | Digital Multimeter                                               | 111          | 7812001        | Fluke        |

(\*): X – indicates instruments used for the tests, -- – not used.

### 4.2 Vibration

| (*) | C/N   | Instrument                           | Type       | S/N      | Manufacturer | Note                                    |
|-----|-------|--------------------------------------|------------|----------|--------------|-----------------------------------------|
| X   | HT562 | Vibration test system (3.5-ton type) | G-0235LS   | SG-4420  | Shinken      | Used for Antenna Unit.                  |
| X   | HT367 | Vibration test system (2.0-ton type) | VS-2000-20 | S-4798   | IMV          | Used for PSU-015<br>wall-mounting.      |
| X   | HT373 | Vibration test system (0.6-ton type) | VS-600-140 | 212540   | IMV          | Used for PSU-015<br>table-top mounting. |
| --  | HT439 | Pickup sensor                        | VP-15      | 2325T    | IMV          |                                         |
| X   | HT577 | Pickup sensor <b>(Reference)</b>     | V11-101S   | 0522     | Shinken      | Used for PSU-015.                       |
| --  | HT578 | Pickup sensor                        | V11-101S   | 0521     | SHINKEN      |                                         |
| X   | HT661 | Pickup sensor <b>(Reference)</b>     | V11-101S   | 1112     | Shinken      | Used for Antenna Unit.                  |
| X   | HT662 | Pickup sensor <b>(Response)</b>      | VP-15      | 0025U    | IMV          | Used for PSU-015.                       |
| X   | HT663 | Pickup sensor <b>(Response)</b>      | VP-15      | 0026U    | IMV          | Used for Antenna Unit.                  |
| --  | HT434 | AC/DC Power Supply                   | PCR2000L   | BB002789 | Kikusui      |                                         |
| --  | HT431 | DC Power Supply                      | PAN55-20   | AK003303 | Kikusui      |                                         |
| X   | HT462 | Digital Multimeter                   | 111        | 78120001 | Fluke        |                                         |
| --  | HT430 | DC Power supply                      | PAD55-20L  | 10091786 | Kikusui      |                                         |

(\*): X – indicates instruments used for the tests, -- – not used.

### 4.3 Antenna Shock

| (*) | C/N   | Instrument                           | Type       | S/N      | Manufacturer |
|-----|-------|--------------------------------------|------------|----------|--------------|
| X   | HT562 | Vibration test system (3.5-ton type) | G-0235LS   | SG-4420  | Shinken      |
| --  | HT367 | Vibration test system (2.0-ton type) | VS-2000-20 | S-4798   | IMV          |
| --  | HT373 | Vibration test system (0.6-ton type) | VS-600-140 | 212540   | IMV          |
| --  | HT439 | Pickup sensor                        | VP-15      | 2325T    | IMV          |
| --  | HT577 | Pickup sensor                        | V11-101S   | 0522     | Shinken      |
| --  | HT578 | Pickup sensor                        | V11-101S   | 0521     | SHINKEN      |
| X   | HT661 | Pickup sensor <b>(Reference)</b>     | V11-101S   | 1112     | Shinken      |
| --  | HT662 | Pickup sensor                        | VP-15      | 0025U    | IMV          |
| --  | HT663 | Pickup sensor <b>(Response)</b>      | VP-15      | 0026U    | IMV          |
| --  | HT434 | AC/DC Power Supply                   | PCR2000L   | BB002789 | Kikusui      |
| --  | HT431 | DC Power Supply                      | PAN55-20   | AK003303 | Kikusui      |
| X   | HT462 | Digital Multimeter                   | 111        | 78120001 | Fluke        |
| --  | HT430 | DC Power supply                      | PAD55-20L  | 10091786 | Kikusui      |

(\*): X – indicates instruments used for the tests, -- – not used.

#### 4.4 Rain and Spray

| (*) | C/N   | Instrument                    | Type  | S/N      | Manufacturer |
|-----|-------|-------------------------------|-------|----------|--------------|
| X   | HT587 | Liquid flow meter (Area type) | SPG-1 | 050278   | NFC          |
| X   | HT584 | Rain test set for IPX6        | IPX6  | 05-001   | FLI          |
| X   | HT689 | Digital Multimeter            | 115   | 10821185 | Fluke        |

(\*): X – indicates instruments used for the tests, -- – not used.

#### 4.5 Special purpose tests

##### 4.5.1 Acoustic noise and signals

| (*) | C/N   | Instrument                      | Type      | S/N                     | Manufacturer |
|-----|-------|---------------------------------|-----------|-------------------------|--------------|
| --  | HT453 | Sound level meter               | VS-3701A  | 66645                   | Panasonic    |
| X   | HT702 | Sound level meter               | 556A      | 935983                  | Testo        |
| --  | HT177 | Screened room                   | USC-26    | D-003                   | USC          |
| --  | HT164 | Digital multimeter              | E2378A    | 2943J06324              | HP           |
| --  | HT173 | DC power supply                 | GP035-30R | 1014397082              | Takasago     |
| X   | HT779 | Semi-Anechoic chamber           | 10mAC     | 90984                   | TOKIN        |
| X   | HT780 | Programmable AC/DC Power Supply | ES18000W  | 9128767-1+<br>9128767-2 | NF           |
| X   | HT687 | Digital multimeter              | 115       | 10821183                | FLUKE        |

(\*): X – indicates instruments used for the tests, -- – not used.

##### 4.5.2 Compass safe distance (CSD)

| (*) | C/N   | Instrument                   | Type      | S/N            | Manufacturer |
|-----|-------|------------------------------|-----------|----------------|--------------|
| X   | HT433 | 3-axis Magnetic field meter  | HM-310NR  | 003111         | MTI          |
| X   | HT189 | Helmholtz coil               | 2X2M-10T  | 0001           | TSJ          |
| --  | HT157 | Programmable AC power supply | 8461      | 209648         | NF           |
| --  | HT446 | Programmable AC power supply | 4420/4471 | 306043-4420024 | NF           |
| --  | HT432 | DC power supply              | PAN55-20  | AK003307       | Kikusui      |
| X   | HT434 | AC power supply              | PCR2000L  | BB002789       | Kikusui      |
| X   | HT432 | DC power supply              | PAN55-20  | AK003307       | Kikusui      |

(\*): X – indicates instruments used for the tests, -- – not used.

#### 4.6 Safety precautions

##### 4.6.1 Protection against accidental access to dangerous voltages

| (*) | C/N   | Instrument          | Type    | S/N   | Manufacturer |
|-----|-------|---------------------|---------|-------|--------------|
| X   | HT435 | Jointed test finger | P-10.09 | D-008 | EXCEL        |


(\*): X – indicates instruments used for the tests, -- – not used.

##### 4.6.2 Electromagnetic radio frequency radiation

| (*) | C/N   | Instrument         | Type        | S/N            | Manufacturer |
|-----|-------|--------------------|-------------|----------------|--------------|
| X   | HT590 | RF Radiation meter | EMR-300/33C | AY-0029/F-0021 | Narda        |

(\*): X – indicates instruments used for the tests, -- – not used.

(Large Chamber)

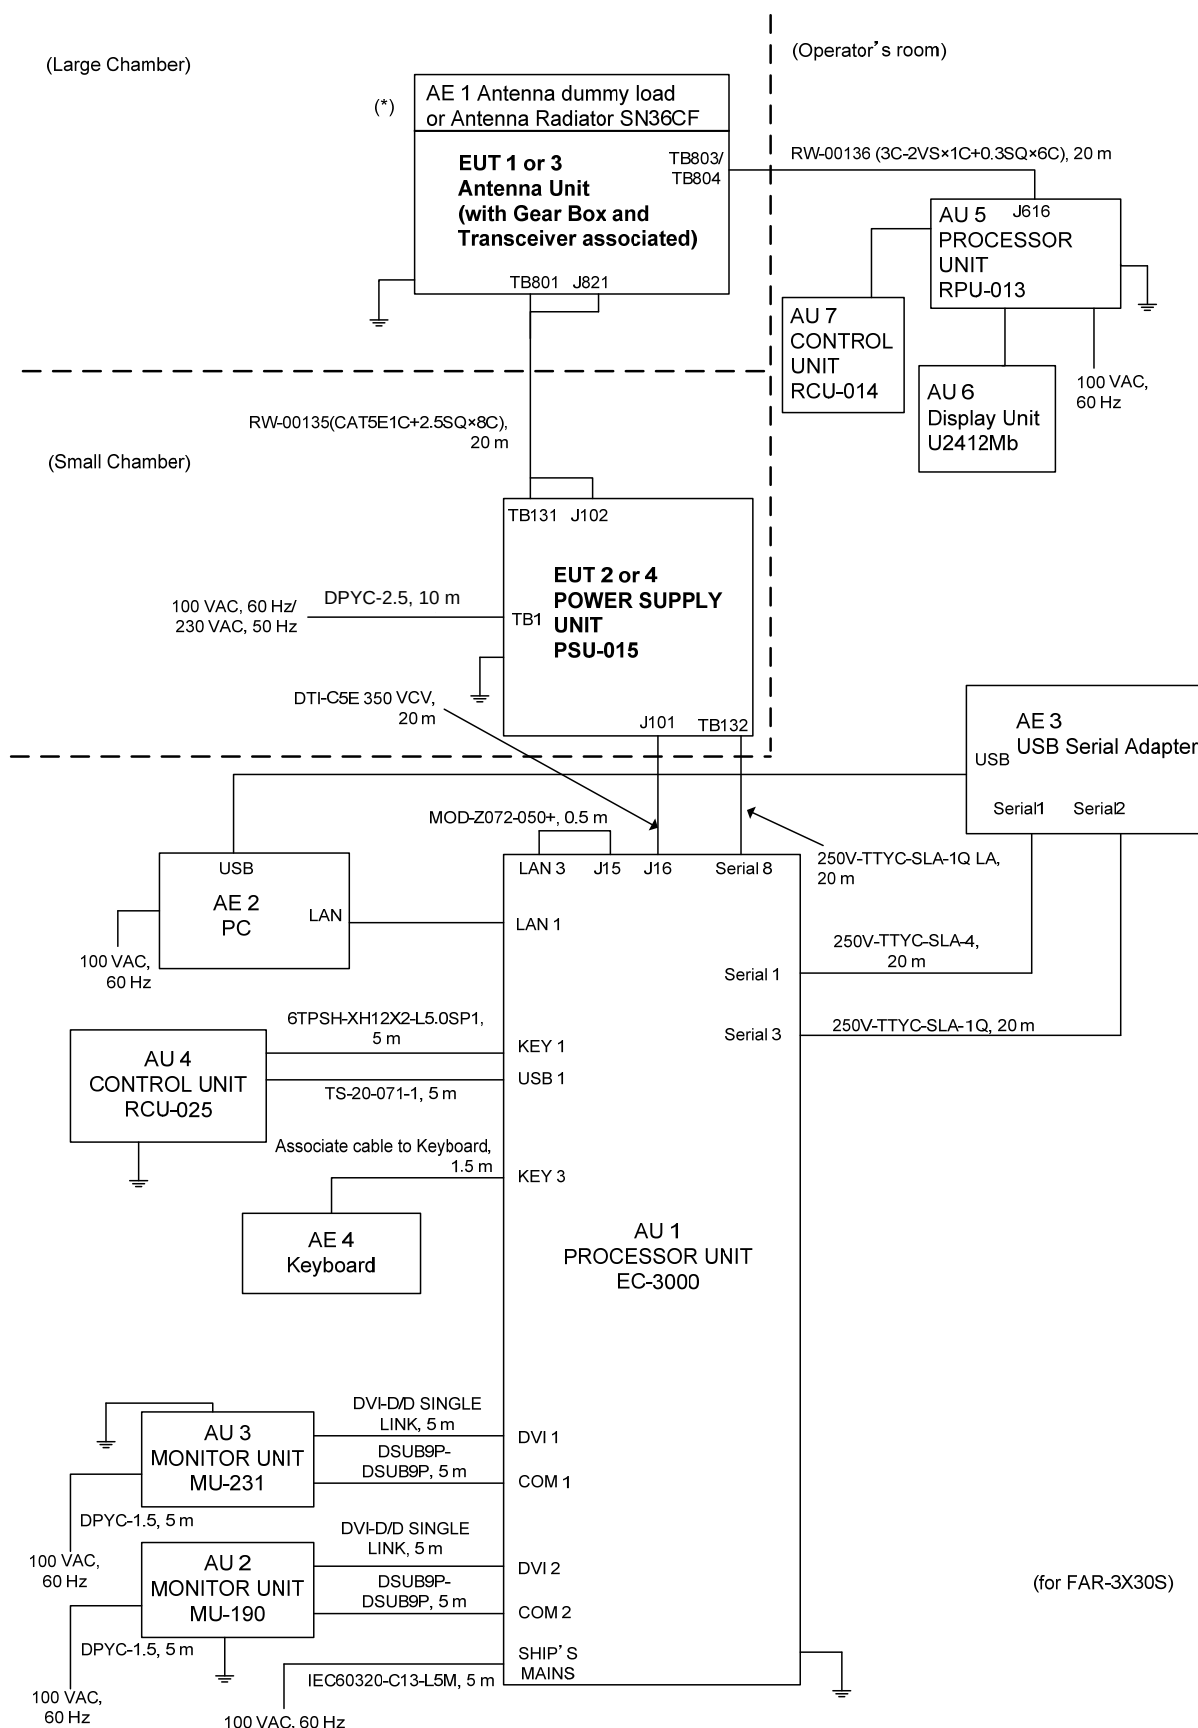


(\*) - Antenna radiator was used for Vibration, Antenna shock, Rain and spray, and Electromagnetic RF radiation tests.


## 6 Photographs of Test Setup/Arrangement

### 6.1 Dry heat/Damp heat/Low temperature

For Antenna Unit,

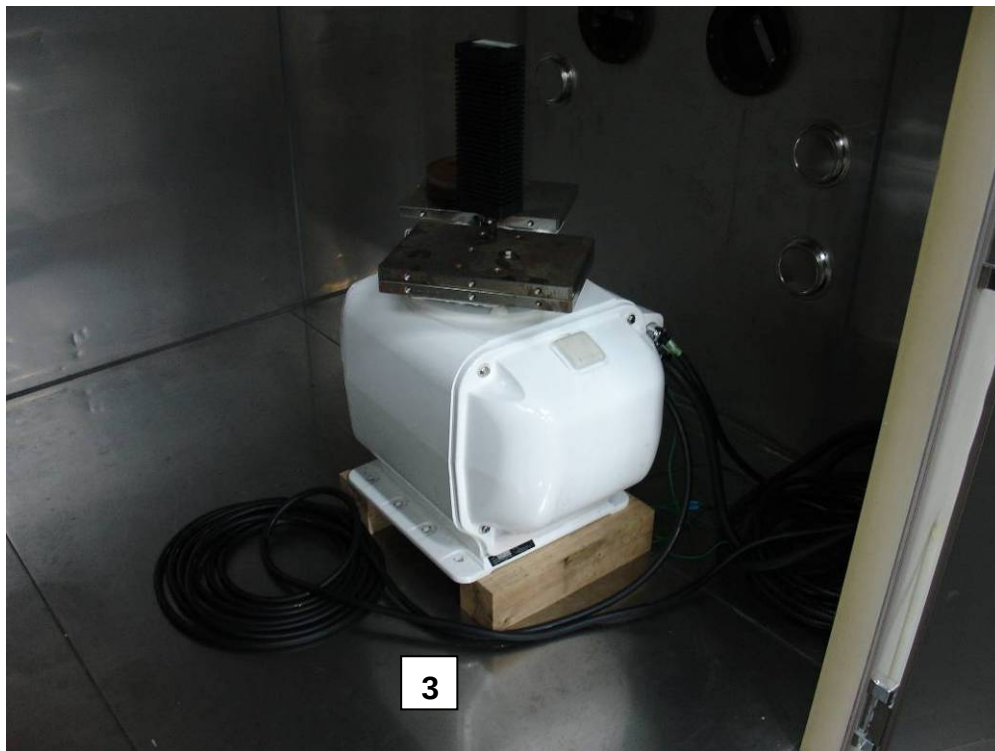

For PSU-015,

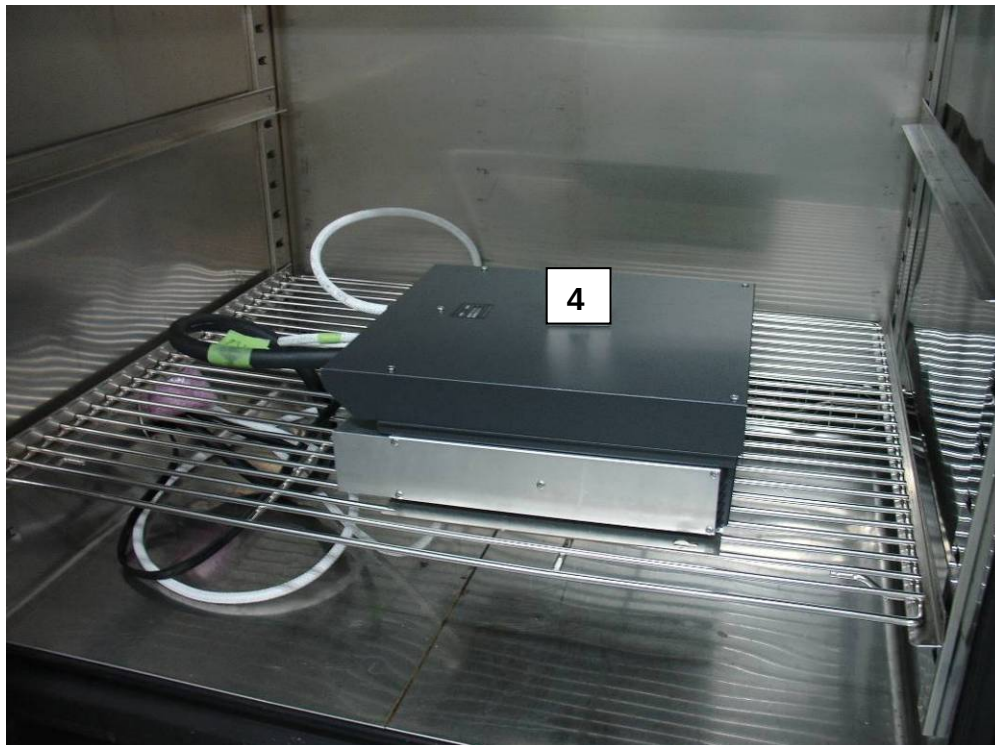


## 6.2 Vibration

Antenna Unit (RSB-129 + RTR-107 + SN36CF),




PSU-015 (Table-top mounting),

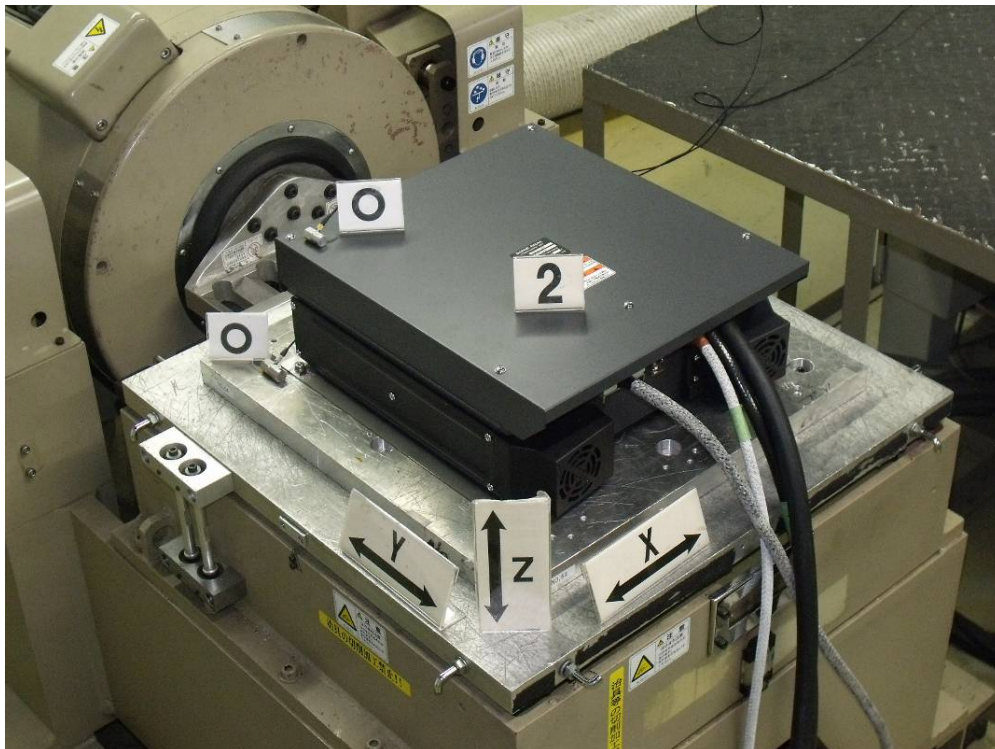

Note: ○ - Pick-up sensor, ↔ - Vibration direction

PSU-015 (Wall-mounting),

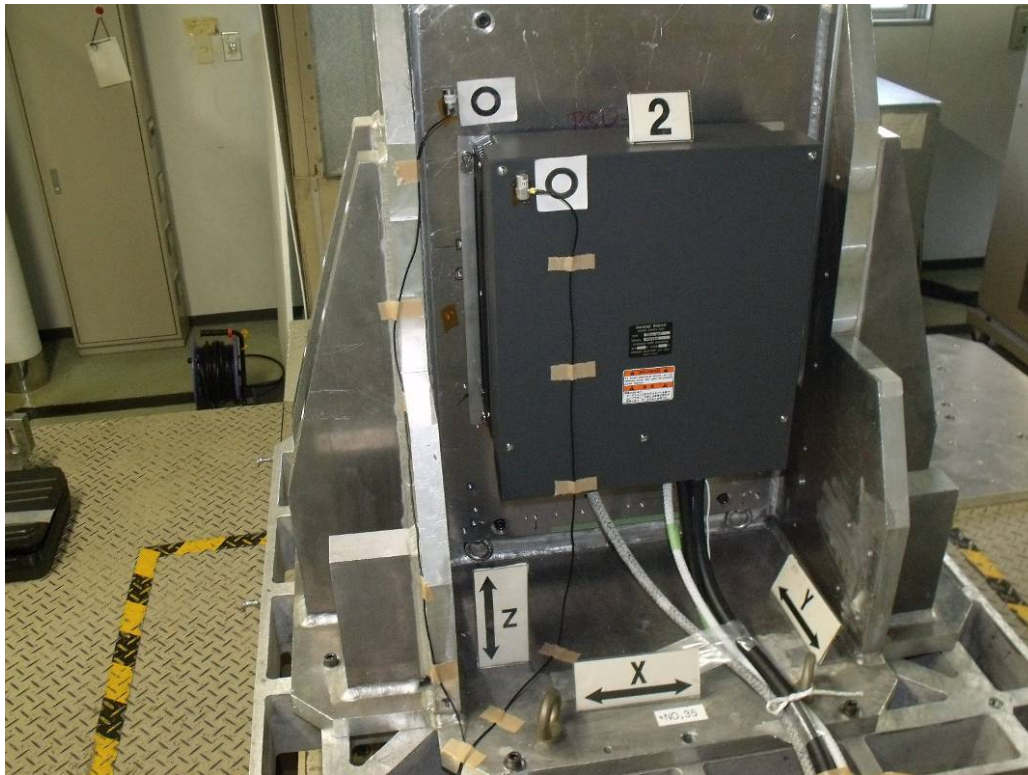

Note: O - Pick-up sensor,  $\leftrightarrow$  - Vibration direction

## 6.3 Antenna shock



## 6.4 Rain and spray

For Antenna Unit (RSB-129 + RTR-107 + SN36CF),  
 Test Setup,



Spraying,




## Photographs of the internal examinations done after the test


With the side covers opened, (no ingress of water found on rubber gaskets)



Internal side of the EUT, (no ingress of water found)

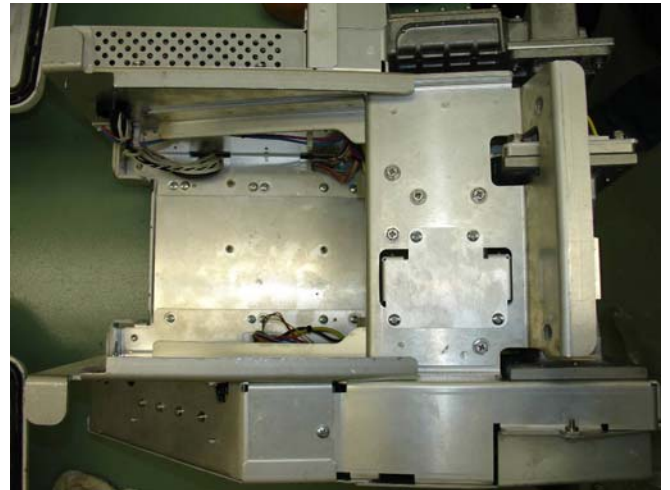


Bottom of the enclosure (ingress of water found. Water drop areas are indicated with yellow circles)

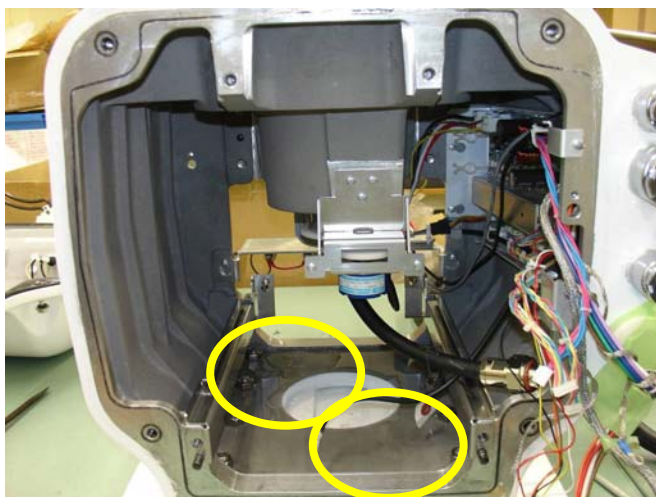

## 7 Temperature/humidity records taken during Dry heat/Damp heat/Low temperature tests


### 7.1 Dry heat - Storage,

For Antenna Unit (RSB-129 + RTR-107),

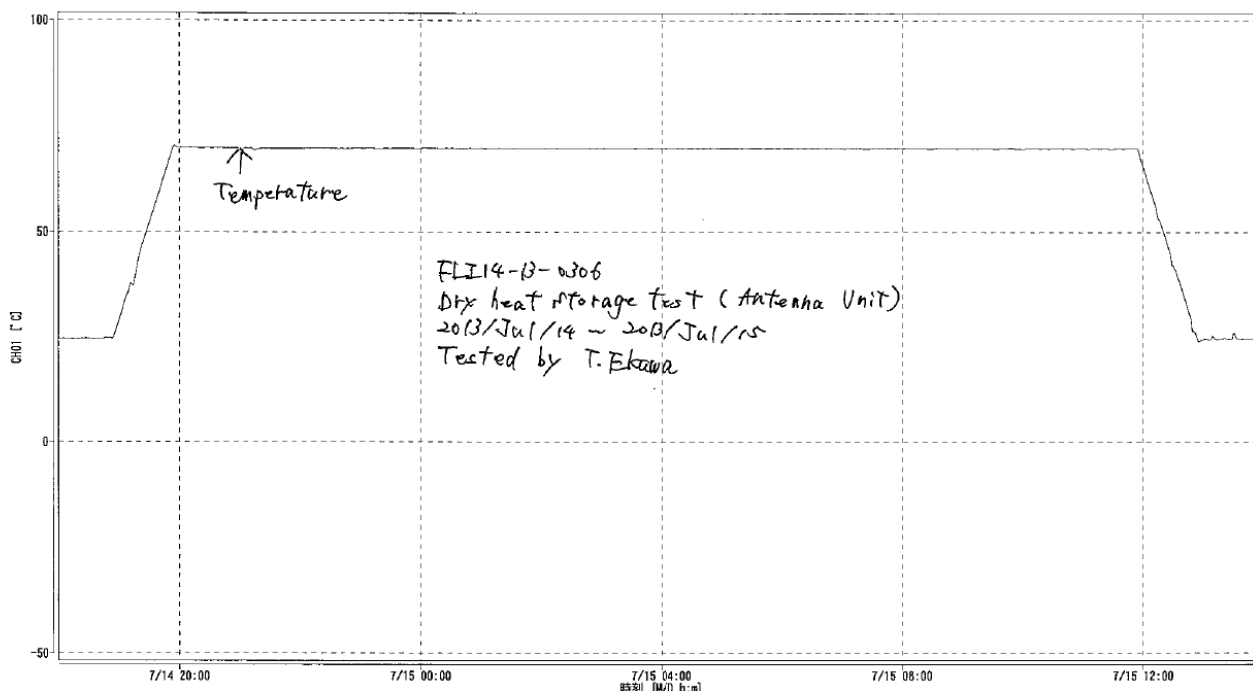


### 7.2 Dry heat - Functional,

For Antenna Unit (RSB-129 + RTR-107),

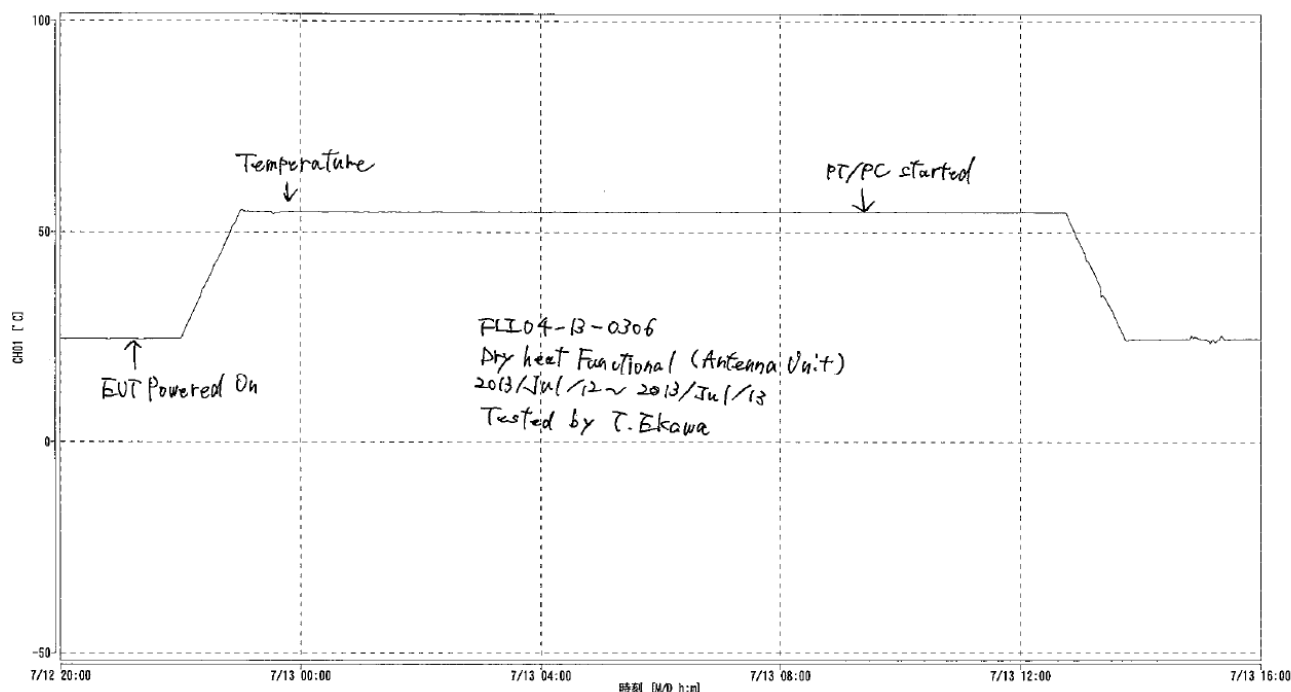


For PSU-015,

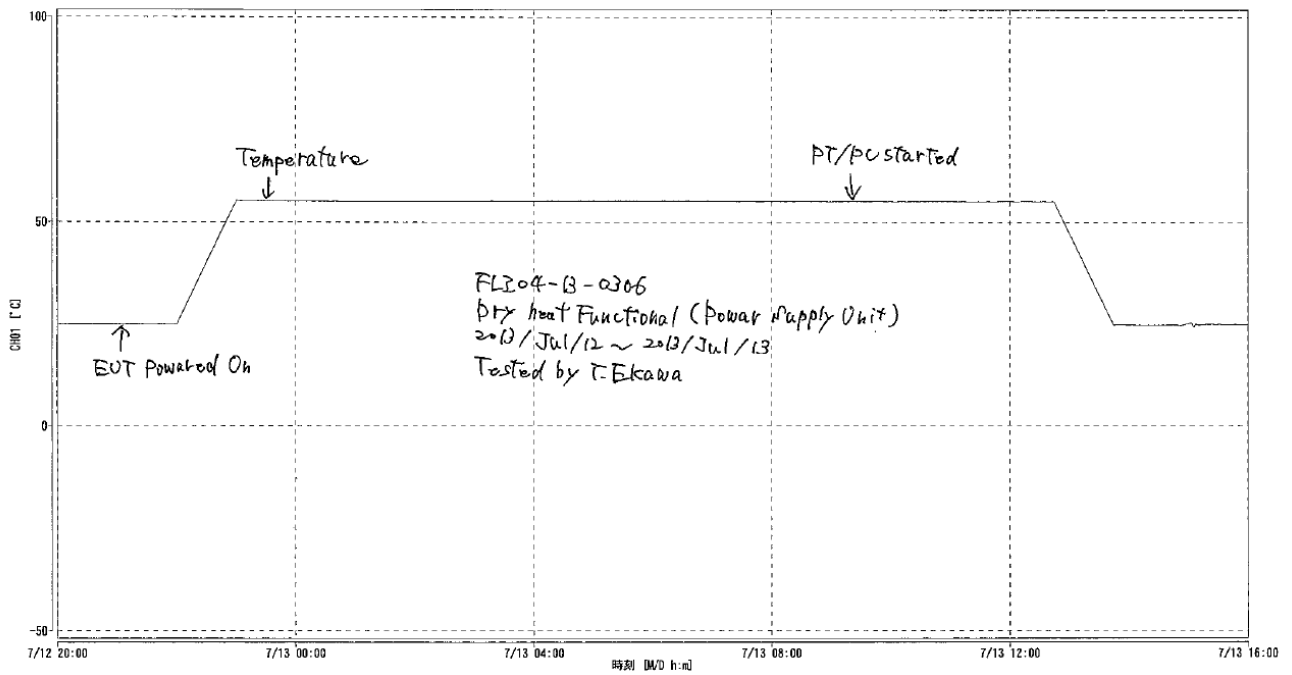


### 7.3 Damp heat,

For Antenna Unit (RSB-129 + RTR-107),

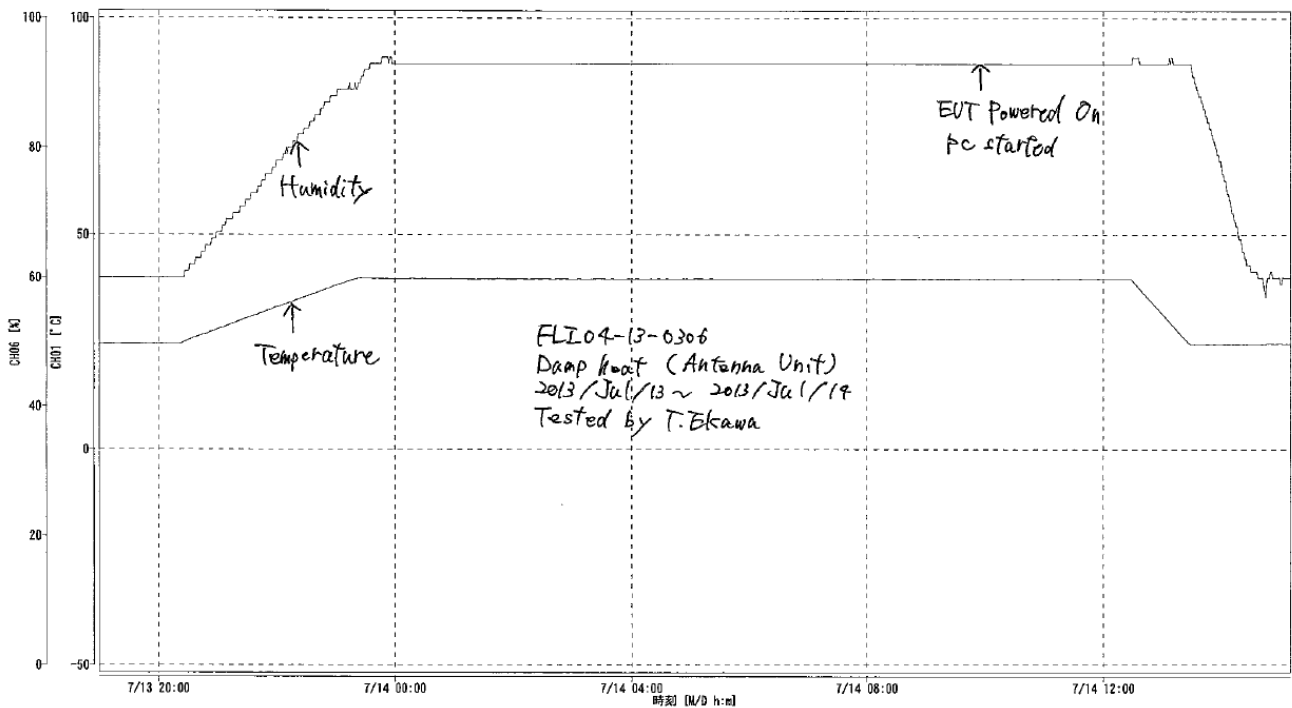


For PSU-015,

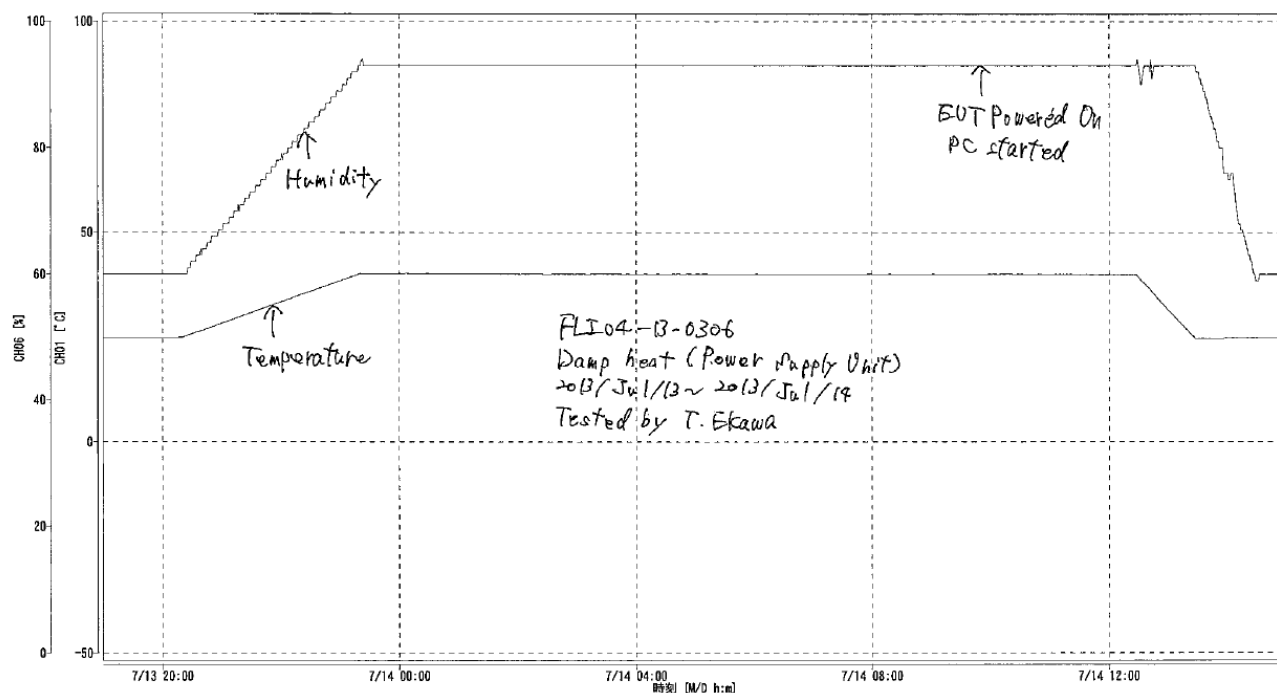


#### 7.4 Low temperature - Functional,

For Antenna Unit (RSB-129 + RTR-107),

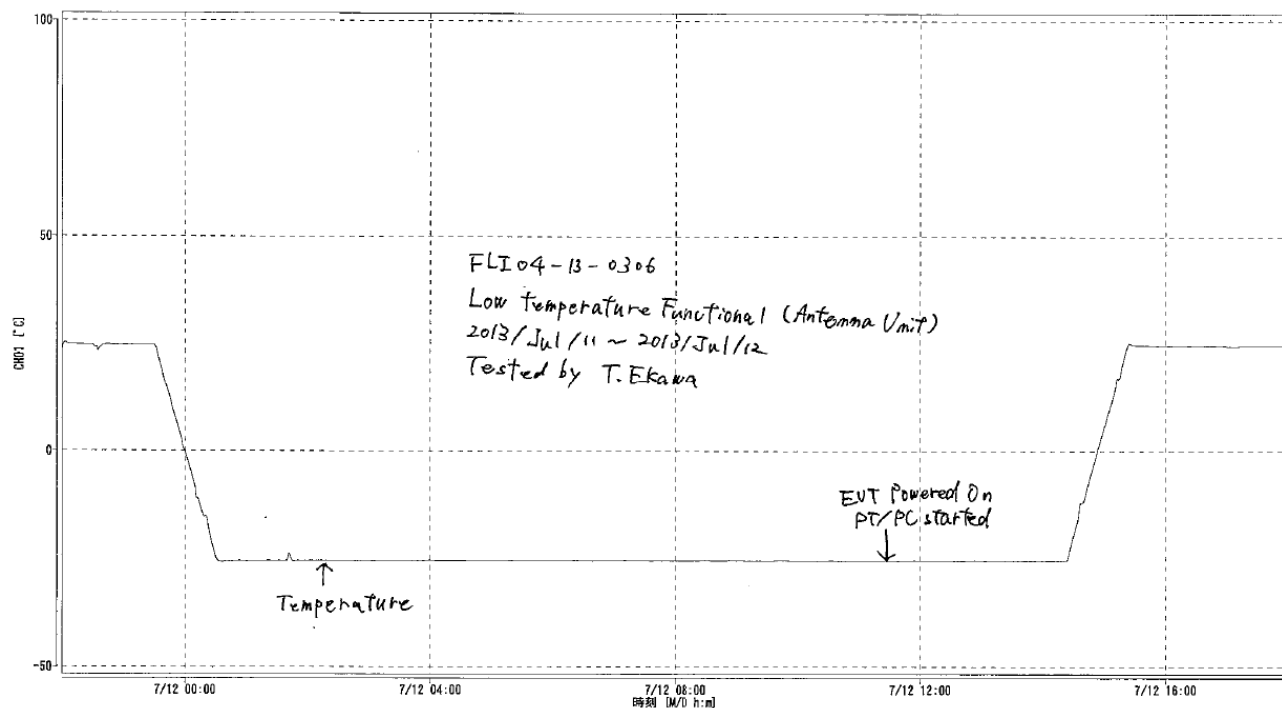



For PSU-015,

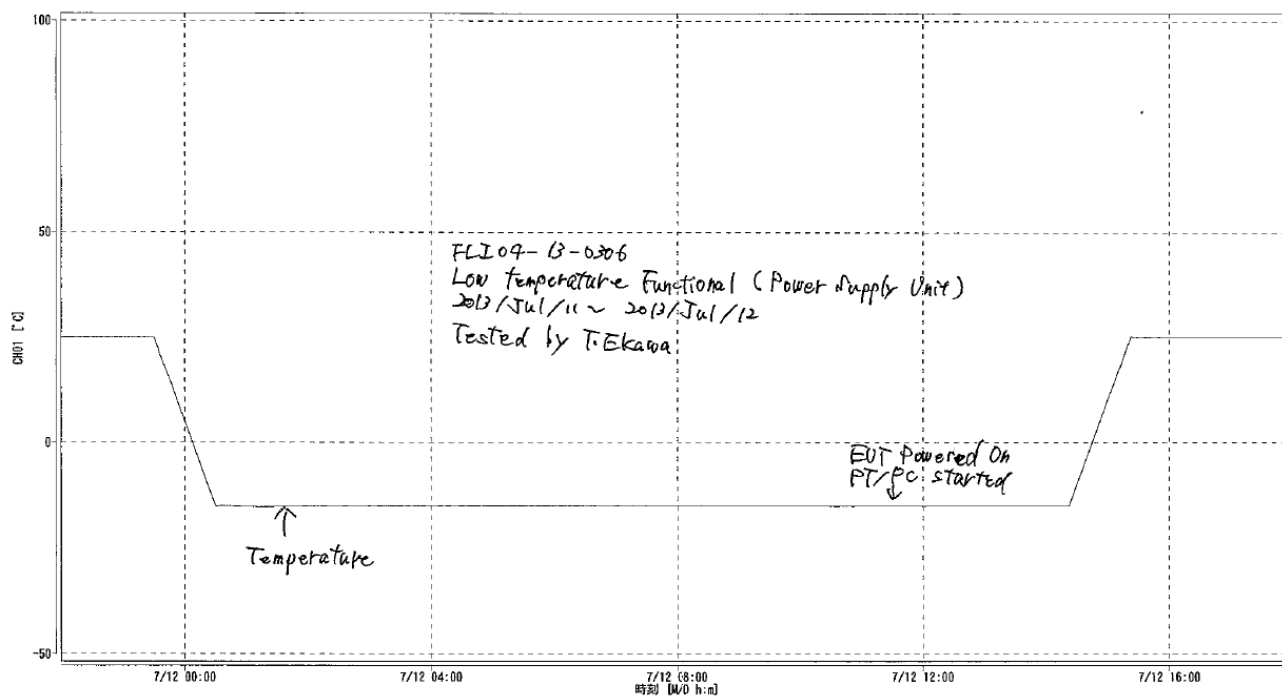


## 8 Vibration response plots taken during tests


8.1 for Antenna Unit (RSB-129 + RTR-107 + SN36CF),

(1) for IEC 60945 Vibration test,

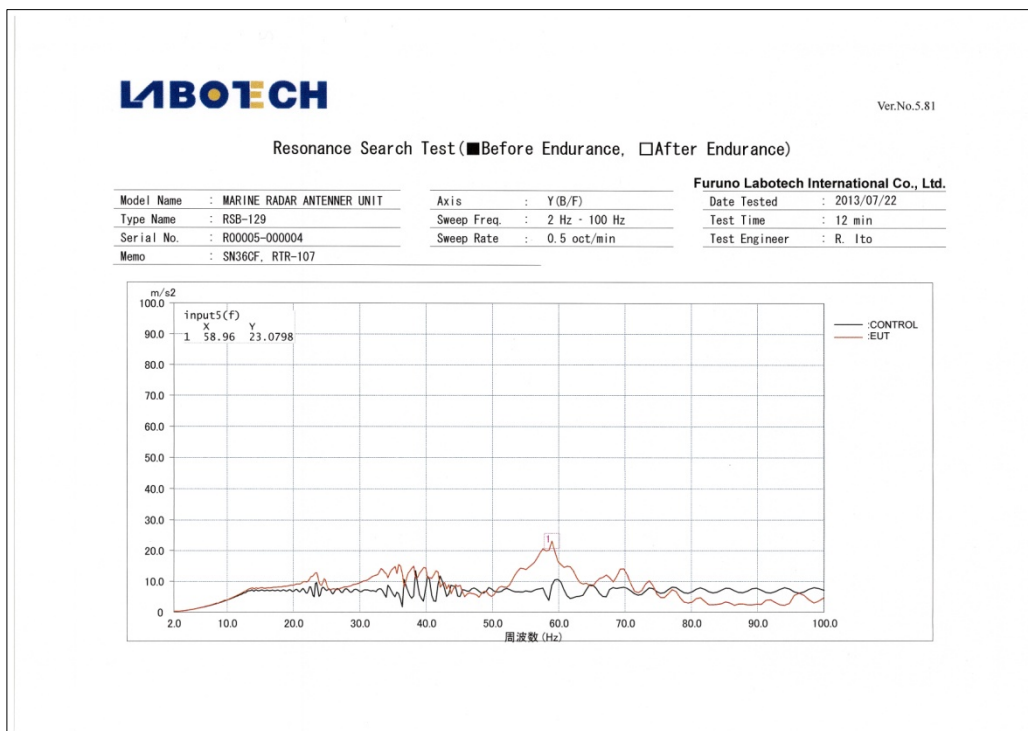
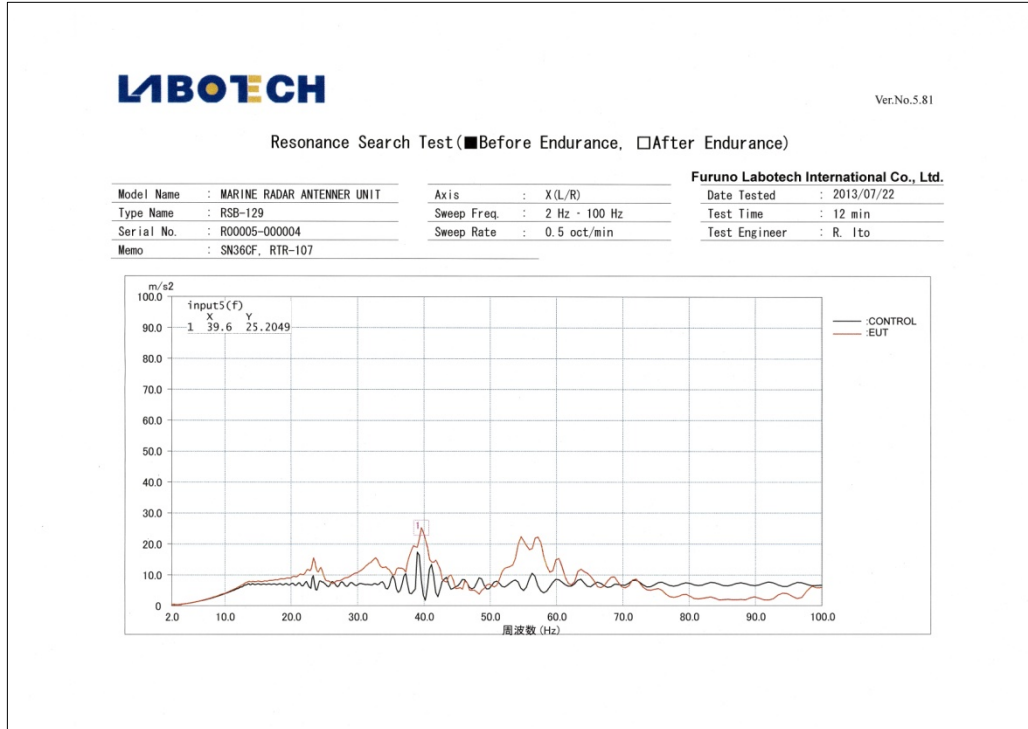


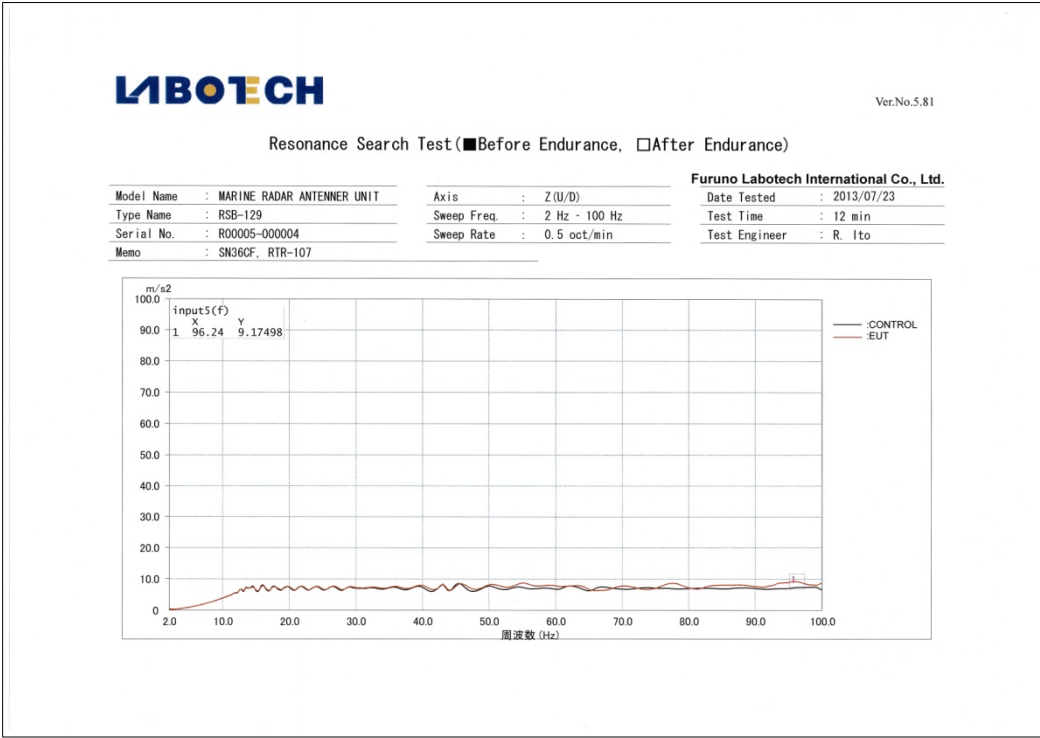


(2) for IEC 62388 Shock test

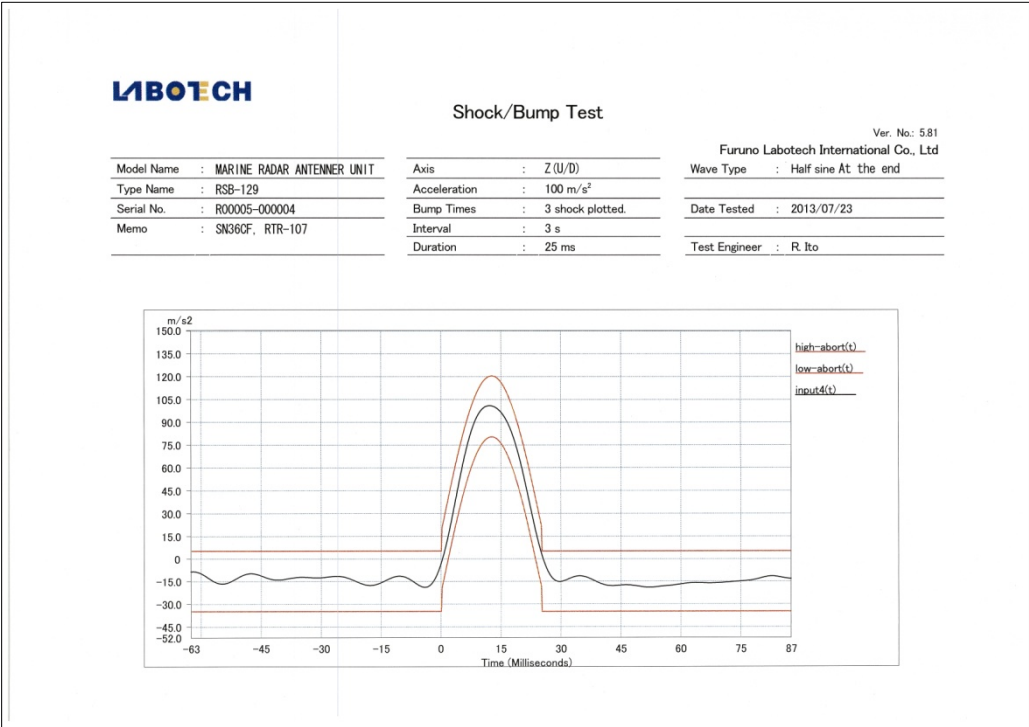




8.2 for PSU-015,  
(1) Table-top mounting,

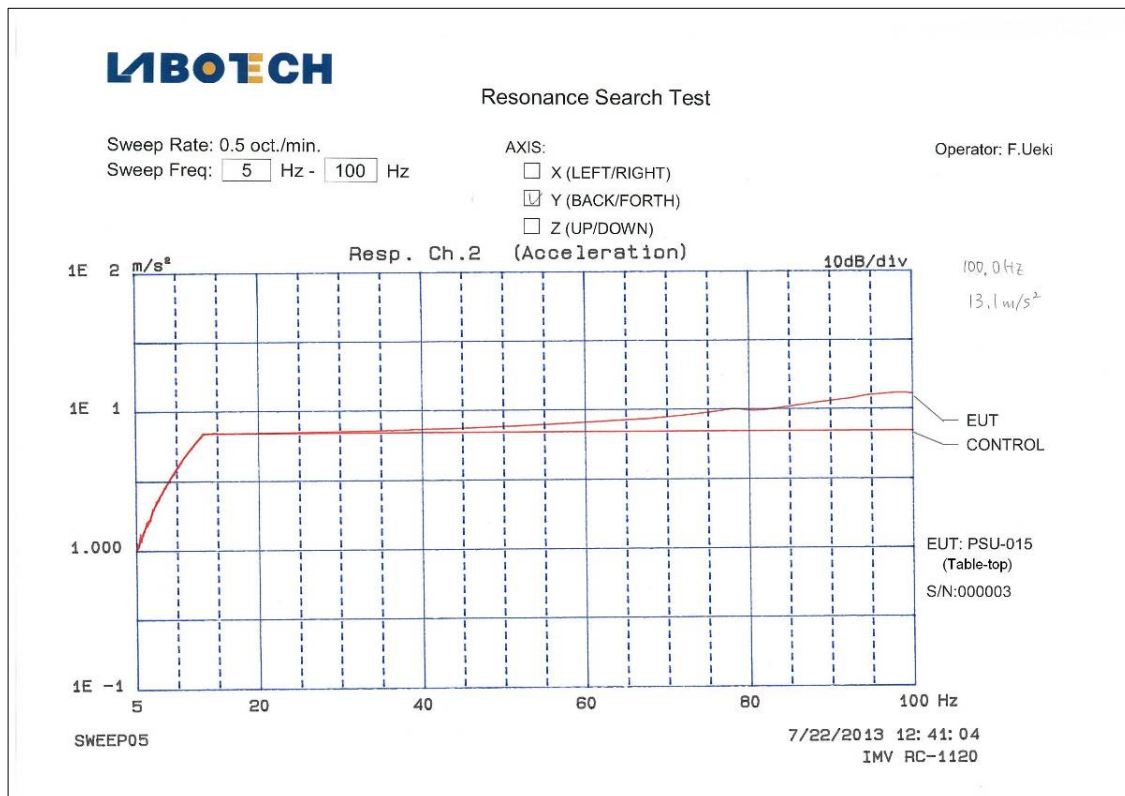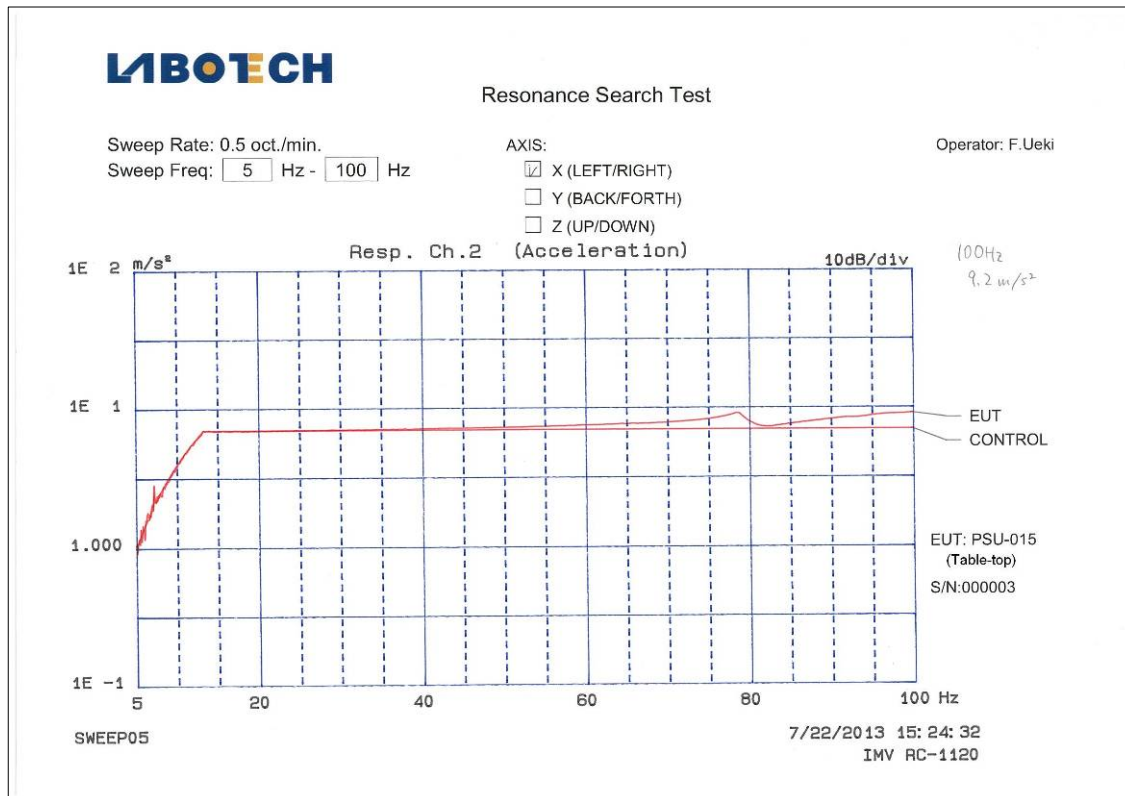

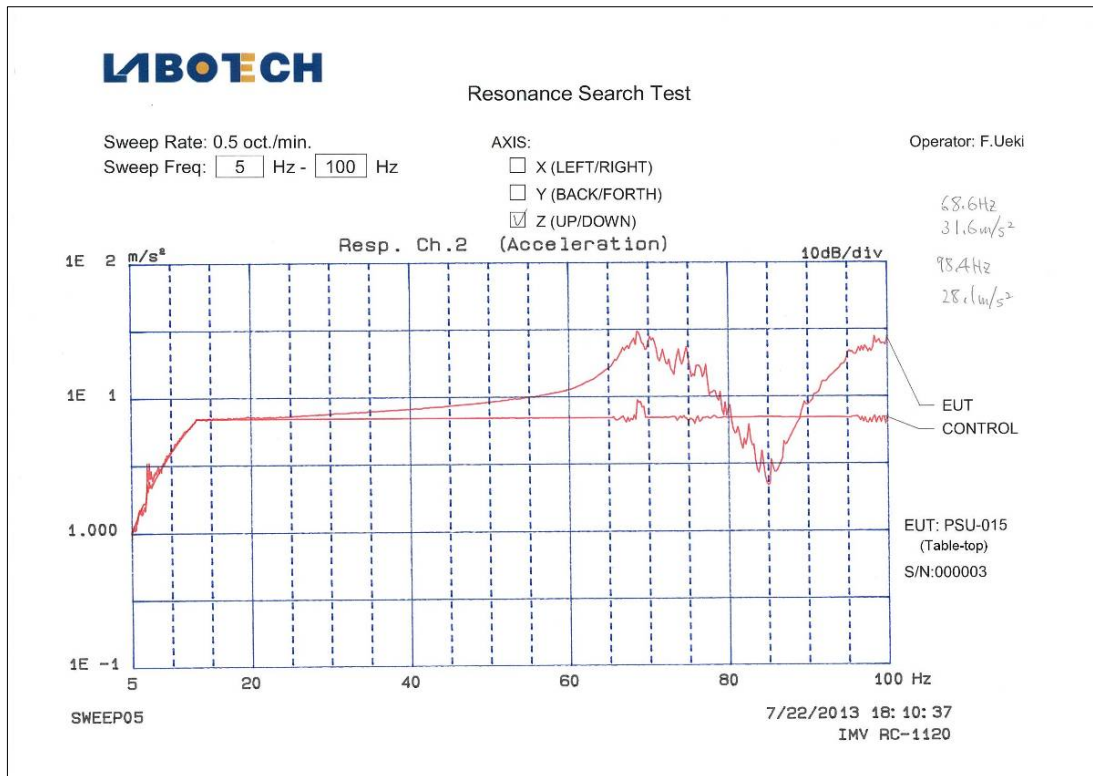

## (2) Wall-mounting,

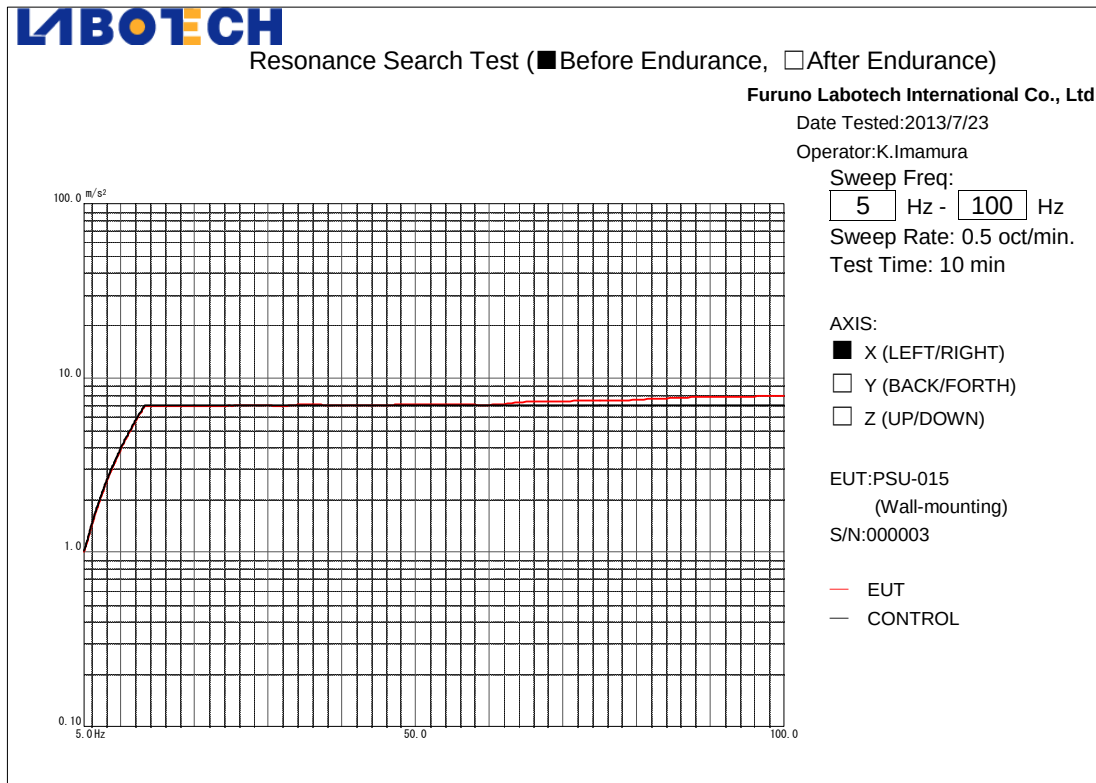

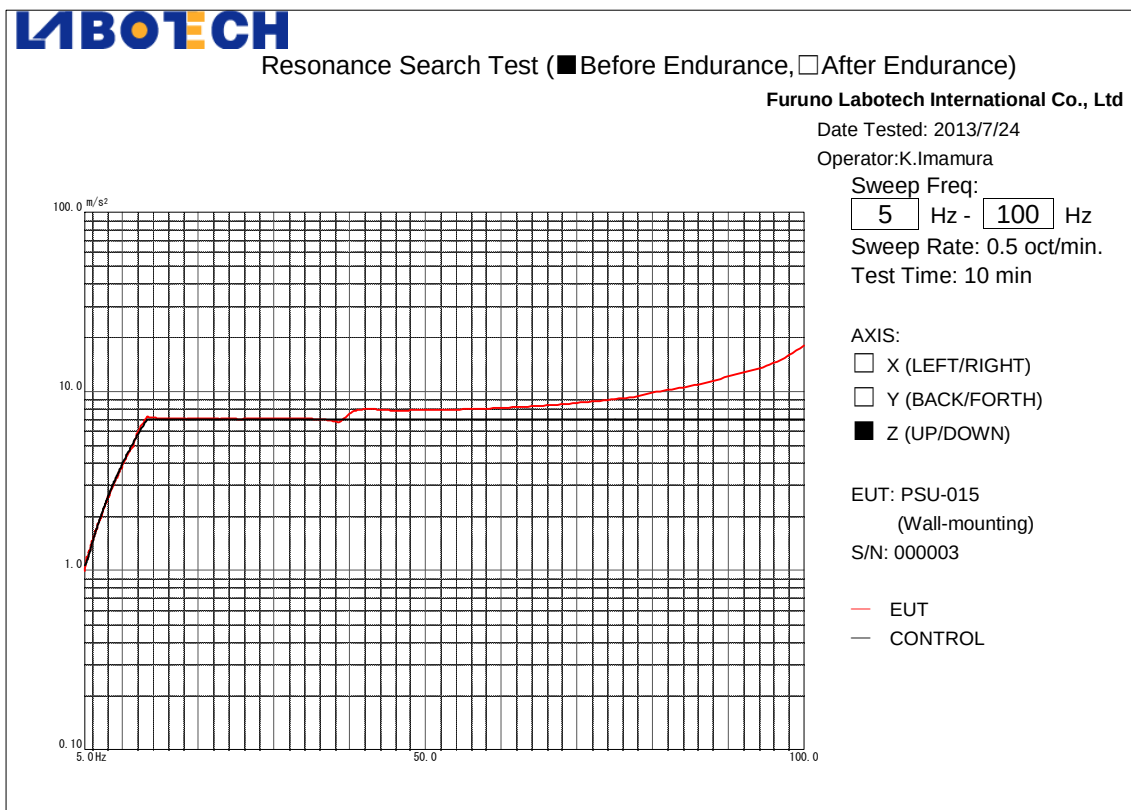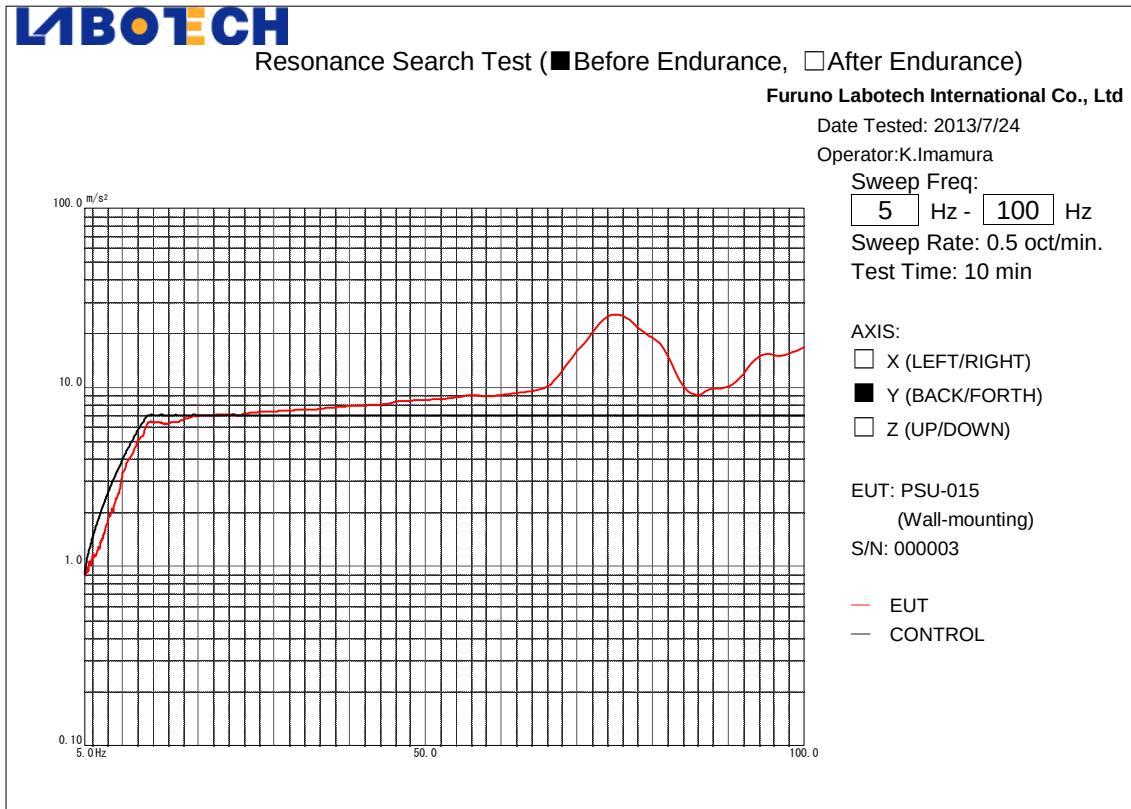

## 9 Test results data of the EUT obtained during the climatic tests.

### 9.1 Dry heat - Storage test

| Item no. | Results                            |                   |                   | Limit       |
|----------|------------------------------------|-------------------|-------------------|-------------|
|          | Power supply voltage and frequency |                   |                   |             |
|          | 230 VAC / 50 Hz                    | 207 VAC / 47.5 Hz | 253 VAC / 52.5 Hz |             |
| 1        | Passed.                            | Passed.           | Passed.           | ---         |
| 2 (rpm)  | 42.0                               | 42.0              | 42.0              | $\geq 40$   |
| 3        | Passed.                            | Passed.           | Passed.           | --          |
| 4        | Passed.                            | Passed.           | Passed.           | ---         |
| 5        | Passed.                            | Passed.           | Passed.           | ---         |
| 6        | Passed.                            | Passed.           | Passed.           | ---         |
| 7        | Passed.                            | Passed.           | Passed.           | ---         |
| 8 (m:s)  | 3:22                               | 3:22              | 3:22              | $\leq 4:00$ |
| 9 (A)    | 3.03                               | 3.04              | 3.04              | ---         |

Note: Item numbers are corresponding to those in Clause 1.2.2 Performance Test (PT).

### 9.2 Dry heat – Functional test

| Item no. | Results                            |                   |                   | Limit            |
|----------|------------------------------------|-------------------|-------------------|------------------|
|          | Power supply voltage and frequency |                   |                   |                  |
|          | 230 VAC / 50 Hz                    | 207 VAC / 47.5 Hz | 253 VAC / 52.5 Hz |                  |
| 1        | Passed.                            | Passed.           | Passed.           | ---              |
| 2 (rpm)  | 42.0                               | 42.0              | 42.1              | <u>&gt; 40</u>   |
| 3        | Passed.                            | Passed.           | Passed.           | --               |
| 4        | Passed.                            | Passed.           | Passed.           | ---              |
| 5        | Passed.                            | Passed.           | Passed.           | ---              |
| 6        | Passed.                            | Passed.           | Passed.           | ---              |
| 7        | Passed.                            | Passed.           | Passed.           | ---              |
| 8 (m:s)  | 3:22                               | 3:22              | 3:22              | <u>&lt; 4:00</u> |
| 9 (A)    | 2.86                               | 2.91              | 2.86              | ---              |

### 9.3 Damp heat – Functional test

| Item no. | Results                            |                   |                   | Limit  |
|----------|------------------------------------|-------------------|-------------------|--------|
|          | Power supply voltage and frequency |                   |                   |        |
|          | 230 VAC / 50 Hz                    | 207 VAC / 47.5 Hz | 253 VAC / 52.5 Hz |        |
| 1        | Passed.                            | NA                | NA                | ---    |
| 2 (rpm)  | 42.0                               |                   |                   | > 40   |
| 3        | Passed.                            |                   |                   | --     |
| 4        | Passed.                            |                   |                   | ---    |
| 5        | Passed.                            |                   |                   | ---    |
| 6        | Passed.                            |                   |                   | ---    |
| 7        | Passed.                            |                   |                   | ---    |
| 8 (m:s)  | 3:23                               |                   |                   | < 4:00 |
| 9 (A)    | 3.02                               |                   |                   | ---    |

Note: NA - Not applicable.

#### 9.4 Low temperature – Functional test

| Item no. | Results                            |                   |                   | Limit  |
|----------|------------------------------------|-------------------|-------------------|--------|
|          | Power supply voltage and frequency |                   |                   |        |
|          | 230 VAC / 50 Hz                    | 207 VAC / 47.5 Hz | 253 VAC / 52.5 Hz |        |
| 1        | Passed.                            | Passed.           | Passed.           | ---    |
| 2 (rpm)  | 41.8                               | 41.8              | 41.8              | > 40   |
| 3        | Passed.                            | Passed.           | Passed.           | --     |
| 4        | Passed.                            | Passed.           | Passed.           | ---    |
| 5        | Passed.                            | Passed.           | Passed.           | ---    |
| 6        | Passed.                            | Passed.           | Passed.           | ---    |
| 7        | Passed.                            | Passed.           | Passed.           | ---    |
| 8 (m:s)  | 3:22                               | 3:22              | 3:22              | < 4:00 |
| 9 (A)    | 3.25                               | 3.25              | 3.25              | ---    |