

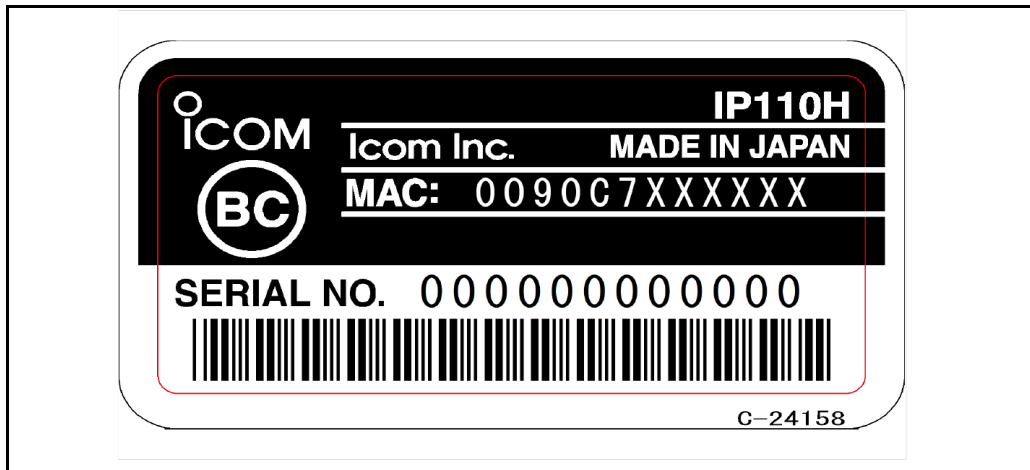








Serial Plate




Label format&Location

1.LCD Display (Authentication screen)



2.Procedure to display the Authentication screen

1. Turn ON the transceiver. Hold down [⏻] for 2 seconds. And wait until standby screen displayed.
2. Push [MENU], and push [Δ/▽] to select “Authentication”.
3. Push [ENT]. You can scroll the Authentication screen by [Δ/▽] keys.

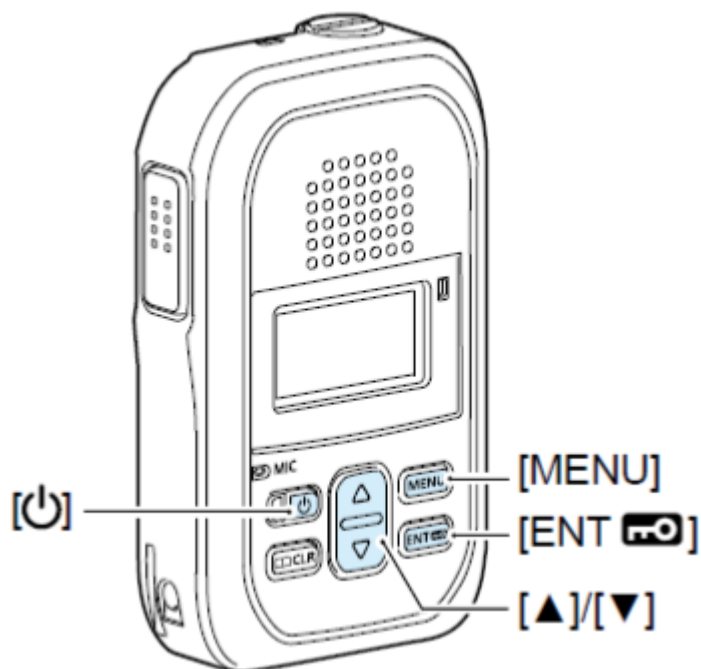

Packing Information

