


ENGINEERING TEST REPORT



VHF Marine Transceiver

Model No.: IC-M25

FCC ID: AFJ451200

IC:202D-451200

HVIN: 451200-01

Applicant:

ICOM Incorporated

1-1-32, Kamiminami,

Hirano-ku, Osaka

Japan 547-0003

Tested in Accordance With

Federal Communications Commission (FCC)

47 CFR, Part 2, Part 80

Industry Canada RSS-182, Issue 6

Maritime Radio Equipment Operating in the 156-162.5 MHz Band

UltraTech's File No.: 25ICOM622_F80RSS182

This Test report is Issued under the Authority of
Tri M. Luu
Vice President of Engineering
UltraTech Group of Labs

Date: January 13, 2025

Report Prepared by: Santhosh Fernandez

Tested by: Angus Au

Issued Date: January 13, 2025

Test Dates: December 12-January 9, 2025

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by any agency of the US Government.
- This test report shall not be reproduced, except in full, without a written approval from UltraTech.

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com



Lab Code: 0685



APEC TEL
CA0001



1309



46390-2049



AT-1945



SL2-IN-E-
1119R



Korea
KCC-RRA

CA0001

TABLE OF CONTENTS

EXHIBIT 1.	INTRODUCTION	1
1.1.	SCOPE.....	1
1.2.	RELATED SUBMITTAL(S)/GRANT(S).....	1
1.3.	NORMATIVE REFERENCES	1
EXHIBIT 2.	PERFORMANCE ASSESSMENT	2
2.1.	CLIENT INFORMATION	2
2.2.	EQUIPMENT UNDER TEST (EUT) INFORMATION.....	2
2.3.	EUT'S TECHNICAL SPECIFICATIONS	3
2.4.	LIST OF EUT'S PORTS	3
2.5.	ANCILLARY EQUIPMENT	3
EXHIBIT 3.	EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS	4
3.1.	CLIMATE TEST CONDITIONS	4
3.2.	OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS	4
3.3.	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	4
3.4.	DEVIATION OF STANDARD TEST PROCEDURES	4
EXHIBIT 4.	SUMMARY OF TEST RESULTS	5
4.1.	LOCATION OF TESTS	5
4.2.	APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS	5
EXHIBIT 5.	TEST DATA.....	6
5.1.	RF POWER OUTPUT [§§ 2.1046 & 80.215] [RSS-182, SECTION 5.6].....	6
5.2.	MODULATION CHARACTERISTICS & AUDIO FREQUENCY RESPONSE [§§ 2.1047(A) & 80.213(E)]	8
5.3.	MODULATION LIMITING [§ 80.213 & § 2.1047(B)].....	11
5.4.	EMISSION MASK [§§2.1049, 80.205 & 80.211] [RSS-182, SECTIONS 5.4, 5.9.1 & 5.9.2].....	14
5.5.	TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 80.211(F)(3)] [RSS-182, SECTION 5.9].....	26
5.6.	TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§ 80.211(F)(3)] [RSS-182, SECTION 5.9]	34
5.7.	FREQUENCY STABILITY [§§ 2.1055 & 80.209] [RSS-182, SECTION 5.5].....	35
5.8.	SUPPRESSION OF INTERFERENCE ABOARD SHIPS [§ FCC 80.217]	37
5.9.	RECEIVER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [RSS-GEN §§ 7.4].....	42
5.10.	RECEIVER SPURIOUS EMISSIONS (RADIATED) [RSS-GEN §§ 7.3].....	46
5.11.	POWERLINE CONDUCTED EMISSIONS [ICES-003]	47
5.12.	RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS [ICES-003]	50
EXHIBIT 6.	TEST EQUIPMENT LIST AND SETUP	51
6.1.	CONDUCTED POWER	51
6.2.	MODULATION LIMIT.....	52
6.3.	AUDIO FREQUENCY RESPONSE.....	53
6.4.	99% OBW AND MASK	54
6.5.	TX CONDUCTED EMISSION	55
6.6.	RX CONDUCTED EMISSION	56
6.7.	SUPPRESSION OF INTERFERENCE ABOARD SHIPS.....	57
6.8.	TX RADIATED	58
6.9.	RX RADIATED, UNINTENTIONAL RADIATED.....	59
6.10.	FREQUENCY STABILITY	60
6.11.	POWER LINE CONDUCTED EMISSIONS	61

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_F80RSS182
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7.	MEASUREMENT UNCERTAINTY.....	62
EXHIBIT 8.	MEASUREMENT METHODS.....	63
8.1.	CONDUCTED POWER MEASUREMENTS.....	63
8.2.	RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD.....	64
8.3.	FREQUENCY STABILITY	67
8.4.	EMISSION MASK.....	68
8.5.	SPURIOUS EMISSIONS (CONDUCTED).....	68

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_F80RSS182
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Parts 2 and 80 Industry Canada RSS-182, Issue 6
Title:	Telecommunication - Code of Federal Regulations, 47CFR, Parts 2 and 80 Maritime Radio Transmitters and Receivers in the Band 156-162.5 MHz
Purpose of Test:	To gain FCC Equipment Authorization for Radio operating in the frequency bands, 156.025-157.425 MHz (Marine) and Industry Canada Type Acceptance Authorization for Maritime Radio Transmitters and Receivers in the Band 156-162.5 MHz
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard TIA/EIA-603 E – Land Mobile FM or PM Communications Equipment Measurement and performance Standards.
Categories of Station:	Ship station transceiver operating in 156.025-161.600 MHz band

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2025	Code of Federal Regulations – Telecommunication
ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
TIA/EIA 603, Edition E	2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
CISPR 16-1-1	2010	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances
RSS-182, Issue 6	2021	Maritime Radio Equipment Operating in the 156-162.5 MHz Band
RSS-Gen, Issue 5	2018	General Requirements for Compliance of Radio Apparatus
TIA/EIA 603, Edition E	2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ICES-003, Issue 7	2020	Information Technology Equipment (including Digital Apparatus)
ITU-R M.493-15	2019	Digital selective-calling system for use in the maritime mobile service

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

Applicant	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Tatsuo Yano Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: isales@icom.co.jp

Manufacturer	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Tatsuo Yano Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: isales@icom.co.jp

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	ICOM Incorporated
Product Name:	VHF Marine Transceiver
Model Name or Number:	IC-M25
Serial Number:	Test Sample
Type of Equipment:	Licensed Non-Broadcast Transmitter Held to Face
Power Supply Requirement:	3.7 V DC nominal
Transmitting/Receiving Antenna Type:	Non-integral
Primary User Functions of EUT:	VHF Marine Transceiver

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3. EUT'S TECHNICAL SPECIFICATIONS

Transmitter	
Equipment Type:	Portable
Intended Operating Environment:	Marine
Power Supply Requirement:	3.7 V DC nominal
RF Output Power Rating:	5 Watts (High) and 1 Watt (Low)
Operating Frequency Range:	156.025-157.425 MHz (Marine)
RF Output Impedance:	50 Ohm
Channel Spacing:	25 kHz
Modulation Employed:	Variable reactance FM (frequency modulation)
Occupied Bandwidth (99%):	15.032 kHz
Emission Designation*:	FM (16K0G3E)
Antenna Type:	Screw

*For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:

Channel Spacing = 25 KHz, D = 5 KHz max, K = 1, M = 3 KHz

$B_n = 2M + 2DK = 2(3) + 2(5)(1) = 16 \text{ kHz}$

Emission designation: 16K0G3E

Receiver	
Operating Frequency Range:	156.050-163.275 MHz
Intermediate Frequencies:	21.7 MHz , 450 kHz

2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	Antenna Connector	1	Screw	N/A
2	SP/MIC	1	ICOM Speaker-Microphone Jack	Non-Shielded
3	Charger Socket	1	USB -C	Shielded

2.5. ANCILLARY EQUIPMENT

Description:	Speaker Microphone
Brand Name:	Icom Inc.
Model Name or Number:	HM-213

Description:	AC/DC Adapter Charger
Brand Name:	Icom Inc.
Identifier:	BC-217SA M/N: S006AKU0500100

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C to 24°C
Humidity:	45 to 55%
Pressure:	102 kPa
Power input source:	3.7 V DC

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	N/A
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the transmitter antenna port terminated to a 50 Ohm RF Load.

Transmitter Test Signals	
Frequency Band(s):	156.025-157.425 MHz
Test Frequency(ies):	156.050 and 157.425 MHz
Transmitter Wanted Output Test Signals:	
• Transmitter Power (rated output power):	5 Watts High, 1 Watt Low
• Normal Test Modulation:	Variable reactance frequency modulation
• Modulating signal source:	External

3.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

3.4. DEVIATION OF STANDARD TEST PROCEDURES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with ANAB File No.: AT-1945.

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC/RSS Section(s)	Test Requirements	Applicability (Yes/No)
2.1046 & 80.215 RSS-182, Section 5.6	RF Power Output	Yes
2.1047(a) & 80.213(e)	Modulation Characteristics - Audio Frequency Response	Yes
2.1047(b) & 80.213	Modulation Characteristics - Modulation Limiting	Yes
2.1049, 80.205 & 80.211(f) RSS-182, Sections 5.4 & 5.9	Occupied Bandwidth and Emission Limitations	Yes
2.1051, 2.1057 & 80.211(f)(3) RSS-182, Section 5.9	Spurious Emissions at Antenna Terminal	Yes
2.1053, 2.1057 & 80.211(f)(3) RSS-182, Section 5.9	Field Strength of Spurious Emissions	Yes
2.1055 & 80.209 RSS-182, Section 5.5	Frequency Stability	Yes
80.217	Suppression of Interference aboard ships	Yes
1.1307, 1.1310, 2.1091 & 2.1093 RSS-Gen, §3.4 & RSS-102	RF Exposure Limit	Yes ¹
RSS-182, Section 3.2.3	Transport Canada Requirements	N/A
RSS-182, Section 5.7	VHF AIS Transponders	N/A
RSS Gen, Section 7.1	Receiver Spurious Emissions	Yes
RSS-Gen, Section 6.4	External Controls	Yes
RSS-Gen, Section 6.8	Transmitter Antenna	Yes
ICES-003, Issue 6	Digital Apparatus	Yes

¹See SAR test report

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. TEST DATA

5.1. RF POWER OUTPUT [§§ 2.1046 & 80.215] [RSS-182, SECTION 5.6]

5.1.1. Limits

§ 80.215(e)(1) Ship stations 156–162 MHz - 25W^{1,2}

Marine utility stations and hand-held portable transmitters: 156–162 MHz -10W

¹ Reducible to 1 watt or less, except for transmitters limited to public correspondence channels and used in an automated system.

² The frequencies 156.775 and 156.825 MHz are available for navigation-related port operations or ship movement only, and all precautions must be taken to avoid harmful interference to channel 16. Transmitter output power is limited to 1 watt for ship stations, and 10 watts for coast stations.

[RSS-182, SECTION 5.6]

Table 3 lists typical transmitter output powers for equipment certified under this standard.

RSS-182, Table 3 - Transmitter Power

Stations	Typical Power
Coast stations	50 W
Ship station	25 W
Shipborne hand-held portable transmitter	6 W

Ship station transmitters shall have power control features implemented to reduce the carrier power to 1 W or less for use at short ranges, except for DSC equipment operating on the 156.525 MHz (channel 70) frequency, for which the power reduction facility is optional.

Survival two-way radiotelephones should have a minimum equivalent isotropically radiated power (e.i.r.p.) of 0.25W.

5.1.2. Method of Measurements

Refer to Section 8.1 of this report for measurement details.

5.1.3. Test Data

Transmitter Channel Output	Channel	Fundamental Frequency (MHz)	Measured (Average) Conducted Power (W)	Power Rating (W)
Power Setting: High				
Lowest	01A	156.050	4.65	5
Highest	88	157.425	4.49	5
Power Setting: Low				
Lowest	01A	156.050	0.89	1.0
Highest	88	157.425	0.87	1.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.2. MODULATION CHARACTERISTICS & AUDIO FREQUENCY RESPONSE [§§ 2.1047(a) & 80.213(e)]

5.2.1. Limits

(e) Coast station transmitters operated in the 156–162 MHz band must be equipped with an audio low-pass filter. The filter must be installed between the modulation limiter and the modulated radio frequency stage. At frequencies between 3 kHz and 20 kHz it must have an attenuation greater than at 1 kHz by at least $60\log_{10}(f/3)$ dB where “f” is the audio frequency in kilohertz. At frequencies above 20 kHz the attenuation must be at least 50 dB greater than at 1 kHz

5.2.2. Method of Measurements

The rated audio input signal was applied to the input of the audio low pass filter(or of all modulation stages) using an output of Bode network analyzer. This input signal level and it's corresponding output signal were then measured and recorded using the Bode Network Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

Refer to Section 6 for Test Set up block diagram and equipment used.

5.2.3. Test Data

5.2.3.1. Audio Frequency Response 25 kHz Channel Spacing


Frequency (Hz)	Trace 1: Gain: Magnitude (dB)
100	-5.28174
210.8028	3.820161
417.6025	7.628931
606.3192	4.831277
996.825	0.558873
1540.092	-3.43148
1974.72	-5.76539
3050.939	-10.4785
4162.766	-18.541
5015.926	-25.8326
7282.648	-41.868
10573.71	-59.5575
13557.71	-70.5281
17383.82	-78.4038
20946.63	-81.281
25239.65	-89.2406
30412.52	-76.7393
41495.49	-82.4385
50000	-88.1136

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

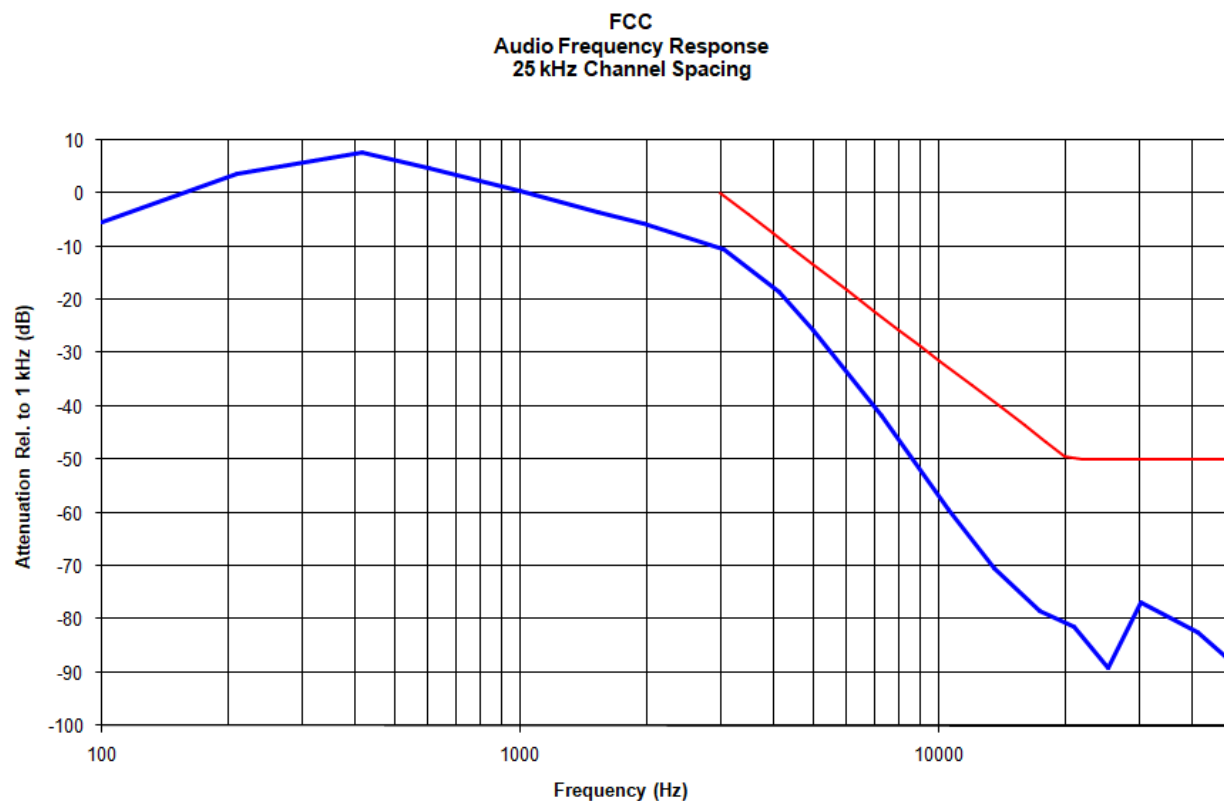

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.3. MODULATION LIMITING [§ 80.213 & § 2.1047(b)]

5.3.1. Limits

§ 80.213 (a)(2) When phase or frequency modulation is used in the 156-162 MHz band the peak modulation must be maintained between 75 and 100 percent. A frequency deviation of ± 5 kHz is defined as 100 percent peak modulation; and

§ 80.213 (b) Radiotelephone transmitters using A3E, F3E and G3E emission must have a modulation limiter to prevent any modulation over 100 percent. This requirement does not apply to survival craft transmitters, to transmitters that do not require a license or to transmitters whose output power does not exceed 3 watts.

§ 80.213 (d) Ship and coast station transmitters operating in the 156-162 MHz and 216-220 bands must be capable of proper operation with a frequency deviation that does not exceed ± 5 kHz when using any emission authorized by Sec. 80.207.

5.3.2. Method of Measurements

For Audio Transmitter:- The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

5.3.3. Test Data

Test Channel: 156.050 MHz High Power

5.3.3.1. Voice Modulation Limiting

Modulating Signal Level	Peak Frequency Deviation (kHz)					Maximum Limit
(mVrms)	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	(kHz)
2	0.23	1.12	2.46	4.23	1.25	5.0
4	0.32	2.07	4.18	4.25	1.26	5.0
6	0.38	3.08	4.49	4.26	1.26	5.0
8	0.46	4.32	4.50	4.27	1.26	5.0
10	0.52	4.43	4.49	4.27	1.26	5.0
15	0.74	4.46	4.47	4.28	1.26	5.0
20	0.93	4.41	4.44	4.28	1.26	5.0
25	1.14	4.39	4.42	4.27	1.25	5.0
30	1.34	4.38	4.42	4.27	1.25	5.0
35	1.55	4.38	4.41	4.27	1.25	5.0
40	1.75	4.37	4.40	4.27	1.25	5.0
45	1.96	4.37	4.41	4.28	1.25	5.0
50	2.20	4.37	4.40	4.27	1.25	5.0
60	2.85	4.38	4.39	4.28	1.25	5.0
70	3.62	4.36	4.39	4.27	1.24	5.0
80	3.70	4.35	4.39	4.28	1.24	5.0
90	3.71	4.36	4.39	4.28	1.24	5.0
100	3.72	4.36	4.40	4.27	1.24	5.0


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Voice Signal Input Level = STD MOD Level + 16 dB = 2.07mV+16dB = 23.32 dB(mVrms) = 13.06 mVrms		
Modulation Frequency (KHz)	Peak Deviation (KHz)	Maximum Limit (KHz)
0.1	0.65	5.0
0.2	1.89	5.0
0.4	4.51	5.0
0.6	4.41	5.0
0.8	4.45	5.0
1.0	4.49	5.0
1.2	4.53	5.0
1.4	4.53	5.0
1.6	4.51	5.0
1.8	4.51	5.0
2.0	4.53	5.0
2.5	4.54	5.0
3.0	4.29	5.0
3.5	3.57	5.0
4.0	2.58	5.0
4.5	1.90	5.0
5.0	1.25	5.0
6.0	0.68	5.0
7.0	0.42	5.0
8.0	0.30	5.0
9.0	0.23	5.0
10.0	0.20	5.0

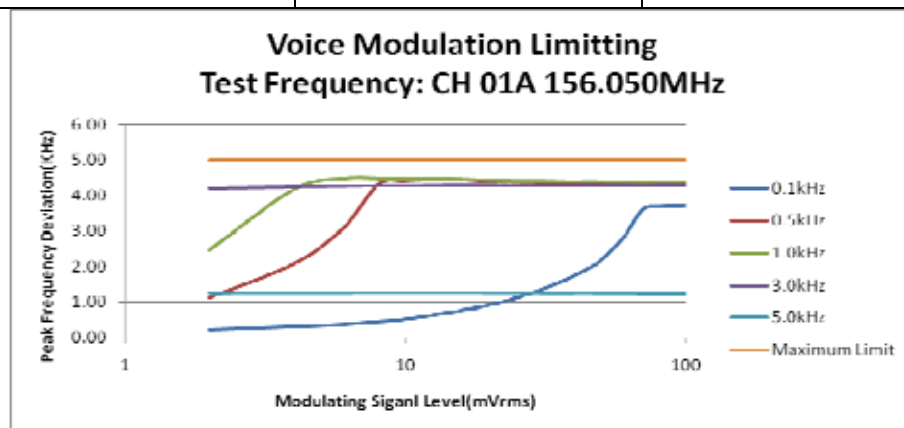

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.4. EMISSION MASK [§§2.1049, 80.205 & 80.211] [RSS-182, SECTIONS 5.4, 5.9.1 & 5.9.2]

5.4.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

Emission designator	Maximum Authorized BW (kHz)	Channel Spacing (kHz)	Recommended Frequency Deviation (kHz)	Applicable Mask
16K0G3E	20	25	5	See § 80.211 (f)

§ 80.211 (f) Emission Limitations:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.

[RSS-182, SECTIONS 5.4 & 5.9]

RSS-182, Section 5.4:

- (V) the authorized channel bandwidth for voice shall be 16 kHz; and
(VI) the authorized channel bandwidth for data shall be 20 kHz.

RSS-182, Section 5.9.1 Emission Mask B for Equipment with 25 kHz Channel Spacing

This mask is for FM or PM modulation equipment with 25 kHz channel spacing, an authorized bandwidth of 16 kHz for voice or 20 kHz for data, and equipped with or without an audio low-pass filter. The power of any emission shall be attenuated below the transmitter output power (P, in dBW) as follows:

- (a) on any frequency removed from the carrier frequency by more than 50%, but not more than 100% of the authorized bandwidth: at least 25 dB, measured with a bandwidth of 300 Hz;
- (b) on any frequency removed from the carrier frequency by more than 100%, but not more than 250% of the authorized bandwidth: at least 35 dB, measured with a bandwidth of 300 Hz; and
- (c) on any frequency removed from the carrier frequency by more than 250% of the authorized bandwidth: at least $43 + 10 \log_{10} p(\text{watts})$ dB, measured with a bandwidth of 30 kHz.

RSS-182, Section 5.9.2 Emission Mask C for equipment with 12.5 kHz Channel Spacing

Emission mask C is for equipment with channel spacing of 12.5 kHz and an authorized bandwidth of 11.25 kHz, with or without an audio low-pass filter. The power of unwanted emissions shall be attenuated below the transmitter's output power "p" (dBW) as follows:

- i. 0 dB, measured with a bandwidth of 100 Hz, on any frequency removed from the carrier frequency up to a displacement frequency of 5.625 kHz;

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- ii. at least $7.27 (f_d - 2.88 \text{ kHz}) \text{ dB}$, measured with a bandwidth of 100 Hz, on any frequency removed from the carrier frequency by a displacement frequency (f_d in kHz) of more than 5.625 kHz, but no more than 12.5 kHz; and
- iii. at least $50 + 10 \log_{10} p (W) \text{ dB}$ or 70 dB, whichever is the lesser attenuation, on any frequency removed from the carrier frequency by a displacement frequency (f_d in kHz) of more than 12.5 kHz, and measured as follows:
 - o with a bandwidth of 100 Hz for a displacement frequency of more than 12.5 kHz, but no more than 50 kHz; and
 - o with a bandwidth of 10 kHz for a displacement frequency of more than 50 kHz.

5.4.2. Method of Measurements

Refer to Section 8.4 of this report for measurement details

5.4.3. Test Data


5.4.3.1. 99% Occupied Bandwidth

Remark: 99% Occupied Bandwidth measurements were done using the built-in auto function of the analyzer.			
Frequency (MHz)	Channel Spacing (kHz)	Measured 99% OBW (kHz)	Authorized Bandwidth (kHz)
156.050	25	14.92	16/20
157.425	25	15.03	16/20

See the following plots for details of measurements.

5.4.3.2. Configuration: 99% OBW, CH 01A 156.050MHz, 25 KHz, High power

OBW: 14.919 KHz

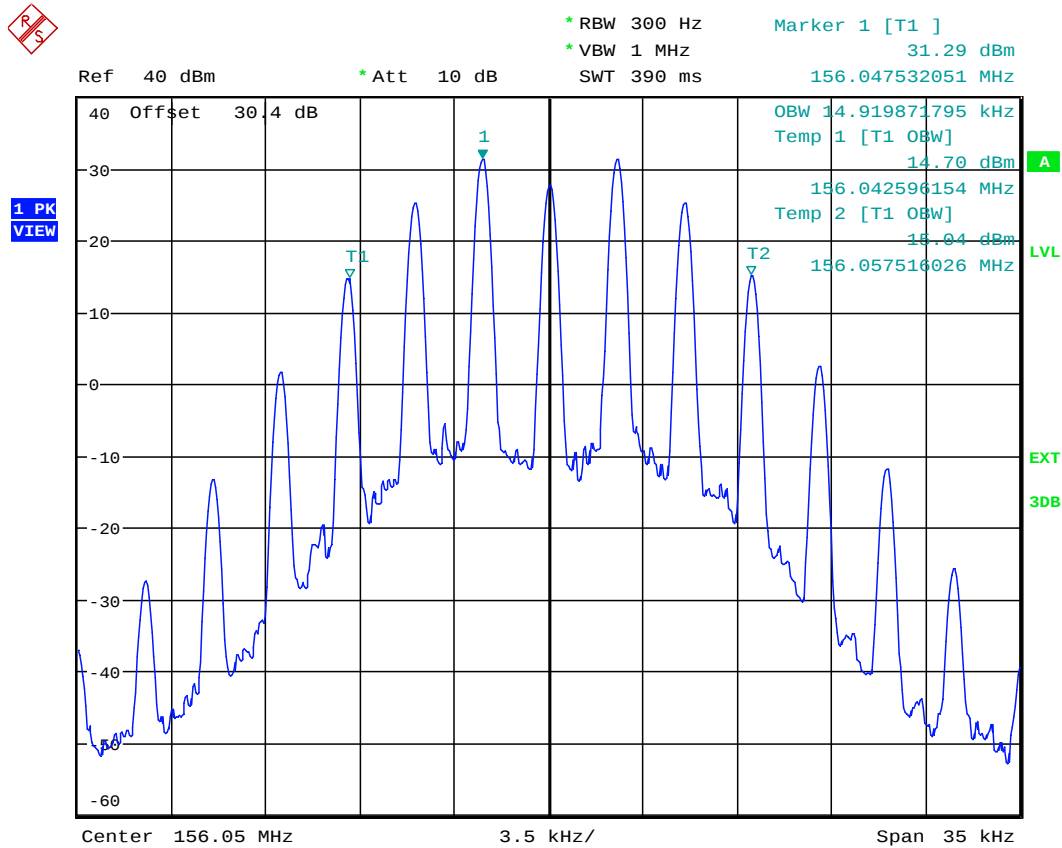

Date: 12.DEC.2024 15:10:52

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 25ICOM622_FCC80

January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.4.3.3. Configuration: 99% OBW, CH 88 157.425MHz, 25 KHz, High power

OBW: 15.032 KHz

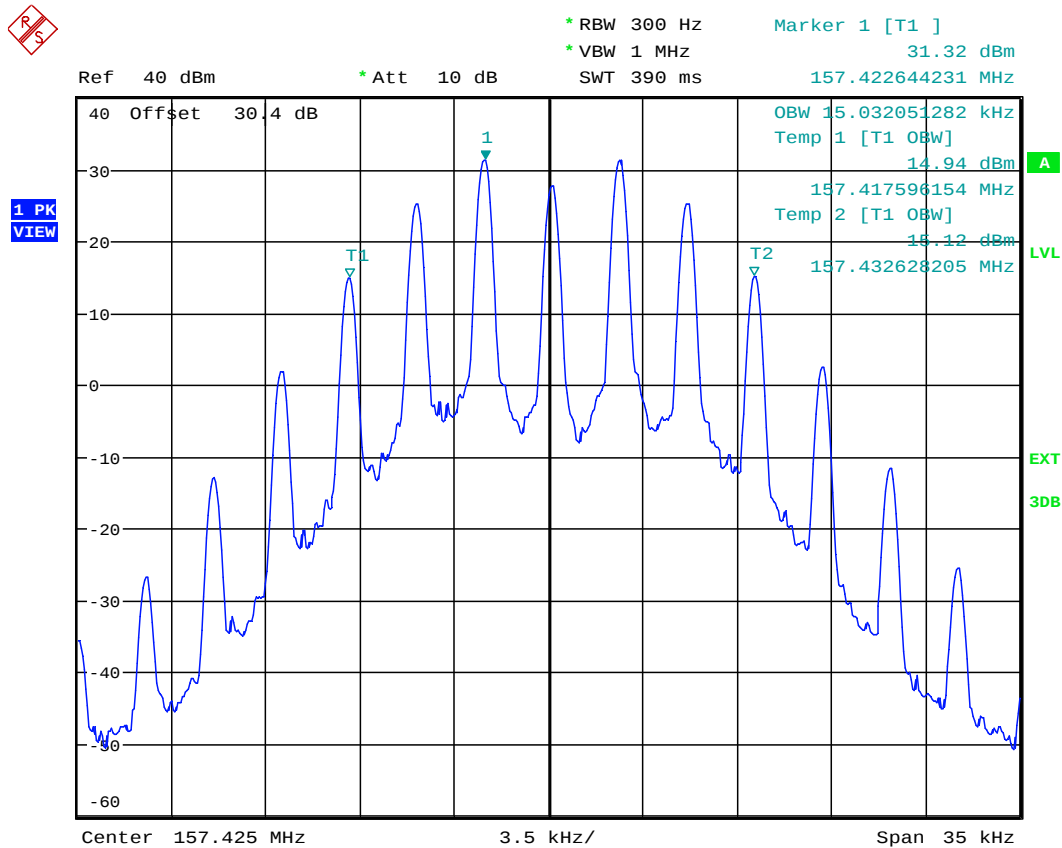

Date: 12.DEC.2024 15:13:07

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Emission Masks Mask B

High Power

5.4.3.4. Configuration: Mask B, CH 01A 156.050MHz, 25 KHz, High power

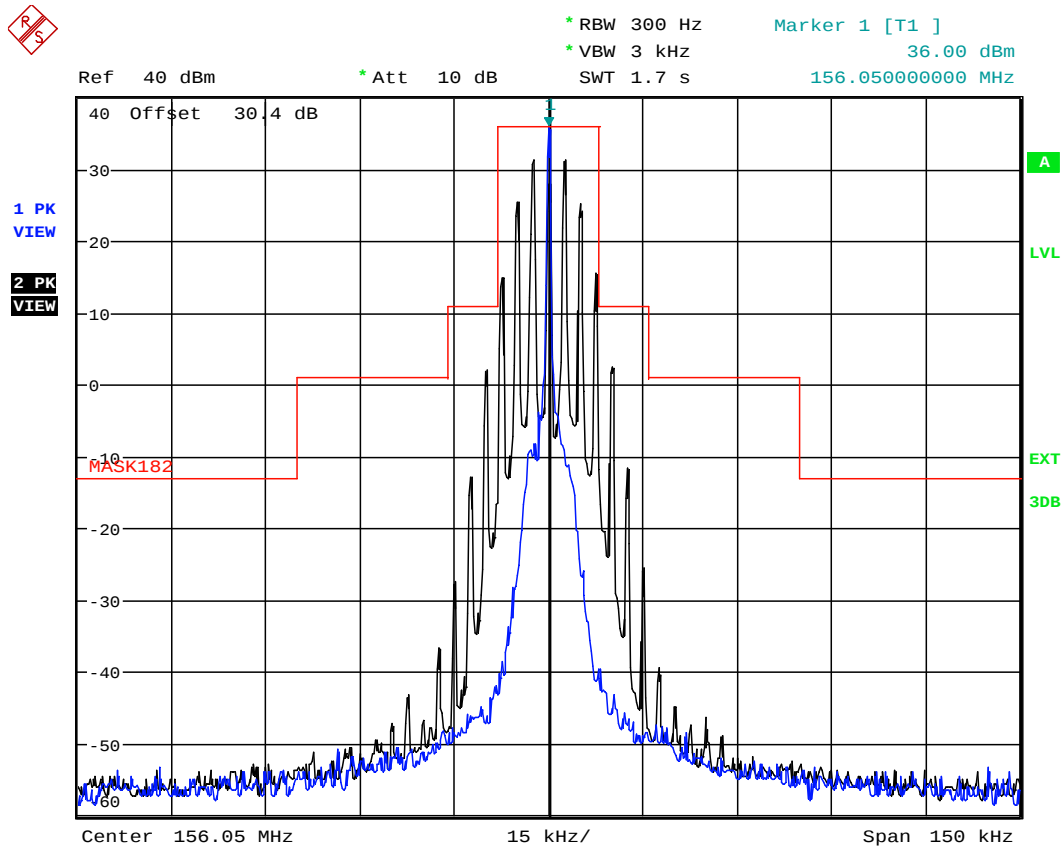


Date: 12.DEC.2024 15:32:19

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

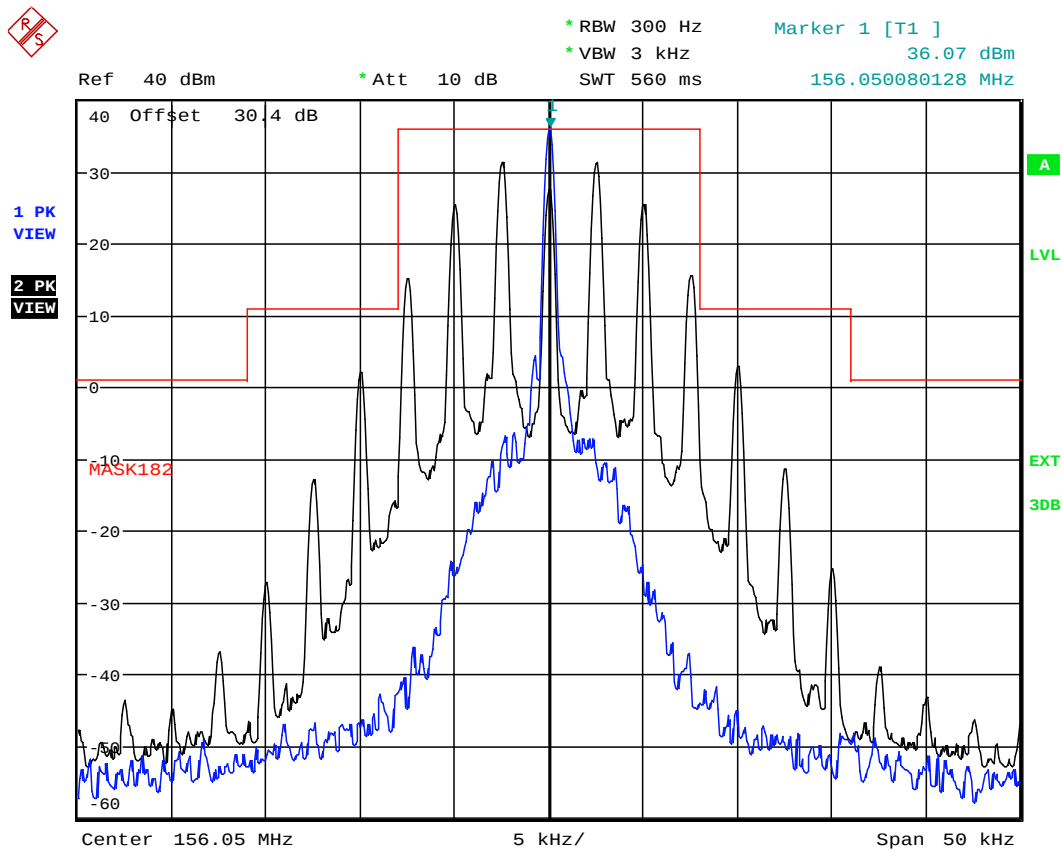

Date: 12.DEC.2024 15:34:28


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.4.3.5. Configuration: Mask B, CH 88 157.425MHz, 25 KHz, High power

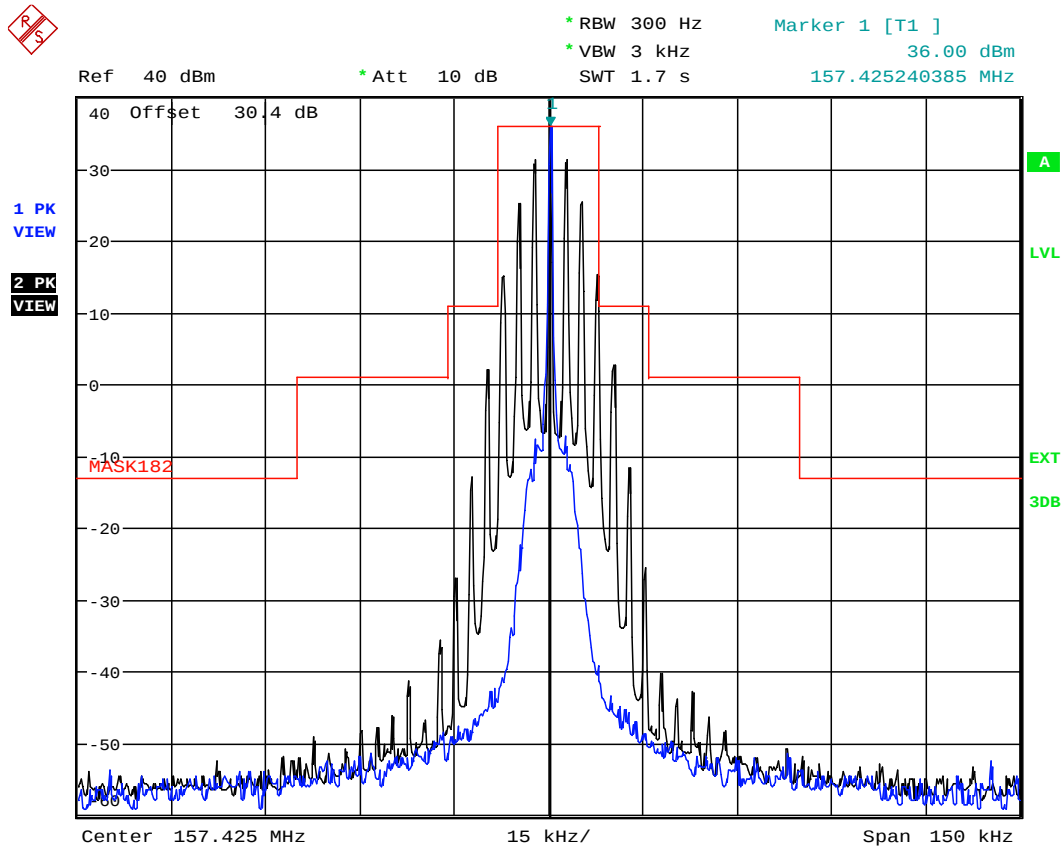

Date: 12.DEC.2024 15:37:54


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80

January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

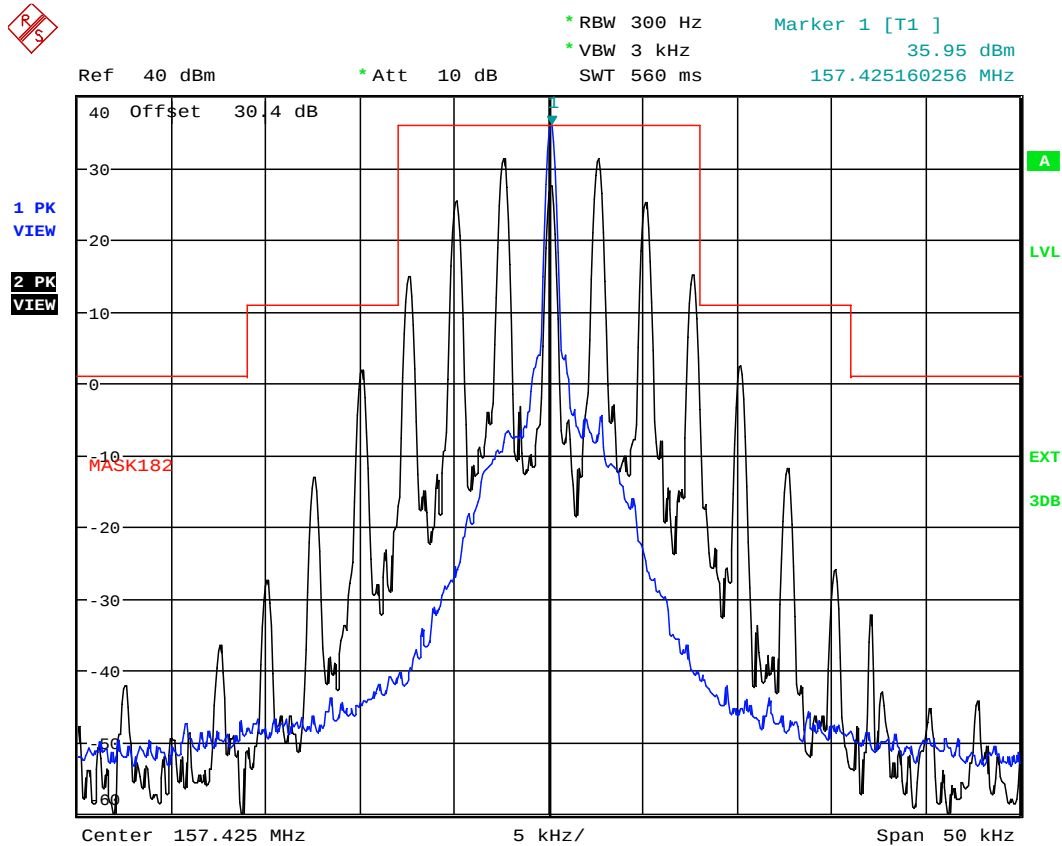

Date: 12.DEC.2024 15:42:57

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Low Power

5.4.3.6. Configuration: Mask B, CH 01A 156.050MHz, 25 KHz, Low power

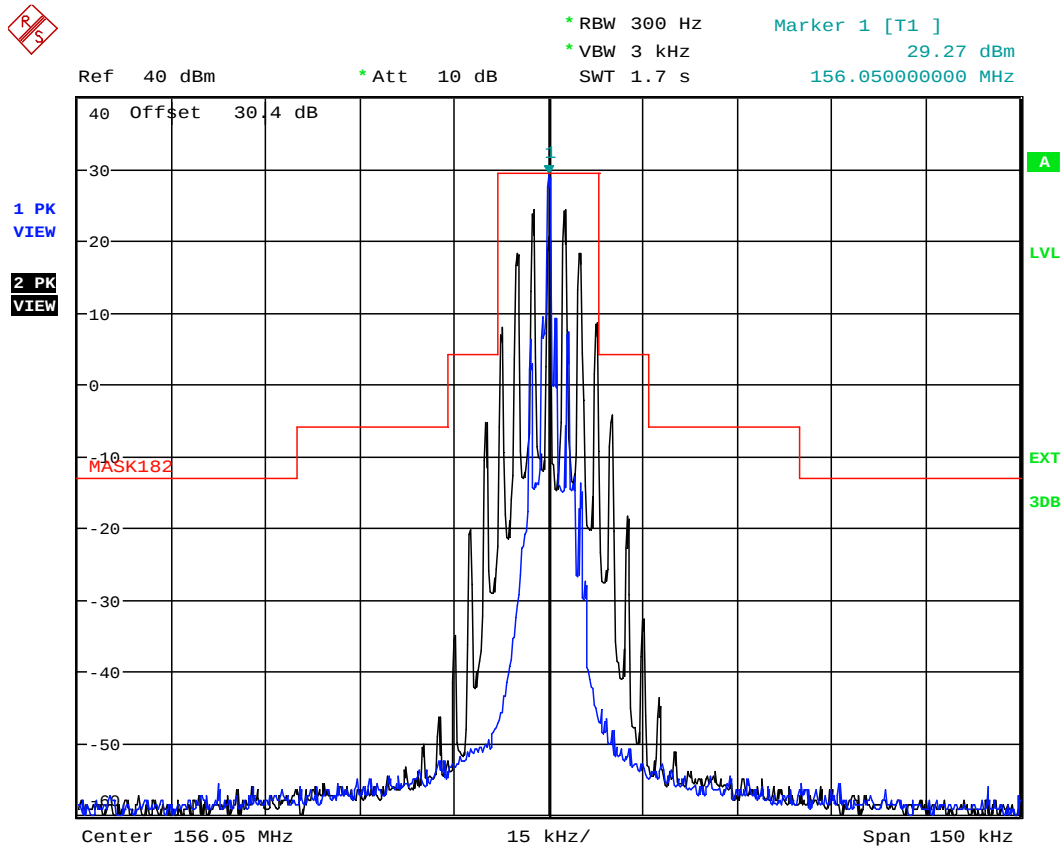


Date: 12.DEC.2024 15:57:10

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

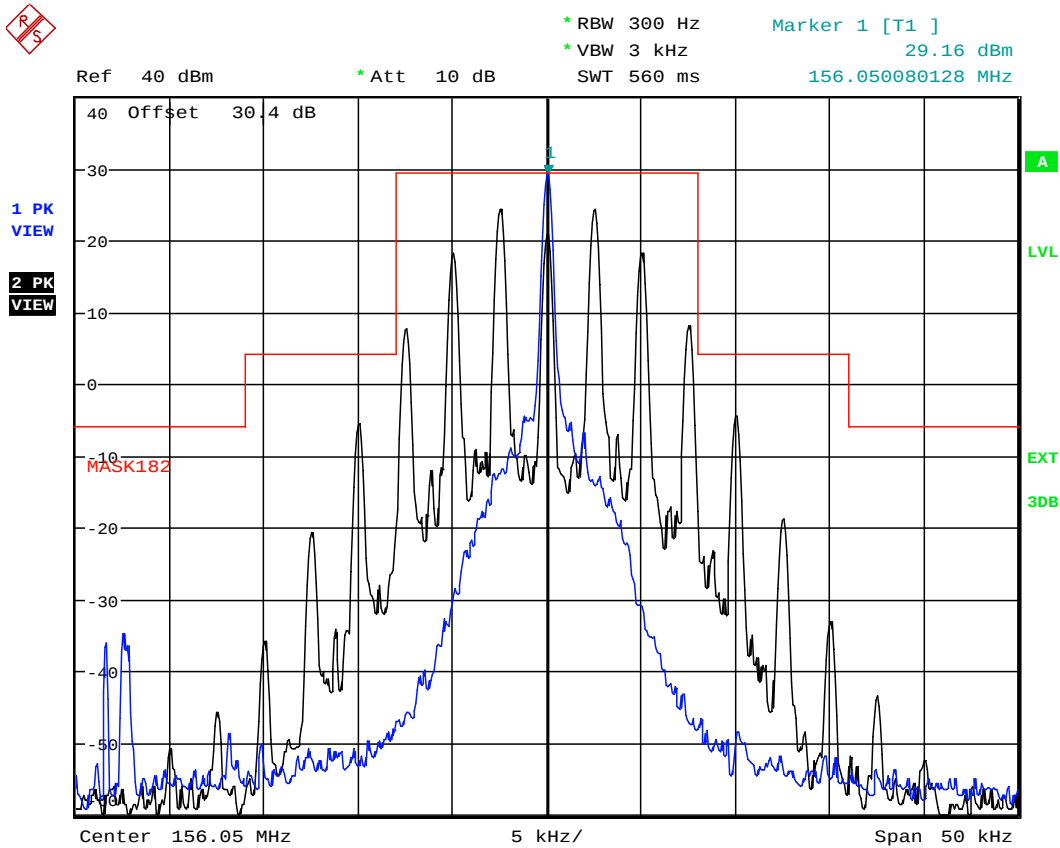

Date: 12.DEC.2024 17:57:40


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.4.3.7. Configuration: Mask B, CH 88 157.425MHz, 25 KHz, Low power

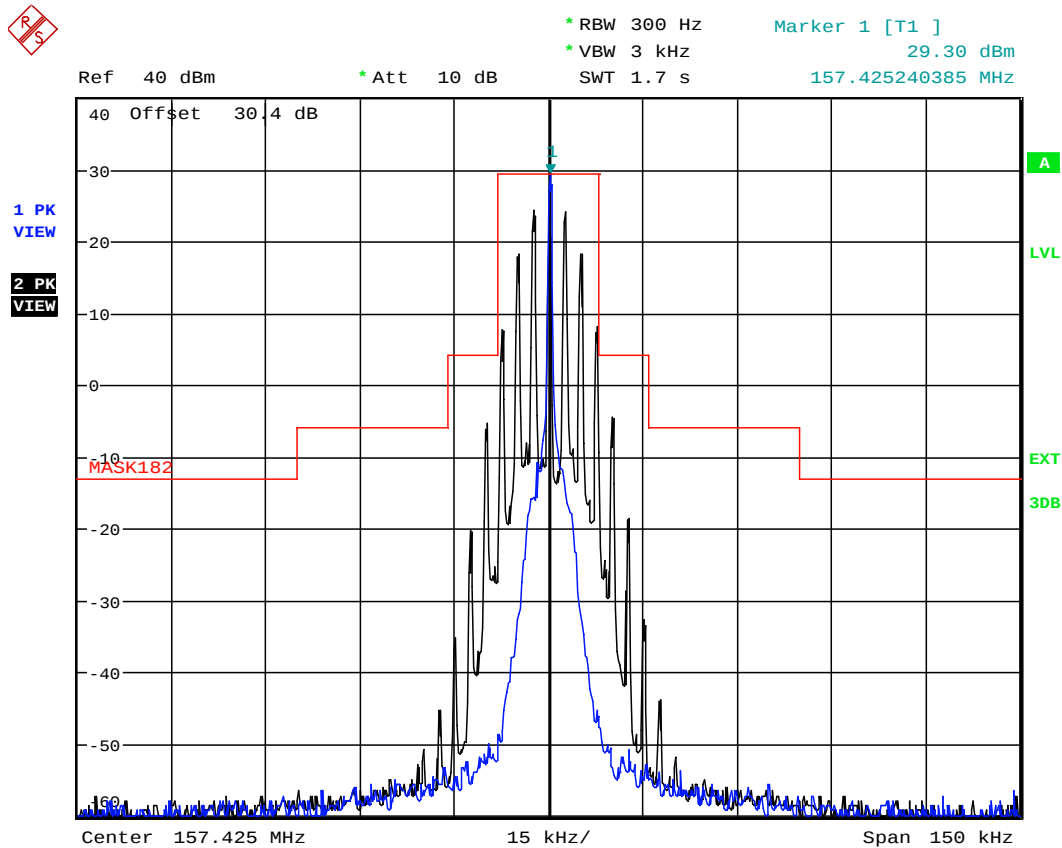

Date: 12.DEC.2024 18:05:22


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80

January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

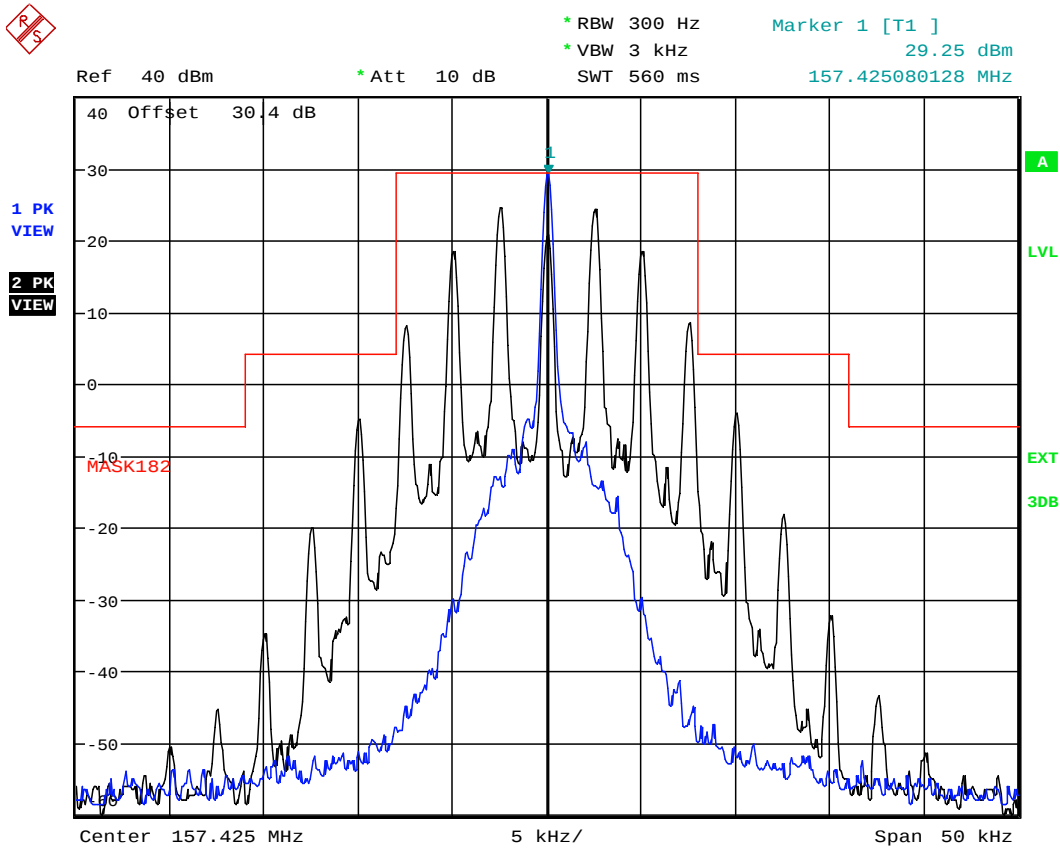

Date: 12.DEC.2024 18:06:46

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.5. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 80.211(f)(3)] [RSS-182, SECTION 5.9]

5.5.1. Limits

§ 80.211 (f)(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus 10log10 (mean power in watts) dB.

[RSS-182, SECTION 5.9]

Equipment with 25 kHz channel spacing shall comply with emission mask B. Radio equipment with 12.5 kHz channel spacing, with or without an audio low-pass filter, shall comply with emission mask C.


5.5.2. Method of Measurements

Refer to Section 8.5 of this report for measurement details

5.5.3. Test Data

High Power

5.5.3.1. Configuration: Tx Conducted, CH 01A 156.050MHz, 25 KHz, High power

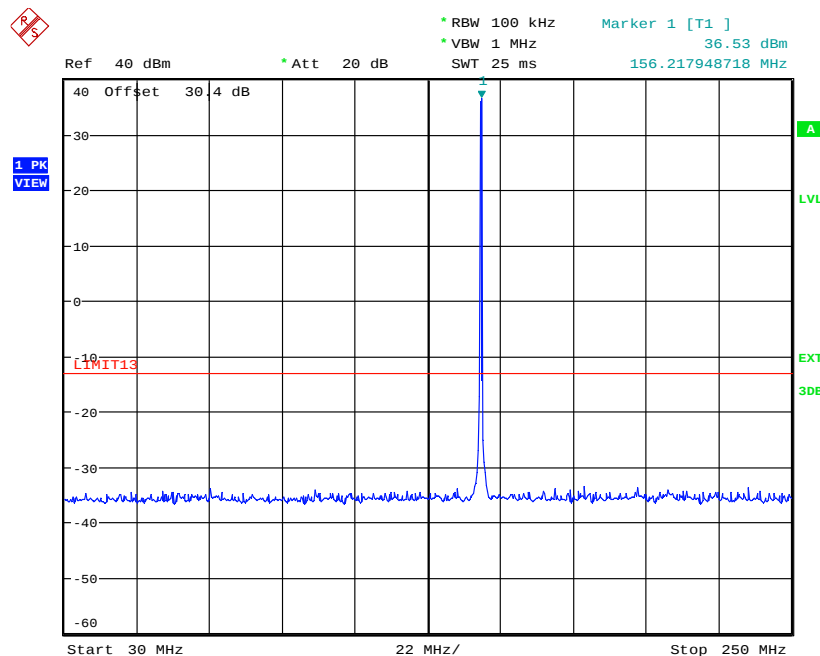


Date: 13.DEC.2024 18:31:38

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

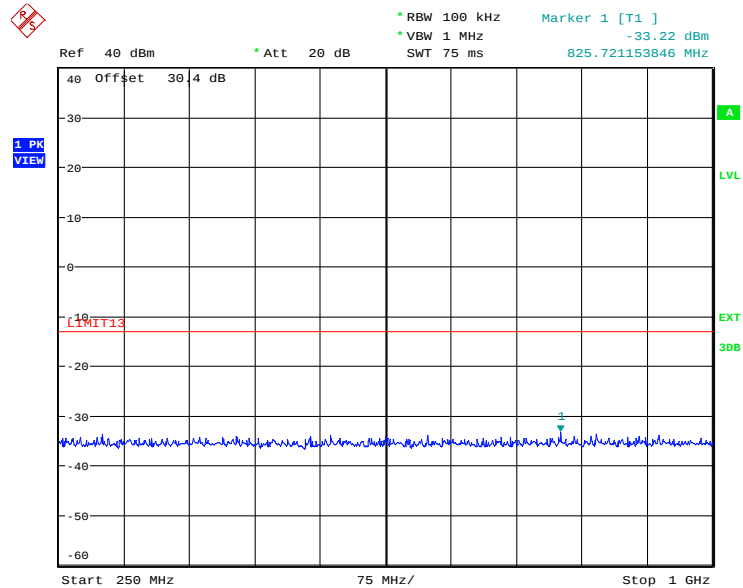

Date: 13.DEC.2024 18:34:56

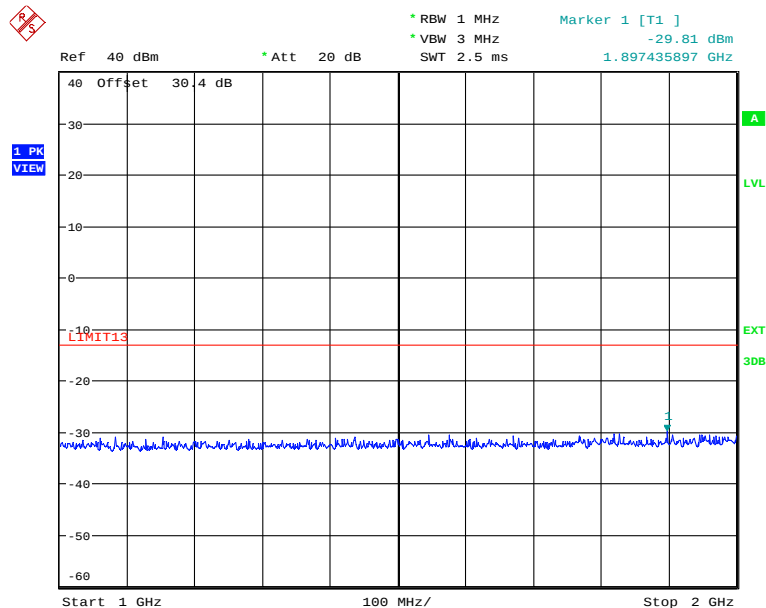

Date: 13.DEC.2024 18:36:00


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.5.3.2. Configuration: Tx Conducted, CH 88 157.425MHz, 25 KHz, High power

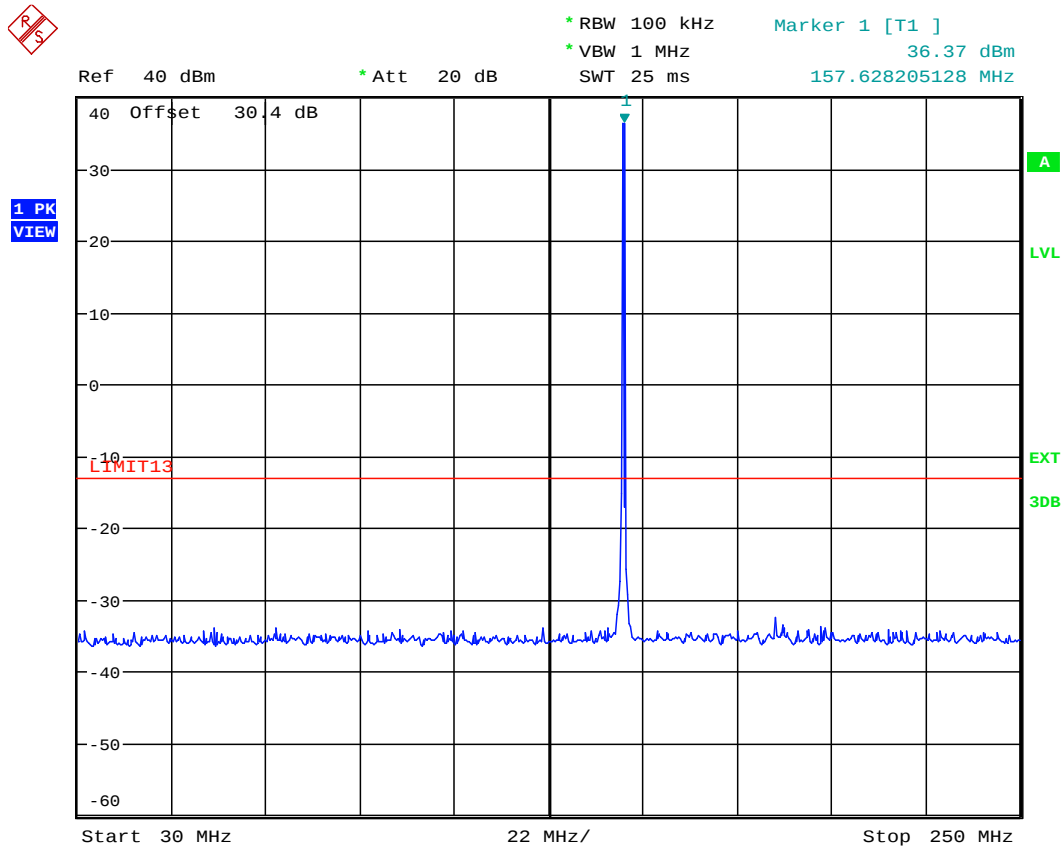

Date: 13.DEC.2024 19:32:57

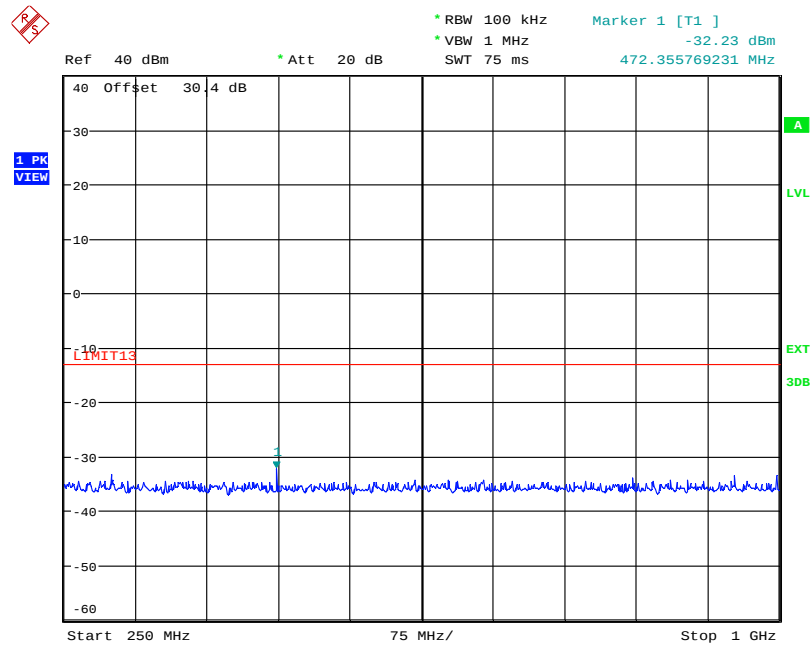

Date: 13.DEC.2024 19:34:31

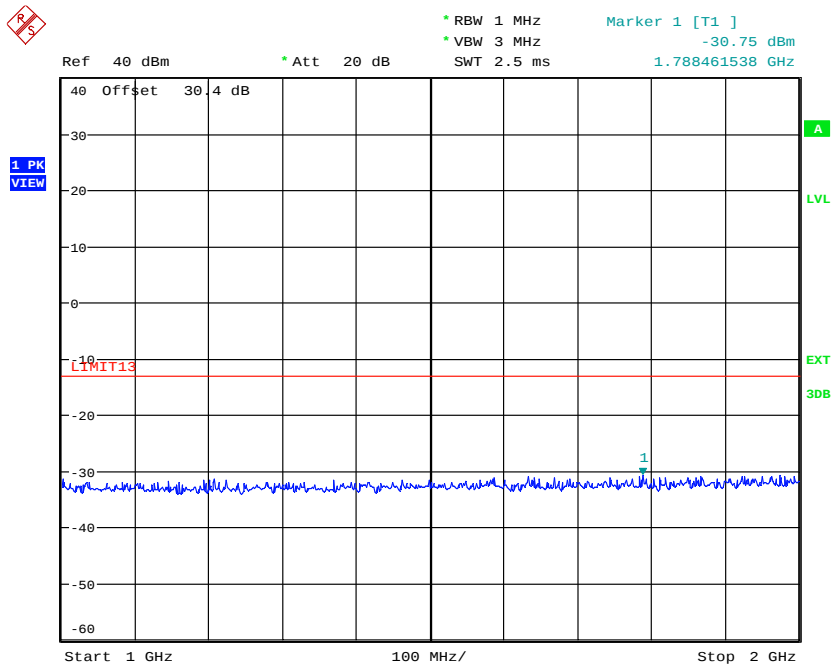

Date: 13.DEC.2024 19:54:12

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 25ICOM622_FCC80

January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Low Power

5.5.3.3. Configuration: Tx Conducted, CH 01A 156.050MHz, 25 KHz, Low power

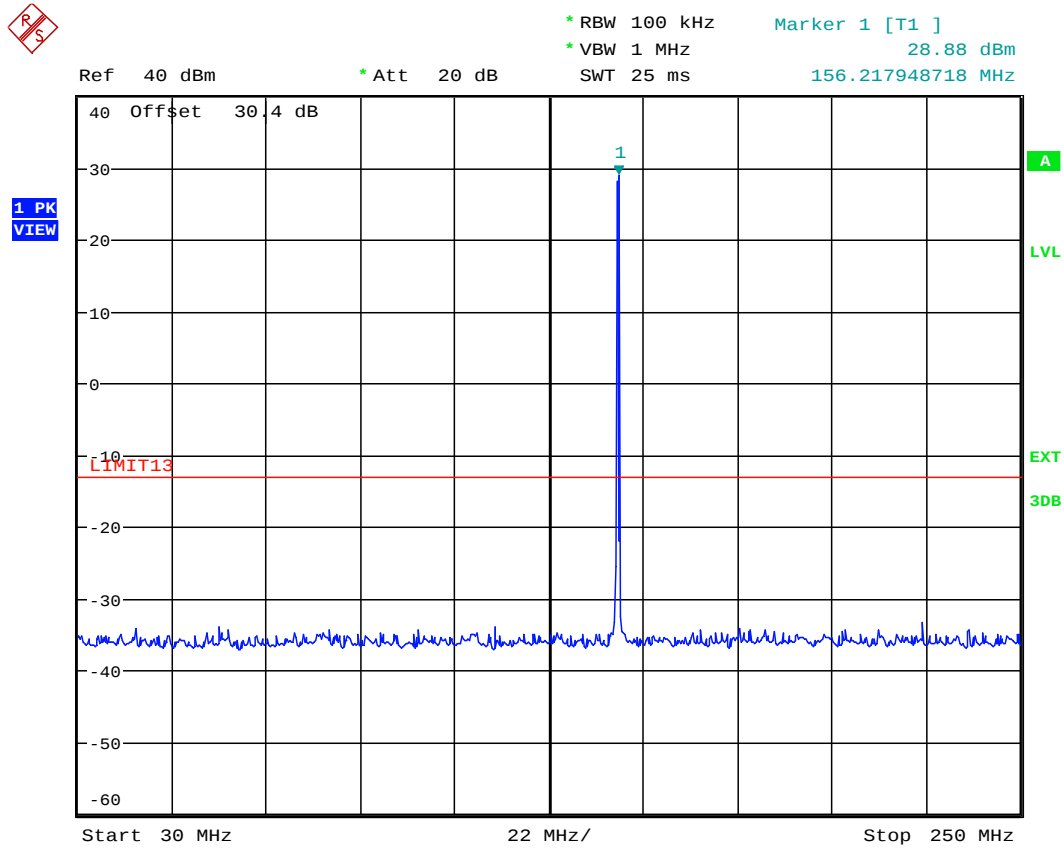


Date: 16.DEC.2024 15:40:41

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

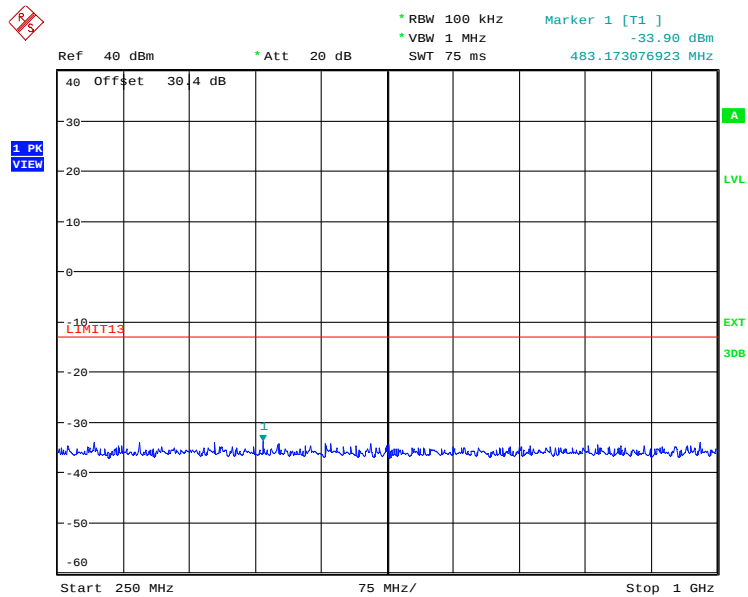

Date: 16.DEC.2024 15:43:17

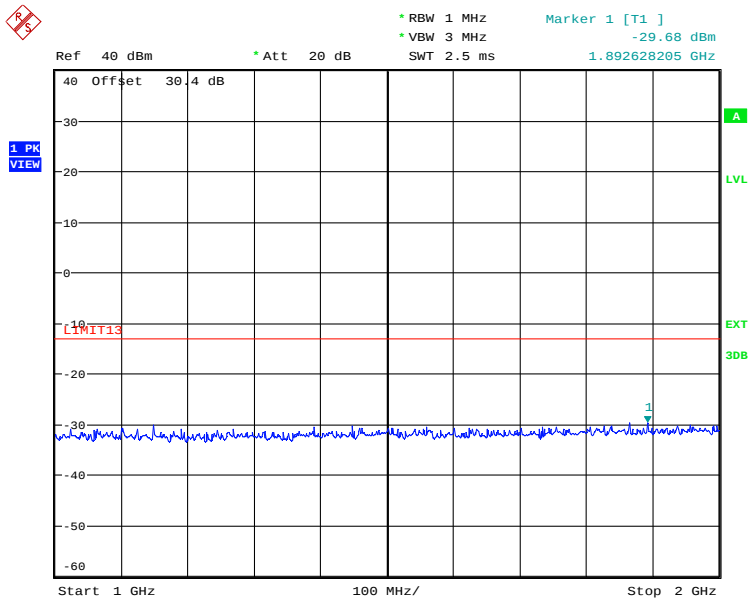

Date: 16.DEC.2024 15:44:56


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.5.3.4. Configuration: Tx Conducted, CH 88 157.425MHz, 25 KHz, Low power

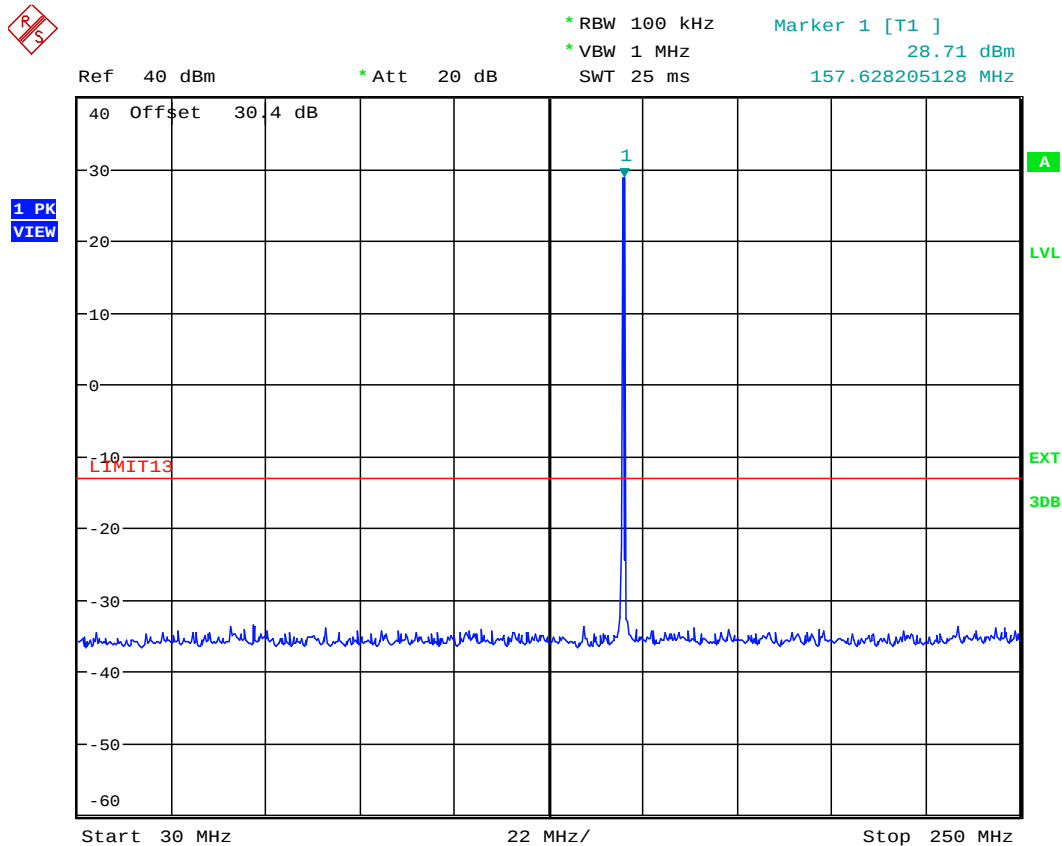

Date: 16.DEC.2024 15:48:46

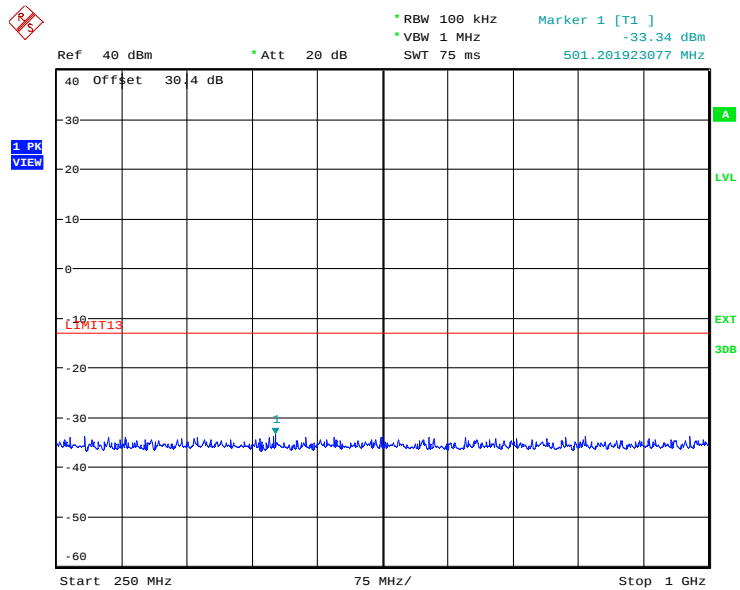

Date: 16.DEC.2024 15:49:41

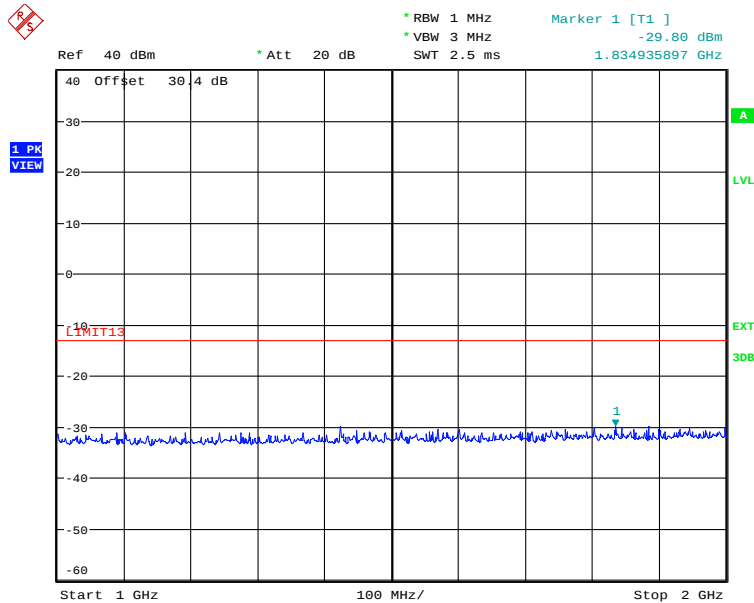

Date: 16.DEC.2024 15:50:27

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§ 80.211(f)(3)] [RSS-182, SECTION 5.9]

5.6.1. Limits

§ 80.211 (f)(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.

[RSS-182, SECTION 5.9]

Equipment with 25 kHz channel spacing shall comply with emission mask B. Radio equipment with 12.5 kHz channel spacing, with or without an audio low-pass filter, shall comply with emission mask C.

5.6.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in 8.2 of this report and its value in dBc is calculated as follows:

- (1) If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
- (2) If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:
Lowest ERP of the carrier = EIRP – 2.15 dB = $P_c + G - 2.15 \text{ dB} = P_c \text{ dBm (conducted)} + 0 \text{ dBi} - 2.15 \text{ dB}$

5.6.3. Test Data

Remarks:

- The radiated emissions were performed with high power setting and 25 kHz channel spacing at 3 m distance to represent the worst-case test configuration.
- The emissions were scanned from 30 MHz to 2 GHz; all significant emissions were recorded.

Carrier Frequency:		156.050 MHz				
Power:		High				
Limit:		-13.0 dBm				
Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP (dBm)	Limit (dBm)	Margin (dB)
* All harmonics and spurious emissions are more than 20 dB below the specified attenuation limit.						

Carrier Frequency:		157.425MHz				
Power:		High				
Limit:		-13.0 dBm				
Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP (dBm)	Limit (dBm)	Margin (dB)
* All harmonics and spurious emissions are more than 20 dB below the specified attenuation limit.						

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7. FREQUENCY STABILITY [§§ 2.1055 & 80.209] [RSS-182, SECTION 5.5]

5.7.1. Limits

Frequency Band	Coast Stations		Ship Stations
	Below 3 W	3 to 100 W	
156–162 MHz	10 ppm	¹ 5 ppm	² 10 ppm

¹ For transmitters operated at private coast stations with antenna heights less than 6 meters (20 feet) above ground and output power of 225 Watts or less the frequency tolerance is 10 parts in 10^6 .

² For transmitters in the radiolocation and associated telecommand service operating on 154.585 MHz, 159.480 MHz, 160.725 MHz and 160.785 MHz the frequency tolerance is 15 parts in 10^6 .

[RSS-182, SECTION 5.5]

With the exception of DSC emissions, the RF carrier frequency shall not depart from the reference frequency in excess of the limits listed in Table 2.

RSS-182, Table 2 - Frequency Stability Limits

Type of Equipment	Frequency Stability Limit
Coast station	± 10.0 ppm for transmitter power less than 3 watts ± 5.0 ppm for transmitter power between 3 and 50 watts
Ship station	± 10 ppm

5.7.2. Method of Measurements

Refer to Section 8.3 of this report for measurement details

5.7.3. Test Data

Center Frequency:		156.050 MHz	
Full Power Level:		4.65 W	
Frequency Tolerance Limit (Worst Case):		±10 ppm or 1560.5 Hz	
Max. Frequency Tolerance Measured:		-93 Hz or 0.60 ppm	
Input Voltage Rating:		3.7 VDC	
Ambient Temperature (°C)	Frequency Drift (Hz)		
	Supply Voltage (Nominal) 3.7 Volts	Supply Voltage (Battery end point) 3.2 Volts	Supply Voltage (115% of Nominal) 4.255 Volts
-30	71	--	--
-20	48	--	--
-10	57	--	--
0	58	--	--
10	56	--	--
20	37	-93	48
30	45	--	--
40	40	--	--
50	30	--	--
60	32	--	--

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8. SUPPRESSION OF INTERFERENCE ABOARD SHIPS [§ FCC 80.217]

5.8.1. Limits

(a) A voluntarily equipped ship station receiver must not cause harmful interference to any receiver required by statute or treaty.

(b) The electromagnetic field from receivers required by statute or treaty must not exceed the following value at a distance over sea water of one nautical mile from the receiver:

or

Deliver not more than the following amounts of power, to an artificial antenna having electrical characteristics equivalent to those of the average receiving antenna(s) use on shipboard:


Frequency of interfering emissions	Field intensity in microvolts per meter	Power to artificial antenna in	
		MicroWatts	dBm
< 30 MHz	0.1	400	-3.98
30-100 MHz	0.3	4000	6.02
100-300 MHz	1.0	40000	16.02
>300 MHz	3.0	400000	26.02

5.8.2. Method of Measurements


Refer to ANSI C63.4.

5.8.3. Test Data

5.8.3.1. Configuration: Rx Conducted, CH 01A, 156.050MHz

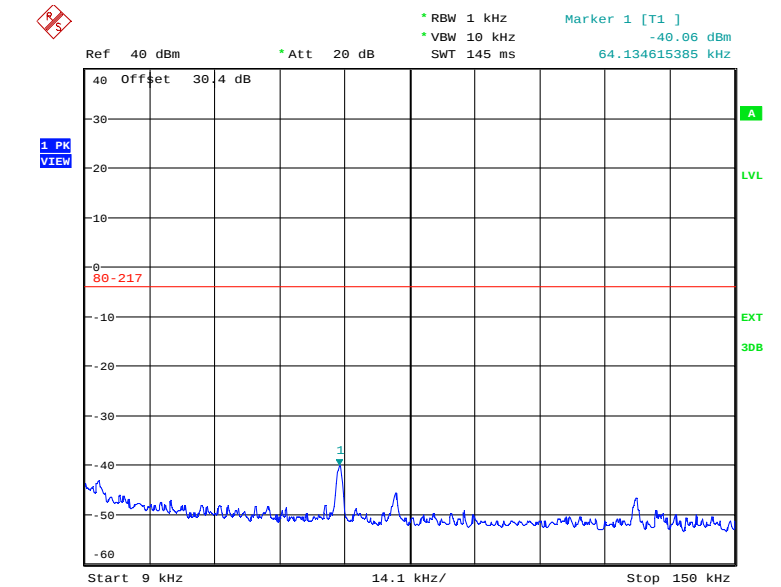

Date: 16.DEC.2024 16:02:05

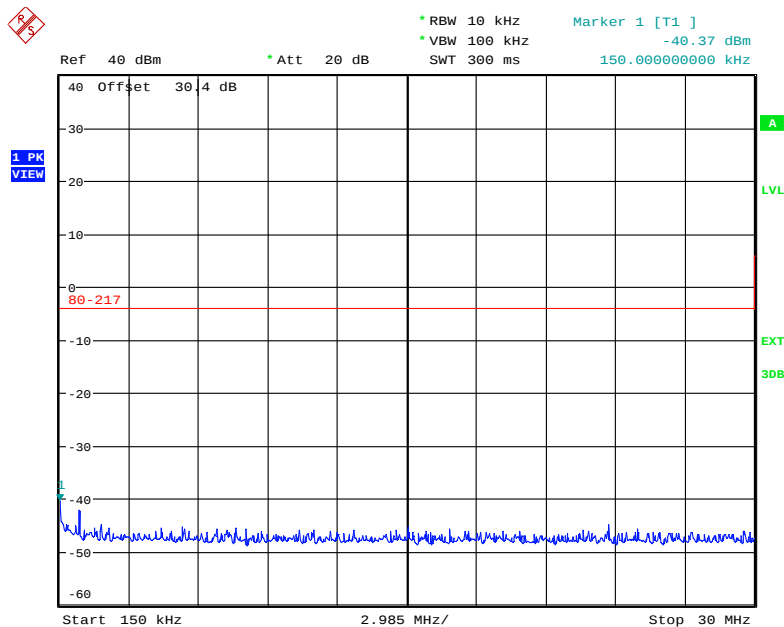


Date: 16.DEC.2024 16:04:14

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

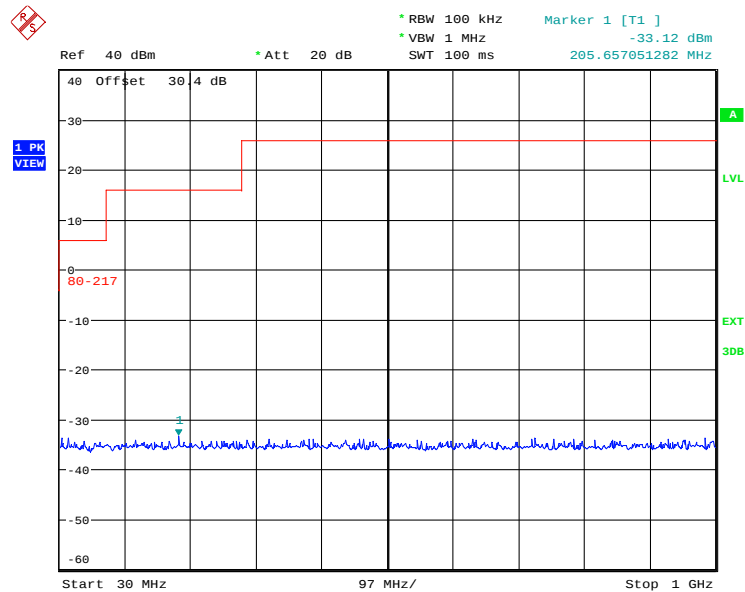

Date: 16.DEC.2024 16:05:49

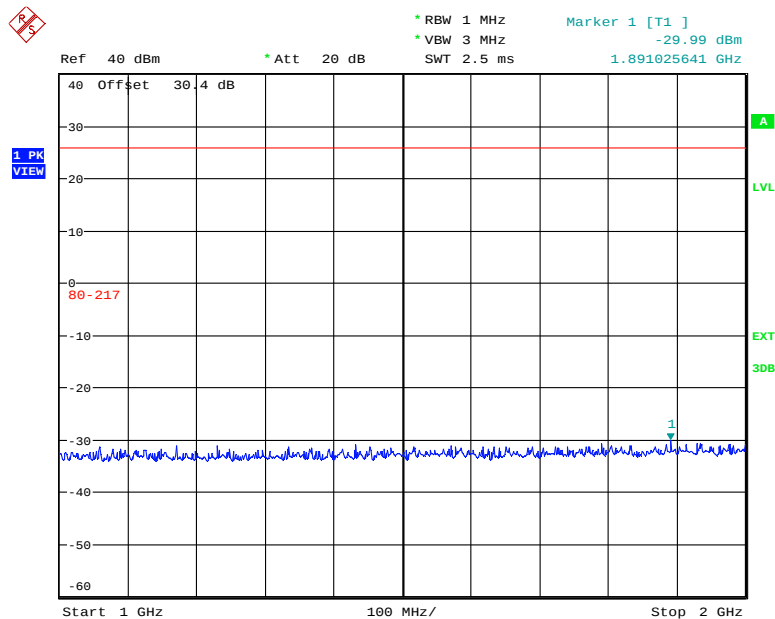

Date: 16.DEC.2024 16:13:37


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.2. Configuration: Rx Conducted, CH Wx 10, 163.275MHz

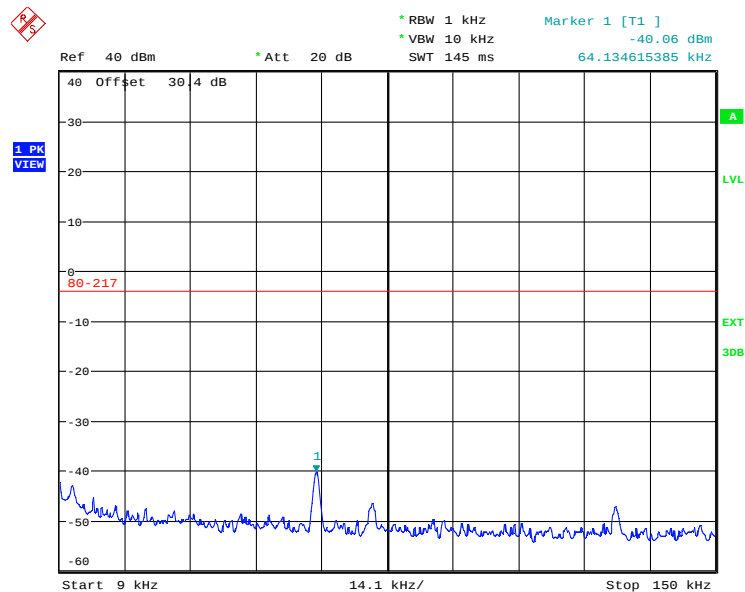

Date: 16.DEC.2024 16:19:11

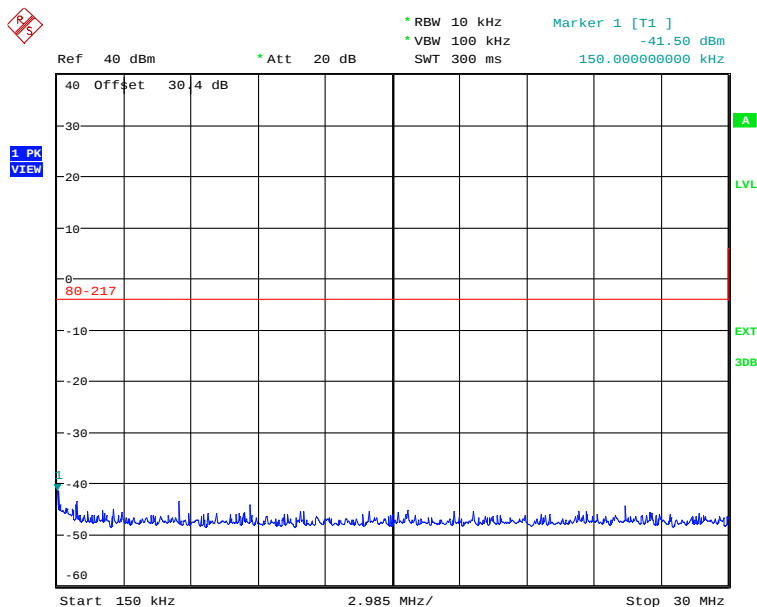


Date: 16.DEC.2024 16:21:21

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

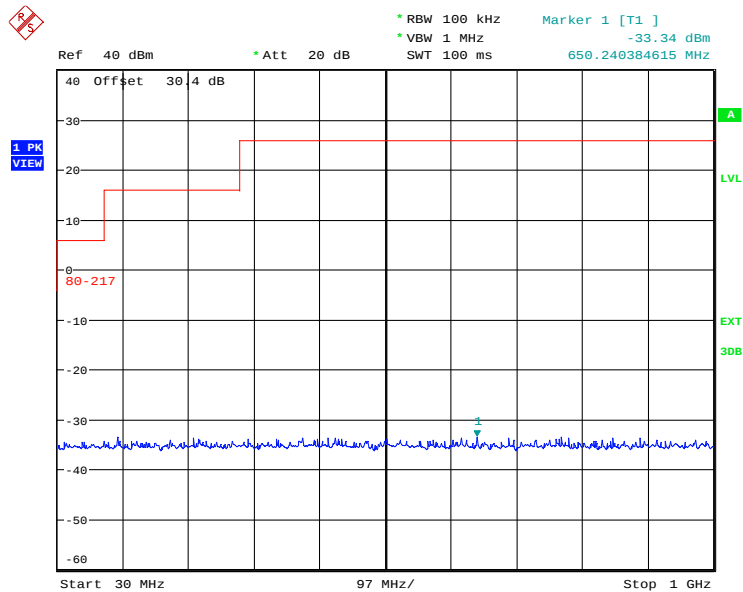

Date: 16.DEC.2024 16:23:18

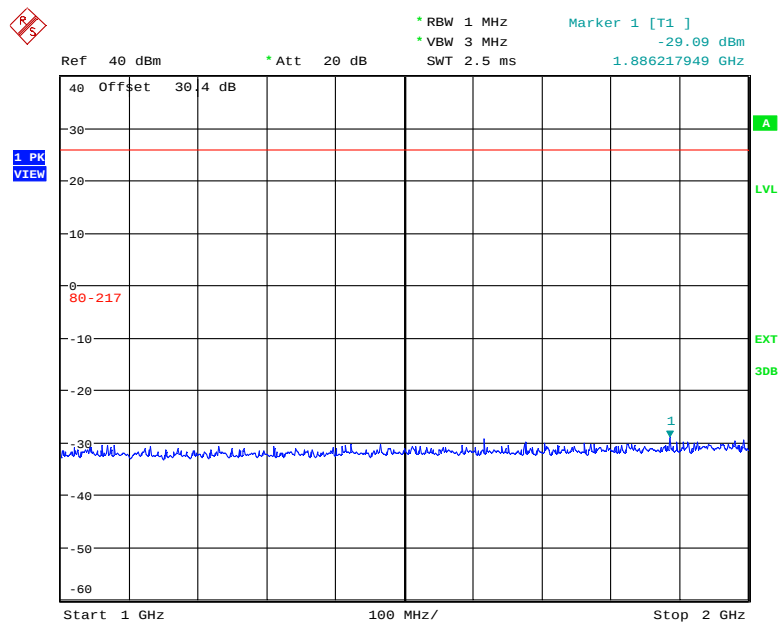

Date: 16.DEC.2024 16:25:09

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9. RECEIVER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [RSS-Gen §§ 7.4]

5.9.1. Limits


No spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

5.9.2. Method of Measurements

Refer to Industry Canada RSS-Gen and ANSI C63.4.

5.9.3. Test Data

5.9.3.1. Configuration: Rx Conducted, CH 01A, 156.050MHz

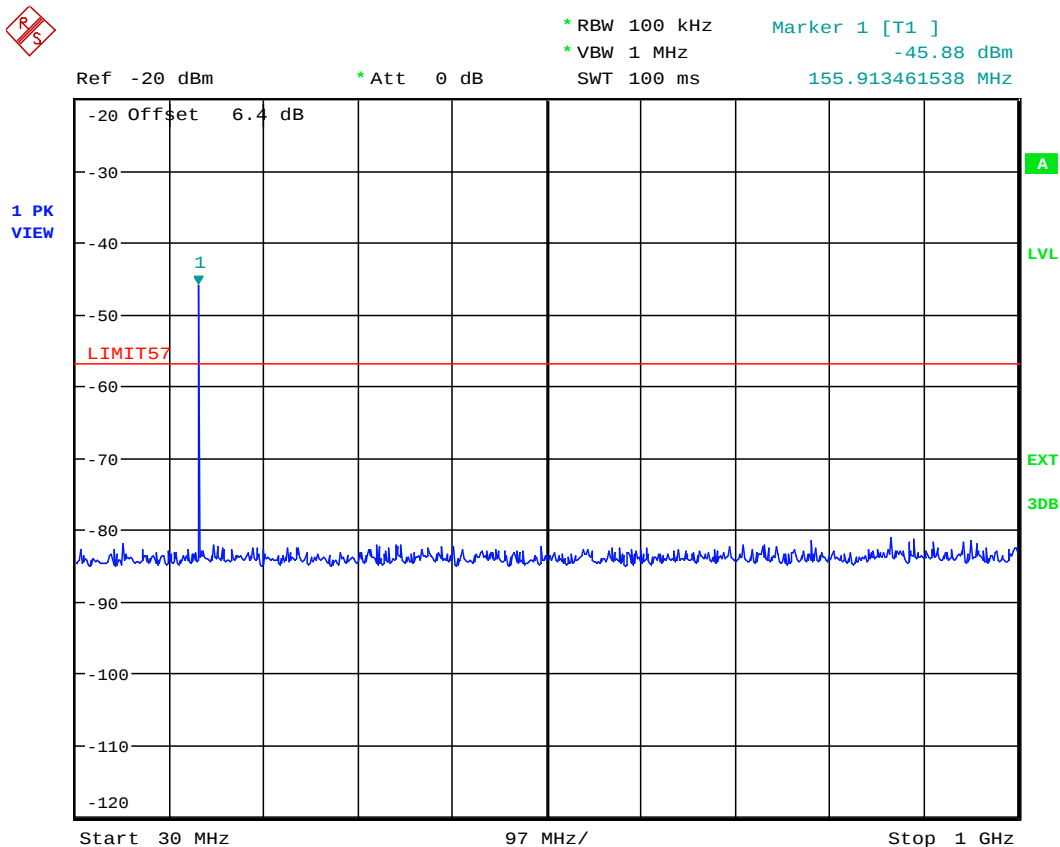

Date: 12.DEC.2024 19:33:28


Highest peak is Rx Signal input (1mV rms)

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

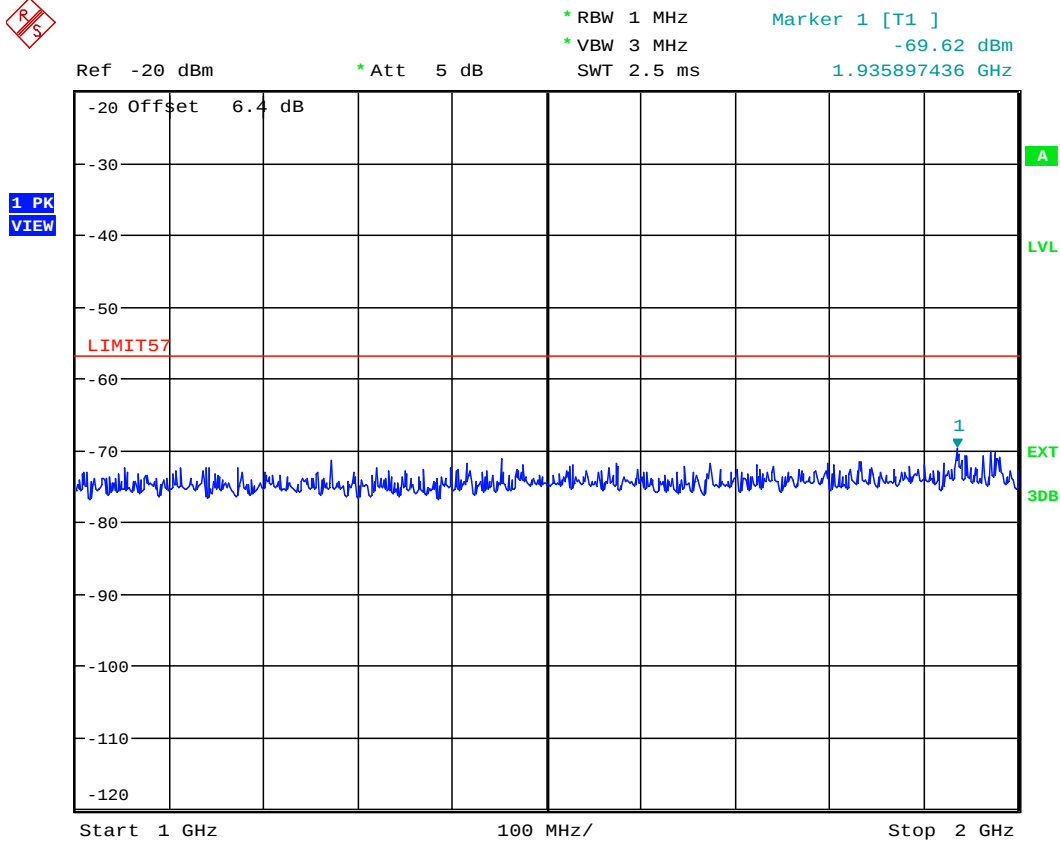


Date: 13.DEC.2024 16:21:45

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

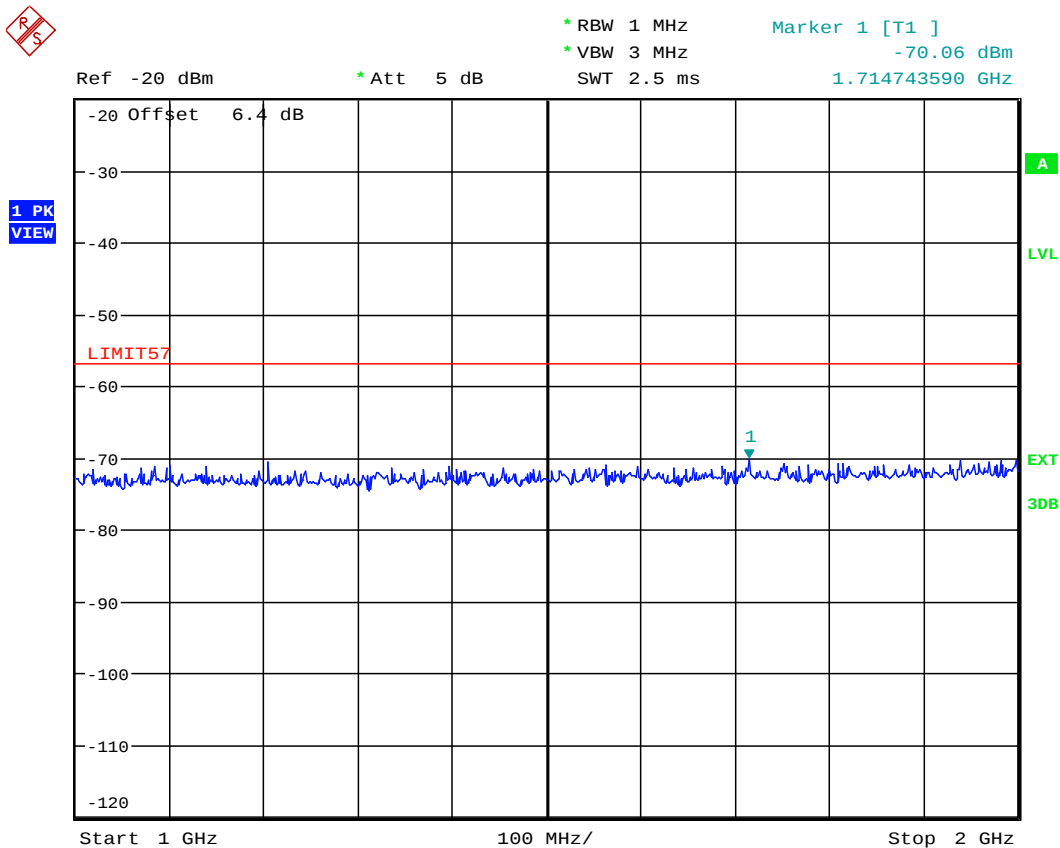

Date: 13.DEC.2024 16:27:19

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.10. RECEIVER SPURIOUS EMISSIONS (RADIATED) [RSS-Gen §§ 7.3]

5.10.1. Limits

The equipment shall meet the limits of the following table:

Spurious Frequency (MHz)	Field Strength at 3 meters	
	($\mu\text{V/m}$)	(dB $\mu\text{V/m}$)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

5.10.2. Method of Measurements

RSS-Gen and ANSI C63.4

5.10.3. Test Data

(IF= 21.7 MHz)

- The measuring receiver shall be tuned over the frequency range 30 MHz to 2 GHz.
- All spurious emissions that are in excess of 20 dB below the specified limit shall be recorded.

Test Frequency (MHz)	Frequency (MHz)	Peak Measurement dBuV/m		QP/Avg Measurement dBuV/m		Limit	Margin (dB)	
		Vertical	Horizontal	Vertical	Horizontal		Vertical	Horizontal
156.050 (CH 01A)	403.050	28.47	30.19	--	--	46.02	-17.55	-15.83
163.275 (WX 10)	424.725	27.58	27.23	--	--	46.02	-18.44	-18.79

5.11. POWERLINE CONDUCTED Emissions [ICES-003]

Limits

The equipment shall meet the limits of the following table:

Test Frequency Range (MHz)	CLASS B LIMITS		Measuring Bandwidth
	Quasi-Peak (dB μ V)	Average* (dB μ V)	
0.15 to 0.5	66 to 56*	56 to 46*	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 10 Hz for Average
0.5 to 5	56	46	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 10 Hz for Average
5 to 30	60	50	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 10 Hz for Average

* Decreasing linearly with logarithm of frequency

Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.

Calculation of Conducted Emission Voltage (dB μ V):

This is calculated by adding the L.I.S.N factor, Cable loss factor, and Attenuator factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{Voltage (dB}\mu\text{V)} = \text{RA} + \text{AF} + \text{CF} + \text{LF}$$


Where

RA	=	Receiver/Analyzer Reading in dB μ V
AF	=	Attenuation Factor in dB
CF	=	Cable loss Factor in dB
LF	=	L.I.S.N Factor in dB

Test Results

The emissions were scanned from 150 kHz to 30 MHz at mains Terminal via a LISN, and all emissions less than 20 dB below the limits were recorded.

Description: Line Voltage:120Vac
Setup Name: FCC 15 Class B
Customer Name: ICOM
Project Number: ICOM-622Q
Operator Name: Angus
EUT Name: IC-M25

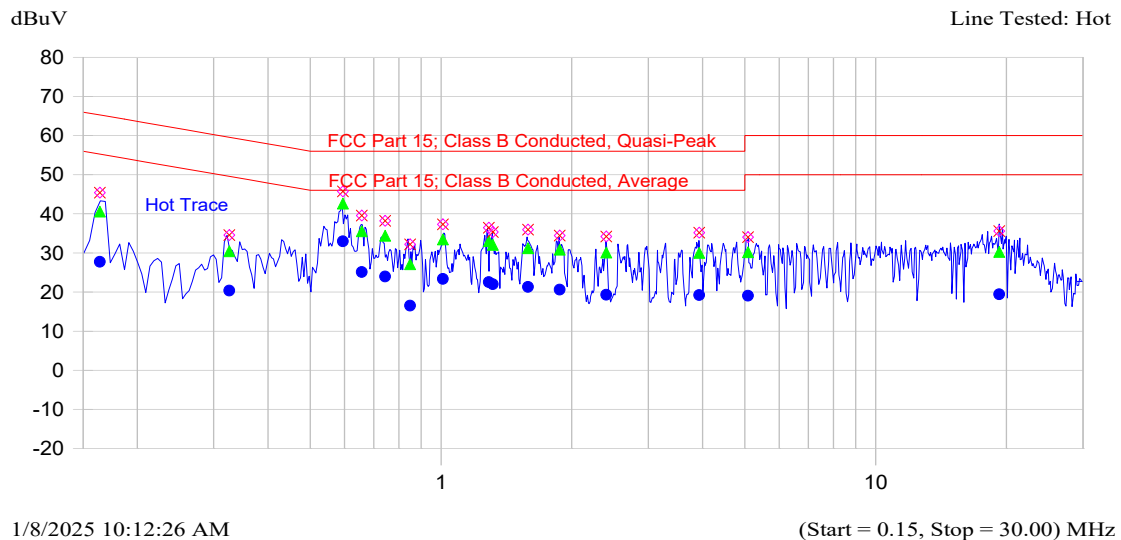

Frequency MHz	Peak dBuV	QP dBuV	QP-QP Limit dB	Avg dBuV	Avg-Avg Limit dB	Trace Name
0.594	45.7	42.6	-13.4	32.9	-13.1	Hot Trace
0.657	39.5	35.5	-20.5	25.1	-20.9	Hot Trace
0.744	38.2	34.4	-21.6	23.9	-22.1	Hot Trace
0.849	32.2	27.1	-28.9	16.5	-29.5	Hot Trace
1.010	37.3	33.5	-22.5	23.3	-22.7	Hot Trace
1.288	36.4	33.0	-23.0	22.5	-23.5	Hot Trace
1.317	35.3	32.1	-23.9	22.0	-24.0	Hot Trace
1.584	35.9	31.2	-24.8	21.3	-24.7	Hot Trace
1.875	34.4	30.8	-25.2	20.6	-25.4	Hot Trace
2.400	34.2	30.1	-25.9	19.3	-26.7	Hot Trace
3.926	35.2	30.0	-26.0	19.2	-26.8	Hot Trace
5.082	34.0	30.2	-29.8	19.1	-30.9	Hot Trace
19.256	35.6	30.2	-29.8	19.4	-30.6	Hot Trace


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Description: Line Voltage: 120Vac
Setup Name: FCC 15 Class B
Customer Name: ICOM
Project Number: ICOM-622Q
Operator Name: Angus
EUT Name: IC-M25

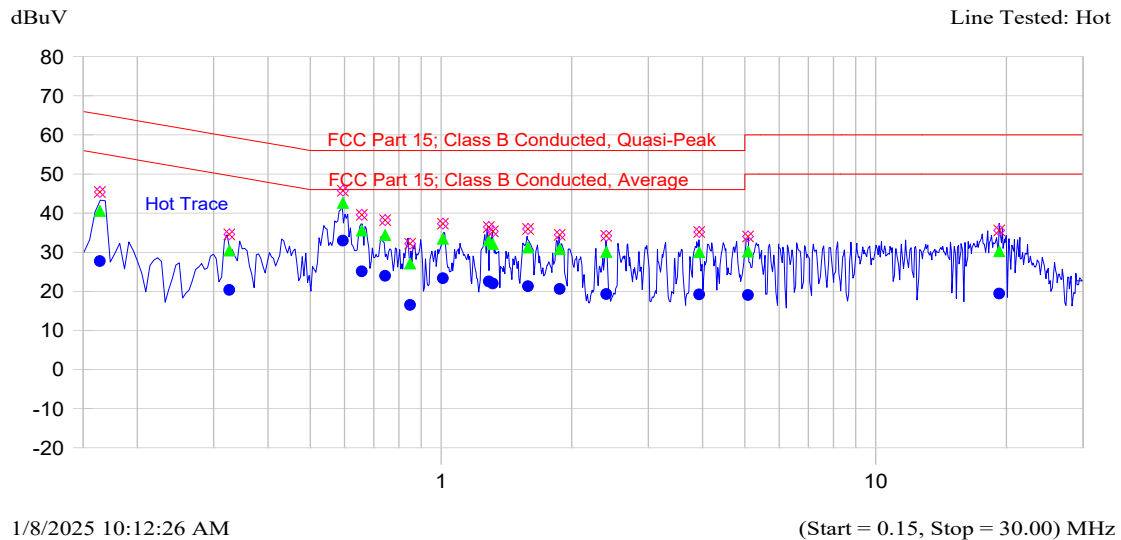

Frequency MHz	Peak dBuV	QP dBuV	QP-QP Limit dB	Avg dBuV	Avg-Avg Limit dB	Trace Name
0.164	45.4	40.6	-24.7	27.7	-27.5	Hot Trace
0.326	34.5	30.4	-29.1	20.4	-29.2	Hot Trace
0.594	45.7	42.6	-13.4	32.9	-13.1	Hot Trace
0.657	39.5	35.5	-20.5	25.1	-20.9	Hot Trace
0.744	38.2	34.4	-21.6	23.9	-22.1	Hot Trace
0.849	32.2	27.1	-28.9	16.5	-29.5	Hot Trace
1.010	37.3	33.5	-22.5	23.3	-22.7	Hot Trace
1.288	36.4	33.0	-23.0	22.5	-23.5	Hot Trace
1.317	35.3	32.1	-23.9	22.0	-24.0	Hot Trace
1.584	35.9	31.2	-24.8	21.3	-24.7	Hot Trace
1.875	34.4	30.8	-25.2	20.6	-25.4	Hot Trace
2.400	34.2	30.1	-25.9	19.3	-26.7	Hot Trace
3.926	35.2	30.0	-26.0	19.2	-26.8	Hot Trace
5.082	34.0	30.2	-29.8	19.1	-30.9	Hot Trace
19.256	35.6	30.2	-29.8	19.4	-30.6	Hot Trace

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.12. RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS [ICES-003]

5.12.1. Limits

The equipment shall meet the limits of the following table:

Frequency of emission (MHz)	ICES-Class B Limits*		FCC Part 15 B -Class B Limits*	
	(dB μ V/m at 3 m)	(dB μ V/m at 10 m)	(dB μ V/m at 3 m)	(dB μ V/m at 10 m)
30 – 88	40.0	30	40.0	29.5
88 – 216	43.5	33.1	43.5	33.1
216-230	46	35.6	46	35.6
230 – 960	47	37		
Above 960	54.0	43.5	54.0	43.5

*below 1000 MHz limits are in QP, above 1GHz limits are average with peaks not to exceed 20dB above this

5.12.2. Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.

5.12.3. Test Data

- The measuring receiver shall be tuned over the frequency range 30 MHz to 6 GHz.
- All emissions that are in excess of 20 dB below the specified limit shall be recorded.

Frequency (MHz)	Peak Measurement dBuV/m		QP/Avg Measurement dBuV/m		Limit (MHz)	Margin (dB)	
	Vertical	Horizontal	Vertical	Horizontal		Vertical	Horizontal
40.88	30.27	--	--	--	40	-9.73	--
65.75	--	23.53	--	--	40	--	-16.47
120.16	32.99	26.63	--	--	43.5	-10.51	-16.87
134.15	36.69	32.62	--	--	43.5	-6.81	-10.88
165.24	31.74	--	--	--	43.5	-11.76	--
230.52	--	25.91	--	--	46	--	-20.09
267.83	34.37	--	--	--	46	-11.63	--

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 6. TEST EQUIPMENT LIST AND SETUP

6.1. Conducted Power

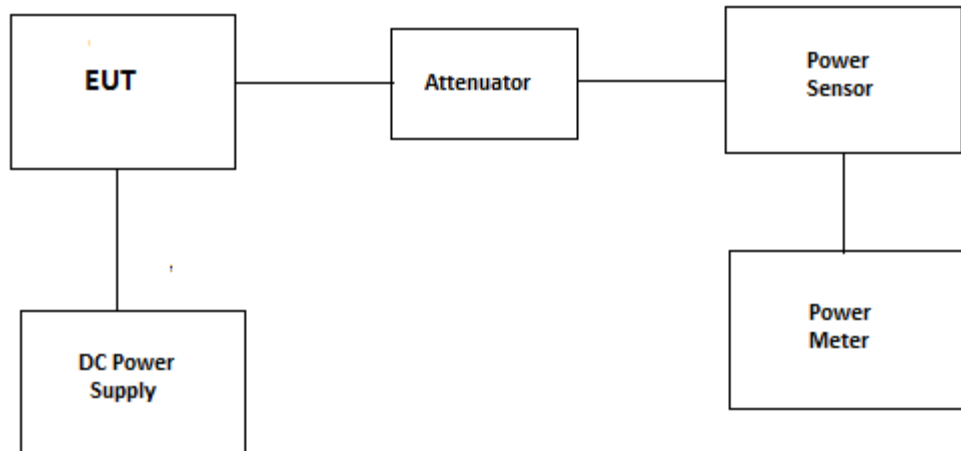

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Power Meter	HP	436A	2709A27515	100KHz-sensor dependant	17-Sep-2025
Power Sensor	HP	8482A	MY41172054	10MHz-4.2GHz	07-Nov-2025
Attenuator	Aeroflex>Weinschel	48-30-34	BM5354	DC-18GHz	Cal on use
Power Supply	HQ Power	PS613U	-	0-30Vdc	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.2. Modulation Limit

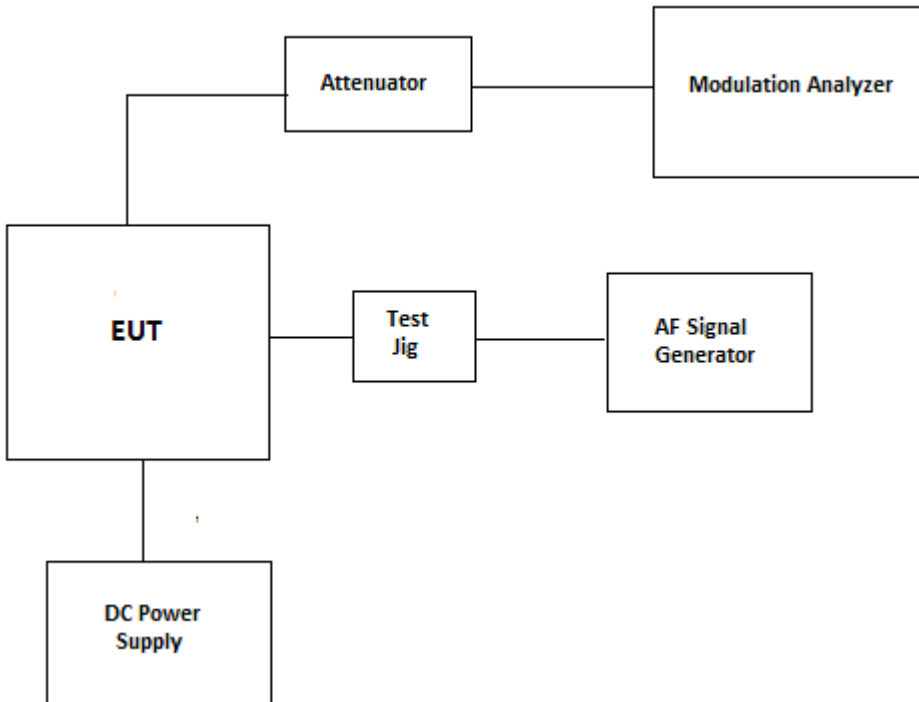

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	22-Apr-2026
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	22-Apr-2026
Digital Voltmeter	HP	3456A	2015A04523	--	09-Feb-2026
Attenuator	Aeroflex\Weinschel	48-30-34	BM5354	DC-18GHz	Cal on use
Power Supply	HQ Power	PS613U	-	0-30Vdc	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.3. Audio Frequency Response

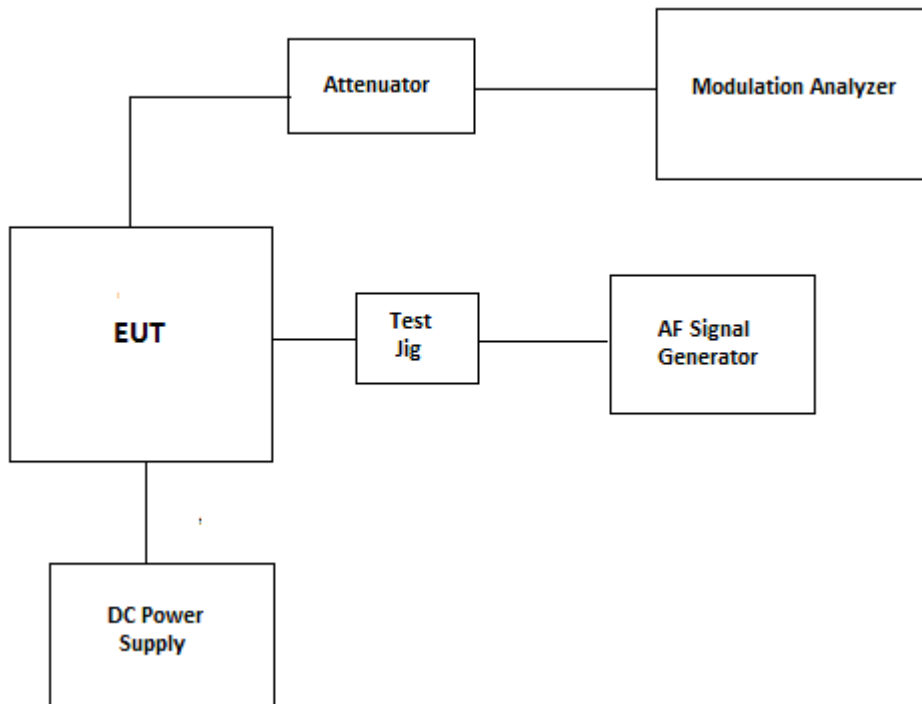

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	22-Apr-2026
Spectrum Analyzer	Omicron Labs	Bode 100	PM453H	1Hz – 50MHz	28-Feb-2026
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	22-Apr-2026
Attenuator	Aeroflex\Weinschel	48-30-34	BM5354	DC-18GHz	Cal on use
Power Supply	HQ Power	PS613U	-	0-30Vdc	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.4. 99% OBW and Mask

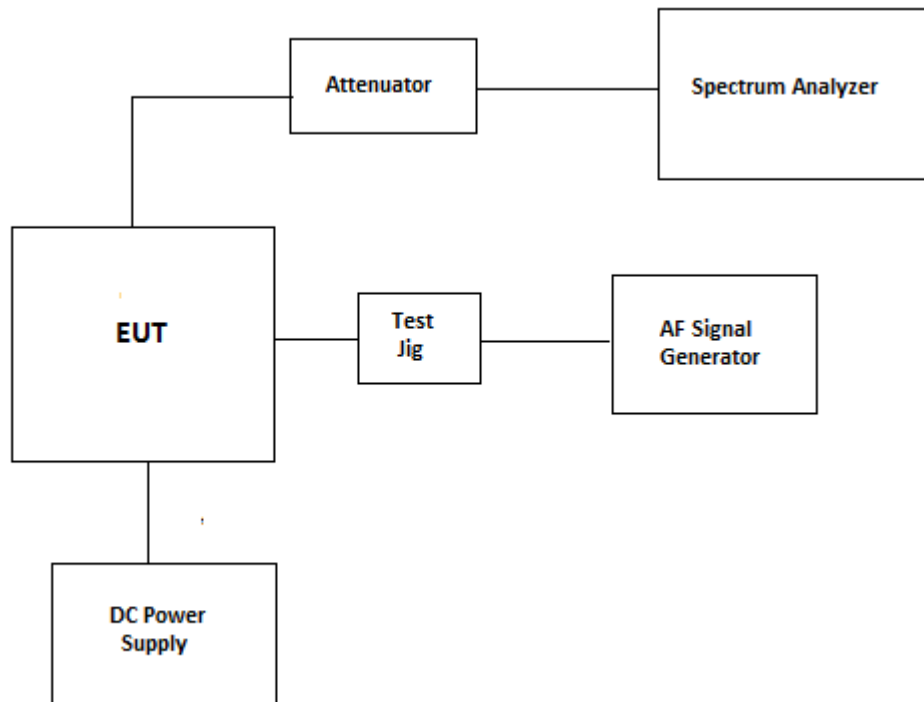

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	22-Apr-2026
Digital Voltmeter	HP	3456A	2015A04523		09-Feb-2026
Attenuator	Aeroflex\Weinschel	48-30-34	BM5354	DC-18GHz	Cal on use
Power Supply	HQ Power	PS613U	-	0-30Vdc	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.5. Tx Conducted Emission

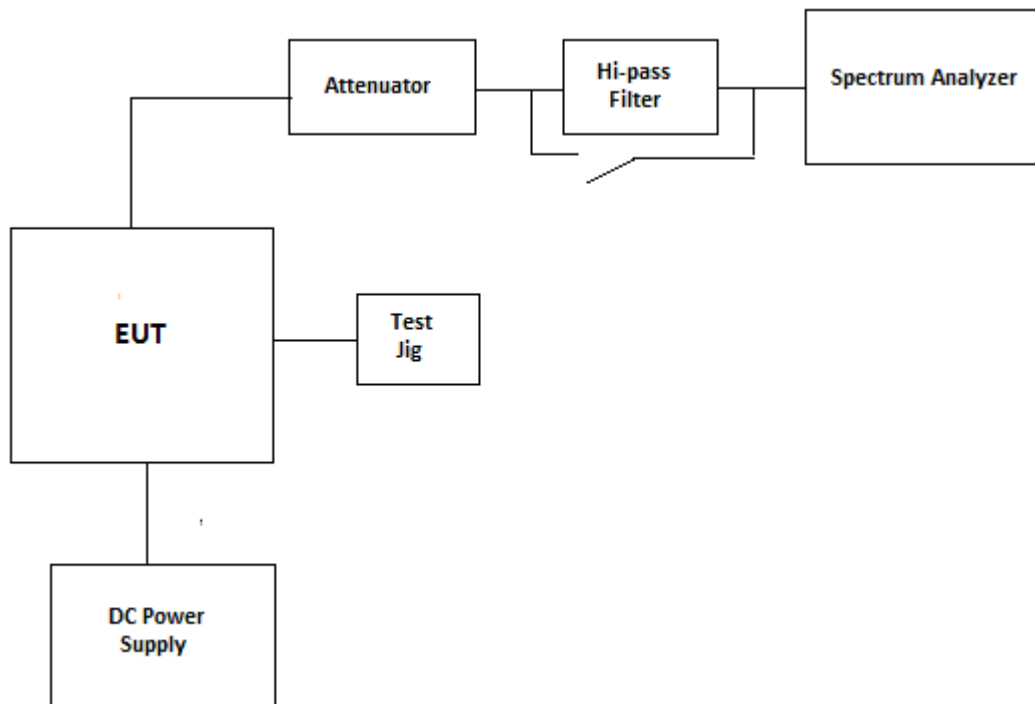

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	22-Apr-2026
Hi-pass filter	Mini-Circuit	SHP-250	--	Cut off 250MHz	Cal on use
Attenuator	Aeroflex\Weinschel	48-30-34	BM5354	DC-18GHz	Cal on use
Power Supply	HQ Power	PS613U	-	0-30Vdc	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.6. Rx Conducted Emission

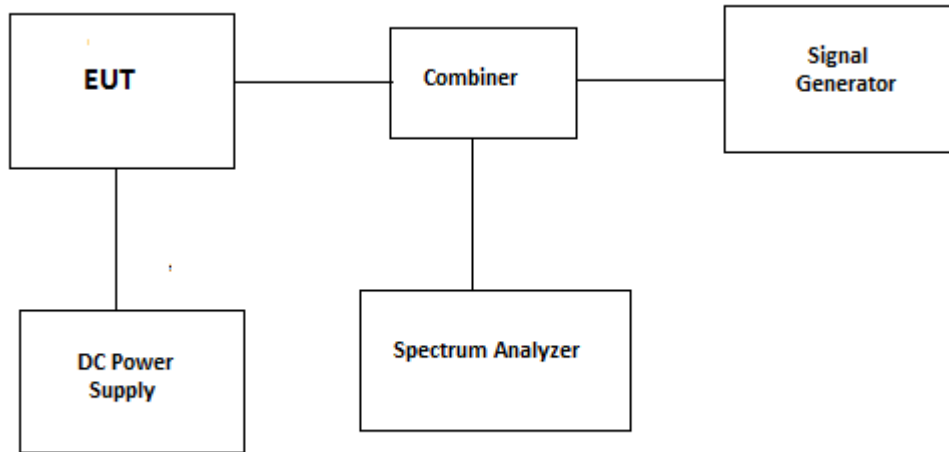

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
Signal Generator	HP	8648C	3537A02098	100KHz-3.2GHz	08-Sep-2025
Combiner	Weinschel 93458	1515	PS119	DC-18GHz	Cal on use
Power Supply	HQ Power	PS613U	-	0-30Vdc	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.7. Suppression of Interference aboard ships

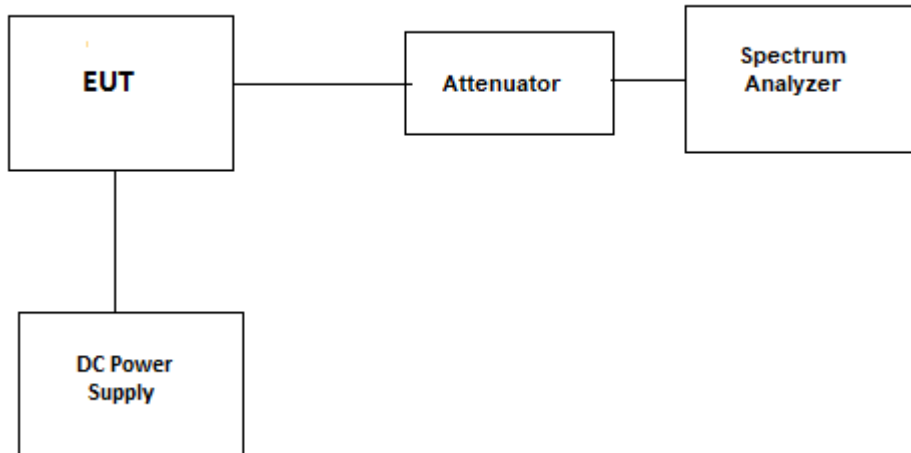

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
Attenuator	Aeroflex\Weinschel	48-30-34	BM5354	DC-18GHz	Cal on use
Power Supply	HQ Power	PS613U	-	0-30Vdc	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.8. TX Radiated

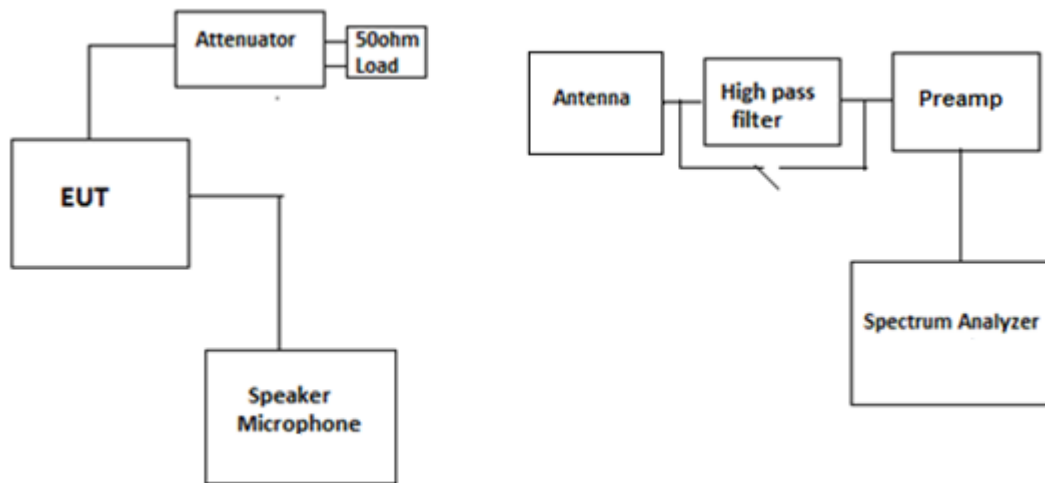

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
Bicon Antenna	ETS	93110B	9906-3319	30-200MHz	28-Aug-2025
Log Periodic Antenna	ETS	93148	1101	200-2000MHz	29-Apr-2026
Horn Antenna	ETS	3117	00119425	1-18GHz	18-Jan-2026
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	20-Feb-2025
Preamplifier	Com-Power	PA-103	161040	1-1000MHz	20-Feb-2025
Hi-pass filter	Mini-Circuit	SHP-250	--	Cut off 250MHz	Cal on use
Attenuator	Aeroflex\Weinschel	48-30-34	BM5354	DC-18GHz	Cal on use
Load(50ohm)	Mini-Circuits	KARN-50+	--	DC-18GHz	Cal on use


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.9. Rx Radiated, Unintentional Radiated

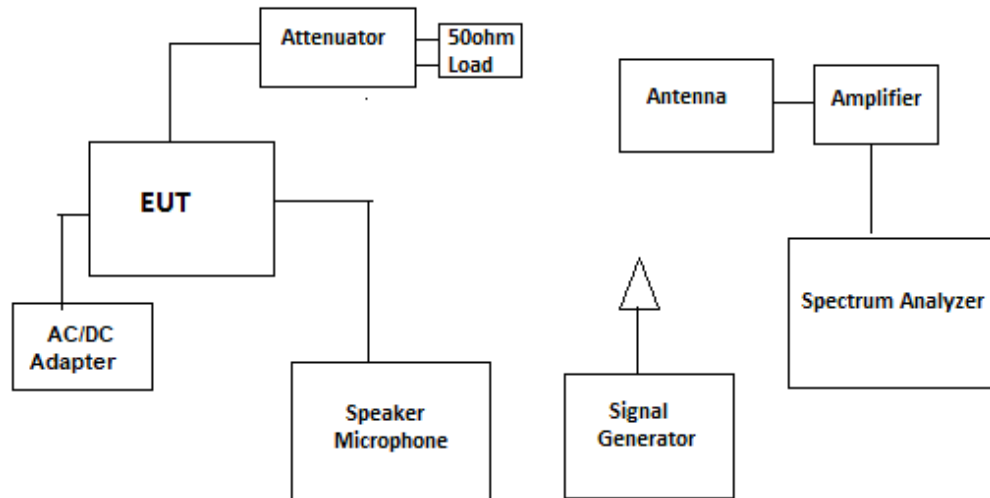

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
EMI Receiver	Rohde & Schwarz	ESU40	100037	20 Hz to 40 GHz	18-Sep-25
Bicon Antenna	ETS	93110B	9906-3319	30-200MHz	28-Aug-2025
Biconilog Antenna	EMCO	3142C	34792	26 – 3000 MHz	16-Dec-25
Log Periodic Antenna	ETS	93148	1101	200-2000MHz	29-Apr-2026
Horn Antenna	ETS	3117	00119425	1-18GHz	18-Jan-2026
Horn Antenna	EMCO	3115	5061	1GHz – 18 GHz	04-Sep-26
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	20-Feb-2025
Preamplifier	Com-Power	PA-103	161040	1-1000MHz	20-Feb-2025
Pre-Amplifier	Com-Power	PAM-118A	550152	500 MHz to 18 GHz	07-Oct-25
Signal Generator	HP	8648C	3537A02098	100KHz-3.2GHz	08-Sep-2025
Attenuator	Aeroflex\Weinschel	48-30-34	BM5354	DC-18GHz	Cal on use
Load(50ohm)	Mini-Circuits	KARN-50+	--	DC-18GHz	Cal on use


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.10. Frequency Stability

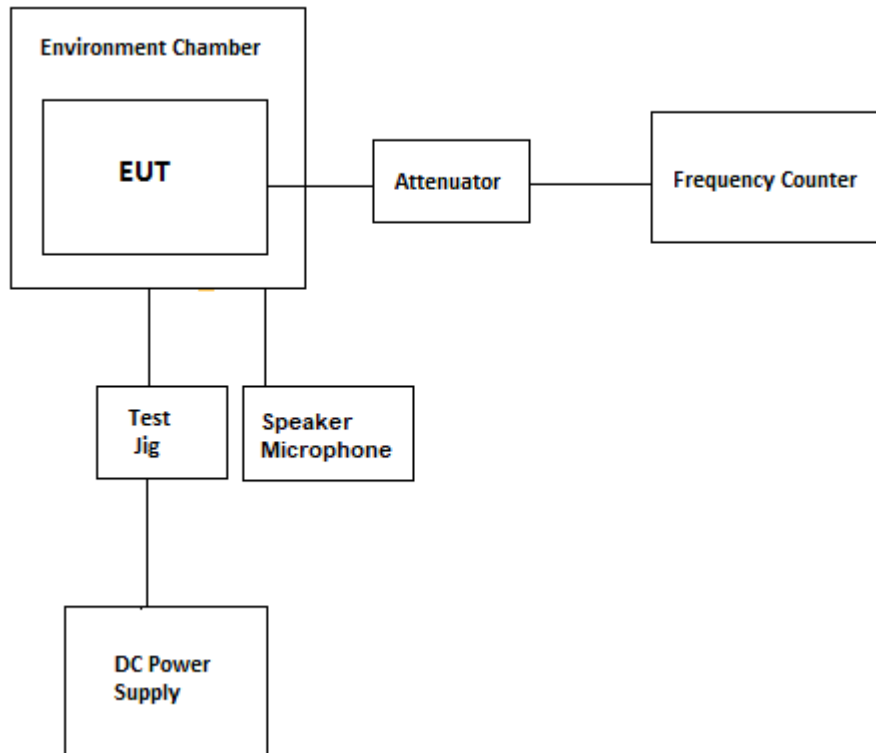

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Environmental Chamber	Envirotronics	SSH32C	11994847-S-11059	-60 to 177° C	29-Aug-2025
Frequency Counter	HP	5352B	3049A04423		29-Nov-2026
Attenuator	Aeroflex\Weinschel	48-30-34	BM5354	DC-18GHz	Cal on use
Power Supply	HQ Power	PS613U	-	0-30Vdc	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11. Power Line Conducted Emissions

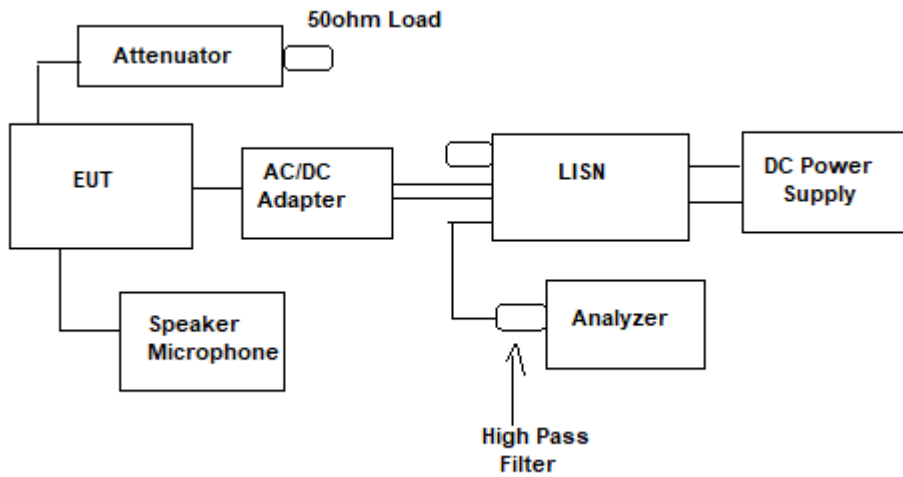

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Agilent	E7401A	US4024032	9kHz - 1.5GHz	19-Nov-2025
Highpass Filter	Rohde & Schwarz	EZ-25	830164/007	150kHz – 30MHz	04-Sep-2025
LISN	Schwarzbeck	NSLK 8127	8127276	9kHz - 30MHz	13-Dec-2025
Attenuator	Weinschel	24-20-34	BK2804	DC - 18GHz	Cal on use

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT UNCERTAINTY

Test description		Uncertainty
Conducted Output Power		+/- 0.62 dB
Occupied bandwidth		+/-0.2Hz
Emission Mask	Amplitude	+/- 0.63 dB
	Frequency	+/-0.2Hz
Conducted Out of Band/Spurious Emissions		+/- 0.72 dB
Radiated Out of Band/Spurious Emissions	<30 MHz	+/-2.69dB
	30-1000 MHz	+/-4.20dB
	>1 GHz	+/-2.70dB
Frequency Stability		+/-1.2 Hz
Power Line Conducted Emission		+ 2.62dB

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 25ICOM622_FCC80
January 13, 2025

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 8. MEASUREMENT METHODS

8.1. CONDUCTED POWER MEASUREMENTS

The following shall be applied to the combination(s) of the radio device and its intended antenna(e).

- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
 - The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
 - The measurement shall be performed using normal operation of the equipment with modulation.
- Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = A + G + 10\log(1/x)$$

{ $X = 1$ for continuous transmission $\Rightarrow 10\log(1/x) = 0 \text{ dB}$ }

Figure 1.

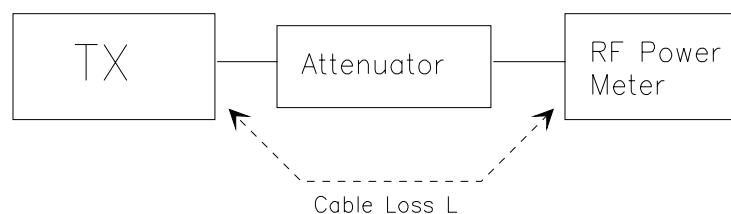

8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

8.2.1. Maximizing RF Emission Level (E-Field)

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency
Resolution BW: 100 kHz
Video BW: same
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source
Resolution BW: 100 kHz
Video BW: VBW > RBW
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
♦ DIPOLE antenna for frequency from 30-1000 MHz or
♦ HORN antenna for frequency above 1 GHz }.
(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
(f) Use one of the following antenna as a receiving antenna:
♦ DIPOLE antenna for frequency from 30-1000 MHz or
♦ HORN antenna for frequency above 1 GHz }.
(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
(i) Tune the EMI Receivers to the test frequency.
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.
P1: Power output from the signal generator
P2: Power measured at attenuator A input
P3: Power reading on the Average Power Meter
EIRP: EIRP after correction
ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
(p) Repeat step (d) to (o) for different test frequency
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2


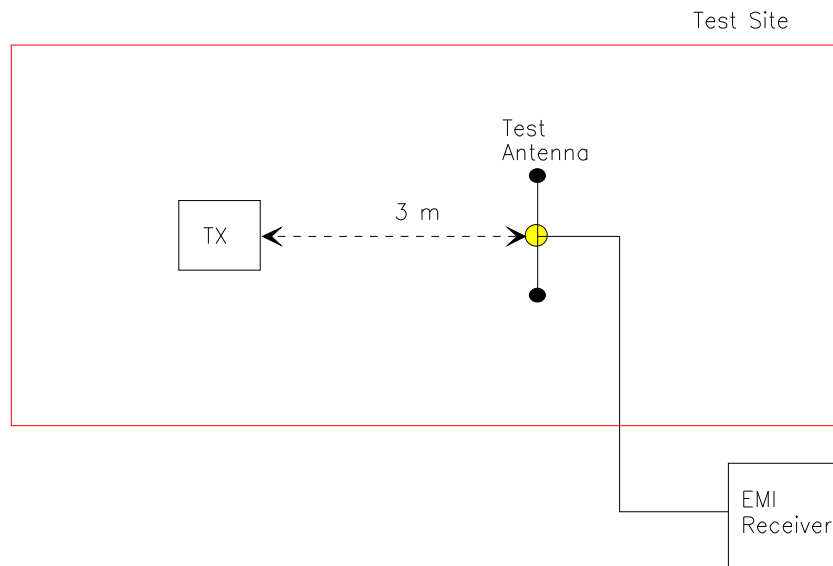


Figure 3

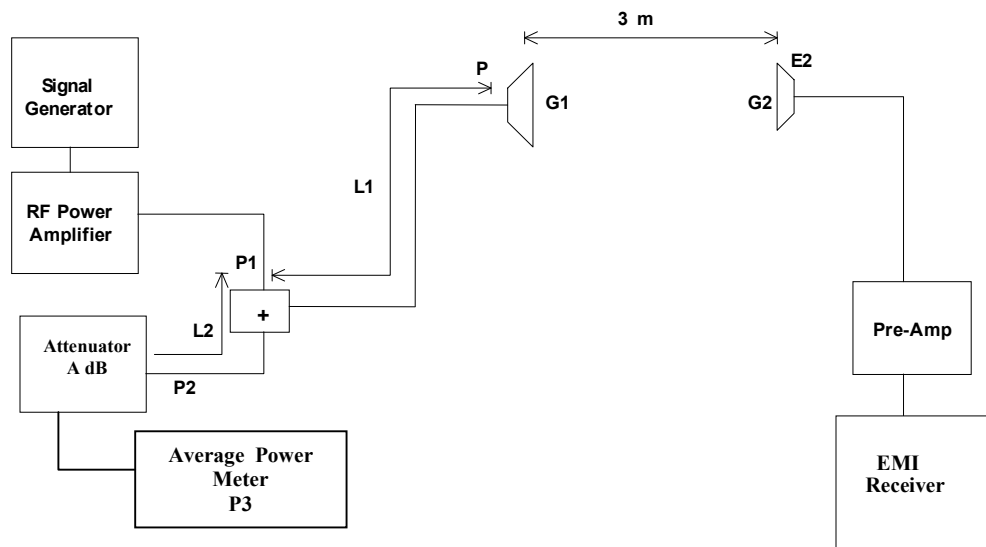

8.3. FREQUENCY STABILITY

Refer to § 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

8.4. EMISSION MASK

Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i): The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ± 2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

Digital Modulation Through a Data Input Port @ 2.1049(h): Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

For 25 kHz Channel Spacing: RBW = 300 Hz

For 12.5 kHz or 6.25 kHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

8.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 kHz minimum, VBW $\geq$ RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

FCC 47 CFR 2.1057 - Frequency Spectrum to be investigated: The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC 47 CFR 2.1051 - Spurious Emissions at Antenna Terminal: The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

END OF REPORT