



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High



	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1210.174	47.36	25.11	2.42	38.67	36.22	74.00	-37.78	HORIZONTAL peak
2	1414.597	47.01	25.82	2.67	38.47	37.03	74.00	-36.97	HORIZONTAL peak
3	4230.396	45.43	30.42	4.55	37.48	42.92	74.00	-31.08	HORIZONTAL peak
4	8082.804	45.40	37.17	6.24	37.39	51.42	74.00	-22.58	HORIZONTAL peak
5	11400.000	44.46	40.92	7.61	42.87	50.12	74.00	-23.88	HORIZONTAL peak
6	17100.000	43.92	42.17	9.45	44.81	50.73	68.20	-17.47	HORIZONTAL peak

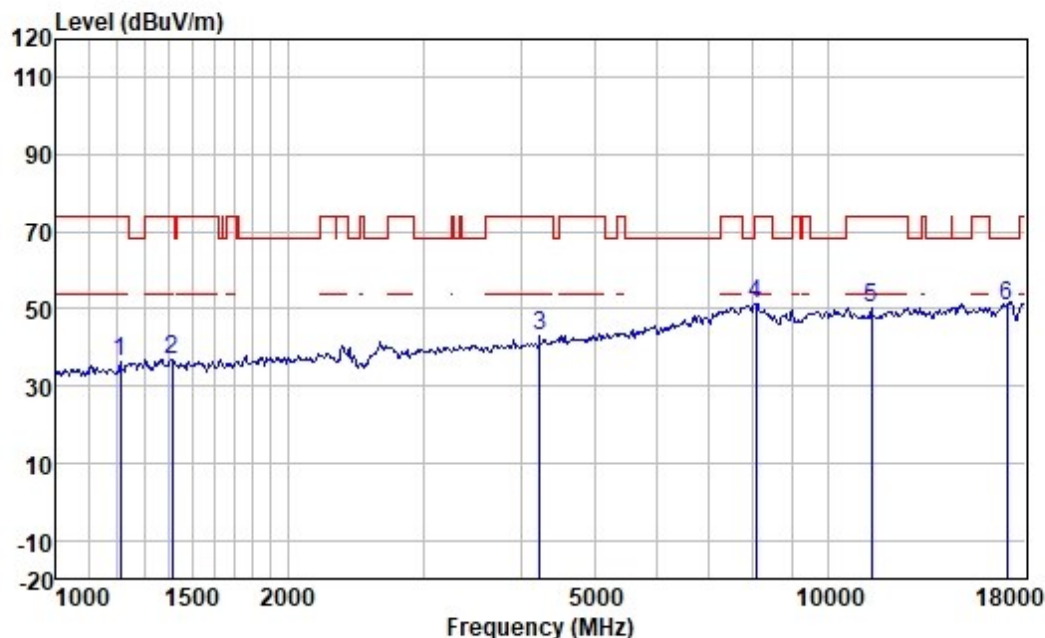


Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

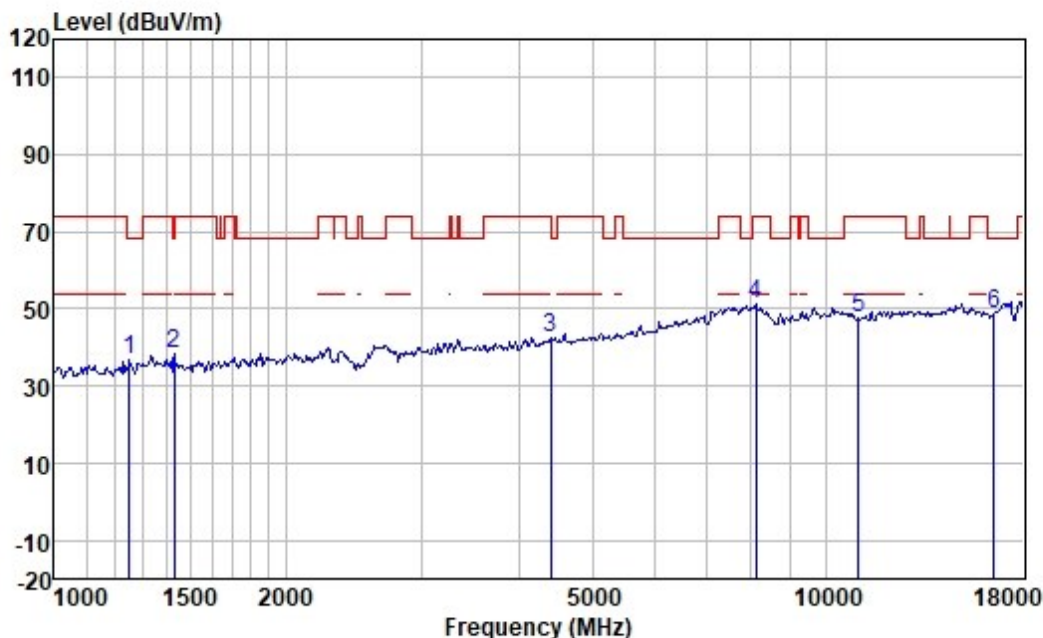

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1252.885	47.32	25.42	2.52	38.63	36.63	68.20	-31.57	VERTICAL	peak
2	1431.047	48.17	25.84	2.67	38.45	38.23	68.20	-29.97	VERTICAL	peak
3	4405.090	44.68	30.80	4.61	37.46	42.63	68.20	-25.57	VERTICAL	peak
4	8129.664	45.31	37.13	6.26	37.48	51.22	74.00	-22.78	VERTICAL	peak
5	11020.000	42.04	40.69	7.52	42.70	47.55	74.00	-26.45	VERTICAL	peak
6	16530.000	43.56	39.57	9.35	43.77	48.71	68.20	-19.49	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

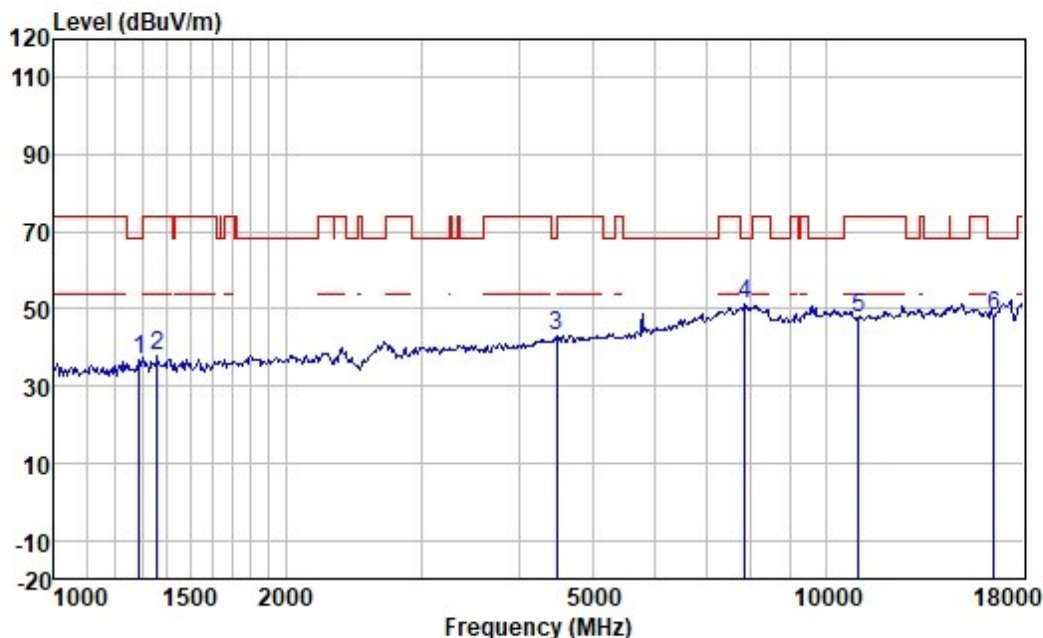

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	47.26	25.56	2.58	38.60	36.80	68.20	-31.40	HORIZONTAL	peak
2	1358.498	47.80	25.73	2.63	38.53	37.63	74.00	-36.37	HORIZONTAL	peak
3	4482.150	44.69	30.90	4.62	37.44	42.77	68.20	-25.43	HORIZONTAL	peak
4	7852.524	45.25	37.11	6.16	37.20	51.32	68.20	-16.88	HORIZONTAL	peak
5	11020.000	42.02	40.69	7.52	42.70	47.53	74.00	-26.47	HORIZONTAL	peak
6	16530.000	43.03	39.57	9.35	43.77	48.18	68.20	-20.02	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

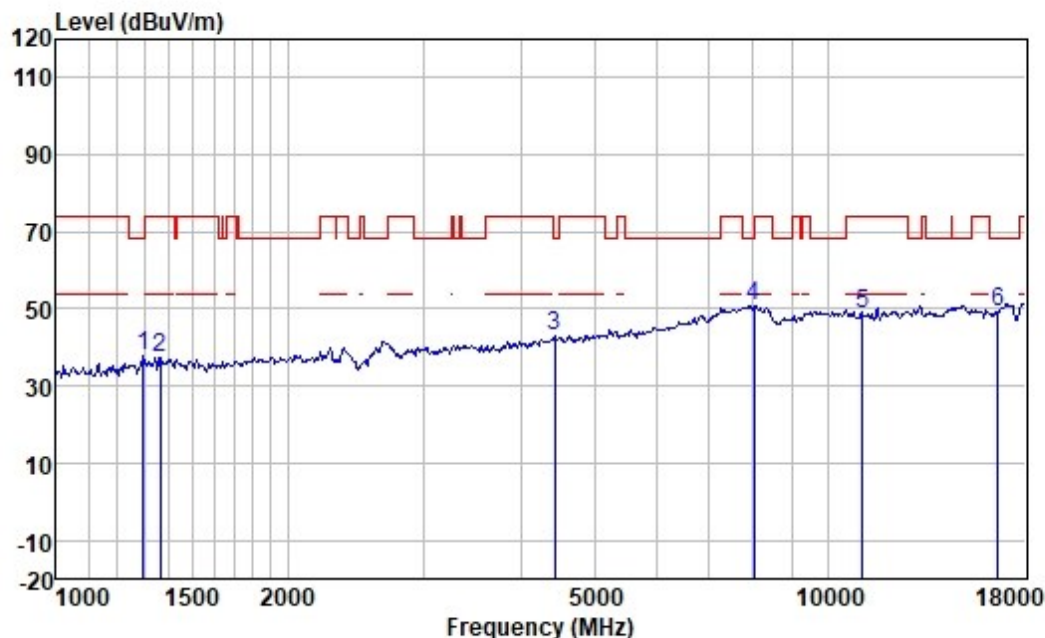

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1297.103	48.09	25.59	2.58	38.60	37.66	68.20	-30.54	VERTICAL	peak
2	1366.374	47.73	25.74	2.64	38.51	37.60	74.00	-36.40	VERTICAL	peak
3	4430.628	44.80	30.83	4.61	37.45	42.79	68.20	-25.41	VERTICAL	peak
4	8036.214	44.47	37.20	6.22	37.27	50.62	74.00	-23.38	VERTICAL	peak
5	11100.000	43.27	40.73	7.54	42.73	48.81	74.00	-25.19	VERTICAL	peak
6	16650.000	43.86	40.03	9.36	43.94	49.31	68.20	-18.89	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

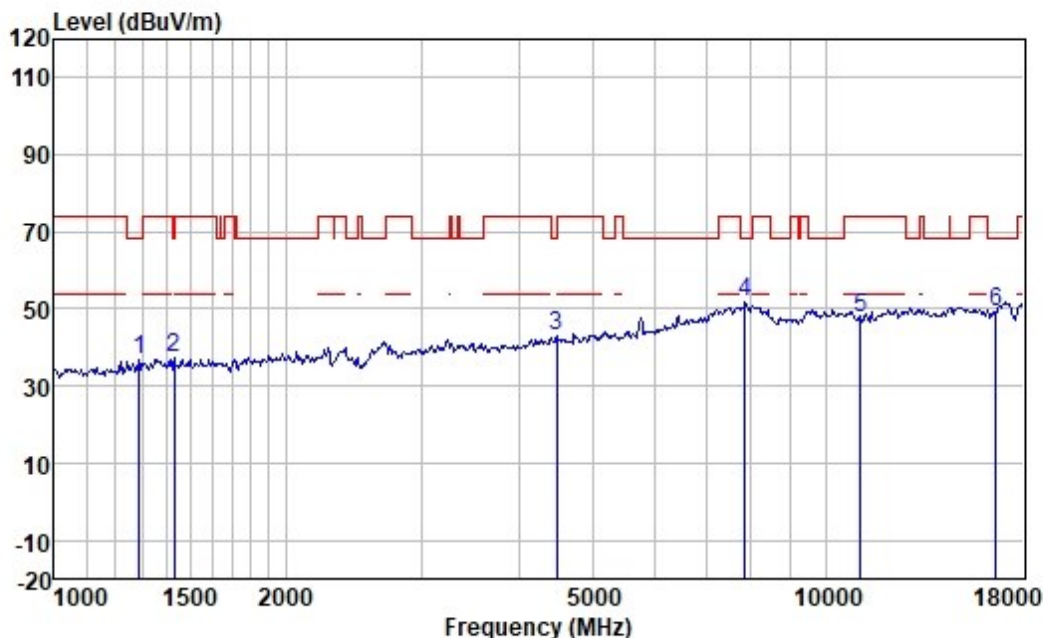

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1289.627	47.42	25.56	2.58	38.60	36.96	68.20	-31.24	HORIZONTAL peak
2	1431.047	47.49	25.84	2.67	38.45	37.55	68.20	-30.65	HORIZONTAL peak
3	4482.150	45.02	30.90	4.62	37.44	43.10	68.20	-25.10	HORIZONTAL peak
4	7852.524	45.50	37.11	6.16	37.20	51.57	68.20	-16.63	HORIZONTAL peak
5	11100.000	41.89	40.73	7.54	42.73	47.43	74.00	-26.57	HORIZONTAL peak
6	16650.000	43.84	40.03	9.36	43.94	49.29	68.20	-18.91	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

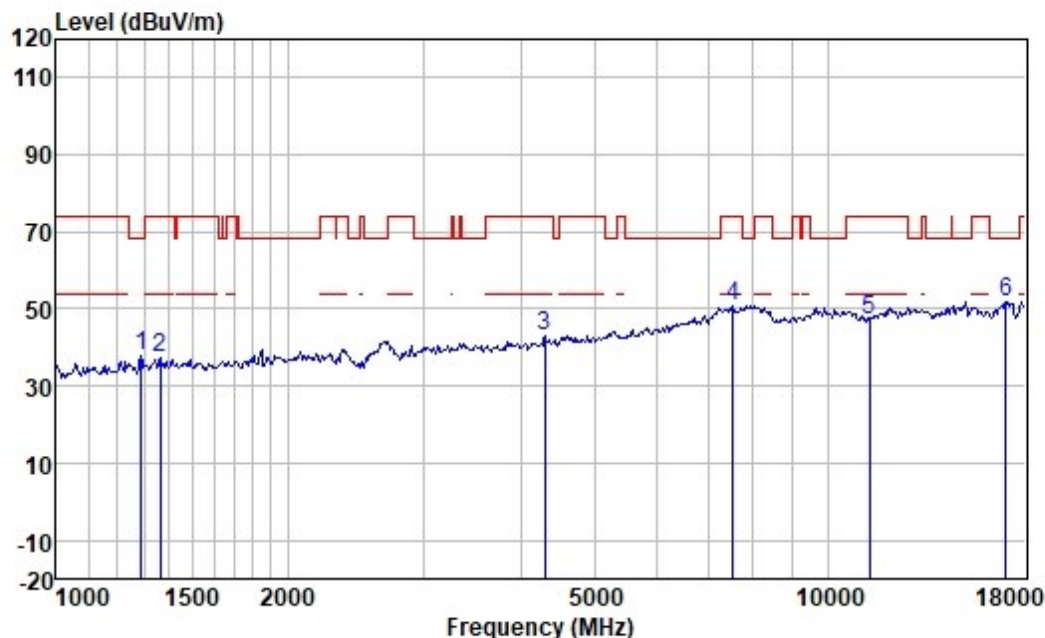

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	48.07	25.56	2.58	38.60	37.61	68.20	-30.59	VERTICAL	peak
2	1366.374	47.65	25.74	2.64	38.51	37.52	74.00	-36.48	VERTICAL	peak
3	4304.400	45.24	30.62	4.58	37.47	42.97	74.00	-31.03	VERTICAL	peak
4	7541.114	45.08	36.75	6.04	37.19	50.68	74.00	-23.32	VERTICAL	peak
5	11340.000	41.52	40.88	7.59	42.83	47.16	74.00	-26.84	VERTICAL	peak
6	17010.000	44.84	41.79	9.43	44.30	51.76	68.20	-16.44	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

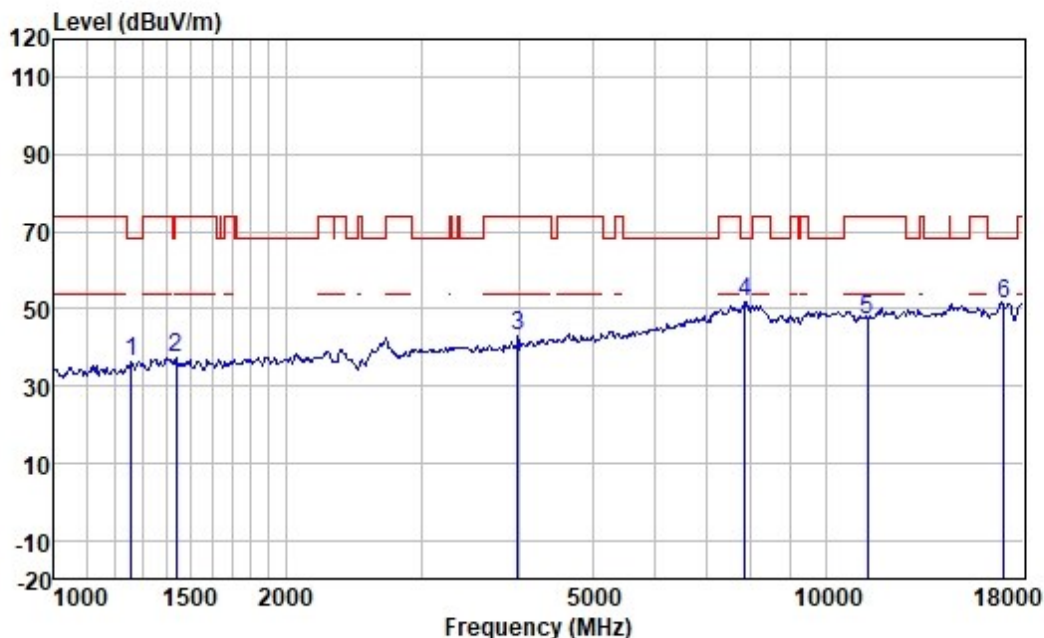

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1260.149	47.08	25.45	2.54	38.63	36.44	68.20	-31.76	HORIZONTAL	peak
2	1439.343	47.37	25.85	2.68	38.42	37.48	74.00	-36.52	HORIZONTAL	peak
3	3992.781	45.82	29.99	4.49	37.50	42.80	74.00	-31.20	HORIZONTAL	peak
4	7852.524	45.60	37.11	6.16	37.20	51.67	68.20	-16.53	HORIZONTAL	peak
5	11340.000	41.57	40.88	7.59	42.83	47.21	74.00	-26.79	HORIZONTAL	peak
6	17010.000	44.49	41.79	9.43	44.30	51.41	68.20	-16.79	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

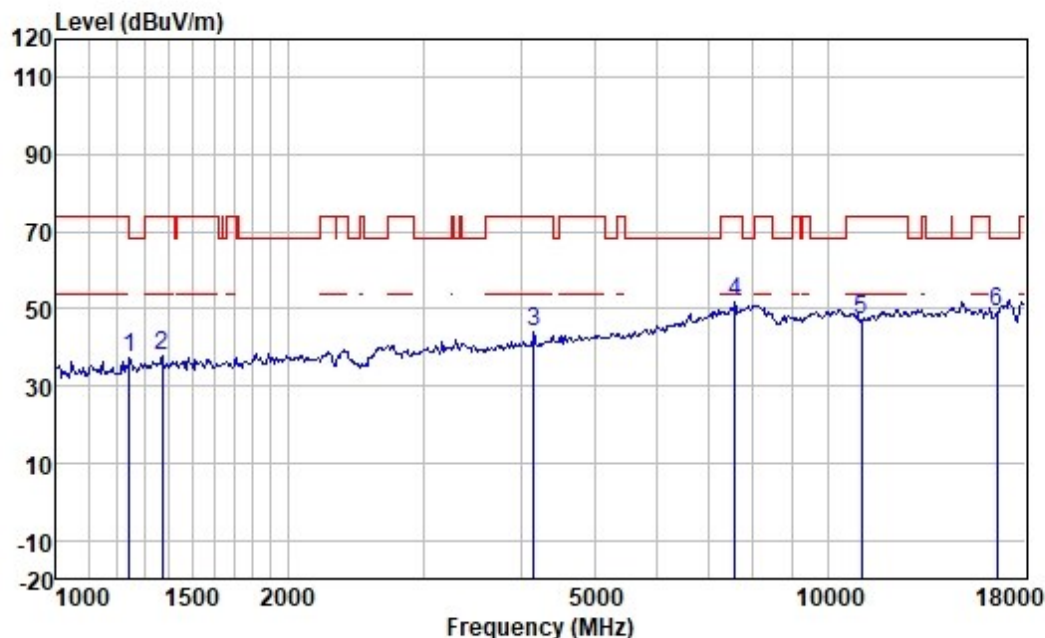

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	48.04	25.38	2.51	38.64	37.29	68.20	-30.91	VERTICAL	peak
2	1374.295	47.85	25.76	2.64	38.51	37.74	74.00	-36.26	VERTICAL	peak
3	4157.664	46.66	30.24	4.53	37.48	43.95	74.00	-30.05	VERTICAL	peak
4	7584.833	46.41	36.78	6.05	37.19	52.05	74.00	-21.95	VERTICAL	peak
5	11060.000	41.66	40.70	7.53	42.72	47.17	74.00	-26.83	VERTICAL	peak
6	16590.000	43.68	39.79	9.36	43.85	48.98	68.20	-19.22	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: Low

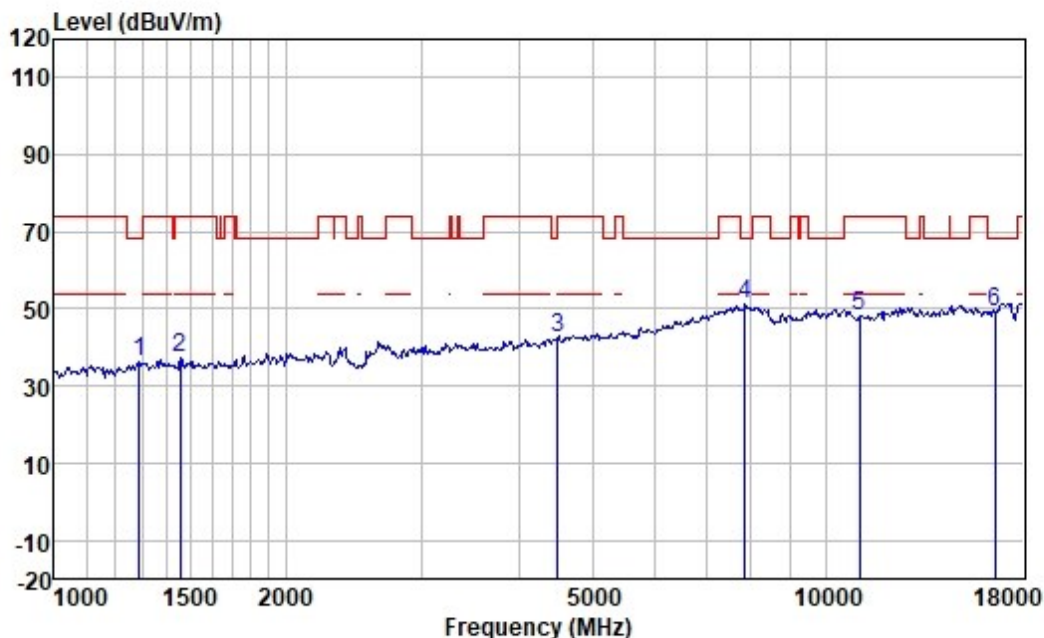

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1289.627	46.62	25.56	2.58	38.60	36.16	68.20	-32.04	HORIZONTAL peak
2	1456.081	47.29	25.87	2.68	38.39	37.45	74.00	-36.55	HORIZONTAL peak
3	4495.125	44.52	30.91	4.62	37.44	42.61	68.20	-25.59	HORIZONTAL peak
4	7852.524	45.05	37.11	6.16	37.20	51.12	68.20	-17.08	HORIZONTAL peak
5	11060.000	42.56	40.70	7.53	42.72	48.07	74.00	-25.93	HORIZONTAL peak
6	16590.000	43.86	39.79	9.36	43.85	49.16	68.20	-19.04	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

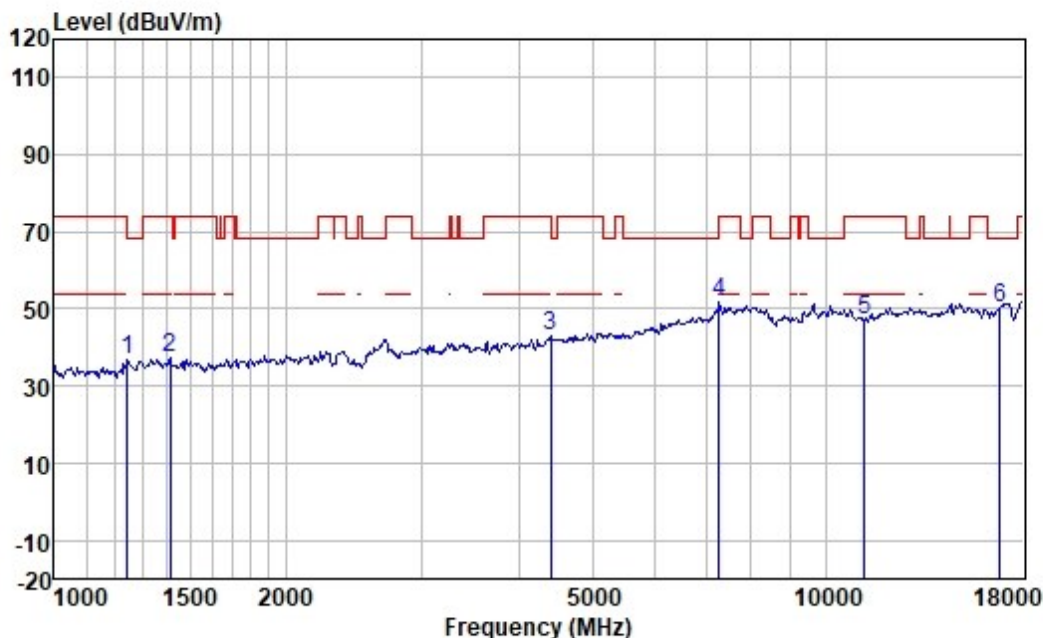

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	47.58	25.38	2.51	38.64	36.83	68.20	-31.37	VERTICAL	peak
2	1414.597	47.36	25.82	2.67	38.47	37.38	74.00	-36.62	VERTICAL	peak
3	4405.090	44.85	30.80	4.61	37.46	42.80	68.20	-25.40	VERTICAL	peak
4	7284.038	46.98	36.14	5.97	37.18	51.91	74.00	-22.09	VERTICAL	peak
5	11220.000	41.82	40.79	7.56	42.77	47.40	74.00	-26.60	VERTICAL	peak
6	16830.000	43.82	41.12	9.41	44.09	50.26	68.20	-17.94	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

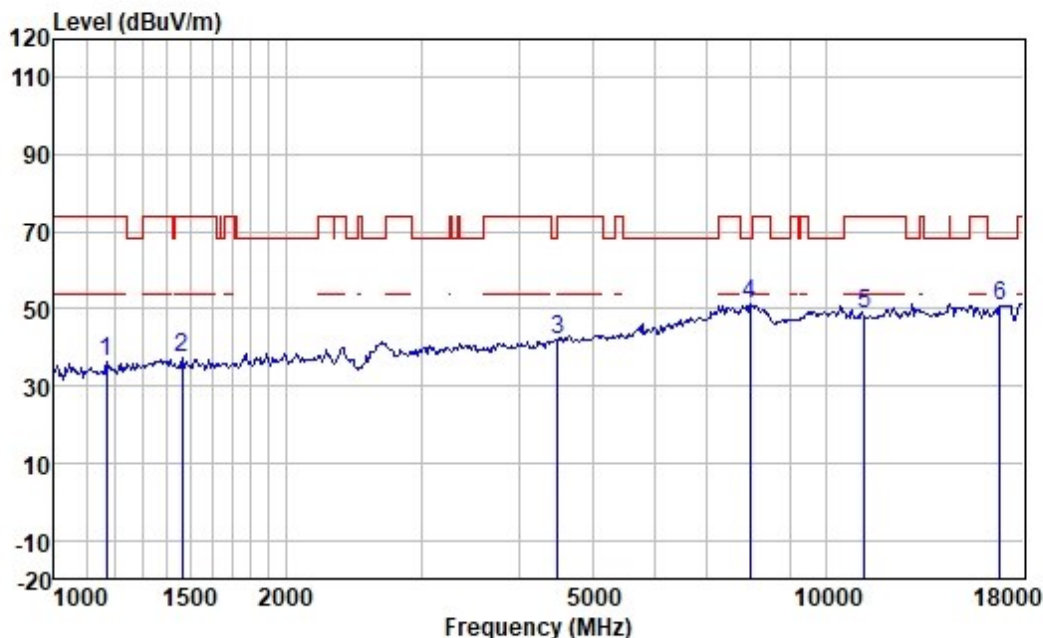

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1168.920	47.83	24.91	2.34	38.70	36.38	74.00	-37.62	HORIZONTAL	peak
2	1464.522	47.16	25.88	2.69	38.39	37.34	74.00	-36.66	HORIZONTAL	peak
3	4495.125	43.79	30.91	4.62	37.44	41.88	68.20	-26.32	HORIZONTAL	peak
4	7989.893	44.98	37.23	6.20	37.20	51.21	68.20	-16.99	HORIZONTAL	peak
5	11220.000	43.02	40.79	7.56	42.77	48.60	74.00	-25.40	HORIZONTAL	peak
6	16830.000	44.40	41.12	9.41	44.09	50.84	68.20	-17.36	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

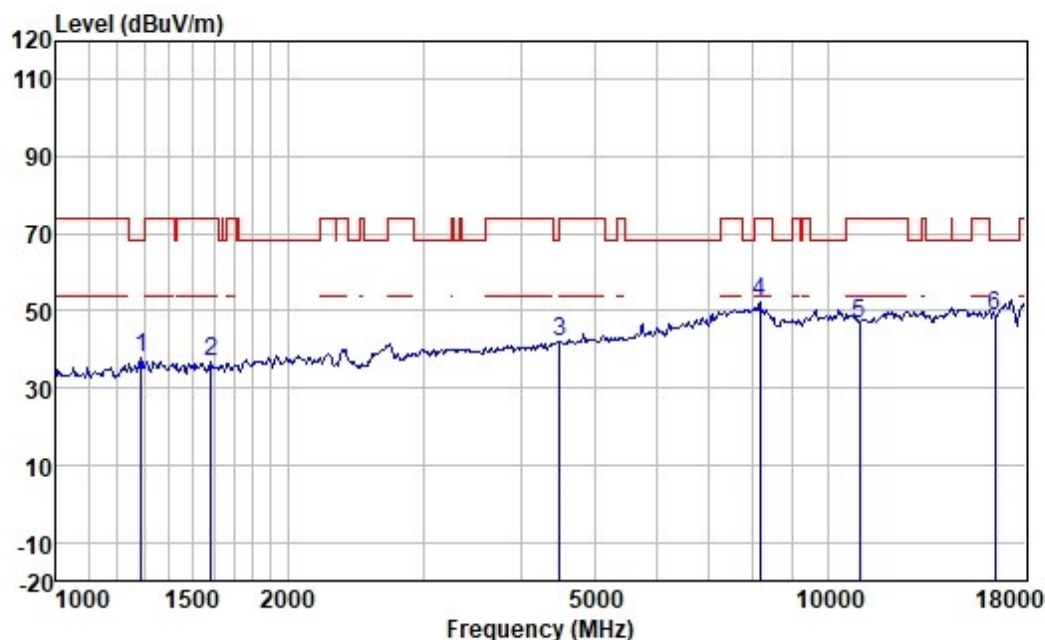

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	48.11	25.56	2.58	38.60	37.65	68.20	-30.55	VERTICAL	peak
2	1587.975	46.28	25.99	2.75	38.15	36.87	74.00	-37.13	VERTICAL	peak
3	4495.125	43.94	30.91	4.62	37.44	42.03	68.20	-26.17	VERTICAL	peak
4	8176.795	46.74	37.09	6.29	37.62	52.50	74.00	-21.50	VERTICAL	peak
5	11000.000	41.36	40.69	7.52	42.70	46.87	74.00	-27.13	VERTICAL	peak
6	16500.000	43.67	39.36	9.34	43.70	48.67	68.20	-19.53	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

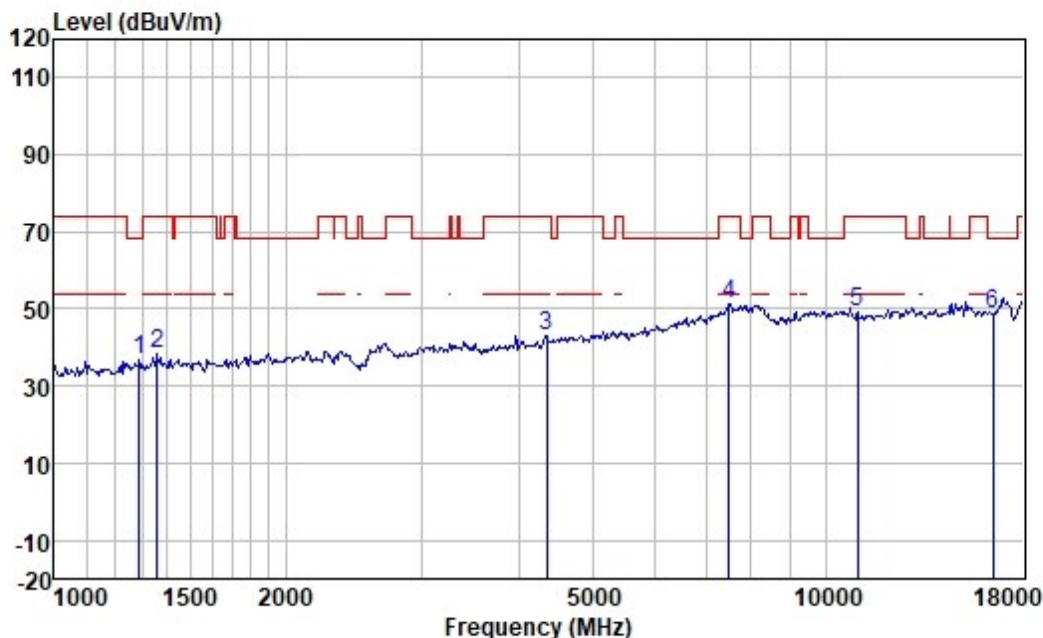

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	47.28	25.56	2.58	38.60	36.82	68.20	-31.38	HORIZONTAL	peak
2	1358.498	48.39	25.73	2.63	38.53	38.22	74.00	-35.78	HORIZONTAL	peak
3	4354.454	45.29	30.72	4.60	37.46	43.15	74.00	-30.85	HORIZONTAL	peak
4	7497.646	45.90	36.71	6.03	37.19	51.45	74.00	-22.55	HORIZONTAL	peak
5	11000.000	43.73	40.69	7.52	42.70	49.24	74.00	-24.76	HORIZONTAL	peak
6	16500.000	43.53	39.36	9.34	43.70	48.53	68.20	-19.67	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

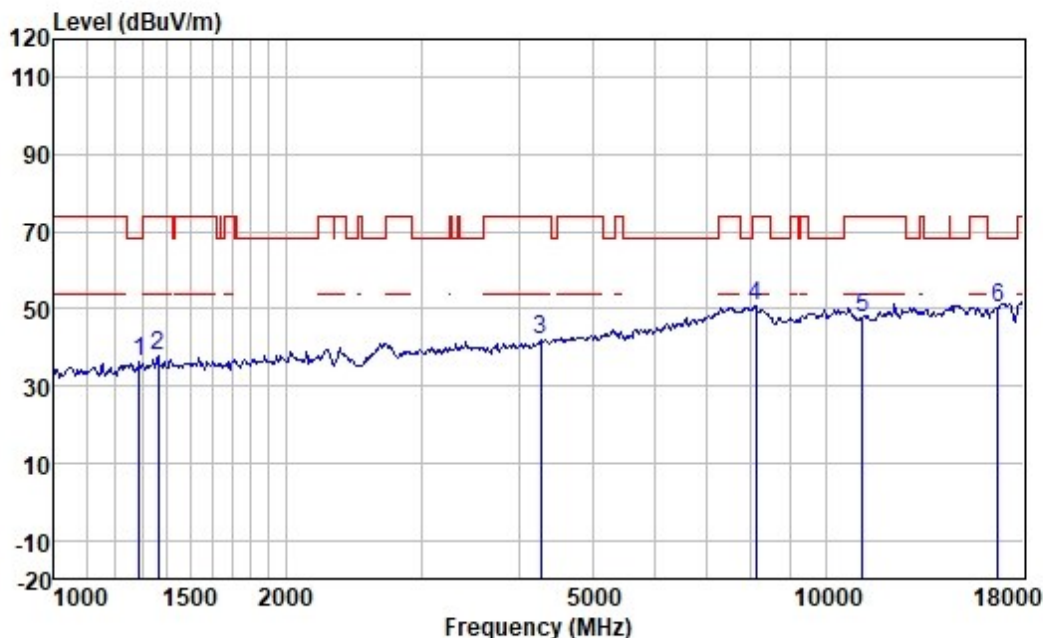

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	46.61	25.56	2.58	38.60	36.15	68.20	-32.05	VERTICAL	peak
2	1366.374	47.83	25.74	2.64	38.51	37.70	74.00	-36.30	VERTICAL	peak
3	4279.589	44.41	30.56	4.57	37.47	42.07	74.00	-31.93	VERTICAL	peak
4	8129.664	44.81	37.13	6.26	37.48	50.72	74.00	-23.28	VERTICAL	peak
5	11160.000	42.12	40.77	7.55	42.75	47.69	74.00	-26.31	VERTICAL	peak
6	16740.000	44.14	40.58	9.39	44.02	50.09	68.20	-18.11	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

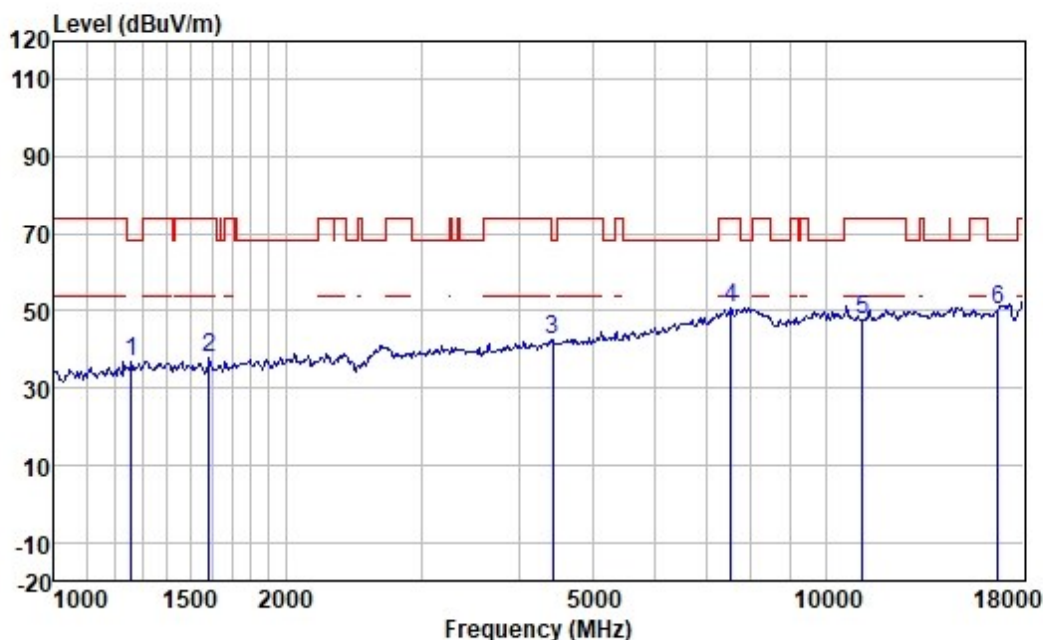

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1260.149	47.53	25.45	2.54	38.63	36.89	68.20	-31.31	HORIZONTAL	peak
2	1587.975	47.46	25.99	2.75	38.15	38.05	74.00	-35.95	HORIZONTAL	peak
3	4430.628	44.36	30.83	4.61	37.45	42.35	68.20	-25.85	HORIZONTAL	peak
4	7541.114	45.41	36.75	6.04	37.19	51.01	74.00	-22.99	HORIZONTAL	peak
5	11160.000	42.02	40.77	7.55	42.75	47.59	74.00	-26.41	HORIZONTAL	peak
6	16740.000	44.50	40.58	9.39	44.02	50.45	68.20	-17.75	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

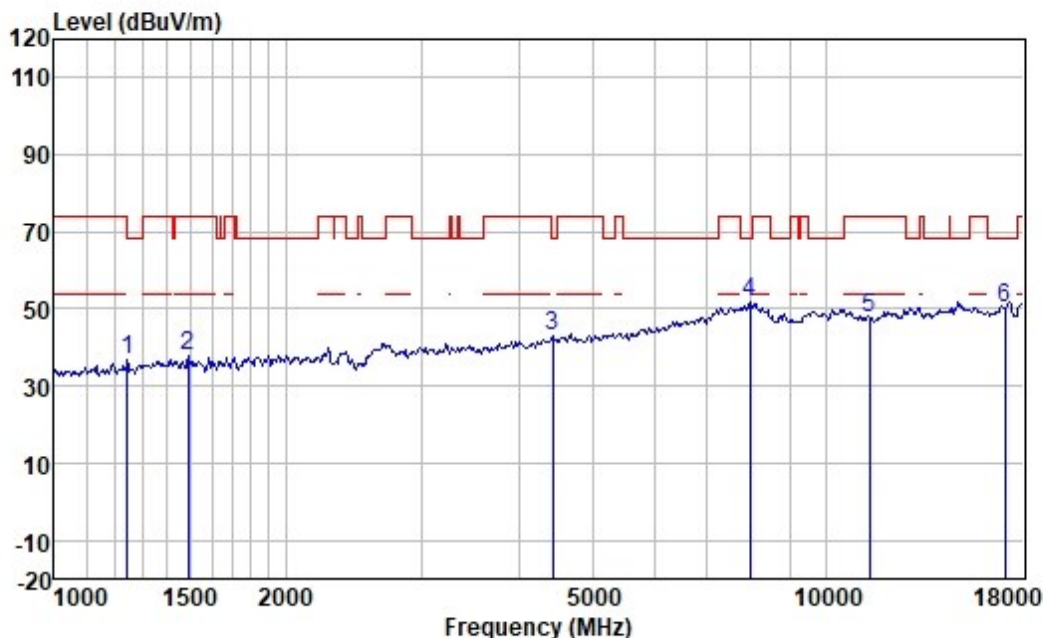

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	47.34	25.38	2.51	38.64	36.59	68.20	-31.61	VERTICAL	peak
2	1490.142	47.38	25.90	2.70	38.33	37.65	74.00	-36.35	VERTICAL	peak
3	4430.628	45.25	30.83	4.61	37.45	43.24	68.20	-24.96	VERTICAL	peak
4	7989.893	45.56	37.23	6.20	37.20	51.79	68.20	-16.41	VERTICAL	peak
5	11400.000	42.25	40.92	7.61	42.87	47.91	74.00	-26.09	VERTICAL	peak
6	17100.000	43.50	42.17	9.45	44.81	50.31	68.20	-17.89	VERTICAL	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

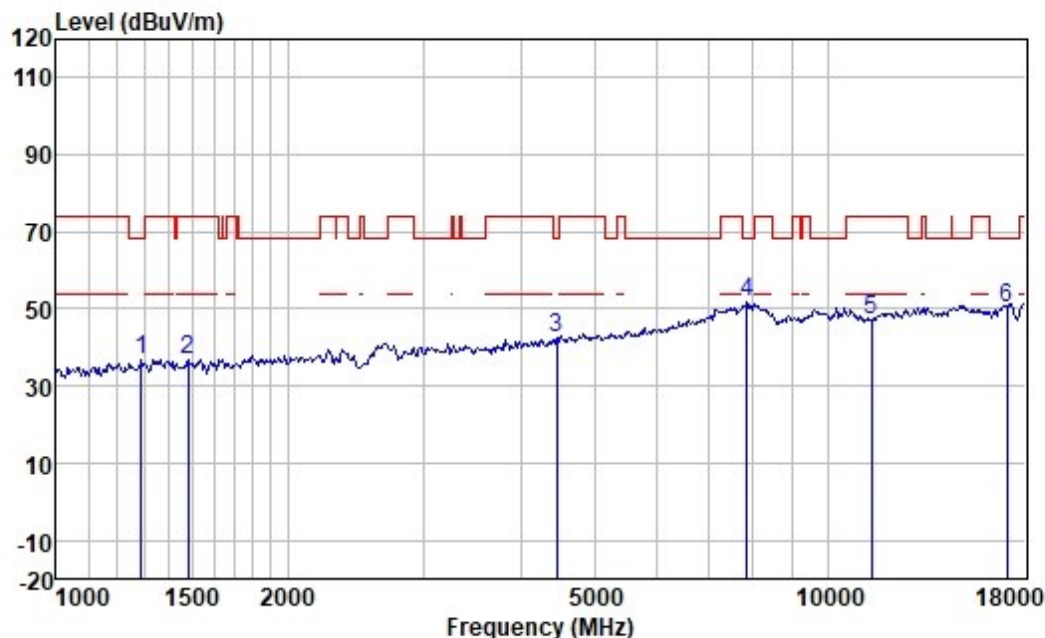

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	47.09	25.56	2.58	38.60	36.63	68.20	-31.57	HORIZONTAL	peak
2	1481.553	46.85	25.89	2.69	38.37	37.06	74.00	-36.94	HORIZONTAL	peak
3	4456.315	44.54	30.87	4.61	37.45	42.57	68.20	-25.63	HORIZONTAL	peak
4	7852.524	45.93	37.11	6.16	37.20	52.00	68.20	-16.20	HORIZONTAL	peak
5	11400.000	41.27	40.92	7.61	42.87	46.93	74.00	-27.07	HORIZONTAL	peak
6	17100.000	43.54	42.17	9.45	44.81	50.35	68.20	-17.85	HORIZONTAL	peak



6.3 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.10.5 & 12.7.2

Test Engineer: Lin Liao

Test Distance: 3m

Limit:

Frequency (MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 53.1 % RH

Atmospheric Pressure: 1020 mbar

6.3.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

Final test 04 TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (CMAA, CNAS, EEC Laboratory)

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Final test	05	rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

6.3.3 Test Setup Diagram

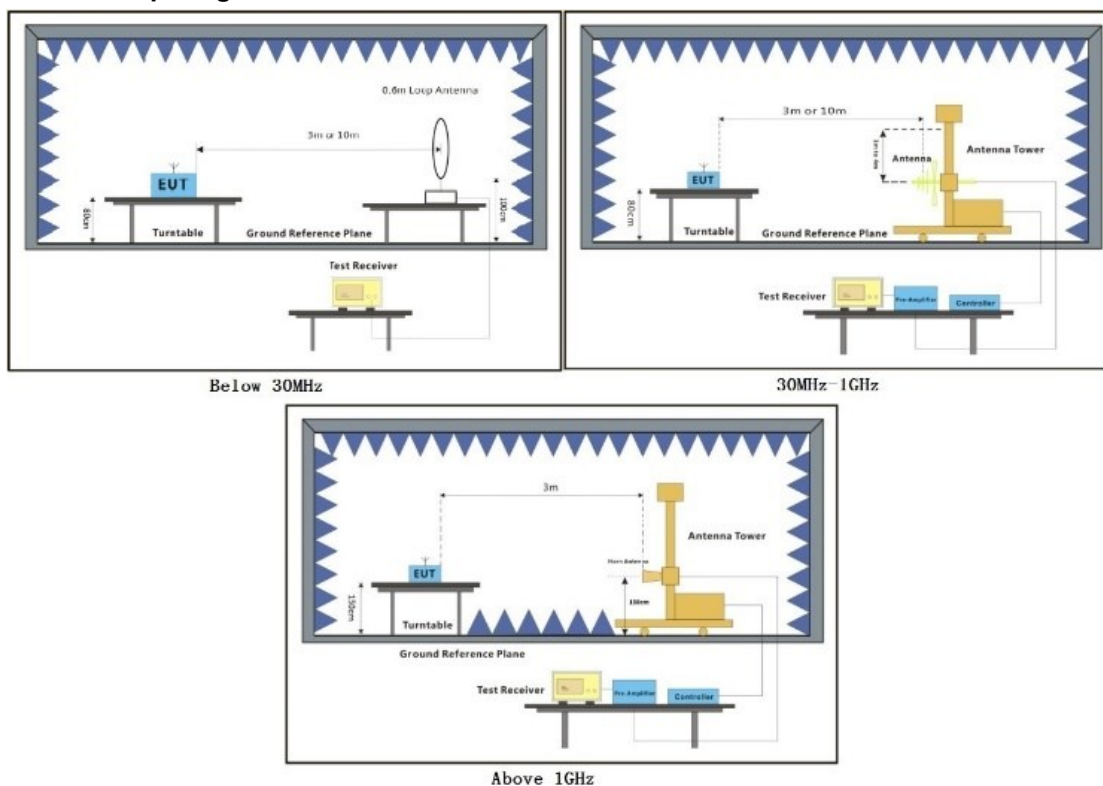

6.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.




Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

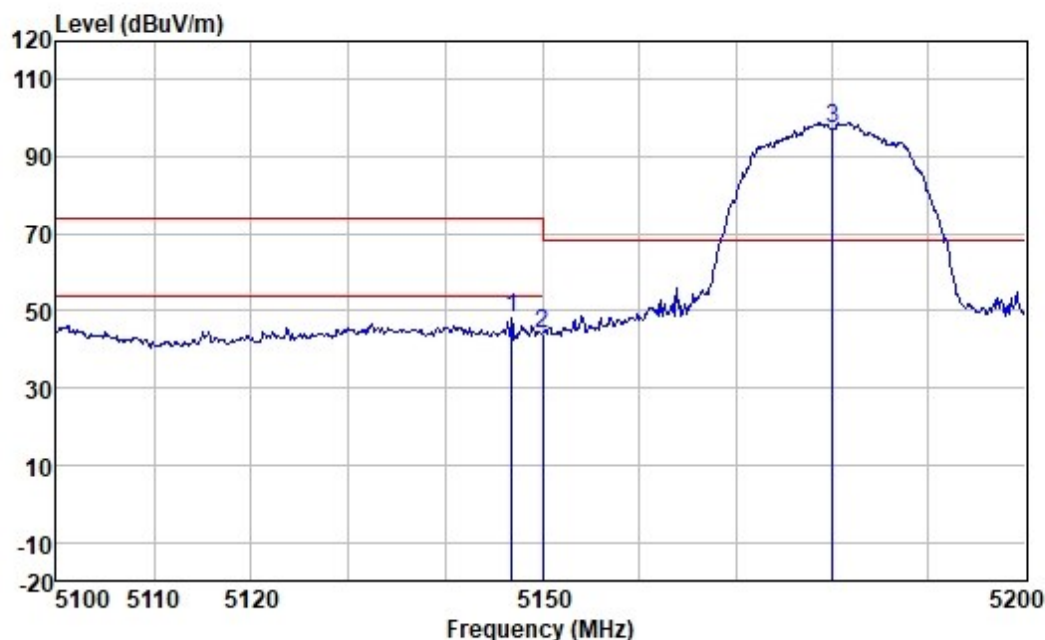

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5146.858	46.71	33.79	4.96	37.23	48.23	74.00	-25.77	VERTICAL	peak
2	5150.000	42.76	33.79	4.96	37.23	44.28	68.20	-23.92	VERTICAL	peak
3 *	5180.000	95.60	33.69	4.98	37.22	97.05	68.20	28.85	VERTICAL	peak




Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

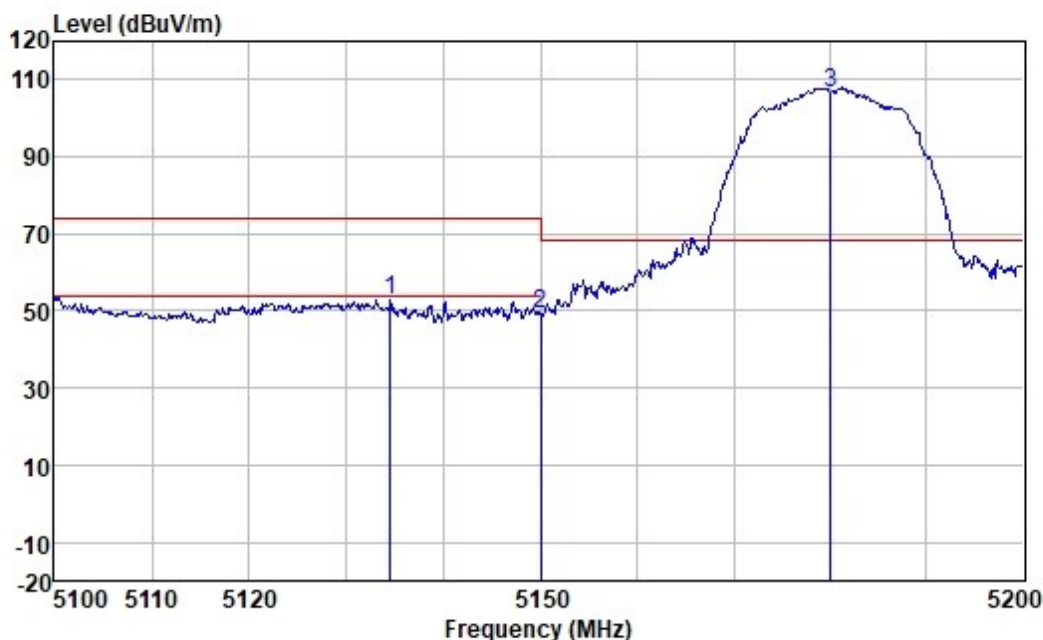

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5134.480	51.26	33.84	4.95	37.24	52.81	74.00	-21.19	HORIZONTAL	peak
2	5150.000	47.89	33.79	4.96	37.23	49.41	68.20	-18.79	HORIZONTAL	peak
3 *	5180.000	105.28	33.69	4.98	37.22	106.73	68.20	38.53	HORIZONTAL	peak




Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

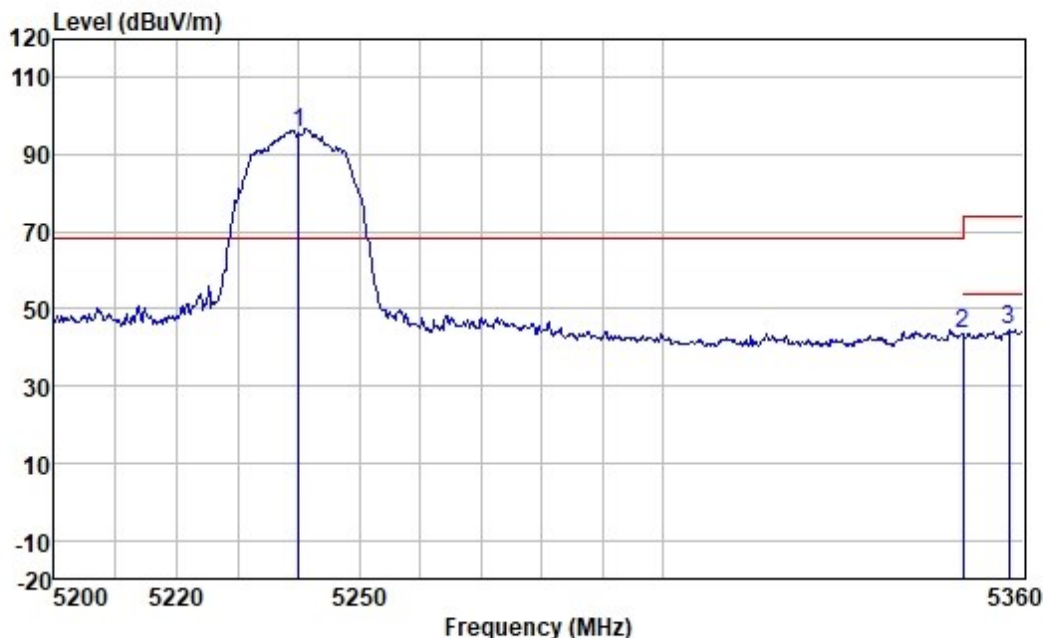

		ReadAntenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5240.000	94.51	33.45	5.02	37.21	95.77	68.20	27.57	VERTICAL peak
2	5350.000	42.52	33.00	5.09	37.18	43.43	68.20	-24.77	VERTICAL peak
3	5357.727	43.80	32.95	5.10	37.18	44.67	74.00	-29.33	VERTICAL peak




Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

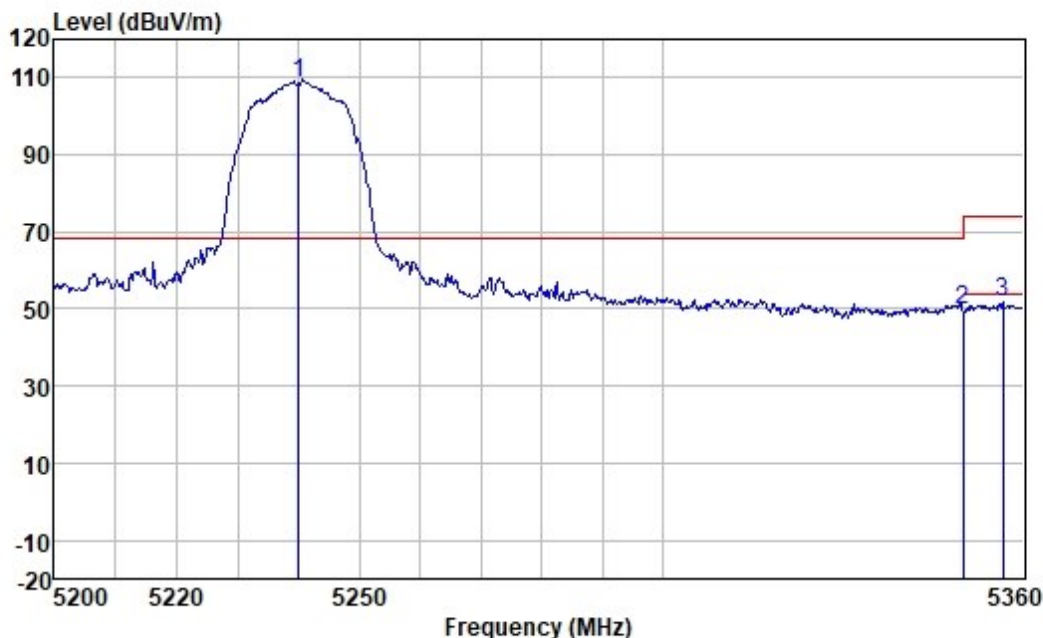

		ReadAntenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5240.000	107.36	33.45	5.02	37.21	108.62	68.20	40.42	HORIZONTAL peak
2	5350.000	49.02	33.00	5.09	37.18	49.93	68.20	-18.27	HORIZONTAL peak
3	5356.752	50.68	32.95	5.10	37.18	51.55	74.00	-22.45	HORIZONTAL peak




Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

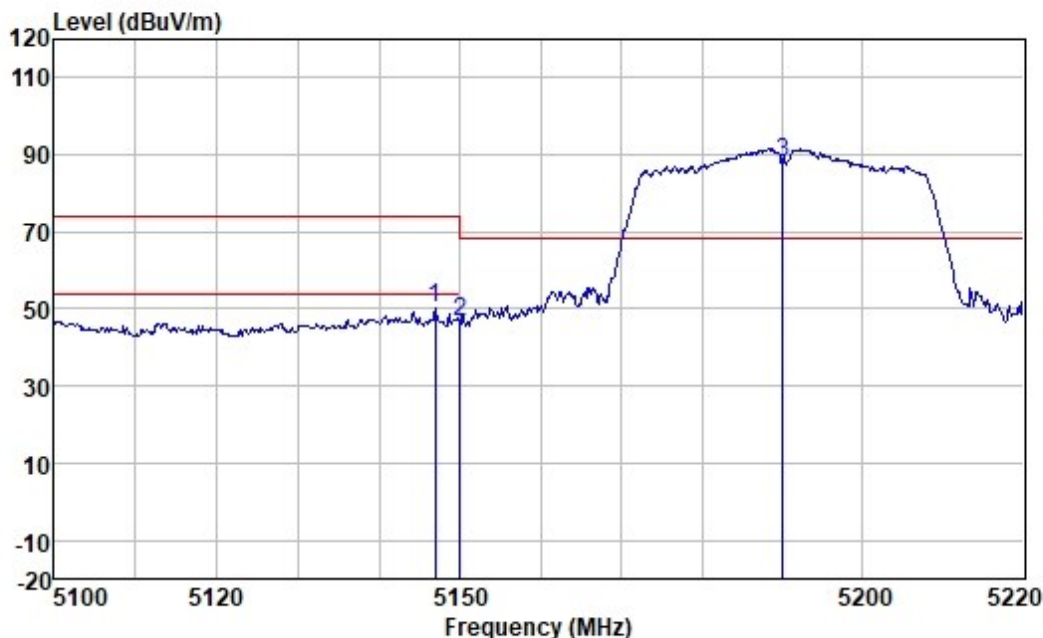

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5146.947	48.97	33.79	4.96	37.23	50.49	74.00	-23.51	VERTICAL	peak
2	5150.000	45.05	33.79	4.96	37.23	46.57	68.20	-21.63	VERTICAL	peak
3 *	5190.000	86.52	33.64	4.99	37.22	87.93	68.20	19.73	VERTICAL	peak




Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

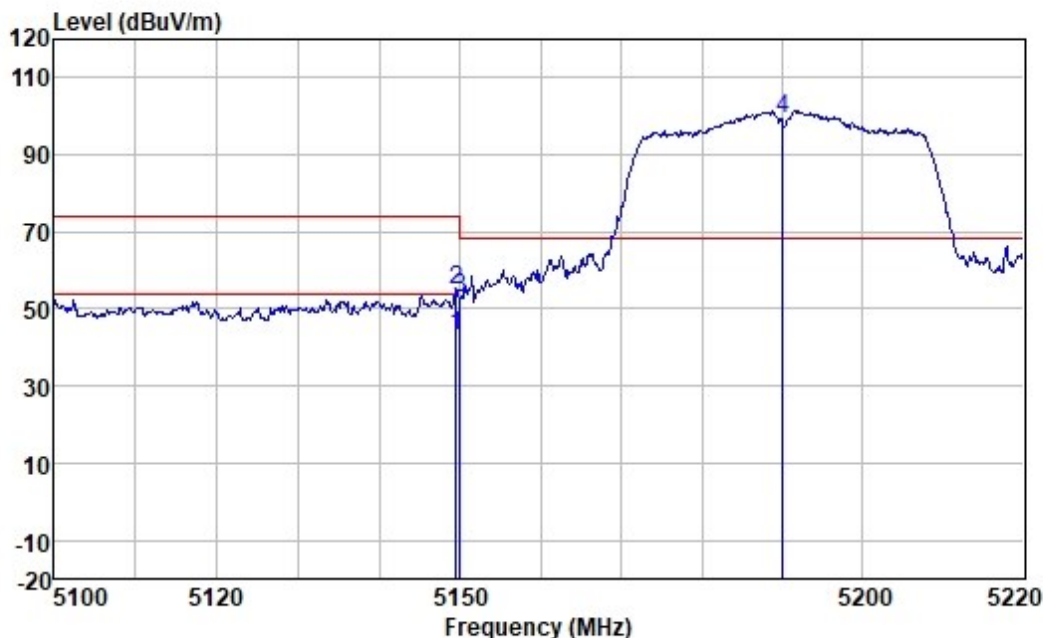

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5149.461	41.68	33.79	4.96	37.23	43.20	54.00	-10.80	HORIZONTAL Average
2	5149.461	53.37	33.79	4.96	37.23	54.89	74.00	-19.11	HORIZONTAL peak
3	5150.000	51.47	33.79	4.96	37.23	52.99	68.20	-15.21	HORIZONTAL peak
4 *	5190.000	98.15	33.64	4.99	37.22	99.56	68.20	31.36	HORIZONTAL peak




Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

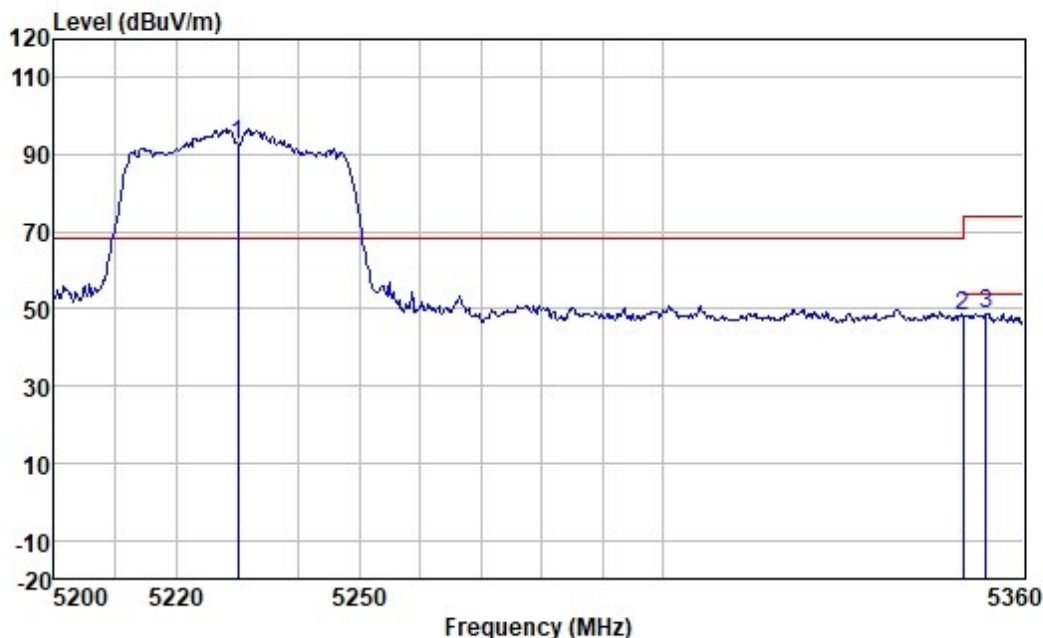

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5230.000	91.36	33.52	5.01	37.21	92.68	68.20	24.48	VERTICAL	peak
2	5350.000	47.26	33.00	5.09	37.18	48.17	68.20	-20.03	VERTICAL	peak
3	5353.831	48.04	33.00	5.09	37.18	48.95	74.00	-25.05	VERTICAL	peak




Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

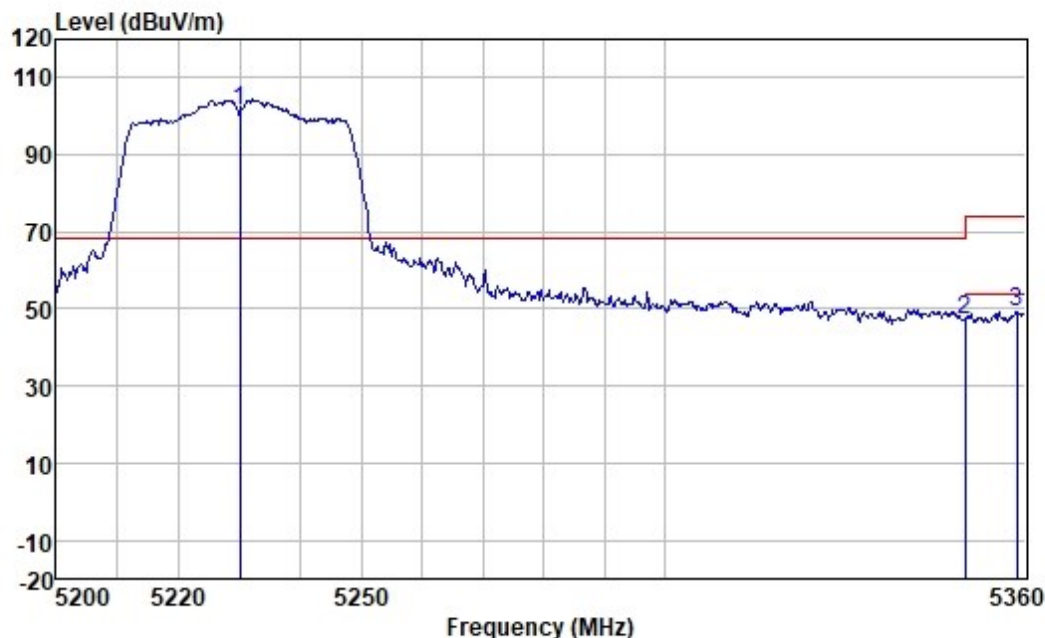

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5230.000	100.00	33.52	5.01	37.21	101.32	68.20	33.12	HORIZONTAL peak
2	5350.000	46.25	33.00	5.09	37.18	47.16	68.20	-21.04	HORIZONTAL peak
3	5358.701	48.57	32.95	5.10	37.18	49.44	74.00	-24.56	HORIZONTAL peak




Test Mode: 04; Polarity: Vertical; Modulation:802.11ax; Bandwidth:80MHz

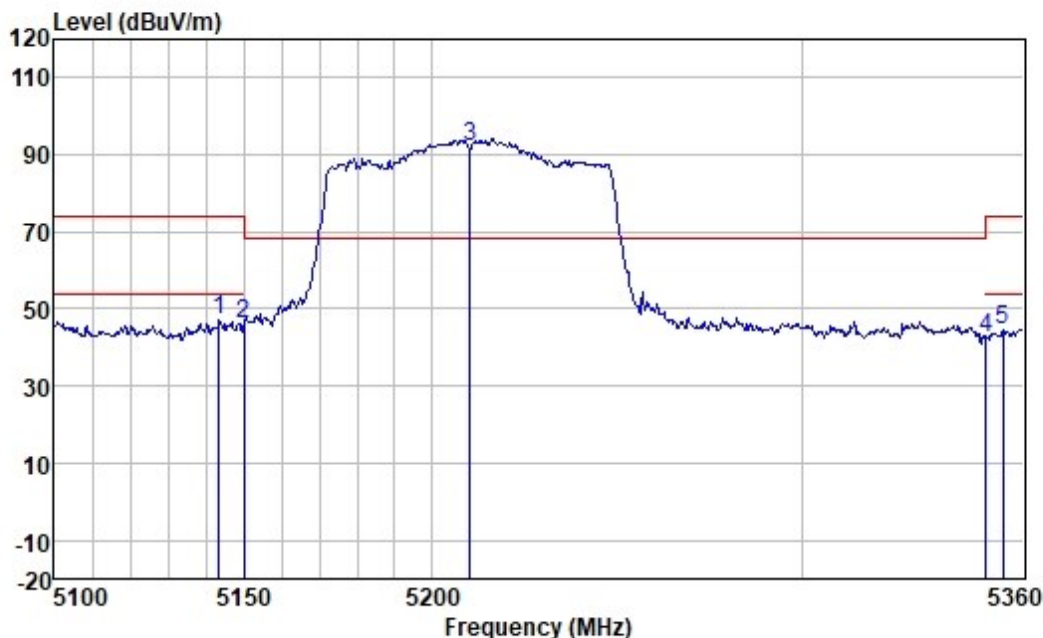

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5143.293	45.49	33.79	4.96	37.23	47.01	74.00	-26.99	VERTICAL peak
2	5150.000	44.80	33.79	4.96	37.23	46.32	68.20	-21.88	VERTICAL peak
3 *	5210.000	90.50	33.58	5.00	37.21	91.87	68.20	23.67	VERTICAL peak
4	5350.000	41.74	33.00	5.09	37.18	42.65	68.20	-25.55	VERTICAL peak
5	5354.672	43.71	32.95	5.10	37.18	44.58	74.00	-29.42	VERTICAL peak




Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:80MHz

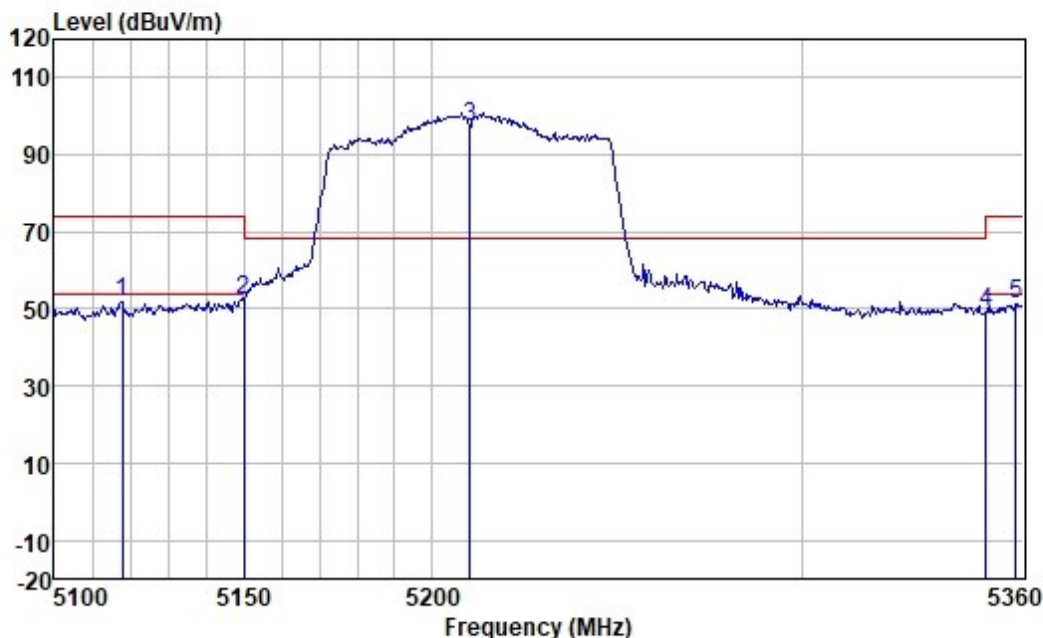

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5117.782	49.99	33.88	4.95	37.25	51.57	74.00	-22.43	HORIZONTAL Peak
2	5150.000	50.69	33.79	4.96	37.23	52.21	68.20	-15.99	HORIZONTAL peak
3 *	5210.000	95.76	33.58	5.00	37.21	97.13	68.20	28.93	HORIZONTAL peak
4	5350.000	48.32	33.00	5.09	37.18	49.23	68.20	-18.97	HORIZONTAL peak
5	5358.135	50.48	32.95	5.10	37.18	51.35	74.00	-22.65	HORIZONTAL peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

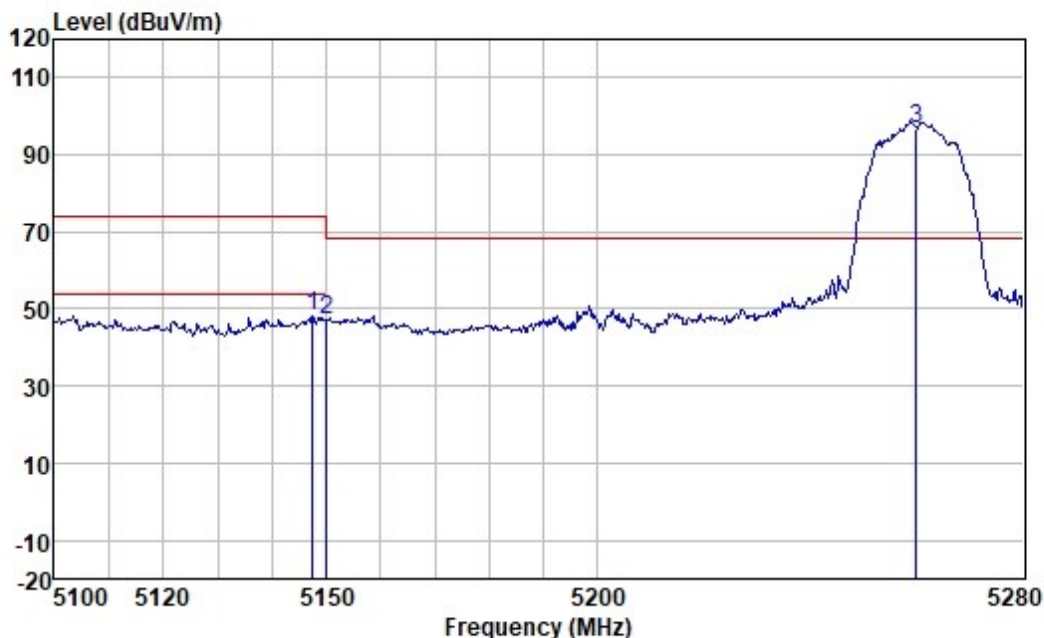

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5147.451	46.58	33.79	4.96	37.23	48.10	74.00	-25.90	VERTICAL peak
2	5150.000	45.75	33.79	4.96	37.23	47.27	68.20	-20.93	VERTICAL peak
3 *	5260.000	95.74	33.38	5.03	37.20	96.95	68.20	28.75	VERTICAL peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

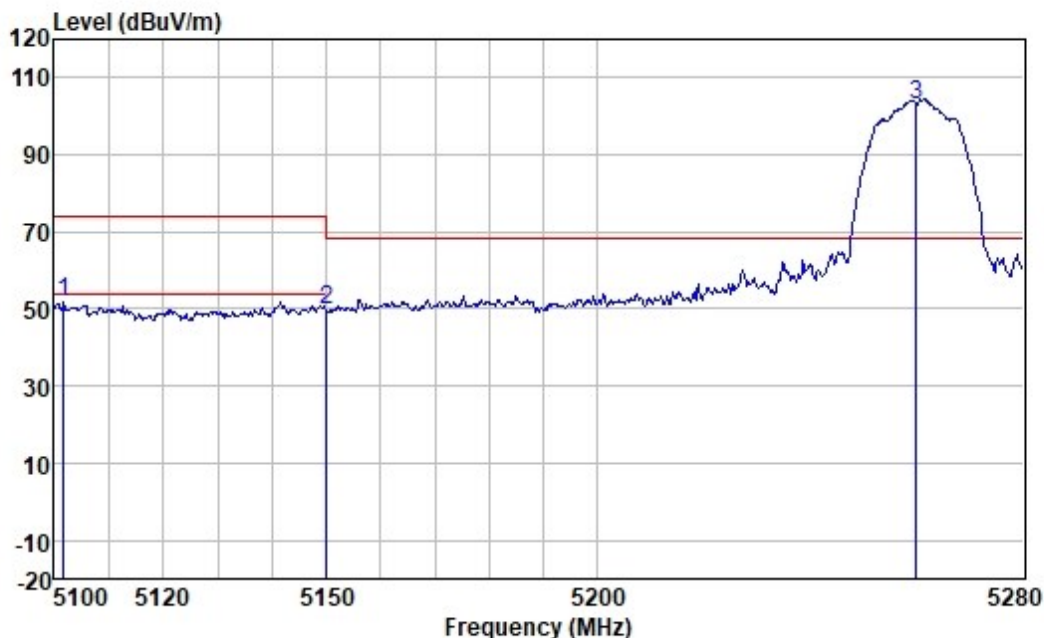

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5101.769	50.27	33.92	4.94	37.25	51.88	74.00	-22.12	HORIZONTAL	peak
2	5150.000	48.00	33.79	4.96	37.23	49.52	68.20	-18.68	HORIZONTAL	peak
3 *	5260.000	101.77	33.38	5.03	37.20	102.98	68.20	34.78	HORIZONTAL	peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

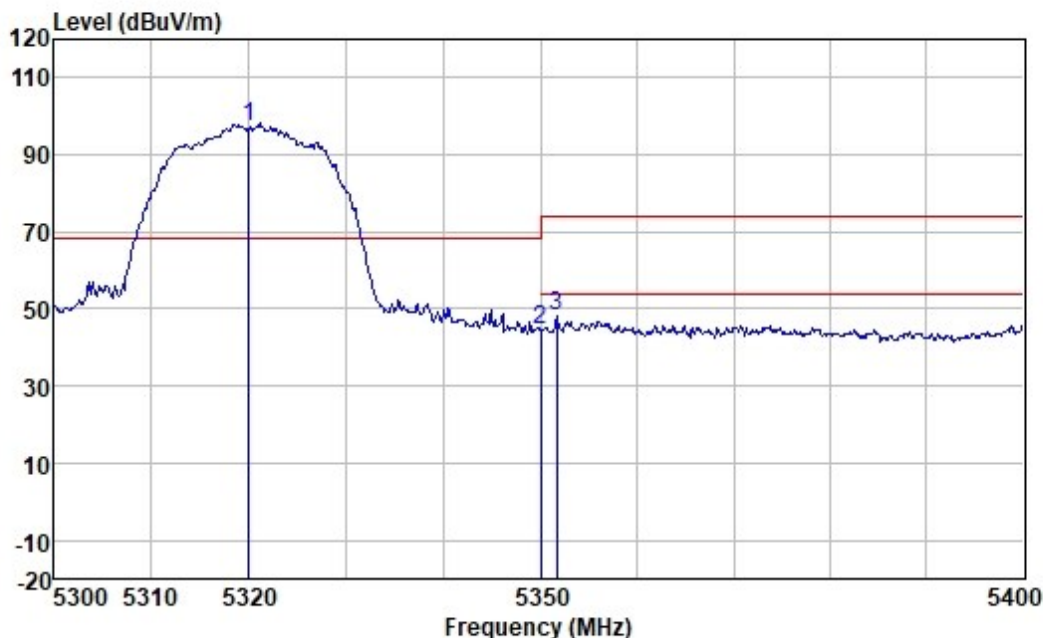

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5320.000	96.05	33.11	5.08	37.19	97.05	68.20	28.85	VERTICAL	peak
2	5350.000	43.88	33.00	5.09	37.18	44.79	68.20	-23.41	VERTICAL	peak
3	5351.667	47.26	33.00	5.09	37.18	48.17	74.00	-25.83	VERTICAL	peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

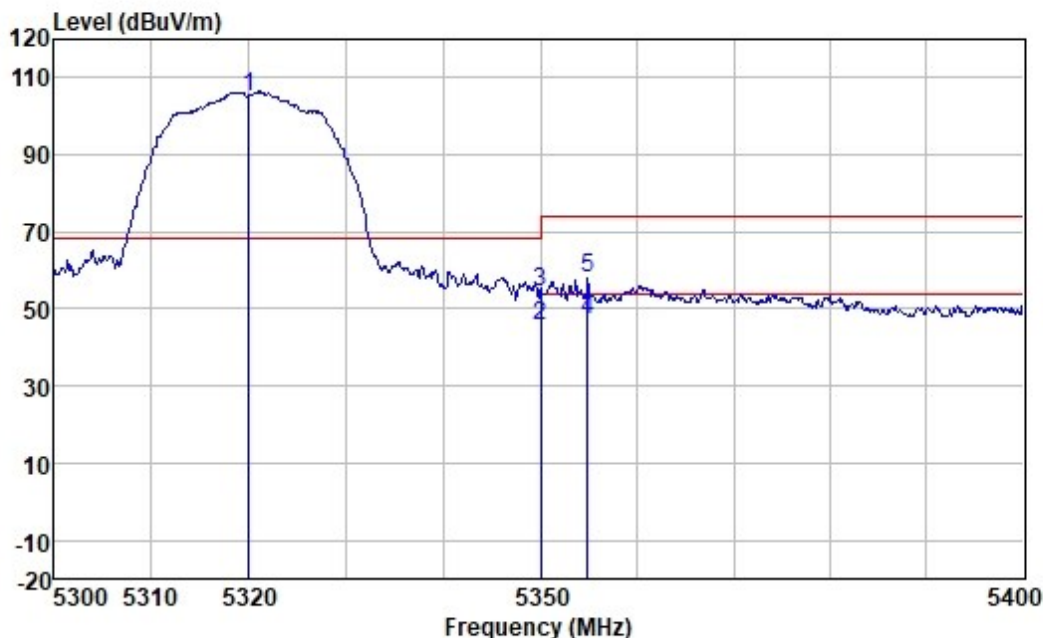

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	5320.000	104.25	33.11	5.08	37.19	105.25	68.20	37.05	HORIZONTAL peak
2	5350.000	44.68	33.00	5.09	37.18	45.59	54.00	-8.41	HORIZONTAL Average
3	5350.000	53.74	33.00	5.09	37.18	54.65	68.20	-13.55	HORIZONTAL peak
4	5354.869	46.29	32.95	5.10	37.18	47.16	54.00	-6.84	HORIZONTAL Average
5	5354.869	57.22	32.95	5.10	37.18	58.09	74.00	-15.91	HORIZONTAL peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

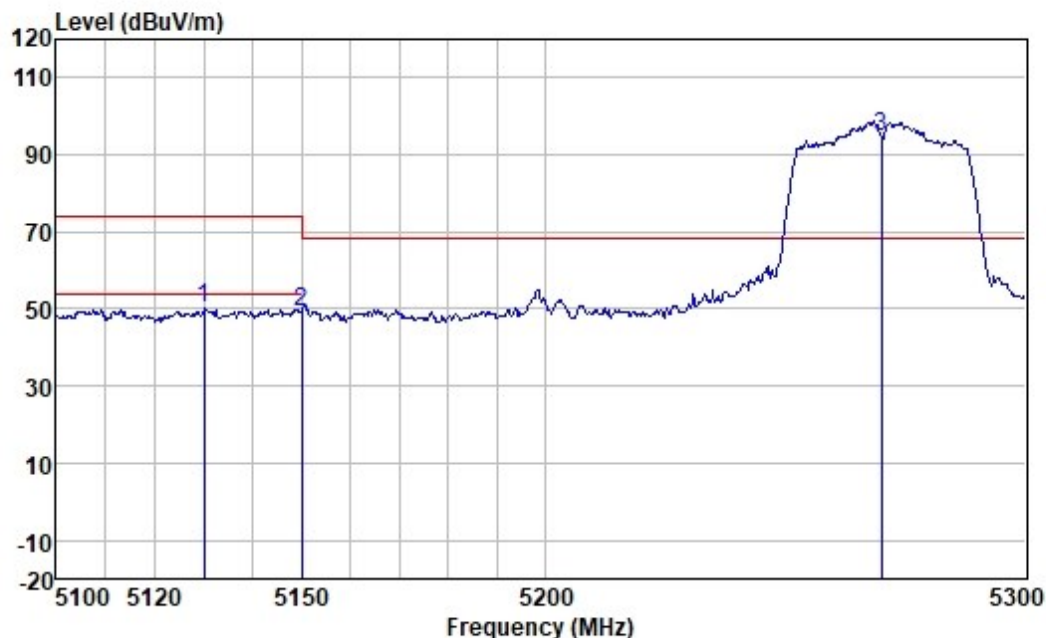

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5130.104	48.57	33.84	4.95	37.24	50.12	74.00	-23.88	VERTICAL peak
2	5150.000	47.95	33.79	4.96	37.23	49.47	68.20	-18.73	VERTICAL peak
3 *	5270.000	93.55	33.30	5.04	37.20	94.69	68.20	26.49	VERTICAL peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

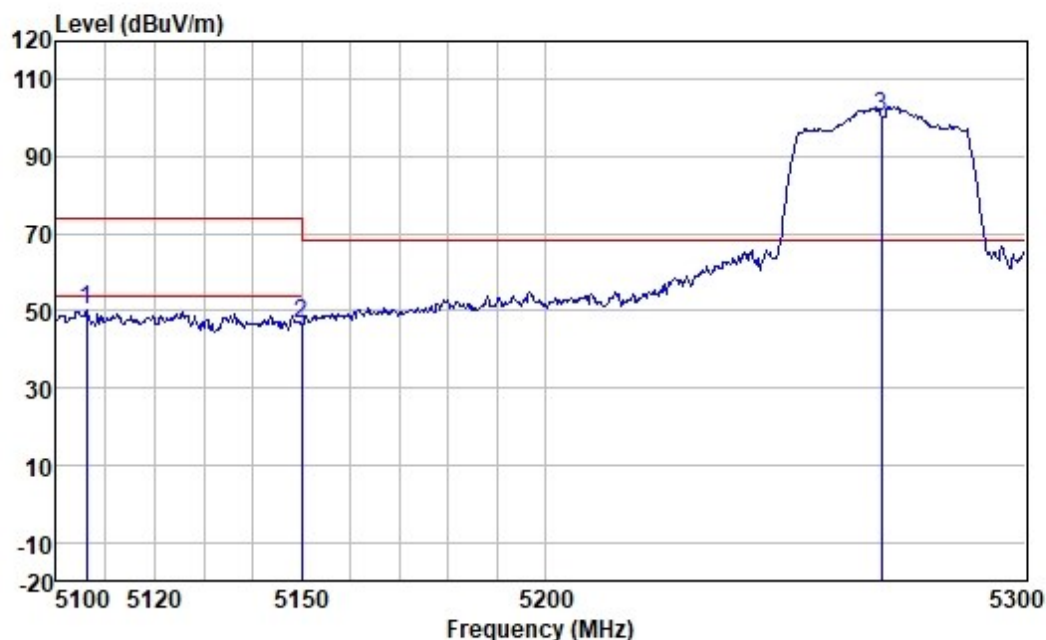

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5106.085	48.49	33.92	4.94	37.25	50.10	74.00	-23.90	HORIZONTAL	peak
2	5150.000	45.09	33.79	4.96	37.23	46.61	68.20	-21.59	HORIZONTAL	peak
3 *	5270.000	99.26	33.30	5.04	37.20	100.40	68.20	32.20	HORIZONTAL	peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

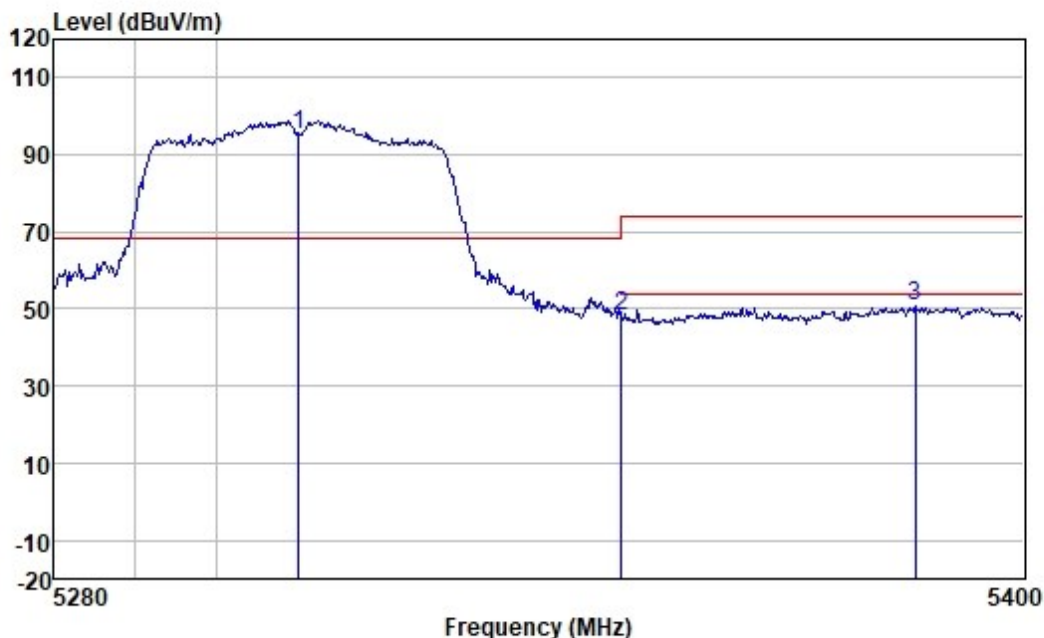

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5310.000	94.17	33.11	5.08	37.19	95.17	68.20	26.97	VERTICAL	peak
2	5350.000	47.45	33.00	5.09	37.18	48.36	68.20	-19.84	VERTICAL	peak
3	5386.546	49.85	32.86	5.12	37.18	50.65	74.00	-23.35	VERTICAL	peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

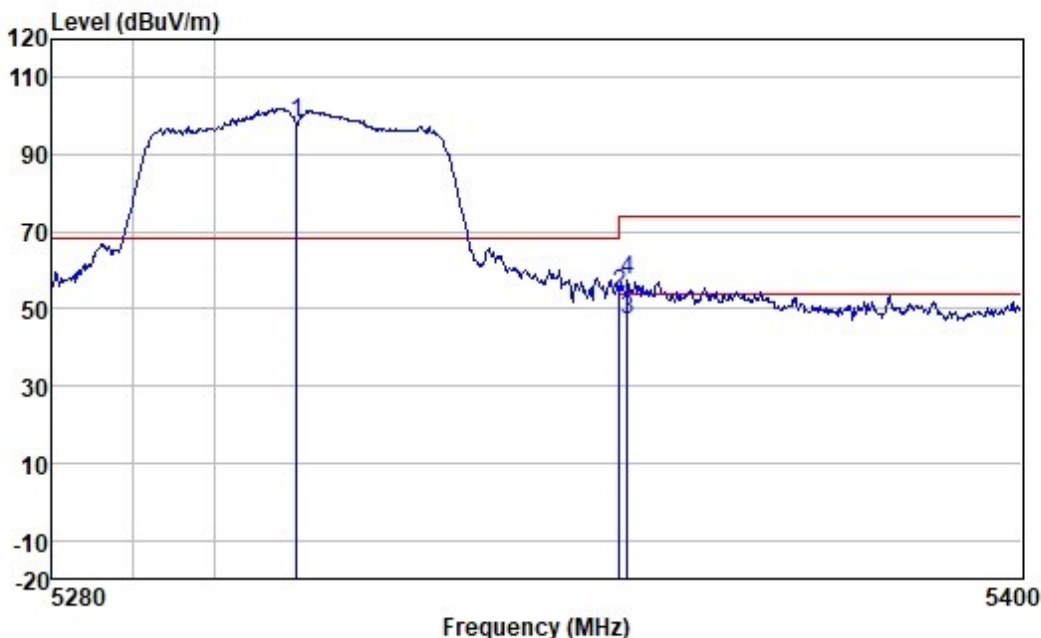

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5310.000	97.06	33.11	5.08	37.19	98.06	68.20	29.86	HORIZONTAL	peak
2	5350.000	52.90	33.00	5.09	37.18	53.81	68.20	-14.39	HORIZONTAL	peak
3	5350.955	46.32	33.00	5.09	37.18	47.23	54.00	-6.77	HORIZONTAL	Average
4	5350.955	56.44	33.00	5.09	37.18	57.35	74.00	-16.65	HORIZONTAL	peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11ax; Bandwidth:80MHz

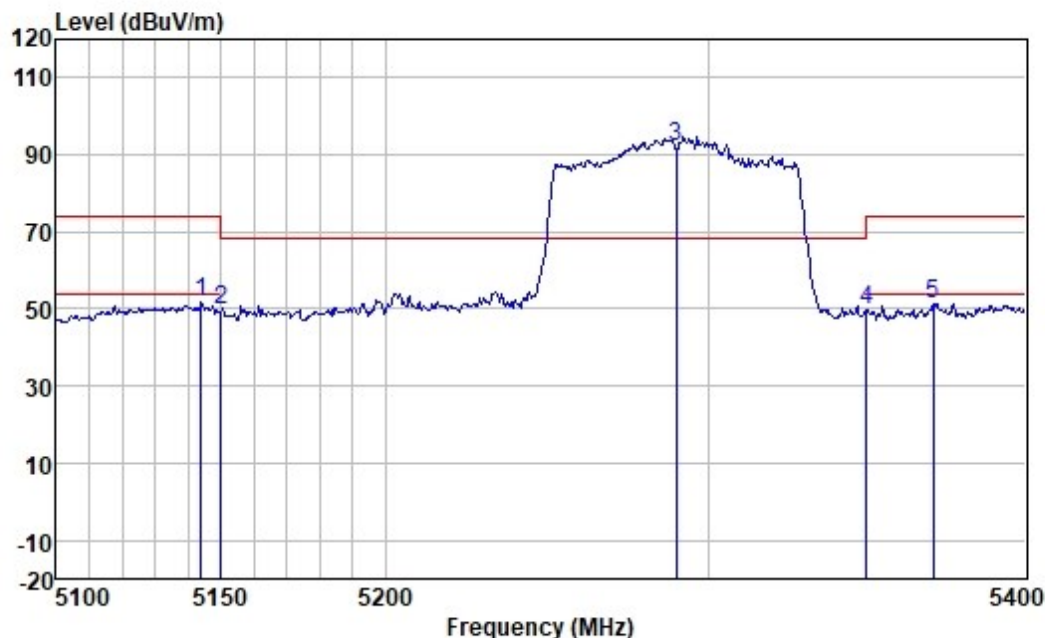

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5143.914	50.10	33.79	4.96	37.23	51.62	74.00	-22.38	VERTICAL	peak
2	5150.000	48.26	33.79	4.96	37.23	49.78	68.20	-18.42	VERTICAL	peak
3 *	5290.000	90.90	33.23	5.05	37.20	91.98	68.20	23.78	VERTICAL	peak
4	5350.000	48.71	33.00	5.09	37.18	49.62	68.20	-18.58	VERTICAL	peak
5	5371.064	50.66	32.91	5.11	37.18	51.50	74.00	-22.50	VERTICAL	peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:80MHz

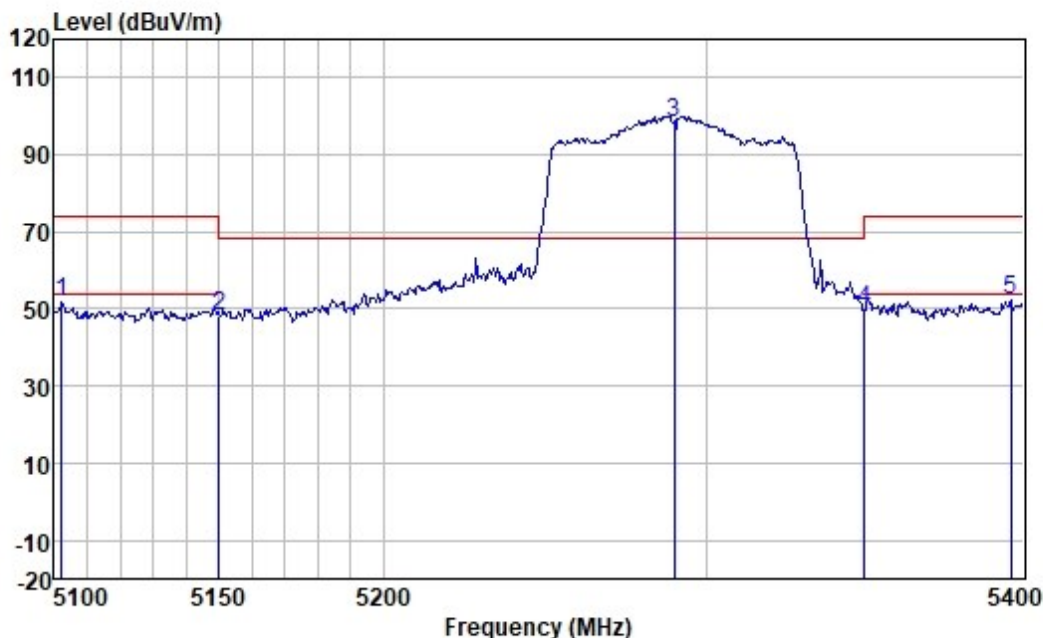

	ReadAntenna	Cable	Preamp		Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5102.333	50.26	33.92	4.94	37.25	51.87	74.00	-22.13	HORIZONTAL peak
2	5150.000	46.62	33.79	4.96	37.23	48.14	68.20	-20.06	HORIZONTAL peak
3 *	5290.000	97.41	33.23	5.05	37.20	98.49	68.20	30.29	HORIZONTAL peak
4	5350.000	48.63	33.00	5.09	37.18	49.54	68.20	-18.66	HORIZONTAL peak
5	5396.297	51.59	32.86	5.12	37.17	52.40	74.00	-21.60	HORIZONTAL Peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

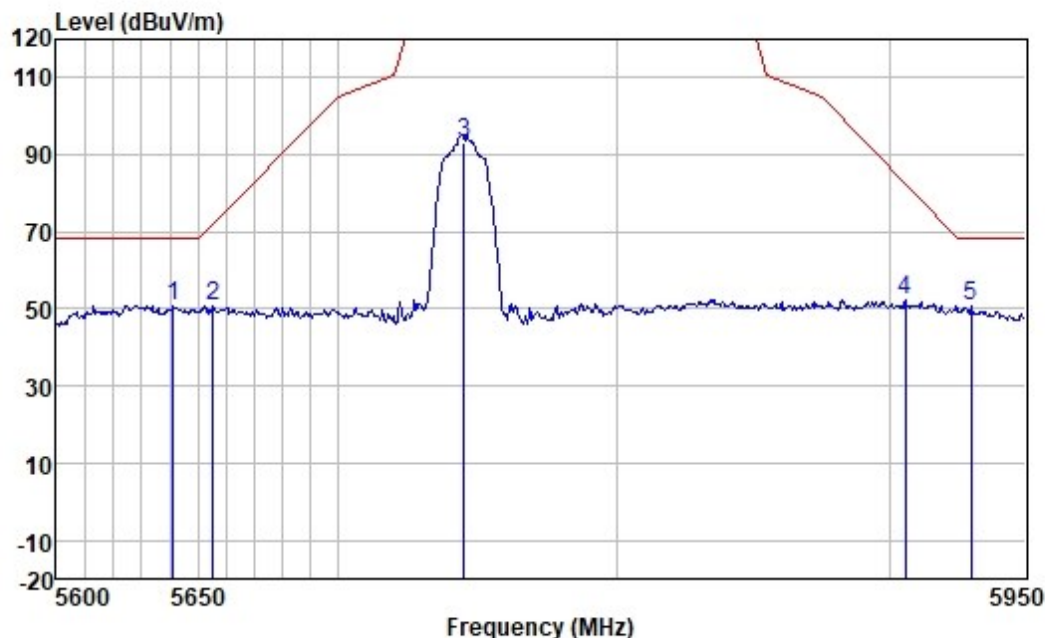


	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5641.230	50.23	32.63	5.23	37.14	50.95	68.20	-17.25	VERTICAL	peak
2	5655.270	50.05	32.63	5.23	37.14	50.77	72.12	-21.35	VERTICAL	peak
3	5745.000	92.16	32.65	5.30	37.13	92.98	125.20	-32.22	VERTICAL	peak
4	5905.797	51.55	32.69	5.40	37.11	52.53	82.40	-29.87	VERTICAL	peak
5	5930.194	49.72	32.69	5.41	37.11	50.71	68.20	-17.49	VERTICAL	peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

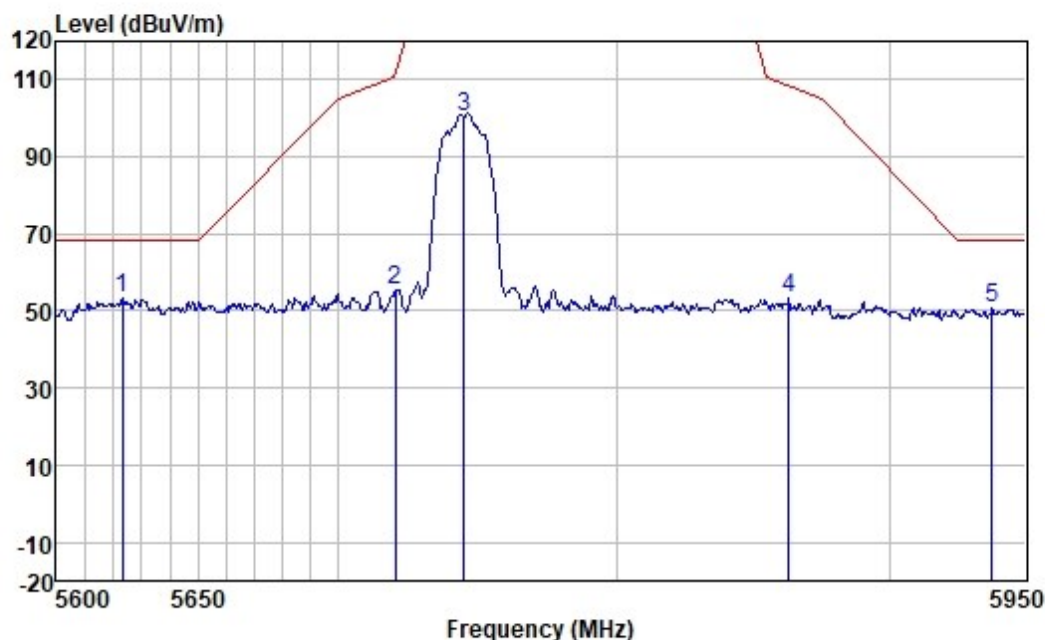

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5623.133	52.54	32.63	5.21	37.14	53.24	68.20	-14.96	HORIZONTAL	peak
2	5720.094	54.71	32.65	5.27	37.13	55.50	111.01	-55.51	HORIZONTAL	peak
3	5745.000	99.51	32.65	5.30	37.13	100.33	125.20	-24.87	HORIZONTAL	peak
4	5862.988	52.28	32.68	5.38	37.11	53.23	108.56	-55.33	HORIZONTAL	peak
5	5938.108	49.53	32.69	5.41	37.11	50.52	68.20	-17.68	HORIZONTAL	peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

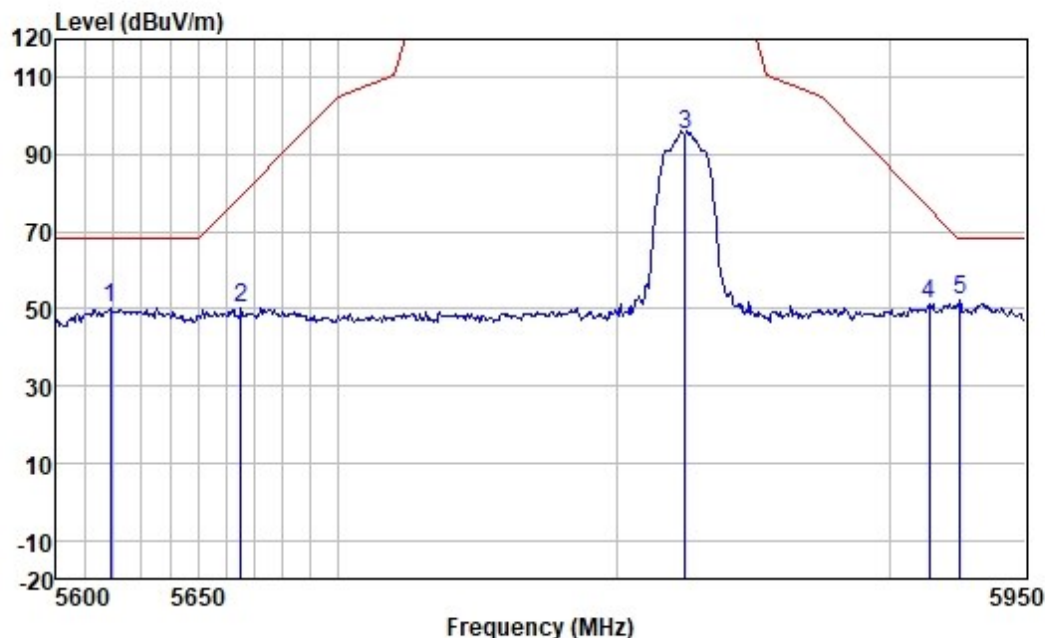

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5619.044	49.36	32.63	5.21	37.14	50.06	68.20	-18.14	VERTICAL	peak
2	5665.221	49.61	32.64	5.24	37.14	50.35	79.50	-29.15	VERTICAL	peak
3	5825.000	94.20	32.67	5.36	37.12	95.11	125.20	-30.09	VERTICAL	peak
4	5914.754	50.17	32.69	5.41	37.11	51.16	75.77	-24.61	VERTICAL	peak
5	5926.240	51.37	32.69	5.41	37.11	52.36	68.20	-15.84	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

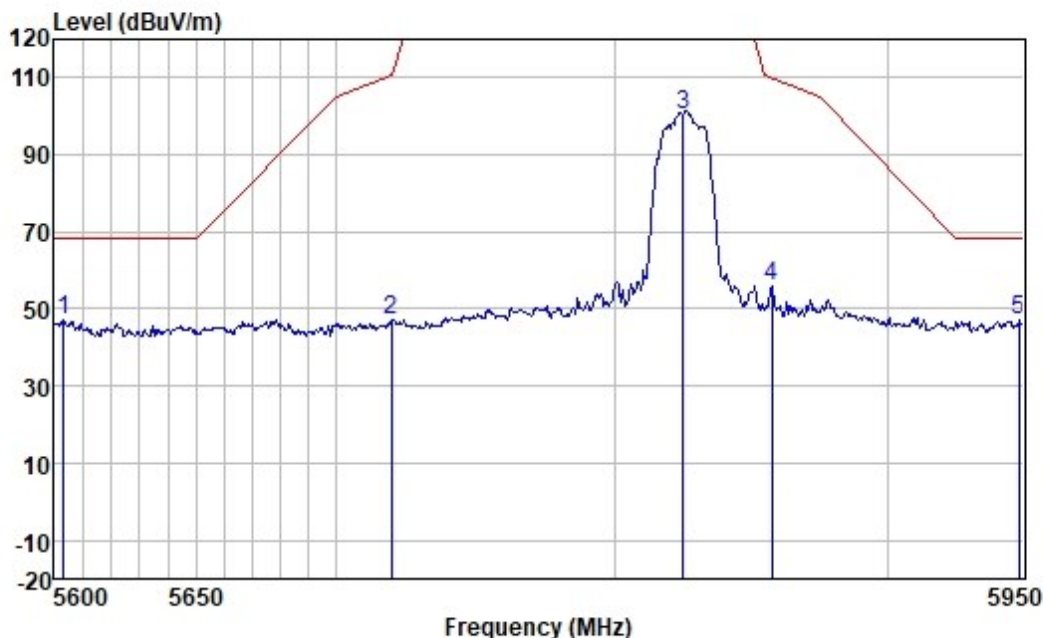

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5603.396	46.42	32.62	5.20	37.14	47.10	68.20	-21.10	HORIZONTAL	peak
2	5719.400	46.56	32.65	5.27	37.13	47.35	110.63	-63.28	HORIZONTAL	peak
3	5825.000	99.54	32.67	5.36	37.12	100.45	125.20	-24.75	HORIZONTAL	peak
4	5857.304	55.04	32.68	5.38	37.11	55.99	110.15	-54.16	HORIZONTAL	peak
5	5948.557	46.00	32.69	5.42	37.10	47.01	68.20	-21.19	HORIZONTAL	peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

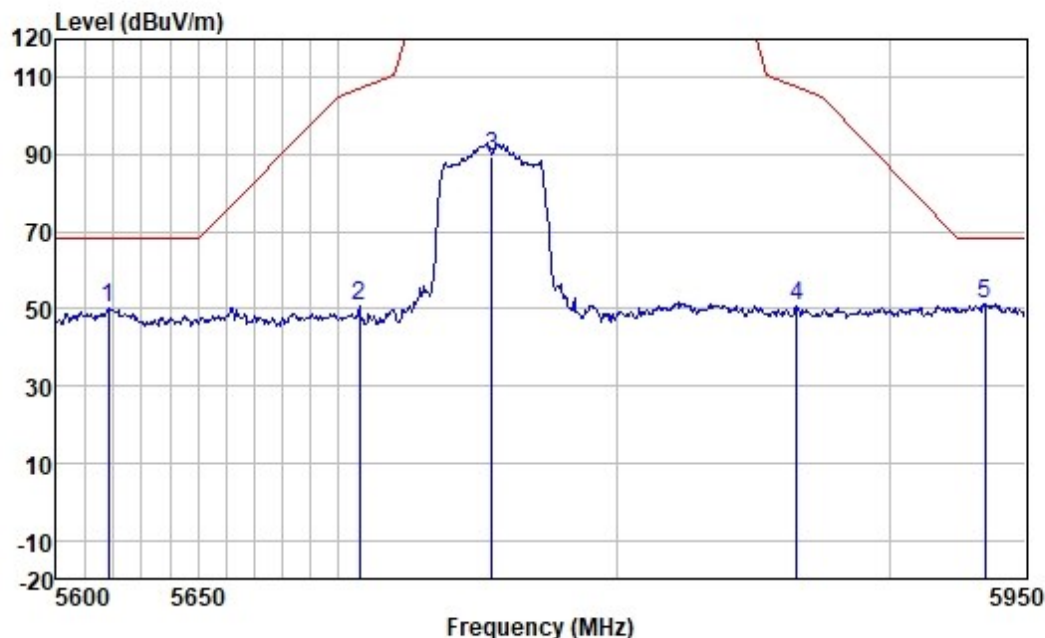

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5618.363	49.35	32.63	5.21	37.14	50.05	68.20	-18.15	VERTICAL	peak
2	5707.277	49.73	32.65	5.27	37.13	50.52	107.24	-56.72	VERTICAL	peak
3	5755.000	88.83	32.65	5.30	37.12	89.66	125.20	-35.54	VERTICAL	peak
4	5865.833	49.81	32.68	5.38	37.11	50.76	107.76	-57.00	VERTICAL	peak
5	5935.229	50.23	32.69	5.41	37.11	51.22	68.20	-16.98	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

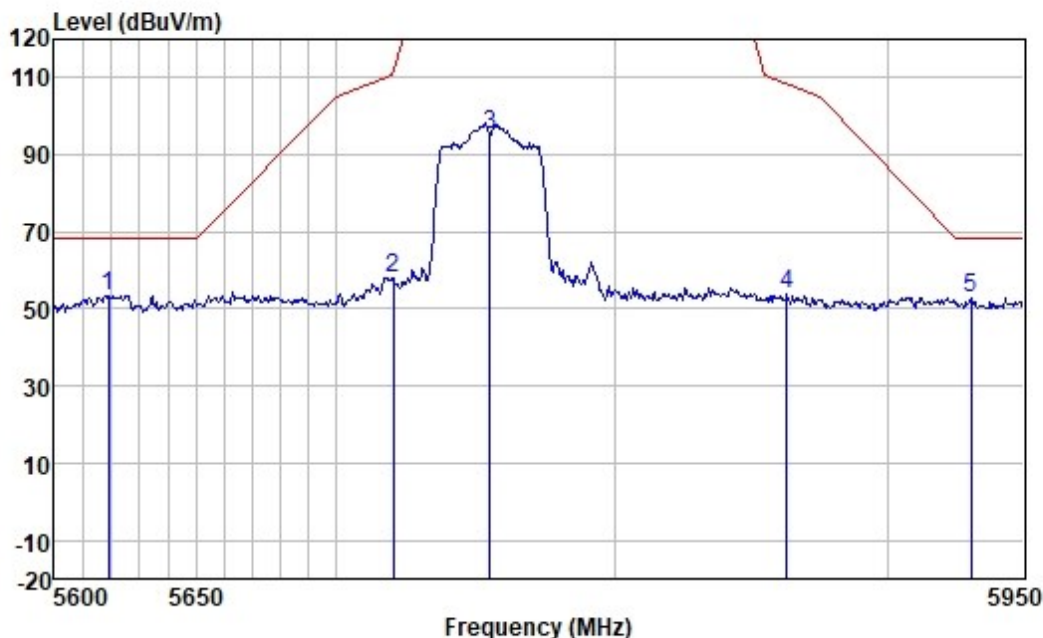

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5619.044	52.79	32.63	5.21	37.14	53.49	68.20	-14.71	HORIZONTAL	peak
2	5720.094	57.47	32.65	5.27	37.13	58.26	111.01	-52.75	HORIZONTAL	peak
3	5755.000	94.17	32.65	5.30	37.12	95.00	125.20	-30.20	HORIZONTAL	peak
4	5862.988	53.01	32.68	5.38	37.11	53.96	108.56	-54.60	HORIZONTAL	peak
5	5930.913	51.82	32.69	5.41	37.11	52.81	68.20	-15.39	HORIZONTAL	peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

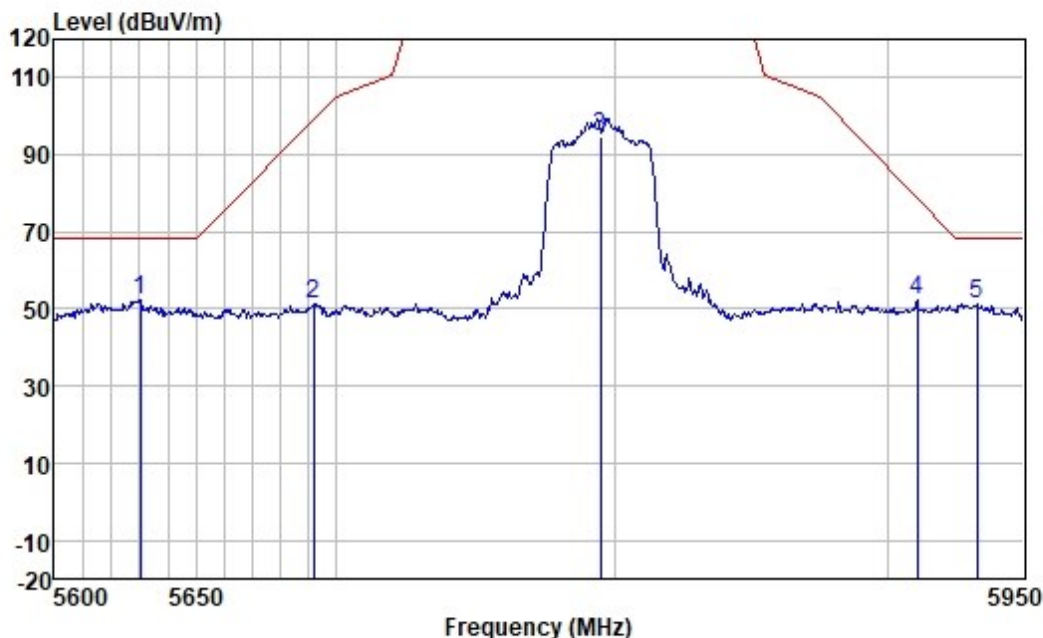

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5630.297	51.52	32.63	5.22	37.14	52.23	68.20	-15.97	VERTICAL	peak
2	5691.729	50.36	32.64	5.26	37.13	51.13	99.10	-47.97	VERTICAL	peak
3	5795.000	94.04	32.67	5.34	37.12	94.93	125.20	-30.27	VERTICAL	peak
4	5910.812	51.32	32.69	5.41	37.11	52.31	78.69	-26.38	VERTICAL	peak
5	5933.070	50.14	32.69	5.41	37.11	51.13	68.20	-17.07	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

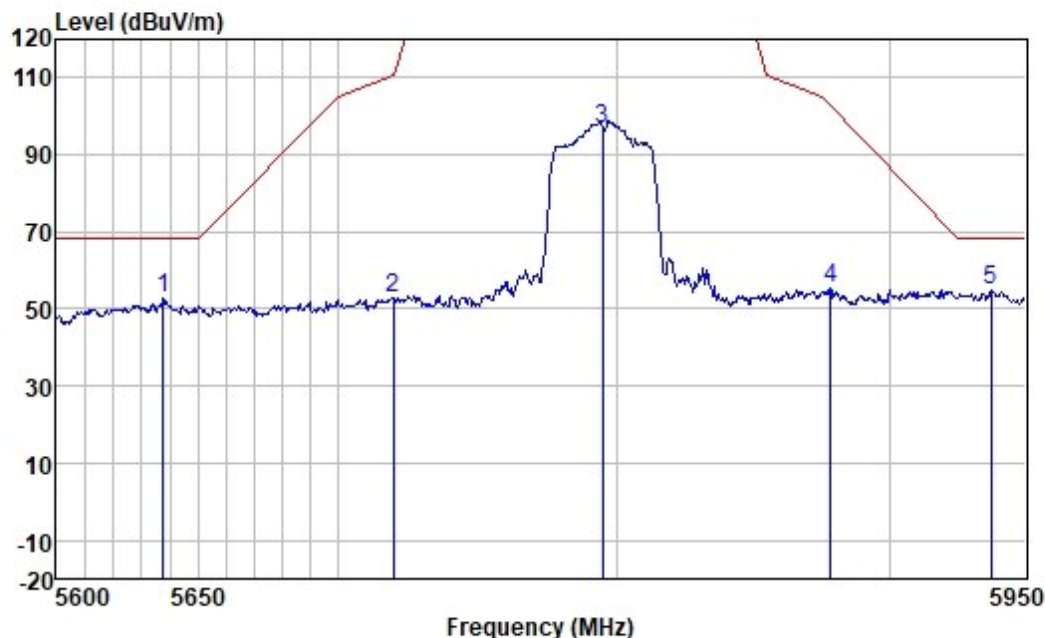

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5637.812	52.11	32.63	5.22	37.14	52.82	68.20	-15.38	HORIZONTAL	peak
2	5719.400	52.21	32.65	5.27	37.13	53.00	110.63	-57.63	HORIZONTAL	peak
3	5795.000	96.07	32.67	5.34	37.12	96.96	125.20	-28.24	HORIZONTAL	peak
4	5878.292	54.40	32.68	5.39	37.11	55.36	102.82	-47.46	HORIZONTAL	peak
5	5937.388	53.67	32.69	5.41	37.11	54.66	68.20	-13.54	HORIZONTAL	peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11ax; Bandwidth:80MHz

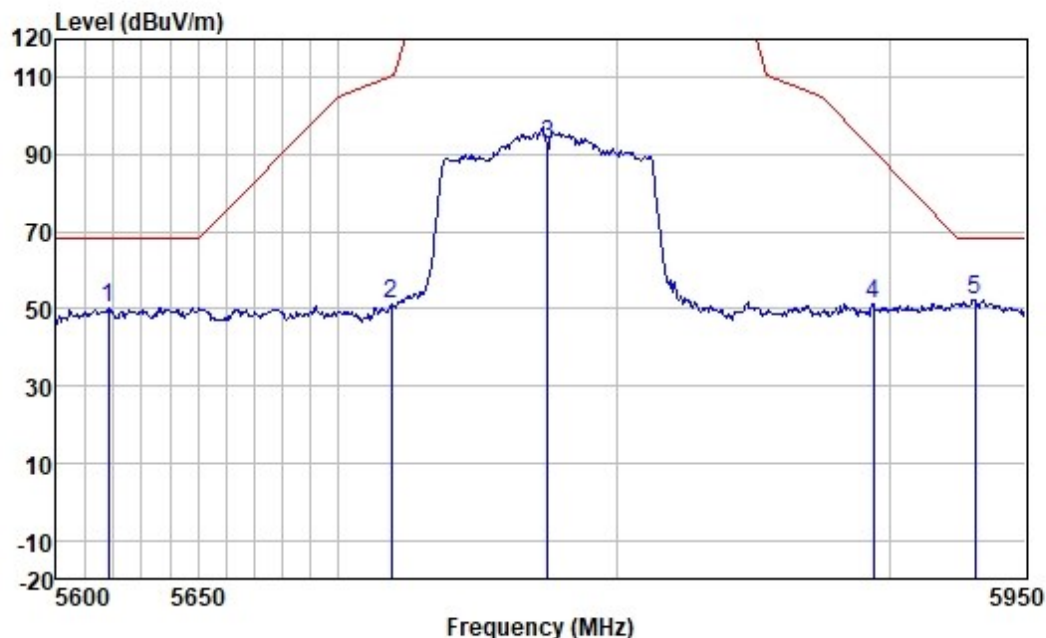

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5618.363	49.59	32.63	5.21	37.14	50.29	68.20	-17.91	VERTICAL	peak
2	5718.707	50.43	32.65	5.27	37.13	51.22	110.44	-59.22	VERTICAL	peak
3	5775.000	91.49	32.66	5.33	37.12	92.36	125.20	-32.84	VERTICAL	peak
4	5893.994	50.48	32.69	5.40	37.11	51.46	91.15	-39.69	VERTICAL	peak
5	5931.632	51.59	32.69	5.41	37.11	52.58	68.20	-15.62	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:80MHz

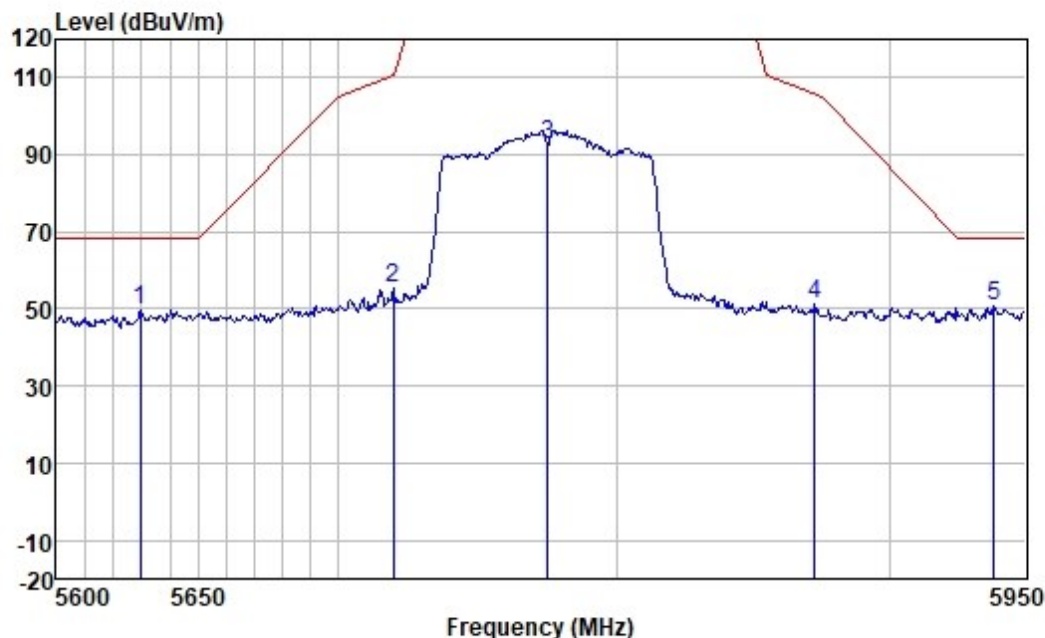

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5629.614	49.03	32.63	5.22	37.14	49.74	68.20	-18.46	HORIZONTAL peak
2	5719.400	54.71	32.65	5.27	37.13	55.50	110.63	-55.13	HORIZONTAL peak
3	5775.000	91.82	32.66	5.33	37.12	92.69	125.20	-32.51	HORIZONTAL peak
4	5872.237	50.21	32.68	5.38	37.11	51.16	105.97	-54.81	HORIZONTAL peak
5	5938.828	49.66	32.69	5.41	37.10	50.66	68.20	-17.54	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

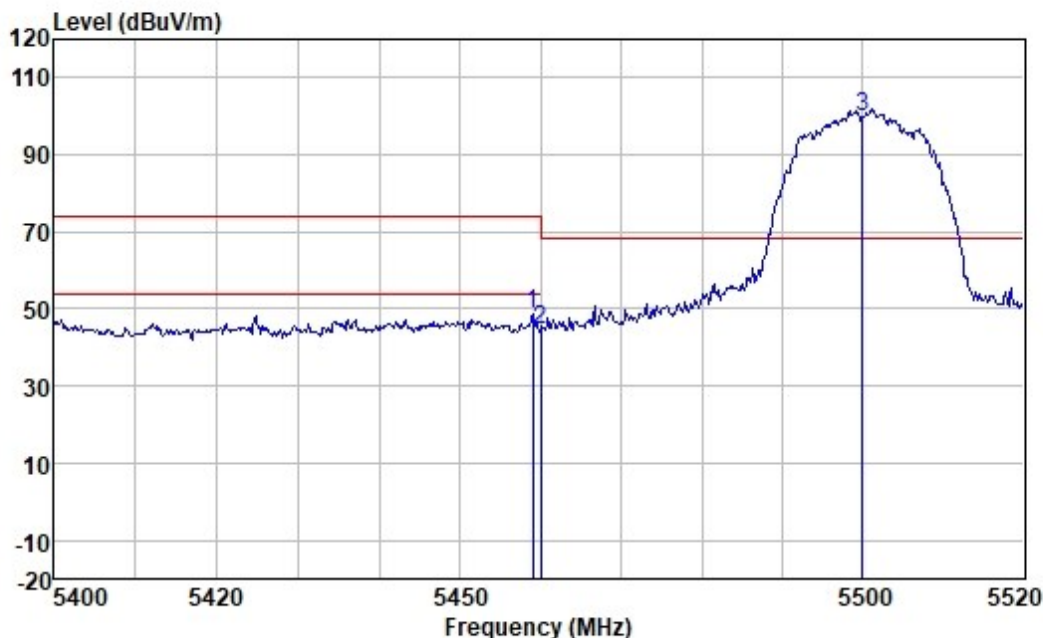

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5458.950	47.88	32.71	5.14	37.16	48.57	74.00	-25.43	VERTICAL	peak
2	5460.000	44.14	32.71	5.14	37.16	44.83	68.20	-23.37	VERTICAL	peak
3 *	5500.000	99.43	32.61	5.16	37.16	100.04	68.20	31.84	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

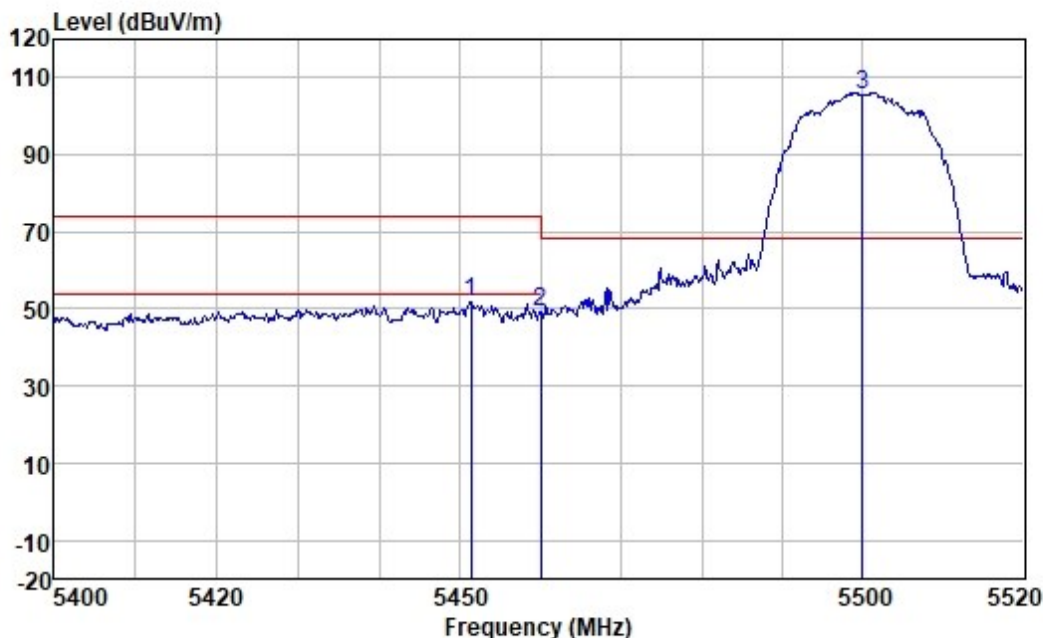

	ReadAntenna	Cable	Preamp		Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5451.397	51.33	32.71	5.14	37.16	52.02	74.00	-21.98	HORIZONTAL peak
2	5460.000	48.33	32.71	5.14	37.16	49.02	68.20	-19.18	HORIZONTAL peak
3 *	5500.000	104.99	32.61	5.16	37.16	105.60	68.20	37.40	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

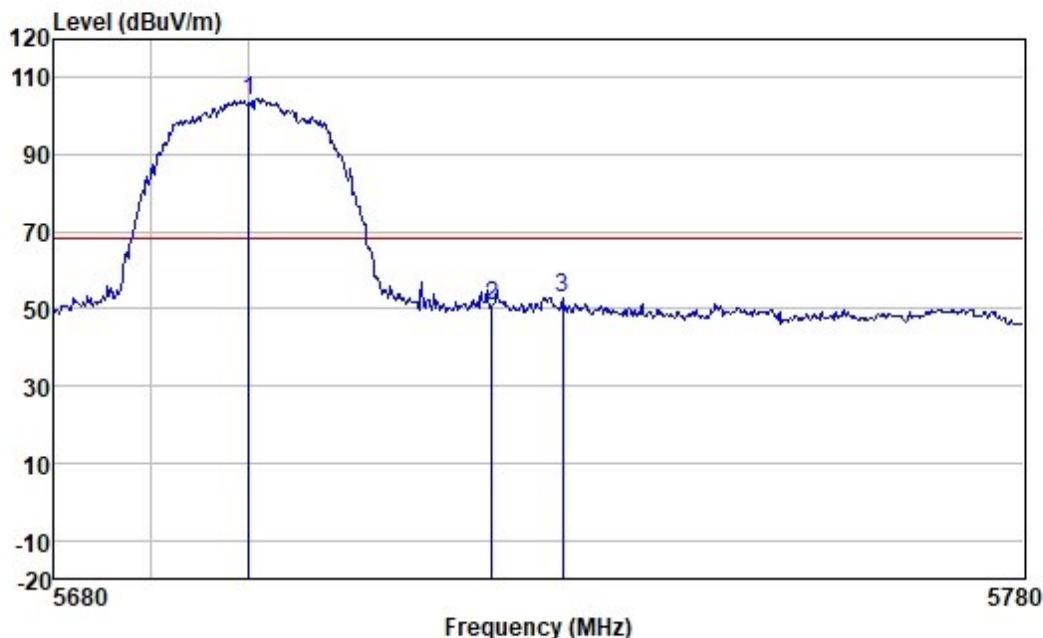

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	5700.000	102.97	32.64	5.26	37.13	103.74	68.20	35.54	VERTICAL peak
2	5725.000	49.77	32.65	5.29	37.13	50.58	68.20	-17.62	VERTICAL peak
3	5732.282	52.21	32.65	5.29	37.13	53.02	68.20	-15.18	VERTICAL Peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

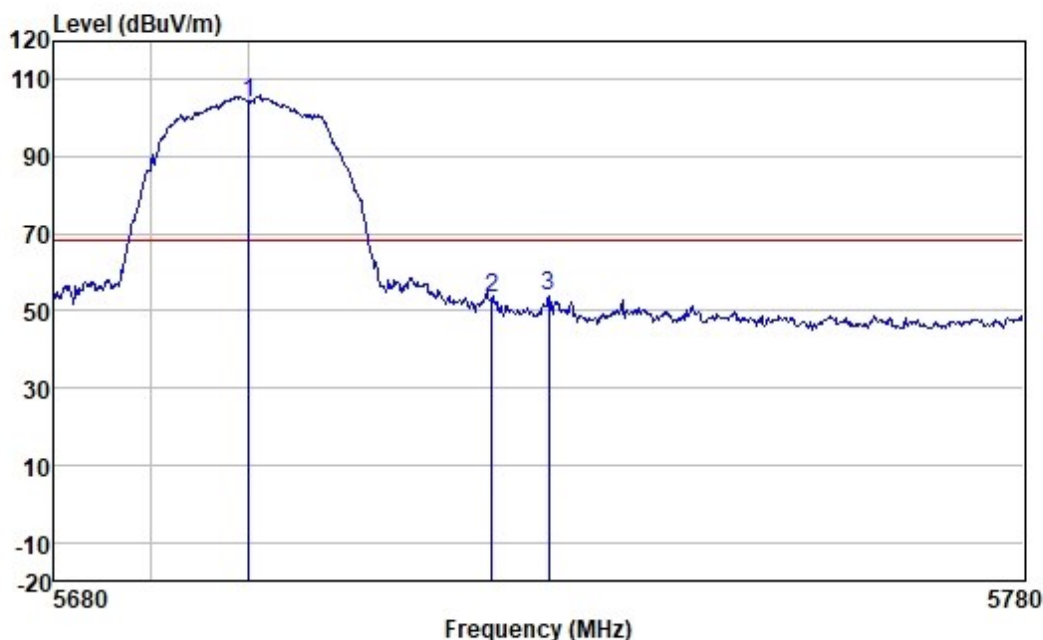

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5700.000	103.01	32.64	5.26	37.13	103.78	68.20	35.58	HORIZONTAL	peak
2	5725.000	52.58	32.65	5.29	37.13	53.39	68.20	-14.81	HORIZONTAL	peak
3	5730.882	53.28	32.65	5.29	37.13	54.09	68.20	-14.11	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

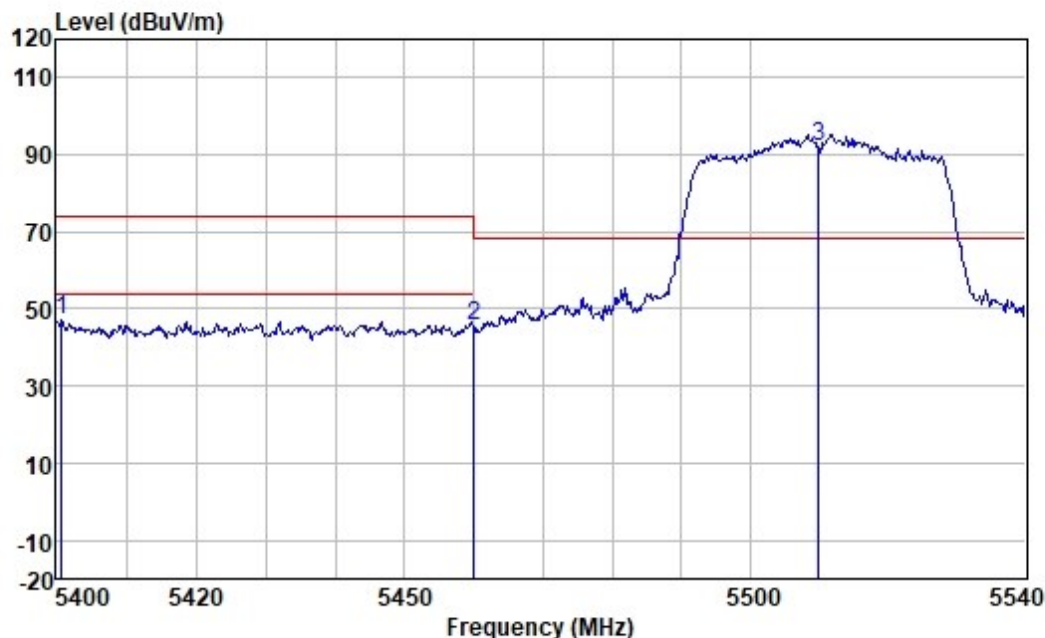

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5400.830	46.31	32.82	5.12	37.17	47.08	74.00	-26.92	VERTICAL	peak
2	5460.000	44.75	32.71	5.14	37.16	45.44	68.20	-22.76	VERTICAL	peak
3 *	5510.000	91.52	32.61	5.16	37.16	92.13	68.20	23.93	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

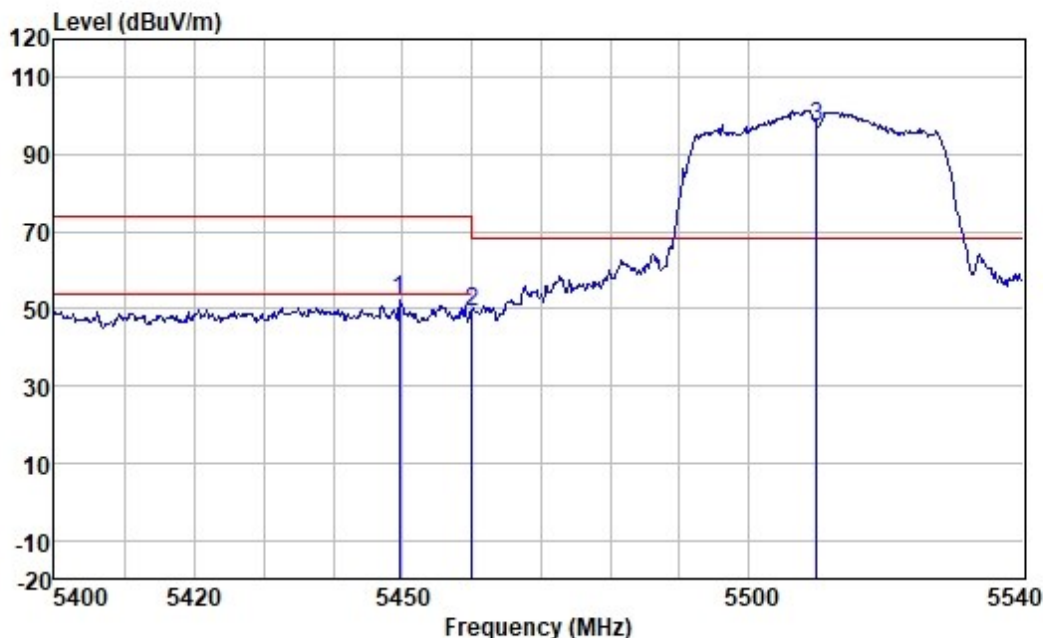

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5449.569	51.42	32.71	5.14	37.16	52.11	74.00	-21.89	HORIZONTAL peak
2	5460.000	48.50	32.71	5.14	37.16	49.19	68.20	-19.01	HORIZONTAL peak
3 *	5510.000	96.65	32.61	5.16	37.16	97.26	68.20	29.06	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

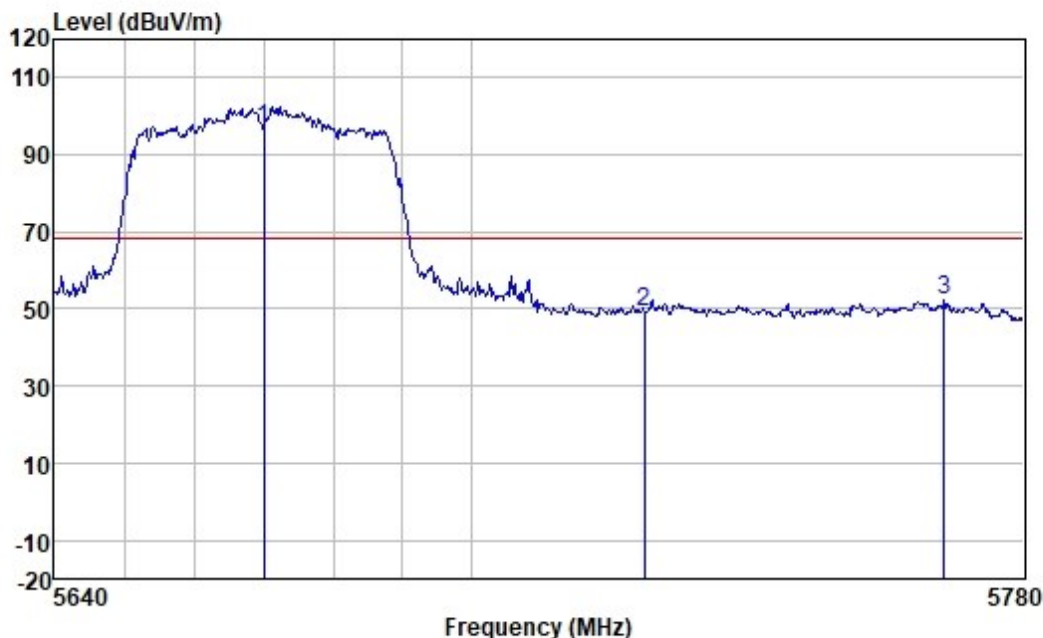

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5670.000	96.17	32.64	5.24	37.13	96.92	68.20	28.72	VERTICAL	peak
2	5725.000	48.21	32.65	5.29	37.13	49.02	68.20	-19.18	VERTICAL	peak
3	5768.532	51.73	32.66	5.31	37.12	52.58	68.20	-15.62	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

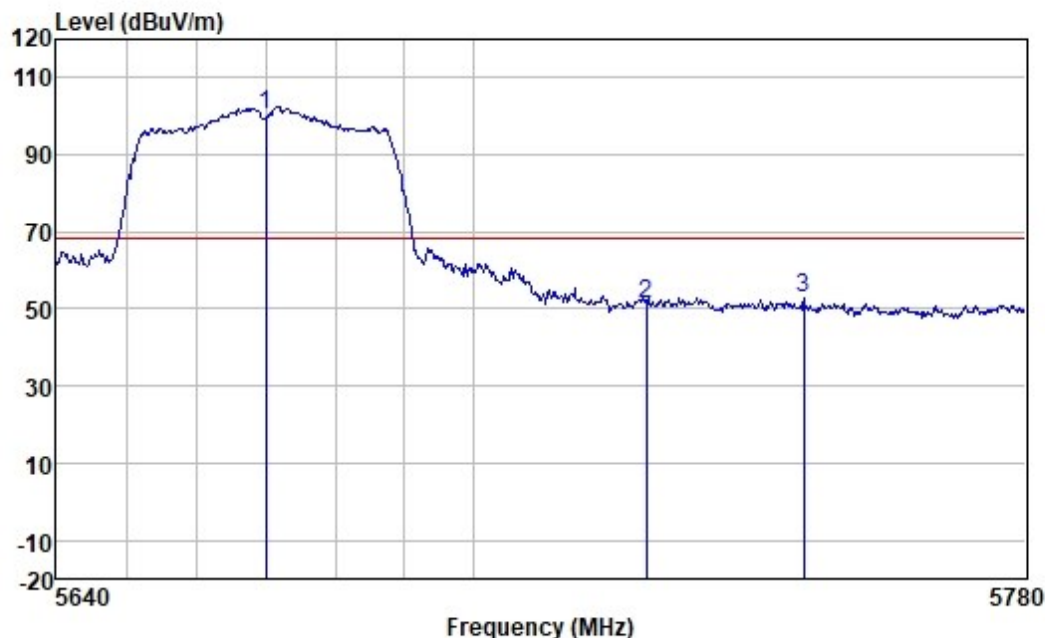

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5670.000	98.66	32.64	5.69	36.78	100.21	68.20	32.01	HORIZONTAL	peak
2	5725.000	49.74	32.65	5.72	36.78	51.33	68.20	-16.87	HORIZONTAL	peak
3	5747.777	51.40	32.65	5.74	36.79	53.00	68.20	-15.20	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11ax; Bandwidth:80MHz; Channel:Low

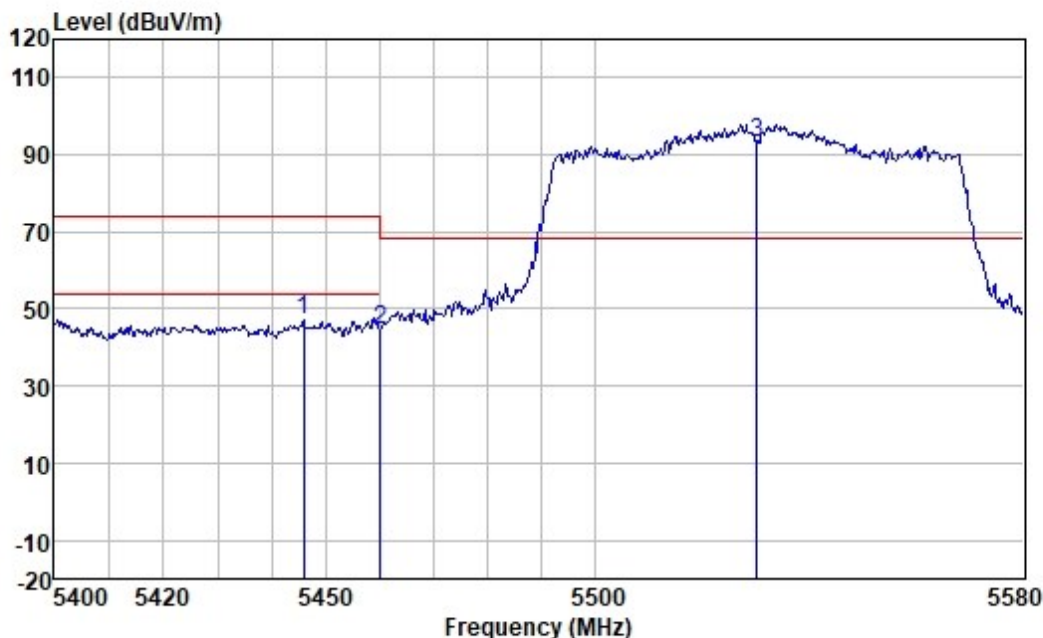

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5445.876	46.27	32.74	5.14	37.16	46.99	74.00	-27.01	VERTICAL	Peak
2	5460.000	43.94	32.71	5.14	37.16	44.63	68.20	-23.57	VERTICAL	peak
3 *	5530.000	92.32	32.61	5.17	37.15	92.95	68.20	24.75	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:80MHz; Channel:Low

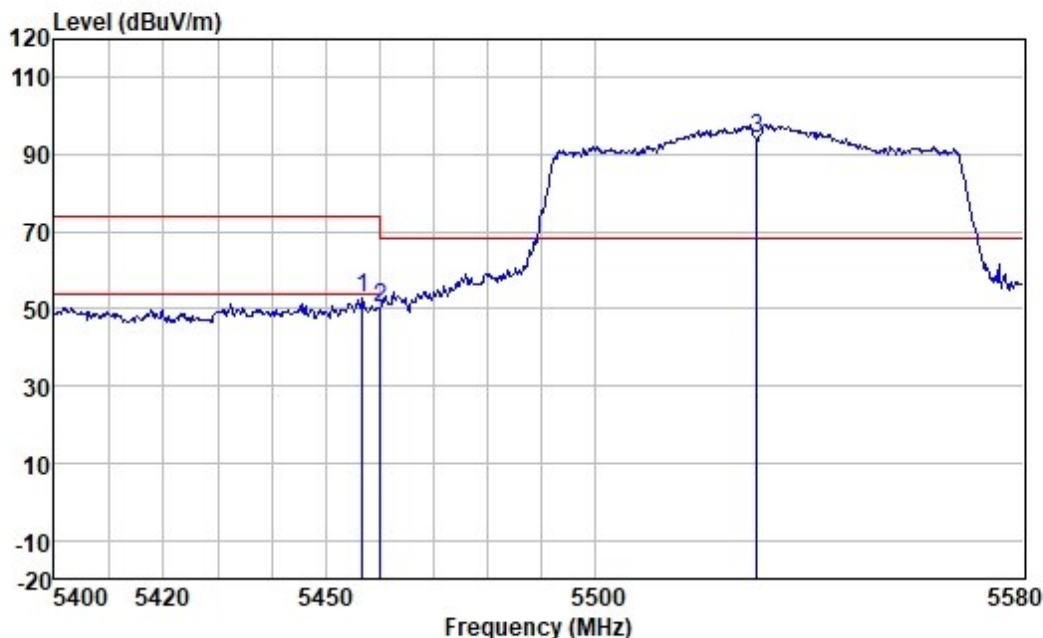

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5456.601	52.02	32.71	5.14	37.16	52.71	74.00	-21.29	HORIZONTAL peak
2	5460.000	49.73	32.71	5.14	37.16	50.42	68.20	-17.78	HORIZONTAL peak
3 *	5530.000	93.40	32.61	5.17	37.15	94.03	68.20	25.83	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11ax; Bandwidth:80MHz; Channel:High

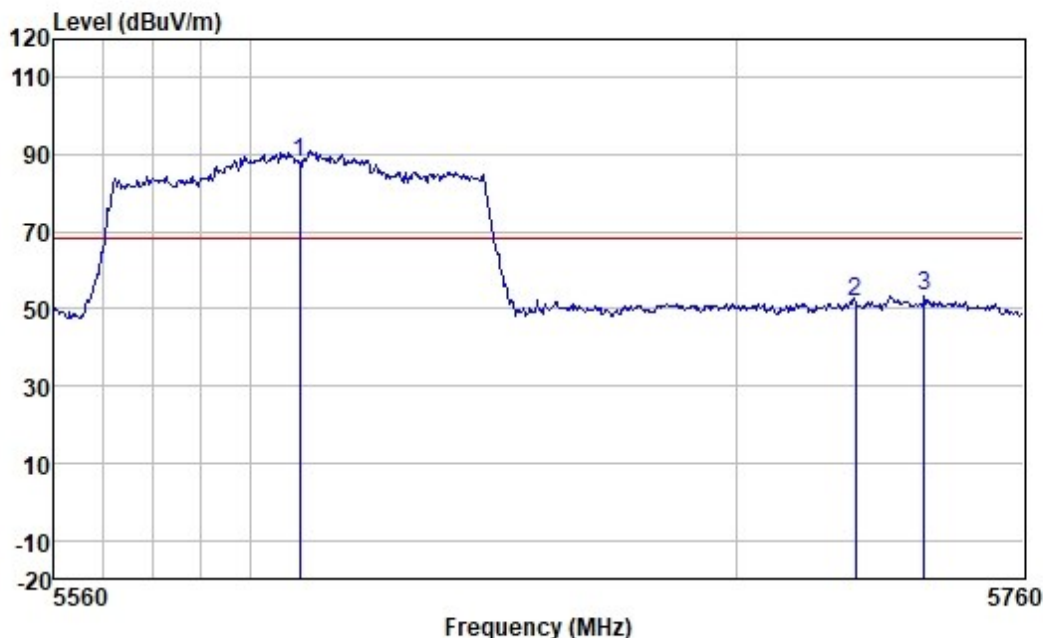

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5610.000	87.18	32.63	5.21	37.14	87.88	68.20	19.68	VERTICAL	peak
2	5725.000	50.76	32.65	5.29	37.13	51.57	68.20	-16.63	VERTICAL	peak
3	5739.478	52.57	32.65	5.30	37.13	53.39	68.20	-14.81	VERTICAL	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:80MHz; Channel:High

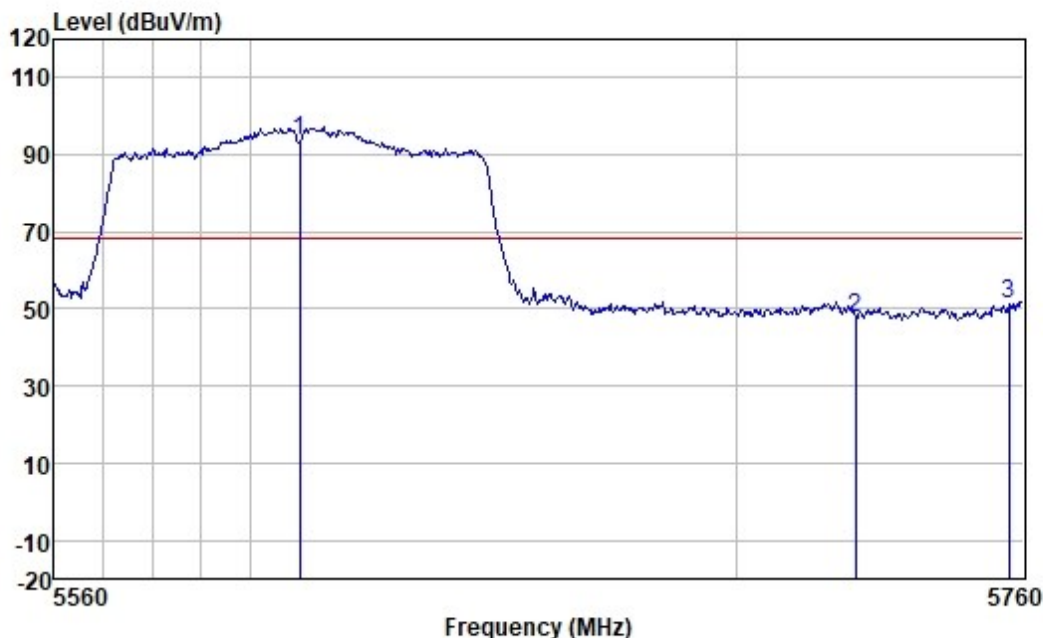

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	5610.000	92.85	32.63	5.21	37.14	93.55	68.20	25.35	HORIZONTAL peak
2	5725.000	46.93	32.65	5.29	37.13	47.74	68.20	-20.46	HORIZONTAL peak
3	5757.151	50.24	32.66	5.31	37.12	51.09	68.20	-17.11	HORIZONTAL Peak



7 Test Setup Photo

Refer to Appendix - Test Setup Photos for GZCR250700106505.

8 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2507001065AT(For Module FCS866R).

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC-TRF-01, EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com