



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low



	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5146.468	52.42	31.85	4.96	37.23	52.00	74.00	-22.00	HORIZONTAL	peak
2	5150.000	51.97	31.85	4.96	37.23	51.55	68.20	-16.65	HORIZONTAL	peak
3 *	5190.000	87.86	31.89	4.99	37.22	87.52	68.20	19.32	HORIZONTAL	peak

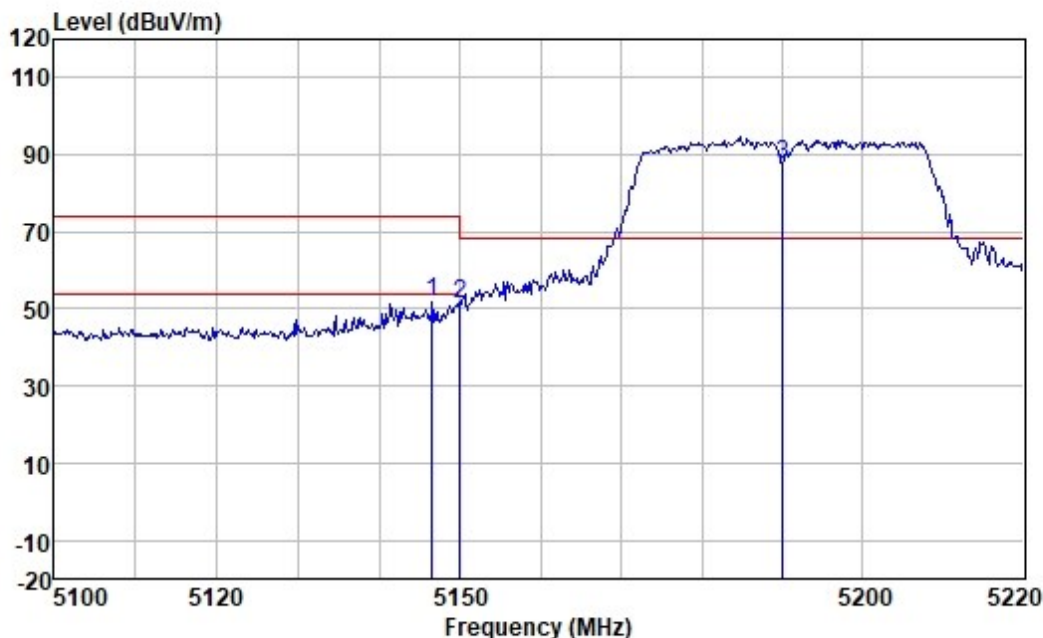


Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

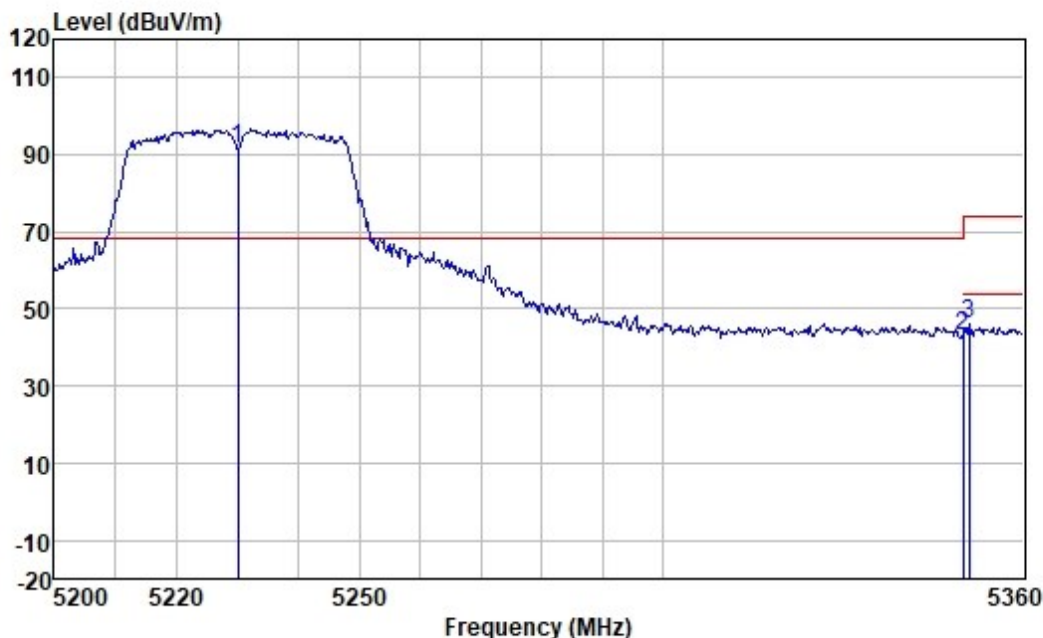

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5230.000	91.74	31.91	5.01	37.21	91.45	68.20	23.25	VERTICAL	peak
2	5350.000	43.02	32.02	5.09	37.18	42.95	68.20	-25.25	VERTICAL	peak
3	5351.073	46.02	32.02	5.09	37.18	45.95	74.00	-28.05	VERTICAL	peak




Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

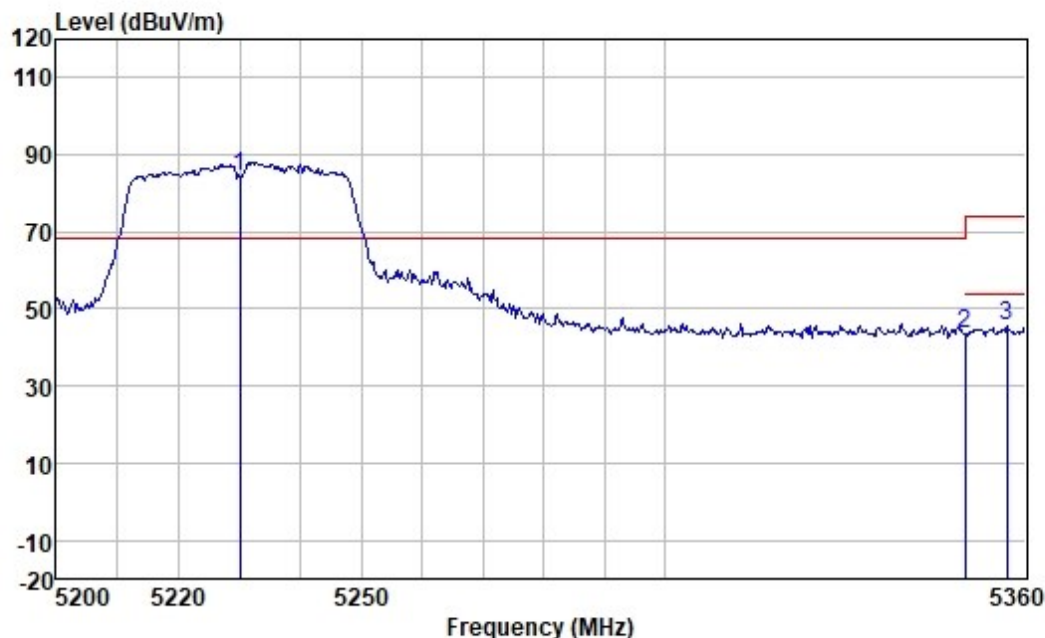

		ReadAntenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5230.000	84.49	31.91	5.01	37.21	84.20	68.20	16.00	HORIZONTAL peak
2	5350.000	43.66	32.02	5.09	37.18	43.59	68.20	-24.61	HORIZONTAL peak
3	5357.077	45.42	32.03	5.10	37.18	45.37	74.00	-28.63	HORIZONTAL peak




Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz

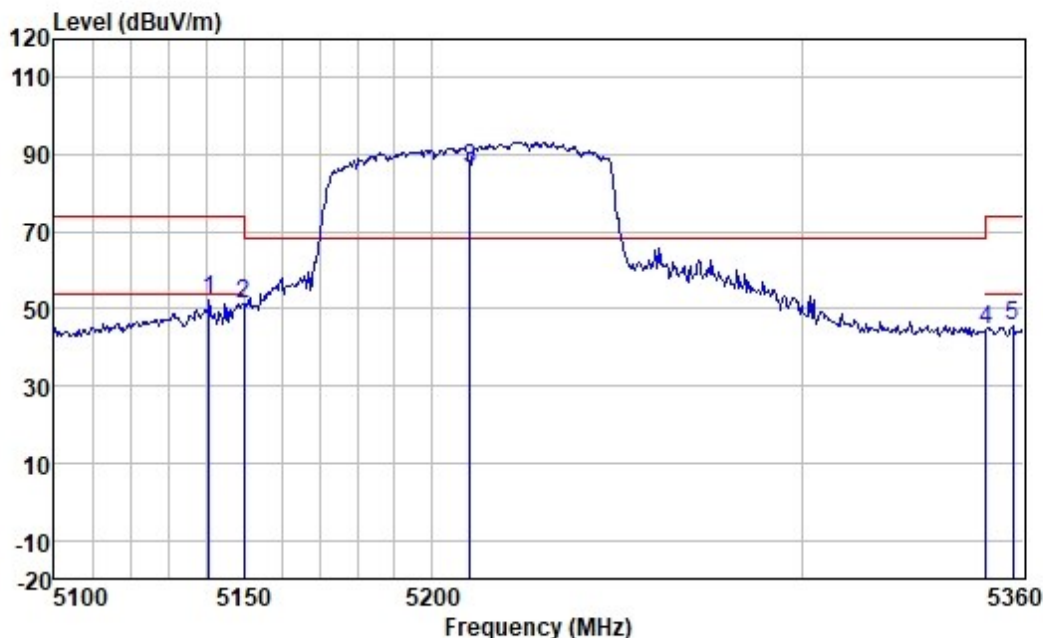

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5140.736	52.54	31.85	4.95	37.23	52.11	74.00	-21.89	VERTICAL	peak
2	5150.000	51.94	31.85	4.96	37.23	51.52	68.20	-16.68	VERTICAL	peak
3 *	5210.000	86.78	31.90	5.00	37.21	86.47	68.20	18.27	VERTICAL	peak
4	5350.000	44.54	32.02	5.09	37.18	44.47	68.20	-23.73	VERTICAL	peak
5	5357.335	45.49	32.03	5.10	37.18	45.44	74.00	-28.56	VERTICAL	peak




Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz

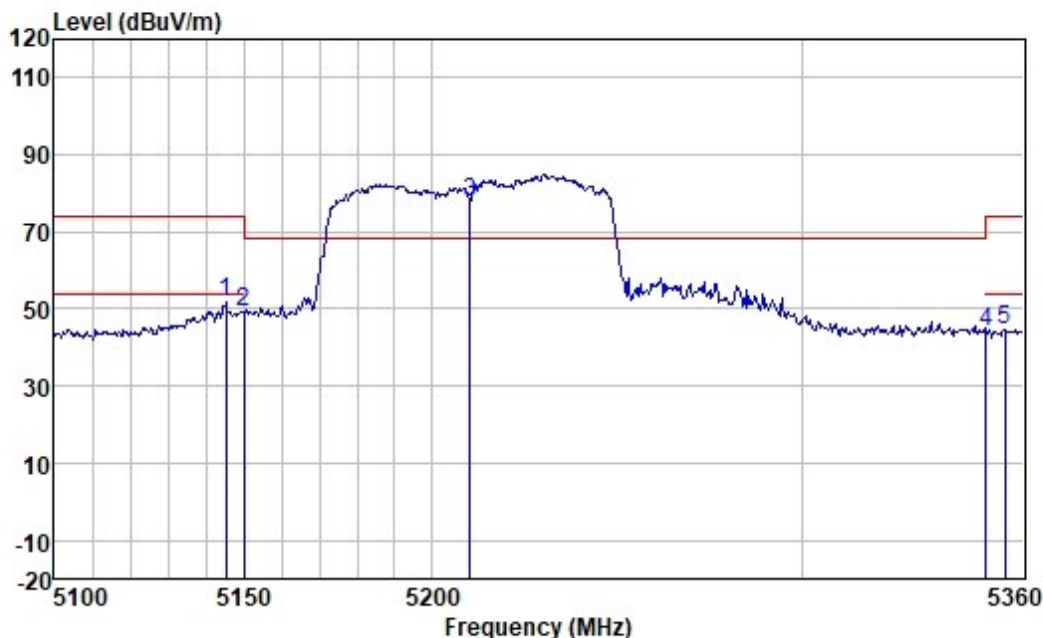

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5145.339	52.13	31.85	4.96	37.23	51.71	74.00	-22.29	HORIZONTAL peak
2	5150.000	49.78	31.85	4.96	37.23	49.36	68.20	-18.84	HORIZONTAL peak
3 *	5210.000	78.04	31.90	5.00	37.21	77.73	68.20	9.53	HORIZONTAL peak
4	5350.000	44.27	32.02	5.09	37.18	44.20	68.20	-24.00	HORIZONTAL peak
5	5355.205	44.69	32.03	5.10	37.18	44.64	74.00	-29.36	HORIZONTAL peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

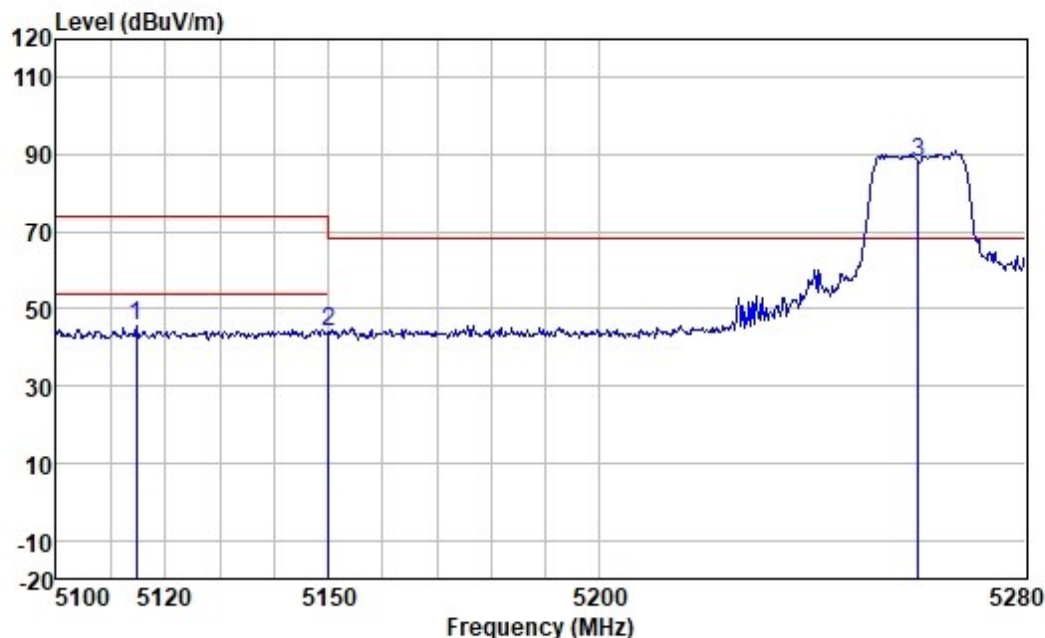

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5114.704	46.11	31.84	4.95	37.25	45.65	74.00	-28.35	VERTICAL	peak
2	5150.000	44.38	31.85	4.96	37.23	43.96	68.20	-24.24	VERTICAL	peak
3 *	5260.000	88.07	31.94	5.03	37.20	87.84	68.20	19.64	VERTICAL	peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

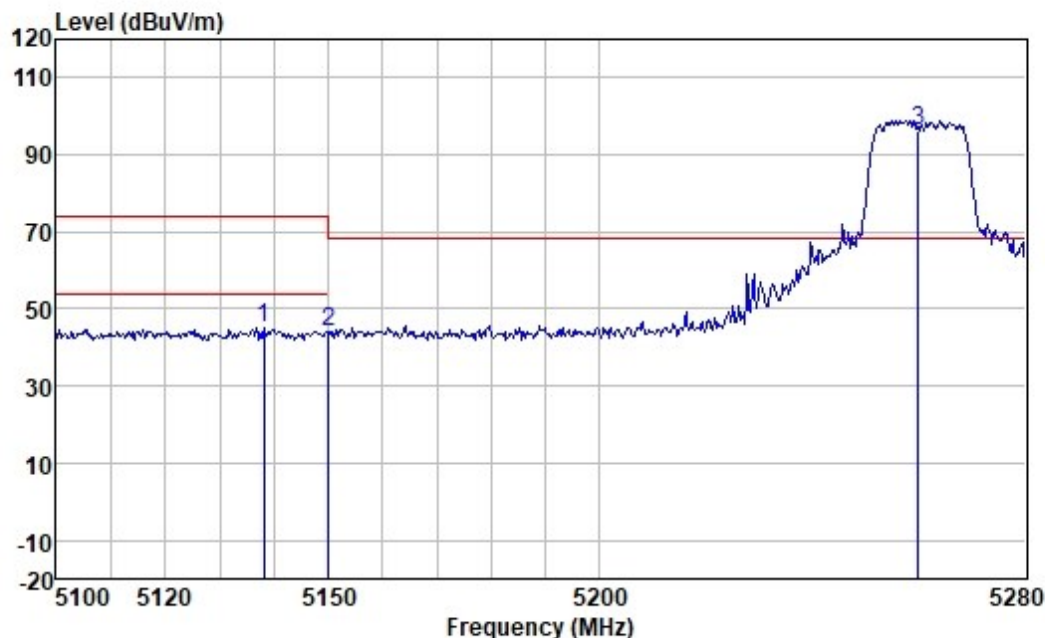

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5138.175	45.38	31.85	4.95	37.24	44.94	74.00	-29.06	HORIZONTAL	peak
2	5150.000	44.23	31.85	4.96	37.23	43.81	68.20	-24.39	HORIZONTAL	peak
3 *	5260.000	96.66	31.94	5.03	37.20	96.43	68.20	28.23	HORIZONTAL	peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

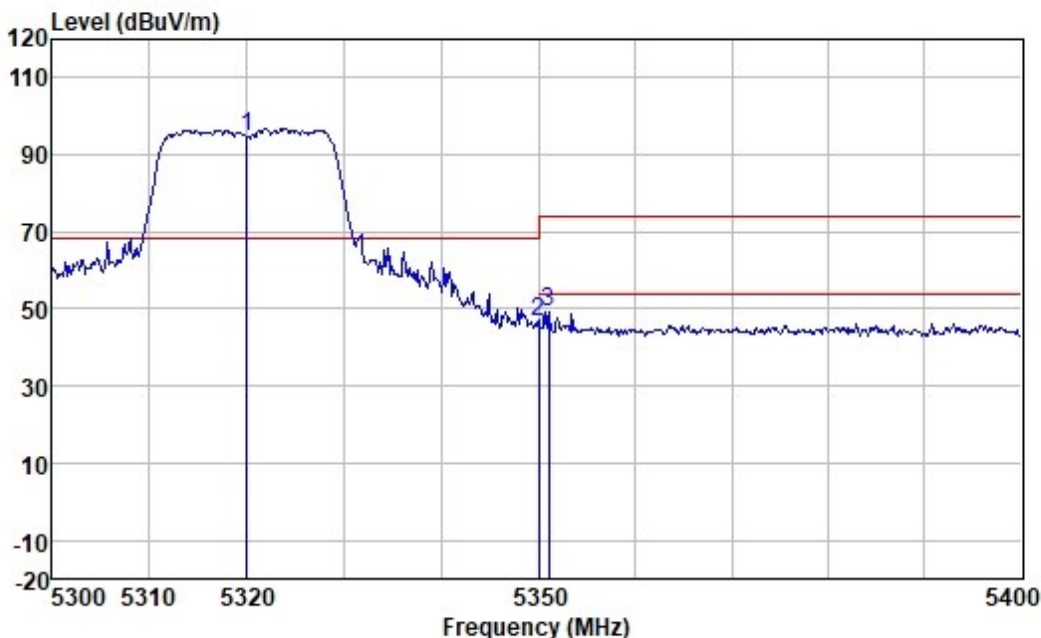

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5320.000	94.69	32.00	5.08	37.19	94.58	68.20	26.38	VERTICAL	peak
2	5350.000	46.54	32.02	5.09	37.18	46.47	68.20	-21.73	VERTICAL	peak
3	5351.066	49.39	32.02	5.09	37.18	49.32	74.00	-24.68	VERTICAL	peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

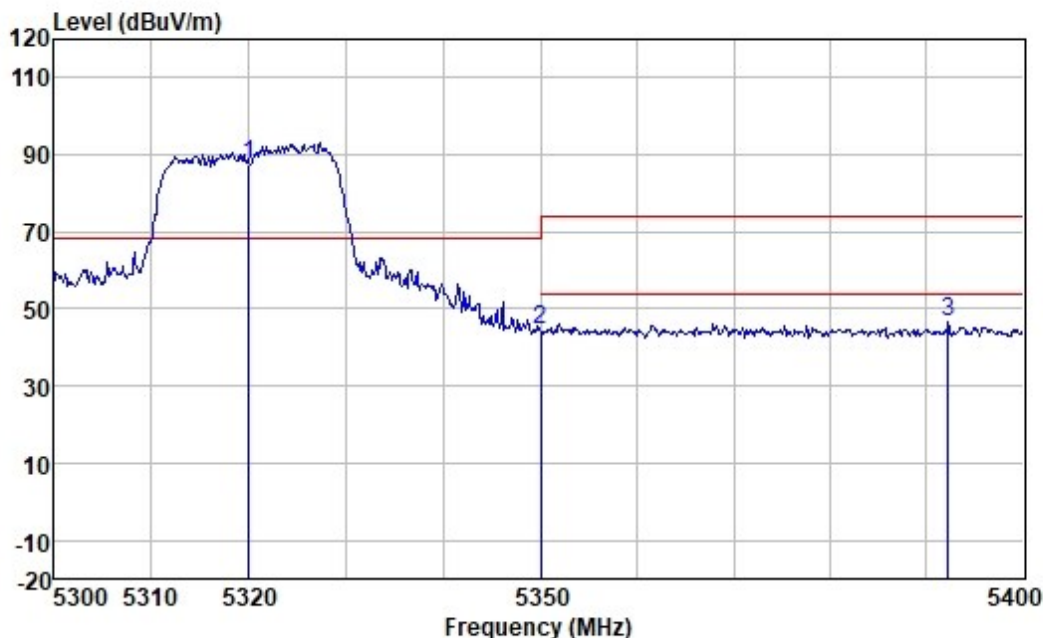

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	5320.000	87.61	32.00	5.08	37.19	87.50	68.20	19.30	HORIZONTAL peak
2	5350.000	44.69	32.02	5.09	37.18	44.62	68.20	-23.58	HORIZONTAL peak
3	5392.233	46.88	32.05	5.12	37.18	46.87	74.00	-27.13	HORIZONTAL peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

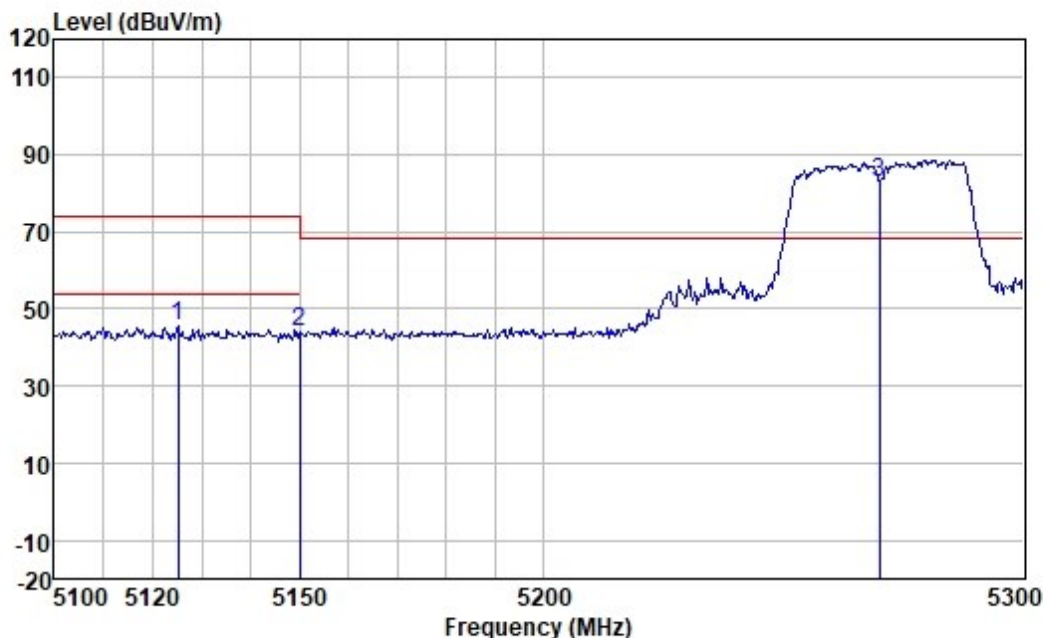

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5125.173	45.82	31.84	4.95	37.24	45.37	74.00	-28.63	VERTICAL	peak
2	5150.000	44.23	31.85	4.96	37.23	43.81	68.20	-24.39	VERTICAL	peak
3 *	5270.000	82.77	31.96	5.04	37.20	82.57	68.20	14.37	VERTICAL	peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

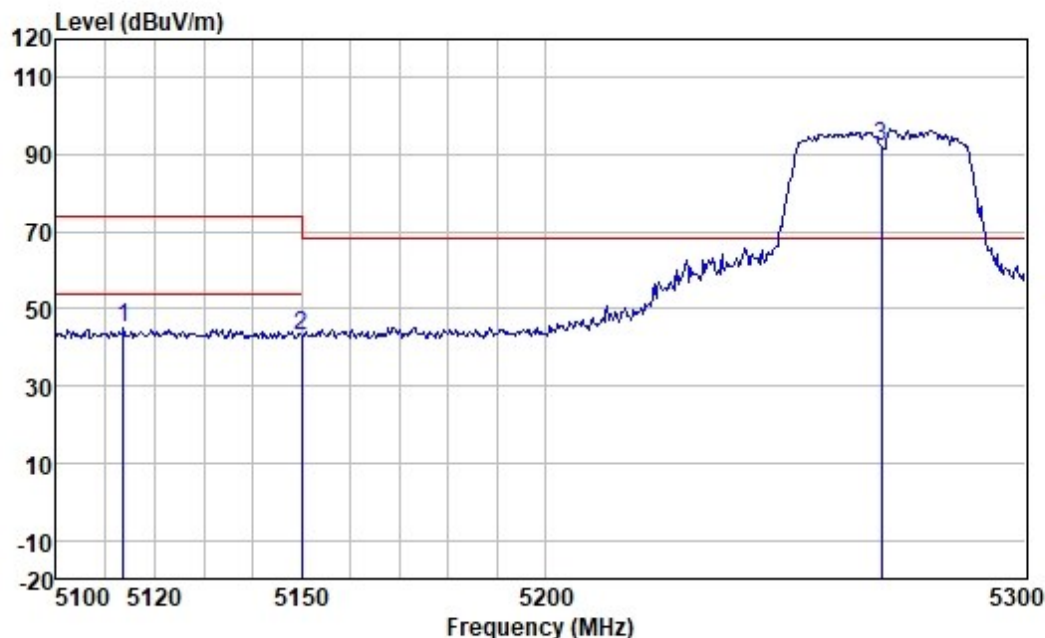

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5113.554	45.63	31.84	4.95	37.25	45.17	74.00	-28.83	HORIZONTAL peak
2	5150.000	43.39	31.85	4.96	37.23	42.97	68.20	-25.23	HORIZONTAL peak
3 *	5270.000	92.20	31.96	5.04	37.20	92.00	68.20	23.80	HORIZONTAL peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

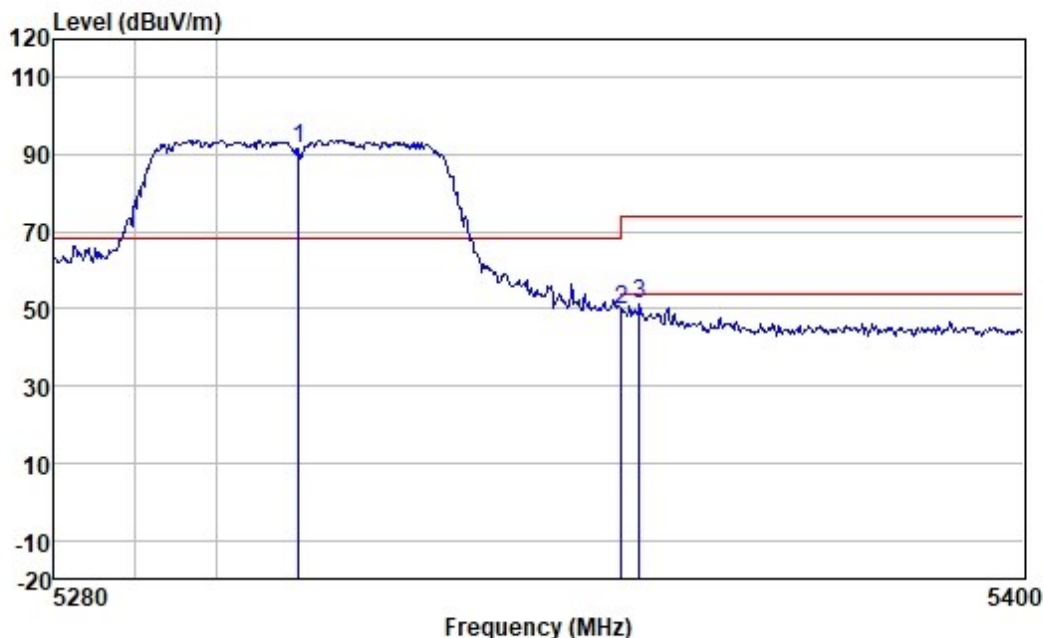

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5310.000	91.44	32.00	5.08	37.19	91.33	68.20	23.13	VERTICAL	peak
2	5350.000	49.99	32.02	5.09	37.18	49.92	68.20	-18.28	VERTICAL	peak
3	5352.157	51.26	32.02	5.09	37.18	51.19	74.00	-22.81	VERTICAL	peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

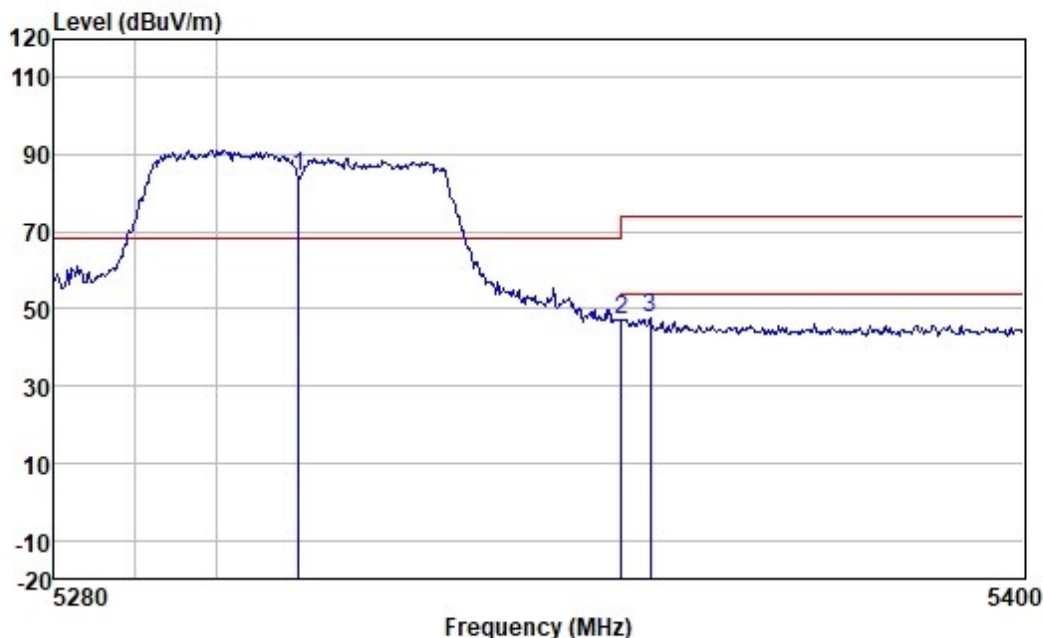

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5310.000	84.72	32.00	5.08	37.19	84.61	68.20	16.41	HORIZONTAL	peak
2	5350.000	47.12	32.02	5.09	37.18	47.05	68.20	-21.15	HORIZONTAL	peak
3	5353.601	47.80	32.02	5.09	37.18	47.73	74.00	-26.27	HORIZONTAL	peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz

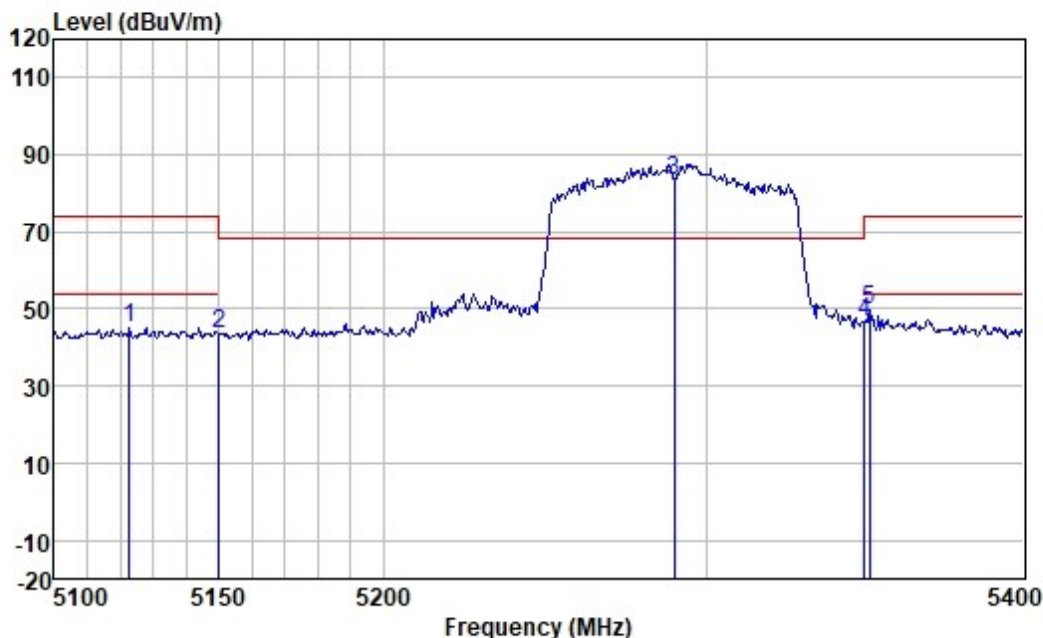

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5122.789	45.67	31.84	4.95	37.24	45.22	74.00	-28.78	VERTICAL	peak
2	5150.000	43.76	31.85	4.96	37.23	43.34	68.20	-24.86	VERTICAL	peak
3 *	5290.000	83.71	31.97	5.05	37.20	83.53	68.20	15.33	VERTICAL	peak
4	5350.000	46.86	32.02	5.09	37.18	46.79	68.20	-21.41	VERTICAL	peak
5	5351.452	49.86	32.02	5.09	37.18	49.79	74.00	-24.21	VERTICAL	peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz

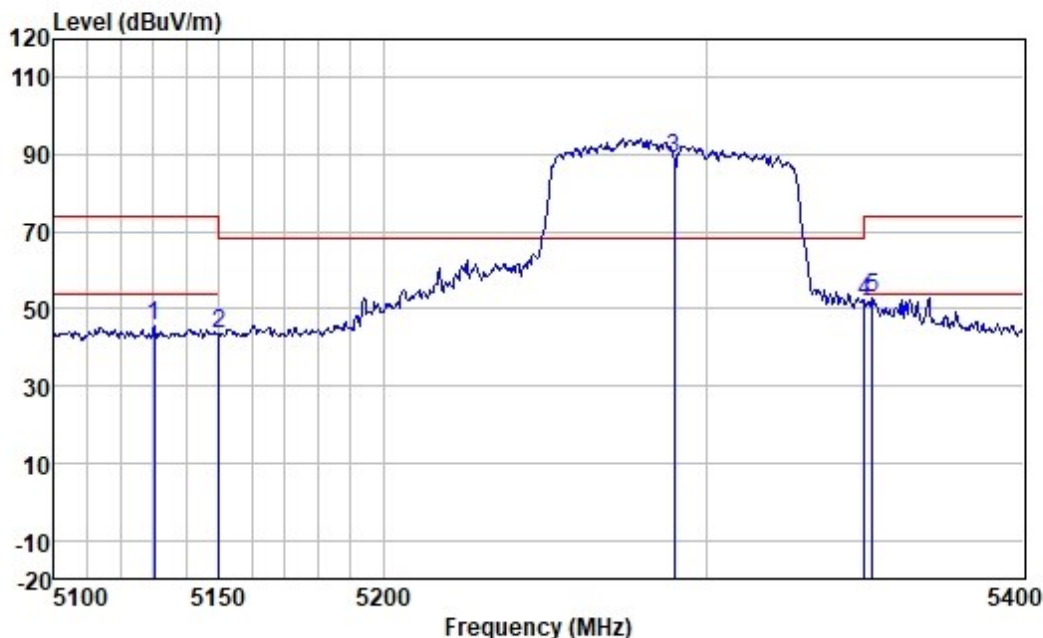

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5130.114	45.91	31.85	4.95	37.24	45.47	74.00	-28.53	HORIZONTAL peak
2	5150.000	43.93	31.85	4.96	37.23	43.51	68.20	-24.69	HORIZONTAL peak
3 *	5290.000	88.94	31.97	5.05	37.20	88.76	68.20	20.56	HORIZONTAL peak
4	5350.000	51.71	32.02	5.09	37.18	51.64	68.20	-16.56	HORIZONTAL peak
5	5352.370	52.81	32.02	5.09	37.18	52.74	74.00	-21.26	HORIZONTAL peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

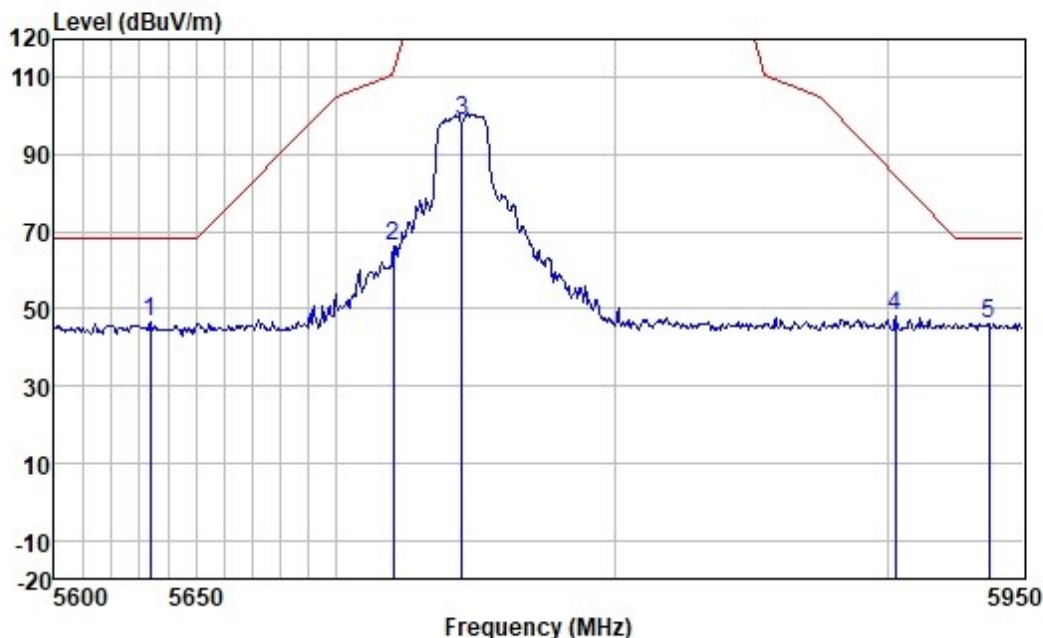

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5633.711	46.08	32.25	5.22	37.14	46.41	68.20	-21.79	VERTICAL	peak
2	5720.094	65.66	32.39	5.27	37.13	66.19	111.01	-44.82	VERTICAL	peak
3	5745.000	97.95	32.46	5.30	37.13	98.58	125.20	-26.62	VERTICAL	peak
4	5902.933	47.21	32.71	5.40	37.11	48.21	84.52	-36.31	VERTICAL	peak
5	5937.388	45.33	32.75	5.41	37.11	46.38	68.20	-21.82	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

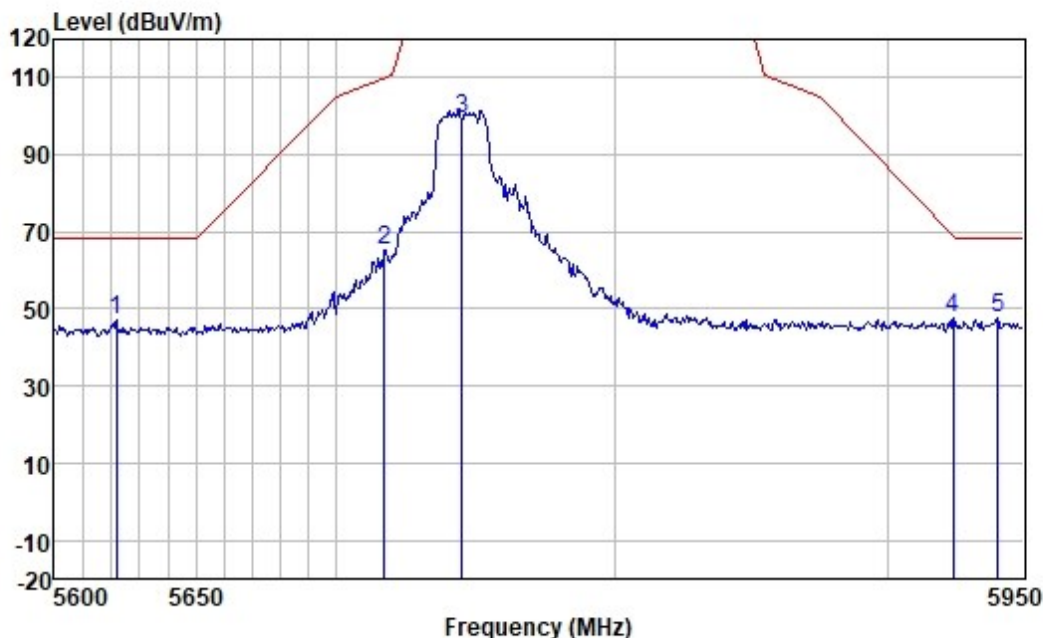

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5621.770	46.77	32.23	5.21	37.14	47.07	68.20	-21.13	HORIZONTAL peak
2	5716.974	64.95	32.39	5.27	37.13	65.48	109.95	-44.47	HORIZONTAL peak
3	5745.000	98.53	32.46	5.30	37.13	99.16	125.20	-26.04	HORIZONTAL peak
4	5924.085	46.86	32.75	5.41	37.11	47.91	68.88	-20.97	HORIZONTAL peak
5	5940.989	46.78	32.75	5.41	37.10	47.84	68.20	-20.36	HORIZONTAL peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

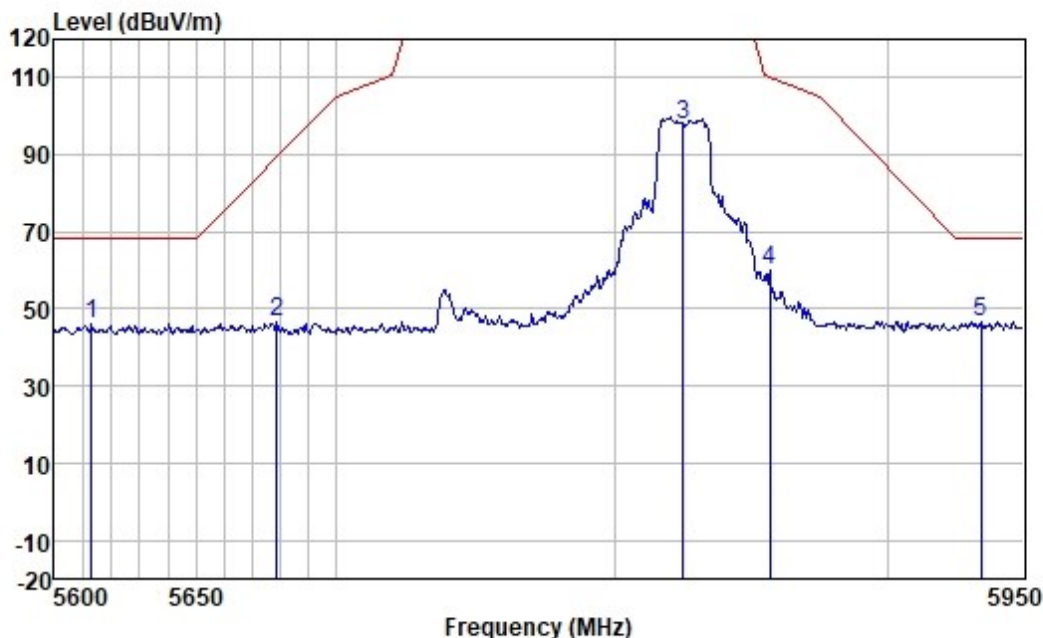

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5613.256	45.92	32.23	5.21	37.14	46.22	68.20	-21.98	VERTICAL	peak
2	5678.631	45.97	32.33	5.25	37.13	46.42	89.43	-43.01	VERTICAL	peak
3	5825.000	97.03	32.62	5.36	37.12	97.89	125.20	-27.31	VERTICAL	peak
4	5856.594	59.18	32.67	5.38	37.11	60.12	110.35	-50.23	VERTICAL	peak
5	5934.509	45.77	32.75	5.41	37.11	46.82	68.20	-21.38	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

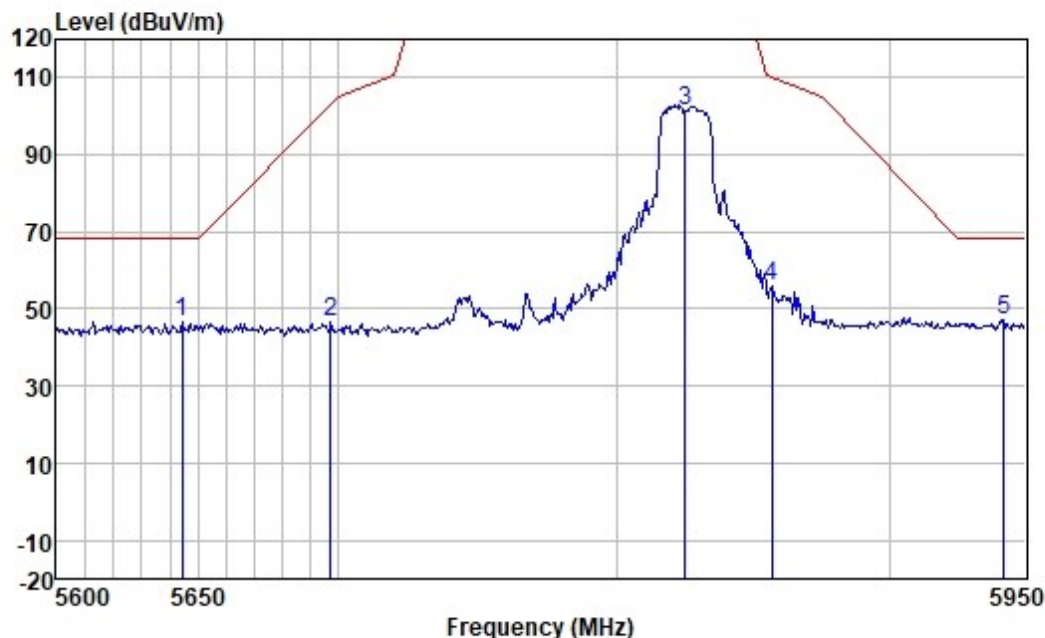

	Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5644.309	46.18	32.28	5.23	37.14	46.55	68.20	-21.65	HORIZONTAL peak
2	5696.907	46.07	32.36	5.26	37.13	46.56	102.92	-56.36	HORIZONTAL peak
3	5825.000	100.39	32.62	5.36	37.12	101.25	125.20	-23.95	HORIZONTAL peak
4	5856.594	54.86	32.67	5.38	37.11	55.80	110.35	-54.55	HORIZONTAL peak
5	5942.430	46.08	32.77	5.42	37.10	47.17	68.20	-21.03	HORIZONTAL peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

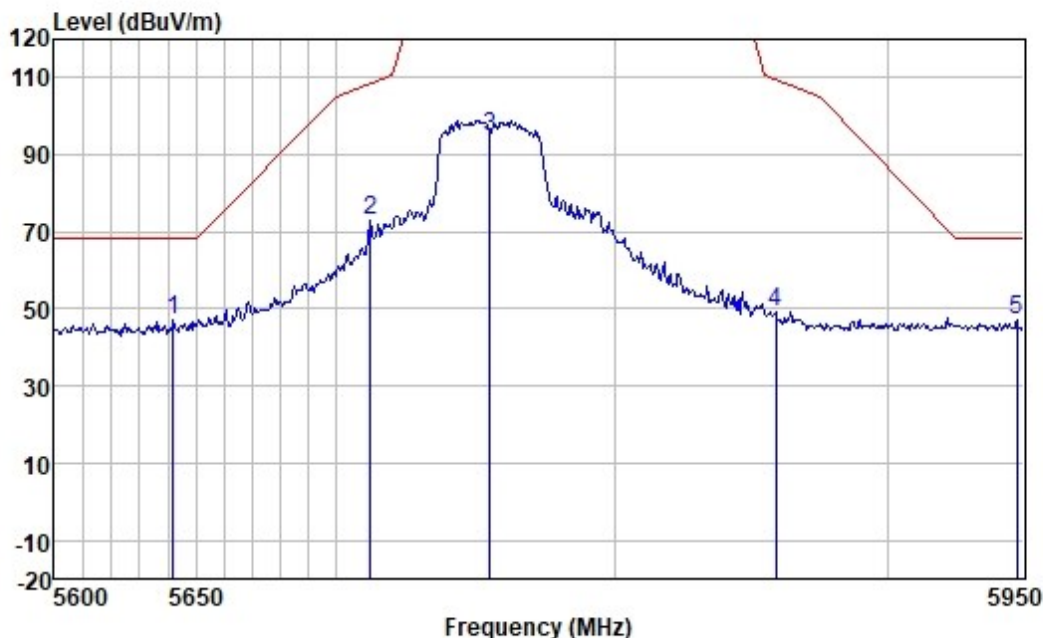

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5641.915	46.58	32.28	5.23	37.14	46.95	68.20	-21.25	VERTICAL peak
2	5712.124	72.26	32.39	5.27	37.13	72.79	108.60	-35.81	VERTICAL peak
3	5755.000	94.02	32.46	5.30	37.12	94.66	125.20	-30.54	VERTICAL peak
4	5858.725	48.30	32.67	5.38	37.11	49.24	109.76	-60.52	VERTICAL peak
5	5947.836	46.10	32.77	5.42	37.10	47.19	68.20	-21.01	VERTICAL peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

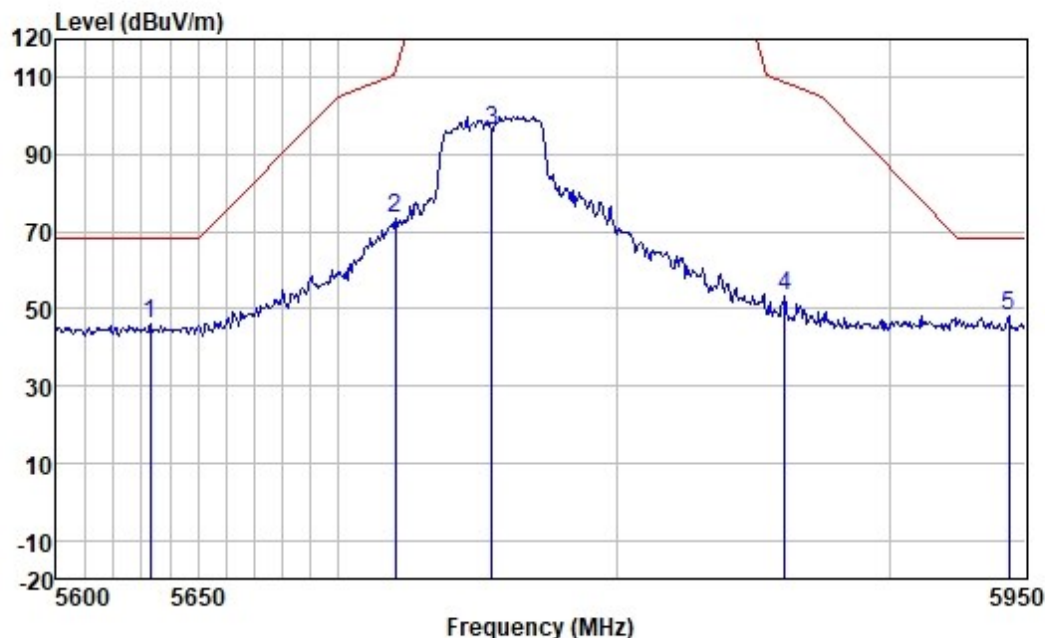

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5633.028	45.86	32.25	5.22	37.14	46.19	68.20	-22.01	HORIZONTAL	peak
2	5720.094	73.03	32.39	5.27	37.13	73.56	111.01	-37.45	HORIZONTAL	peak
3	5755.000	95.57	32.46	5.30	37.12	96.21	125.20	-28.99	HORIZONTAL	peak
4	5861.567	52.38	32.67	5.38	37.11	53.32	108.96	-55.64	HORIZONTAL	peak
5	5944.231	46.88	32.77	5.42	37.10	47.97	68.20	-20.23	HORIZONTAL	peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

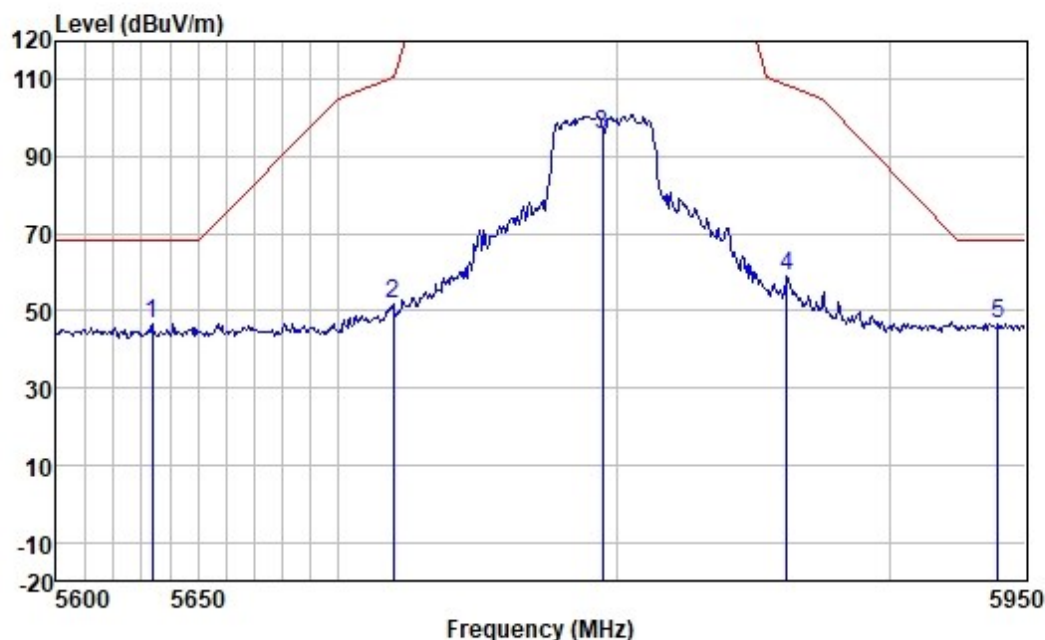

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5633.711	46.23	32.25	5.22	37.14	46.56	68.20	-21.64	VERTICAL	peak
2	5719.400	51.09	32.39	5.27	37.13	51.62	110.63	-59.01	VERTICAL	peak
3	5795.000	94.96	32.56	5.34	37.12	95.74	125.20	-29.46	VERTICAL	peak
4	5862.277	58.22	32.67	5.38	37.11	59.16	108.76	-49.60	VERTICAL	peak
5	5940.269	45.75	32.75	5.41	37.10	46.81	68.20	-21.39	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

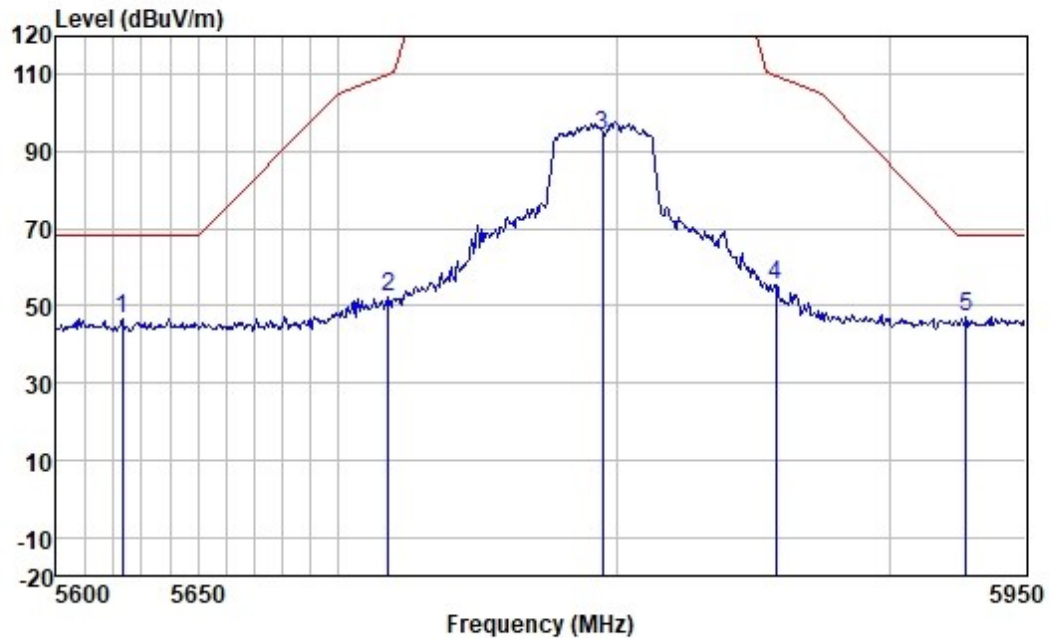

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5623.133	46.51	32.23	5.21	37.14	46.81	68.20	-21.39	HORIZONTAL	peak
2	5717.667	51.92	32.39	5.27	37.13	52.45	110.15	-57.70	HORIZONTAL	peak
3	5795.000	93.14	32.56	5.34	37.12	93.92	125.20	-31.28	HORIZONTAL	peak
4	5858.014	54.70	32.67	5.38	37.11	55.64	109.95	-54.31	HORIZONTAL	peak
5	5928.396	46.27	32.75	5.41	37.11	47.32	68.20	-20.88	HORIZONTAL	peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz

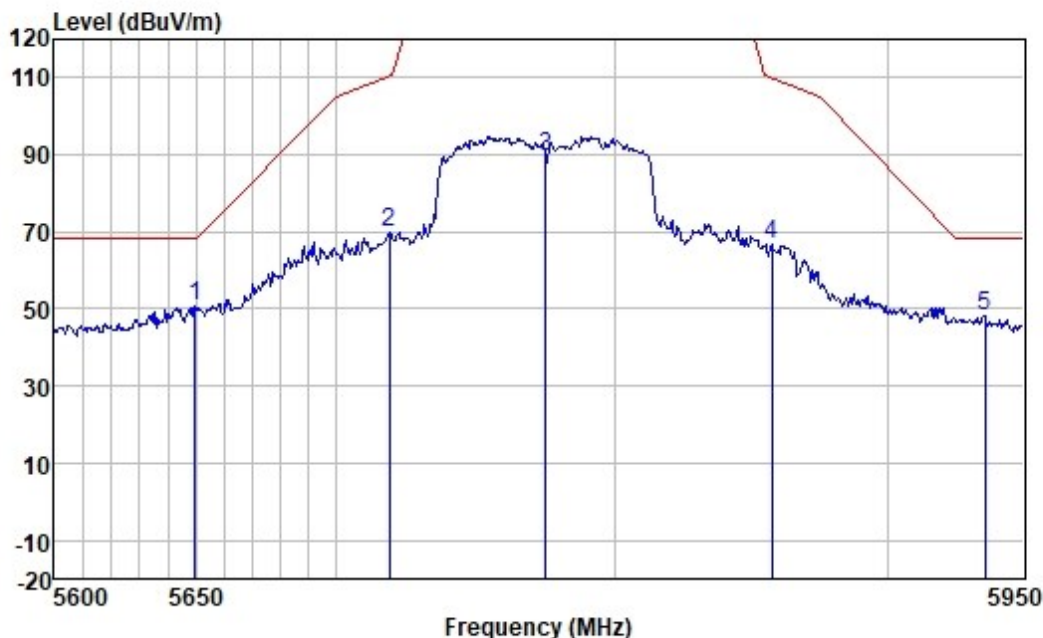

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5649.787	50.35	32.28	5.23	37.14	50.72	68.20	-17.48	VERTICAL	peak
2	5718.707	69.49	32.39	5.27	37.13	70.02	110.44	-40.42	VERTICAL	peak
3	5775.000	88.58	32.53	5.33	37.12	89.32	125.20	-35.88	VERTICAL	peak
4	5857.304	65.78	32.67	5.38	37.11	66.72	110.15	-43.43	VERTICAL	peak
5	5935.949	47.27	32.75	5.41	37.11	48.32	68.20	-19.88	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz

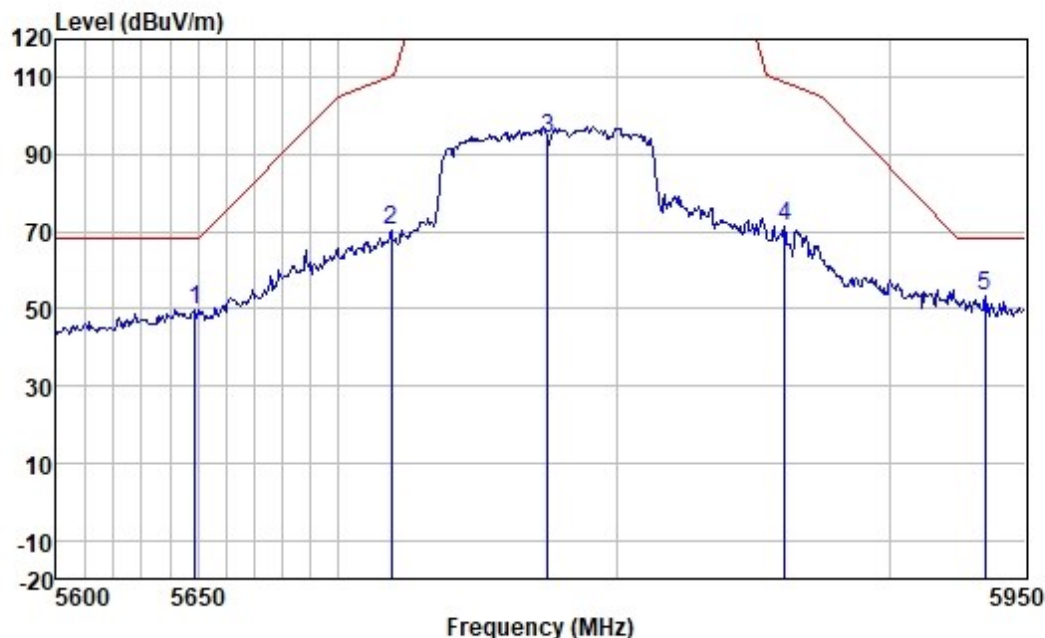

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5649.102	49.47	32.28	5.23	37.14	49.84	68.20	-18.36	HORIZONTAL peak
2	5718.707	69.85	32.39	5.27	37.13	70.38	110.44	-40.06	HORIZONTAL peak
3	5775.000	93.18	32.53	5.33	37.12	93.92	125.20	-31.28	HORIZONTAL peak
4	5861.567	70.53	32.67	5.38	37.11	71.47	108.96	-37.49	HORIZONTAL peak
5	5935.229	52.14	32.75	5.41	37.11	53.19	68.20	-15.01	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

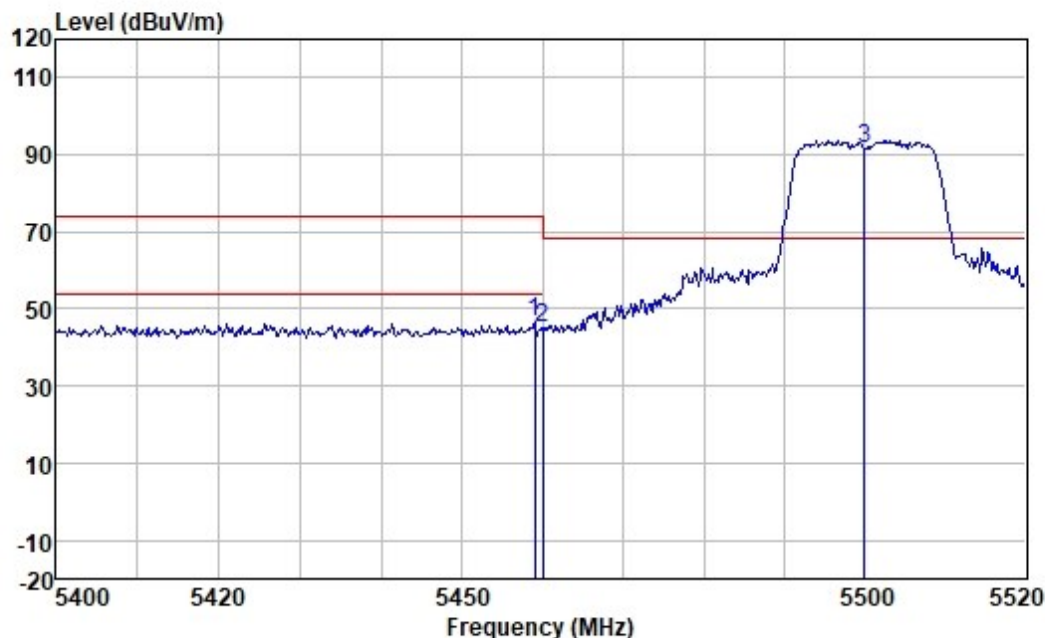

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5458.950	46.35	32.08	5.14	37.16	46.41	74.00	-27.59	VERTICAL	peak
2	5460.000	45.03	32.08	5.14	37.16	45.09	68.20	-23.11	VERTICAL	peak
3 *	5500.000	91.25	32.10	5.16	37.16	91.35	68.20	23.15	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

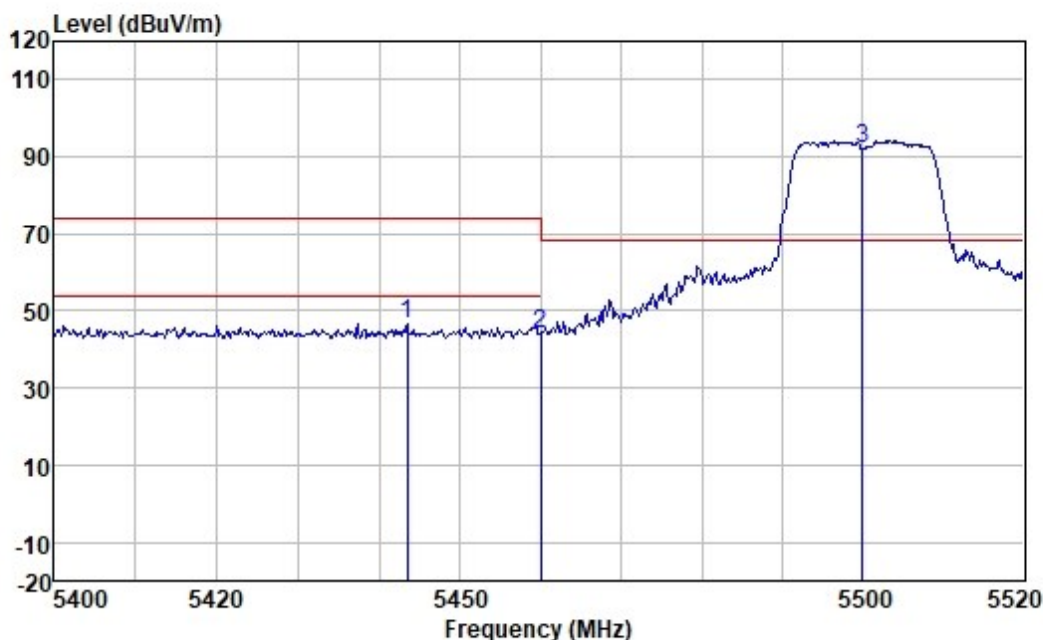

	ReadAntenna	Cable	Preamp		Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5443.495	46.60	32.07	5.14	37.17	46.64	74.00	-27.36	HORIZONTAL peak
2	5460.000	44.25	32.08	5.14	37.16	44.31	68.20	-23.89	HORIZONTAL peak
3 *	5500.000	92.06	32.10	5.16	37.16	92.16	68.20	23.96	HORIZONTAL peak


Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

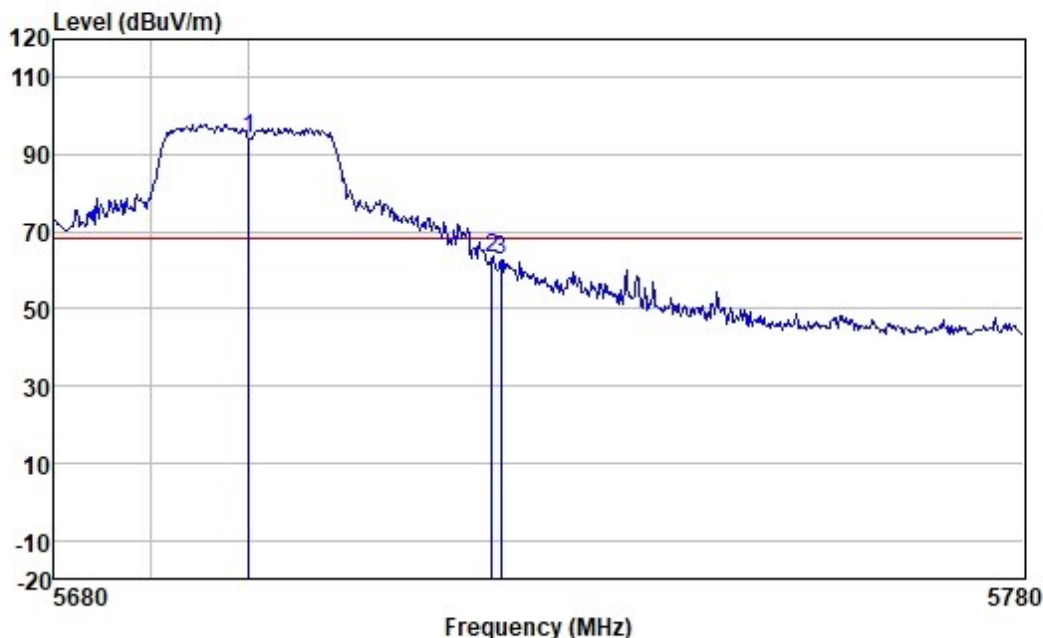

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5700.000	93.62	32.36	5.26	37.13	94.11	68.20	25.91	VERTICAL	peak
2	5725.000	62.65	32.42	5.29	37.13	63.23	68.20	-4.97	VERTICAL	peak
3	5725.883	61.90	32.42	5.29	37.13	62.48	68.20	-5.72	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

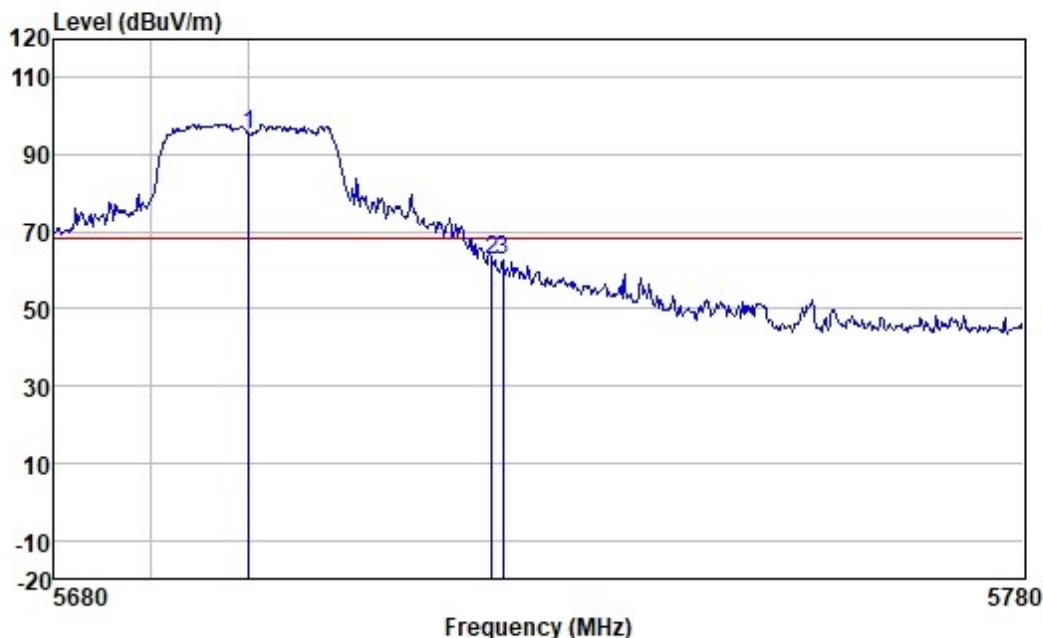

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5700.000	94.97	32.36	5.26	37.13	95.46	68.20	27.26	HORIZONTAL	peak
2	5725.000	62.05	32.42	5.29	37.13	62.63	68.20	-5.57	HORIZONTAL	peak
3	5726.083	62.00	32.42	5.29	37.13	62.58	68.20	-5.62	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

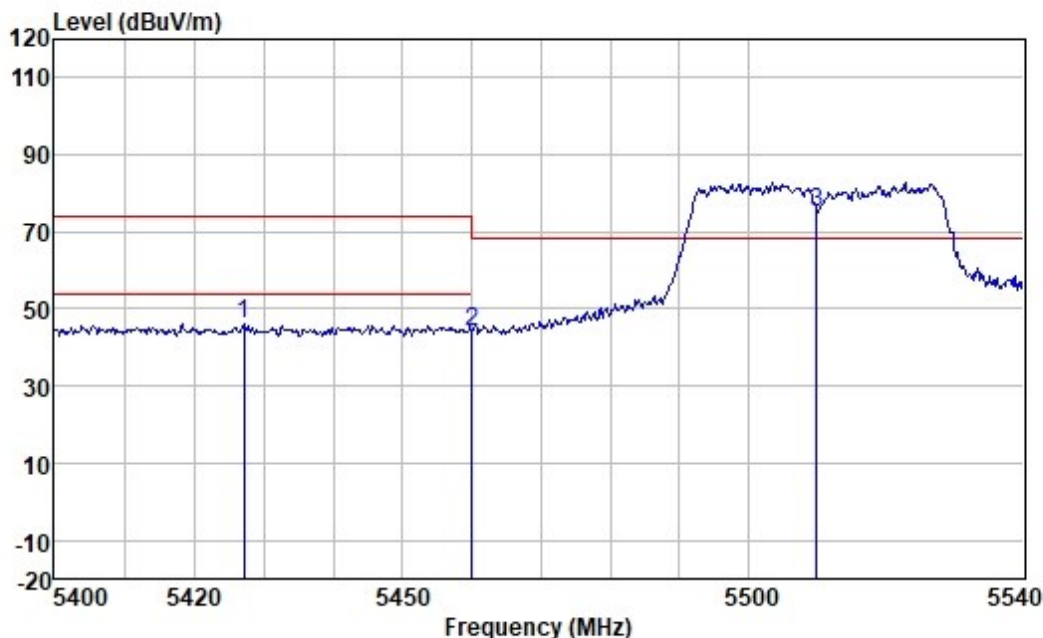

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5427.158	45.89	32.06	5.13	37.17	45.91	74.00	-28.09	VERTICAL	peak
2	5460.000	44.12	32.08	5.14	37.16	44.18	68.20	-24.02	VERTICAL	peak
3 *	5510.000	74.72	32.10	5.16	37.16	74.82	68.20	6.62	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

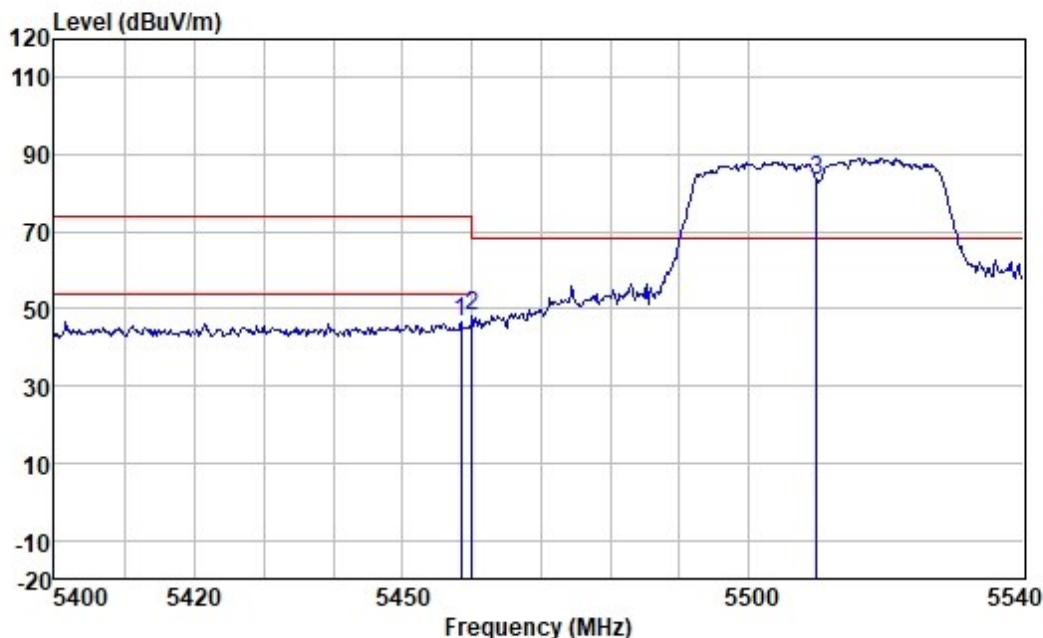

	ReadAntenna	Cable	Preamp		Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5458.364	46.76	32.08	5.14	37.16	46.82	74.00	-27.18	HORIZONTAL peak
2	5460.000	48.20	32.08	5.14	37.16	48.26	68.20	-19.94	HORIZONTAL peak
3 *	5510.000	83.42	32.10	5.16	37.16	83.52	68.20	15.32	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

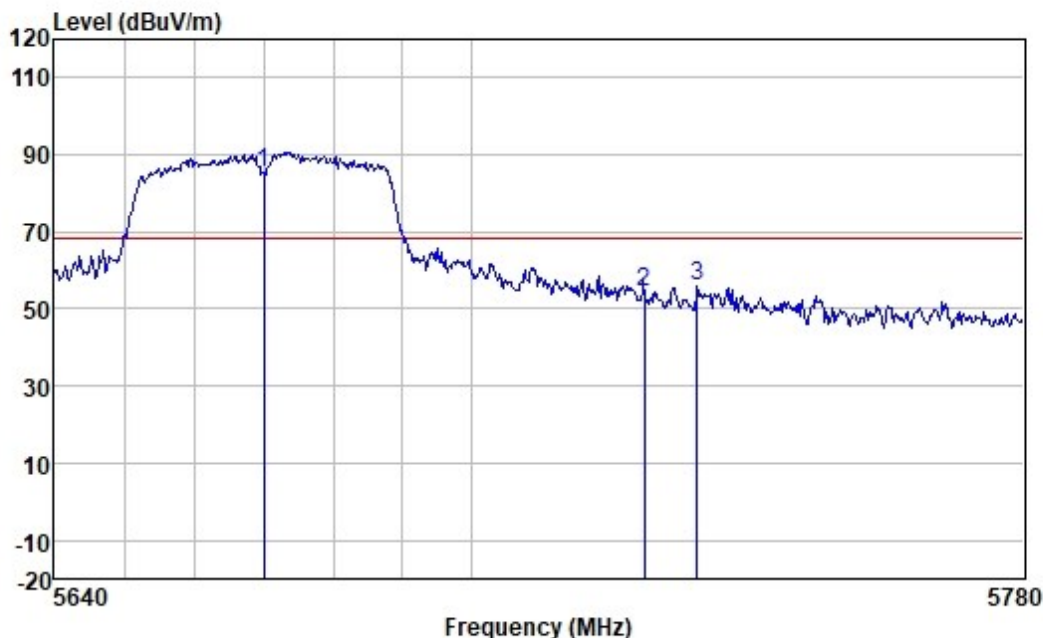

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5670.000	84.79	32.30	5.24	37.13	85.20	68.20	17.00	VERTICAL	peak
2	5725.000	53.71	32.42	5.29	37.13	54.29	68.20	-13.91	VERTICAL	peak
3	5732.577	55.27	32.42	5.29	37.13	55.85	68.20	-12.35	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

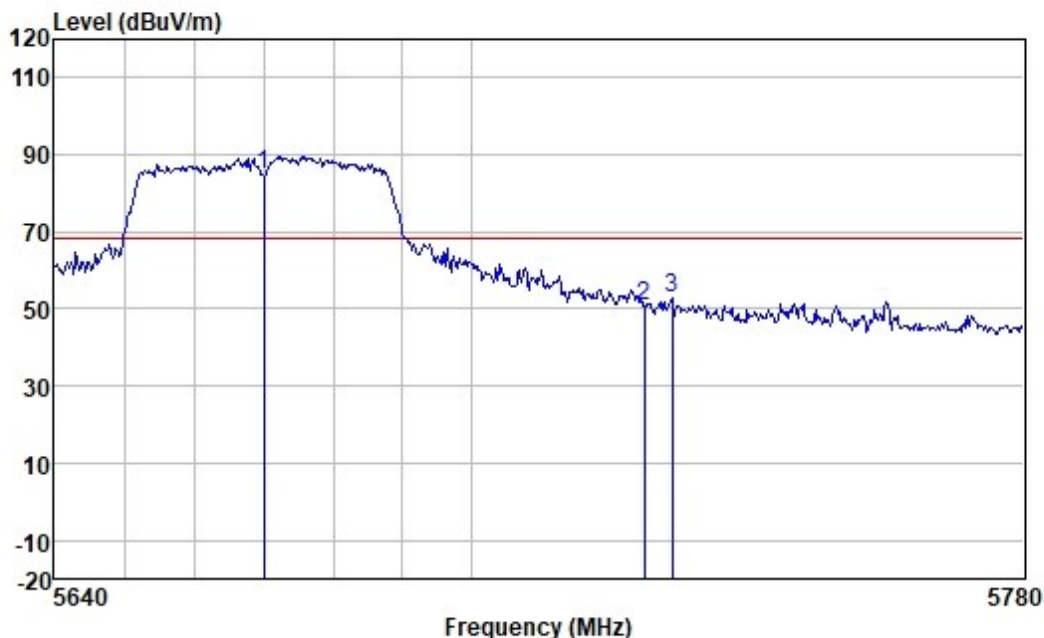

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5670.000	84.23	32.30	5.24	37.13	84.64	68.20	16.44	HORIZONTAL	peak
2	5725.000	50.18	32.42	5.29	37.13	50.76	68.20	-17.44	HORIZONTAL	peak
3	5728.923	52.34	32.42	5.29	37.13	52.92	68.20	-15.28	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

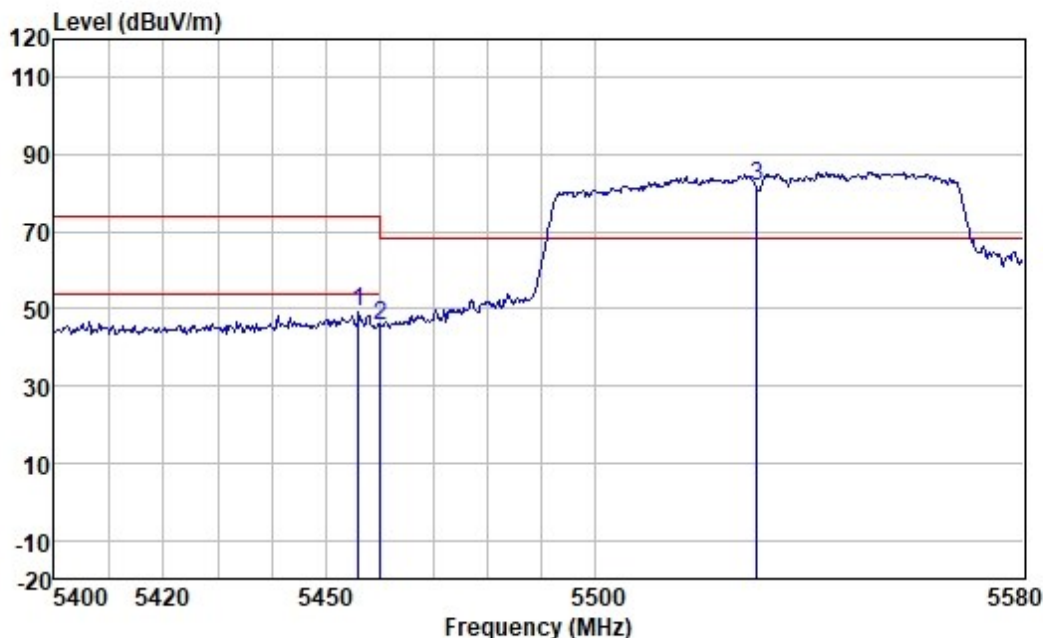

	ReadAntenna	Cable	Preamp		Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5455.886	48.91	32.08	5.14	37.16	48.97	74.00	-25.03	VERTICAL peak
2	5460.000	45.74	32.08	5.14	37.16	45.80	68.20	-22.40	VERTICAL peak
3 *	5530.000	81.38	32.13	5.17	37.15	81.53	68.20	13.33	VERTICAL peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

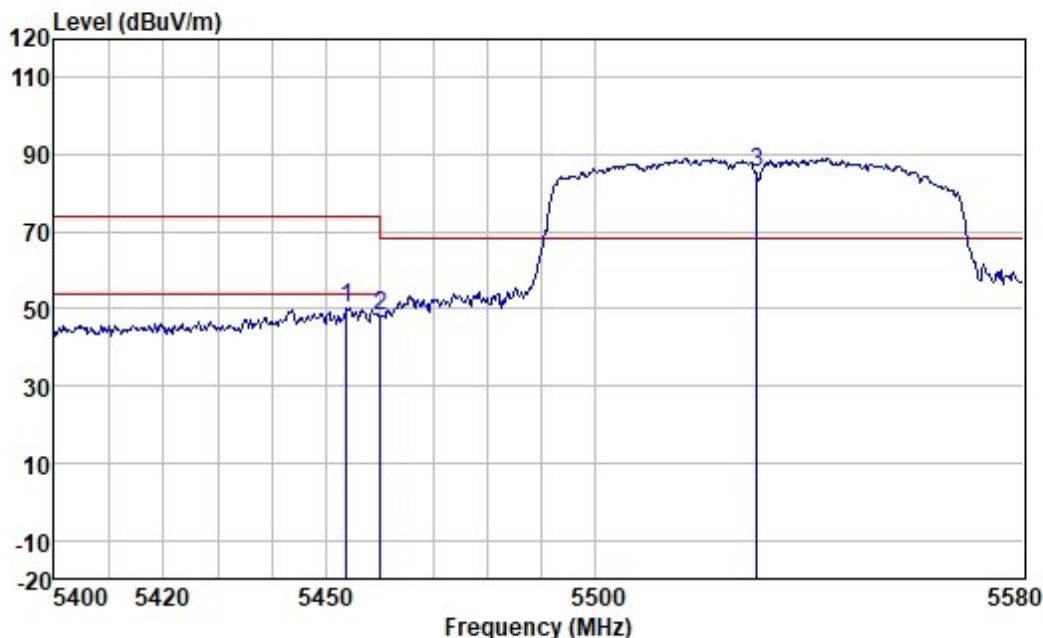

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5453.739	50.05	32.08	5.14	37.16	50.11	74.00	-23.89	HORIZONTAL peak
2	5460.000	47.90	32.08	5.14	37.16	47.96	68.20	-20.24	HORIZONTAL peak
3 *	5530.000	85.07	32.13	5.17	37.15	85.22	68.20	17.02	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

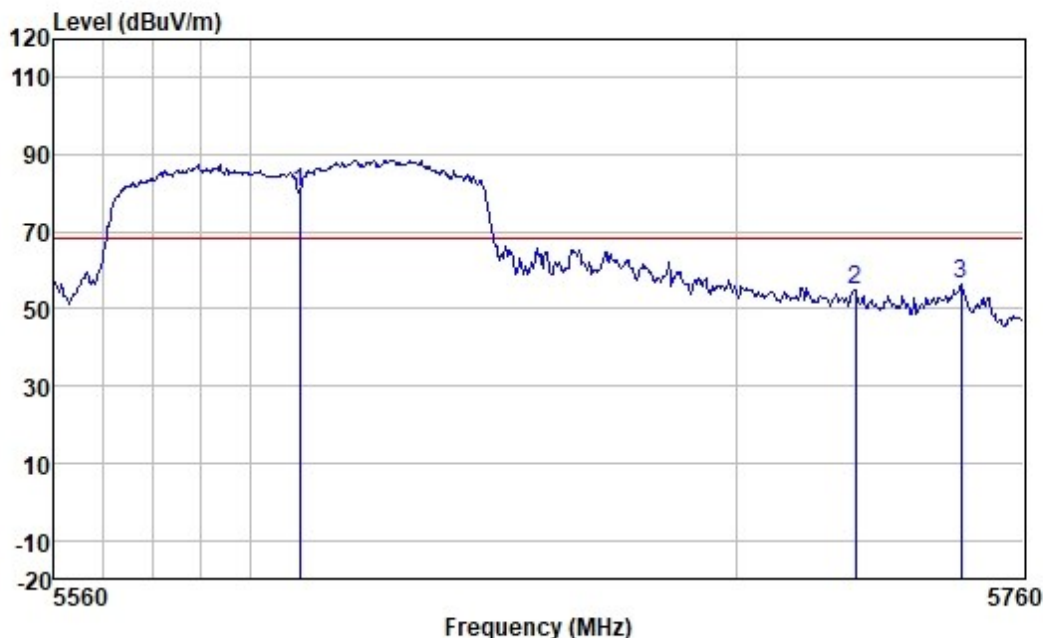

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5610.000	79.88	32.23	5.21	37.14	80.18	68.20	11.98	VERTICAL	peak
2	5725.000	54.07	32.42	5.29	37.13	54.65	68.20	-13.55	VERTICAL	peak
3	5747.190	55.89	32.46	5.30	37.13	56.52	68.20	-11.68	VERTICAL	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

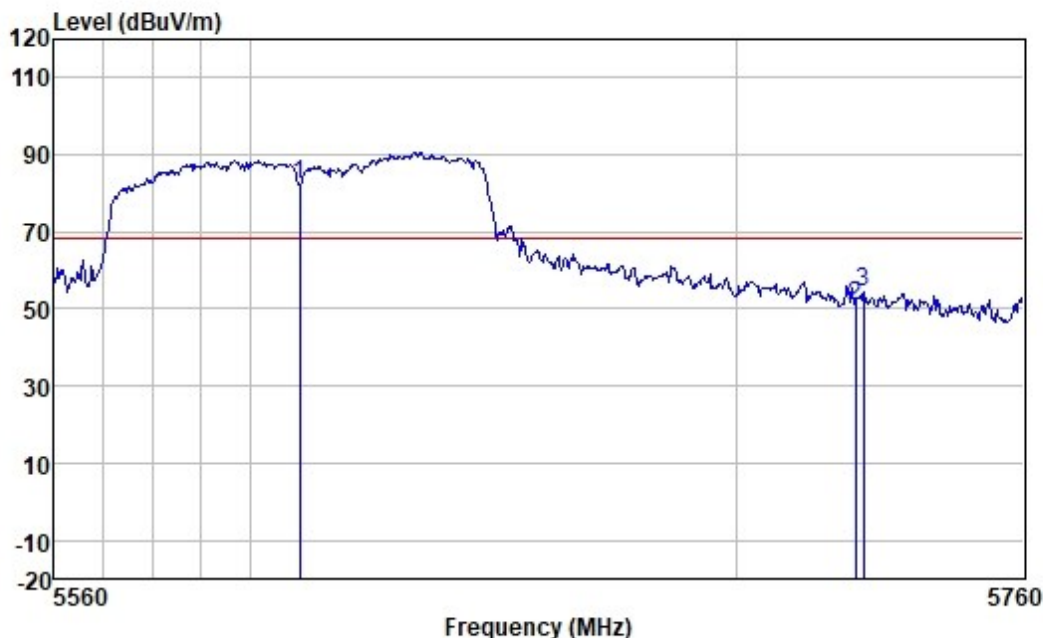

		ReadAntenna	Cable	Preamp		Limit	Over			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	* 5610.000	81.99	32.23	5.21	37.14	82.29	68.20	14.09	HORIZONTAL	peak
2	5725.000	50.19	32.42	5.29	37.13	50.77	68.20	-17.43	HORIZONTAL	peak
3	5726.713	53.78	32.42	5.29	37.13	54.36	68.20	-13.84	HORIZONTAL	peak



7 Test Setup Photo

Refer to Appendix - Test Setup Photos for GZCR250700106405.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC-TRF-01) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

8 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2507001064AT(For Module FCS950U).

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com