

TEST REPORT

Application No.: GZCR2507001065AT
Applicant: Geosolution i Goteborg AB
Address of Applicant: Stora Avagen 21, 436 34 ASKIM, Sweden
Manufacturer: Geosolution i Goteborg AB
Address of Manufacturer: Stora Avagen 21, 436 34 ASKIM, Sweden
Factory: Geosolution i Goteborg AB
Address of Factory: Stora Avagen 21, 436 34 ASKIM, Sweden
Product Name: GNSS RTK Receiver
Model No.: SL9
Trade Mark: 
Standard(s) : 47 CFR Part 2
 47 CFR Part 90
Date of Receipt: 2025-07-15
Date of Test: 2025-07-16 to 2025-08-15
Date of Issue: 2025-08-27

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Guangzhou Branch, Testing Center, EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
 中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
 t (86-20) 82155555 sgs.china@sgs.com

Revision Record			
Version	Report No.	Date	Remark
01	GZCR250700106507	2025-08-15	Original

Authorized for issue by:			
Tested By		Key Liang	
		Key Liang/Project Engineer	
Approved By		Vico Cui	
		Vico Cui/Reviewer	



2 Test Summary

Radio Spectrum Matter Part		
Test Item	FCC Rule No.	Verdict
Effective Radiated Power (ERP) Output Data	§2.1046 §90.205	PASS
Modulation Characteristics	§2.1047 §90.207	N/A ^{Note1}
Occupied Bandwidth & Emission Mask	§2.1049 §90.209 §90.210	PASS
Transient Frequency Behavior	§90.214	PASS
Spurious emissions at antenna terminals	§2.1053 §90.210	PASS
Field strength of spurious radiation	§2.1053 §90.210	PASS
Frequency stability	§2.1055 §90.213	PASS
Adjacent Channel Power (ACP)	§90.221	N/A ^{Note2}

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

N/A^{Note1}: The EUT is used in digital modulation.

N/A^{Note2}: Authorized bandwidth (kHz) < 20 kHz.

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	7
4.3 Test Frequency	7
4.4 Test Environment	7
4.5 Measurement Uncertainty	8
4.6 Test Location	8
4.7 Test Facility	9
4.8 Deviation from Standards	9
4.9 Abnormalities from Standard Conditions	9
5 Equipment List	10
6 Radio Spectrum Matter Test Results	11
6.1 Effective Radiated Power (ERP) Output Data	11
6.1.1 E.U.T. Operation	11
6.1.2 Test Mode Description	11
6.1.3 Test Setup Diagram	11
6.1.4 Measurement Procedure and Data	11
6.2 Occupied Bandwidth & Emission Mask	12
6.2.1 E.U.T. Operation	12
6.2.2 Test Mode Description	12
6.2.3 Test Setup Diagram	12
6.2.4 Measurement Procedure and Data	12
6.3 Transient Frequency Behavior	13
6.3.1 E.U.T. Operation	13
6.3.2 Test Mode Description	14
6.3.3 Test Setup Diagram	14
6.3.4 Measurement Procedure and Data	14
6.4 Spurious emissions at antenna terminals	15
6.4.1 E.U.T. Operation	15
6.4.2 Test Mode Description	15
6.4.3 Test Setup Diagram	16
6.4.4 Measurement Procedure and Data	16
6.5 Field strength of spurious radiation	17
6.5.1 E.U.T. Operation	17
6.5.2 Test Mode Description	17
6.5.3 Test Setup Diagram	17
6.5.4 Measurement Procedure and Data	18
6.6 Frequency stability	21
6.6.1 E.U.T. Operation	21



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

EMC-TRF-01 Rev 2.0

Report No.: GZCR250700106507

Page: 5 of 22

6.6.2	Test Mode Description	21
6.6.3	Test Setup Diagram	21
6.6.4	Measurement Procedure and Data	21
7	Test Setup Photo	22
8	EUT Constructional Details (EUT Photos)	22
9	Appendix	22



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	AC/DC adapter: Model: KS65A-GaNC1A1-CE Input: AC 100-240V 50/60Hz 1.5A Max Output A: DC 5.0V 3.0A, DC 9.0V 2.0A, DC 12.0V 1.5A, 18.0W Output C: DC 5.0V 3.0A, DC 9.0V 3.0A, DC 12.0V 3.0A, DC 15.0V 3.0A, DC 20.0V 3.25A, 65.0W Max PPS: DC 5.0V-21.0V 3.0A Max, 63.0W Output A+C: USB-A:12.0W DC 5.0V 2.4A, Type-C: 45.0W, DC 5.0V, 3.0A, DC 9.0V 3.0A, DC 12.0V 3.0A, DC 15.0V 3.0A, DC 20.0V 2.25A Battery operation: Model: BL-5000QS(Threaded Type) Capacity: 4.9Ah(Rated)/70.56Wh Nominal Voltage:14.4V USB Port Input: 5VDC,3A, 9VDC,3A, 12VDCV,3A, 15VDC,3A, 20VDC, 2.25A Max/PD45W Built-in battery. Model: BL-5000B Capacity: 4.9Ah(Typical)/4.753Ah(Rated)/34.51Wh Max Charging Voltage:8.4V Nominal Voltage:7.26V
Test voltage:	AC 120V, 60Hz & DC 14.4V
Cable(s):	0.9m unscreened USB C to C charging cable. Type-C Port x1 for charging & data transfer.
Frequency Range:	410 MHz to 470 MHz
Conducted Power:	0.5W(26.99 dBm), 1W(30 dBm) , 2W(33 dBm)
Modulation Type:	4-FSK; GMSK
Channel Separation:	12.5 kHz, 25 kHz
Antenna Type:	External Antenna
Antenna Gain:	3 dBi declared by applicant.

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Mobile Phone	SAMSUNG	SM-G9810	RFCN309Q9QF

4.3 Test Frequency

Test Channel	Channel Separation (kHz)	Frequency (MHz)
Low (L)	12.5	410.05
	25	410.05
Middle (M)	12.5	440
	25	440
High (H)	12.5	469.95
	25	469.95

4.4 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	56.4%	
Atmospheric Pressure:	1006 mbar	
Temperature:	TL	-30°C
	TN	+25°C
	TH	+50°C
Test Voltage:	VL	AC 102 V, DC 12.24V
	VN	AC 120 V, DC 14.4V
	VH	AC 138 V, DC 16.56V
NOTE: VL= Lower extreme test voltage VN= Nominal voltage VH= Upper extreme test voltage TL= Lower extreme test temperature TN= Normal temperature TH= Upper extreme test temperature		

4.5 Measurement Uncertainty

Test Item	Measurement Uncertainty
Effective (Isotropic) Radiated Power Output Data	$\pm 0.75\text{dB}$
Modulation Characteristics	$\pm 0.274\%$
Occupied Bandwidth & Emission Mask	$\pm 0.274\%$
Transient Frequency Behavior	$\pm 0.274\%$
Spurious emissions at antenna terminals	$\pm 0.75\text{dB}$
Field strength of spurious radiation	$\pm 3.87\text{dB}$ (30MHz-1GHz) $\pm 4.82\text{dB}$ (Above 1GHz)
Frequency stability	$\pm 7.25 \times 10^{-8}$
Remark: The U_{lab} (lab Uncertainty) is less than U_{CISPR} (CISPR Uncertainty) or U_{ETSI} (ETSI Uncertainty). Emission decision rule: – Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit, marked as Pass in the report. – Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit, marked as Fail in the report.	

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou,
Guangdong, China 510663

Tel: +86 20 82155555

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● ACMA

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

● SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● FCC Recognized Accredited Test Firm(Registration No.: 486818)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

● ISED (Registration No.: 4620B, CAB identifier: CN0052)

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

● VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

● CBTL (Lab Code: TL129)

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.8 Deviation from Standards

None

4.9 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

5 Equipment List

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
MI CABLE	SGS-EMC	0.8M	EMC2136	2023-11-02	2025-11-01
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2222	2024-12-03	2025-12-02
4X4 Power sensor Unit	TST	TSPS2023R	EMC2257	2024-08-19	2025-08-18
Test Software	TST	V2.0	GZE100-82	N/A	N/A
Temperature Chamber	GZ GongWen Co.Ltd.	GDJW-100	EMC0039	2024-12-03	2025-12-02

Field strength of spurious radiation					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal Generator (9kHz-6GHz)	Rohde & Schwarz	SMB100A	EMC2093	2024-10-14	2025-10-13
1-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2024-10-14	2025-10-13
EMI Test Receiver (10Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2024-09-02	2025-09-01
Chamber cable (Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2024-08-19	2026-08-18
Chamber Cable (Below 1GHz)	Scoflex	KMKM-8.0m	EMC0546	2024-08-19	2026-08-18
Trilog Broadband Antenna (25MHz-1GHz)	SCHWARZBECK	VULB 9160	EMC2025	2025-05-12	2027-05-11
Horn Antenna (1-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2025-05-13	2027-05-12
Pre-Amplifier MH648A (100kHz-1.2GHz)	ANRITSU CORP	MH648A	EMC2086	2024-10-14	2025-10-13
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2023-12-20	2026-12-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2025-06-03	2026-06-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch Testing Center EEC Laboratory. No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663 t (86-20) 82155555 www.sgsgroup.com.cn
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 sgs.china@sgs.com

6 Radio Spectrum Matter Test Results

6.1 Effective Radiated Power (ERP) Output Data

Test Requirement	§2.1046, §90.205
Test Method:	ANSI C63.26-2015 Section 5.2.3.2.
Limit:	§90.205

6.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22.7 °C Humidity: 56.4 % RH Atmospheric Pressure: 1006 mbar

6.1.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 09	TX mode_Keep the EUT in transmitting mode

6.1.3 Test Setup Diagram

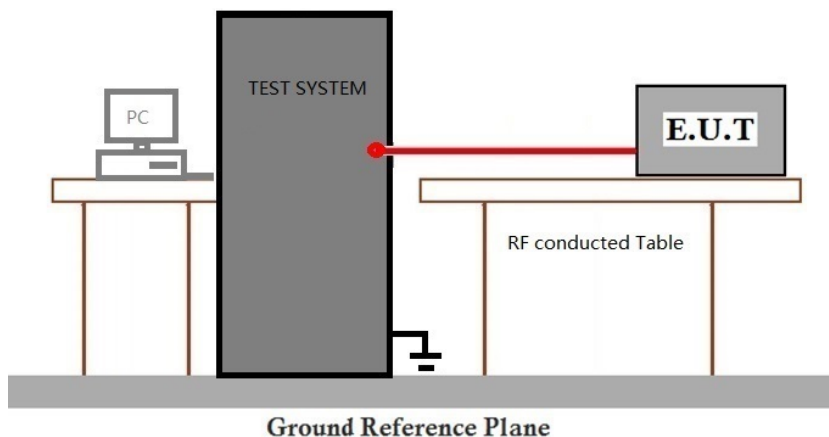

6.1.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC Laboratory)

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

6.2 Occupied Bandwidth & Emission Mask

Test Requirement §2.1049, §90.209, §90.210
 Test Method: ANSI C63.26-2015 Section 5.4.
 Limit: §90.209, §90.210


6.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.7 °C Humidity: 56.4 % RH Atmospheric Pressure: 1006 mbar

6.2.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 09	TX mode_Keep the EUT in transmitting mode

6.2.3 Test Setup Diagram

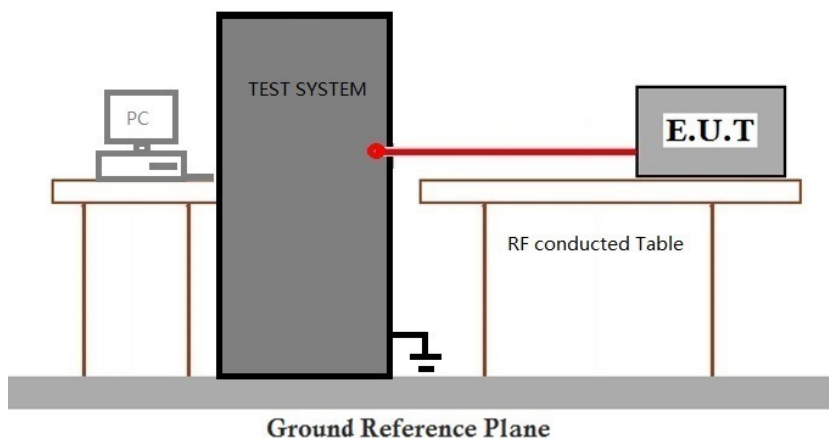

6.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

6.3 Transient Frequency Behavior

Test Requirement §90.214

Test Method: ANSI C63.26-2015 Section 6.5.2.2

Limit:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.

² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.7 °C

Humidity: 56.4 % RH

Atmospheric Pressure: 1006 mbar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, Inspection & Testing Services


No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

6.3.2 Test Mode Description

Pre-scan /	Mode	
Final test	Code	Description
Final test	09	TX mode_Keep the EUT in transmitting mode

6.3.3 Test Setup Diagram

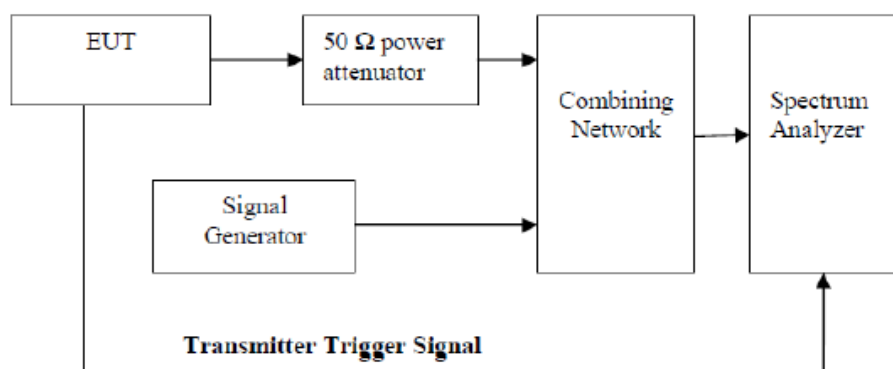

6.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

6.4 Spurious emissions at antenna terminals

Test Requirement §2.1051, §90.210

Test Method: ANSI C63.26-2015 Section 5.7

Limit: For 12.5 bandwidth:
On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz at least:
 $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (1.0) = 50.00 \text{ dB}$
Note: In general, the worst case attenuation requirement shown above was applied.
Calculation: Limit (dBm) = EL-50-10log10 (TP)
Notes: EL is the emission level of the Output Power expressed in dBm,
In this application, the EL is 30 dBm for High rated power.
Limit (dBm) = 30.00 – 50 – 10log (1.0) = -20 dBm
For 25 kHz bandwidth:
On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 62.5 kHz at least:
 $43 + 10 \log (P_{\text{watts}}) = 43 + 10 \log (1.0) = 43.00 \text{ dB}$
Note: In general, the worst case attenuation requirement shown above was applied.
Calculation: Limit (dBm) = EL-43-10log10 (TP)
In this application, the EL is 30 dBm for High rated power.
Limit (dBm) = 30.00 – 43 – 10log (1.0) = -13 dBm
Note: 1. In general, the worst case attenuation requirement shown above was applied.
For emission inside from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of channel spacing, emission mask limit should be compliant.
2. The measurement frequency range from 9 KHz to 5 GHz.
3. For 9kHz to 30MHz, the emission level is too low to be measured or at least 20 dB down than the limit.

6.4.1 E.U.T. Operation

Operating Environment:


Temperature: 22.7 °C Humidity: 56.4 % RH Atmospheric Pressure: 1006 mbar

6.4.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 09	TX mode_Keep the EUT in transmitting mode



6.4.3 Test Setup Diagram

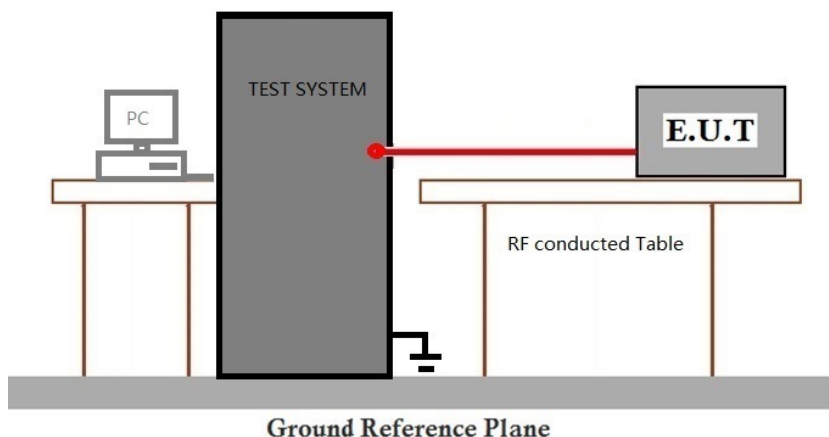

6.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

6.5 Field strength of spurious radiation

Test Requirement §2.1053, §90.210

Test Method: ANSI C63.26-2015 Section 5.5

Limit:

For equipment using 25 kHz channel spacing, on any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least $43 + 10\log(P)$ dB.

For equipment using 12.5 kHz channel spacing, on any frequency removed from the center of The authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

6.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.2 °C


Humidity: 56.8 % RH

Atmospheric Pressure: 1006 mbar


6.5.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 09	TX mode_Keep the EUT in transmitting mode


6.5.3 Test Setup Diagram

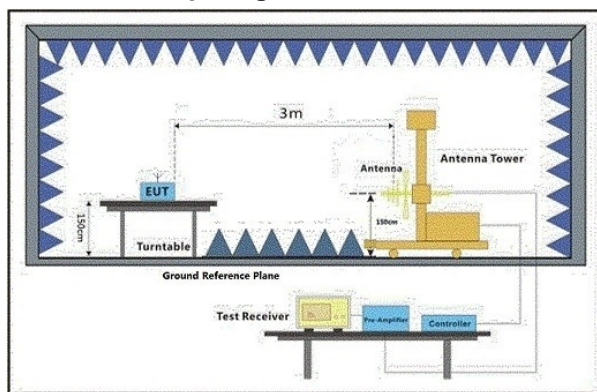

30MHz-1GHz

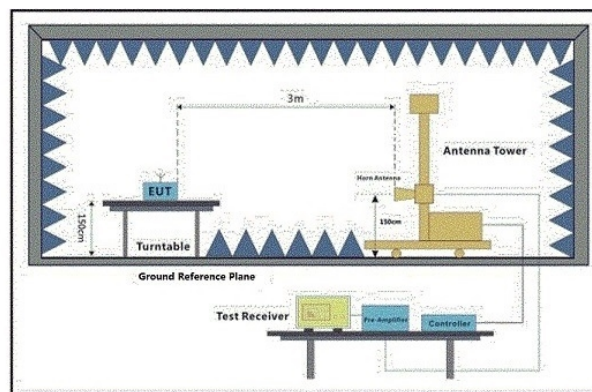

Above 1GHz

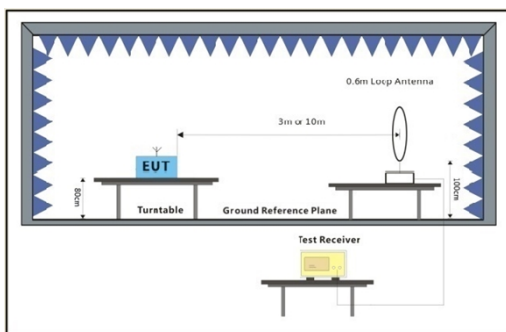

Below 30MHz



6.5.4 Measurement Procedure and Data

Test Procedure:

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.



Test Mode: 09, Channel Spacing: 25kHz

Low channel								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3702	-50.39	-13	-37.39	-52.61	6.99	9.21	Horizontal	Pass
5553	-48.13	-13	-35.13	-50.45	8.27	10.59	Horizontal	Pass
7404	-45.29	-13	-32.29	-48.83	8.19	11.73	Horizontal	Pass
3702	-50.54	-13	-37.54	-52.76	6.99	9.21	Vertical	Pass
5553	-47.35	-13	-34.35	-49.67	8.27	10.59	Vertical	Pass
7404	-45.09	-13	-32.09	-48.63	8.19	11.73	Vertical	Pass

Middle channel								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3742	-51.41	-13	-38.41	-53.63	6.99	9.21	Horizontal	Pass
5613	-47.33	-13	-34.33	-49.65	8.27	10.59	Horizontal	Pass
7484	-49.11	-13	-36.11	-52.65	8.19	11.73	Horizontal	Pass
3742	-51.34	-13	-38.34	-53.56	6.99	9.21	Vertical	Pass
5613	-47.59	-13	-34.59	-49.91	8.27	10.59	Vertical	Pass
7484	-44.03	-13	-31.03	-47.57	8.19	11.73	Vertical	Pass

High channel								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3782	-51.43	-13	-38.43	-53.65	6.99	9.21	Horizontal	Pass
5673	-49.65	-13	-36.65	-51.97	8.27	10.59	Horizontal	Pass
7564	-45.73	-13	-32.73	-49.56	8.43	12.26	Horizontal	Pass
3782	-51.39	-13	-38.39	-53.61	6.99	9.21	Vertical	Pass
5673	-47.27	-13	-34.27	-49.59	8.27	10.59	Vertical	Pass
7564	-45.71	-13	-32.71	-49.54	8.43	12.26	Vertical	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (CMAA, CNAS, EEC Laboratory)

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Test Mode: 09, Channel Spacing: 12.5kHz

Low channel								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3702	-49.06	-20	-29.06	-51.64	5.72	8.3	Horizontal	Pass
5553	-48.56	-20	-28.56	-50.56	8.3	10.3	Horizontal	Pass
7404	-46.18	-20	-26.18	-49.73	7.7	11.25	Horizontal	Pass
3702	-48.94	-20	-28.94	-51.52	5.72	8.3	Vertical	Pass
5553	-51.25	-20	-31.25	-53.25	8.3	10.3	Vertical	Pass
7404	-43.98	-20	-23.98	-47.53	7.7	11.25	Vertical	Pass

Middle channel								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3742	-48.18	-20	-28.18	-50.76	5.72	8.3	Horizontal	Pass
5613	-49.24	-20	-29.24	-51.24	8.3	10.3	Horizontal	Pass
7484	-45.24	-20	-25.24	-48.79	7.7	11.25	Horizontal	Pass
3742	-48.23	-20	-28.23	-50.81	5.72	8.3	Vertical	Pass
5613	-49.76	-20	-29.76	-51.76	8.3	10.3	Vertical	Pass
7484	-46.12	-20	-26.12	-49.67	7.7	11.25	Vertical	Pass

High channel								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3782	-50.14	-20	-30.14	-52.72	5.72	8.3	Horizontal	Pass
5673	-48.87	-20	-28.87	-50.87	8.3	10.3	Horizontal	Pass
7564	-44.74	-20	-24.74	-48.29	7.7	11.25	Horizontal	Pass
3782	-49.07	-20	-29.07	-51.65	5.72	8.3	Vertical	Pass
5673	-51.79	-20	-31.79	-53.79	8.3	10.3	Vertical	Pass
7564	-46.34	-20	-26.34	-49.89	7.7	11.25	Vertical	Pass

Note: Only record the worst test results at high power level.

EIRP= S.G. Power- Cable loss+ Antenna Gain

Remark:

The spurious emissions 9kHz to 1GHz were very low and not displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (CMAA, CNAS, EEC Laboratory)

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

6.6 Frequency stability

Test Requirement §2.1055, §90.213
 Test Method: ANSI C63.26-2015 Section 5.6.
 Limit: 12.5 kHz channel bandwidth: $\leq \pm 2.5$ ppm
 25 kHz channel bandwidth: $\leq \pm 5$ ppm


6.6.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.7 °C Humidity: 56.4 % RH Atmospheric Pressure: 1006 mbar

6.6.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 09	TX mode_Keep the EUT in transmitting mode

6.6.3 Test Setup Diagram

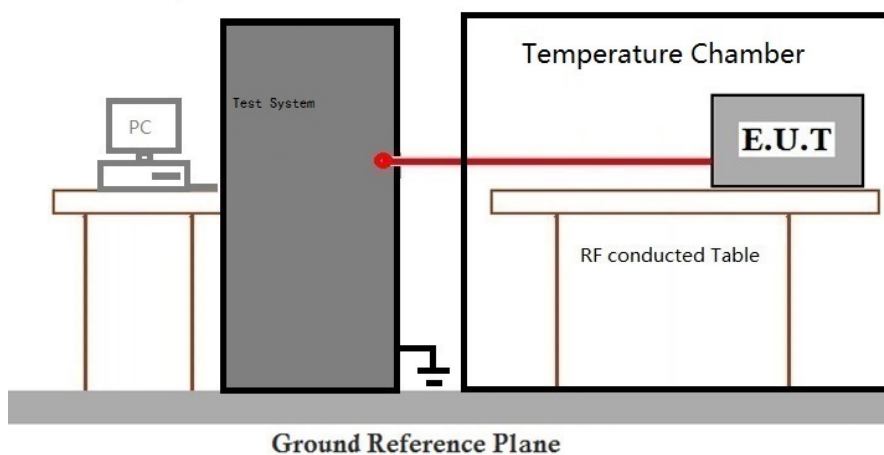

6.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7 Test Setup Photo

Refer to Appendix -Test Setup Photos for GZCR250700106507.

8 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2507001065AT.

9 Appendix

Refer to Appendix _Test Data for report GZCR250700106507.

- End of the Report -

