

APPENDIX 3: Photographs of test setup

Conducted Emission

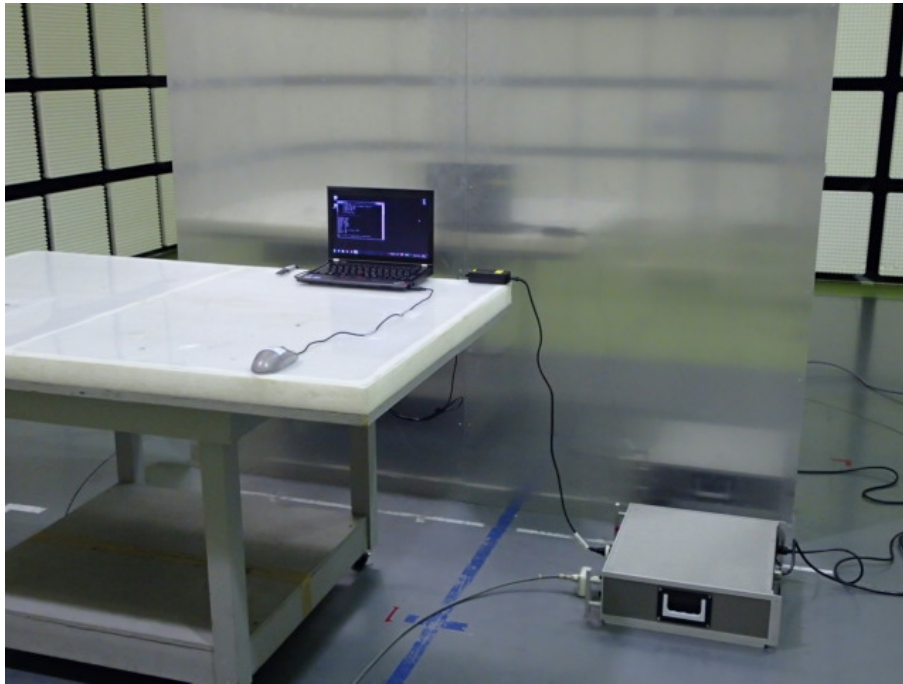


Photo 1

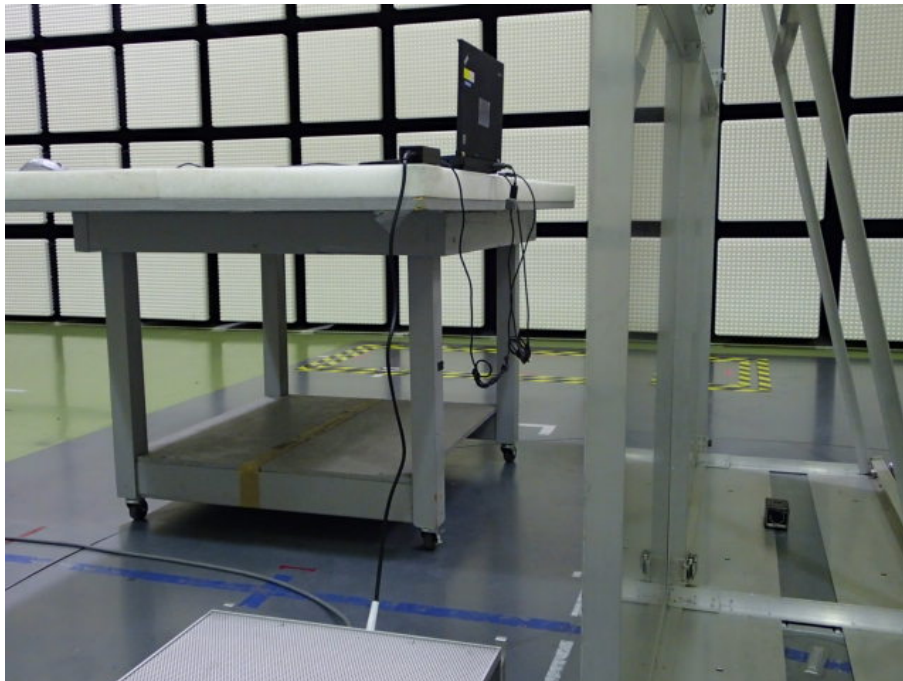


Photo 2

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

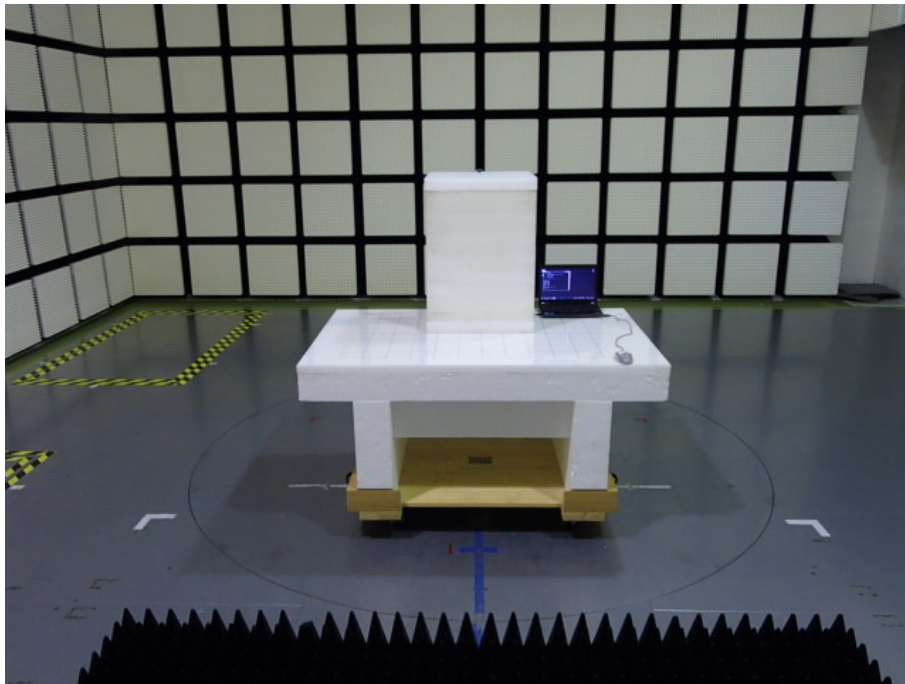


Photo 1

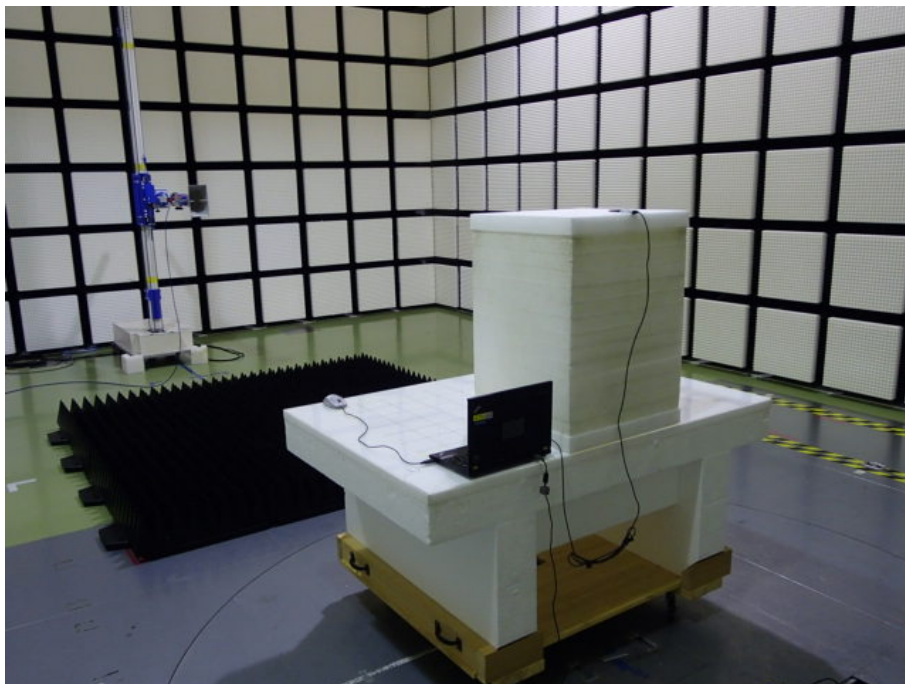


Photo 2

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Worst Case Position


Below 1 GHz (Horizontal: Y-axis/ Vertical: Y-axis)

Above 1 GHz (Horizontal: X-axis/ Vertical: Z-axis)


X-axis




Y-axis

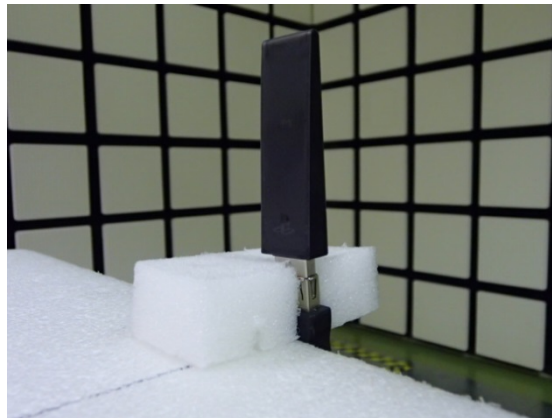

Z-axis

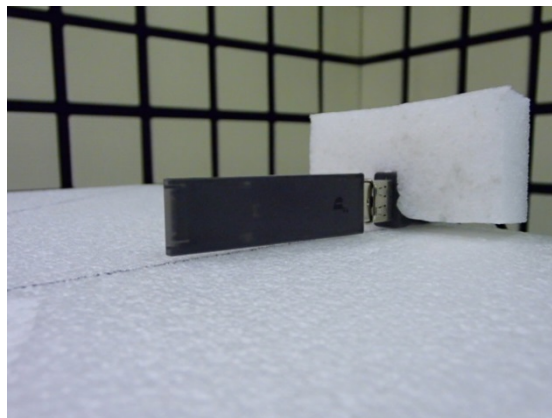

Test Configuration and peripherals

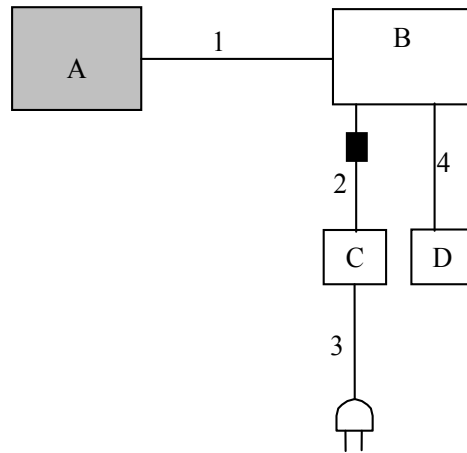

AC 120 V / 60 Hz

■ : Standard Ferrite Core

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Wireless Adaptor	CUH-ZWA1U	No.1 *1) No.2 *2)	Sony Interactive Entertainment	EUT
B	Laptop PC	2324-A82	R9-W6R36	Lenovo	-
C	AC Adapter	92P1160	11S92P1160Z1ZBGH82	Lenovo	-
D	Mouse	M-UB48	830318-0000	Logitech	-

*1) Used for Radiated emission and Conducted emission tests.

*2) Used for Antenna terminal conducted tests.

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Cable	3.0	Shielded	Shielded	-
2	DC Cable	1.8	Unshielded	Unshielded	-
3	AC Cable	0.8	Unshielded	Unshielded	-
4	Mouse Cable	0.8	Shielded	Shielded	-

End of Report

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124