



RADIO TEST REPORT


Test Report No. : 26CE0070-HO-1a

Applicant : Sony Corporation
Type of Equipment : WIRELESS MICROPHONE (Receiver)
Model No. : ECM-HW1R
FCC ID : AK8ECMHW1R
Test standard : FCC Part 15 Subpart C
Section 15.207, Section 15.247: 2005
Test Result : Complied


1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this report are traceable to the national or international standards.

Date of test: November 19 to December 6, 2005

Tested by:


Makoto Kosaka
EMC Services


Mitsuru Fujimura
EMC Services


Hiroka Umeyama
EMC Services


Norihisa Hashimoto
EMC Services

Approved by :


Naoki Sakamoto
Group Leader of
EMC Services

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(01.06.05)

CONTENTS	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.).....	3
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing	8
SECTION 5: Conducted Emission.....	10
SECTION 6: Spurious Emission	11
SECTION 7: Bandwidth	12
SECTION 8: Maximum Peak Output Power	12
SECTION 9: Carrier Frequency Separation	12
SECTION 10: Number of Hopping Frequency	12
SECTION 11: Dwell time.....	12
APPENDIX 1: Photographs of test setup	13
Conducted Emission.....	13
Spurious Emission (Radiated).....	14
Worst Case Position (Horizontal: Z-axis / Vertical: Y-axis)	15
APPENDIX 2: Test instruments	16
APPENDIX 3: Data of EMI test.....	17
Conducted Emission.....	17
Carrier Frequency Separation	19
20dB Bandwidth	21
Number of Hopping Frequency	23
Dwell time.....	25
Maximum Peak Output Power.....	28
Radiated Spurious Emission.....	30
Conducted Spurious Emission	38
99% Occupied Bandwidth	43

SECTION 1: Client information

Company Name	Sony EMCS Corporation
Address	1 Suzumegairi Sakazaki, Kohda-cho, Nukata-gun, Aichi-PRF, 444-0194 Japan
Telephone Number	+81-564 62 6649
Facsimile Number	+81-564 63 6179
Contact Person	Susumu Ishiwata

*Sony EMCS Corporation is on behalf of the applicant: Sony Corporation.

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	WIRELESS MICROPHONE (Receiver)
Model No.	ECM-HW1R
Serial No.	68
Country of Manufacture	Japan
Rating	DC 7.2V, 0.085A (From Digital Video Camera Recorder)
Receipt Date of Sample	November 18, 2005
Condition of EUT	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)

2.2 Product Description

2.2.1 General Information

Feature of EUT	Model: ECM-HW1R is a part of Wireless Microphone System and is attached to Digital Video Camera Recorder of SONY. ECM-HW1R is used with ECM-HW1T, and they are communicated by Bluetooth.
Size	48 (W)*71 (H)*52.8 (D) mm
Range of Operation temperature	+5 deg C. to +40 deg. C.
Operation Clock	12MHz / 24MHz / 48MHz / 32.768KHz

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(01.06.05)

2.2.2 Radio specification / Bluetooth

Equipment Type	Transceiver
Frequency band	2402-2480MHz
Bandwidth & Channel spacing	1MHz & 1MHz
Type of Modulation	GFSK/FHSS
Antenna Type	AT-034 (Beam Antenna)
Antenna Connector Type	TC-3 (SMK)
Antenna Gain	+5dBi
ITU code	F1D
Method of Frequency Generation	Synthesizer

FCC 15.31 (e)

The EUT does not have its own power supply, and the stable voltage (DC7.2V) is provided from Digital Video Camera Recorder of SONY to which the EUT is attached. In addition, the stable voltage, DC3.3V was supplied to RF circuit by DC/DC Converter. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(01.06.05)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C : 2005

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits : 2005
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz : 2005

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin*0)	Results
1	Conducted Emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements IC: RSS-Gen 7.2.2	FCC: Section 15.207 IC: RSS-Gen 7.2.2	-	N/A	9.4dB 0.60190MHz AV, L	Complied
2	Carrier Frequency Separation	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247(a)(1) IC: RSS-210 A8.1 (2)	Conducted	N/A	See data.	Complied
3	20dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247(a)(1) IC: RSS-210 A8.1 (1)	Conducted	N/A		Complied
4	Number of Hopping Frequency	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247(a)(1)(iii) IC: RSS-210 A8.1 (4)	Conducted	N/A		Complied
5	Dwell time	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247(a)(1)(iii) IC: RSS-210 A8.1 (4)	Conducted	N/A		Complied
6	Maximum Peak Output Power	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.6	FCC: Section 15.247(b)(1) IC: RSS-210 A8.4 (2)	Conducted	N/A		Complied
7	Band Edge Compliance	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247(d) IC: RSS-210 A8.5	Conducted	N/A		Complied
8	Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.7 RSS-Gen 4.8	FCC: Section 15.247(d) IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3	Conducted/ Radiated	N/A	<Tx> 6.2dB 324.000MHz, Hor, QP <Rx> 6.3dB 324.000MHz, Hor, QP	Complied

Note: UL Apex's EMI Work Procedures No.QPM05 and QPM15.

*0) The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*These tests were also referred to FCC Public Notice DA 00-705 "Guidance on Measurement for Frequency Hopping Spread Spectrum Systems".

*These tests were performed without any deviations from test procedure except for additions or exclusions.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(01.06.05)

3.3 Addition to standards

No.	Item	Specification	Test Procedure	Remarks	Deviation	Worst margin	Results
1	99% Occupied Band Width	IC: RSS-Gen 4.4.1	IC: RSS-Gen 4.4.1	Conducted	N/A	N/A	N/A

3.4 Uncertainty

Conducted Emission

The measurement uncertainty (with a 95% confidence level) for this test is ± 1.3 dB.
The data listed in this test report has enough margin, more than the site margin.

Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.5 dB(3m)/ ± 4.7 dB(10m).
The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 5.2 dB(3m)/ ± 3.8 dB(10m).
The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 6.6 dB.
The data listed in this test report has enough margin, more than the site margin.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test is ± 3.0 dB.

3.5 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	IC4247A	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	846015	IC4247A-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.4 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1 and No.2 semi-anechoic and No.3 shielded room.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes


The mode used for test: [FHSS:Bluetooth]
Transmitting mode(Packet size DH5)
Low Channel : 2402MHz
Mid Channel : 2441MHz
High Channel : 2480MHz
Receiving : 2441MHz

* As the EUT does not have Inquiry mode in its specification, test was not performed at the mode.

* EUT has the very low power level at Page Scan mode, so test was not performed at the mode.

*Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT. However, the limit level 125mW of AFH mode was used for the test.

4.2 Configuration and peripherals

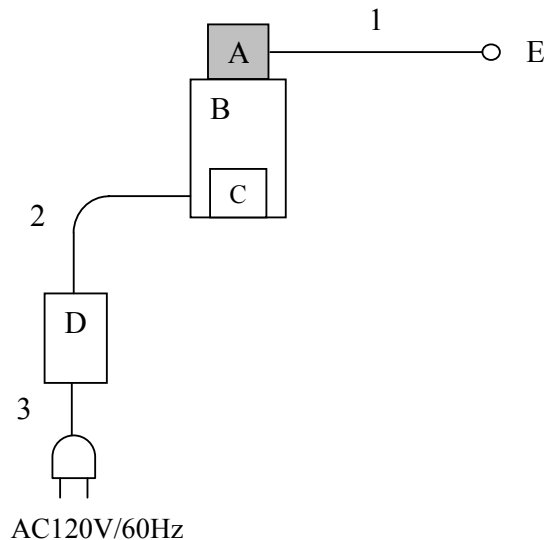

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Test report No. : 26CE0070-HO-1a
Page : 9 of 43
Issued date : December 19 2005
Revised date : December 28, 2005
FCC ID : AK8ECMHW1R

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID
A	Wireless Microphone (Receiver)	ECM-HW1R	68	Sony EMCS Corporation	AK8ECMHW1R
B	Digital Video Camera Recorder	DCR-PC55	1019987	SONY	-
C	Battery	NP-FA50	K511H	SONY	-
D	AC Adapter	AC-L200	30421367	SONY	-
E	Ear Phone	MDR-E123	-	SONY	-

List of cables used

No.	Name	Length (m)	Shield
1	Ear Phone Cable	1.0	N
2	DC Cable	1.8	N
3	AC Cable	2.0	N

UL Apex Co., Ltd.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

MF060b(01.06.05)

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a platform of nominal size, 0.5m by 1m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cable and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector	: CISPR quasi-peak and average detector (IF BW 9 kHz)
Measurement range	: 0.15-30MHz
Test data	: APPENDIX 3
Test result	: Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(01.06.05)

SECTION 6: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3

Test result : Pass

[Radiated]

Test Procedure

EUT was placed on a platform of nominal size, 0.5m by 1.0 m, raised 80cm above the conducting ground plane.

The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(Upper 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

***Delta Marker Method (Measurement for Band-edge)**

STEP 1) Perform an in-band field strength measurement of the fundamental emission using the RBW table below.

STEP 2) Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span, and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission.

STEP 3) Subtract the delta measured in STEP 2) from the field strengths measured in STEP 1). The result is the field strength of band-edge.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 and outside the restricted band of 15.205.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver / Spectrum Analyzer	Spectrum Analyzer
Detector	QP: BW 120kHz(T/R)	PK: RBW:1MHz/VBW: 1MHz
IF Bandwidth	20dBc : RBW: 100kHz VBW: 300kHz (S/A)	AV: RBW:1MHz/VBW:10Hz 20dBc : RBW:100kHz/VBW:300kHz

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data : APPENDIX 3

Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(01.06.05)

SECTION 7: Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Test data	: APPENDIX 3
Test result	: Pass

SECTION 8: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a spectrum analyzer connected to the antenna port.

Test data	: APPENDIX 3
Test result	: Pass

SECTION 9: Carrier Frequency Separation

Test Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Test data	: APPENDIX 3
Test result	: Pass

SECTION 10: Number of Hopping Frequency

Test Procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Test data	: APPENDIX 3
Test result	: Pass

SECTION 11: Dwell time

Test Procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Test data	: APPENDIX 3
Test result	: Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(01.06.05)

APPENDIX 1: Photographs of test setup

Conducted Emission

Front



Rear



Spurious Emission (Radiated)

Front




Rear



Worst Case Position (Horizontal: Z-axis / Vertical: Y-axis)

X-axis

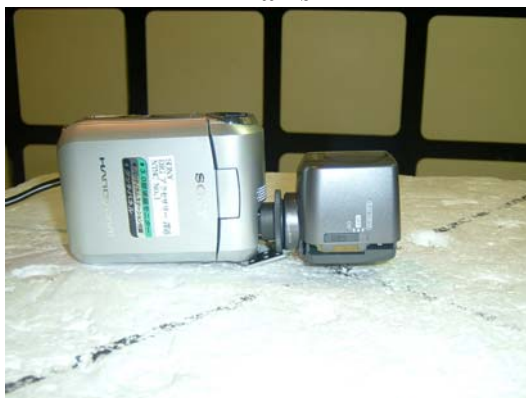

Y-axis



Z-axis



APPENDIX 2:Test instruments

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
MAEC-02	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	RE	2005/04/11 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	RE	2005/10/10 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2005/10/14 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	RE	2004/12/16 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	RE	2005/02/24 * 12
MPA-09	Pre Amplifier	Agilent	8447D	RE	2005/09/07 * 12
MRENT-21	Spectrum Analyzer	Advantest	R3273	RE	2005/08/19 * 12
MTR-02	Test Receiver	Rohde & Schwarz	ESCS30	RE	2005/02/02 * 12
MHA-06	Horn Antenna	Schwarzbeck	BBHA9120D	RE	2005/01/10 * 12
MCC-47	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	RE	2005/08/30 * 12
MCC-04	Microwave Cable 1G-50GHz	Storm	421-011 (90-1394-079)	RE	2005/01/05 * 12
MHF-02	High Pass Filter	Tokimec	TF323DCA	RE	2005/09/27 * 12
MAT-22	Attenuator(10dB)(above1 GHz)	Orient Microwave	BX10-0476-00	RE/AT	2005/03/16 * 12
MPA-01	Pre Amplifier	Agilent	8449B	RE	2005/02/05 * 12
MPA-10	Pre Amplifier	Agilent	8449B	RE	2005/09/07 * 12
MCC-18	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX 104	RE	2005/02/03 * 12
MCC-26	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	RE	2005/08/30 * 12
MAT-20	Attenuator(10dB)(above1 GHz)	HIROSE ELECTRIC CO.,LTD.	AT-110	RE	2005/01/11 * 12
MAEC-01	Anechoic Chamber	TDK	Semi Anechoic Chamber 10m	RE/CE	2005/11/12 * 12
MTR-01	Test Receiver	Rohde & Schwarz	ESI40	RE	2005/11/10 * 12
MHA-02	Horn Antenna	EMCO	3160-09	RE	2005/1/10 * 12
MLS-02	LISN(AMN)	Schwarzbeck	NSLK8127	CE(EUT)	2005/11/09 * 12
MCC-13	Coaxial Cable	Fujikura/Agilent	-	CE	2005/02/24 * 12
MPL-01	Pulse Limiter	Rohde & Schwarz	ESH3Z2	CE	2005/01/11 * 12
MSA-03	Spectrum Analyzer	Agilent	E4448A	AT	2005/09/16 * 12
MBTR-00	R&S Bluetooth RF Conformance Testsystem	Rohde & Schwarz	TS8960	AT	2005/09/13 * 3

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item: CE: Conducted emission

RE: Radiated emission

AT: Antenna Terminal Measurement

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(01.06.05)

APPENDIX 3: Data of EMI test

Conducted Emission


DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2005/12/06 19:25:11

Applicant : Sony EMCS Corporation
Kind of EUT : WIRELESS MICROPHONE
Model No. : ECM-HW1R
Serial No. : 68
Report No. : 26CE0070-HO
Power : DC7.2V (AC Adaptor AC120V/60Hz)
Temp./Humi. : 24deg. C / 35%
Operator : Makoto Kosaka

Mode / Remarks : Tx Hopping ON

LIMIT : FCC15C §15.207 (QP)
FCC15C §15.207 (AV)

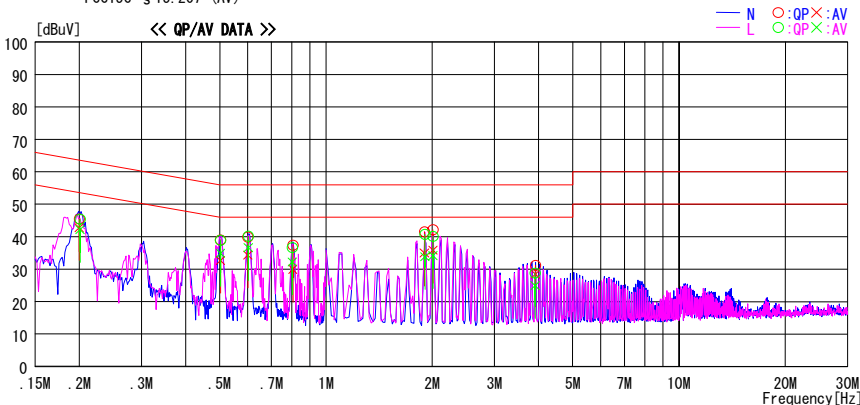

Frequency [MHz]	Reading Level		Corr Factor	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.19990	35.2	32.5	10.3	45.5	42.8	63.6	53.6	18.1	10.9	N
0.50261	28.8	22.5	10.2	39.0	32.7	56.0	46.0	17.0	13.3	N
0.60070	29.6	24.0	10.3	39.9	34.3	56.0	46.0	16.1	11.7	N
0.80581	27.1	19.6	10.3	37.4	29.9	56.0	46.0	18.6	16.1	N
1.90130	31.1	24.6	10.4	41.5	35.0	56.0	46.0	14.5	11.0	N
2.01002	31.7	25.3	10.5	42.2	35.8	56.0	46.0	13.8	10.2	N
3.92185	20.5	17.8	10.7	31.2	28.5	56.0	46.0	24.8	17.5	N
0.20110	35.1	31.9	10.3	45.4	42.2	63.6	53.6	18.2	11.4	L
0.50261	28.8	24.7	10.2	39.0	34.9	56.0	46.0	17.1	11.1	L
0.60190	29.9	26.3	10.3	40.2	36.6	56.0	46.0	15.8	9.4	L
0.80339	26.4	21.9	10.3	36.7	32.2	56.0	46.0	19.3	13.8	L
1.90581	30.3	23.4	10.4	40.7	33.8	56.0	46.0	15.3	12.2	L
2.01002	29.6	23.7	10.5	40.1	34.2	56.0	46.0	15.9	11.8	L
3.91008	18.1	14.2	10.7	28.8	24.9	56.0	46.0	27.2	21.1	L

CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F(LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.

Conducted Emission

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2005/12/06 19:57:13

Applicant : Sony EMCS Corporation
Kind of EUT : WIRELESS MICROPHONE
Model No. : ECM-HWR
Serial No. : 68
Report No. : 26CE0070-HO
Power : DC7.2V(AC Adaptor AC120V/60Hz)
Temp./Humi. : 24deg.C / 35%
Operator : Makoto Kosaka

Mode / Remarks : Rx CH(Mid)

LIMIT : FCC15C §15.207 (QP)
FCC15C §15.207 (AV)

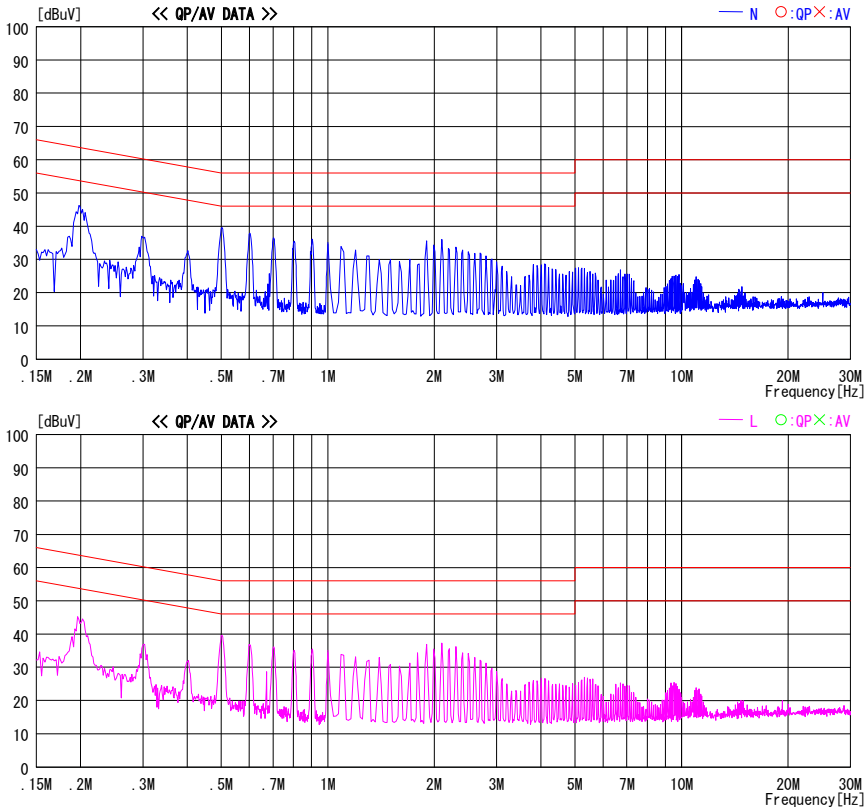


CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F(LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.


Carrier Frequency Separation

UL Apex Co., Ltd.
Head Office EMC Lab. No.3 Shielded Room

COMPANY	: Sony EMCS Corporation	REGULATION	: Fcc Part15 Subpart C 15.247(a)(1)
EQUIPMENT	: Wireless Microphone	TEST DISTANCE	: -
MODEL	: ECM-HW1R	DATE	: 11/30/2005
S/ N	: 68	TEMPERATURE	: 23deg.C
POWER	: DC 7.2 V	HUMIDITY	: 25%
MODE	: Tx(Hopping on)	ENGINEER	: Makoto Kosaka

Ch	Freq. [MHz]	Channel separation [MHz]	Limit
Low	2402.0	1.000	>20dB Bandwidth and 25[kHz]
Mid	2441.0	1.000	>20dB Bandwidth and 25[kHz]
High	2480.0	1.000	>20dB Bandwidth and 25[kHz]

Carrier Frequency Separation

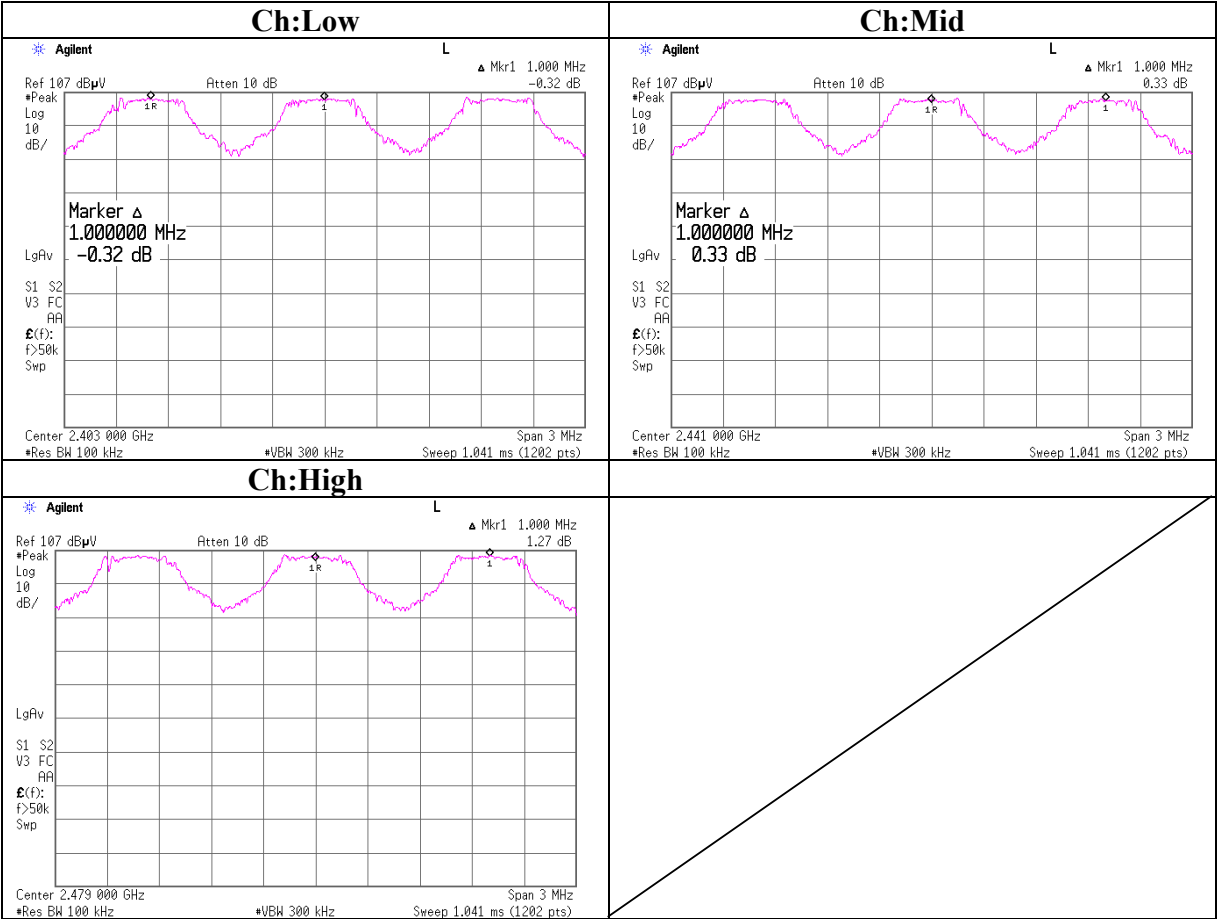


20dB Bandwidth

UL Apex Co., Ltd.
Head Office EMC Lab. No.3 Shielded Room

COMPANY	: Sony EMCS Corporation	REGULATION	: Fcc Part15 Subpart C 15.247(a)(1)
EQUIPMENT	: Wireless Microphone	TEST DISTANCE	: -
MODEL	: ECM-HW1R	DATE	: 12/02/2005
S/ N	: 68	TEMPERATURE	: 25deg.C
POWER	: DC 7.2 V	HUMIDITY	: 30%
MODE	: Tx (Hopping off)	ENGINEER	: Norihisa Hashimoto

Ch	Freq. [MHz]	20dB Bandwidth [MHz]	Limit [MHz]
Low	2402.0	0.930	-
Mid	2441.0	0.930	-
High	2480.0	0.930	-

20dB Bandwidth

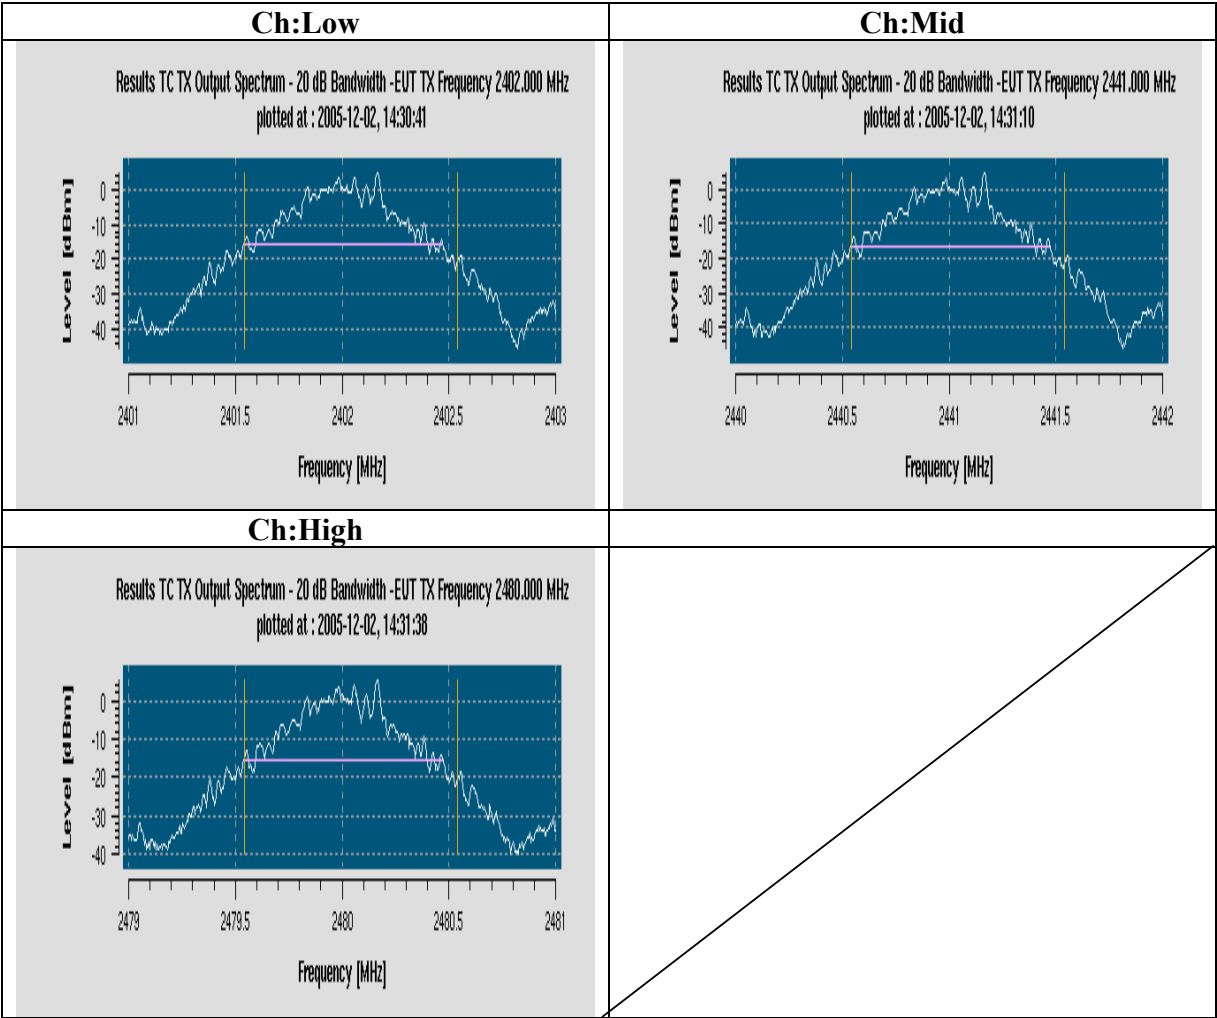


Number of Hopping Frequency

UL Apex Co., Ltd.
Head Office EMC Lab. No.3 Shielded Room

COMPANY	: Sony EMCS Corporation	REGULATION	: Fcc Part15 Subpart C 15.247(a)(1)(iii)
EQUIPMENT	: Wireless Microphone	TEST DISTANCE	: -
MODEL	: ECM-HW1R	DATE	: 11/30/2005
S/ N	: 68	TEMPERATURE	: 23deg.C
POWER	: DC 7.2 V	HUMIDITY	: 25%
MODE	: Tx (Hopping on)	ENGINEER	: Makoto Kosaka

Mode	Number of channel	Limit
	[time]	[time]
Tx(Hoppng on)	79	≥ 15

Number of Hopping Frequency

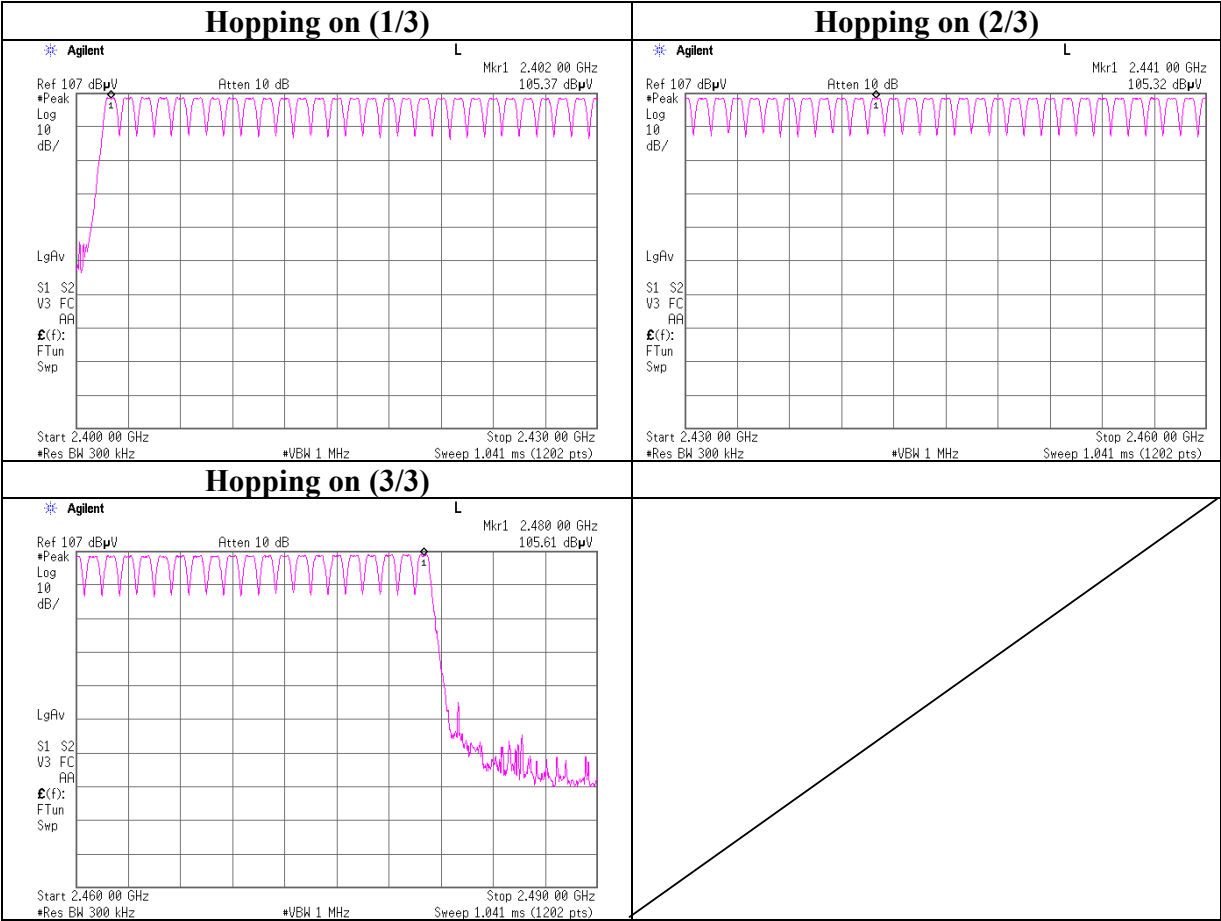

Dwell time


UL Apex Co., Ltd.
Head Office EMC Lab. No.3 Shielded Room

COMPANY	: Sony EMCS Corporation	REGULATION	: Fcc Part15 Subpart C 15.247(a)(1)(iii)
EQUIPMENT	: Wireless Microphone	TEST DISTANCE	: -
MODEL	: ECM-HW1R	DATE	: 11/30/2005
S/ N	: 68	TEMPERATURE	: 23deg.C
POWER	: DC 7.2 V	HUMIDITY	: 25%
MODE	: Tx (Hopping on)	ENGINEER	: Makoto Kosaka


Mode	Number of transmission in a 31.6(79 Hopping x 0.4) second period	Length of transmission time [msec]	Result [msec]	Limit [msec]
DH1	51.2 times /5sec. x 31.6 = 324 times	0.373	121	400
DH3	27.4 times / 5sec. x 31.6 = 173 times	1.633	283	400
DH5	15.6 times / 5 sec. x 31.6 = 99 times	2.866	284	400

※Average data of 5 tests

Dwell time

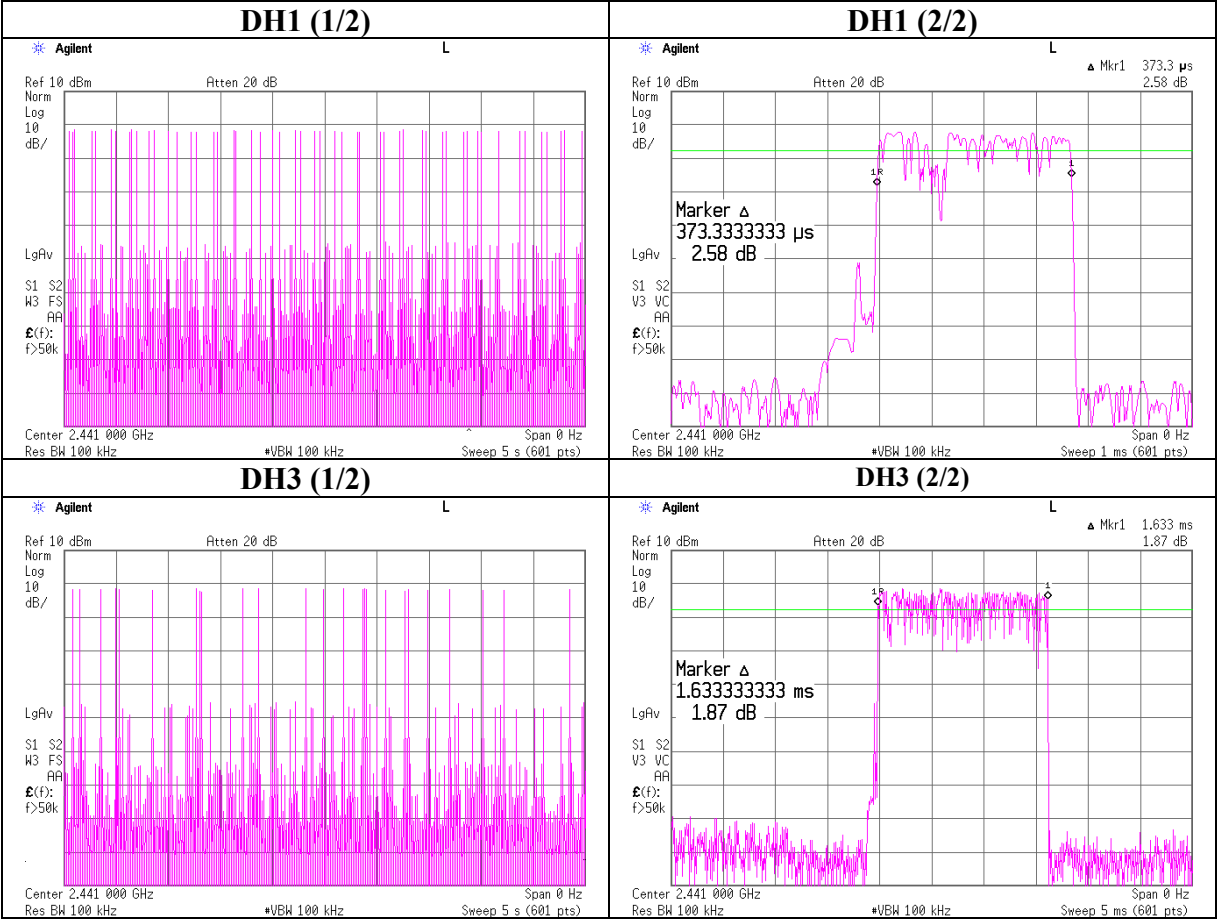

Dwell time

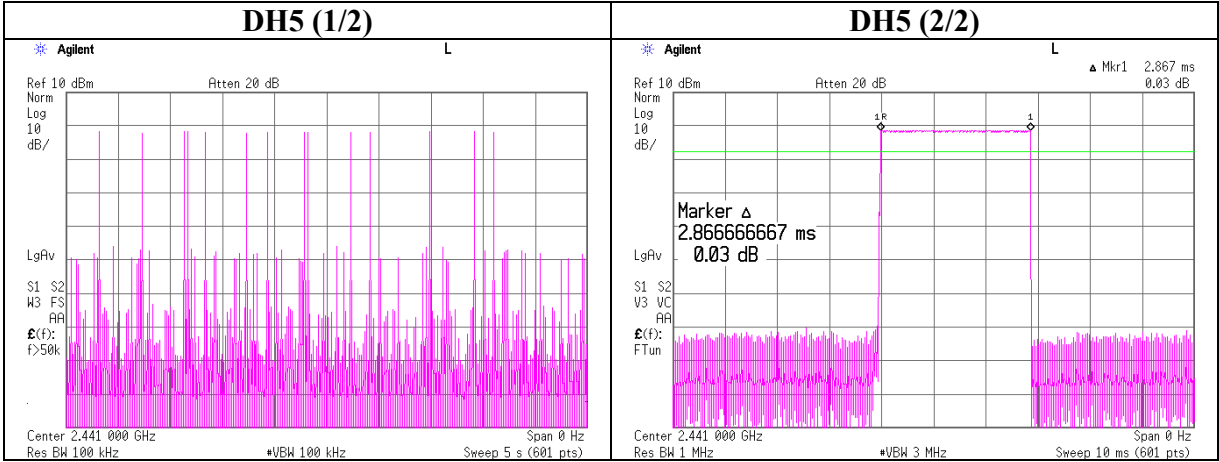

Maximum Peak Output Power

UL Apex Co., Ltd.
Head Office EMC Lab. No.3 Shielded Room

COMPANY	: Sony EMCS Corporation	REGULATION	: Fcc Part15 Subpart C 15.247(b)(1)
EQUIPMENT	: Wireless Microphone	TEST DISTANCE	: -
MODEL	: ECM-HW1R	DATE	: 11/30/2005
S/ N	: 68	TEMPERATURE	: 23deg.C
POWER	: DC 7.2 V	HUMIDITY	: 25%
MODE	: Tx(Hopping off)	ENGINEER	: Makoto Kosaka


Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
Low	2402.0	-0.88	0.47	9.91	9.50	20.96	11.46
Mid	2441.0	-1.02	0.49	9.91	9.38	20.96	11.58
High	2480.0	-0.79	0.49	9.91	9.61	20.96	11.35

Sample Calculation:

Result = Reading + Cable Loss (supplied by customer)+ Attenuator

* In the above table, factor 0.0dB represents no use of Atten. and/or Filter.

Maximum Peak Output Power

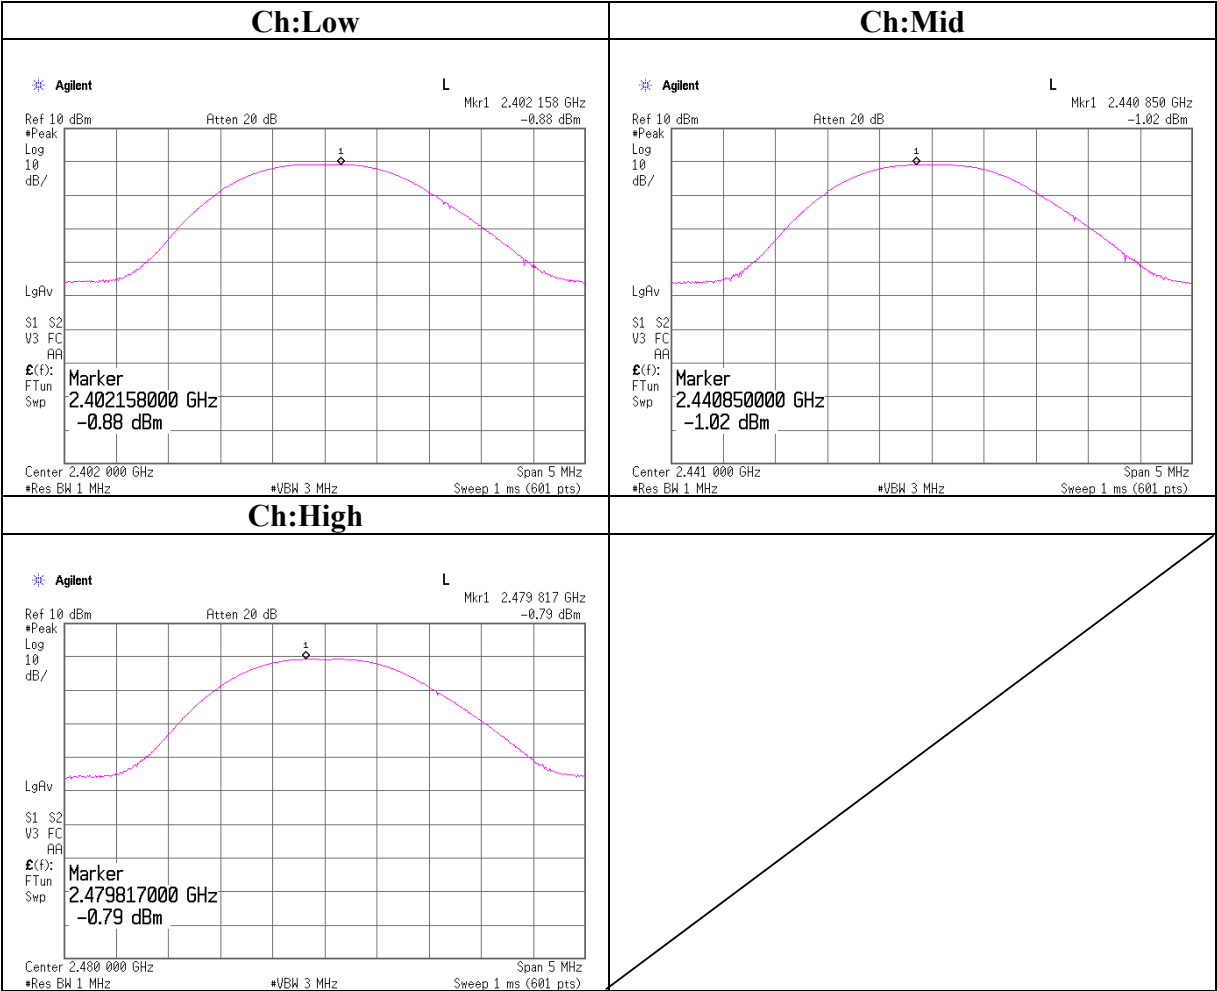

Test report No. : 26CE0070-HO-1a
Page : 30 of 43
Issued date : December 19 2005
Revised date : December 28, 2005
FCC ID : AK8ECMHW1R

Radiated Spurious Emission (30MHz-1GHz)

* The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2005/11/19 10:34:11

Applicant : Sony EMCS Corporation Report No. : 26CE0070-HO
Kind of EUT : WIRELESS MICROPHONE Power : DC7.2V (AC Adaptor AC120V/60Hz)
Model No. : ECM-HW1R Temp./Humi. : 23deg. C. / 33%
Serial No. : 68 Operator : Makoto Kosaka

Mode / Remarks : Tx hopping off ch Low (DH5)

LIMIT : FCC15C §15.247(d) 3m, below 1GHz:QP, above 1GHz:AV

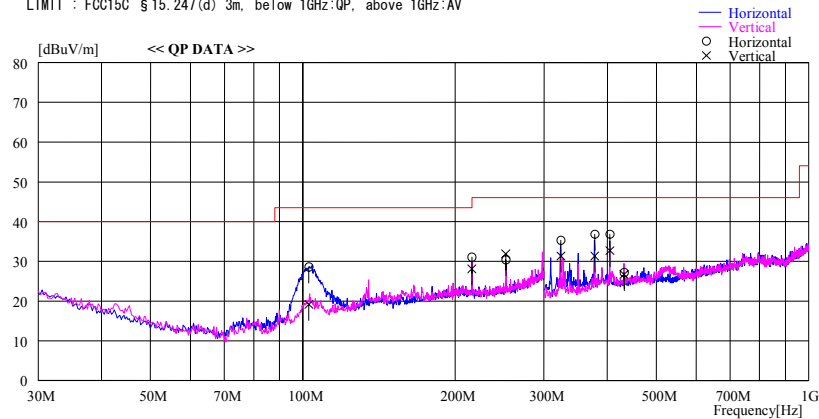

Frequency	Reading	DET	Antenna Factor	Loss & Gain	Level	Angle	Height	Polar.	Limit	Margin
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]
102.849	40.2	QP	10.3	-21.9	28.6	153	256	Hori.	43.5	14.9
102.849	30.8	QP	10.3	-21.9	19.2	235	100	Vert.	43.5	24.3
216.000	35.0	QP	16.8	-20.7	31.1	0	127	Hori.	43.5	12.4
216.000	32.0	QP	16.8	-20.7	28.1	44	100	Vert.	43.5	15.4
252.000	33.5	QP	17.2	-20.3	30.4	5	131	Hori.	46.0	15.6
252.000	35.0	QP	17.2	-20.3	31.9	76	100	Vert.	46.0	14.1
324.000	39.2	QP	15.1	-19.0	35.3	17	100	Hori.	46.0	10.7
324.000	35.2	QP	15.1	-19.0	31.3	42	100	Vert.	46.0	14.7
378.000	39.6	QP	17.1	-19.9	36.8	5	100	Hori.	46.0	9.2
378.000	34.1	QP	17.1	-19.9	31.3	8	100	Vert.	46.0	14.7
405.000	39.1	QP	17.8	-20.1	36.8	313	100	Hori.	46.0	9.2
405.000	35.0	QP	17.8	-20.1	32.7	127	100	Vert.	46.0	13.3
432.000	29.5	QP	17.8	-20.1	27.2	121	100	Hori.	46.0	18.8
432.000	29.0	QP	17.8	-20.1	26.7	125	129	Vert.	46.0	19.3

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

UL Apex Co., Ltd.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

MF060b(01.06.05)

Test report No. : 26CE0070-HO-1a
Page : 31 of 43
Issued date : December 19 2005
Revised date : December 28, 2005
FCC ID : AK8ECMHW1R

Radiated Spurious Emission (30MHz-1GHz)

* The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2005/11/19 13:10:47

Applicant : Sony EMCS Corporation
Kind of EUT : WIRELESS MICROPHONE
Model No. : ECM-HW1R
Serial No. : 68
Report No. : 26CE0070-HO
Power : DC7.2V(AC Adaptor AC120V/60Hz)
Temp./Humi. : 23deg.C. / 33%
Operator : Makoto Kosaka

Mode / Remarks : Tx hopping off ch Mid(DH5)

LIMIT : FCC15C § 15.247(d) 3m, below 1GHz:QP, above 1GHz:AV

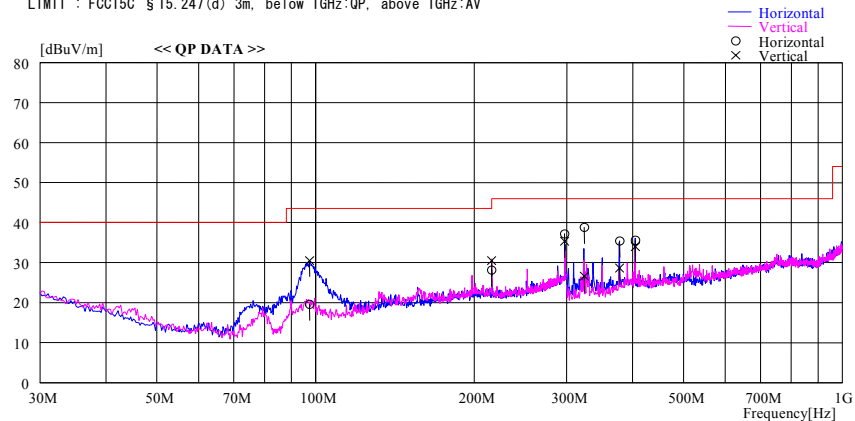

Frequency	Reading	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin
			Factor	Gain						
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]
97.503	43.2	QP	9.4	-22.1	30.5	292	303	Vert.	43.5	13.0
97.503	32.3	QP	9.4	-22.1	19.6	144	100	Hori.	43.5	23.9
216.000	34.4	QP	16.8	-20.7	30.5	0	100	Vert.	43.5	13.0
216.000	32.0	QP	16.8	-20.7	28.1	15	100	Hori.	43.5	15.4
297.000	37.1	QP	19.9	-19.8	37.2	304	114	Hori.	46.0	8.8
297.000	35.2	QP	19.9	-19.8	35.3	41	100	Vert.	46.0	10.7
324.000	42.7	QP	15.1	-19.0	38.8	325	100	Hori.	46.0	7.2
324.000	30.5	QP	15.1	-19.0	26.6	60	100	Vert.	46.0	19.4
378.000	38.2	QP	17.1	-19.9	35.4	311	100	Hori.	46.0	10.6
378.000	31.4	QP	17.1	-19.9	28.6	358	100	Vert.	46.0	17.4
405.000	37.9	QP	17.8	-20.1	35.6	294	100	Hori.	46.0	10.4
405.000	36.3	QP	17.8	-20.1	34.0	114	100	Vert.	46.0	12.0

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

UL Apex Co., Ltd.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

MF060b(01.06.05)

Radiated Spurious Emission
(30MHz-1GHz)

*The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 2 Semi Anechoic Chamber
Date : 2005/11/19 14:55:57

Applicant : Sony EMCS Corporation
Kind of EUT : WIRELESS MICROPHONE
Model No. : ECM-HW1R
Serial No. : 68
Report No. : 26CE0070-H0
Power : DC7.2V(AC Adaptor AC120V/60Hz)
Temp./Humi. : 23deg. C. / 33%
Operator : Makoto Kosaka

Mode / Remarks : Tx hopping off ch Hi (DH5)

LIMIT : FCC15C § 15.247(d) 3m, below 1GHz:QP, above 1GHz:AV

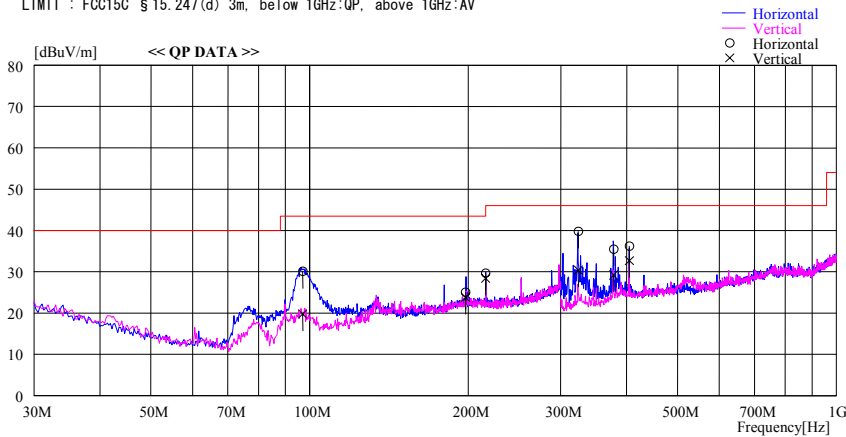

Frequency	Reading	DET	Antenna		Level	Angle	Height	Polar.	Limit	Margin
			Factor	Gain						
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]
97.034	43.0	QP	9.3	-22.2	30.1	312	258	Hori.	43.5	13.4
97.034	32.7	QP	9.3	-22.2	19.8	126	100	Vert.	43.5	23.7
198.000	29.2	QP	16.5	-20.6	25.1	5	100	Hori.	43.5	18.4
198.000	27.9	QP	16.5	-20.6	23.8	353	100	Vert.	43.5	19.7
216.000	33.6	QP	16.8	-20.7	29.7	0	143	Hori.	43.5	13.8
216.000	32.3	QP	16.8	-20.7	28.4	20	100	Vert.	43.5	15.1
324.000	43.7	QP	15.1	-19.0	39.8	320	114	Hori.	46.0	6.2
324.000	34.3	QP	15.1	-19.0	30.4	109	120	Vert.	46.0	15.6
378.000	38.3	QP	17.1	-19.9	35.5	322	100	Hori.	46.0	10.5
378.000	32.0	QP	17.1	-19.9	29.2	310	111	Vert.	46.0	16.8
405.000	38.5	QP	17.8	-20.1	36.2	327	100	Hori.	46.0	9.8
405.000	35.0	QP	17.8	-20.1	32.7	105	137	Vert.	46.0	13.3

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

Test report No. : 26CE0070-HO-1a
Page : 33 of 43
Issued date : December 19 2005
Revised date : December 28, 2005
FCC ID : AK8ECMHW1R

Radiated Spurious Emission (30MHz-1GHz)

*The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

DATA OF RADIATED EMISSION TEST


UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2005/11/19 16:39:30

Applicant : Sony EMCS Corporation
Kind of EUT : WIRELESS MICROPHONE
Model No. : ECM-HW1R
Serial No. : 68

Report No. : 26CE0070-HO
Power : DC7.2V (AC Adaptor AC120V/60Hz)
Temp./Humi. : 23deg. C. / 33%
Operator : Makoto Kosaka

Mode / Remarks : Rx mode

LIMIT : FCC15C § 15.247(d) 3m, below 1GHz:QP, above 1GHz:AV

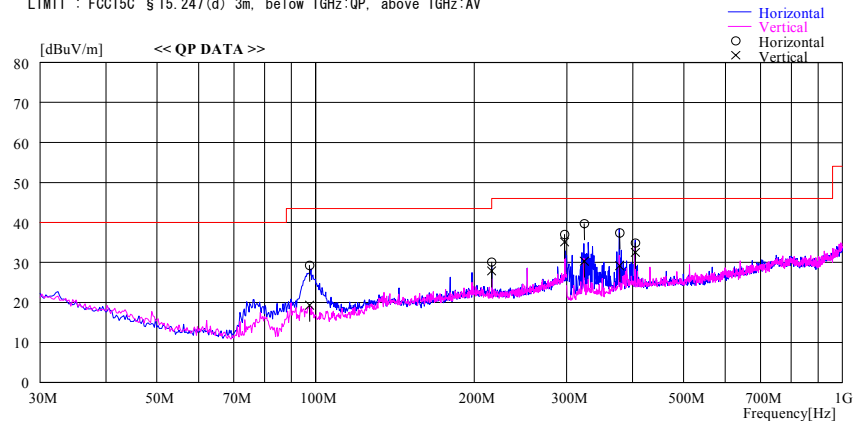

Frequency	Reading	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin
			Factor	Gain						
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]
97.500	42.0	QP	9.4	-22.1	29.3	300	300	Hori.	43.5	14.2
97.500	32.0	QP	9.4	-22.1	19.3	140	100	Vert.	43.5	24.2
216.000	34.0	QP	16.8	-20.7	30.1	0	100	Hori.	43.5	13.4
216.000	31.8	QP	16.8	-20.7	27.9	20	100	Vert.	43.5	15.6
297.000	36.9	QP	19.9	-19.8	37.0	305	115	Hori.	46.0	9.0
297.000	35.0	QP	19.9	-19.8	35.1	43	100	Vert.	46.0	10.9
324.000	43.6	QP	15.1	-19.0	39.7	305	110	Hori.	46.0	6.3
324.000	34.2	QP	15.1	-19.0	30.3	130	110	Vert.	46.0	15.7
378.000	40.2	QP	17.1	-19.9	37.4	305	100	Hori.	46.0	8.6
378.000	32.0	QP	17.1	-19.9	29.2	310	105	Vert.	46.0	16.8
405.000	37.2	QP	17.8	-20.1	34.9	316	100	Hori.	46.0	11.1
405.000	34.8	QP	17.8	-20.1	32.5	110	130	Vert.	46.0	13.5

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

UL Apex Co., Ltd.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

MF060b(01.06.05)

Test report No. : 26CE0070-HO-1a
Page : 34 of 43
Issued date : December 19 2005
Revised date : December 28, 2005
FCC ID : AK8ECMHW1R

Radiated Spurious Emission (1GHz-26.5GHz)

UL Apex Co., Ltd.
Head Office EMC Lab. No.1 and 2 Semi Anechoic Chamber

Company	: Sony EMCS Corporation	REPORT NO	: 26CE0070-HO
Equipment	: WIRELESS MICROPHONE	REGULATION	: Fcc Part15 Subpart C 15.247(d)
Model	: ECM-HW1R	TEST DISTANCE	: 3/1m
Sample No.	: 68	DATE	: 11/20/2005 : 11/29/2005
Power	: DC7.2V	TEMPERATURE	: 20deg.C : 22deg.C
Mode	: Bluetooth, Tx 2402MHz	HUMIDITY	: 32% : 32%
Remarks	: Hor Z-axis/Ver Y-axis	ENGINEER	: Hiroka Umeyama : Mitsuru Fujimura

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1487.0	52.4	60.7	24.3	36.7	3.8	0.0	43.8	52.1	74.0	30.2	21.9
2	2390.0	63.2	62.9	30.5	36.4	4.6	0.0	61.9	61.6	74.0	12.1	12.4
3	4804.0	42.7	44.9	35.2	36.0	6.6	0.8	49.3	51.5	74.0	24.7	22.5
4	7206.0	42.0	41.6	37.7	36.1	8.2	0.3	52.1	51.7	74.0	21.9	22.3
5	9608.0	44.8	43.7	37.0	36.4	9.0	0.7	55.1	54.0	74.0	18.9	20.0
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
6	12010.0	44.2	43.8	41.6	36.1	7.8	0.0	48.0	47.6	74.0	26.0	26.4
7	14412.0	43.0	43.1	41.7	34.6	8.5	0.0	49.1	49.2	74.0	24.9	24.8
8	16814.0	45.7	45.3	45.1	35.1	9.0	0.0	55.2	54.8	74.0	18.8	19.2
9	19216.0	46.7	46.8	40.1	34.1	9.7	0.0	52.9	53.0	74.0	21.1	21.0
10	21618.0	46.2	46.1	39.8	34.8	9.9	0.0	51.6	51.5	74.0	22.4	22.5
11	24020.0	46.0	45.9	40.4	35.5	10.8	0.0	52.2	52.1	74.0	21.8	21.9

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1487.0	40.5	52.6	24.3	36.7	3.8	0.0	31.9	44.0	54.0	22.1	10.0
2	2390.0	33.2	40.9	30.5	36.4	4.6	0.0	31.9	39.6	54.0	22.1	14.4
3	4804.0	31.5	37.7	35.2	36.0	6.6	0.8	38.1	44.3	54.0	15.9	9.7
4	7206.0	31.6	31.8	37.7	36.1	8.2	0.3	41.7	41.9	54.0	12.3	12.1
5	9608.0	31.3	29.9	37.0	36.4	9.0	0.7	41.6	40.2	54.0	12.4	13.8
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
6	12010.0	32.1	32.0	41.6	36.1	7.8	0.0	35.9	35.8	54.0	18.1	18.2
7	14412.0	32.1	32.2	41.7	34.6	8.5	0.0	38.2	38.3	54.0	15.8	15.7
8	16814.0	33.0	32.9	45.1	35.1	9.0	0.0	42.5	42.4	54.0	11.5	11.6
9	19216.0	32.1	32.1	40.1	34.1	9.7	0.0	38.3	38.3	54.0	15.7	15.7
10	21618.0	33.5	33.4	39.8	34.8	9.9	0.0	38.9	38.8	54.0	15.1	15.2
11	24020.0	33.1	33.1	40.4	35.5	10.8	0.0	39.3	39.3	54.0	14.7	14.7

20dBc(Fundamental 2402MHz) (RBW: 100kHz, VBW: 300kHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATT or Filter Loss [dB]	RESULT		Limit 20dBc [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	[dB]
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2402.0	111.7	113.1	30.5	36.4	4.6	0.0	110.4	111.8	-	-	-
2	2400.0	68.6	72.1	30.5	36.4	4.6	0.0	67.3	70.8	Funda-20dB	23.1	21.0

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3/1.0) = 9.5dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*In the frequency over the fifth harmonic, the noise from the EUT was not seen. The data above is its base noise.

*The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*Hi-Pass Fiter was not used for factor 0.0dB of the above table.

UL Apex Co., Ltd.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

MF060b(01.06.05)

Radiated Spurious Emission (1GHz-26.5GHz)

UL Apex Co., Ltd.

Head Office EMC Lab. No.1 and 2 Semi Anechoic Chamber

Company : Sony EMCS Corporation	REPORT NO : 26CE0070-HO	
Equipment : WIRELESS MICROPHONE	REGULATION : Fcc Part15 Subpart C 15.247(d)	
Model : ECM-HW1R	TEST DISTANCE : 3/1m	
Sample No. : 68	DATE : 11/20/2005 : 11/29/2005	
Power : DC7.2V	TEMPERATURE : 20deg.C : 22deg.C	
Mode : Bluetooth, Tx 2441MHz	HUMIDITY : 32% : 32%	
Remarks : Hor Z-axis/Ver Y-axis	ENGINEER : Hiroka Umeyama : Mitsuru Fujimura	

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1487.0	57.0	60.8	24.3	36.7	3.8	0.0	48.4	52.2	74.0	25.6	21.8
2	4882.0	44.1	42.6	35.6	36.0	6.6	0.8	51.1	49.6	74.0	22.9	24.4
3	7323.0	42.1	42.2	37.9	36.0	8.2	0.3	52.5	52.6	74.0	21.5	21.4
4	9764.0	44.8	43.7	36.8	36.4	9.3	0.6	55.1	54.0	74.0	18.9	20.0
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
5	12205.0	44.2	43.8	41.6	36.0	7.8	0.0	48.1	47.7	74.0	25.9	26.3
6	14646.0	43.0	43.1	42.2	35.2	8.5	0.0	49.0	49.1	74.0	25.0	24.9
7	17087.0	45.7	45.3	45.2	34.9	9.1	0.0	55.6	55.2	74.0	18.4	18.8
8	19528.0	44.2	44.3	40.3	34.3	9.8	0.0	50.5	50.6	74.0	23.5	23.4
9	21969.0	45.1	45.2	39.8	34.2	10.0	0.0	51.2	51.3	74.0	22.8	22.7
10	24410.0	46.4	46.7	40.4	35.8	10.8	0.0	52.3	52.6	74.0	21.7	21.4

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ	S/A READING		ANT Factor	AMP GAIN	CABLE LOSS	Hi-Pass Filter	RESULT		Limit AV	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
	[MHz]	[dBuV]		[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]		[dBuV/m]	[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1487.0	50.0	52.7	24.3	36.7	3.8	0.0	41.4	44.1	54.0	12.6	9.9
2	4882.0	33.6	32.3	35.6	36.0	6.6	0.8	40.6	39.3	54.0	13.4	14.7
3	7323.0	28.5	30.0	37.9	36.0	8.2	0.3	38.9	40.4	54.0	15.1	13.6
4	9764.0	31.3	29.9	36.8	36.4	9.3	0.6	41.6	40.2	54.0	12.4	13.8
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
5	12205.0	32.1	32.0	41.6	36.0	7.8	0.0	36.0	35.9	54.0	18.0	18.1
6	14646.0	32.1	32.2	42.2	35.2	8.5	0.0	38.1	38.2	54.0	15.9	15.8
7	17087.0	33.0	32.9	45.2	34.9	9.1	0.0	42.9	42.8	54.0	11.1	11.2
8	19528.0	31.4	31.5	40.3	34.3	9.8	0.0	37.7	37.8	54.0	16.3	16.2
9	21969.0	33.1	33.2	39.8	34.2	10.0	0.0	39.2	39.3	54.0	14.8	14.7
10	24410.0	32.7	32.9	40.4	35.8	10.8	0.0	38.6	38.8	54.0	15.4	15.2

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3/1.0) = 9.5dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*In the frequency over the fifth harmonic, the noise from the EUT was not seen. The data above is its base noise.

*The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*Hi-Pass Filter was not used for factor 0.0dB of the above table.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(01.06.05)

Test report No. : 26CE0070-HO-1a
Page : 36 of 43
Issued date : December 19 2005
Revised date : December 28, 2005
FCC ID : AK8ECMHW1R

Radiated Spurious Emission (1GHz-26.5GHz)

Company : Sony EMCS Corporation
Equipment : WIRELESS MICROPHONE
Model : ECM-HW1R
Sample No. : 68
Power : DC7.2V (AC adaptor 120V/60Hz)
Mode : Bluetooth, Tx 2480MHz
Remarks : Hor Z-axis/Ver Y-axis

REPORT NO : 26CE0070-HO
REGULATION : Fcc Part15 Subpart C 15.247(d)
TEST DISTANCE : 3/1m
DATE : 11/28/2005 11/29/2005
TEMPERATURE : 22deg.C : 22deg.C
HUMIDITY : 40% : 32%
ENGINEER : Mitsuru Fujimura

UL Apex Co., Ltd.
Head Office EMC Lab. No.1 Semi Anechoic Chamber

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATT or Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1*	2483.5	70.4	68.7	30.8	32.4	3.1	10.0	81.9	80.2	74.0	-7.9	-6.2
2	2981.5	47.3	46.9	32.2	32.1	3.5	0.0	50.9	50.5	74.0	23.1	23.5
3	4960.0	46.6	44.8	35.8	31.8	4.3	0.8	55.7	53.9	74.0	18.3	20.1
4	7440.0	41.2	43.4	37.9	31.9	5.3	0.3	52.8	55.0	74.0	21.3	19.0
5	9920.0	42.8	42.6	36.2	32.0	6.3	0.6	53.9	53.7	74.0	20.1	20.3
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
6	12400.0	45.2	45.1	41.7	35.8	7.9	0.0	49.5	49.4	74.0	24.5	24.6
7	14880.0	43.9	43.0	42.7	36.0	8.5	0.0	49.6	48.7	74.0	24.4	25.3
8	17360.0	43.5	43.5	44.7	35.1	9.3	0.0	52.9	52.9	74.0	21.1	21.1
9	19840.0	45.4	45.2	40.4	34.8	9.8	0.0	51.3	51.1	74.0	22.7	22.9
10	22320.0	44.2	44.9	39.8	34.1	10.1	0.0	50.5	51.2	74.0	23.5	22.8
11	24800.0	45.8	45.4	40.7	35.1	10.9	0.0	52.8	52.4	74.0	21.2	21.6

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATT or Hi-Pass Filter	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1*	2483.5	46.9	49.0	30.8	32.4	3.1	10.0	58.3	60.5	54.0	-4.3	-6.5
2	2981.5	38.6	38.0	32.2	32.1	3.5	0.0	42.2	41.6	54.0	11.8	12.4
3	4960.0	36.7	34.0	35.8	31.8	4.3	0.8	45.8	43.1	54.0	8.2	10.9
4	7440.0	30.6	30.7	37.9	31.9	5.3	0.3	42.2	42.3	54.0	11.8	11.7
5	9920.0	29.9	30.0	36.2	32.0	6.3	0.6	41.0	41.1	54.0	13.0	12.9
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
6	12400.0	32.4	32.3	41.7	35.8	7.9	0.0	36.7	36.6	54.0	17.3	17.4
7	14880.0	32.1	32.2	42.7	36.0	8.5	0.0	37.8	37.9	54.0	16.2	16.1
8	17360.0	32.5	32.6	44.7	35.1	9.3	0.0	41.9	42.0	54.0	12.1	12.0
9	19840.0	31.4	31.6	40.4	34.8	9.8	0.0	37.3	37.5	54.0	16.7	16.5
10	22320.0	32.4	32.3	39.8	34.1	10.1	0.0	38.7	38.6	54.0	15.3	15.4
11	24800.0	32.8	32.7	40.7	35.1	10.9	0.0	39.8	39.7	54.0	14.2	14.3

* Reference data

Marker-Delta Method (RBW:100kHz)

No.	FREQ [MHz]	Reading calculation*		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATT or Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
PK DETECT												
1	2483.5	53.8	51.5	30.8	32.4	3.1	10.0	65.3	62.9	74.0	8.7	11.1
AV DETECT												
1	2483.5	33.9	32.8	30.8	32.4	3.1	10.0	45.4	44.3	54.0	8.7	9.7

*Reading calculation = Carrier(RBW:1MHz) - {Carrier(RBW:100kHz) - Bandedge(RBW:100kHz)}

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3/1.0) = 9.5dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*In the frequency over the fifth harmonic, the noise from the EUT was not seen. The data above is its base noise.

*The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*Hi-Pass Fiter was not used for factor 0.0dB of the above table.

UL Apex Co., Ltd.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

MF060b(01.06.05)

Radiated Spurious Emission (1GHz-26.5GHz)

UL Apex Co., Ltd.
Head Office EMC Lab. No.1 Semi Anechoic Chamber

Company : Sony EMCS Corporation	REPORT NO : 26CE0070-HO
Equipment : WIRELESS MICROPHONE	REGULATION : Fcc Part15 Subpart C 15.247(d)
Model : ECM-HW1R	TEST DISTANCE : 3/1m
Sample No. : 68	DATE : 11/29/2005
Power : DC7.2V (AC adaptor 120V/60Hz)	TEMPERATURE : 22deg.C
Mode : Bluetooth, Rx 2441MHz	HUMIDITY : 32%
Remarks : Hor Z-axis/Ver Y-axis	ENGINEER : Mitsuru Fujimura

PK DETECT (RBW: 1MHz, VBW: 1MHz)

RESULT (dBV, MHz, dBV, MHz)												
No.	FREQ [MHz]	S/A READING [dBuV]		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT [dBuV/m]		Limit PK [dBuV/m]	MARGIN [dB]	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2441.0	43.6	43.7	30.9	32.4	3.2	0.0	45.3	45.4	74.0	28.7	28.6
2	4882.0	41.5	40.9	35.4	31.8	4.3	0.0	49.4	48.8	74.0	24.6	25.2

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2441.0	31.1	30.7	30.9	32.4	3.2	0.0	32.8	32.4	54.0	21.2	21.6
2	4882.0	28.1	28.1	35.4	31.8	4.3	0.0	36.0	36.0	54.0	18.1	18.0

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3/1.0) = 9.5dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.


*In the frequency over the fifth harmonic, the noise from the EUT was not seen. The data above is its base noise.

*The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.


*Hi-Pass Filter was not used for factor 0.0dB of the above table.

Conducted Spurious Emission


Tx, Ch: Low

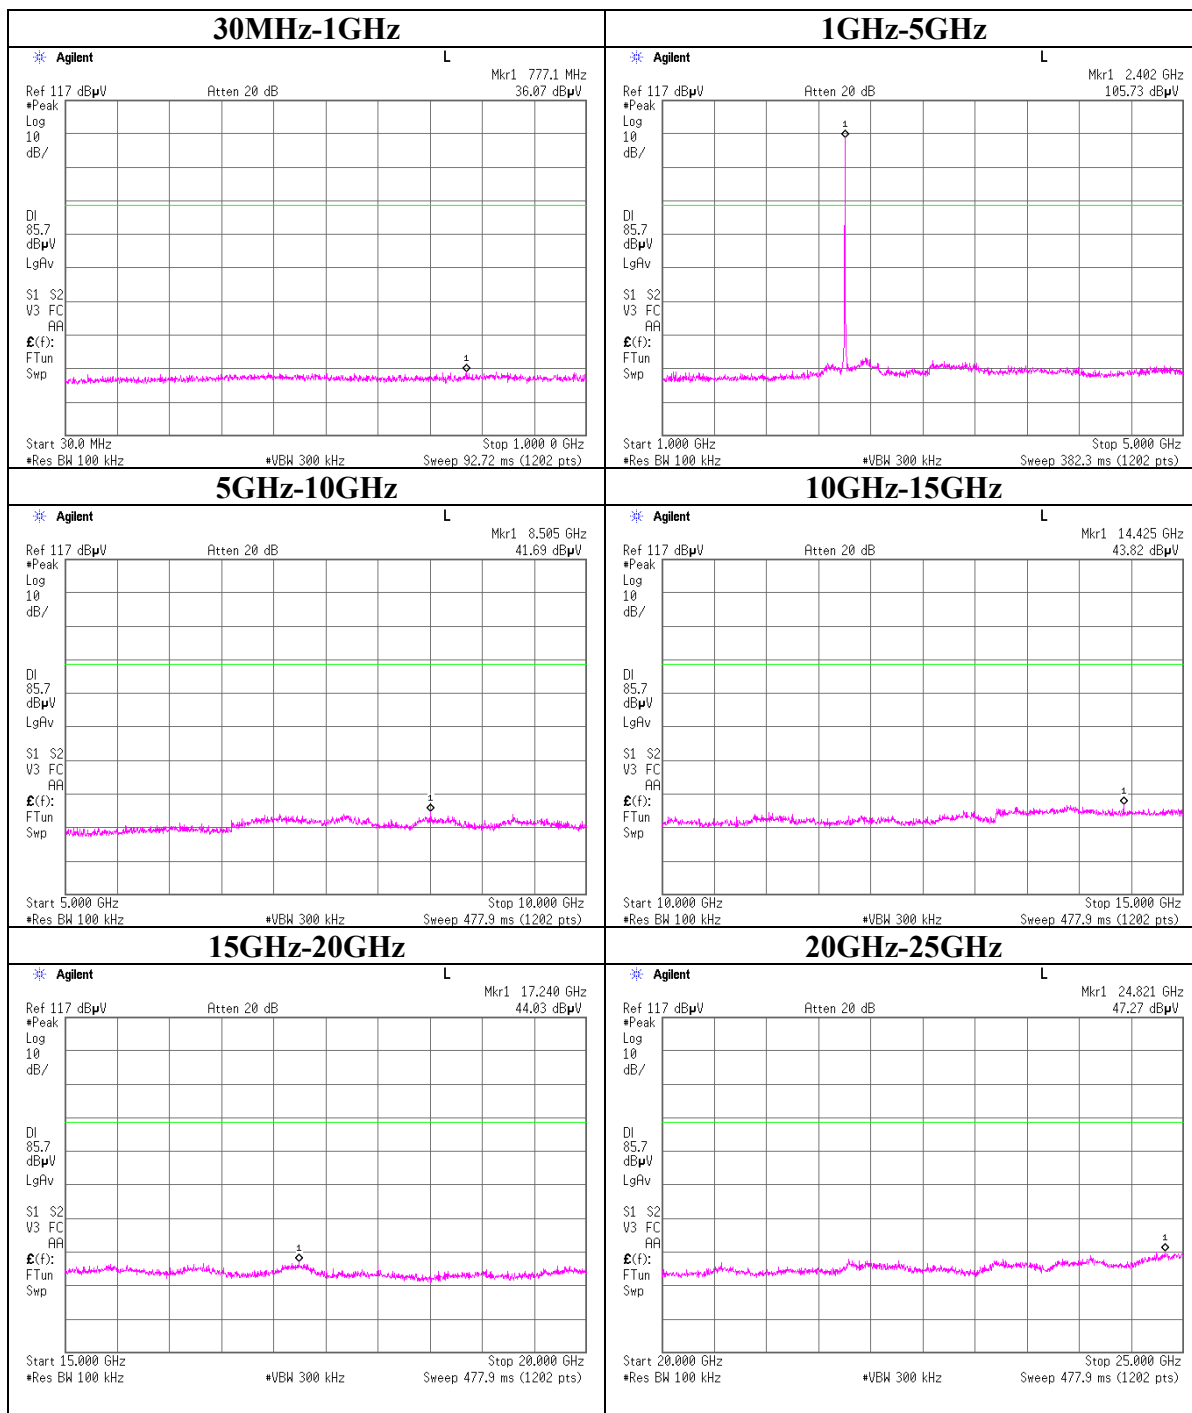


Conducted Spurious Emission
Tx, Ch: Mid

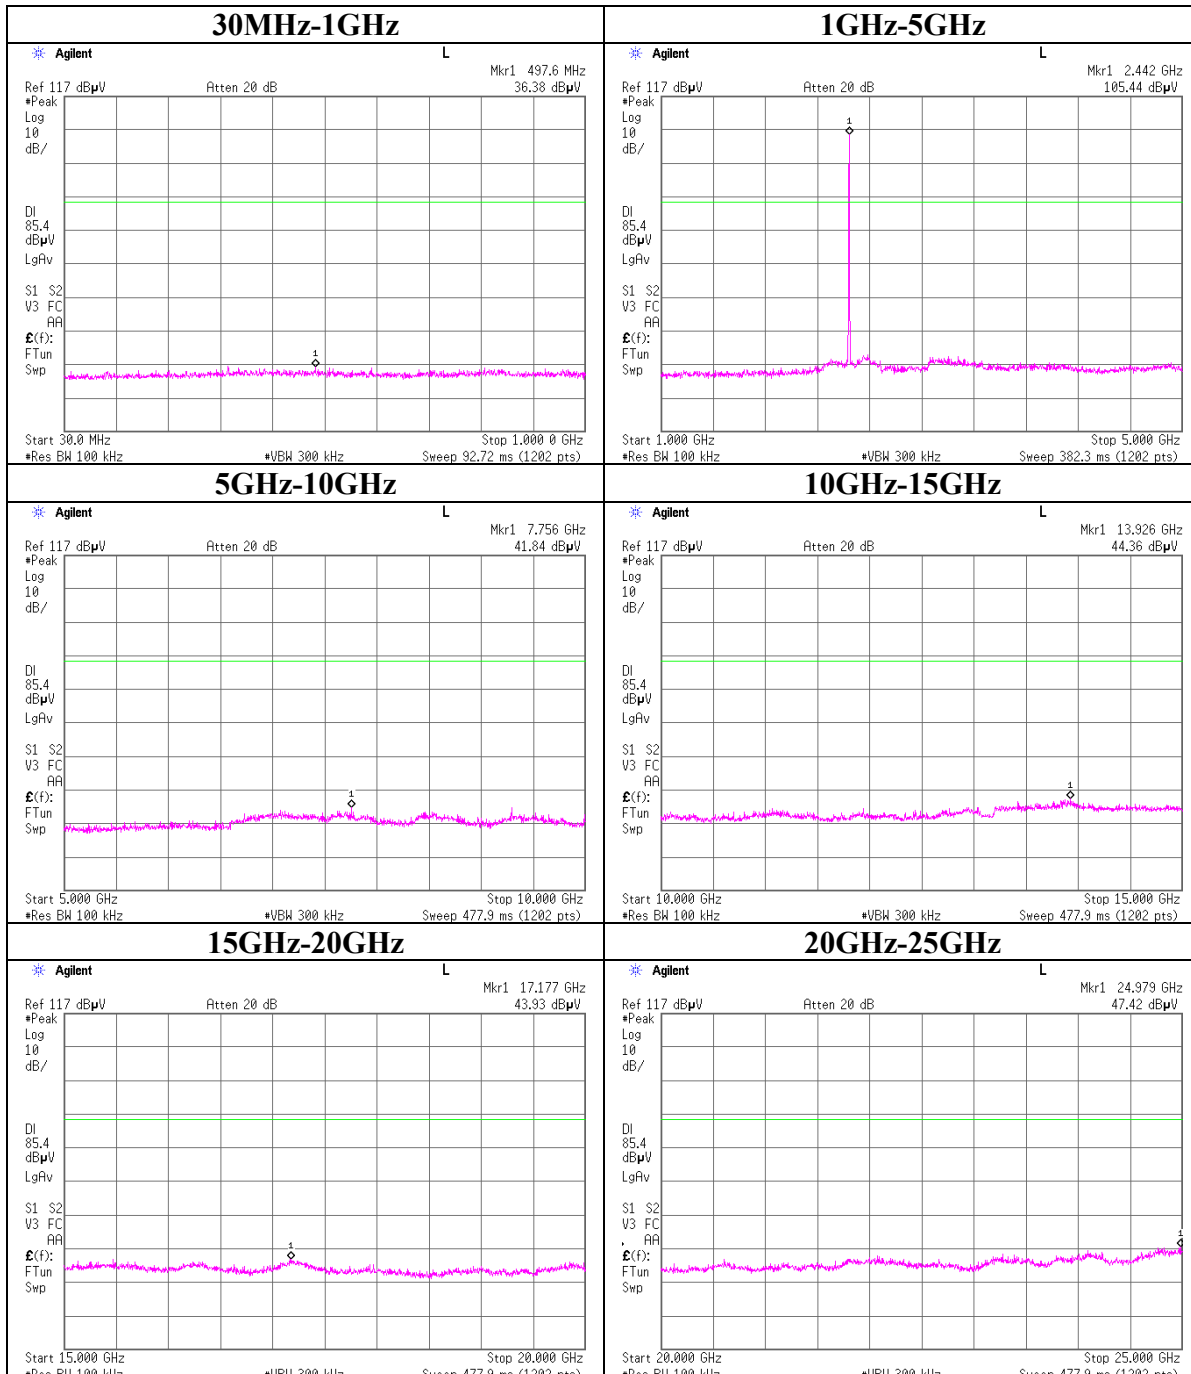


Conducted Spurious Emission
Tx, Ch: High

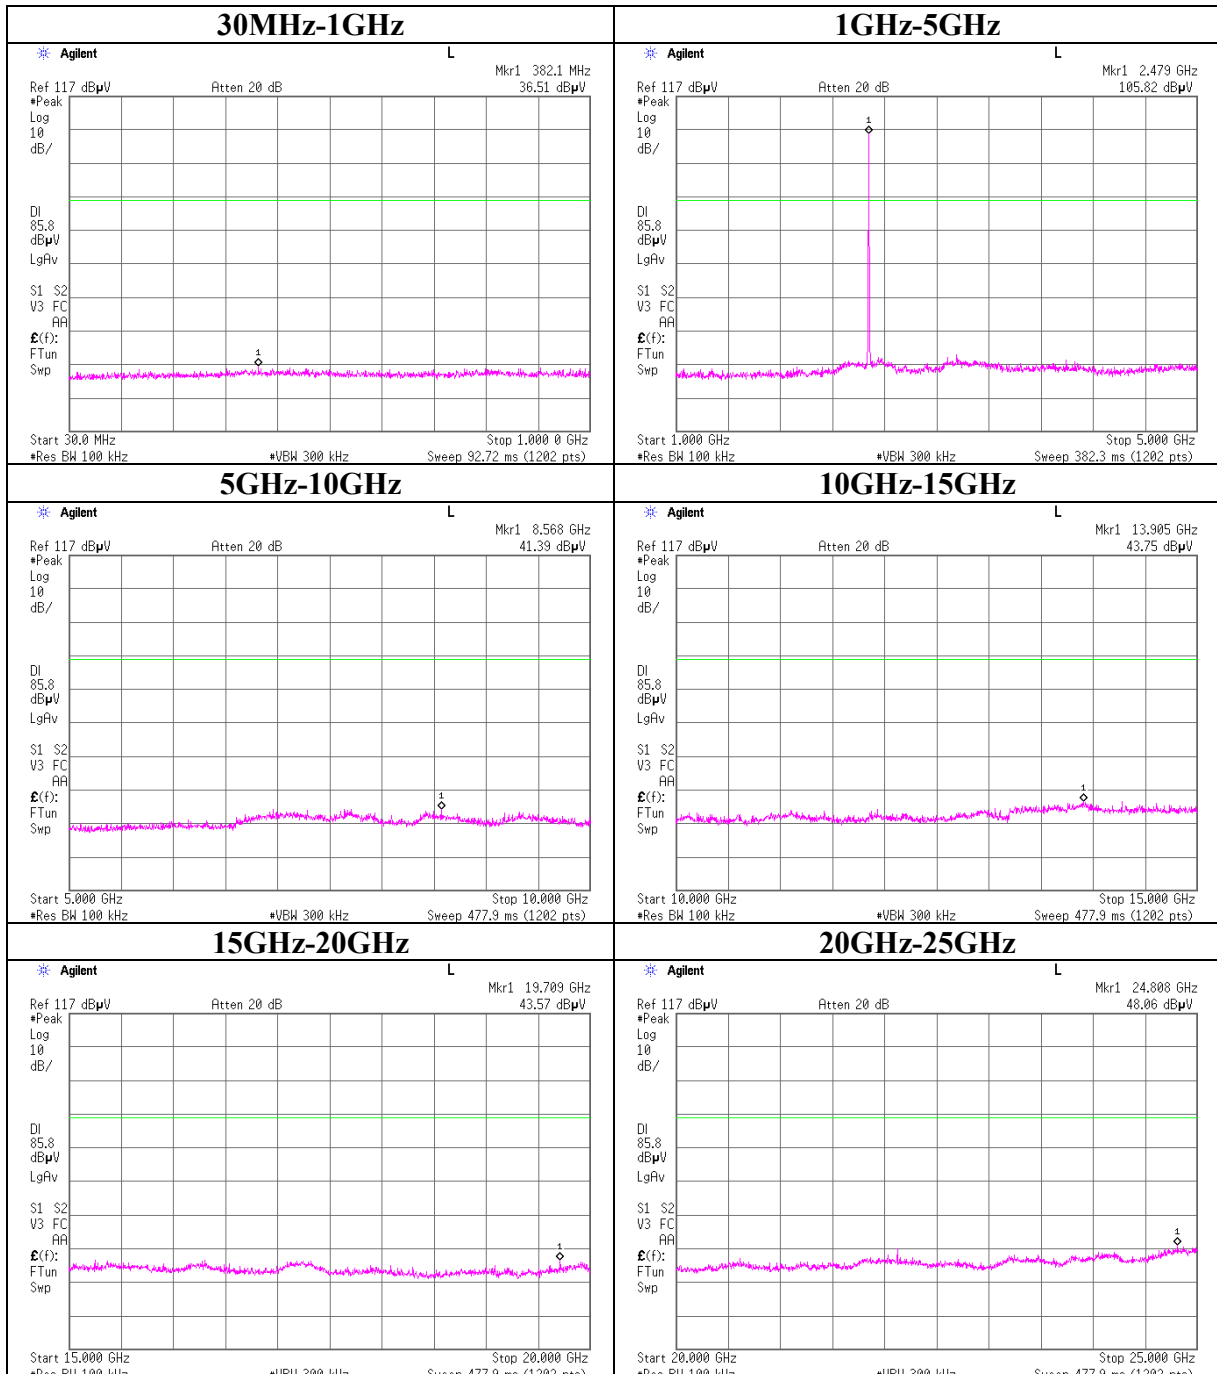

Conducted Spurious Emission
Rx, Ch: Mid

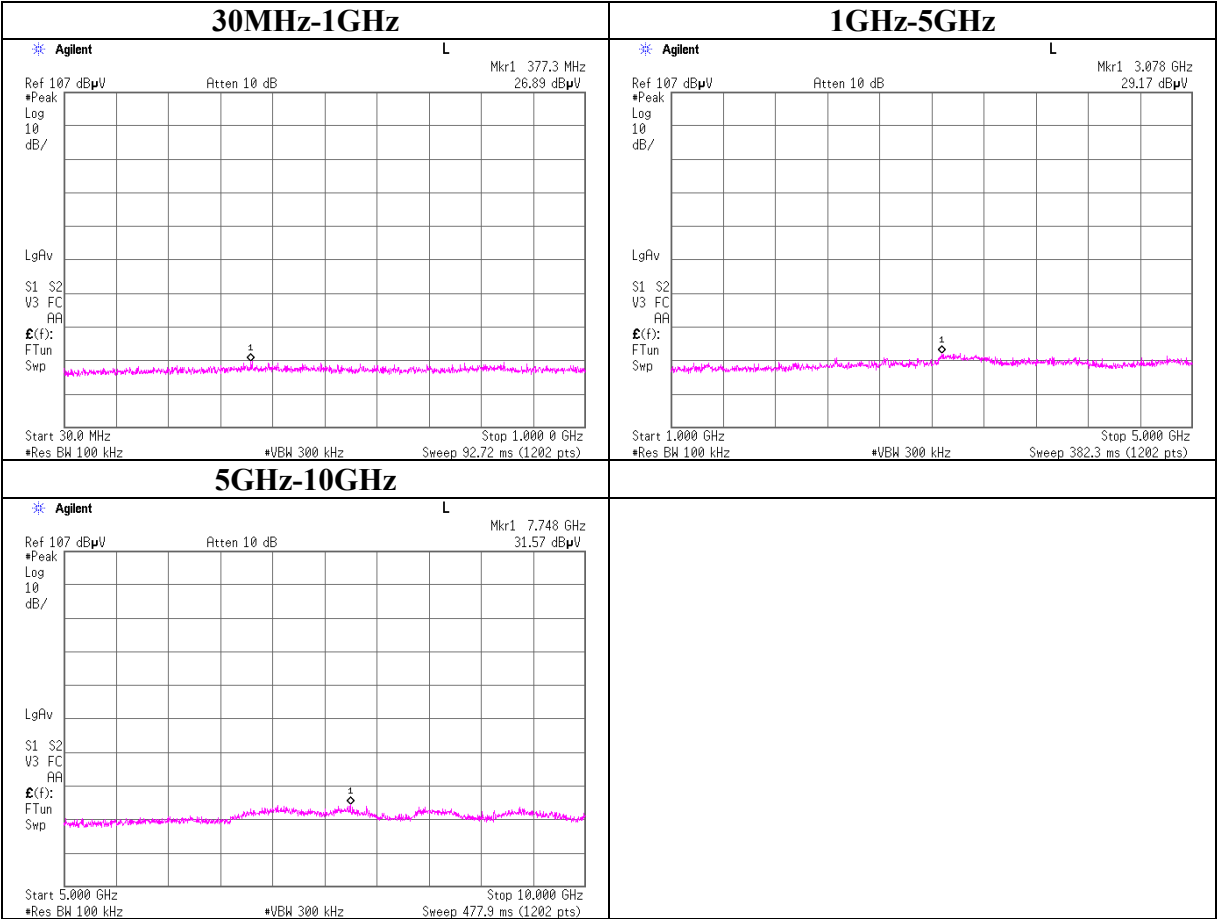

Conducted Spurious Emission
Band Edge Compliance

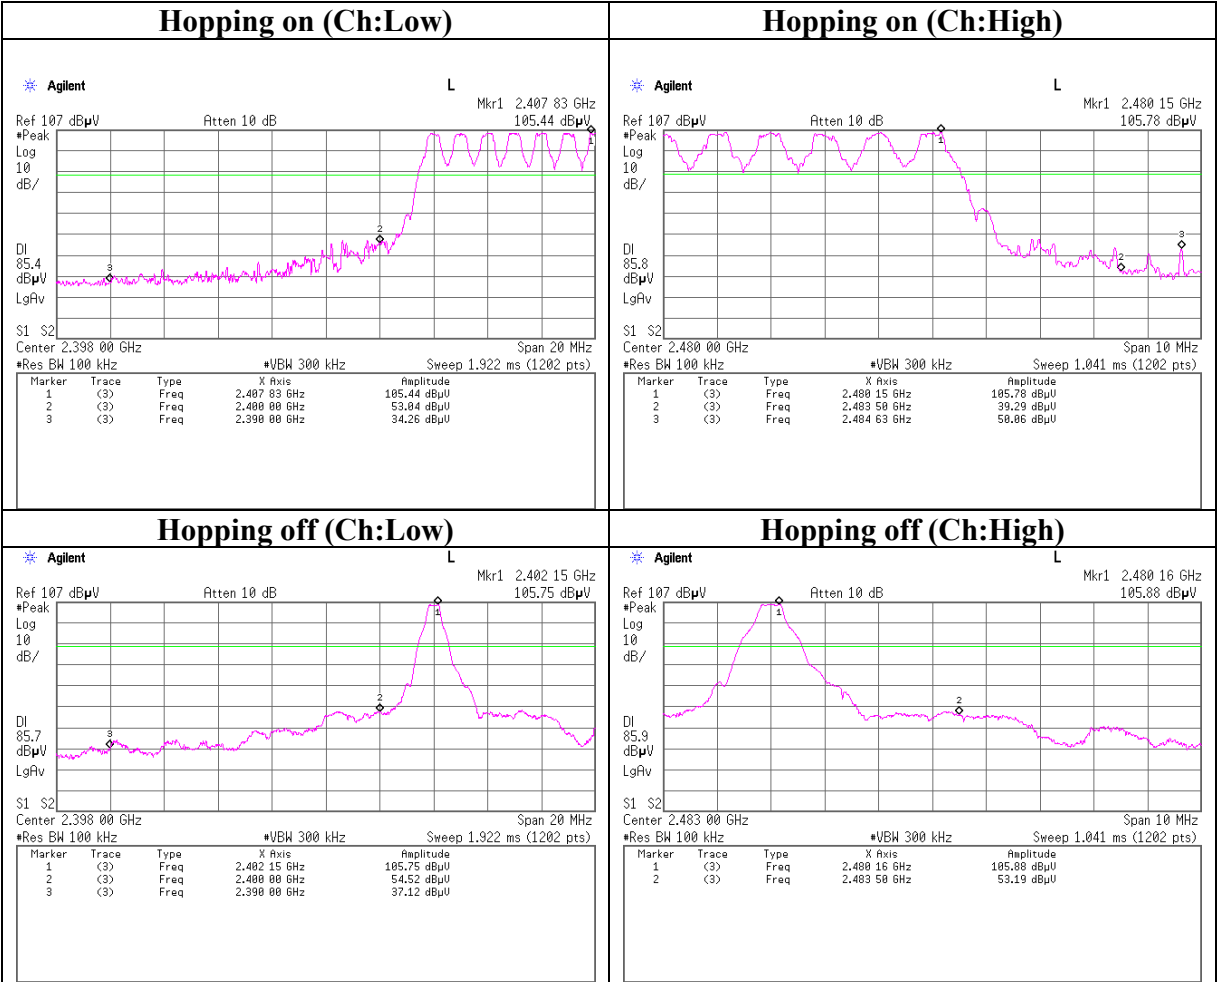

99% Occupied Bandwidth

