

## FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Sony Group Corporation

Sound Bar

HT-S100F

FCC ID: AK8HTS100FV1

SONY

Prepared for : Sony Group Corporation  
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496



Report Number : ACS-F23198  
Date of Test : Oct.23~Nov.06, 2023  
Date of Report : Nov.08, 2023

**TABLE OF CONTENTS**

| <u>Description</u>                                                | <u>Page</u> |
|-------------------------------------------------------------------|-------------|
| <b>1. SUMMARY OF STANDARDS AND RESULTS.....</b>                   | <b>5</b>    |
| 1.1. Description of Standards and Results .....                   | 5           |
| <b>2. GENERAL INFORMATION .....</b>                               | <b>6</b>    |
| 2.1. Description of Equipment Under Test .....                    | 6           |
| 2.2. Feature of Equipment Under Test .....                        | 7           |
| 2.3. Tested Supporting System Details .....                       | 8           |
| 2.4. Block Diagram of connection between EUT and simulators ..... | 8           |
| 2.5. Test information .....                                       | 8           |
| 2.6. Test Facility .....                                          | 10          |
| 2.7. Measurement Uncertainty (95% confidence levels, k=2) .....   | 10          |
| <b>3. POWER LINE CONDUCTED EMISSION TEST .....</b>                | <b>11</b>   |
| 3.1. Test Equipments .....                                        | 11          |
| 3.2. Block Diagram of Test Setup .....                            | 11          |
| 3.3. Power Line Conducted Emission Test Limits .....              | 11          |
| 3.4. Configuration of EUT on Test .....                           | 11          |
| 3.5. Operating Condition of EUT .....                             | 12          |
| 3.6. Test Procedure .....                                         | 12          |
| 3.7. Power Line Conducted Emission Test Results .....             | 12          |
| <b>4. RADIATED EMISSION TEST .....</b>                            | <b>15</b>   |
| 4.1. Test Equipments .....                                        | 15          |
| 4.2. Block Diagram of Test Setup .....                            | 16          |
| 4.3. Radiated Emission Limits Standard: .....                     | 17          |
| 4.4. EUT Configuration on Test .....                              | 17          |
| 4.5. Operating Condition of EUT .....                             | 17          |
| 4.6. Test Procedure .....                                         | 18          |
| 4.7. Radiated Emission Test Results .....                         | 18          |
| <b>5. CONDUCTED SPURIOUS EMISSIONS.....</b>                       | <b>46</b>   |
| 5.1. Test Equipments .....                                        | 46          |
| 5.2. Block Diagram of Test Setup .....                            | 46          |
| 5.3. Limit .....                                                  | 46          |
| 5.4. Test Procedure .....                                         | 46          |
| 5.5. Test result .....                                            | 46          |
| <b>6. 20 DB &amp; 99% BANDWIDTH TEST .....</b>                    | <b>53</b>   |
| 6.1. Test Equipments .....                                        | 53          |
| 6.2. Limit .....                                                  | 53          |
| 6.3. Test Procedure .....                                         | 53          |
| 6.4. Test Results .....                                           | 54          |
| <b>7. CARRIER FREQUENCY SEPARATION TEST.....</b>                  | <b>56</b>   |
| 7.1. Test Equipments .....                                        | 56          |
| 7.2. Limit .....                                                  | 56          |
| 7.3. Test Procedure .....                                         | 56          |
| 7.4. Test Results .....                                           | 56          |
| <b>8. NUMBER OF HOPPING FREQUENCY TEST.....</b>                   | <b>57</b>   |
| 8.1. Test Equipments .....                                        | 57          |
| 8.2. Limit .....                                                  | 57          |
| 8.3. Test Procedure .....                                         | 57          |
| 8.4. Test Results .....                                           | 57          |

|            |                                              |           |
|------------|----------------------------------------------|-----------|
| <b>9.</b>  | <b>DWELL TIME .....</b>                      | <b>58</b> |
| 9.1.       | Test Equipments.....                         | 58        |
| 9.2.       | Limit.....                                   | 58        |
| 9.3.       | Test Procedure.....                          | 58        |
| 9.4.       | Test Results .....                           | 58        |
| <b>10.</b> | <b>MAXIMUM PEAK OUTPUT POWER TEST .....</b>  | <b>61</b> |
| 10.1.      | Test Equipments.....                         | 61        |
| 10.2.      | Limit.....                                   | 61        |
| 10.3.      | Test Procedure.....                          | 61        |
| 10.4.      | Test Results .....                           | 61        |
| <b>11.</b> | <b>BAND EDGE COMPLIANCE TEST .....</b>       | <b>63</b> |
| 11.1.      | Test Equipments.....                         | 63        |
| 11.2.      | Limit.....                                   | 63        |
| 11.3.      | Test Produce .....                           | 63        |
| 11.4.      | Test Results .....                           | 64        |
| <b>12.</b> | <b>ANTENNA REQUIREMENT.....</b>              | <b>73</b> |
| 12.1.      | Standard Applicable.....                     | 73        |
| 12.2.      | Antenna Connected Construction .....         | 73        |
| <b>13.</b> | <b>DEVIATION TO TEST SPECIFICATIONS.....</b> | <b>74</b> |

Appendix A. Setup Photographs

Appendix B. General Appearance of the EUT

Appendix C. Inside Configuration of the EUT

**TEST REPORT**

Applicant : Sony Group Corporation  
Manufacturer : Sony Group Corporation  
Product : Sound Bar  
FCC ID : AK8HTS100FV1  
(A) Model No. : HT-S100F  
(B) Brand : SONY  
(C) Test Voltage : AC 120V/60Hz

Tested for comply with:  
FCC CFR47 Part 15 Subpart C

Test procedure used:  
ANSI C63.10: 2020

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd..

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Date of Test : Oct.23~Nov.06, 2023 Report of date: Nov.08, 2023

Prepared by : Jasmine Ning Reviewed by : Thomas Chen  
Jasmine Ning / Assistant Thomas Chen / Assistant Manager



Approved & Authorized Signer : Signature: Sunny Lu  
Sunny Lu / Manager

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

| EMISSION                                                                                                                          |                                                                                        |         |
|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|---------|
| Description of Test Item                                                                                                          | Standard                                                                               | Results |
| Power Line Conducted Emission Test                                                                                                | FCC Part 15: 15.207<br>ANSI C63.10: 2020                                               | PASS    |
| Radiated Emission Test                                                                                                            | FCC Part 15 15.209<br>FCC Part 15 15.205<br>FCC Part 15 15.247(d)<br>ANSI C63.10: 2020 | PASS    |
| Conducted Spurious Emissions                                                                                                      | FCC Part 15: 15.247(d)<br>ANSI C63.10 2020                                             | PASS    |
| Carrier Frequency Separation Test                                                                                                 | FCC Part 15: 15.247(a)(1)<br>ANSI C63.10: 2020                                         | PASS    |
| 20dB & 99% Bandwidth Test                                                                                                         | FCC Part 15: 15.215(c)<br>ANSI C63.10: 2020                                            | PASS    |
| Number Of Hopping Frequency Test                                                                                                  | FCC Part 15: 15.247(a)(1)(iii)<br>ANSI C63.10: 2020                                    | PASS    |
| Dwell Time Test                                                                                                                   | FCC Part 15: 15.247(a)(1)(iii)<br>ANSI C63.10: 2020                                    | PASS    |
| Maximum Peak Output Power Test                                                                                                    | FCC Part 15 15.247(b)(1)<br>ANSI C63.10: 2020                                          | PASS    |
| Band Edge Compliance Test                                                                                                         | FCC Part 15 15.247(d)<br>ANSI C63.10: 2020                                             | PASS    |
| Antenna requirement                                                                                                               | FCC Part 15: 15.203                                                                    | PASS    |
| Note: Measurement uncertainty affection to the result is considered, the EUT is technically compliant with standard requirements. |                                                                                        |         |

## 2. GENERAL INFORMATION

### 2.1. Description of Equipment Under Test

|                                       |                                             |
|---------------------------------------|---------------------------------------------|
| Applicant                             | Sony Group Corporation                      |
| Applicant Address                     | 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan |
| Manufacturer                          | Sony Group Corporation                      |
| Manufacturer Address                  | 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan |
| Product                               | Sound Bar                                   |
| Model No.                             | HT-S100F                                    |
| FCC ID                                | AK8HTS100FV1                                |
| Brand                                 | SONY                                        |
| Remote Controller                     | Manufacturer: Sony; M/N: RMT-AH411U         |
| Optical In Cable                      | Unshielded, Detectable, 1.0m                |
| Power Cable                           | Unshielded, Detectable, 1.5m(2 pins)        |
| Sample Type                           | Prototype production                        |
| Date of Receipt                       | Oct.08, 2023                                |
| Date of Test                          | Oct.23~Nov.06, 2023                         |
| Remark: This report only for BDR+EDR. |                                             |

**2.2. Feature of Equipment Under Test**


| <b>Product Feature &amp; Specification</b> |                                                      |              |
|--------------------------------------------|------------------------------------------------------|--------------|
| Product                                    | Sound Bar                                            |              |
| Model No.                                  | HT-S100F                                             |              |
| Radio                                      | BDR +EDR                                             |              |
| Power Source                               | <input checked="" type="checkbox"/> Commercial Power | AC 120V/60Hz |
|                                            | <input type="checkbox"/> External Power Source       | DC V         |
|                                            | <input type="checkbox"/> Lithium battery             | DC V         |
|                                            | <input type="checkbox"/> UM battery                  | DC V         |
| <b>Bluetooth</b>                           |                                                      |              |
| Radio                                      | BDR +EDR                                             |              |
| Frequency Range                            | 2402-2480MHz                                         |              |
| Type of Modulation                         | GFSK, $\pi/4$ DQPSK, 8DPSK                           |              |
| Data Rate                                  | 1Mbps, 2Mbps, 3Mbps                                  |              |
| Quantity of Channels                       | 79                                                   |              |
| Channel Separation                         | 1MHz                                                 |              |

| <b>Antenna System</b> |             |
|-----------------------|-------------|
| Type of Antenna       | IFA Antenna |
| Antenna Peak Gain     | 2.36dBi     |

### 2.3. Tested Supporting System Details

| No. | Description | ACS No.                                                                                                                                                               | Manufacturer | Model | Serial Number |
|-----|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|---------------|
| 1.  | Notebook    | N/A                                                                                                                                                                   | ACER         | ZOW   | N/A           |
|     |             | Power Cord(3C): Unshielded, Detachable, 1.8m<br>Power Adaptor: Manufacturer: Lite-On, M/N: PA-1900-32<br>Cable: Unshielded, Undetectable, 4.0m(Bond one ferrite core) |              |       |               |

### 2.4. Block Diagram of connection between EUT and simulators



(EUT: Sound Bar)

### 2.5. Test information

A special software (BT FCC Tool) was used to control EUT work in TX mode

| Tested mode, Packet Type, peak output power information |             |                            |                            |
|---------------------------------------------------------|-------------|----------------------------|----------------------------|
| Mode                                                    | Packet Type | Output power(dBm)<br>P max | Output Power(dBm)<br>P low |
| GFSK                                                    | DH1         | 3.804                      | 3.491                      |
|                                                         | DH3         |                            |                            |
|                                                         | DH5         |                            |                            |
| 8DPSK                                                   | 3-DH1       | 4.916                      | 4.671                      |
|                                                         | 3-DH3       |                            |                            |
|                                                         | 3-DH5       |                            |                            |

Note:  $\pi/4$ DQPSK mode has been verified to have the lowest power, so the final test were performed with GFSK and 8DPSK mode, the worse-case packet type were:

GFSK Mode: DH5

8DPSK Mode: 3DH5

| Item                |                              | Modulation | Data Rate | Test Channel |
|---------------------|------------------------------|------------|-----------|--------------|
| Radiated Test Case  | Radiated Band Edge           | GFSK       | 1Mbps     | 00/78        |
|                     |                              | 8-DPSK     | 3Mbps     | 00/78        |
|                     | Radiated Spurious Emission   | GFSK       | 1Mbps     | 00/39/78     |
|                     |                              | 8-DPSK     | 3Mbps     | 00/39/78     |
| Conducted Test Case | 20dB Bandwidth               | GFSK       | 1Mbps     | 00/39/78     |
|                     |                              | 8-DPSK     | 3Mbps     | 00/39/78     |
|                     | Carrier Frequency Separation | GFSK       | 1Mbps     | Hopping      |
|                     |                              | 8-DPSK     | 3Mbps     | Hopping      |
|                     | Time of Occupancy            | GFSK       | 1Mbps     | Hopping      |
|                     |                              | 8-DPSK     | 3Mbps     | Hopping      |
|                     | Number of Hopping Channels   | GFSK       | 1Mbps     | Hopping      |
|                     |                              | 8-DPSK     | 3Mbps     | Hopping      |
|                     | Maximum Peak Output Power    | GFSK       | 1Mbps     | 00/39/78     |
|                     |                              | 8-DPSK     | 3Mbps     | 00/39/78     |
|                     | Band Edges                   | GFSK       | 1Mbps     | 00/78        |
|                     |                              | 8-DPSK     | 3Mbps     | 00/78        |
|                     | Spurious Emission            | GFSK       | 1Mbps     | 00/39/78     |
|                     |                              | 8-DPSK     | 3Mbps     | 00/39/78     |

## 2.6. Test Facility

Site Description

Name of Firm

: Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

: Certificated by ISED, Canada  
Company Number: 5183A  
CAB identifier: CN0034  
Valid Date: Mar.31, 2024

Certificated by FCC, USA  
Designation No.: CN5022  
Valid Date: Mar.31, 2024

Accredited by NVLAP, USA  
NVLAP Code: 200372-0  
Valid Date: Mar.31, 2024

## 2.7. Measurement Uncertainty (95% confidence levels, k=2)

| Test Item                                                            | Uncertainty                                     |
|----------------------------------------------------------------------|-------------------------------------------------|
| Uncertainty for Conduction emission test<br>in No. 1 Conduction      | $\pm 2.6\text{dB}$ (150KHz to 30MHz)            |
| Uncertainty for Radiation Emission test<br>in 3m chamber             | $\pm 3.8\text{dB}$ (30~200MHz, Polarization: H) |
|                                                                      | $\pm 3.8\text{dB}$ (30~200MHz, Polarization: V) |
|                                                                      | $\pm 4.0\text{dB}$ (200M~1GHz, Polarization: H) |
|                                                                      | $\pm 4.0\text{dB}$ (200M~1GHz, Polarization: V) |
| Uncertainty for Radiation Emission test<br>in 3m chamber(1GHz-18GHz) | $\pm 4.0\text{dB}$ (1~6GHz, Distance: 3m)       |
|                                                                      | $\pm 4.0\text{dB}$ (6~18GHz, Distance: 3m)      |
| Uncertainty for Radiated Spurious<br>Emission test in RF chamber     | $\pm 3.7\text{dB}$ (30MHz~1000MHz)              |
|                                                                      | $\pm 3.3\text{dB}$ (1~26.5GHz)                  |
| Uncertainty for Conduction Spurious<br>emission test                 | $\pm 2.0\text{dB}$                              |
| Uncertainty for Output power test                                    | $\pm 0.8\text{dB}$                              |
| Uncertainty for Bandwidth test                                       | $\pm 4.6\%$                                     |
| Uncertainty for test site temperature and<br>humidity                | $\pm 0.6^{\circ}\text{C}$                       |
|                                                                      | $\pm 3\%$                                       |


### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Test Equipments

| Item | Equipment         | Manufacturer    | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|-----------------|-----------|------------|-----------|---------------|
| 1.   | 1# Shielding Room | AUDIX           | N/A       | N/A        | Nov.09,22 | 3 Year        |
| 2.   | EMI Test Receiver | Rohde & Schwarz | ESCI      | 100842     | Apr.01,23 | 1 Year        |
| 3.   | L.I.S.N.#1        | Rohde & Schwarz | ENV216    | 102160     | Jun.25,23 | 1 Year        |
| 4.   | RF Cable          | Eastsheep       | RG223     | 190424     | Sep.15,23 | 1Year         |
| 5.   | Test Software     | AUDIX           | e3        | 6.100913a  | N/A       | N/A           |

Note: N/A means Not applicable.

#### 3.2. Block Diagram of Test Setup

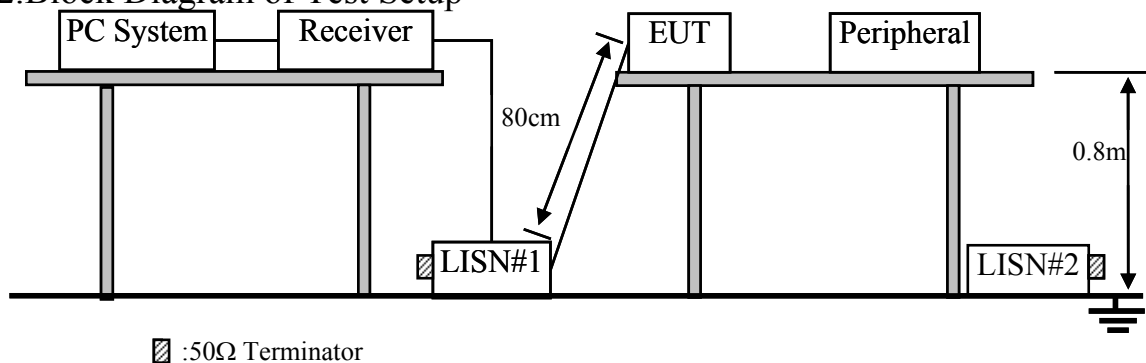

#### 3.3. Power Line Conducted Emission Test Limits

| Frequency       | Maximum RF Line Voltage    |                         |
|-----------------|----------------------------|-------------------------|
|                 | Quasi-Peak Level<br>dB(μV) | Average Level<br>dB(μV) |
| 150kHz ~ 500kHz | 66 ~ 56*                   | 56 ~ 46*                |
| 500kHz ~ 5MHz   | 56                         | 46                      |
| 5MHz ~ 30MHz    | 60                         | 50                      |

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limits shall apply at the transition frequencies.

3. Emission Level (dBμV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB)+Reading (Receiver) (dBμV)

#### 3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

##### 3.4.1. Sound Bar (EUT)

Model No. : HT-S100F

Serial No. : N/A

##### 3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

### 3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown as Section 3.2.
- 3.5.2. Turn on the power of EUT.
- 3.5.3. PC run test software to control EUT work in Tx mode.

### 3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.7. Power Line Conducted Emission Test Results


**PASS.** (All emissions not reported below are too low against the prescribed limits.)

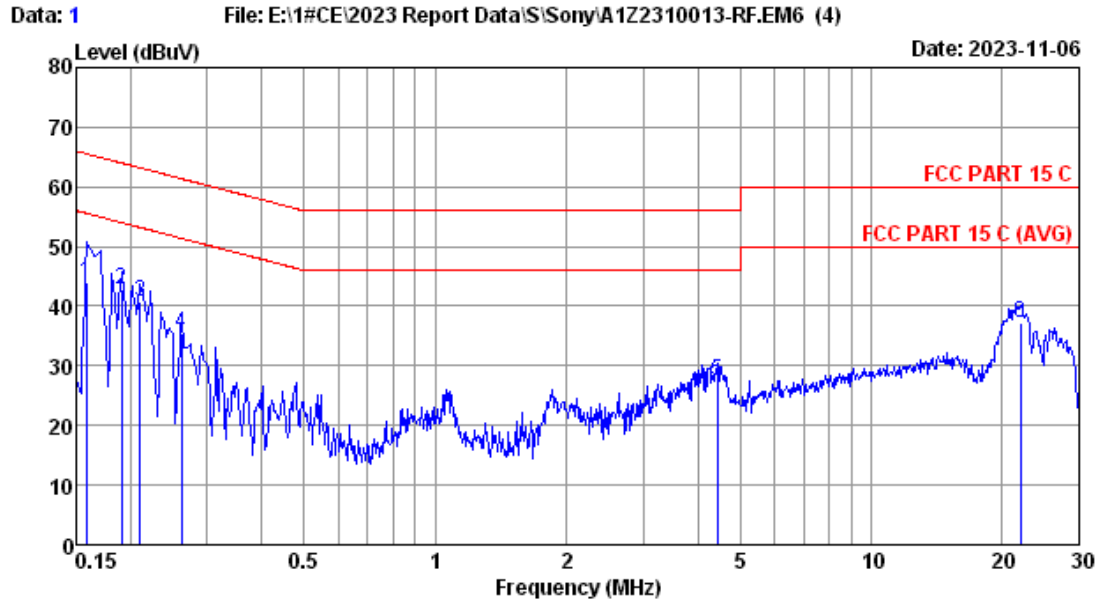

Site no :1# CE Data No :1  
 Dis./Lisn :2023 ENV216-L  
 Limit :FCC PART 15 C  
 Env./Ins. :24.4C/52% Engineer :Hongjie  
 Power Rating :AC 120V/60Hz  
 Test Mode :BT3.0 TX Mode

| No | Freq<br>(MHz) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV) | Limits<br>(dBuV) | Margin<br>(dB) | Remark |
|----|---------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|--------|
| 1  | 0.158         | 9.62                   | 0.01                  | 34.40             | 44.03                       | 65.57            | 21.54          | QP     |
| 2  | 0.190         | 9.62                   | 0.01                  | 33.27             | 42.90                       | 64.02            | 21.12          | QP     |
| 3  | 0.211         | 9.62                   | 0.01                  | 31.11             | 40.74                       | 63.18            | 22.44          | QP     |
| 4  | 0.262         | 9.61                   | 0.01                  | 25.92             | 35.54                       | 61.38            | 25.84          | QP     |
| 5  | 4.430         | 9.79                   | 0.06                  | 17.62             | 27.47                       | 56.00            | 28.53          | QP     |
| 6  | 22.063        | 9.96                   | 0.13                  | 26.99             | 37.08                       | 60.00            | 22.92          | QP     |

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector.  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

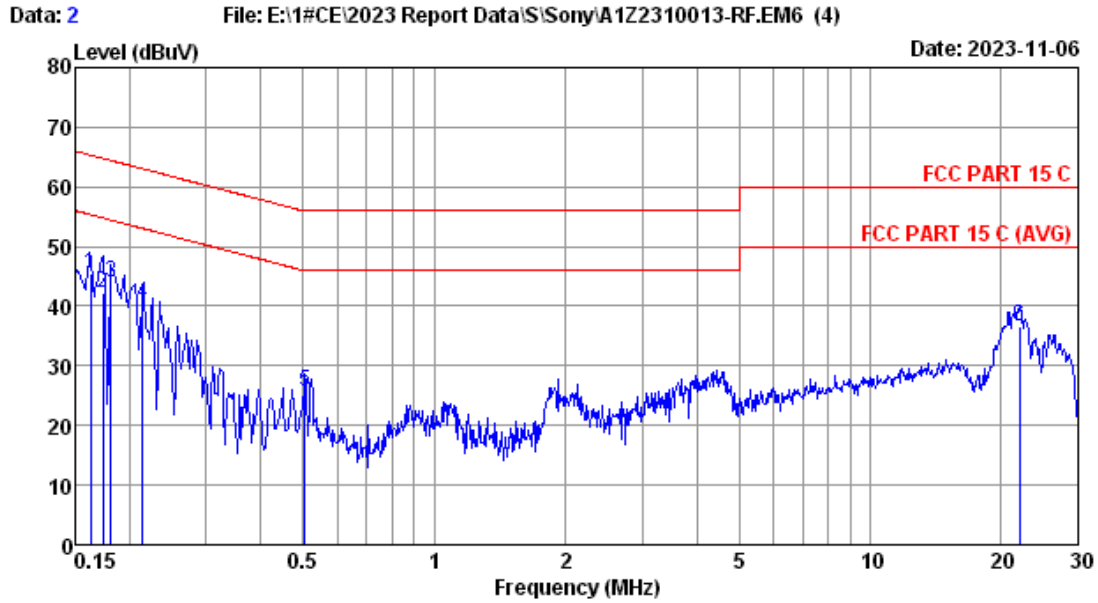

Site no :1# CE Data No :2  
 Dis./Lisn :2023 ENV216-N  
 Limit :FCC PART 15 C  
 Env./Ins. :24.4C/52% Engineer :Hongjie  
 Power Rating :AC 120V/60Hz  
 Test Mode :BT3.0 TX Mode

| No | Freq<br>(MHz) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV) | Limits<br>(dBuV) | Margin<br>(dB) | Remark |
|----|---------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|--------|
| 1  | 0.162         | 9.69                   | 0.01                  | 35.78             | 45.48                       | 65.34            | 19.86          | QP     |
| 2  | 0.174         | 9.69                   | 0.01                  | 32.50             | 42.20                       | 64.77            | 22.57          | QP     |
| 3  | 0.182         | 9.70                   | 0.01                  | 34.22             | 43.93                       | 64.42            | 20.49          | QP     |
| 4  | 0.214         | 9.70                   | 0.01                  | 30.75             | 40.46                       | 63.05            | 22.59          | QP     |
| 5  | 0.505         | 9.73                   | 0.02                  | 16.00             | 25.75                       | 56.00            | 30.25          | QP     |
| 6  | 22.063        | 8.69                   | 0.13                  | 27.92             | 36.74                       | 60.00            | 23.26          | QP     |

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector.  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipments

Frequency range: 30~1000MHz

| Item | Equipment                 | Manufacturer    | Model No.   | Serial No.  | Last Cal. | Cal. Interval |
|------|---------------------------|-----------------|-------------|-------------|-----------|---------------|
| 1.   | 3m Chamber(NSA)           | AUDIX           | N/A         | N/A         | Aug.11,22 | 3 Year        |
| 2.   | 3m Chamber(SE)            | AUDIX           | N/A         | N/A         | Sep.16,22 | 3 Year        |
| 3.   | Signal Analyzer           | Rohde & Schwarz | FSV30       | 104050      | Apr.01,23 | 1 Year        |
| 4.   | Tri-log-Broadband Antenna | SCHWARZBECK     | VULB 9168   | 429         | Oct.10,23 | 1 Year        |
| 5.   | NSA Cable                 | HUBER+SUHNER    | CFD400NL-LW | No.3+190411 | Sep.20,23 | 1 Year        |
| 6.   | Coaxial Switch            | Anritsu         | MP59B       | 6201397223  | Apr.02,23 | 1 Year        |
| 7.   | EMI Test Receiver         | Rohde & Schwarz | ESR3        | 101931      | Apr.01,23 | 1 Year        |
| 8.   | Broadband Amplifier       | SCHWARZBECK     | BBV9744     | 00259       | Jun.25,23 | 1 Year        |
| 9.   | Test Software             | AUDIX           | e3          | 6.100913a   | N/A       | N/A           |

Note: N/A means Not applicable.


Frequency range: above 1000MHz

| Item | Equipment        | Manufacturer    | Model No.              | Serial No.  | Last Cal. | Cal. Interval |
|------|------------------|-----------------|------------------------|-------------|-----------|---------------|
| 1.   | 3mChamber(Svswr) | AUDIX           | N/A                    | N/A         | Aug.09,22 | 3 Year        |
| 2.   | 3mChamber(SE)    | AUDIX           | N/A                    | N/A         | Sep.16,22 | 3 Year        |
| 3.   | Signal Analyzer  | Rohde & Schwarz | FSV30                  | 104050      | Apr.01,23 | 1 Year        |
| 4.   | Amplifier        | Agilent         | 83017A                 | MY53270084  | Sep.20,23 | 1 Year        |
| 5.   | RF Cable         | EMCI            | EMC104-SM-S<br>M-15000 | 190407      | Jun.25,23 | 1 Year        |
| 6.   | Test Software    | AUDIX           | e3                     | 6.100913a   | N/A       | N/A           |
| 7.   | Horn Antenna     | ETC             | MCTD 1209              | DRH15F03006 | Aug.23,23 | 1 Year        |


Note: N/A means Not applicable.

## 4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

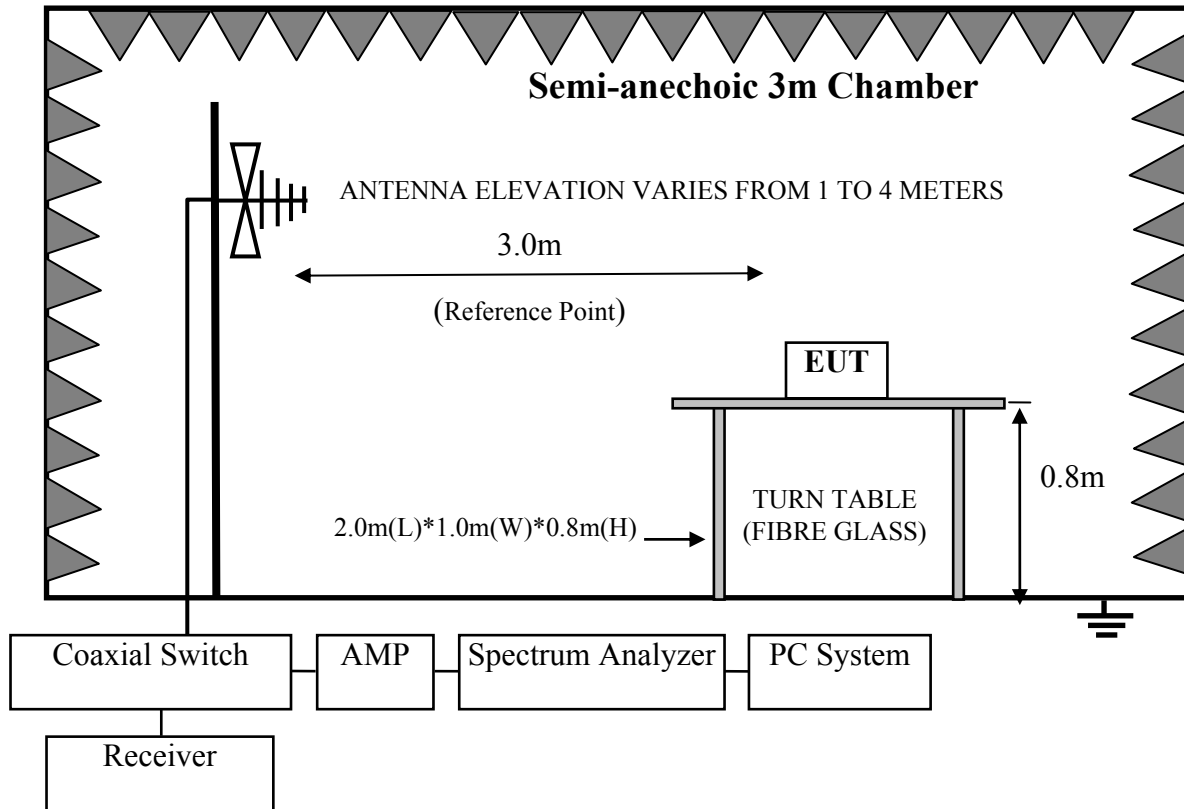

For frequency range above 1GHz

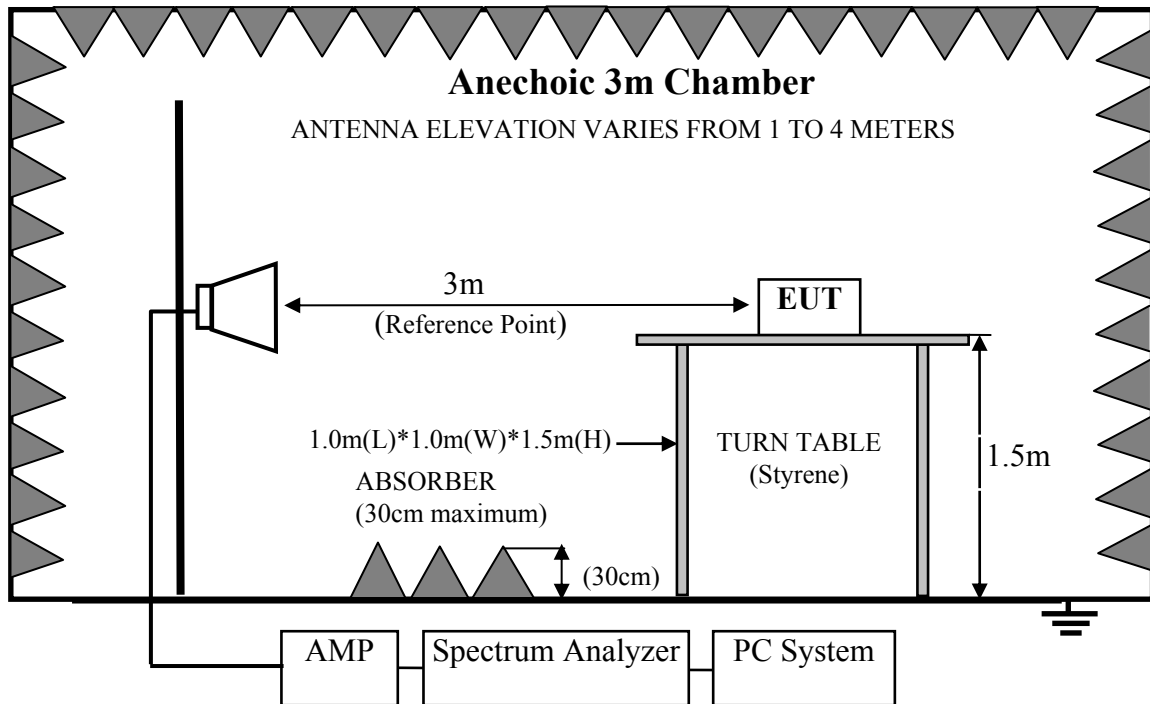

#### 4.3. Radiated Emission Limits Standard:

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT                                                                             |                                   |
|------------------|--------------------|---------------------------------------------------------------------------------------------------|-----------------------------------|
|                  |                    | $\mu\text{V/m}$                                                                                   | $\text{dB}(\mu\text{V})/\text{m}$ |
| 30 ~ 88          | 3                  | 100                                                                                               | 40.0                              |
| 88 ~ 216         | 3                  | 150                                                                                               | 43.5                              |
| 216 ~ 960        | 3                  | 200                                                                                               | 46.0                              |
| 960 ~ 1000       | 3                  | 500                                                                                               | 54.0                              |
| Above 1000MHz    | 3                  | 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak)<br>54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) |                                   |

- Remark :
- (1) Emission Level ( $\text{dB}\mu\text{V}/\text{m}$ ) = Reading (Receiver) ( $\text{dB}\mu\text{V}$ ) + Antenna Factor ( $\text{dB}/\text{m}$ ) + Cable Loss ( $\text{dB}$ )  
Emission Level ( $\text{dB}\mu\text{V}/\text{m}$ ) = Reading (Spectrum) ( $\text{dB}\mu\text{V}$ ) + Antenna Factor ( $\text{dB}/\text{m}$ ) – Amp Factor ( $\text{dB}$ ) + Cable Loss ( $\text{dB}$ )(above 1000MHz)
  - (2) The smaller limits shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
  - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

#### 4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

##### 4.4.1. Sound Bar (EUT)

Model Number : HT-S100F  
Serial Number : N/A

#### 4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx mode.

#### 4.6. Test Procedure

##### **Frequency below 30MHz:**

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

##### **Frequency Above 30MHz:**

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)\*2.4m(W)\*0.3m(H) on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10 on radiated emission Test

The bandwidth of the EMI test receiver (R&S ESR3) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

#### 4.7. Radiated Emission Test Results

##### **PASS.**



All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note 1: The duty cycle factor for calculate average level is -16.712dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.


Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Duty cycle factor =  $20\log(\text{Dwell time}/100\text{ms}) = -16.712\text{dB}$

Dwell Time =  $2.920 \times 5\text{ms}$

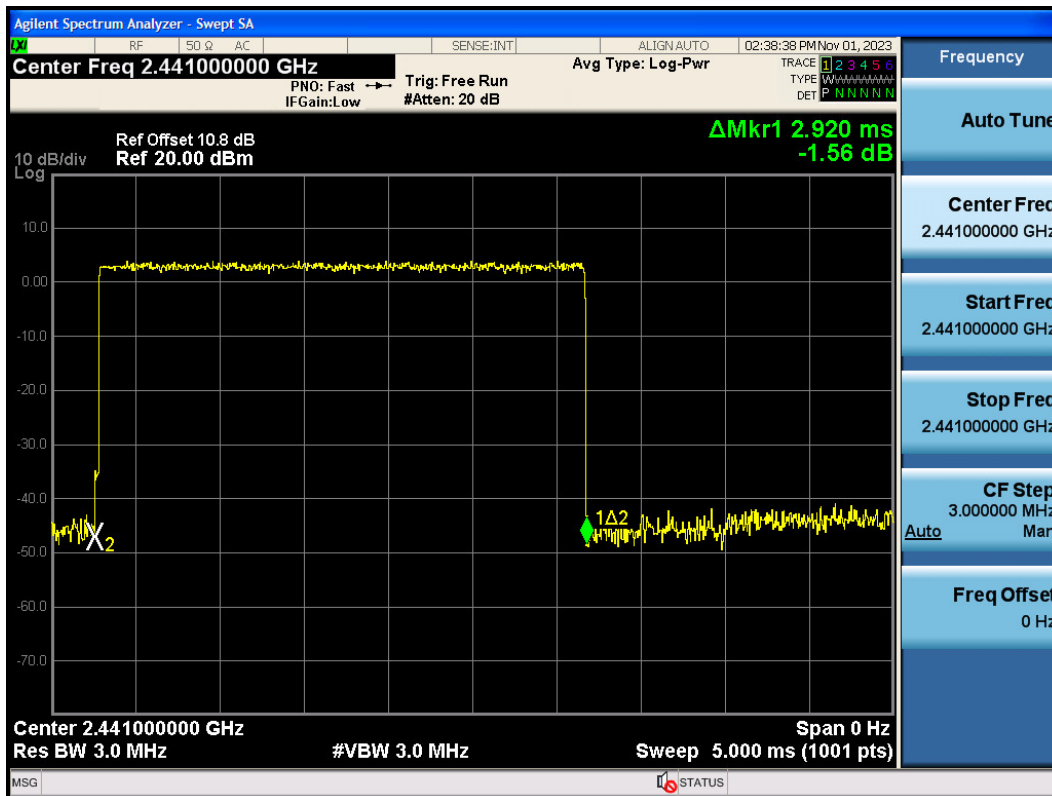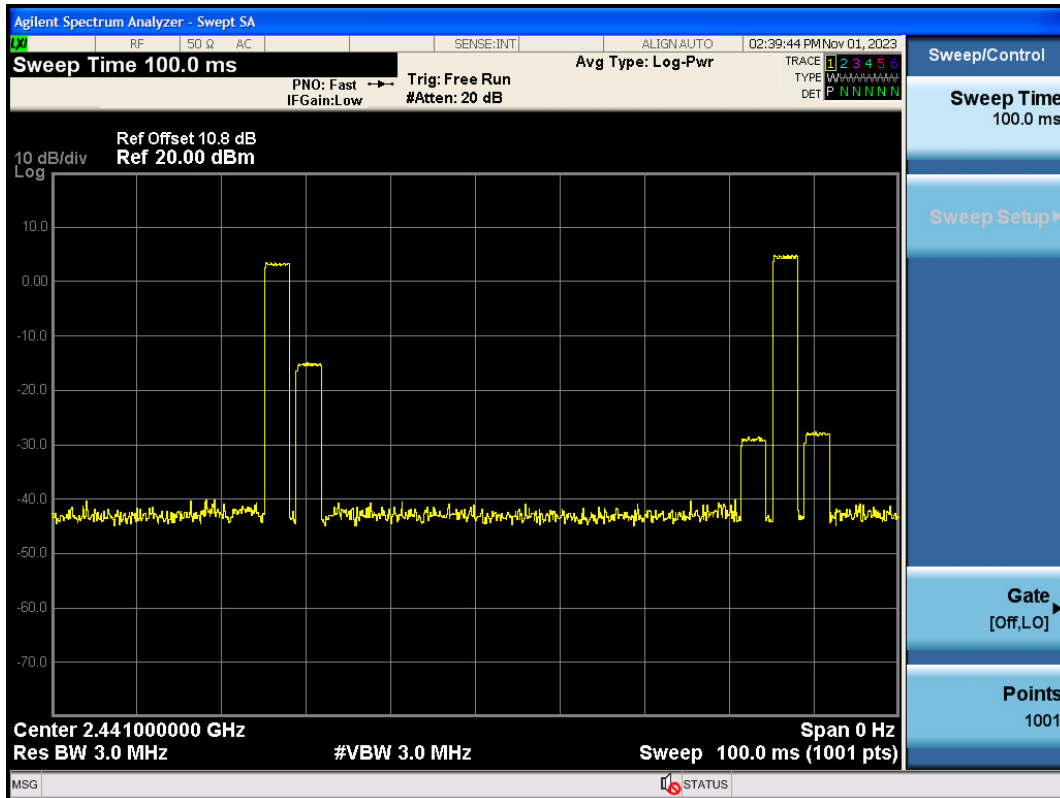


# Frequency: 30MHz~1GHz

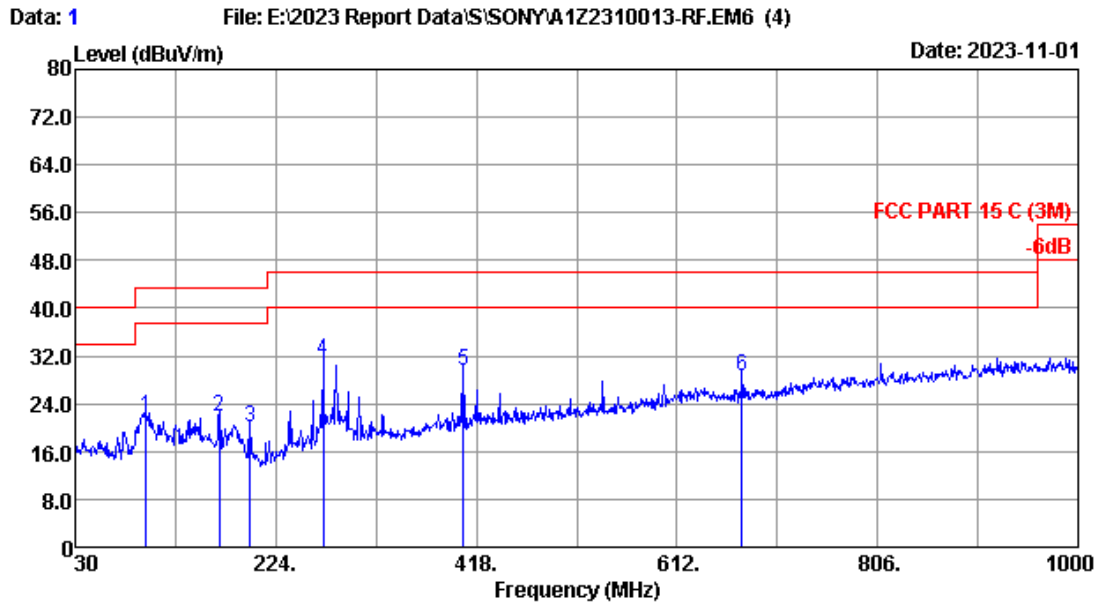

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 2023 VULB 9168-429 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24.2°C/54% Engineer : Abel  
 Test Mode : BT 3.0

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 98.870         | 15.07                    | 0.87                  | 5.91              | 21.85                         | 43.50              | 21.65          | QP     |
| 2   | 169.680        | 18.73                    | 1.07                  | 2.12              | 21.92                         | 43.50              | 21.58          | QP     |
| 3   | 198.780        | 16.12                    | 1.16                  | 2.87              | 20.15                         | 43.50              | 23.35          | QP     |
| 4   | 269.590        | 18.58                    | 1.36                  | 11.43             | 31.37                         | 46.00              | 14.63          | QP     |
| 5   | 405.390        | 21.72                    | 1.64                  | 6.23              | 29.59                         | 46.00              | 16.41          | QP     |
| 6   | 675.050        | 26.50                    | 2.19                  | -0.06             | 28.63                         | 46.00              | 17.37          | QP     |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

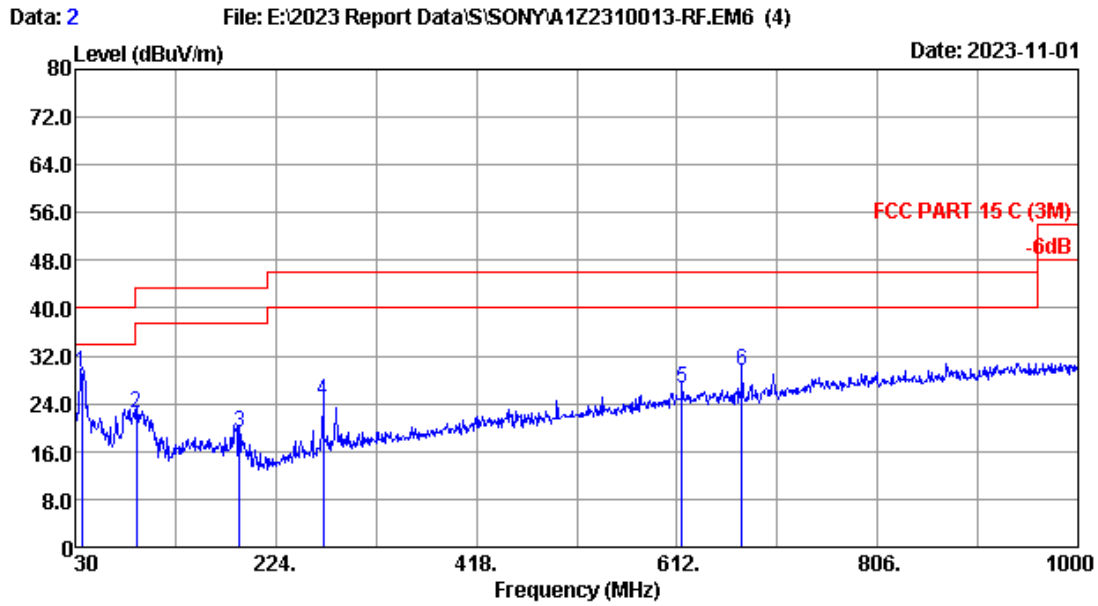


Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2023 VULB 9168-429 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24.2°C/54% Engineer : Abel  
 Test Mode : BT 3.0


| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 36.790         | 19.06                    | 0.54                  | 9.49              | 29.09                         | 40.00              | 10.91          | QP     |
| 2   | 89.170         | 13.82                    | 0.82                  | 7.70              | 22.34                         | 43.50              | 21.16          | QP     |
| 3   | 189.080        | 16.99                    | 1.13                  | 1.21              | 19.33                         | 43.50              | 24.17          | QP     |
| 4   | 269.590        | 18.58                    | 1.36                  | 4.49              | 24.43                         | 46.00              | 21.57          | QP     |
| 5   | 616.850        | 26.24                    | 2.09                  | -1.84             | 26.49                         | 46.00              | 19.51          | QP     |
| 6   | 675.050        | 26.50                    | 2.19                  | 0.77              | 29.46                         | 46.00              | 16.54          | QP     |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

# Frequency: 1GHz~18GHz

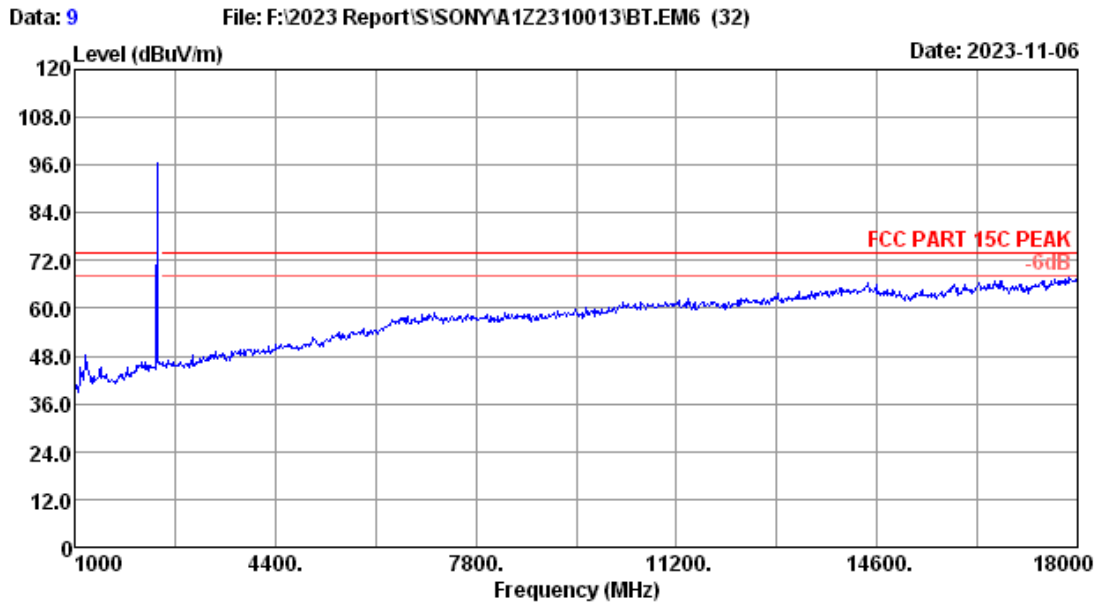


|             |                         |           |              |
|-------------|-------------------------|-----------|--------------|
| Site no.    | : 3m Chamber            | Data no.  | : 9          |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC PART 15C PEAK     |           |              |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier       |
| Test Mode   | : BT GFSK 2402 MHz TX   |           |              |
|             | :                       |           |              |
|             | :                       |           |              |

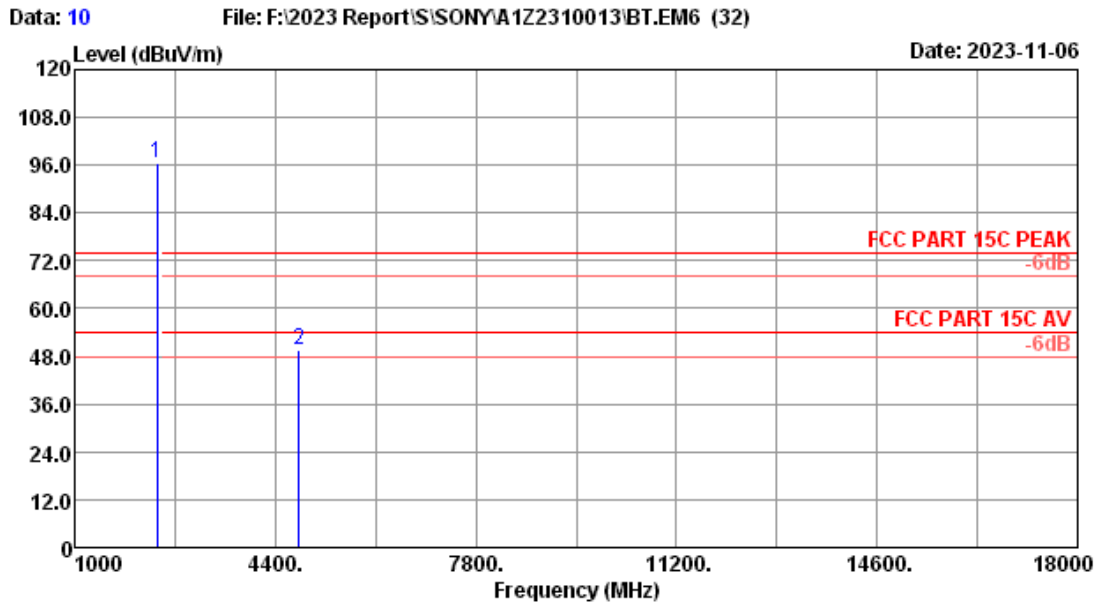


Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT GFSK 2402 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>Level<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2402.00        | 27.61                    | 4.86                  | 34.36                 | 98.29                      | 96.40                         | -----              | -----          | Peak   |
| 2   | 4804.00        | 31.20                    | 6.50                  | 33.68                 | 45.40                      | 49.42                         | 74.00              | 24.58          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

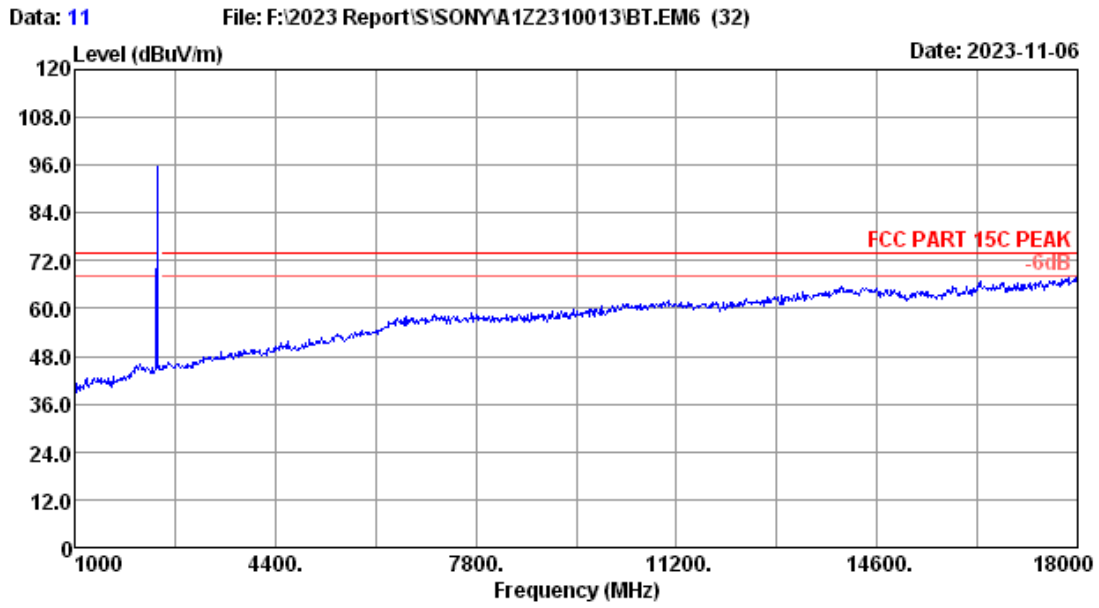


|             |                         |           |            |
|-------------|-------------------------|-----------|------------|
| Site no.    | : 3m Chamber            | Data no.  | : 11       |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : VERTICAL |
| Limit       | : FCC PART 15C PEAK     |           |            |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier     |
| Test Mode   | : BT GFSK 2402 MHz TX   |           |            |
|             | :                       |           |            |
|             | :                       |           |            |

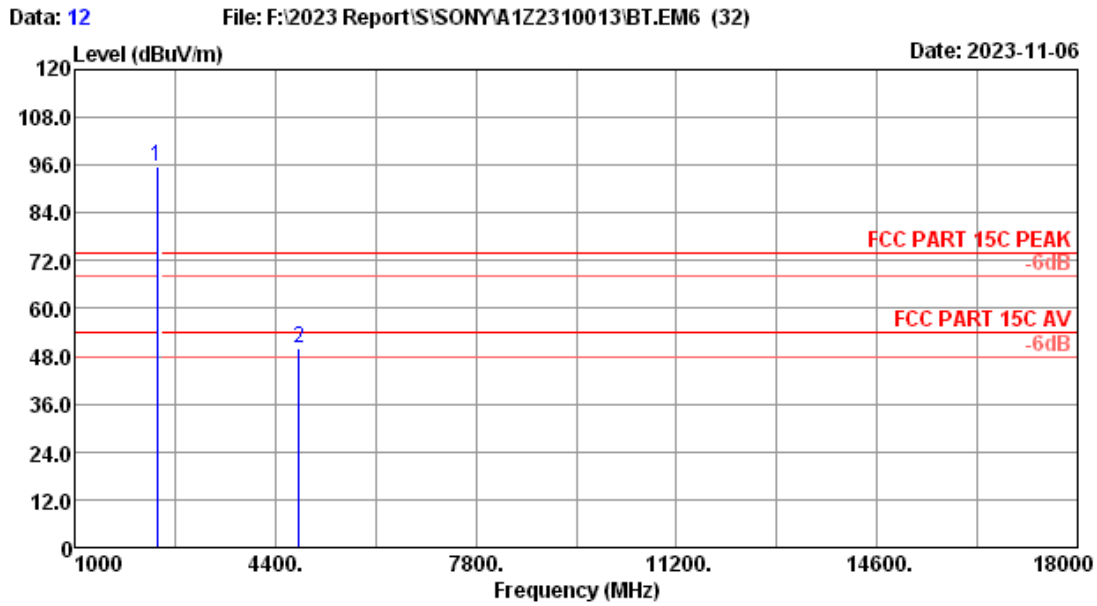


Site no. : 3m Chamber Data no. : 12  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT GFSK 2402 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>Level<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2402.00        | 27.61                    | 4.86                  | 34.36                 | 97.43                      | 95.54                         | -----              | -----          | Peak   |
| 2   | 4804.00        | 31.20                    | 6.50                  | 33.68                 | 46.07                      | 50.09                         | 74.00              | 23.91          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

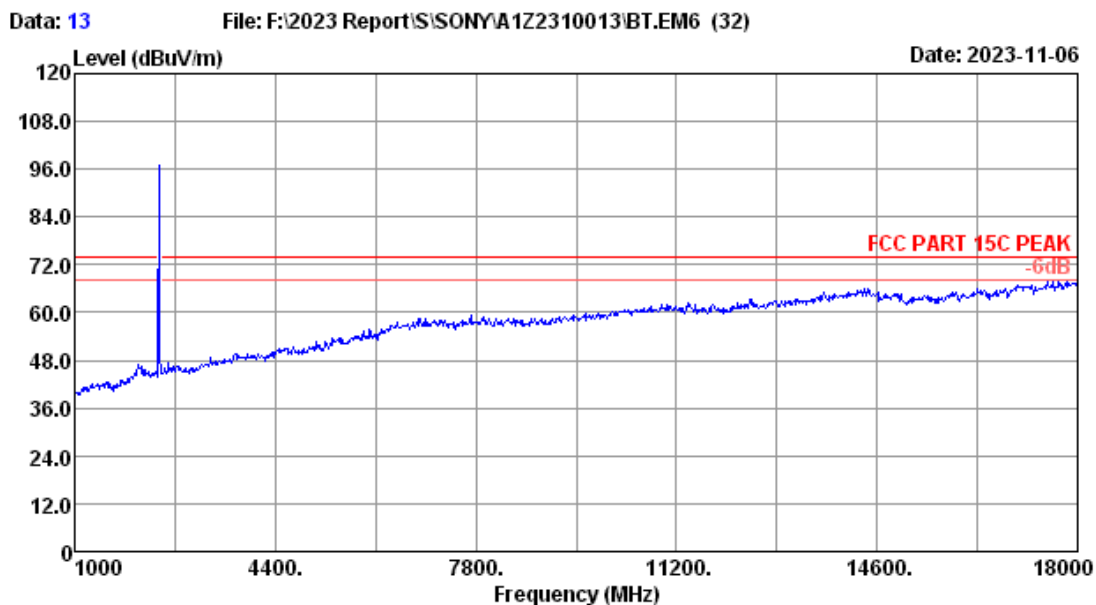


|             |                         |           |            |
|-------------|-------------------------|-----------|------------|
| Site no.    | : 3m Chamber            | Data no.  | : 13       |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : VERTICAL |
| Limit       | : FCC PART 15C PEAK     |           |            |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier     |
| Test Mode   | : BT GFSK 2441 MHz TX   |           |            |
|             | :                       |           |            |
|             | :                       |           |            |

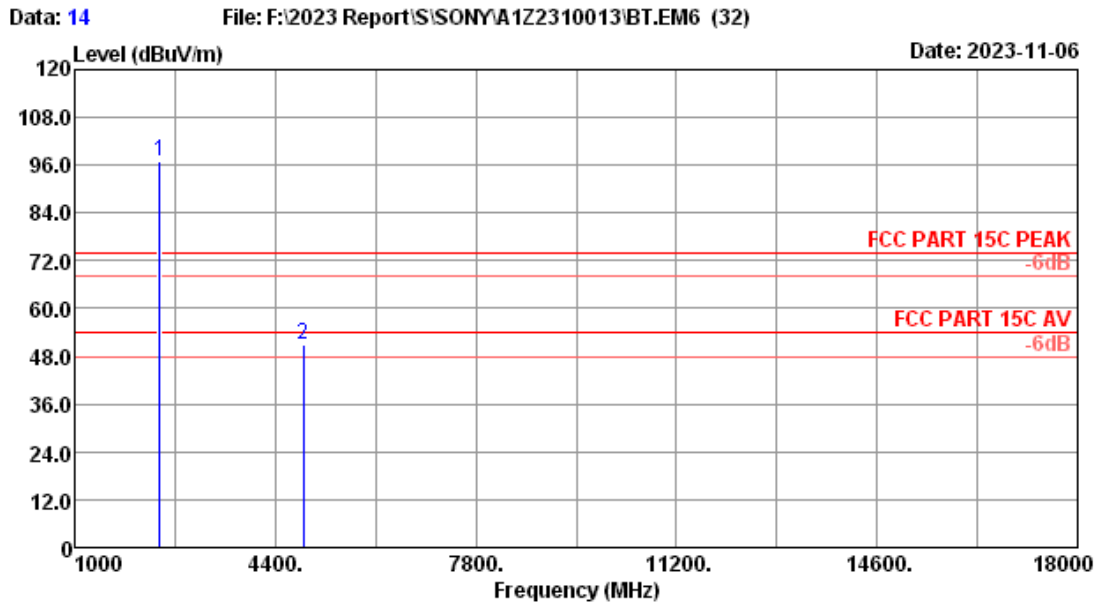


Site no. : 3m Chamber Data no. : 14  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT GFSK 2441 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>Level<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2441.00        | 27.76                    | 4.90                  | 34.35                 | 98.57                      | 96.88                         | -----              | -----          | Peak   |
| 2   | 4882.00        | 31.46                    | 6.54                  | 33.69                 | 46.51                      | 50.82                         | 74.00              | 23.18          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

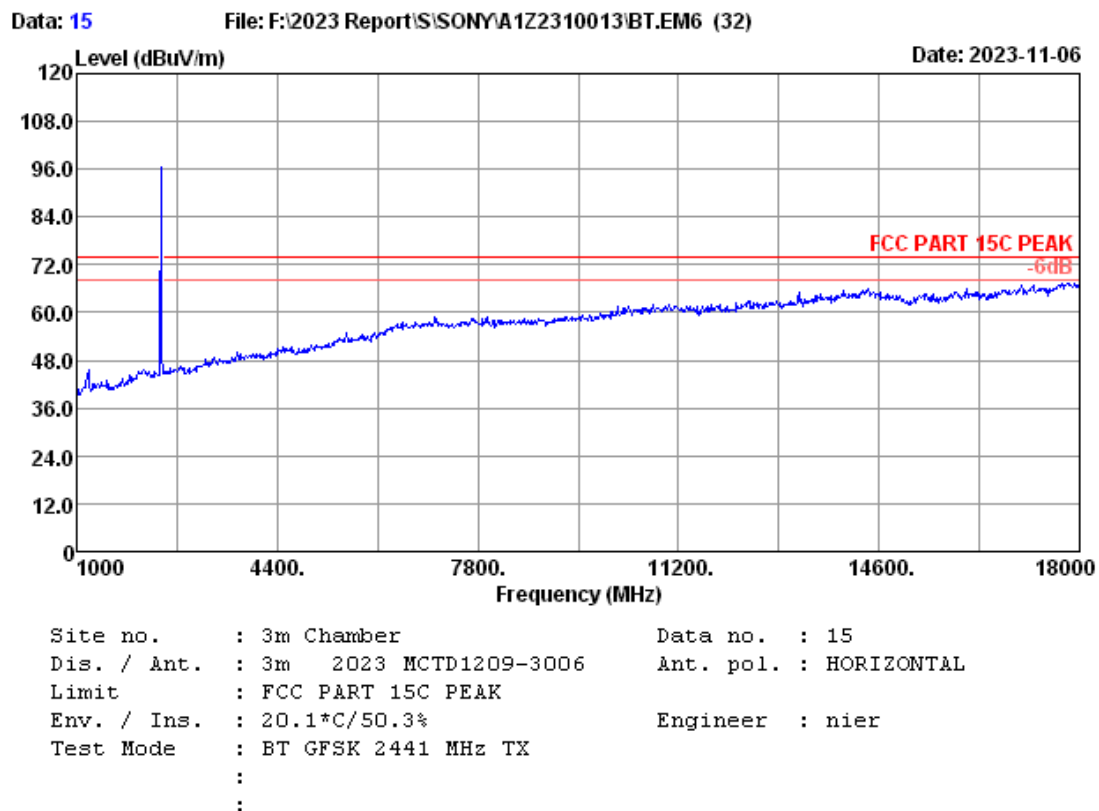


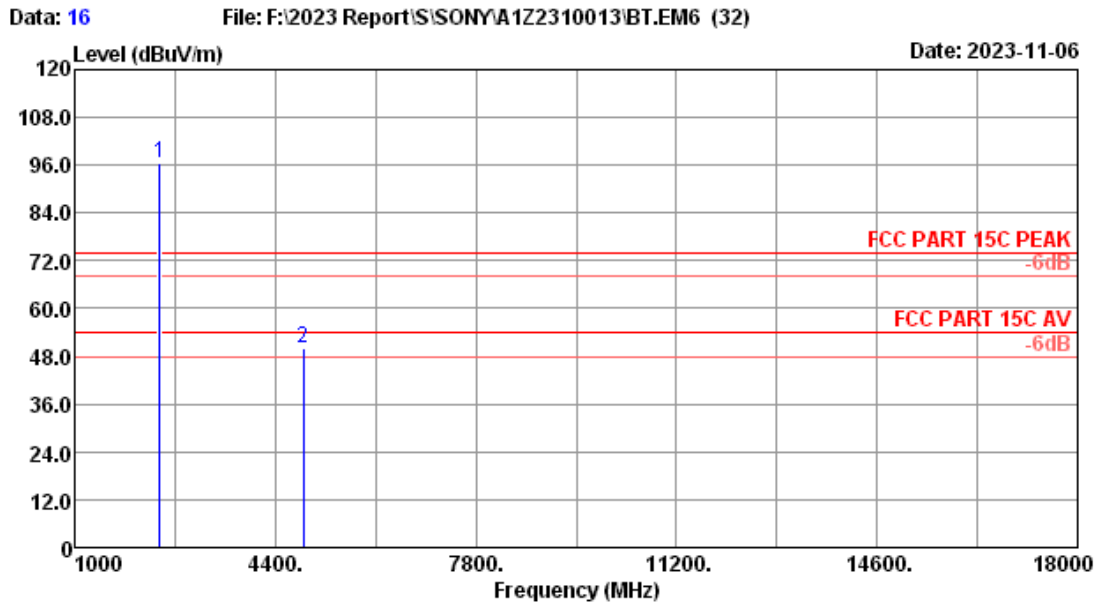


Site no. : 3m Chamber Data no. : 16  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT GFSK 2441 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>Level<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2441.00        | 27.76                    | 4.90                  | 34.35                 | 98.05                      | 96.36                         | -----              | -----          | Peak   |
| 2   | 4882.00        | 31.46                    | 6.54                  | 33.69                 | 45.72                      | 50.03                         | 74.00              | 23.97          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

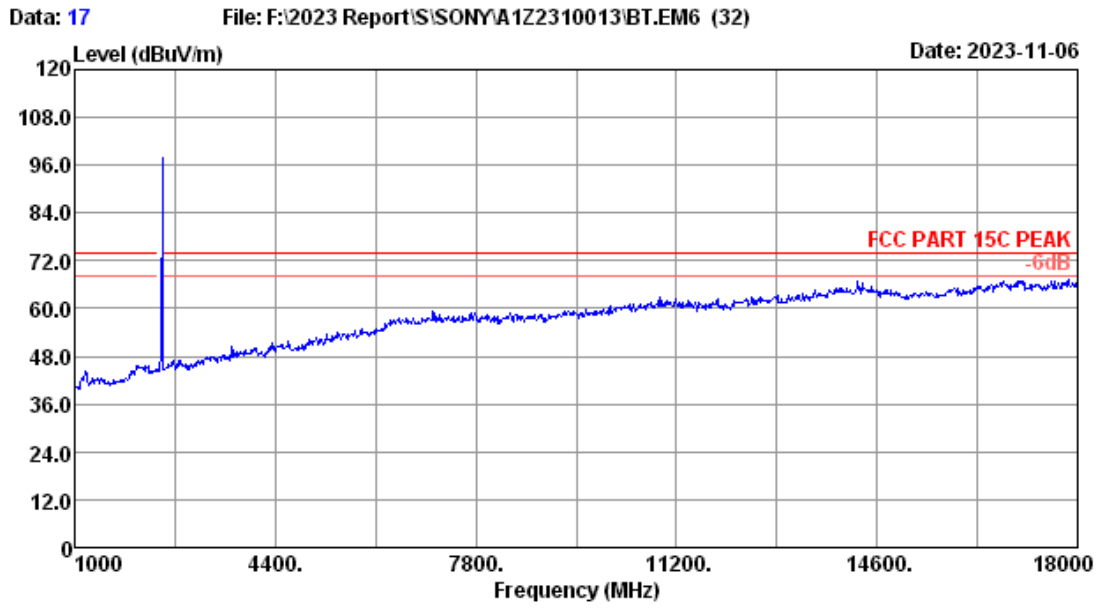


|             |                         |           |              |
|-------------|-------------------------|-----------|--------------|
| Site no.    | : 3m Chamber            | Data no.  | : 17         |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC PART 15C PEAK     |           |              |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier       |
| Test Mode   | : BT GFSK 2480 MHz TX   |           |              |
|             | :                       |           |              |
|             | :                       |           |              |

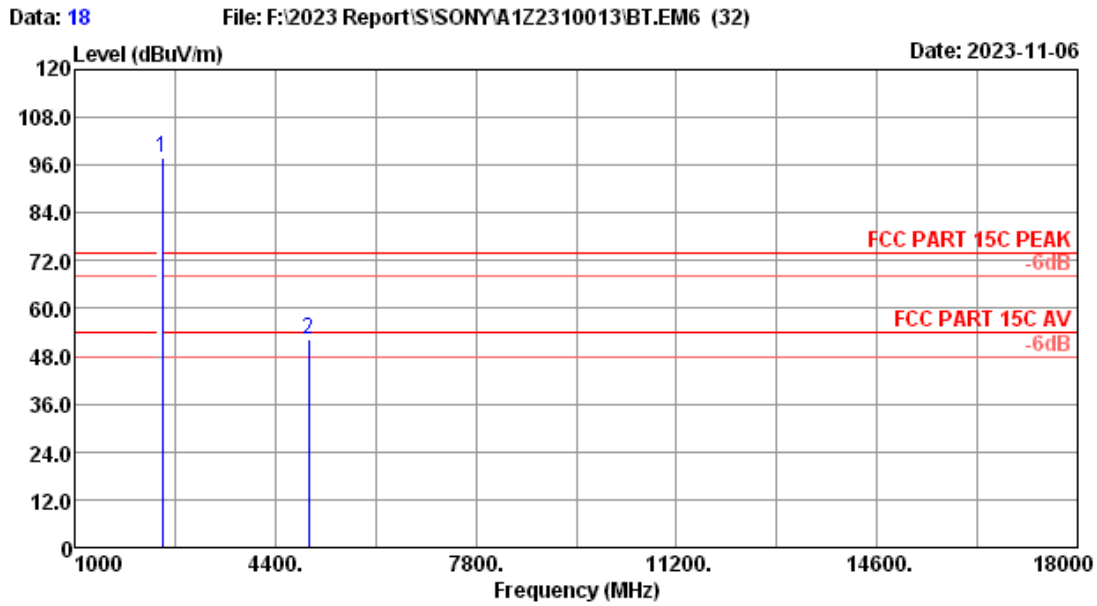


Site no. : 3m Chamber Data no. : 18  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT GFSK 2480 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>Level<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2480.00        | 27.80                    | 4.93                  | 34.35                 | 99.58                      | 97.96                         | -----              | -----          | Peak   |
| 2   | 4960.00        | 31.98                    | 6.58                  | 33.69                 | 47.45                      | 52.32                         | 74.00              | 21.68          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

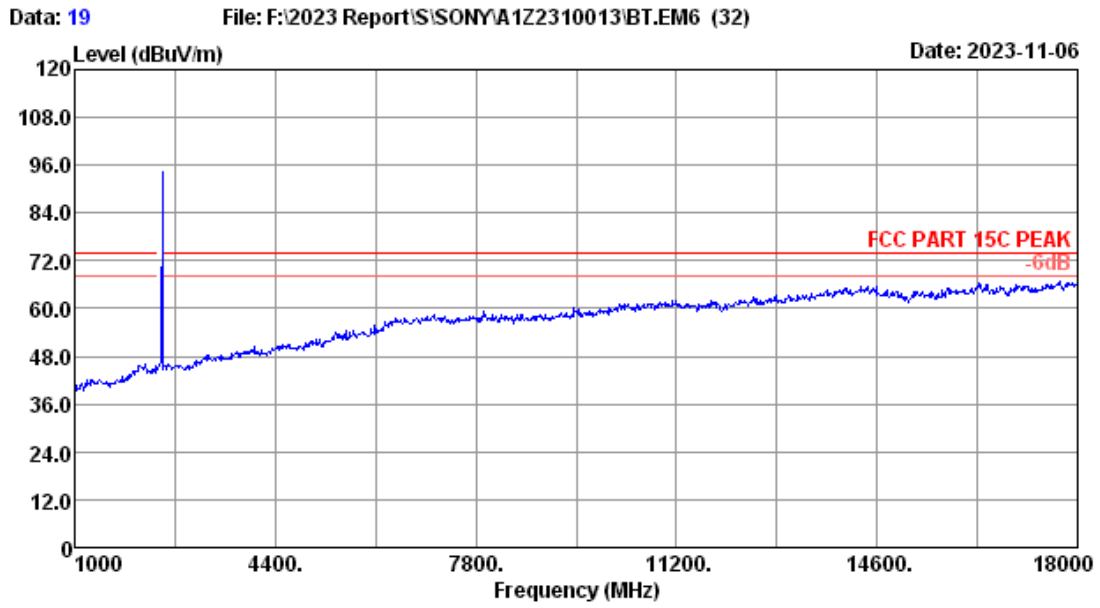


|             |                         |           |            |
|-------------|-------------------------|-----------|------------|
| Site no.    | : 3m Chamber            | Data no.  | : 19       |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : VERTICAL |
| Limit       | : FCC PART 15C PEAK     |           |            |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier     |
| Test Mode   | : BT GFSK 2480 MHz TX   |           |            |
|             | :                       |           |            |
|             | :                       |           |            |

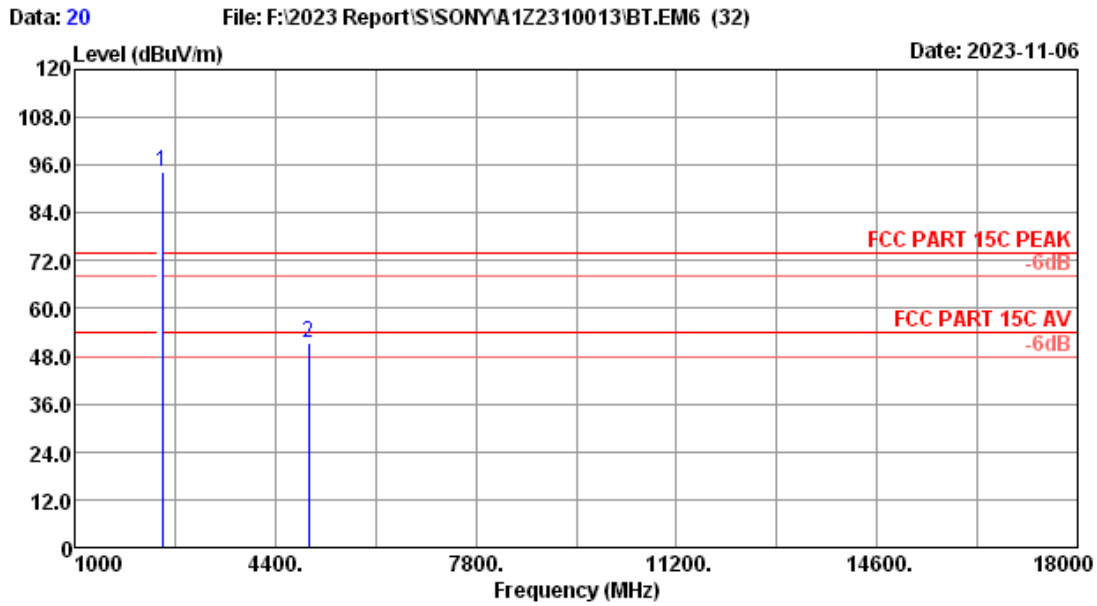


Site no. : 3m Chamber Data no. : 20  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT GFSK 2480 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>Level<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2480.00        | 27.80                    | 4.93                  | 34.35                 | 95.96                      | 94.34                         | -----              | -----          | Peak   |
| 2   | 4960.00        | 31.98                    | 6.58                  | 33.69                 | 46.60                      | 51.47                         | 74.00              | 22.53          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

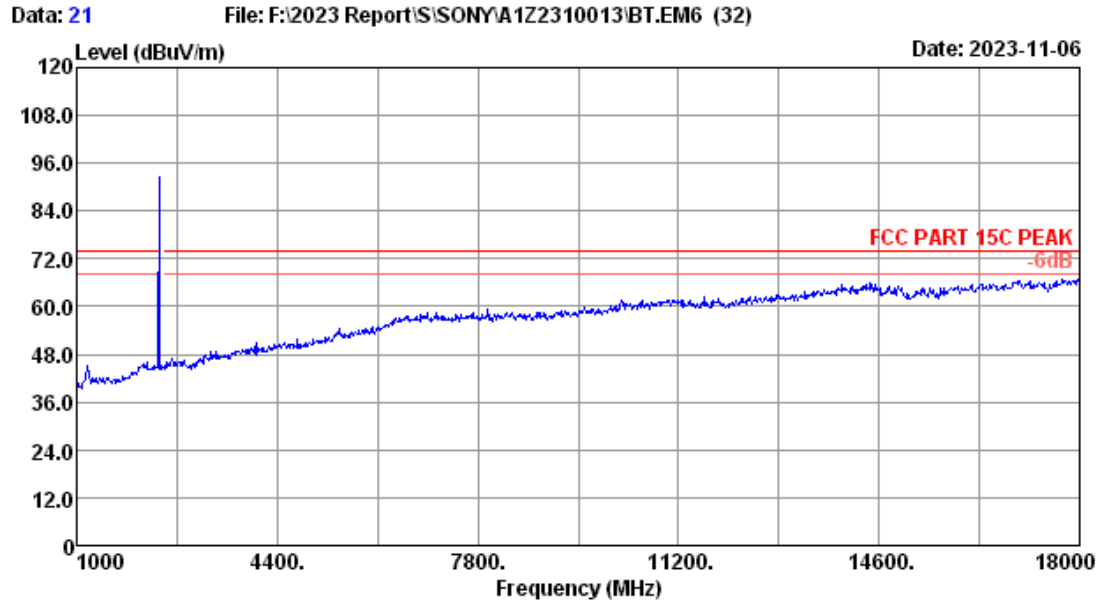


|             |                         |           |              |
|-------------|-------------------------|-----------|--------------|
| Site no.    | : 3m Chamber            | Data no.  | : 21         |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC PART 15C PEAK     |           |              |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier       |
| Test Mode   | : BT 8DPSK 2402 MHz TX  |           |              |
|             | :                       |           |              |
|             | :                       |           |              |

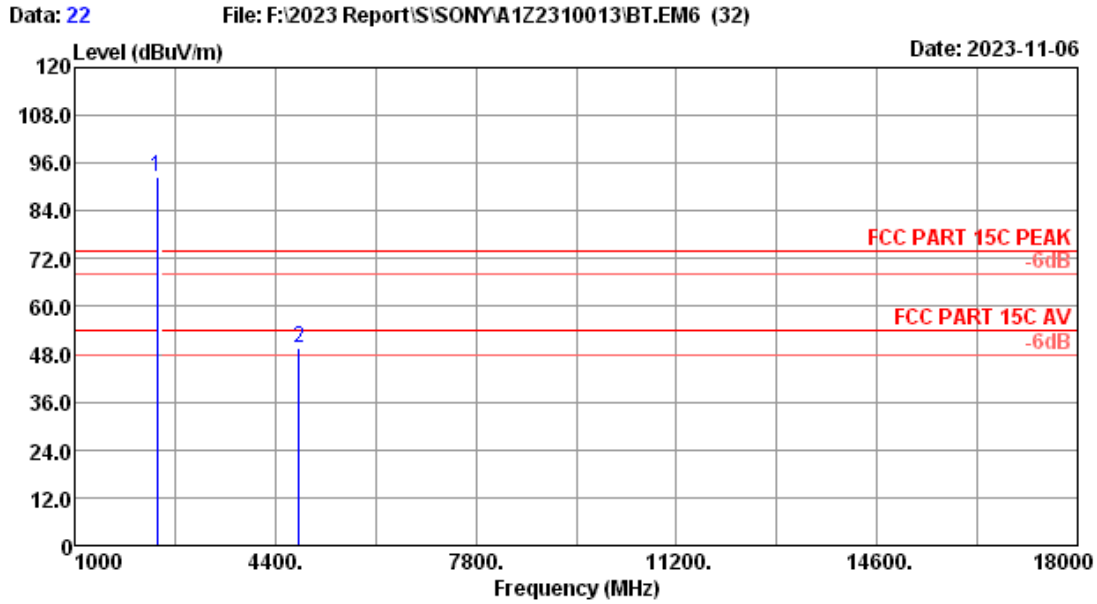


Site no. : 3m Chamber Data no. : 22  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT 8DPSK 2402 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>(dBuV) | Emission          |                    |                | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------|--------------------|----------------|--------|
|     |                |                          |                       |                       |                   | Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) |        |
| 1   | 2402.00        | 27.61                    | 4.86                  | 34.36                 | 94.43             | 92.54             | -----              | -----          | Peak   |
| 2   | 4804.00        | 31.20                    | 6.50                  | 33.68                 | 45.75             | 49.77             | 74.00              | 24.23          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

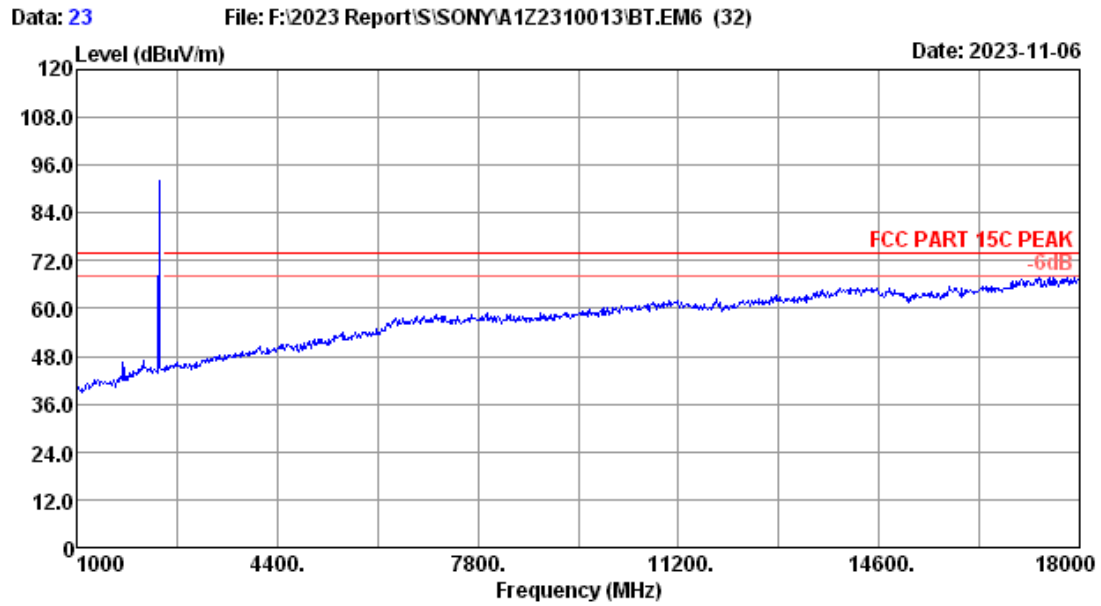


|             |                         |           |            |
|-------------|-------------------------|-----------|------------|
| Site no.    | : 3m Chamber            | Data no.  | : 23       |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : VERTICAL |
| Limit       | : FCC PART 15C PEAK     |           |            |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier     |
| Test Mode   | : BT 8DPSK 2402 MHz TX  |           |            |
|             | :                       |           |            |
|             | :                       |           |            |

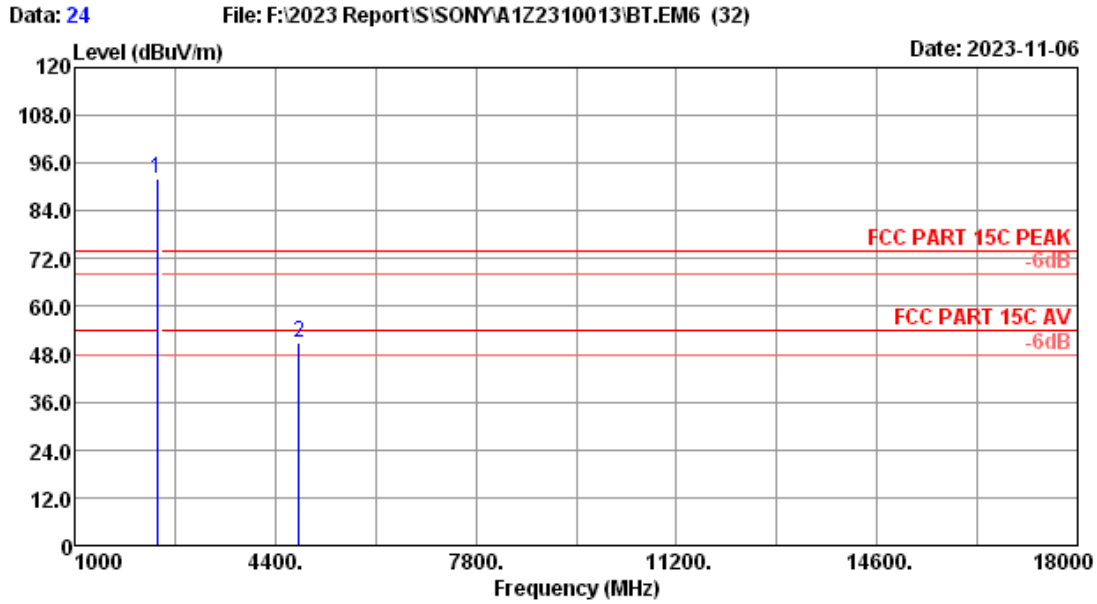


Site no. : 3m Chamber Data no. : 24  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT 8DPSK 2402 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2402.00        | 27.61                    | 4.86                  | 34.36                 | 94.17             | 92.28                         | -----              | -----          | Peak   |
| 2   | 4804.00        | 31.20                    | 6.50                  | 33.68                 | 46.71             | 50.73                         | 74.00              | 23.27          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

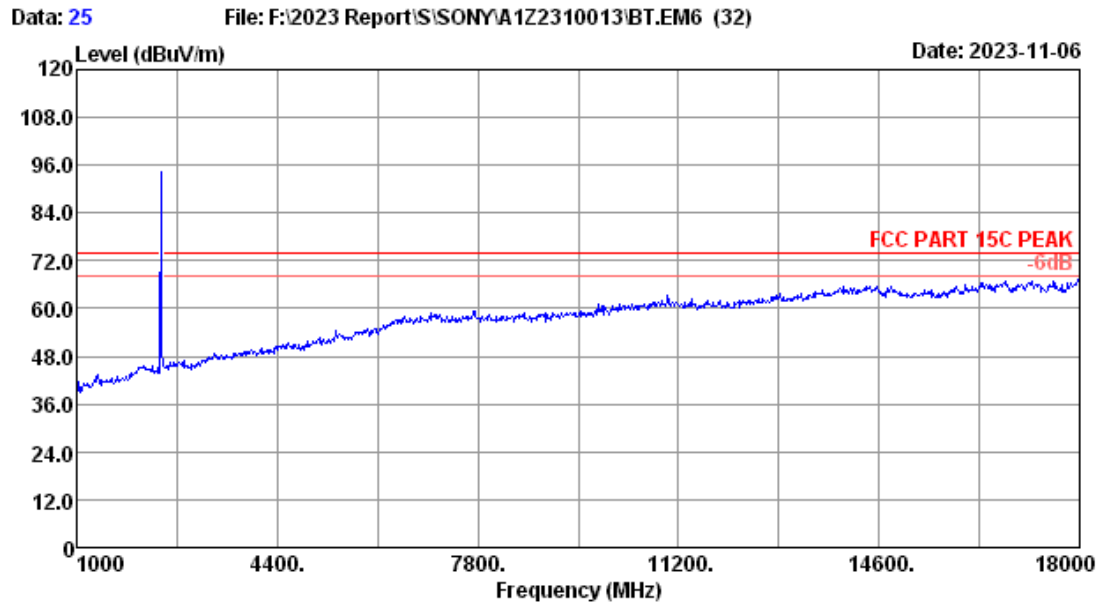


|             |                         |           |            |
|-------------|-------------------------|-----------|------------|
| Site no.    | : 3m Chamber            | Data no.  | : 25       |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : VERTICAL |
| Limit       | : FCC PART 15C PEAK     |           |            |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier     |
| Test Mode   | : BT 8DPSK 2441 MHz TX  |           |            |
|             | :                       |           |            |
|             | :                       |           |            |

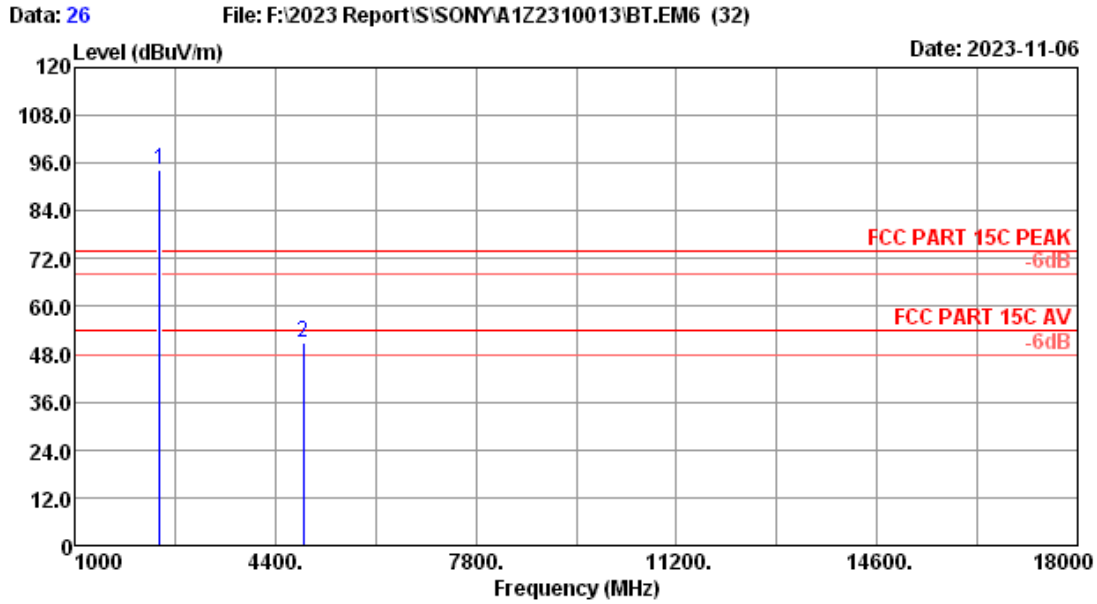


Site no. : 3m Chamber Data no. : 26  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT 8DPSK 2441 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2441.00        | 27.76                    | 4.90                  | 34.35                 | 96.11             | 94.42                         | -----              | -----          | Peak   |
| 2   | 4882.00        | 31.46                    | 6.54                  | 33.69                 | 46.48             | 50.79                         | 74.00              | 23.21          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

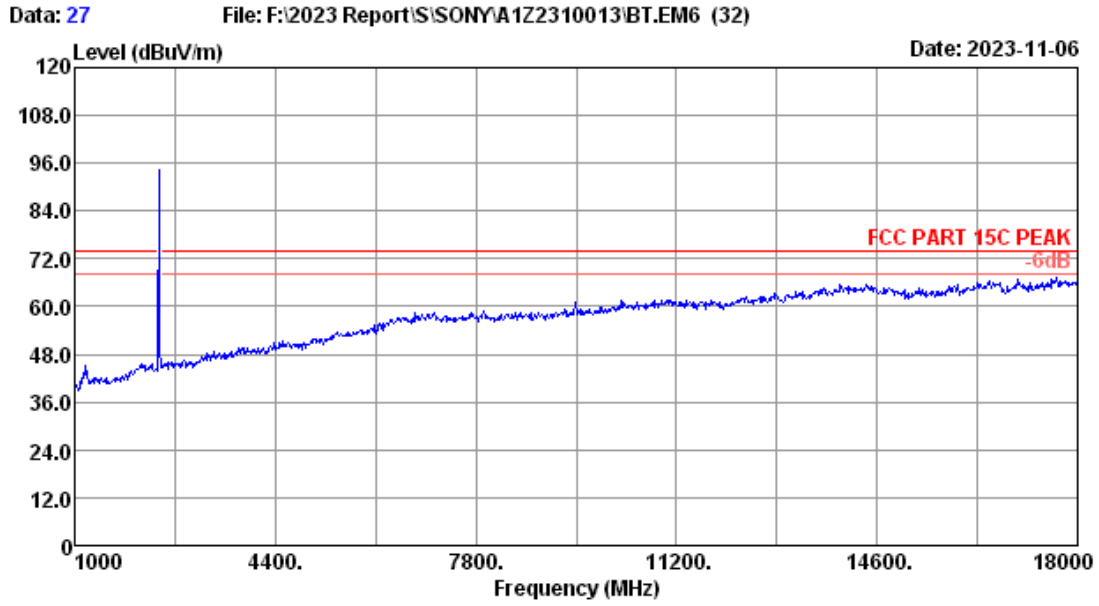


|             |                         |           |              |
|-------------|-------------------------|-----------|--------------|
| Site no.    | : 3m Chamber            | Data no.  | : 27         |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC PART 15C PEAK     |           |              |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier       |
| Test Mode   | : BT 8DPSK 2441 MHz TX  |           |              |
|             | :                       |           |              |
|             | :                       |           |              |

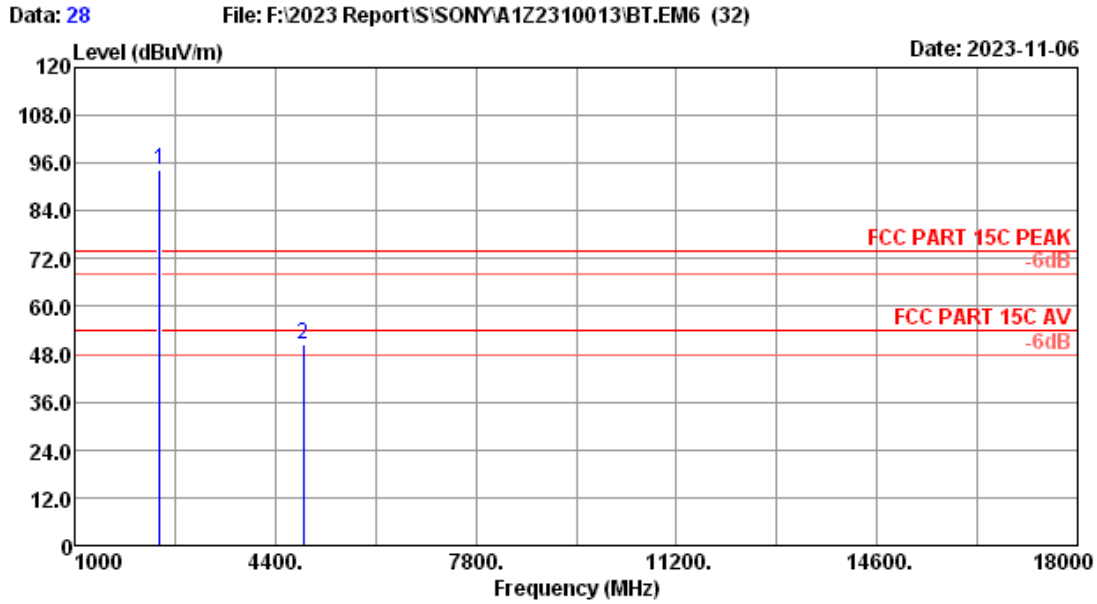


Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT 8DPSK 2441 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2441.00        | 27.76                    | 4.90                  | 34.35                 | 96.15             | 94.46                         | -----              | -----          | Peak   |
| 2   | 4882.00        | 31.46                    | 6.54                  | 33.69                 | 46.12             | 50.43                         | 74.00              | 23.57          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

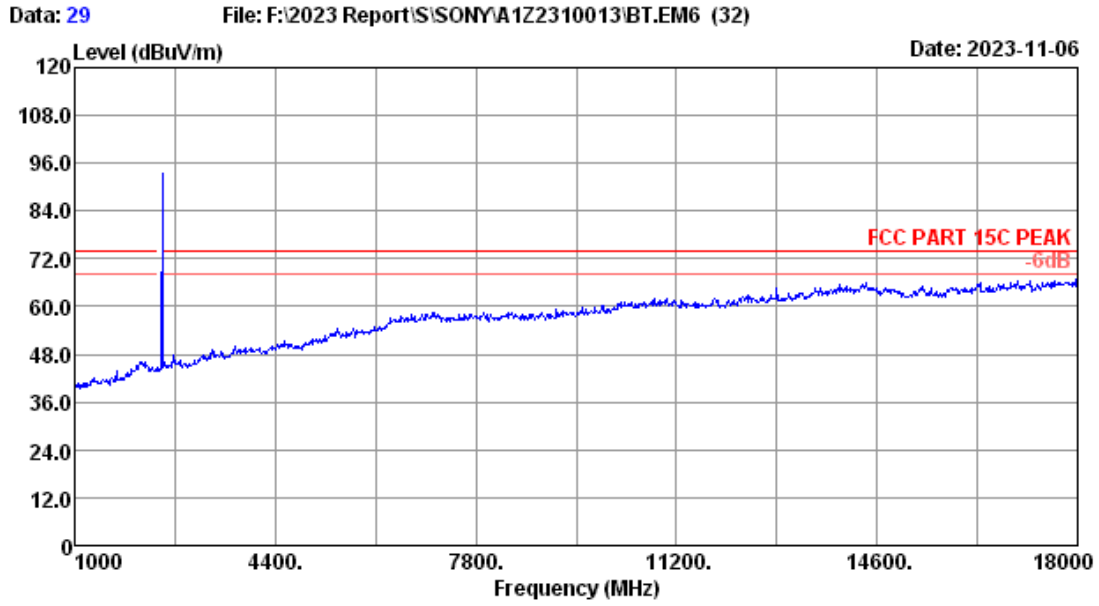


|             |                         |           |              |
|-------------|-------------------------|-----------|--------------|
| Site no.    | : 3m Chamber            | Data no.  | : 29         |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC PART 15C PEAK     |           |              |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier       |
| Test Mode   | : BT 8DPSK 2480 MHz TX  |           |              |
|             | :                       |           |              |
|             | :                       |           |              |

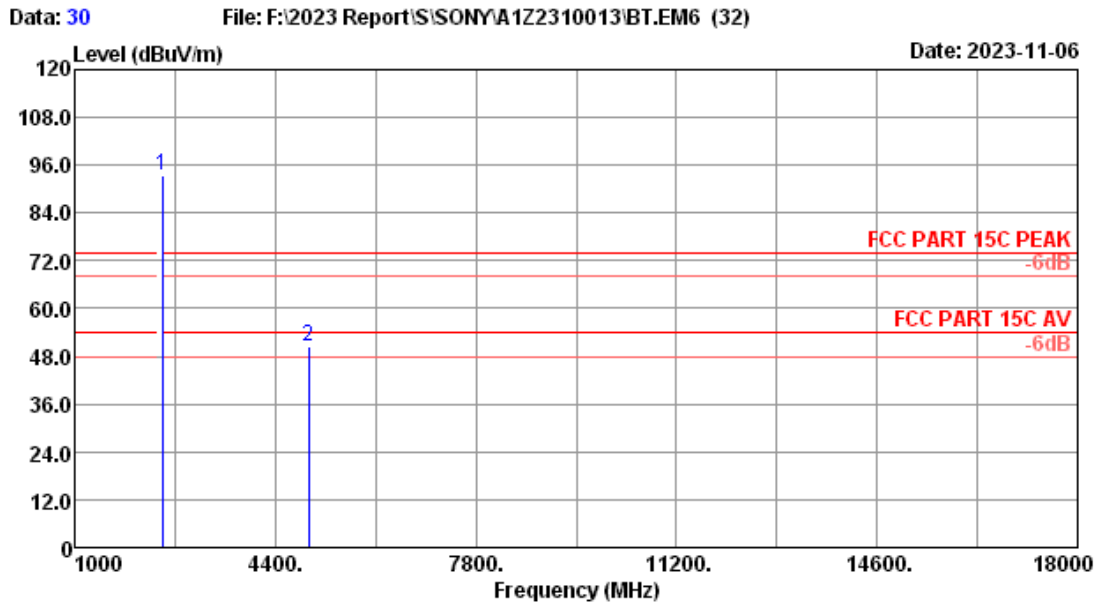


Site no. : 3m Chamber Data no. : 30  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT 8DPSK 2480 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2480.00        | 27.80                    | 4.93                  | 34.35                 | 95.12             | 93.50                         | -----              | -----          | Peak   |
| 2   | 4960.00        | 31.98                    | 6.58                  | 33.69                 | 45.65             | 50.52                         | 74.00              | 23.48          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

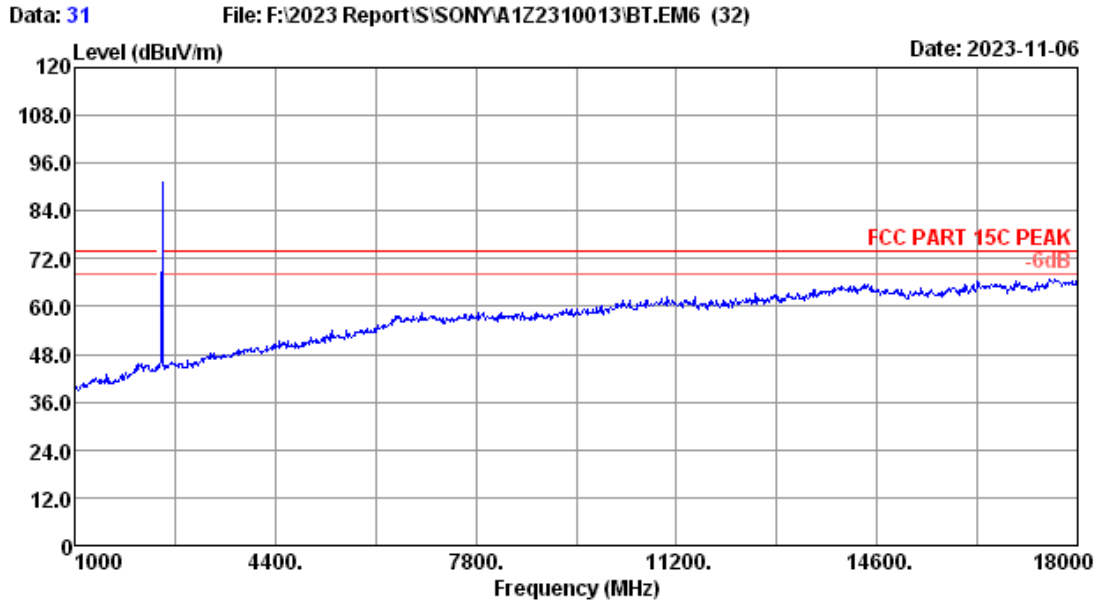

|             |                         |           |            |
|-------------|-------------------------|-----------|------------|
| Site no.    | : 3m Chamber            | Data no.  | : 31       |
| Dis. / Ant. | : 3m 2023 MCTD1209-3006 | Ant. pol. | : VERTICAL |
| Limit       | : FCC PART 15C PEAK     |           |            |
| Env. / Ins. | : 20.1°C/50.3%          | Engineer  | : nier     |
| Test Mode   | : BT 8DPSK 2480 MHz TX  |           |            |
|             | :                       |           |            |
|             | :                       |           |            |

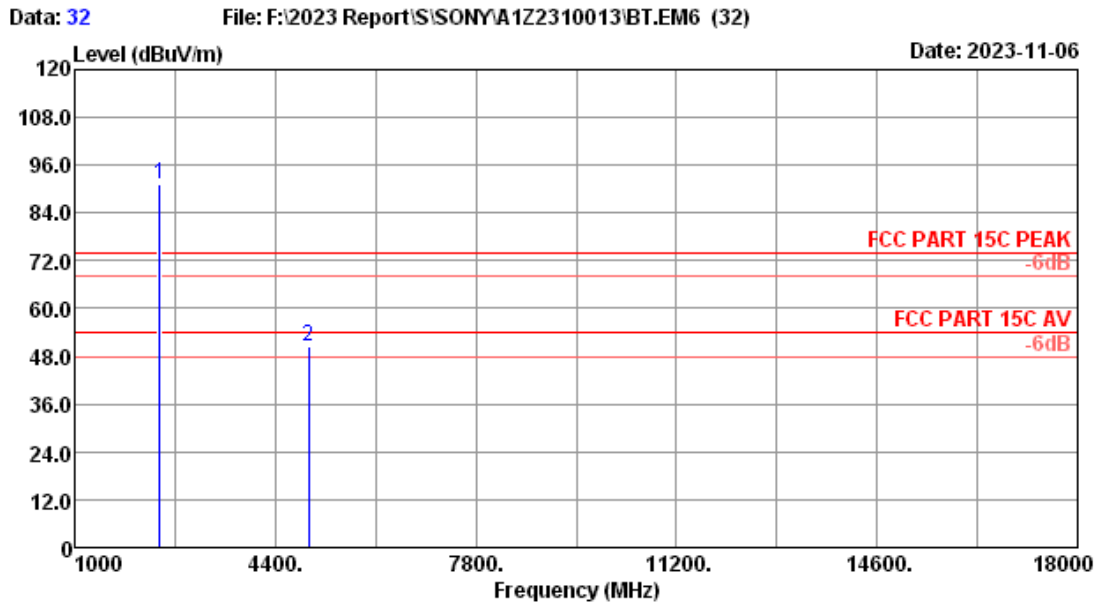

Site no. : 3m Chamber Data no. : 32  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.1°C/50.3% Engineer : nier  
 Test Mode : BT 8DPSK 2480 MHz TX  
 :  
 :

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Amp<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 2441.00        | 27.76                    | 4.90                  | 34.35                 | 92.73             | 91.04                         | -----              | -----          | Peak   |
| 2   | 4960.00        | 31.98                    | 6.58                  | 33.69                 | 45.72             | 50.59                         | 74.00              | 23.41          | Peak   |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

## 5. CONDUCTED SPURIOUS EMISSIONS

### 5.1. Test Equipments

| Item | Equipment           | Manufacturer | Model No.    | Serial No. | Last Cal. | Cal. Interval |
|------|---------------------|--------------|--------------|------------|-----------|---------------|
| 1.   | PXA Signal Analyzer | Agilent      | N9030A       | MY51380221 | Apr.01,23 | 1 Year        |
| 2.   | RF Cable            | HUBER+SUHNER | SUCOFLEX-106 | 505238/6   | Apr.02,23 | 1 Year        |

### 5.2. Block Diagram of Test Setup



### 5.3. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30dB instead of 20dB.

### 5.4. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.8:

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.

Note: The cable loss and attenuator loss were offset into spectrum analyzer as an amplitude offset.

### 5.5. Test result

**PASS** (The testing data was attached in the next pages.)

|                       |                         |                         |
|-----------------------|-------------------------|-------------------------|
| EUT: Sound Bar        |                         |                         |
| M/N: HT-S100F         |                         |                         |
| Test date: 2023-11-02 | Pressure: 102.3±1.0 kpa | Humidity: 54.5±3.0%     |
| Tested by: Carl       | Test site: RF site      | Temperature: 23.5±0.6°C |