



EMI TEST REPORT

Test Report No. : 26CE0198-YK-1

Applicant : Sony EMCS Corporation Saitama TEC

Type of Equipment : Home AV Wireless System Transmitter

Model No. : HWS-AV10T

FCC ID : AK8HWSAV10T

Test Standard : FCC Part15 Subpart C,
Section 15.207, Section 15.247: 2005

Test Result : Complied

1. This test report shall not be reproduced except in full, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test: December 28, 2005 and January 6, 2006

Tested by: G. Ishiwata & M. Hosaka
Go Ishiwata Makoto Hosaka

Approved by: O. Watatani
Osamu Watatani
Site Manager of Yamakita EMC Lab.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

Table of Contents	Page
1 Applicant Information	3
2 Product Description	4
3 Test Specification, Procedures and Results	5
4 System Test Configuration	7
5 Conducted Emissions	9
6 6dB Bandwidth	10
7 Maximum Peak Output Power	10
8 Out of Band Emissions (Antenna Port Conducted)	10
9 Out of Band Emissions (Radiated)	11
10 Peak Power Density	11
 <u>Contents of Appendixes</u>	 12
APPENDIX 1: Photographs of test setup	13
APPENDIX 2: Test Data	15
APPENDIX 3: Test instruments	41

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

1 Applicant Information

Company Name : Sony EMCS Corporation Saitama TEC
Address : Shinagawa INTERCITY C Tower Shinagawa Tec.
2-15-3 Konan Minato-ku, Tokyo, 108-6201 JAPAN
Telephone Number : +81-3-5769-5640
Facsimile Number : +81-3-5769-5962
Contact Person : Kikuo Murata

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b(01.06.05)

2 Product Description

Type of Equipment : Home AV Wireless System Transmitter
Model No. : HWS-AV10T
Serial No. : 51
Rating : DC6V (AC120V/60Hz)
Country of Manufacture : China
Receipt Date of Sample : December 28, 2005
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)

Model: HWS-AV10T (referred to as the EUT in this report) is a transmitter using 2408-2464 MHz and also a receiver using 433.92MHz of Home AV Wireless System HWS-AV10K.

<Transmitter>

Frequency of operation : 2408-2464 MHz
Other clock frequency : 7MHz (PLL), 4MHz (MPU)
Type of modulation : PSK
Antenna type : Integral antenna
Antenna connector type : None
Antenna gain : 1.65 dBi
Mode of operation : Simplex

<Receiver>

Frequency of operation : 433.92 MHz
Local frequency : 431.7312 MHz
Intermediate frequency : 2.1888 MHz
Other clock frequency : 13.4916 MHz (RF IC)
Type of modulation : ASK
Antenna type : Integral antenna
Antenna connector type : None
Method of Frequency generation : Crystal

Emission designation : G1W
Operation temperature range : 0 ~ 40 deg. C.

*FCC Part15.31 (e)

The HWS-AV10T provides the module with stable power supply (DC5V & 3V), and the power is not changed when voltage of the equipment is varied. Therefore, the equipment complies power supply regulation.

*FCC Part15.203

The transmitter and its antenna comply with this requirement since this antenna is built in the equipment and it cannot be replaced by end users.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

3 Test Specification, Procedures and Results

3.1 Test specification

Test specification : FCC Part15 Subpart C: 2005
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
 Section 15.207 Conducted limits: 2005
 Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,
 and 5725-5850MHz: 2005

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted Emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	Section 15.207	-	N/A	4.8dB (2.5062MHz, L1, AV, Transmitting 2415MHz)	Complied
6dB Bandwidth	ANSI C63.4:2003 13. Measurement of intentional radiators	Section 15.247 (a)(2)	Conducted	N/A	*See data.	Complied
Maximum Peak Output Power	ANSI C63.4:2003 13. Measurement of intentional radiators	Section 15.247 (b)(3)	Conducted	N/A		Complied
Spurious Emission	ANSI C63.4:2003 13. Measurement of intentional radiators	Section 15.247 (d)	Conducted/ Radiated	N/A	Radiated: 3.2dB (24570.00MHz, AV, Vertical, Transmitting 2457MHz)	Complied
Power Density	ANSI C63.4:2003 13. Measurement of intentional radiators	Section 15.247 (e)	Conducted	N/A	*See data.	Complied

Note: UL Apex's EMI Work Procedures No.QPM05.

These tests were also referred to "Guidance on Measurement for Digital Transmission Systems Section15.247".

* No addition, deviation or exclusion has been made from standards.

3.3 Uncertainty

Conducted emission

The measurement uncertainty (with 95% confidence level) for this test is ± 2.7 dB.

The data listed in this test report has enough margin, more than site margin.

Antenna port conducted test (Radio)

The measurement uncertainty (with 95% confidence level) for this test is ± 0.4 dB.

Radiated emission

The measurement uncertainty (with 95% confidence level) for this test using Biconical antenna is ± 4.5 dB.

The measurement uncertainty (with 95% confidence level) for this test using Logperiodic antenna is ± 4.3 dB.

The measurement uncertainty (with 95% confidence level) for this test using Horn antenna is ± 5.2 dB.

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

3.4 Test Location

UL Apex Co., Ltd. Yamakita EMC Lab.
907, Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken 258-0124 JAPAN
Telephone number : +81 465 77 1011
Facsimile number : +81 465 77 2112
NVLAP Lab. code : 200441-0

No. 1 test site has been fully described in a report submitted to FCC office, and accepted on August 26, 2005
(Registration No.: 95486).
IC Registration No. : IC3489A

No. 2 test site has been fully described in a report submitted to FCC office, and accepted on April 4, 2005
(Registration No.: 466226).
IC Registration No. : IC3489A-2

No. 1 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on November 2, 2005 (Registration No.: 95967).
IC Registration No. : IC3489A-B

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 shielded room	8.0 x 5.0 x 2.5	No.1 EMS lab. (Semi-anechoic chamber)	10.0 x 7.5 x 5.7
No.2 shielded room	5.0 x 4.0 x 2.5		
No.3 shielded room	4.0 x 5.0 x 2.7		

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b(01.06.05)

4 System Test Configuration


4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Test mode: Transmitting mode (2415MHz, 2429MHz, 2457MHz)
 Audio and video signal which is input to the EUT causes RF signal.


4.2 Configuration of Tested System

Front View (Conducted emission)

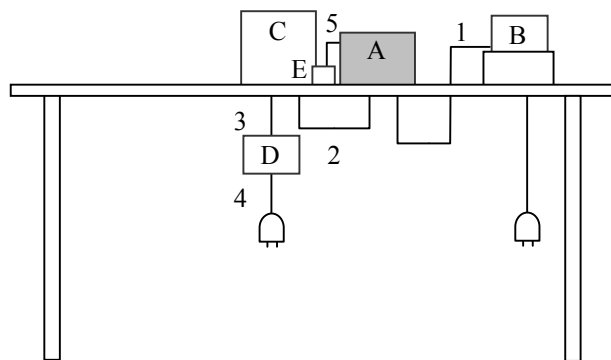


AC120V/60Hz

Front View (Radiated emission)

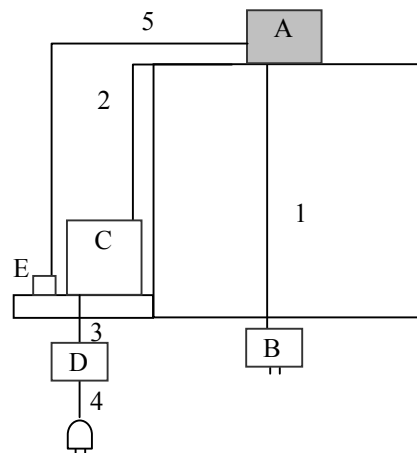


Top View (Conducted emission)

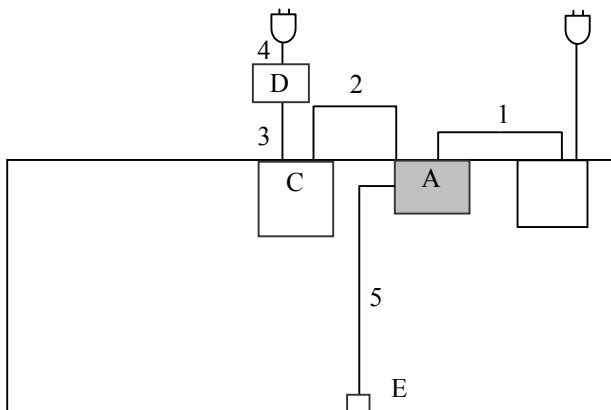

Top View (Radiated emission)

AC120V/60Hz

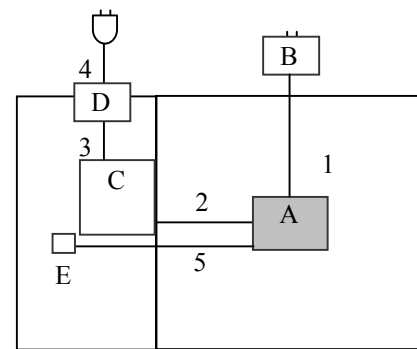

* Test data was taken under worse case conditions.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID (Remarks)
A	Home AV Wireless System Transmitter	HWS-AV10T	51	SONY	AK8HWSAV10T (EUT)
B	AC Adaptor	AC-ES608K3	-	SONY	-
C	Portable DVD Player	DVP-FX1	-	SONY	-
D	AC Adaptor	AC-FX1	-	SONY	-
E	Remote Control Extender	-	-	SONY	-

List of cables used

No.	Name	Length (m)	Shield	Remark
1	DC cable	2.2	Unshielded	-
2	Audio cable	1.1	Unshielded	-
3	DC cable	1.8	Unshielded	-
4	AC cable	1.8	Unshielded	-
5	Remote Control Extender cable	1.4	Unshielded	-

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

5 Conducted Emissions

5.1 Operating environment

The test was carried out in No.2 shielded room.

5.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.8m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN) and excess AC cable was bundled in center. I/O cable were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane.

5.3 Test conditions

Frequency range : 0.15 - 30MHz
EUT operation mode : Transmitting

5.4 Test procedure

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The Conducted emission measurements were made with the following detector function of the test receiver.

Detector: QP/AV
IF Bandwidth: 9kHz

5.5 Results

Summary of the test results : Pass
Test data : APPENDIX 2 Page 15 to 19

Date : January 6, 2006 Test engineer : Makoto Hosaka

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b(01.06.05)

6 6dB Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Date : January 6, 2006

Test data: APPENDIX 2 Page 20
Test engineer : Makoto Hosaka

7 Maximum Peak Output Power

Test Procedure

The maximum peak output power was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Date : January 6, 2006

Test data: APPENDIX 2 Page 21 to 22
Test engineer : Makoto Hosaka

8 Out of Band Emissions (Antenna Port Conducted)

Test Procedure

The out of band emissions were measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Date : January 6, 2006

Test data: APPENDIX 2 Page 23 to 28
Test engineer : Makoto Hosaka

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b(01.06.05)

9 Out of Band Emissions (Radiated)

9.1 Operating environment

The test was carried out in No.1 open site.

9.2 Test configuration

EUT was placed on a platform of nominal size, 0.5m by 0.5m, raised 80cm above the conducting ground plane. A drawing of the set up is shown in the photos of Appendix 1.

9.3 Test conditions

Frequency range : 30MHz - 26.5GHz
Test distance : 3m
EUT operation mode : Transmitting

9.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
Detector	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 1MHz
IF Bandwidth		AV: RBW: 1MHz/VBW: 10Hz

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

9.5 Results

Summary of the test results : Pass
: APPENDIX 2 Page 29 to 37

Date : December 28, 2005 Test engineer : Go Ishiwata

10 Peak Power Density

Test Procedure

The peak power density was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass Test data: APPENDIX 2 Page 38 to 39
Date : January 6, 2006 Test engineer : Makoto Hosaka

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b(01.06.05)

APPENDIX 1: Photographs of test setup

Page 13 : Conducted emission
Page 14 : Radiated emission

APPENDIX 2: Test Data

Page 15 - 19 : Conducted emission
Page 20 : 6dB Bandwidth
Page 21 - 22 : Maximum Peak Output Power
Page 23 - 28 : Out of Band Emissions (Antenna Port Conducted)
Page 29 - 37 : Out of Band Emissions (Radiated)
29-31 : 30-1000MHz
32-37 : 1-26.5GHz
Page 38 - 39 : Peak Power Density
Page 40 : Occupied Bandwidth

APPENDIX 3: Test instruments

Page 41 : Test instruments

UL Apex Co., Ltd.

YAMAKITA EMC LAB.


907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

Conducted emission

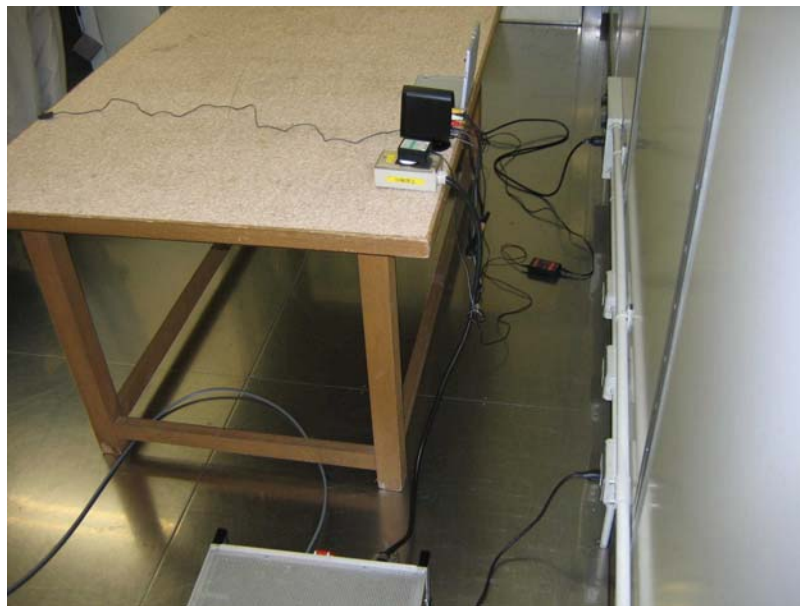

UL Apex Co., Ltd.

YAMAKITA EMC LAB.


907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

Radiated emission

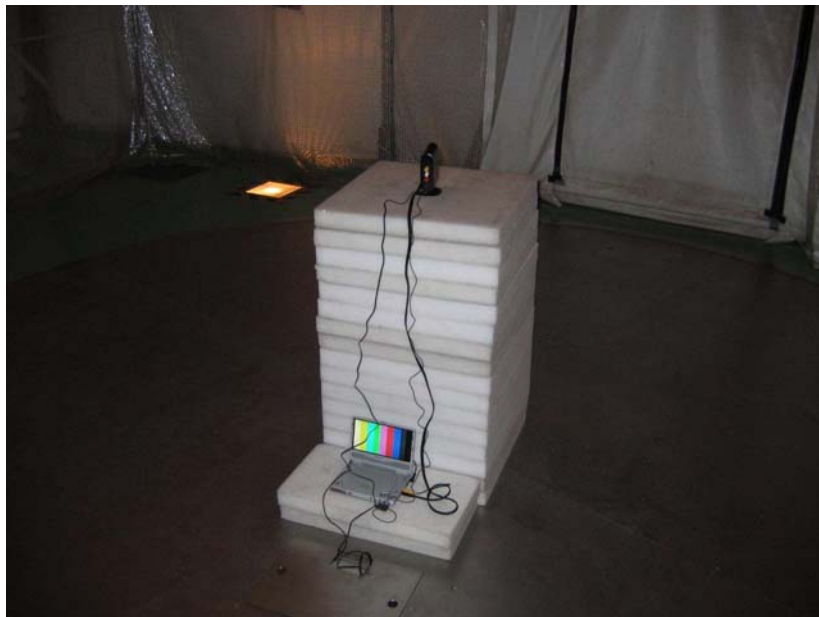

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

DATA OF CONDUCTION TEST

UL Apex Co.,Ltd.

YAMAKITA No.2 SHIELD ROOM

Report No. : 26CE0198-YK - 1

Applicant : Sony EMCS Corporation Saitama TEC
Kind of Equipment : Home AV Wireless System Transmitter
Model No. : HWS-AV10T
Serial No. : 51
Power : AC120V/60Hz (DC6V)
Mode : Transmitting (2415MHz)
Remarks :
Date : 1/6/2006
Phase : Single Phase
Temperature : 20 °C
Humidity : 27 %
Regulation : FCC Part15C § 15.207. (CISPR Pub. 22)

Engineer : Makoto Hosaka

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dB μ V]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]				QP [dB]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]	QP [dB]	AV [dB]
1.	0.2035	47.6	35.1	46.9	32.9	0.1	0.1	0.0	47.8	35.3	63.5	53.5	15.7	18.2
2.	0.3017	37.0	-	39.3	-	0.1	0.1	0.0	39.5	-	60.2	50.2	20.7	-
3.	0.5225	39.4	-	39.2	-	0.1	0.1	0.0	39.6	-	56.0	46.0	16.4	-
4.	0.8348	39.5	36.9	40.1	37.6	0.1	0.1	0.0	40.3	37.8	56.0	46.0	15.7	8.2
5.	1.8795	40.4	37.6	41.4	38.6	0.1	0.2	0.0	41.7	38.9	56.0	46.0	14.3	7.1
6.	2.5062	41.8	39.6	43.2	40.8	0.2	0.2	0.0	43.6	41.2	56.0	46.0	12.4	4.8
7.	3.2382	42.3	36.2	42.2	36.1	0.2	0.2	0.0	42.7	36.6	56.0	46.0	13.3	9.4

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.


■ LISN: KLS-05 (NSLK8126) ■ COAXIAL CABLE: KCC-33/34
■ EMI RECEIVER: KTR-01 (ES140)

DATA OF CONDUCTION TEST

UL Apex Co.,Ltd.
YAMAKITA No.2 SHIELD ROOM
Report No. : 26CE0198-YK = 1

Applicant : Sony EMCS Corporation Saitama TEC
Kind of Equipment : Home AV Wireless System Transmitter
Model No. : HWS-AV10T
Serial No. : 51
Power : AC120V/60Hz (DC6V)
Mode : Transmitting (2415MHz)
Remarks :
Date : 1/6/2006
Phase : Single Phase
Temperature : 20 °C
Humidity : 27 %
Regulation : FCC Part15C § 15. 207. (CISPR Pub. 22)

Engineer : Makoto Hosaka

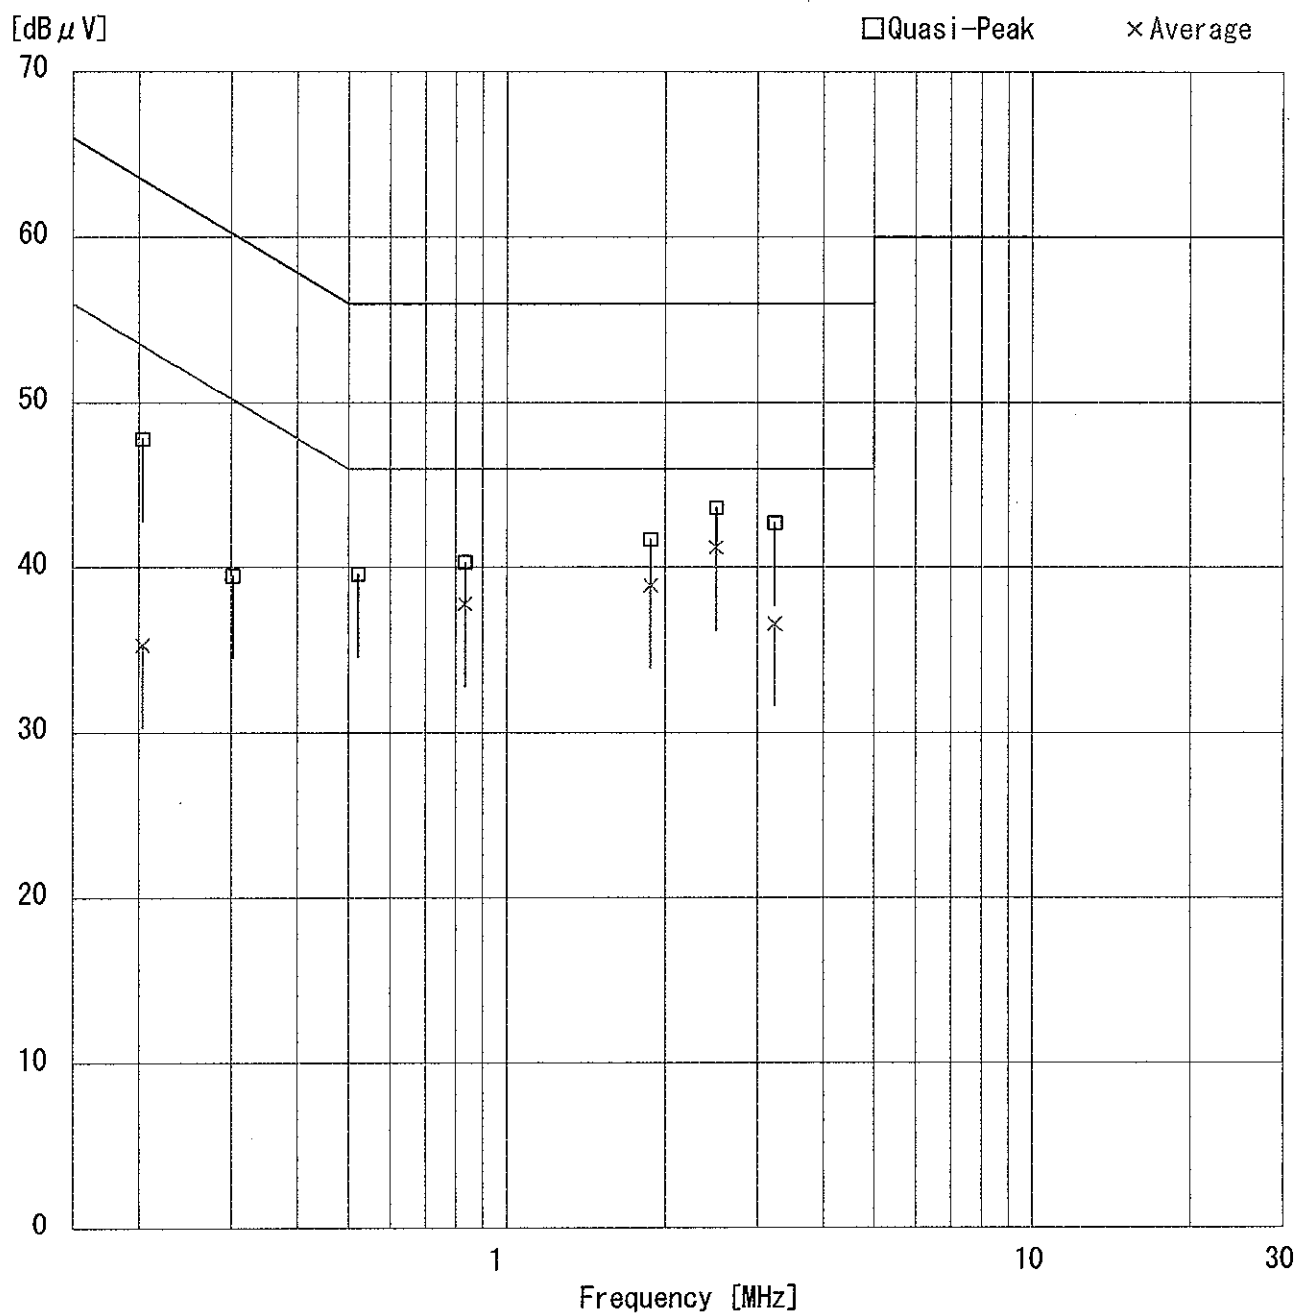

DATA OF CONDUCTION TEST CHART

UL Apex Co.,Ltd.

YAMAKITA No.2 SHIELD ROOM


Report No. : 26CE0198-YK = 1

Applicant : Sony EMCS Corporation Saitama TEC
Kind of Equipment : Home AV Wireless System Transmitter
Model No. : HWS-AV10T
Serial No. : 51
Power : AC120V/60Hz (DC6V)
Mode : Transmitting (2415MHz)
Remarks :
Date : 1/6/2006
Phase : Single Phase
Temperature : 20 °C
Humidity : 27 %
Regulation 1 : FCC Part15C § 15.207. (CISPR Pub.22)
Regulation 2 : None

Engineer : Makoto Hosaka


Emission Level [dB μ V]

PHASE:N

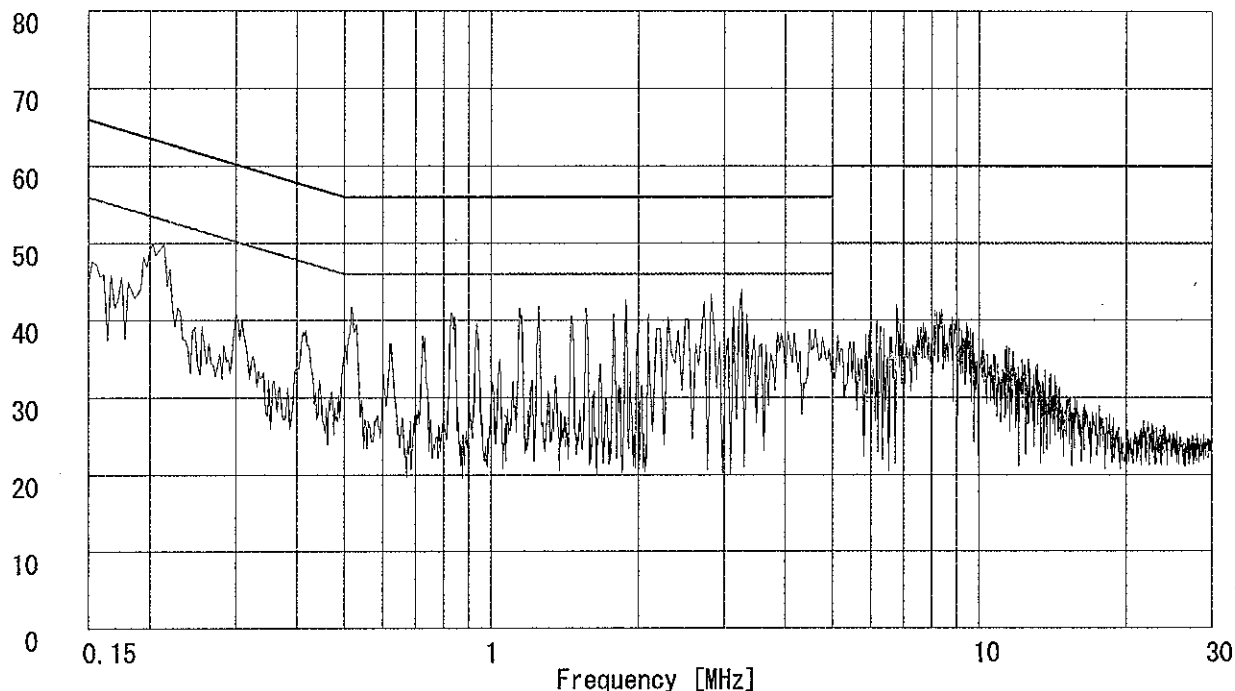

Emission Level [dB μ V]

PHASE:L1

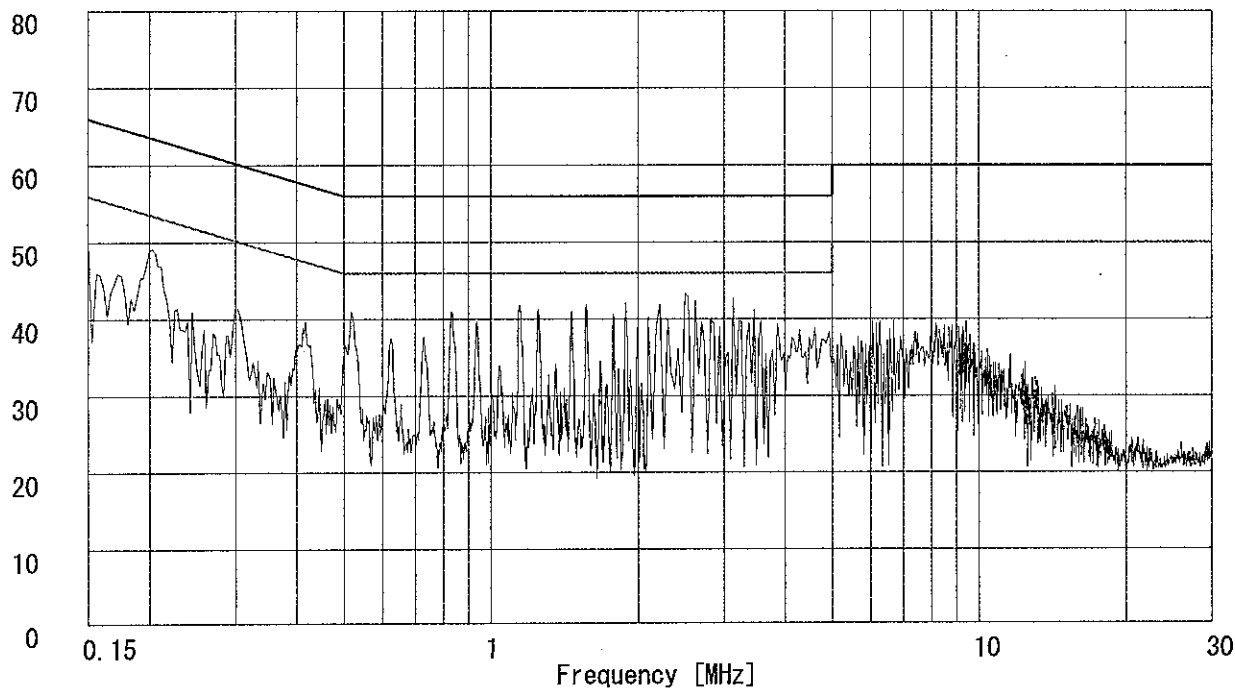

Page:

DATA OF CONDUCTION TEST CHART

UL Apex Co.,Ltd.

YAMAKITA No.2 SHIELD ROOM


Report No. : 26CE0198-YK $\Rightarrow$ 1

Applicant : Sony EMCS Corporation Saitama TEC
Kind of Equipment : Home AV Wireless System Transmitter
Model No. : HWS-AV10T
Serial No. : 51
Power : AC120V/60Hz (DC6V)
Mode : Transmitting (2429MHz)
Remarks :
Date : 1/6/2006
Phase : Single Phase
Temperature : 20 °C
Humidity : 27 %
Regulation 1 : FCC Part15C § 15.207. (CISPR Pub.22)
Regulation 2 : None

Engineer : Makoto Hosaka


Emission Level [dB μ V]

PHASE:N

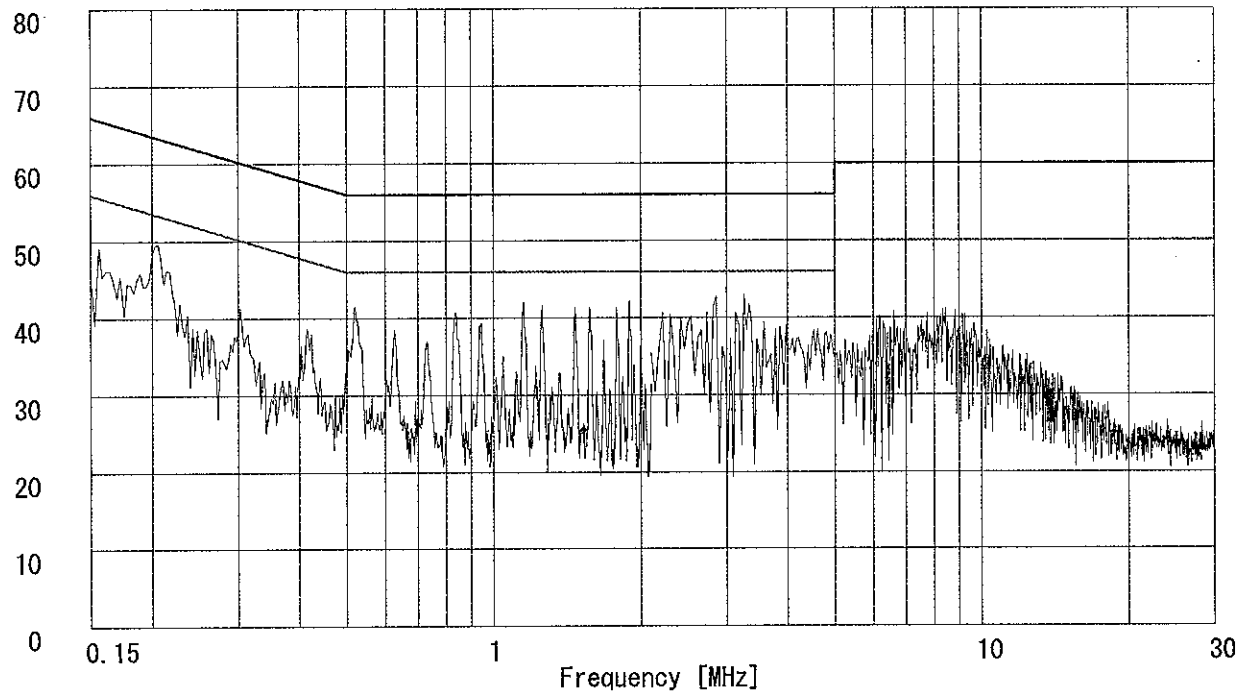

Emission Level [dB μ V]

PHASE:L1

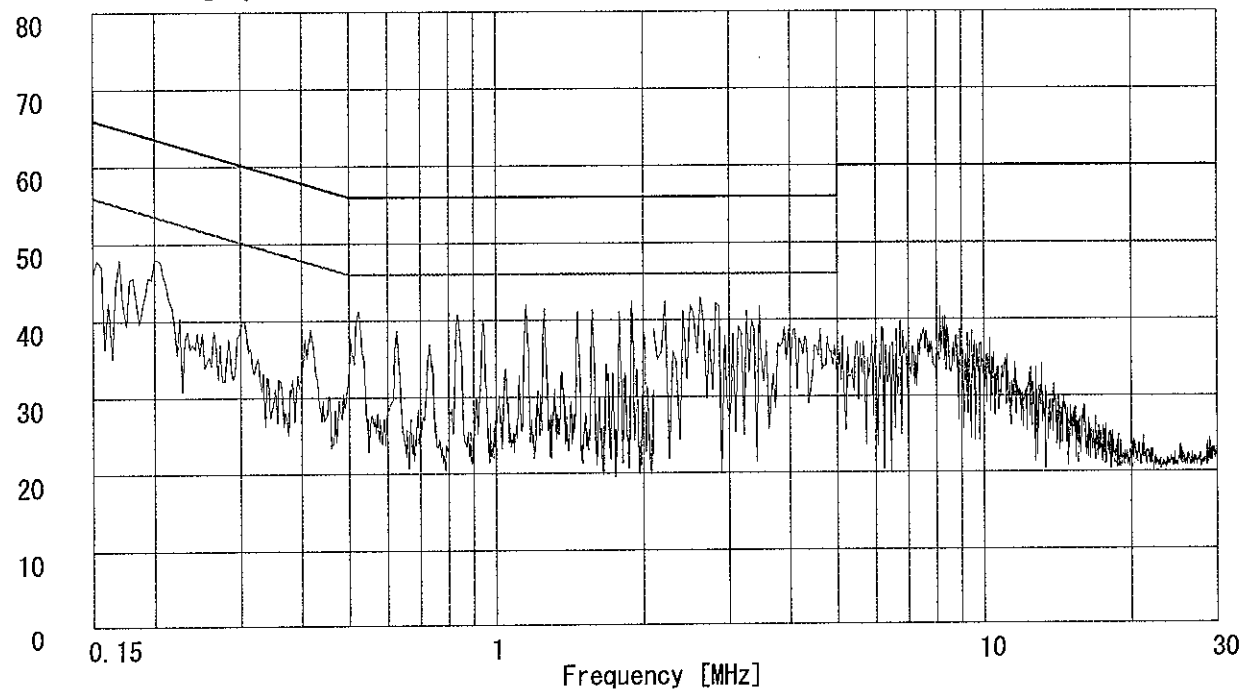

Page:

DATA OF CONDUCTION TEST CHART

UL Apex Co.,Ltd.

YAMAKITA No.2 SHIELD ROOM


Report No. : 26CE0198-YK-1

Applicant : Sony EMCS Corporation Saitama TEC
Kind of Equipment : Home AV Wireless System Transmitter
Model No. : HWS-AV10T
Serial No. : 51
Power : AC120V/60Hz (DC6V)
Mode : Transmitting(2457MHz)
Remarks :
Date : 1/6/2006
Phase : Single Phase
Temperature : 20 °C
Humidity : 27 %
Regulation 1 : FCC Part15C § 15.207. (CISPR Pub.22)
Regulation 2 : None

Engineer : Makoto Hosaka


Emission Level [dB μ V]

PHASE:N

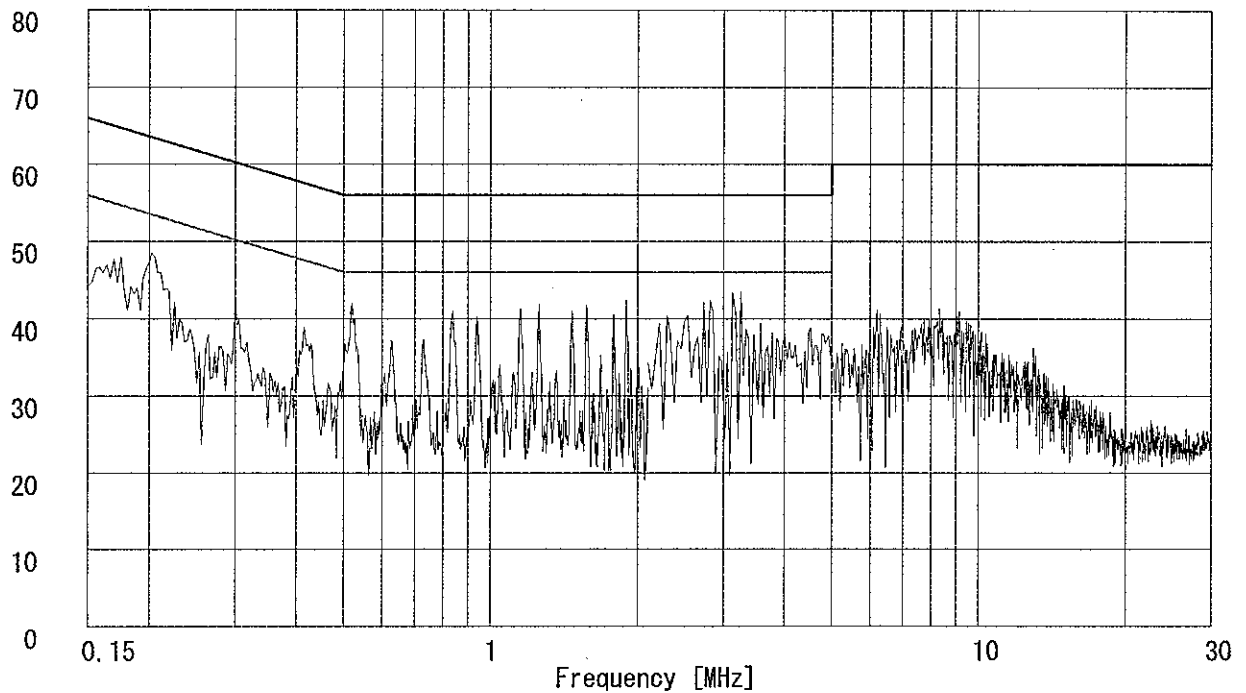

Emission Level [dB μ V]

PHASE:L1

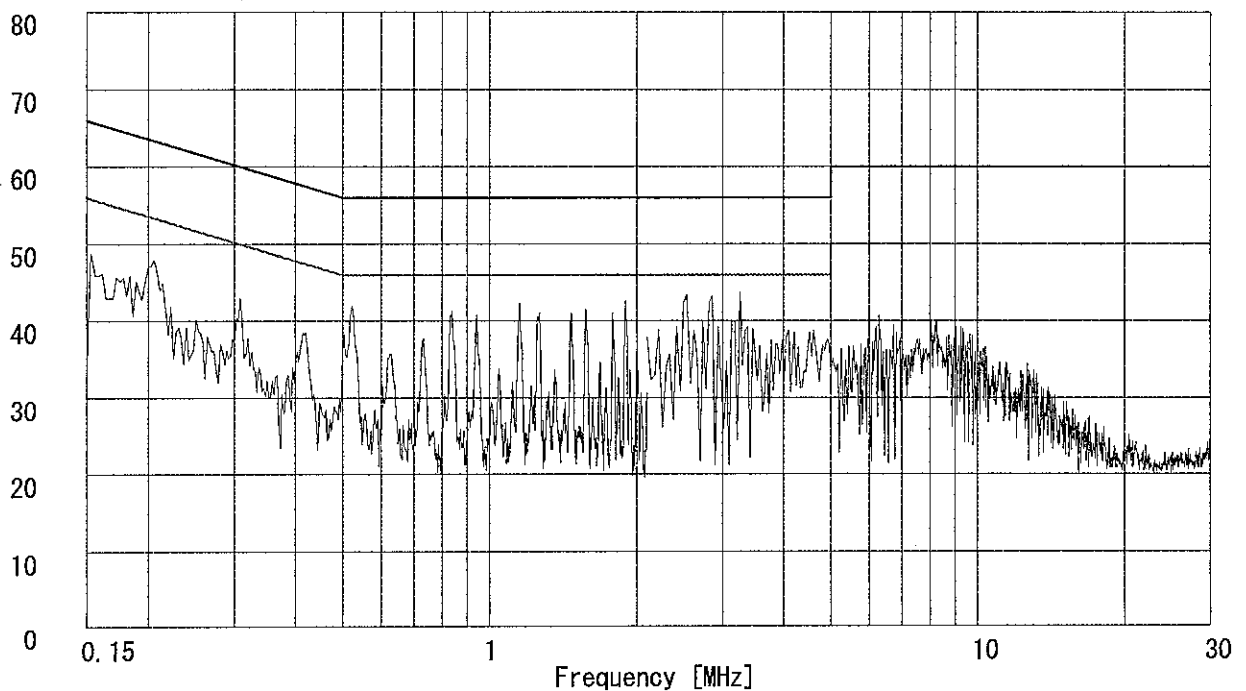


Page:

6dB Bandwidth: FCC 15.247(a)(2)


COMPANY : Sony EMCS Corporation Saitama TEC
EQUIPMENT : Home AV Wireless System Transmitter
MODEL NUMBER: HWS-AV10T
SERIAL NUMBER: 51
FCC ID : AK8HWSAV10T
POWER : AC120V/60Hz(DC6V)

UL Apex Co.,Ltd. Yamakita No.2 Shielded Room
REPORT NO : 26CE0198-YK
REGULATION : FCC Part15SubpartC 247(a)(2)
DATE : 2006/01/06
TEMP./HUMI : 20°C/29%
TEST MODE : Transmitting
ENGINEER : Makoto Hosaka


1. ch 1: 2415MHz/6dB Bandwidth:18.28MHz

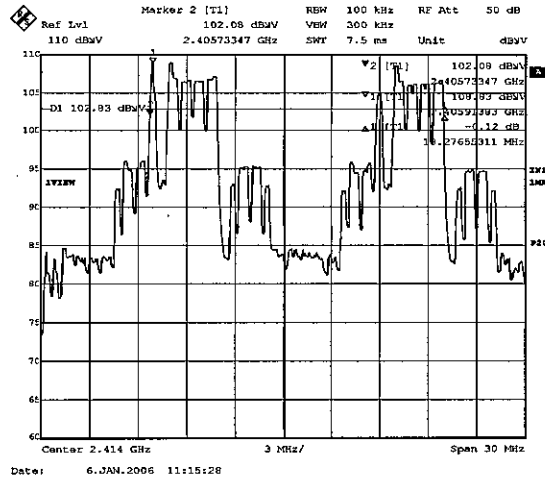

2. ch 2: 2429MHz/6dB Bandwidth:18.22MHz

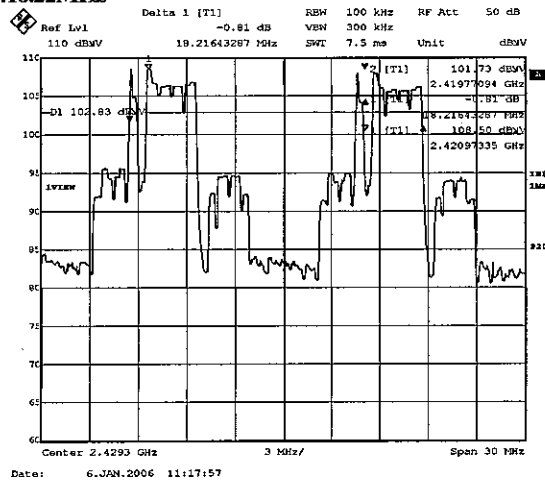

3. ch 4: 2457MHz/6dB Bandwidth:18.34MHz

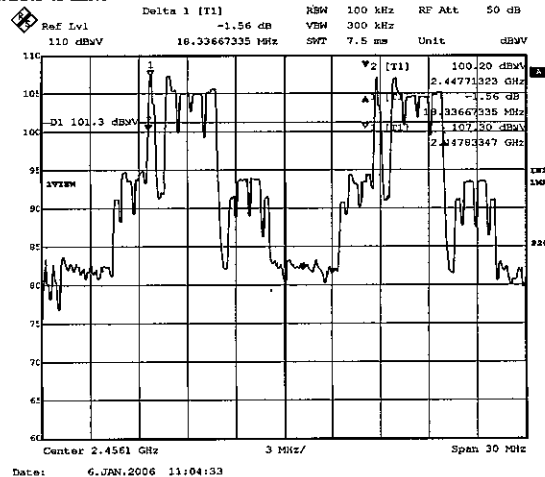

Maximum Peak Conducted Output Power

UL Apex Co.,Ltd

YAMAKITA NO.2 Shielded Room

COMPANY : Sony EMCS Corporation Saitama TEC REPORT NO : 26CE0198-YK-1
EQUIPMENT : Home AV Wireless System Transmitter REGULATION : Fcc Part15SubpartC 247(b)(3)
MODEL NUMBE: HWS-AV10T DATE : 2006/01/06
SERIAL NUMBE: 51 TEMP./HUMI : 20°C/29%
FCC ID : AK8HWSAV10T
POWER : AC120V/60Hz(DC6V)
TEST MODE : Transmitting

ENGINEER : Makoto Hosaka

CH	FREQ [MHz]	S/A Reading *1,*2 [dBm]	Cable Loss [dB]	Results [dBm]	Limit (1W) [dBm]	MARGIN [dB]
Low	2415.00	17.19	0.50	17.69	30.0	12.31
Mid	2429.00	16.94	0.50	17.44	30.0	12.56
High	2457.00	16.39	0.50	16.89	30.0	13.11

*1 S/A:Spectrum Analyzer


*2 Test was performed using the function of the spectrum analyzer measuring of channel power.

Maximum Peak Conducted Output Power: FCC 15.247(b)(3)


COMPANY : Sony EMCS Corporation Saitama TEC
EQUIPMENT : Home AV Wireless System Transmitter
MODEL NUMBER: HWS-AV10T
SERIAL NUMBER: 51
FCC ID : AK8HWSAV10T
POWER : AC120V/60Hz(DC6V)

UL Apex Co., Ltd. Yamakita No.2 Shielded Room
REPORT NO : 26CE0198-YK
REGULATION : Fcc Part15SubpartC 247(b)(3)
DATE : 2006/01/06
TEMP/HUMI : 20°C/29%
TEST MODE : Transmitting
ENGINEER : Makoto Hosaka


1. ch1:2415MHz

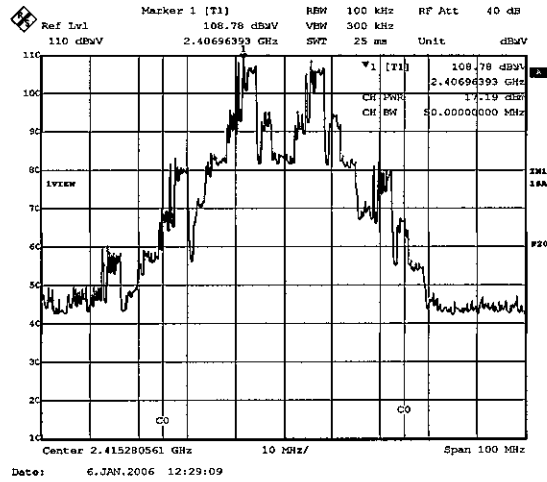

2. ch2:2429MHz

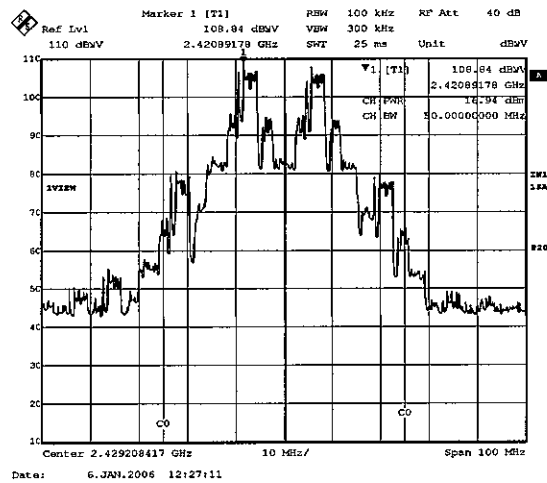

3. ch4:2457MHz

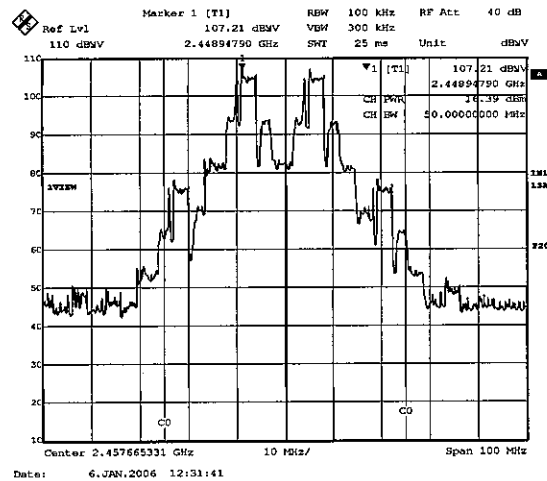


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)


COMPANY	: Sony EMCS Corporation Saitama TEC	REPORT NO	: 26CE0198-YK 1
EQUIPMENT	: Home AV Wireless System Transmitter	REGULATION	: FCC Part15SubpartC 247(d)
MODEL NUMBER	: HWS-AV10T	DATE	: 2006/01/06
SERIAL NUMBER	: 51	TEMP./HUMI	: 20°C/29%
FCC ID	: AK8HWSAV10T	TEST MODE	: Transmitting
POWER	: AC120V/60Hz(DC6V)	ENGINEER	: Makoto Hosaka

Ch1:2415MHz


1.

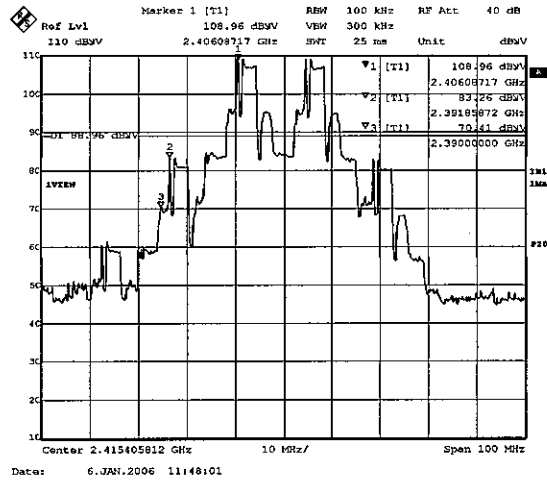

2.

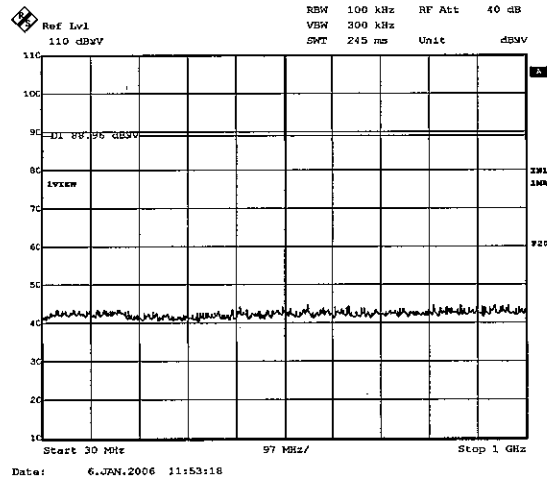

3.

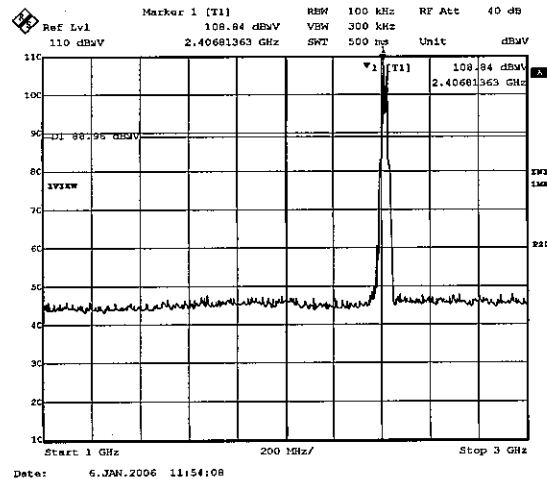


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)


COMPANY	: Sony EMCS Corporation Saitama TEC	REPORT NO	: 26CE0198-YK - 1
EQUIPMENT	: Home AV Wireless System Transmitter	REGULATION	: FCC Part15SubpartC 247(d)
MODEL NUMBER	: HWS-AV10T	DATE	: 2006/01/06
SERIAL NUMBER	: 51	TEMP./HUMI	: 20°C/29%
FCC ID	: AK8HWSAV10T	TEST MODE	: Transmitting
POWER	: AC120V/60Hz(DC6V)	ENGINEER	: Makoto Hosaka

Ch1:2415MHz

4.

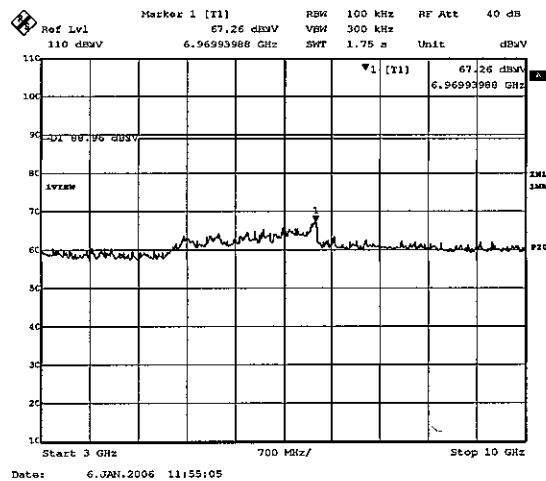

5.

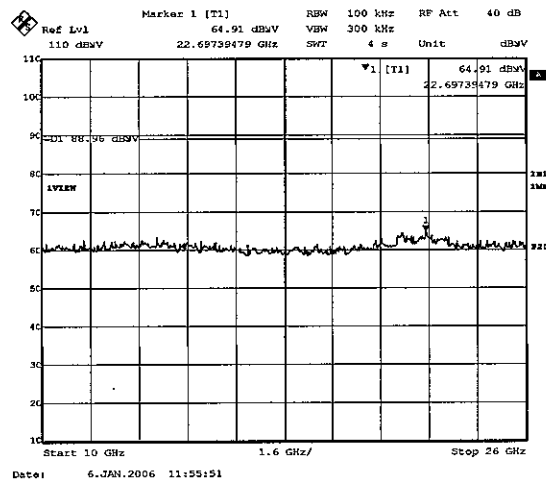


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)


COMPANY	: Sony EMCS Corporation Saitama TEC	REPORT NO	: 26CE0198-YK 1
EQUIPMENT	: Home AV Wireless System Transmitter	REGULATION	: FCC Part15SubpartC 247(d)
MODEL NUMBER	: HWS-AV10T	DATE	: 2006/01/06
SERIAL NUMBER	: 51	TEMP./HUMI	: 20°C/29%
FCC ID	: AK8HWSAV10T	TEST MODE	: Transmitting
POWER	: AC120V/60Hz(DC6V)	ENGINEER	: Makoto Hosaka

Ch2:2429MHz


1.

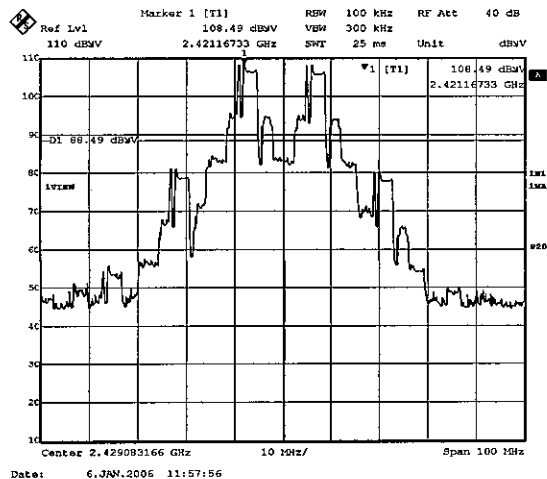

2.

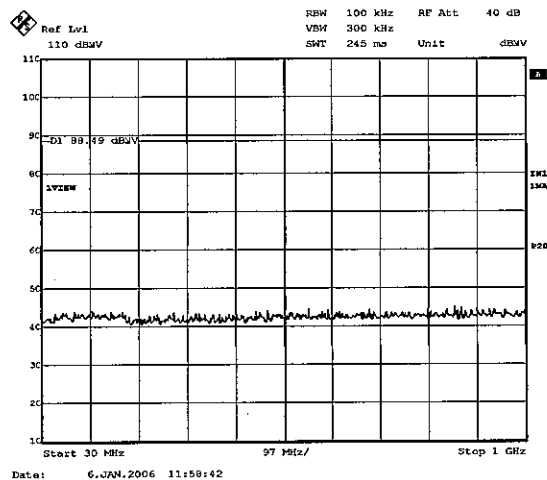

3.

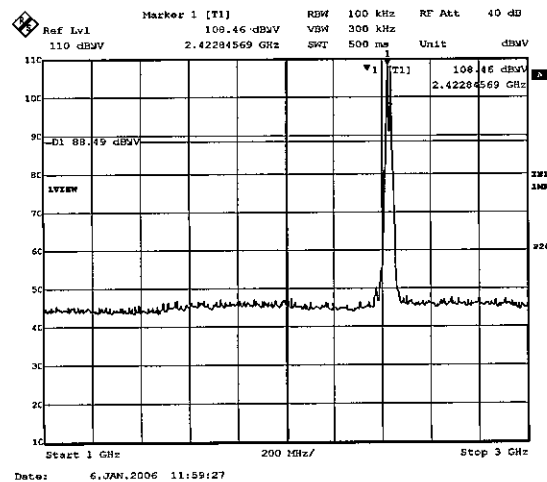


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)


COMPANY	: Sony EMCS Corporation Saitama TEC	REPORT NO	: 26CE0198-YK ¹
EQUIPMENT	: Home AV Wireless System Transmitter	REGULATION	: FCC Part15SubpartC 247(d)
MODEL NUMBER	: HWS-AV10T	DATE	: 2006/01/06
SERIAL NUMBER	: 51	TEMP./HUMI	: 20°C/29%
FCC ID	: AK8HWSAV10T	TEST MODE	: Transmitting
POWER	: AC120V/60Hz(DC6V)	ENGINEER	: Makoto Hosaka

Ch2:2429MHz

4.

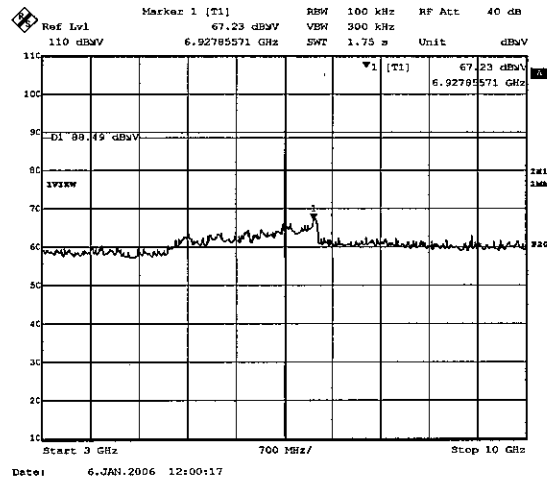

5.

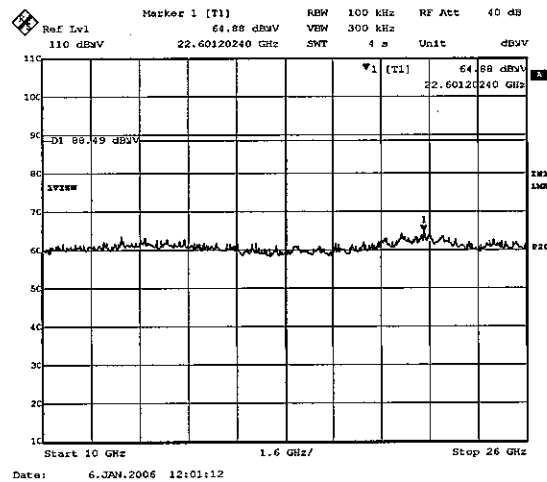


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)


COMPANY	: Sony EMCS Corporation Saitama TEC	REPORT NO	: 26CE0198-YK - 1
EQUIPMENT	: Home AV Wireless System Transmitter	REGULATION	: FCC Part15SubpartC 247(d)
MODEL NUMBER	: HWS-AV10T	DATE	: 2006/01/06
SERIAL NUMBER	: 51	TEMP/HUMI	: 20°C/29%
FCC ID	: AK8HWSAV10T	TEST MODE	: Transmitting
POWER	: AC120V/60Hz(DC6V)	ENGINEER	: Makoto Hosaka

Ch4:2457MHz


1.

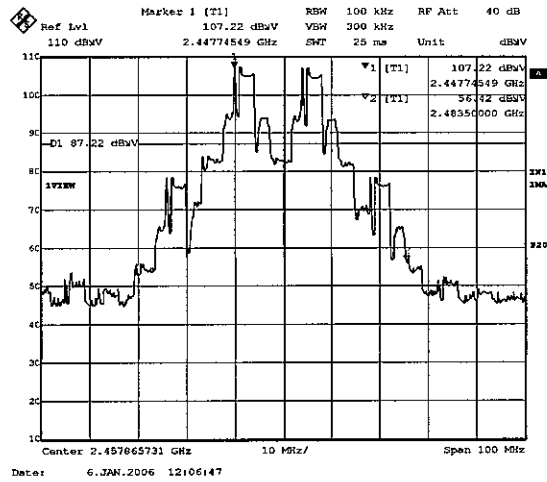

2.

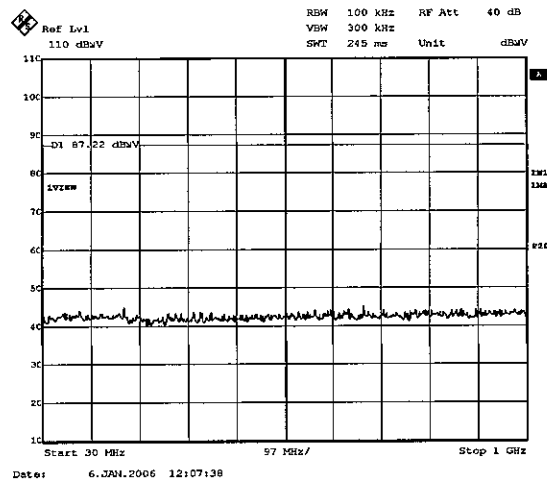

3.

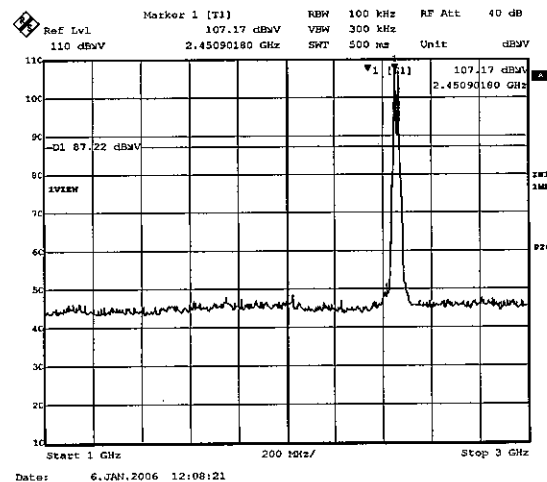


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)


COMPANY	: Sony EMCS Corporation Saitama TEC	REPORT NO	: 26CE0198-YK
EQUIPMENT	: Home AV Wireless System Transmitter	REGULATION	: FCC Part15SubpartC 247(d)
MODEL NUMBER	: HWS-AV10T	DATE	: 2006/01/06
SERIAL NUMBER	: 51	TEMP/HUMI	: 20°C/29%
FCC ID	: AK8HWSAV10T	TEST MODE	: Transmitting
POWER	: AC120V/60Hz(DC6V)	ENGINEER	: Makoto Hosaka

Ch4:2457MHz

4.

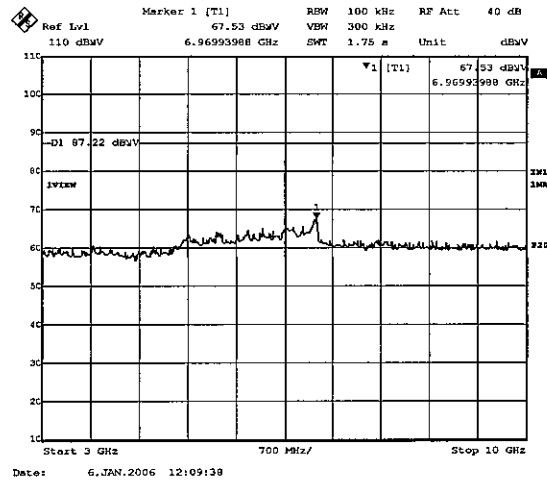

5.

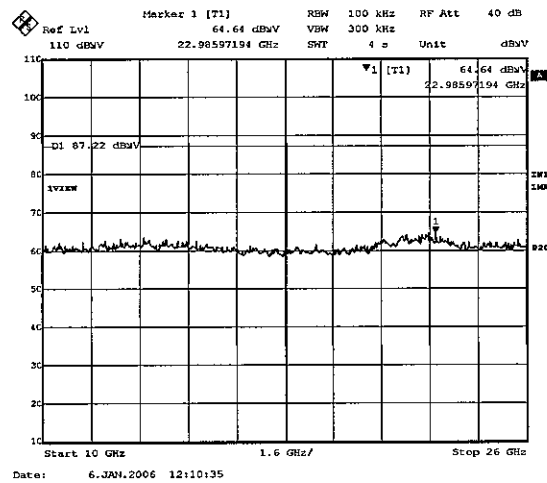

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 OPEN TEST SITE

Report No. : 26CE0198-YK [

Applicant : Sony EMCS Corporation Saitama TEC
 Kind of Equipment : Home AV Wireless System Transmitter
 Model No. : HWS-AV10T
 Serial No. : 51
 Power : AC120V/60Hz (DC6V)
 Mode : Transmitting (2415MHz)
 Remarks :
 Date : 12/28/2005
 Test Distance : 3 m
 Temperature : 13 °C
 Humidity : 33 %
 Regulation : FCC Part15C § 15.209

Engineer : Go Ishiwata

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	67.71	BB	32.8	45.2	6.9	28.4	2.1	6.0	19.4	31.8	40.0	20.6	8.2
2.	81.00	BB	34.0	47.0	6.1	28.3	2.3	6.0	20.1	33.1	40.0	19.9	6.9
3.	94.49	BB	29.5	37.2	9.1	28.3	2.5	6.0	18.8	26.5	43.5	24.7	17.0
4.	188.99	BB	29.0	29.2	16.6	27.9	3.6	6.0	27.3	27.5	43.5	16.2	16.0
5.	283.49	BB	35.0	35.7	19.8	27.7	4.6	6.0	37.7	38.4	46.0	8.3	7.6
6.	472.49	BB	31.3	33.9	18.1	29.0	6.2	6.0	32.6	35.2	46.0	13.4	10.8

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KBA-01 (BBA9106) 30-299.99MHz/KLA-01 (USLP9143) 300-1000MHz

■ CABLE: KCC-10/11/12/13/18 ■ PREAMP: KAF-01 (8447D) ■ EMI RECEIVER: KTR-02 (ESCS30)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 OPEN TEST SITE

Report No. : 26CE0198-YK - 1

Applicant : Sony EMCS Corporation Saitama TEC
 Kind of Equipment : Home AV Wireless System Transmitter
 Model No. : HWS-AV10T
 Serial No. : 51
 Power : AC120V/60Hz (DC6V)
 Mode : Transmitting (2429MHz)
 Remarks :
 Date : 12/28/2005
 Test Distance : 3 m
 Temperature : 13 °C
 Humidity : 33 %
 Regulation : FCC Part15C § 15.209

Engineer : Go Ishiwata

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	67.71	BB	32.9	44.9	6.9	28.4	2.1	6.0	19.5	31.5	40.0	20.5	8.5
2.	81.00	BB	33.8	47.1	6.1	28.3	2.3	6.0	19.9	33.2	40.0	20.1	6.8
3.	94.49	BB	29.2	37.6	9.1	28.3	2.5	6.0	18.5	26.9	43.5	25.0	16.6
4.	188.98	BB	28.7	29.0	16.6	27.9	3.6	6.0	27.0	27.3	43.5	16.5	16.2
5.	283.50	BB	34.9	35.6	19.8	27.7	4.6	6.0	37.6	38.3	46.0	8.4	7.7
6.	472.50	BB	30.6	34.1	18.1	29.0	6.2	6.0	31.9	35.4	46.0	14.1	10.6

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KBA-01 (BBA9106) 30-299.99MHz/KLA-01 (USLP9143) 300-1000MHz

■ CABLE: KCC-10/11/12/13/18 ■ PREAMP: KAF-01 (8447D) ■ EMI RECEIVER: KTR-02 (ESCS30)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 OPEN TEST SITE

Report No. : 26CE0198-YK ⇒ 1

Applicant : Sony EMCS Corporation Saitama TEC
 Kind of Equipment : Home AV Wireless System Transmitter
 Model No. : HWS-AV10T
 Serial No. : 51
 Power : AC120V/60Hz (DC6V)
 Mode : Transmitting (2457MHz)
 Remarks :
 Date : 12/28/2005
 Test Distance : 3 m
 Temperature : 13 °C
 Humidity : 33 %
 Regulation : FCC Part15C § 15. 209

Engineer : Go Ishiwata

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	67.73	BB	32.7	45.4	6.9	28.4	2.1	6.0	19.3	32.0	40.0	20.7	8.0
2.	81.00	BB	34.0	47.5	6.1	28.3	2.3	6.0	20.1	33.6	40.0	19.9	6.4
3.	94.49	BB	29.4	38.1	9.1	28.3	2.5	6.0	18.7	27.4	43.5	24.8	16.1
4.	188.99	BB	28.2	28.9	16.6	27.9	3.6	6.0	26.5	27.2	43.5	17.0	16.3
5.	283.50	BB	34.7	35.7	19.8	27.7	4.6	6.0	37.4	38.4	46.0	8.6	7.6
6.	472.49	BB	30.1	33.3	18.1	29.0	6.2	6.0	31.4	34.6	46.0	14.6	11.4

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KBA-01 (BBA9106) 30-299.99MHz/KLA-01 (USLP9143) 300-1000MHz

■ CABLE: KCC-10/11/12/13/18 ■ PREAMP: KAF-01 (8447D) ■ EMI RECEIVER: KTR-02 (ESCS30)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 OPEN TEST SITE

Report No. : 26CE0198-YK-1

Applicant : Sony EMCS Corporation Saitama TEC
 Kind of Equipment : Home AV Wireless System Transmitter
 Model No. : HWS-AV10T
 Serial No. : 51
 Power : AC120V/60Hz (DC6V)
 Mode : Transmitting (2415MHz)
 Remarks : PK (RBW:1MHz, VBW:1MHz)
 Date : 12/28/2005
 Test Distance : 3 m
 Temperature : 13 °C
 Humidity : 33 %
 Regulation : FCC Part15C § 15.209 (PK Detection)

Engineer : Go Ishiwata

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	2390.00	BB	53.8	52.4	28.7	37.0	4.0	10.0	59.5	58.1	74.0	14.5	15.9
2.	4830.00	BB	47.9	49.2	33.0	36.5	5.5	0.5	50.4	51.7	74.0	23.6	22.3
3.	7245.00	BB	41.1	42.4	36.5	36.8	6.6	0.2	47.6	48.9	74.0	26.4	25.1
4.	9660.00	BB	40.0	43.1	38.4	37.1	7.4	0.4	49.1	52.2	74.0	24.9	21.8
5.	12075.00	BB	41.5	41.4	40.6	36.1	8.2	0.0	54.2	54.1	74.0	19.8	19.9
6.	14490.00	BB	40.5	41.5	43.4	35.1	8.9	0.3	58.0	59.0	74.0	16.0	15.0
7.	16905.00	BB	40.8	42.3	42.4	35.6	9.6	0.6	57.8	59.3	74.0	16.2	14.7
8.	19320.00	BB	43.5	43.2	38.2	34.9	10.3	0.0	57.1	56.8	74.0	16.9	17.2
9.	21735.00	BB	42.6	43.1	38.8	35.5	10.7	0.0	56.6	57.1	74.0	17.4	16.9
10.	24150.00	BB	43.4	43.5	39.1	34.9	11.1	0.0	58.7	58.8	74.0	15.3	15.2

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz / KHA-03 (3160-09) 18-26GHz

■ CABLE: KCC-D3/D7 ■ PREAMP: KAF-02 (8449B) ■ SPECTRUMANALYZER: R3271A (KSA-04)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 OPEN TEST SITE

Report No. : 26CE0198-YK - 1

Applicant : Sony EMCS Corporation Saitama TEC
 Kind of Equipment : Home AV Wireless System Transmitter
 Model No. : HWS-AV10T
 Serial No. : 51
 Power : AC120V/60Hz (DC6V)
 Mode : Transmitting(2415MHz)
 Remarks : AV (RBW:1MHz, VBW:10Hz)
 Date : 12/28/2005
 Test Distance : 3 m
 Temperature : 13 °C
 Humidity : 33 %
 Regulation : FCC Part15C § 15.209 (AV Detection)

Engineer : Go Ishiwata

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	2390.00	BB	40.0	39.9	28.7	37.0	4.0	10.0	45.7	45.6	54.0	8.3	8.4
2.	4830.00	BB	35.7	38.1	33.0	36.5	5.5	0.5	38.2	40.6	54.0	15.8	13.4
3.	7245.00	BB	30.2	30.3	36.5	36.8	6.6	0.2	36.7	36.8	54.0	17.3	17.2
4.	9660.00	BB	32.8	32.8	38.4	37.1	7.4	0.4	41.9	41.9	54.0	12.1	12.1
5.	12075.00	BB	32.5	32.3	40.6	36.1	8.2	0.0	45.2	45.0	54.0	8.8	9.0
6.	14490.00	BB	31.5	31.4	43.4	35.1	8.9	0.3	49.0	48.9	54.0	5.0	5.1
7.	16905.00	BB	32.3	32.6	42.4	35.6	9.6	0.6	49.3	49.6	54.0	4.7	4.4
8.	19320.00	BB	33.2	33.1	38.2	34.9	10.3	0.0	46.8	46.7	54.0	7.2	7.3
9.	21735.00	BB	33.9	34.7	38.8	35.5	10.7	0.0	47.9	48.7	54.0	6.1	5.3
10.	24150.00	BB	34.1	35.1	39.1	34.9	11.1	0.0	49.4	50.4	54.0	4.6	3.6

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ANTENNA:KHA-01 (SAS-200 571) 1-18GHz/KHA-03 (3160-09) 18-26GHz

■CABLE:KCC-D3/D7 ■PREAMP:KAF-02 (8449B) ■SPECTRUMANALYZER:R3271A (KSA-04)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 OPEN TEST SITE

Report No. : 26CE0198-YK **1**

Applicant : Sony EMCS Corporation Saitama TEC
 Kind of Equipment : Home AV Wireless System Transmitter
 Model No. : HWS-AV10T
 Serial No. : 51
 Power : AC120V/60Hz (DC6V)
 Mode : Transmitting (2429MHz)
 Remarks : PK (RBW:1MHz, VBW:1MHz)
 Date : 12/28/2005
 Test Distance : 3 m
 Temperature : 13 °C
 Humidity : 33 %
 Regulation : FCC Part15C § 15.209 (PK Detection)

Engineer : Go Ishiwata

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	4858.00	BB	47.5	49.5	33.0	36.5	5.5	0.5	50.0	52.0	74.0	24.0	22.0
2.	7287.00	BB	41.7	41.9	36.6	36.8	6.7	0.2	48.4	48.6	74.0	25.6	25.4
3.	9716.00	BB	41.1	42.1	38.4	37.1	7.4	0.4	50.2	51.2	74.0	23.8	22.8
4.	12145.00	BB	40.8	40.9	40.5	36.0	8.2	0.0	53.5	53.6	74.0	20.5	20.4
5.	14574.00	BB	40.3	41.3	43.2	35.2	8.9	0.4	57.6	58.6	74.0	16.4	15.4
6.	17003.00	BB	41.2	42.4	42.8	35.6	9.7	0.6	58.7	59.9	74.0	15.3	14.1
7.	19432.00	BB	42.2	43.3	38.0	35.1	10.4	0.0	55.5	56.6	74.0	18.5	17.4
8.	21861.00	BB	42.9	43.4	38.8	35.3	10.8	0.0	57.2	57.7	74.0	16.8	16.3
9.	24290.00	BB	43.5	43.6	39.2	35.0	11.1	0.0	58.8	58.9	74.0	15.2	15.1

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz / KHA-03 (3160-09) 18-26GHz

■ CABLE: KCC-D3/D7 ■ PREAMP: KAF-02 (8449B) ■ SPECTRUMANALYZER: R3271A (KSA-04)

Page:

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 OPEN TEST SITE

Report No. : 26CE0198-YK - 1

Applicant : Sony EMCS Corporation Saitama TEC
 Kind of Equipment : Home AV Wireless System Transmitter
 Model No. : HWS-AV10T
 Serial No. : 51
 Power : AC120V/60Hz (DC6V)
 Mode : Transmitting (2429MHz)
 Remarks : AV (RBW:1MHz, VBW:10Hz)
 Date : 12/28/2005
 Test Distance : 3 m
 Temperature : 13 °C
 Humidity : 33 %
 Regulation : FCC Part15C § 15.209 (AV Detection)

Engineer : Go Ishiwata

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	4858.00	BB	35.3	37.1	33.0	36.5	5.5	0.5	37.8	39.6	54.0	16.2	14.4
2.	7287.00	BB	30.9	30.9	36.6	36.8	6.7	0.2	37.6	37.6	54.0	16.4	16.4
3.	9716.00	BB	32.1	32.1	38.4	37.1	7.4	0.4	41.2	41.2	54.0	12.8	12.8
4.	12145.00	BB	32.6	33.0	40.5	36.0	8.2	0.0	45.3	45.7	54.0	8.7	8.3
5.	14574.00	BB	32.2	32.1	43.2	35.2	8.9	0.4	49.5	49.4	54.0	4.5	4.6
6.	17003.00	BB	32.0	31.9	42.8	35.6	9.7	0.6	49.5	49.4	54.0	4.5	4.6
7.	19432.00	BB	32.1	32.8	38.0	35.1	10.4	0.0	45.4	46.1	54.0	8.6	7.9
8.	21861.00	BB	34.5	34.1	38.8	35.3	10.8	0.0	48.8	48.4	54.0	5.2	5.6
9.	24290.00	BB	34.1	34.9	39.2	35.0	11.1	0.0	49.4	50.2	54.0	4.6	3.8

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz / KHA-03 (3160-09) 18-26GHz

■ CABLE: KCC-D3/D7 ■ PREAMP: KAF-02 (8449B) ■ SPECTRUMANALYZER: R3271A (KSA-04)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 OPEN TEST SITE

Report No. : 26CE0198-YK - 1

Applicant : Sony EMCS Corporation Saitama TEC
 Kind of Equipment : Home AV Wireless System Transmitter
 Model No. : HWS-AV10T
 Serial No. : 51
 Power : AC120V/60Hz (DC6V)
 Mode : Transmitting (2457MHz)
 Remarks : PK (RBW:1MHz, VBW:1MHz)
 Date : 12/28/2005
 Test Distance : 3 m
 Temperature : 13 °C
 Humidity : 33 %
 Regulation : FCC Part15C § 15.209 (PK Detection)

Engineer : Go Ishiwata

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	2483.50	BB	53.3	50.6	28.8	37.1	4.0	10.0	59.0	56.3	74.0	15.0	17.7
2.	4914.00	BB	47.6	49.1	33.2	36.4	5.6	0.5	50.5	52.0	74.0	23.5	22.0
3.	7371.00	BB	41.0	41.2	36.7	36.8	6.7	0.2	47.8	48.0	74.0	26.2	26.0
4.	9828.00	BB	41.9	41.9	38.5	37.1	7.4	0.3	51.0	51.0	74.0	23.0	23.0
5.	12285.00	BB	41.2	40.7	40.4	35.9	8.1	0.0	53.8	53.3	74.0	20.2	20.7
6.	14742.00	BB	40.6	41.0	42.7	35.4	9.0	0.6	57.5	57.9	74.0	16.5	16.1
7.	17199.00	BB	41.1	40.9	43.8	35.6	9.6	0.4	59.3	59.1	74.0	14.7	14.9
8.	19656.00	BB	42.6	43.0	38.0	35.1	10.5	0.0	56.0	56.4	74.0	18.0	17.6
9.	22113.00	BB	43.1	43.3	38.9	35.0	10.9	0.0	57.9	58.1	74.0	16.1	15.9
10.	24570.00	BB	43.9	44.2	39.3	35.0	11.2	0.0	59.4	59.7	74.0	14.6	14.3

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

■ANTENNA:KHA-01 (SAS-200 571) 1-18GHz/KHA-03 (3160-09) 18-26GHz

■CABLE:KCC-D3/D7 ■PREAMP:KAF-02 (8449B) ■SPECTRUMANALYZER:R3271A (KSA-04)

Page:

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 OPEN TEST SITE

Report No. : 26CE0198-YK-1

Applicant : Sony EMCS Corporation Saitama TEC
 Kind of Equipment : Home AV Wireless System Transmitter
 Model No. : HWS-AV10T
 Serial No. : 51
 Power : AC120V/60Hz (DC6V)
 Mode : Transmitting (2457MHz)
 Remarks : AV (RBW:1MHz, VBW:10Hz)
 Date : 12/28/2005
 Test Distance : 3 m
 Temperature : 13 °C
 Humidity : 33 %
 Regulation : FCC Part15C § 15.209 (AV Detection)

Engineer : Go Ishiwata

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	2483.50	BB	41.5	39.6	28.8	37.1	4.0	10.0	47.2	45.3	54.0	6.8	8.7
2.	4914.00	BB	35.6	37.2	33.2	36.4	5.6	0.5	38.5	40.1	54.0	15.5	13.9
3.	7371.00	BB	31.1	31.0	36.7	36.8	6.7	0.2	37.9	37.8	54.0	16.1	16.2
4.	9828.00	BB	32.9	32.2	38.5	37.1	7.4	0.3	42.0	41.3	54.0	12.0	12.7
5.	12285.00	BB	33.0	32.8	40.4	35.9	8.1	0.0	45.6	45.4	54.0	8.4	8.6
6.	14742.00	BB	32.1	31.9	42.7	35.4	9.0	0.6	49.0	48.8	54.0	5.0	5.2
7.	17199.00	BB	32.4	32.4	43.8	35.6	9.6	0.4	50.6	50.6	54.0	3.4	3.4
8.	19656.00	BB	33.1	33.0	38.0	35.1	10.5	0.0	46.5	46.4	54.0	7.5	7.6
9.	22113.00	BB	34.6	34.5	38.9	35.0	10.9	0.0	49.4	49.3	54.0	4.6	4.7
10.	24570.00	BB	34.8	35.3	39.3	35.0	11.2	0.0	50.3	50.8	54.0	3.7	3.2

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz / KHA-03 (3160-09) 18-26GHz

■ CABLE: KCC-D3/D7 ■ PREAMP: KAF-02 (8449B) ■ SPECTRUMANALYZER: R3271A (KSA-04)

Power Density (Conducted)

UL Apex Co.,Ltd
YAMAKITA NO.2 Shielded Room

COMPANY : Sony EMCS Corporation Saitama TEC REPORT NO : 26CE0198-YK - **1**
EQUIPMENT : Home AV Wireless System Transmitter REGULATION : Fcc Part15SubpartC 247(e)
MODEL NUMBER : HWS-AV10T DATE : 2006/01/06
SERIAL NUMBER : 51 TEMP./HUMI : 20°C/29%
FCC ID : AK8HWSAV10T
POWER : AC120V/60Hz(DC6V)
TEST MODE : Transmitting

ENGINEER : Makoto Hosaka

CH	FREQ	S/A Reading *	Cable Loss	Results	Limit	MARGIN
	[GHz]	[dBm]	[dB]	[dBm]	[dBm]	[dB]
Low	2.4071	-1.98	0.5	-1.48	8.0	9.5
Mid	2.4210	-2.69	0.5	-2.19	8.0	10.2
High	2.4491	-3.95	0.5	-3.45	8.0	11.5

*S/A Reading[dBm] = S/A Reading[dBuV] - 107[dB]


S/A:Spectrum Analyzer

Power Density: FCC 15.247(e)


COMPANY : Sony EMCS Corporation Saitama TEC
EQUIPMENT : Home AV Wireless System Transmitter
MODEL NUMBER: HWS-AV10T
SERIAL NUMBER: 51
FCC ID : AK8HWSAV10T
POWER : AC120V/60Hz(DC6V)

UL Apex Co.,Ltd. Yamakita No.2 Shielded Room
REPORT NO : 26CE0198-YK - 1
REGULATION : FCC Part15SubpartC 247(e)
DATE : 2006/01/06
TEMP/HUMI : 20°C/29%
TEST MODE : Transmitting
ENGINEER : Makoto Hosaka


1. ch 1: 2415MHz

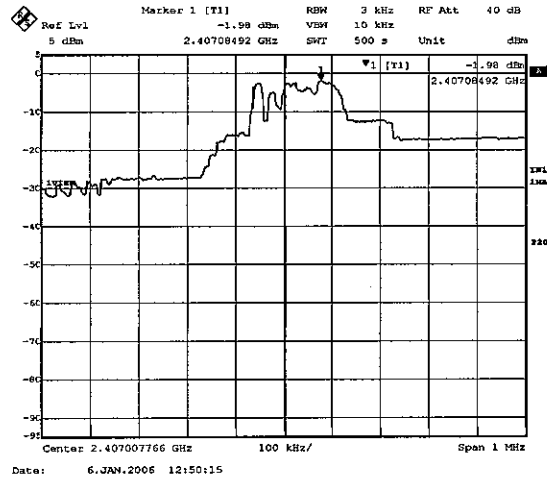

2. ch 6: 2429MHz

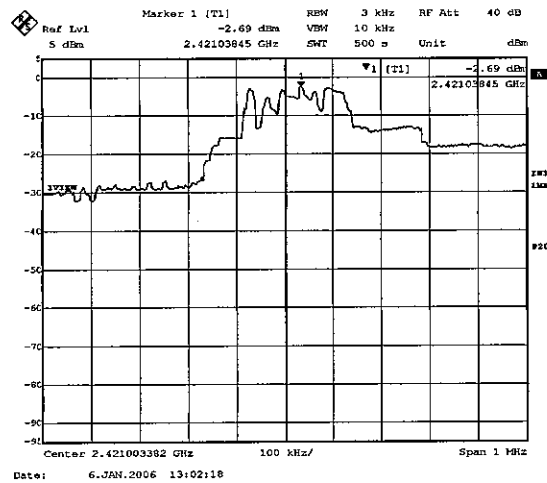


3. ch 4: 2457MHz

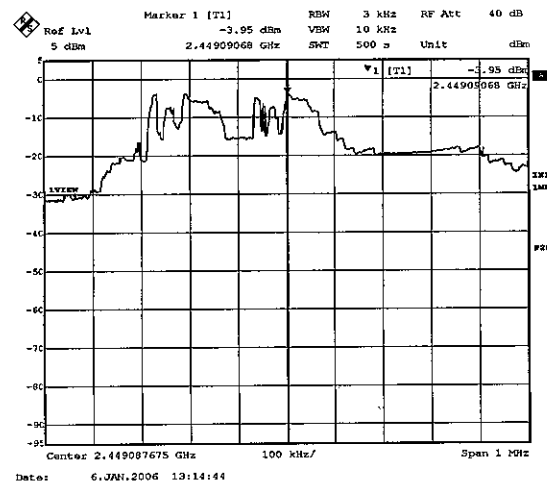


Occupied Bandwidth(99%)

COMPANY	: Sony EMCS Corporation Saitama TEC	REPORT NO	: 26CE0198-YK - 1
EQUIPMENT	: Home AV Wireless System Transmitter	REGULATION	: FCC Part15SubpartC 247
MODEL NUMBER	: HWS-AV10T	DATE	: 2006/01/06
SERIAL NUMBER	: 51	TEMP./HUMI	: 20°C/29%
FCC ID	: AK8HWSAV10T	TEST MODE	: Transmitting
POWER	: AC120V/60Hz(DC6V)	ENGINEER	: Makoto Hosaka


1. ch 1: 2415MHz/Occupied Bandwidth:28.38MHz

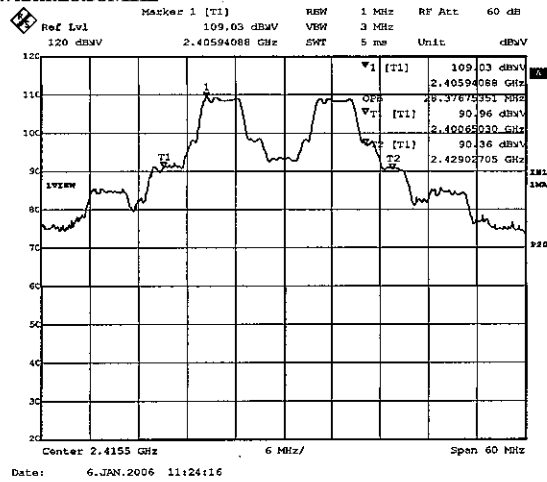

2. ch 2: 2429MHz/Occupied Bandwidth:28.02MHz

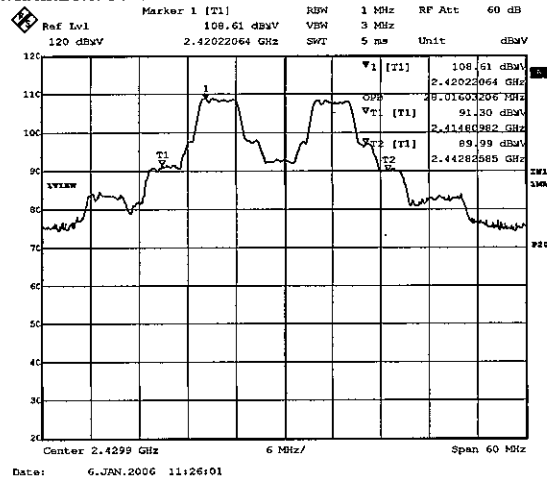

3. ch 4: 2457MHz/Occupied Bandwidth:28.26MHz

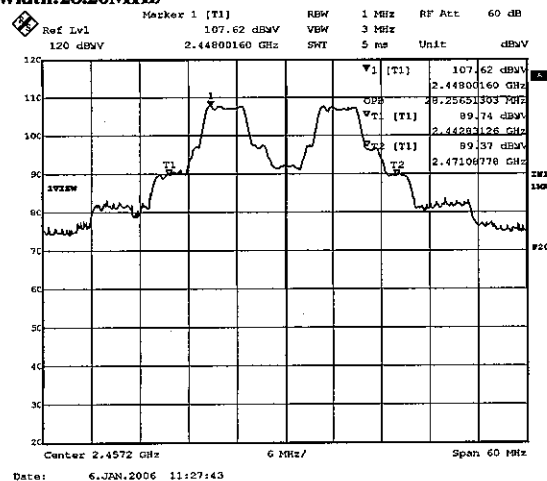

Test Report No :26CE0198-YK-1

APPENDIX 3 Test Instruments

EMI test equipment

Control No	Instrument	Manufacturer	Model No	Test Item	Calibration Date Interval (month)
KAF-01	Pre Amplifier	Hewlett Packard	8447D	RE	2005/05/24 * 12
KAF-02	Pre Amplifier	Hewlett Packard	8449B	RE	2005/04/28 * 12
KAF-05	Pre Amplifier	Agilent	8447D	AT	2005/05/11 * 12
KAT10-S1	Attenuator	Agilent	8449D 010	RE	2005/04/12 * 12
KAT6-02	Attenuator	INMET	18N-6dB	RE	2005/04/07 * 12
KBA-01	Biconical Antenna	Schwarzbeck	BBA9106	RE	2005/08/04 * 12
KCC-10/11/12 /13/18	Coaxial Cable	Fujikura/Suhner	8D-2W/12D-SFA/S0 4272B/S04272B/S04 272B	RE	2005/06/14 * 12
KCC-33/34	Coaxial Cable	Fujikura/Suhner	5D-2W/S04272B	CE	2005/12/22 * 12
KCC-A2/A3	Coaxial Cable	Fujikura	5D-2W	AT	2005/06/03 * 12
KCC-D3/D7	Coaxial Cable	Rosenberger/Advantest	2201/JUN-08-01-06 1	RE/AT	2005/04/12 * 12
KFL-01	Highpass Filter	Hewlett Packard	84300 80038	RE	2005/04/12 * 12
KHA-01	Horn Antenna	A.H.Systems	SAS-200/571	RE	2005/08/20 * 12
KHA-03	Horn Antenna	EMCO	3160-09	RE	2005/05/14 * 12
KLA-01	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2005/01/29 * 12
KLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2005/01/29 * 12
KLS-05	LISN(AMN)	Schwarzbeck	NSLK8126	CE (EUT)	2005/09/06 * 12
KOTS-01	Open Test Site	JSE	30m	RE	2005/08/10 * 12
KSA-01	Spectrum Analyzer	Advantest	R3365	RE	2005/07/06 * 12
KSA-04	Spectrum Analyzer	Advantest	R3271A	CE/RE	2005/09/13 * 12
KTR-01	Test Receiver	Rohde & Schwarz	ES140	CE/AT	2005/08/05 * 12
KTR-02	Test Receiver	Rohde & Schwarz	ESCS30	RE	2005/11/10 * 12
KLS-06	LISN(AMN)	Schwarzbeck	NSLK8127	CE	2005/09/06 * 12
KTM-05	Terminator	TME	CT-01BP	CE	2005/04/07 * 12

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item:

- CE: Conducted Emission
- RE: Out of Band Emission (Radiated)
- AT: Antenna terminal conducted test
 - 1 6dB Bandwidth
 - 2 Maximum Peak Output Power
 - 3 Out of Band Emission (Conducted)
 - 4 Peak Power Density