


RADIO TEST REPORT

(for Bluetooth classic)

Project No. : JB-Z0153
Client : Sony Corporation
Address : 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Type of Equipment : Digital Music Player
Model No. : NW-WM1Z
Serial No. : 2000454,2000014
FCC ID : AK8NWWM1Z
Regulation Applied : 47 CFR Part 15 Subpart C
Final Judgment : Passed
Sample Receipt : May 26, 2016
Testing : May 30, 2016 - June 24, 2016
Reported : June 27, 2016

Reported by :

Approved Signatory :



Takanori Oho
Technical Manager
EMC/RF Test Laboratory, Main Lab.
Design Technology Division
Sony Global Manufacturing & Operations Corporation



Teruki Kurihara
Technical Manager
EMC/RF Test Laboratory, Main Lab.
Design Technology Division
Sony Global Manufacturing & Operations Corporation

Notice

- * These test results relate only to the items (combination equipment, test configuration, operation condition etc.) tested.
 - * This report shall not be reproduced except in full, without written approval of the laboratory.
 - * This report must not be used by the client to claim product endorsement by A2LA or any agency of the U.S. Government.
 - * All test results are traceable to the national and/or international standards.
- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory.



TESTING CERT #3203.01

TABLE OF CONTENTS

1.	General Information.....	3
1.1.	Description of Equipment Under Test (EUT).....	3
1.2.	Summary of Test Result.....	4
1.3.	Tested Methodology	5
1.4.	Measurement Procedures	5
1.5.	Test Facility.....	8
1.6.	Uncertainty	8
2.	System Test Configuration.....	9
2.1.	Validation	9
2.2.	Test Operating Conditions	9
2.3.	EUT Modifications	9
2.4.	Configuration of Tested System	10
3.	Test Data.....	13
3.1.	AC Power-line Conducted Emissions	13
3.2.	20dB Bandwidth.....	14
3.3.	Carrier Frequency Separation.....	16
3.4.	Number of Hopping Frequencies	17
3.5.	Time of Occupancy (Dwell Time).....	18
3.6.	Maximum Peak Conducted Output Power.....	21
3.7.	Radiated Spurious Emissions.....	22
3.8.	Conducted Spurious Emissions for Band Edge.....	72
4.	Method of Calculation	73
5.	List of Test Equipment.....	75
5.1.	AC Power-line Conducted Emissions	75
5.2.	Antenna-port Conducted Measurements.....	75
5.3.	Radiated Spurious Emissions.....	76
6.	Photographs of test setup.....	77
6.1.	AC Power-line Conducted Emissions Measurements Photo(s).....	77
6.2.	Antenna-port Conducted Measurements Photo(s)	77
6.3.	Radiated Spurious Emissions Measurement Photo(s).....	78

Note

- ☒ -indicates that the listed condition, standard or equipment is applicable for this report.
☐ -indicates that the listed condition, standard or equipment is not applicable for this report.

1. General Information

1.1. Description of Equipment Under Test (EUT)

General specification

Test Sample Condition	: Pre-production
Type of Equipment	: Digital Music Player
Trade Name	: SONY
Model No.	: NW-WM1Z
Serial No.	: 2000454,2000014
Power Rating	: DC3.7V(The EUT was supplied with the power from built-in battery) DC5V(Built-in battery was charged through USB input port)
Software Ver.	: 0.82.00

Radio specification

Function of the Equipment	: Transceiver
Operating frequency	: 2402 - 2480 MHz
Modulation Type	: FHSS(GFSK, $\pi/4$ DQPSK, 8DPSK)
Channel Spacing	: 1 MHz
Channel Bandwidth	: 1 MHz
Number of channels	: 79
Antenna type	: Inverted-F antenna
Antenna connector type	: None
Antenna gain	: +2.1 dBi
Operating Temperature	: 5 to 35deg.C

1.2. Summary of Test Result

Test Item	Worst Margin	Test Frequency band	Results
AC Power-line Conducted Emissions	15.30 dB (QP) 0.150 MHz N	0.15 MHz - 30 MHz	Complied
20dB Bandwidth	Refer to the test data *2	Carrier	Complied
Carrier Frequency Separation	Refer to the test data *2	Carrier	Complied
Number of Hopping Frequencies	Refer to the test data *2	Carrier	Complied
Time of Occupancy (Dwell Time)	Refer to the test data *2	Carrier	Complied
Maximum Peak Conducted Output Power	22.31dB *2	Carrier	Complied
Radiated Spurious Emissions	1.2 dB (AV) 2483.500 MHz Vertical	9 kHz - 25 GHz (excluding carrier and band edge)	Complied
Conducted Spurious Emissions for Band Edge *1	35.83dB Margin 2399.68 MHz *2	Carrier band edge	Complied

Note

*1: Conducted Spurious Emission was tested for the only frequencies in the non-restricted carrier band edges, since the spurious emissions in other non-restricted band were complied with Radiated Spurious Emission measurement.

*2: The data for the model NW-WM1A is used by the client request, since the RF module is same as the one of this model.

Other requirements

Part 15.31(e) Supply voltage requirement

: Complied (The EUT was tested with a new battery)

Part 15.203/212 Antenna requirement

: Complied (The EUT has an internal antenna which cannot be replaced by users)

1.3. Tested Methodology

Test Standard : 47 CFR Part 15 Subpart C
 Test Method : ANSI C63.10 - 2013
 DA 00-705 (March 30, 2000)

Test Condition :

Radiated Spurious Emissions

Test Distance ☒ 3 m ☐ 10 m (9 kHz - 30 MHz)
☒ 3 m ☐ 10 m (30 - 1000 MHz)
☒ 3 m (1 - 25 GHz)

Dimensions of the EUT table 0.8m(for MHz), 1.5m(for GHz) height, 1.5 m width and 1 m depth.

AC Power-line Conducted Emissions

Dimensions of the EUT table 0.8 m height, 2 m width and 1 m depth.

1.4. Measurement Procedures

We performed the measurements in accordance with NV3-12, available upon the request.

- ☒ No Deviation
☐ Deviation from the above procedure.

The summary of the above procedure is mentioned below

Antenna-port Conducted Measurements

1. Antenna-port of the EUT was connected to the spectrum analyzer.
2. For each EUT operation mode, the Antenna-port Conducted Measurements were measured with spectrum analyzer.

Test Item	Detector	RBW
*Antenna-port Conducted Measurements		
20dB Bandwidth	Peak	30 kHz
99% Occupied Bandwidth	N/A	N/A
Carrier Frequency Separation	Peak	100 kHz
Number of Hopping Frequencies	Peak	100 kHz
Time of Occupancy (Dwell Time)	Peak	1 MHz
Maximum Peak Conducted Output Power	Peak	3 MHz
Conducted Spurious Emissions for Band Edge	Peak	100 kHz

AC Power-line Conducted Emissions

1. The non-conductive table (EUT table) made of (☒ FRP, ☐ wood, ☐ other non-conductive material) was placed 0.4 m from its rear to the vertical reference ground plane.
2. The EUT was placed on the center of tabletop and its rear was flush with the rear of the table, connected through a LISN to the input power mains.
3. The LISN was placed in 80 cm from the nearest part of the EUT chassis.
4. The excess length of the AC cable between the EUT and the LISN receptacle, or an adaptor or extension cable connected to and measured with LISN, was folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
5. The connection of the all other equipment to the second LISN was performed. The second LISN was terminated with a 50-ohm terminator.
6. Interconnecting cables that hang closer than 40 cm to the horizontal reference ground plane was folded back and forth forming a bundle 30 to 40 cm long, hanging approximately in the middle between the horizontal reference ground plane and the tabletop.
7. Find the worst mode and arrangement of the EUT according to the follows:
 - Connecting all peripherals and change the position of peripherals and cables.
 - Changing the all test operation modes of the EUT.
 - On every condition, exploring the highest emissions with the spectrum analyzer.
(150kHz - 30MHz, peak detector, RBW: 10 kHz)
8. On the worst condition of the EUT found in above, choose the 6 highest emissions on the spectrum data. The final measurements carried out on these emissions with EMI test receiver.

Radiated Spurious Emissions

- The non-conductive table (EUT table) made of (☐ FRP, ☒ Styrene Foam, ☐ other non-conductive material) was placed in the center of the turntable.
- The EUT was placed on the center of the tabletop.
- The test antenna was placed away from the EUT at test distance.
- The limits were compensated the distance factor with follows;
 $9\text{ kHz} - 490\text{ kHz}$ [Limit at 3m] = [Limit at 300m] + $40\log(300[\text{m}] / 3[\text{m}])$
 $490\text{ kHz} - 30\text{ MHz}$ [Limit at 3m] = [Limit at 30m] + $40\log(30[\text{m}] / 3[\text{m}])$
- Find the worst arrangement of the EUT according to follows;
 - Rotating the turntable and/or scanning the antenna.
 - On every condition, exploring the highest emissions with the spectrum analyzer.
(9 kHz - 25 GHz, peak detector)
- On the worst arrangement of the EUT found in above, choose the three highest harmonics or spurious emissions on the spectrum data.(*excluding carrier band edges)
 The final measurements of all test operating modes carried out on these emissions as follows;

The test antenna and the turntable were performed with follows;

	9kHz - 30MHz	30MHz - 1000MHz	above 1GHz
Antenna	Loop Antenna	Bi-conical Antenna, Log-periodic Antenna	Horn Antenna
Antenna scanning range	1m, Vertical, 360 degrees	1 - 4m, Horizontal and Vertical	1 - 4m *, Horizontal and Vertical
Turntable rotating range	360 degrees	360 degrees	360 degrees

*: Final measurements are performed keeping the antenna in the "cone of radiation" from EUT area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.

Instruments settings were carried out with follows;

	9 kHz - 90 kHz 110 kHz - 490 kHz	90 kHz - 110 kHz 490 kHz - 30 MHz	30 MHz - 1000 MHz	above 1GHz
Detector	Peak / Average	Quasi-peak	Quasi-peak	Peak / Average
RBW	9 kHz (6dB) *1	9 kHz (6dB) *1	120 kHz (6dB)	1 MHz (3dB)
VBW	N/A	N/A	N/A	3 MHz (for peak) 10 kHz (for average) *2
Instrument	EMI test receiver	EMI test receiver	EMI test receiver	Spectrum analyzer

*1: When the measurement frequencies below 150 kHz, RBW: 200 Hz was used.

*2: VBW setting (for average) was higher than 1/T. (T is the minimum transmission duration)

- If the final measurement result exceeded the limit(FCC 15.209(a)) in non-restricted band(excluding carrier band edges), the measurement is carried out additionally and compared with the limit (-20dBc) with follows;

Measurement points

- Fundamental Frequency

- Frequency that exceeded the limit in non-restricted band (excluding carrier band edges)

	9 kHz - 150 kHz	150 kHz - 30MHz	above 30MHz
Detector	Peak	Peak	Peak
RBW	3 dB RBW: 300 Hz *	3 dB RBW: 10 kHz *	3 dB RBW: 100 kHz
Instrument	Spectrum analyzer	Spectrum analyzer	Spectrum analyzer

*: Correction factor of RBW was compensated to a measurement result by the following formula.

$$\text{C.F. of RBW [dB]} = 10 \cdot \log(100\text{kHz} / \text{used RBW})$$

- Although these tests were performed other than open field area test site, adequate comparison measurements were confirmed against 30 m open field area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

1.5. Test Facility

Address of Test Facility

Test Facility Name : Sony Global Manufacturing & Operations Corporation
EMC/RF Test Laboratory, Main Lab.

Address : Kisarazu Site 8-4 Shiomi Kisarazu-shi, Chiba, 292-0834 Japan

Phone : +81 438 37 2750

AC Power-line Conducted Emissions

Shielded Room

☒ 4th Site

Radiated Spurious Emission

Semi-Anechoic chamber

☐ 4th Site☒ EMC Site

Antenna-port Conducted Measurements

Shielded Room

☒ 4th Site SR1

A2LA Accreditation for Test Facility

The above test facility has been fully reported to A2LA and accepted as follows:

Effective dates: 2015-09-15 through 2017-10-31

1.6. Uncertainty

Test Item	Frequency	4th Site SR1
Conducted Output Power	1 - 6GHz	± 0.84 dB
Conducted Spurious Emissions	below 6GHz	± 0.89 dB

Test Item	Frequency	Distance	4th Site	EMC Site
AC Power-line Conducted Emissions	150kHz - 30MHz	-	± 3.34 dB	± 3.35 dB
Radiated Emissions	below 30 MHz	3m	± 2.59 dB	± 3.12 dB
	30 - 300 MHz	3m	± 4.18 dB	± 5.26 dB
	300 - 1000 MHz	3m	± 4.04 dB	± 4.37 dB
	1 - 6 GHz	3m	± 4.63 dB	± 4.90 dB
	6 - 18 GHz	3m	± 5.31 dB	± 5.50 dB
	18 - 26.5 GHz	3m	± 5.78 dB	± 5.63 dB

2. System Test Configuration

2.1. Validation

The system was configured for testing in a typical (as a customer would normally use it).

The tests were conducted with the worst case modes as follows.

2.2. Test Operating Conditions

Transmitting mode

Test Items	Operating Mode *1	Packet type *2,3	Test Channels
AC Power-line Conducted Emissions *4	EDR	3DH5	2441MHz
Carrier Frequency Separation, Number of Hopping Frequencies, Time of Occupancy (Dwell Time)	BDR	DH5	Hopping ON
	EDR	3DH5	
20dB Bandwidth, Maximum Peak Conducted Output Power, Radiated Spurious Emissions	BDR	DH5	2402 MHz
	EDR	3DH5	2441 MHz 2480 MHz
Conducted Spurious Emissions for Band Edge	BDR	DH5	2402 MHz
	EDR	3DH5	

Note

*1: Inquiry mode was not performed based on the result of pre-compliance testing.

*2: The worst packet type has been decided based on the result of maximum duty cycle and pre-compliance testing in the actual product specification.

*3: EDR worst bitrate has been decided based on the result of maximum duty cycle for Time of Occupancy measurement. Other measurements were decided based on the result of Maximum Peak Conducted Output Power.

*4: The final test was performed with the representative mode that had been found as the worst emission mode while exploratory testing.

The Software for Operating Mode

Name : Diagnosis

Version : 1.02.10

Special accessories needed for connecting the EUT to achieve compliance:

Item	Manufacturer	Model No.	Serial No.	Remark
-	-	-	-	-

2.3. EUT Modifications

☒ No equipment modification to achieve compliance to the standard levels was done during the tests.

☐ Equipment was modified to achieve compliance to the standard level as below.

Responsible Party Signature

Typed/ Print Name :

Responsible Party :

Position :

Date :

2.4. Configuration of Tested System

Antenna-port Conducted Measurements

The equipment under test (EUT) consists of

Symbol	Item	Manufacturer	Model No.	Serial No.
A	Digital Music Player	SONY	NW-WM1A	2000014


The measurement was carried out with the following support equipment connected

Symbol	Item	Manufacturer	Model No.	Serial No.
-	-	-	-	-

Type of Cable

Symbol	Description	Identification (Manufacturer etc)	Shielded Yes/No	Ferrite Core	Bundled	Length (m)
-	-	-	-	-	-	-

System configuration

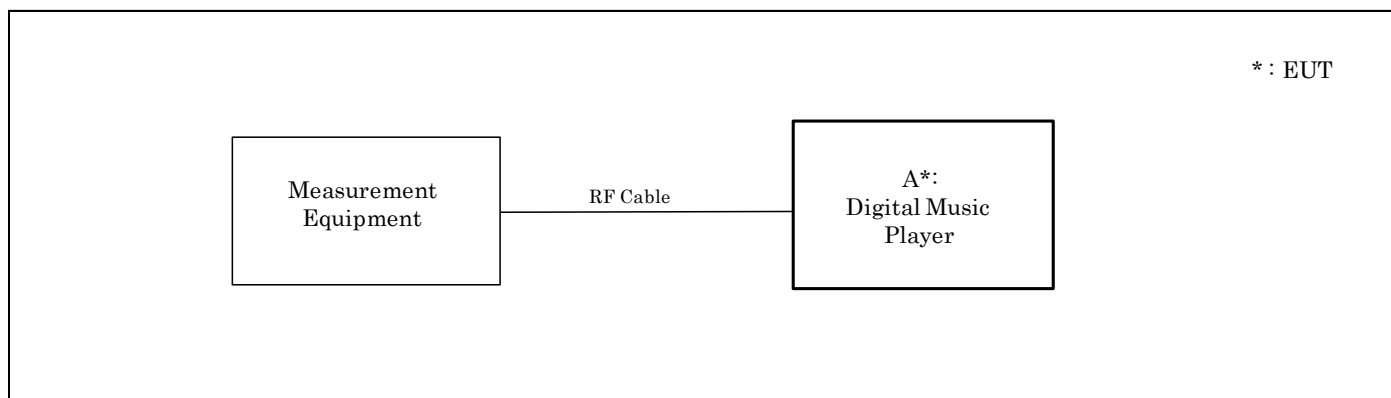

Radiated Spurious Emissions

The equipment under test (EUT) consists of

Symbol	Item	Manufacturer	Model No.	Serial No.
A	Digital Music Player	SONY	NW-WM1Z	2000454


The measurement was carried out with the following support equipment connected

Symbol	Item	Manufacturer	Model No.	Serial No.
-	-	-	-	-

Type of Cable

Symbol	Description	Identification (Manufacturer etc)	Shielded Yes/No	Ferrite Core	Bundled	Length (m)
-	-	-	-	-	-	-

System configuration

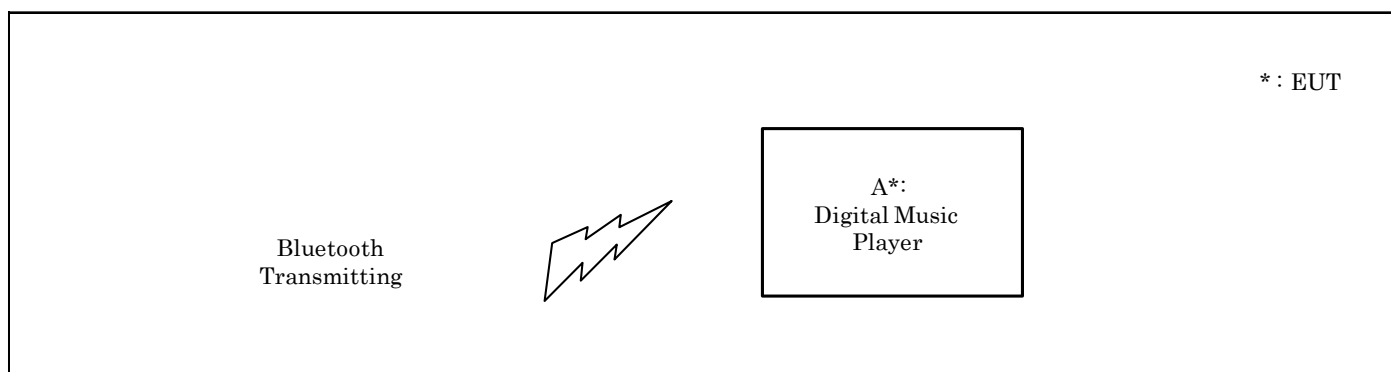

AC Power-line Conducted Emissions

The equipment under test (EUT) consists of

Symbol	Item	Manufacturer	Model No.	Serial No.
A	Digital Music Player	SONY	NW-WM1Z	2000454


The measurement was carried out with the following support equipment connected

Symbol	Item	Manufacturer	Model No.	Serial No.
B	Personal Computer	HP	K7U44AV-ACJA	JPA55142KP
C	AC Adaptor	HP	HSTNN-CA41	WDVTPOCGC8X1LY

Type of Cable

Symbol	Description	Identification (Manufacturer etc)	Shielded Yes/No	Ferrite Core	Bundled	Length (m)
1	USB cable	SONY	Yes	No	-	1.0
2	DC cable	-	No	No	Bundled	2.0
3	AC cable	-	No	No	-	1.0

System configuration

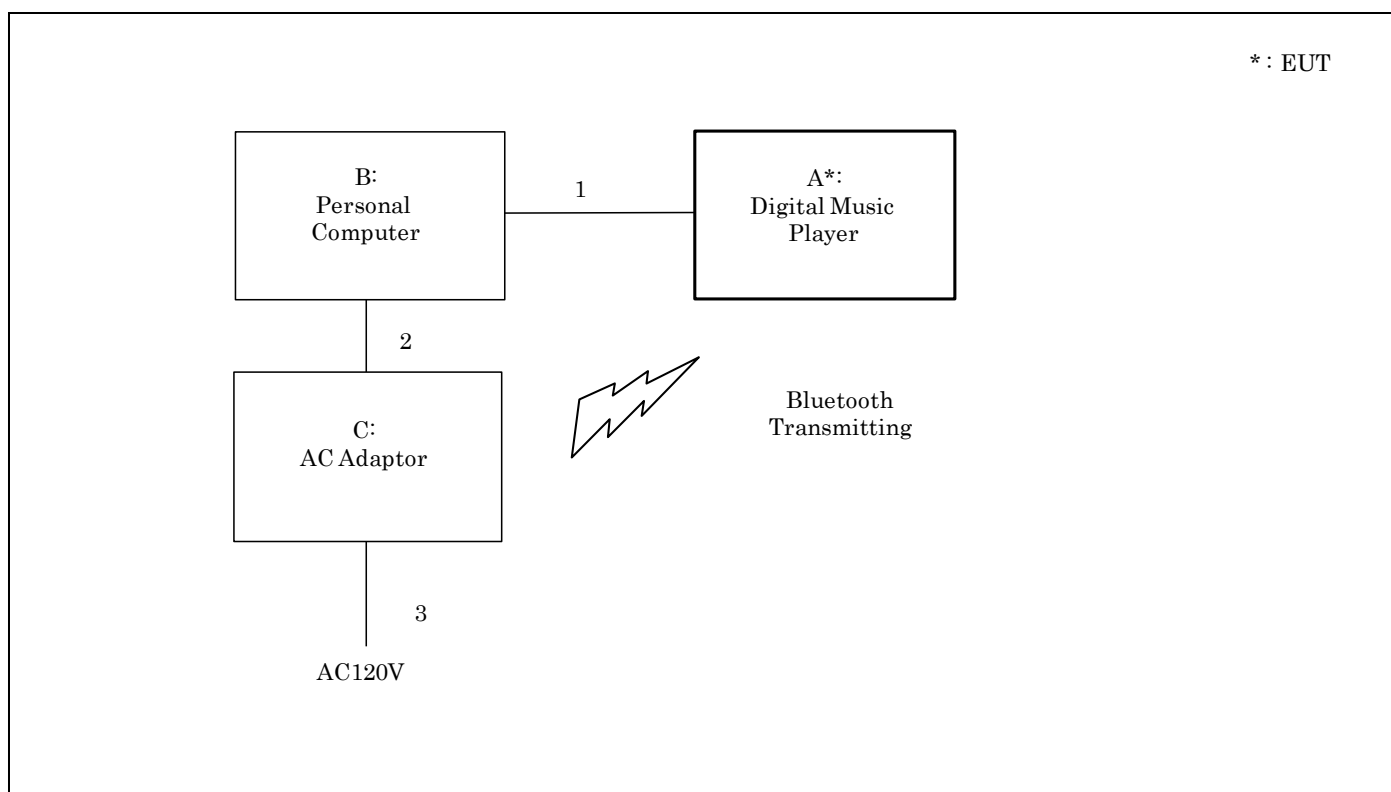


3. Test Data

3.1. AC Power-line Conducted Emissions

1) Date of measurement : June 23, 2016

[EDR(3DH5)/2441MHz]

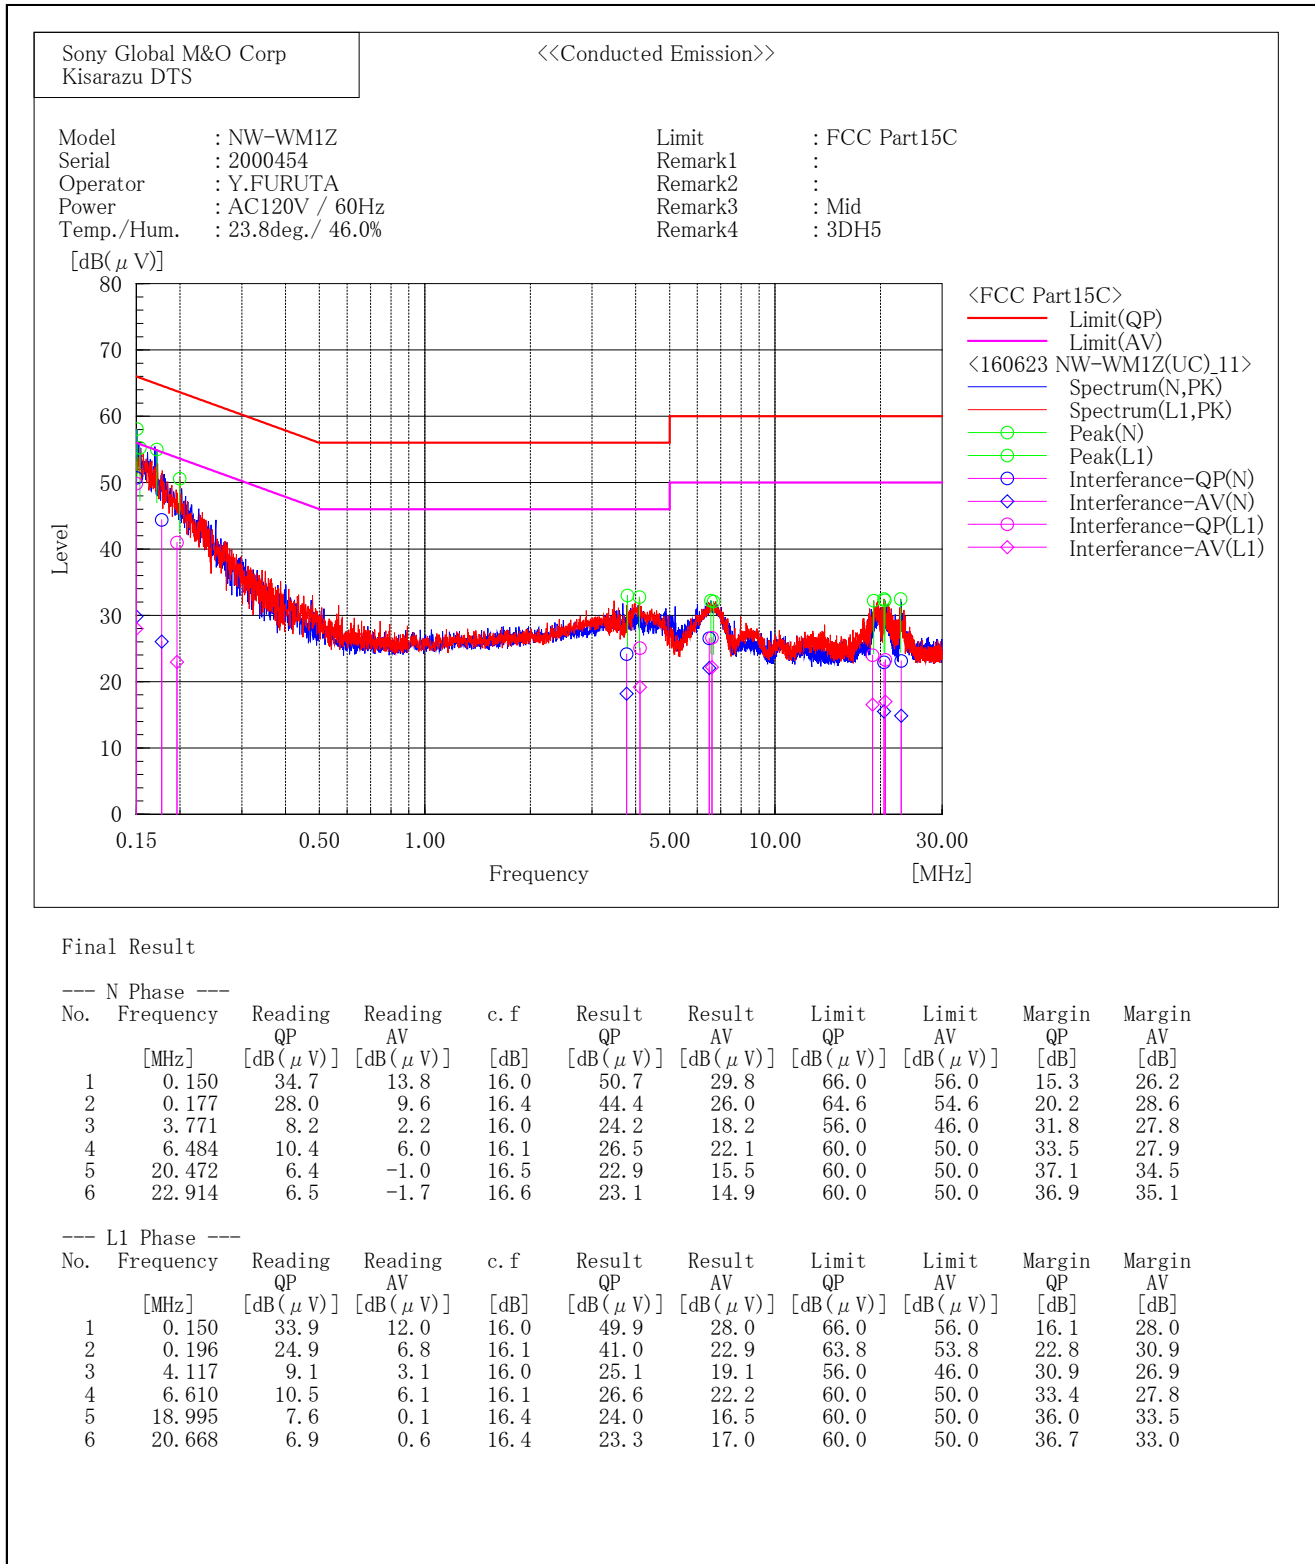

3.2. 20dB Bandwidth

- 1) Ambient temperature : 24.1 deg.C
- 2) Relative humidity : 77.7 %
- 3) Date of measurement : 09 June 2016
- 4) Measured by : H.WAKI
- 5) Operating mode : Transmitting mode

Mode		Channel [MHz]	Result [MHz]	Limit [MHz]
BDR	DH5	2402	0.964	-
		2441	0.960	-
		2480	0.961	-
EDR	3DH5	2402	1.274	-
		2441	1.275	-
		2480	1.278	-

[BDR (DH5) / 2402MHz]




[BDR (DH5) / 2441MHz]




[BDR (DH5) / 2480MHz]




[EDR (3DH5) / 2402MHz]

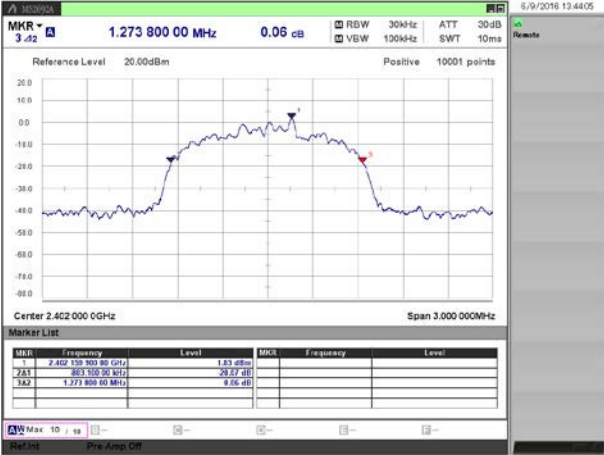

[EDR (3DH5) / 2441MHz]

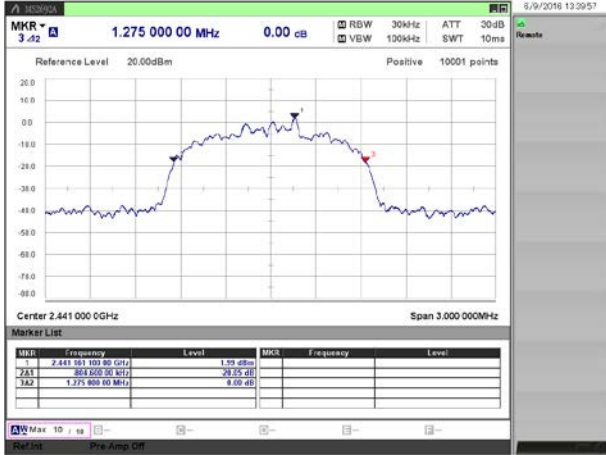

[EDR (3DH5) / 2480MHz]

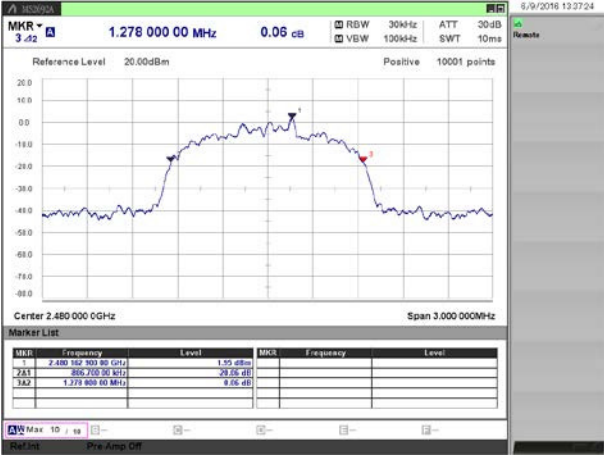

3.3. Carrier Frequency Separation


- 1) Ambient temperature : 24.1 °C
- 2) Relative humidity : 77.7 %
- 3) Date of measurement : 09 June 2016
- 4) Measured by : H.WAKI
- 5) Operating mode : Transmitting mode

Mode		Reading [kHz]	Limit [kHz]
BDR	DH5	984.9	≥ 642.7
EDR	3DH5	945.0	≥ 852.0

[BDR (DH5)]



[EDR (3DH5)]

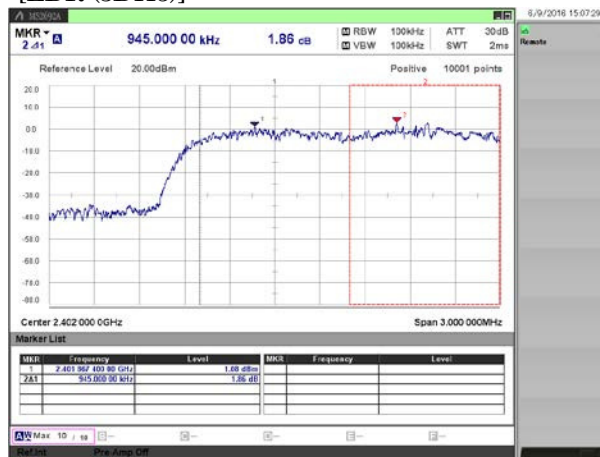

3.4. Number of Hopping Frequencies


- 1) Ambient temperature : 24.1 °C
- 2) Relative humidity : 77.7 %
- 3) Date of measurement : 09 June 2016
- 4) Measured by : H.WAKI
- 5) Operating mode : Transmitting mode

Mode		Number [channel]	Limit [channel]
BDR	DH5	79	≥ 15
EDR	3DH5	79	≥ 15

[BDR (DH5)]



[EDR (3DH5)]

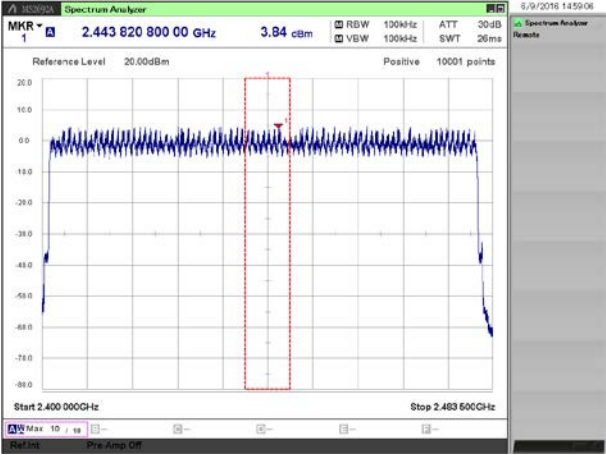



3.5. Time of Occupancy (Dwell Time)

- 1) Ambient temperature : 24.1 °C
- 2) Relative humidity : 77.7 %
- 3) Date of measurement : 09 June 2016
- 4) Measured by : H.WAKI
- 5) Operating mode : Transmitting mode


Mode		Channel [MHz]	Dwell Time [msec]	Cycle *1 [time]	Result [msec]	Limit [msec]
BDR	DH5	2402	2.89	18.2	332.4	≤ 400.0
		2441	2.89	20.8	379.9	≤ 400.0
		2480	2.89	16.6	303.2	≤ 400.0
EDR	3DH5	2402	2.89	17.8	325.1	≤ 400.0
		2441	2.89	18.6	339.7	≤ 400.0
		2480	2.89	16.0	292.2	≤ 400.0

*1: The average appearance of the 5 measurements.



[BDR (DH5) / 2402MHz]

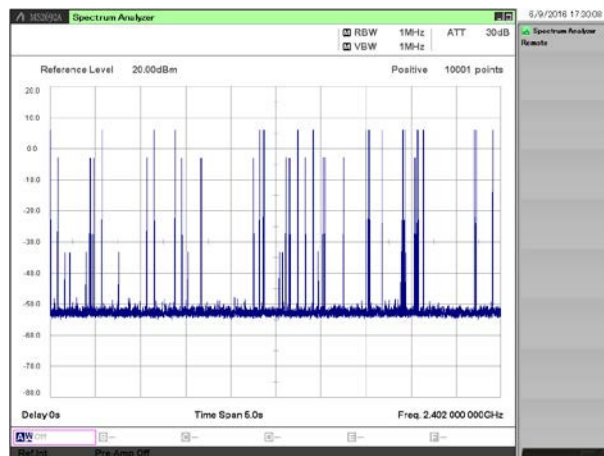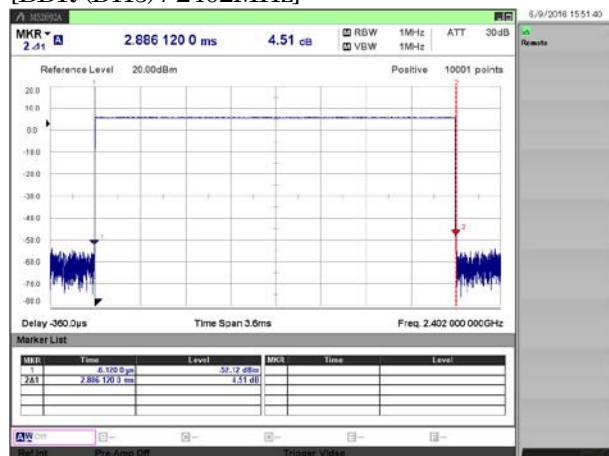


[BDR (DH5) / 2441MHz]

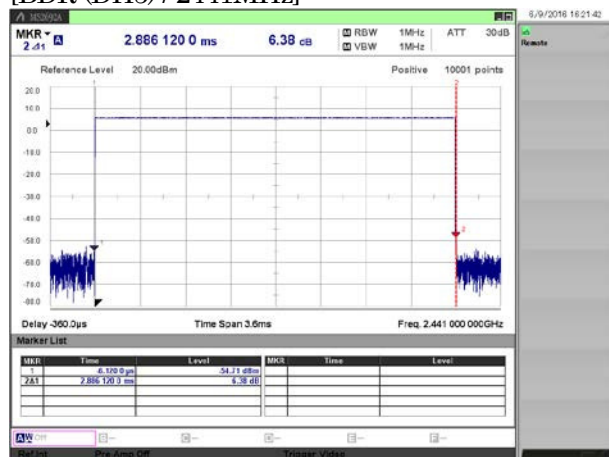


[BDR (DH5) / 2480MHz]

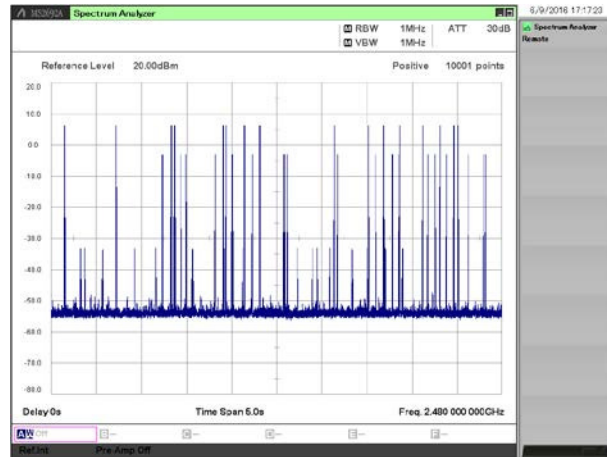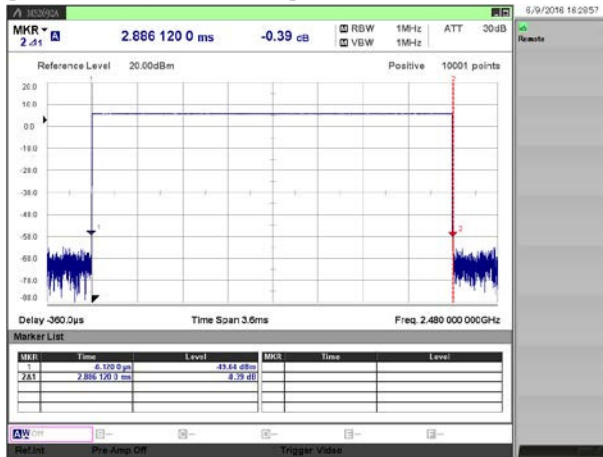



[EDR (3DH5) / 2402MHz]

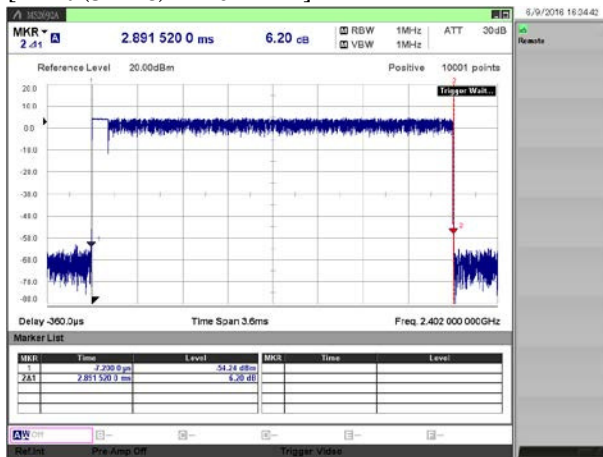

[EDR (3DH5) / 2441MHz]

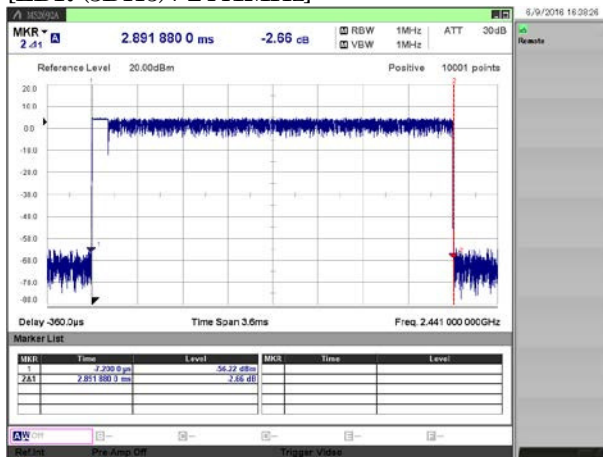

[EDR (3DH5) / 2480MHz]

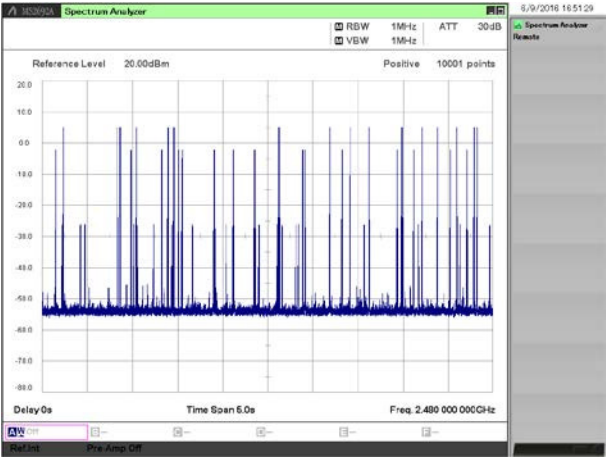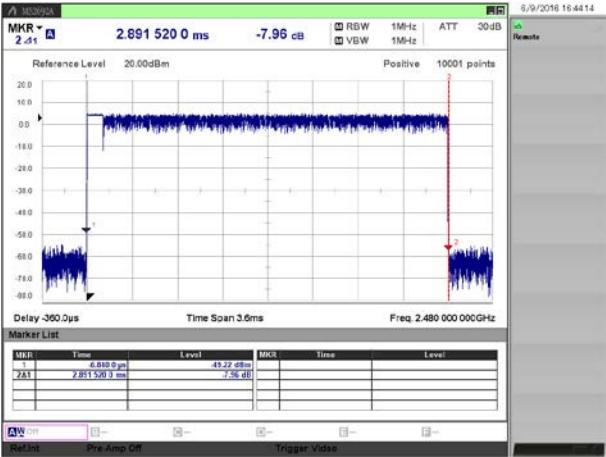

3.6. Maximum Peak Conducted Output Power

- 1) Ambient temperature : 24.2 deg.C
- 2) Relative humidity : 60.2 %
- 3) Date of measurement : 30 May 2016
- 4) Measured by : H.WAKI
- 5) Operating mode : Transmitting mode

Maximum Peak Conducted Output Power

Mode		Channel [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Result(PK) [W]	Limit [dBm]	Limit [W]	Margin [dB]
BDR	DH5	2402	-2.87	10.52	7.65	0.00582	30.0	1.0	22.35
		2441	-2.83	10.52	7.69	0.00587	30.0	1.0	22.31
		2480	-3.04	10.52	7.48	0.00560	30.0	1.0	22.52
EDR	2DH5	2402	-3.65	10.52	6.87	0.00486	30.0	1.0	23.13
		2441	-3.63	10.52	6.89	0.00489	30.0	1.0	23.11
		2480	-3.80	10.52	6.72	0.00470	30.0	1.0	23.28
	3DH5	2402	-3.55	10.52	6.97	0.00498	30.0	1.0	23.03
		2441	-3.47	10.52	7.05	0.00507	30.0	1.0	22.95
		2480	-3.64	10.52	6.88	0.00488	30.0	1.0	23.12

Maximum Average Conducted Output Power (for SAR measurement)

Mode		Channel [MHz]	Reading(AV) [dBm]	C.F. [dB]	Duty Factor [dB]	Result(AV) [dBm]	Result(AV) [W]
BDR	DH5	2402	-4.39	10.52	1.04	7.17	0.00521
		2441	-4.31	10.52	1.04	7.25	0.00531
		2480	-4.51	10.52	1.04	7.05	0.00507
EDR	2DH5	2402	-7.36	10.52	1.04	4.20	0.00263
		2441	-7.21	10.52	1.04	4.35	0.00272
		2480	-7.39	10.52	1.04	4.17	0.00261
	3DH5	2402	-7.33	10.52	1.04	4.23	0.00265
		2441	-7.21	10.52	1.04	4.35	0.00272
		2480	-7.36	10.52	1.04	4.20	0.00263

Duty Cycle check

Mode		Channel [MHz]	T(on+off) [msec]	T(on) [msec]	Duty Cycle [%]
BDR	DH1	2441	1.250	0.378	30.24
	DH3	2441	2.510	1.650	65.74
	DH5	2441	3.750	2.950	78.67
EDR	2DH1	2441	1.250	0.387	30.96
	2DH3	2441	2.510	1.650	65.74
	2DH5	2441	3.750	2.950	78.67
	3DH1	2441	1.250	0.378	30.24
	3DH3	2441	2.510	1.650	65.74
	3DH5	2441	3.750	2.950	78.67


3.7. Radiated Spurious Emissions

9 kHz - 30 MHz

1) Date of measurement

: June 07, 2016

[BDR(DH5)/2402MHz]

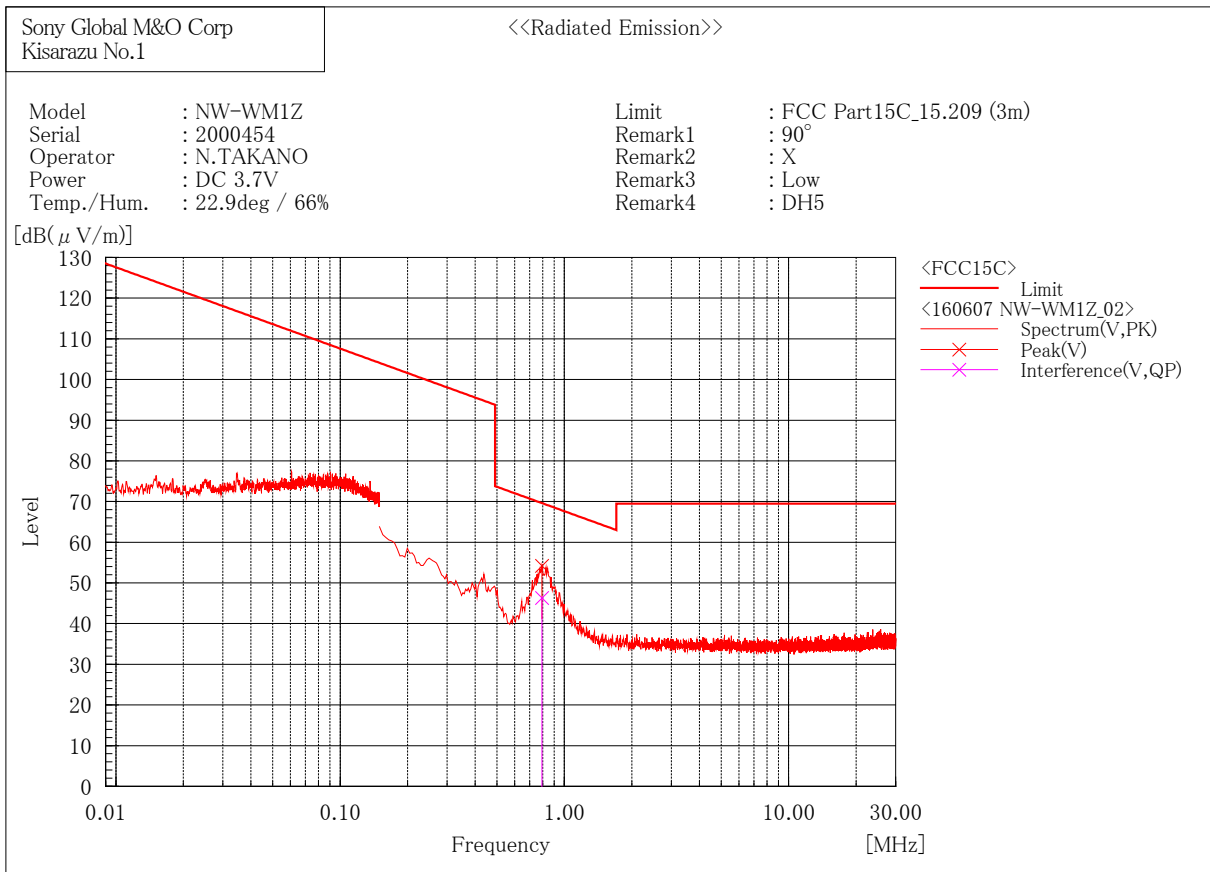


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	0.795	26.9	19.4	46.3	69.6	23.3	100.0	17.6

1) Date of measurement : June 07, 2016

[BDR(DH5)/2441MHz]

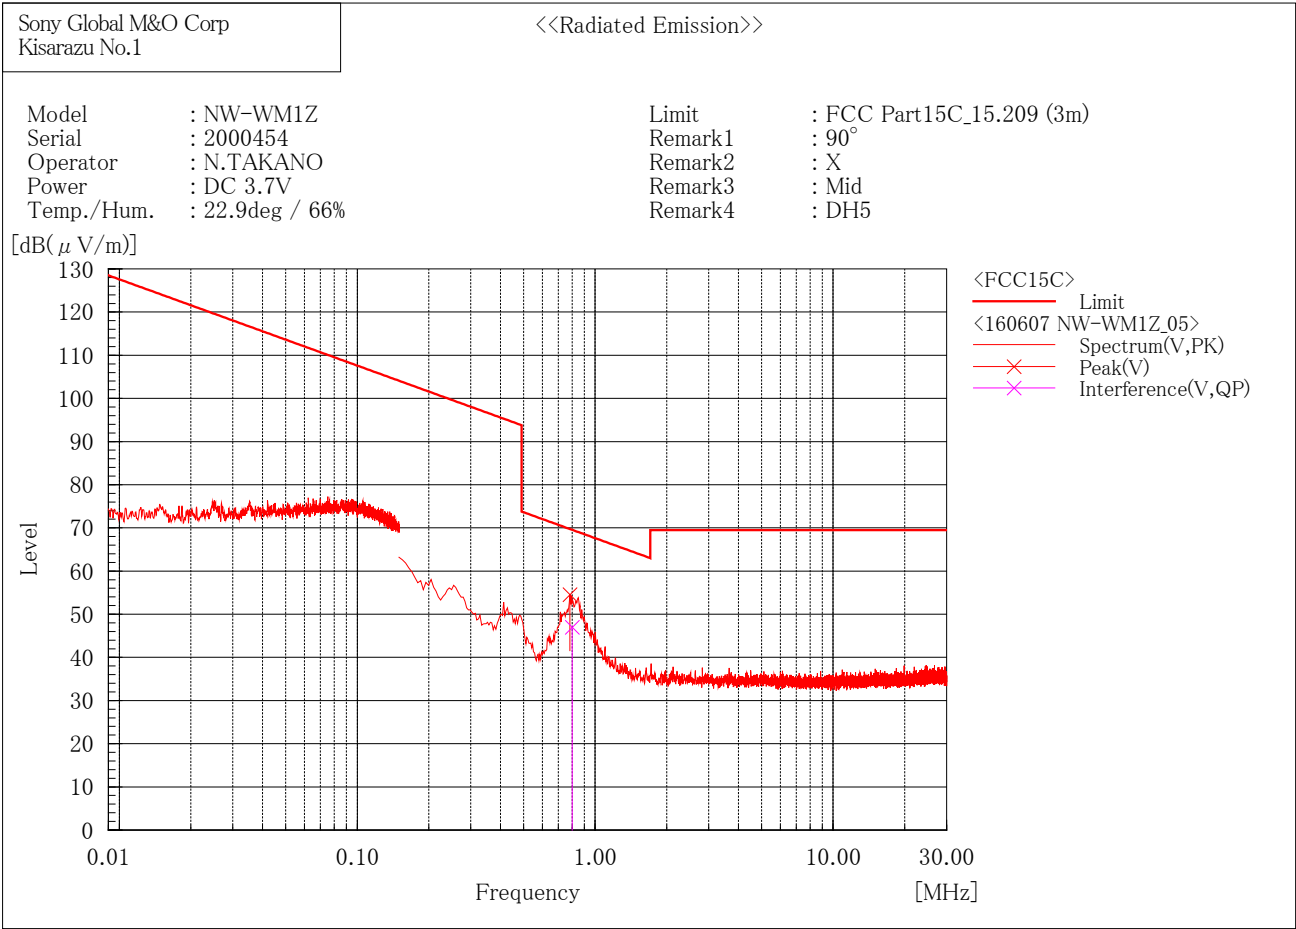


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	0.800	27.6	19.4	47.0	69.6	22.6	100.0	20.4

1) Date of measurement : June 07, 2016

[BDR(DH5)/2480MHz]

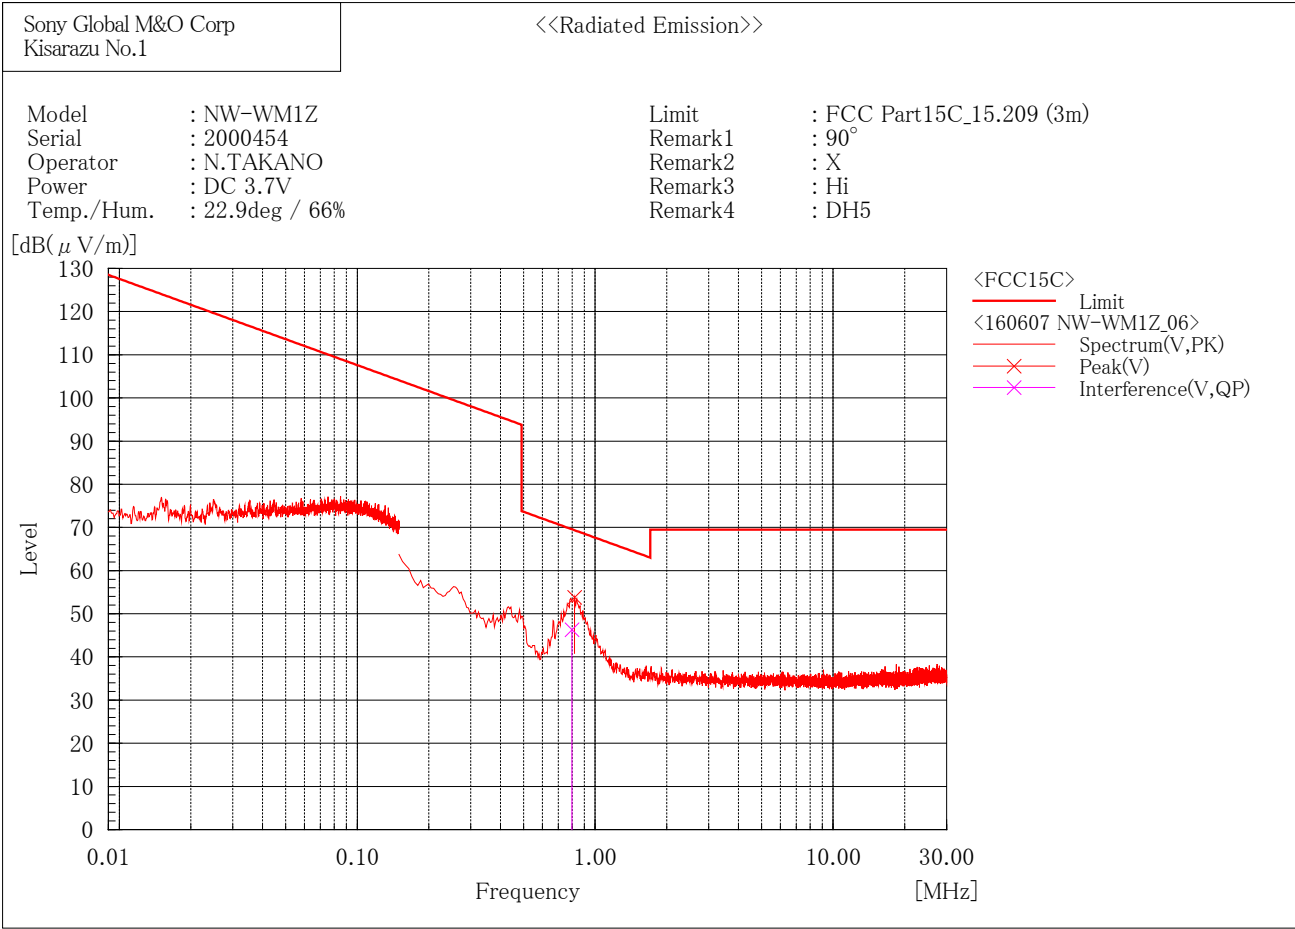


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	0.797	26.9	19.4	46.3	69.6	23.3	100.0	247.8

1) Date of measurement : June 07, 2016

[EDR(3DH5)/2402MHz]

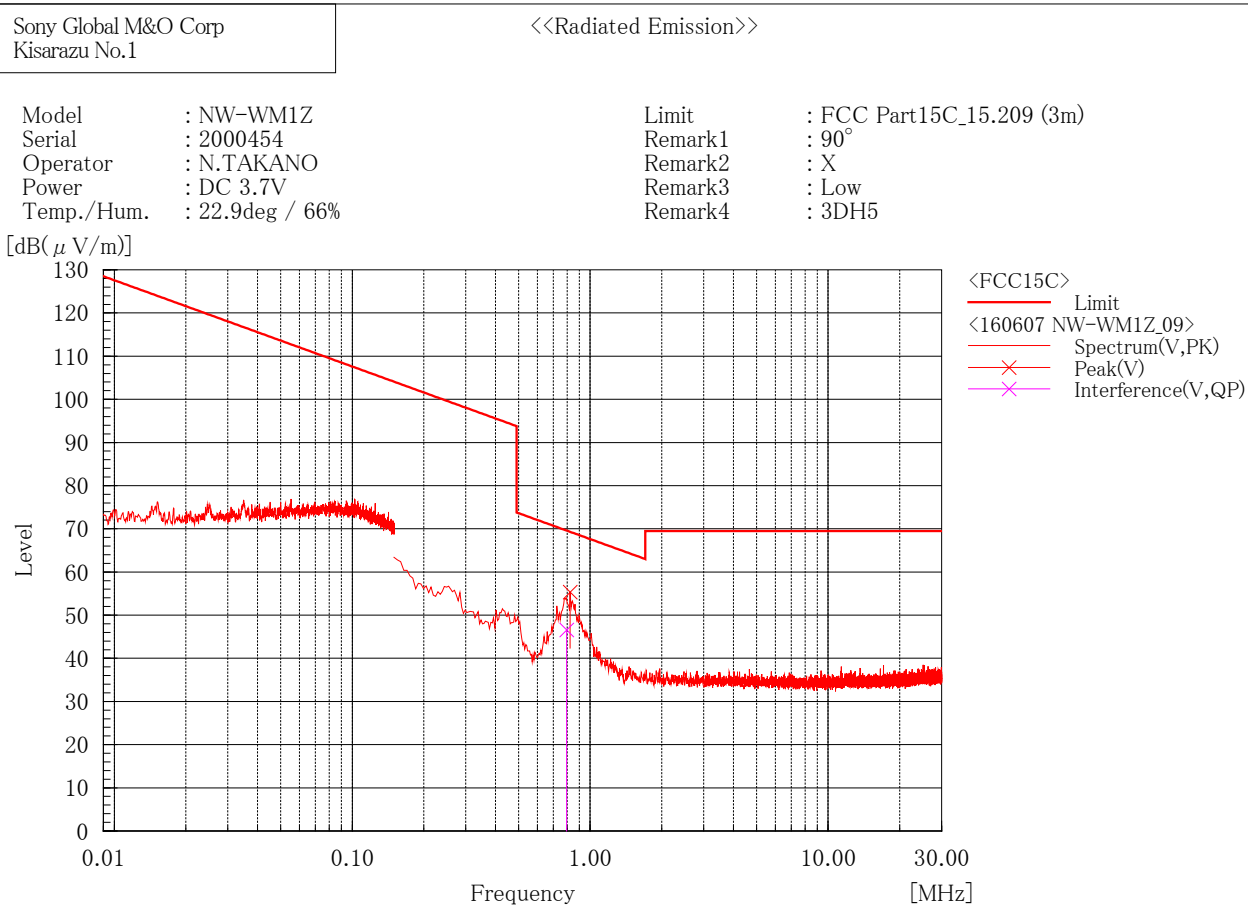

Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	0.796	27.2	19.4	46.6	69.6	23.0	100.0	346.8

1) Date of measurement : June 07, 2016


[EDR(3DH5)/2441MHz]

Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
Serial : 2000454
Operator : N.TAKANO
Power : DC 3.7V
Temp./Hum. : 22.9deg / 66%Limit : FCC Part15C_15.209 (3m)
Remark1 : 90°
Remark2 : X
Remark3 : Mid
Remark4 : 3DH5

[dB(μV/m)]

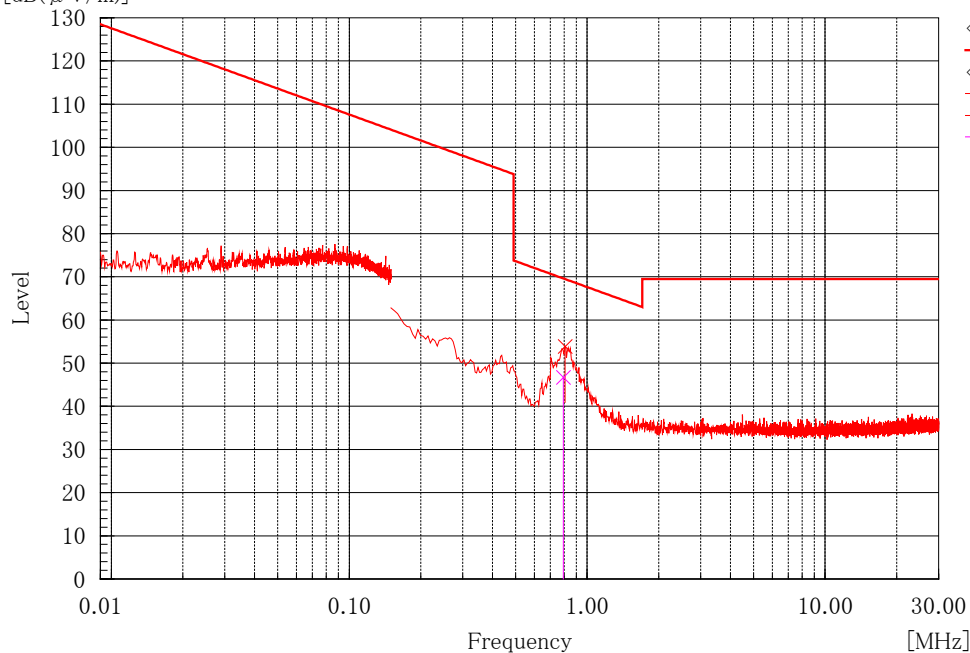

Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	0.794	27.3	19.4	46.7	69.6	22.9	100.0	8.1

1) Date of measurement : June 07, 2016


[EDR(3DH5)/2480MHz]

Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
Serial : 2000454
Operator : N.TAKANO
Power : DC 3.7V
Temp./Hum. : 22.9deg / 66%Limit : FCC Part15C_15.209 (3m)
Remark1 : 90°
Remark2 : X
Remark3 : Hi
Remark4 : 3DH5

[dB(μV/m)]

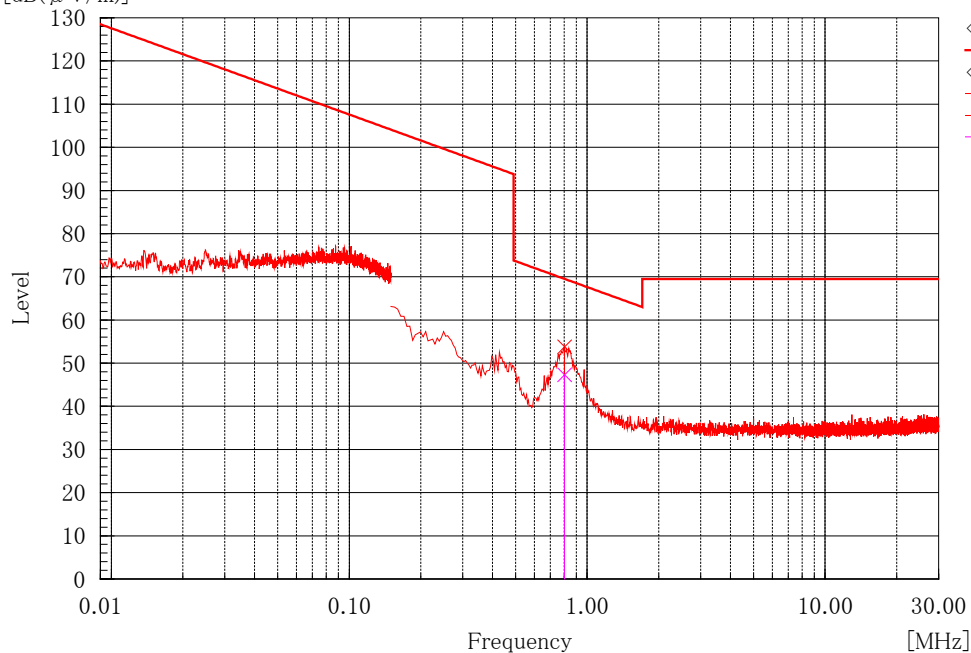

Final Result

--- Vertical Polarization (QP)---


No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	0.804	27.9	19.4	47.3	69.5	22.2	100.0	136.3

30 MHz - 1000 MHz

1) Date of measurement

: June 09, 2016

[BDR(DH5)/2402MHz]

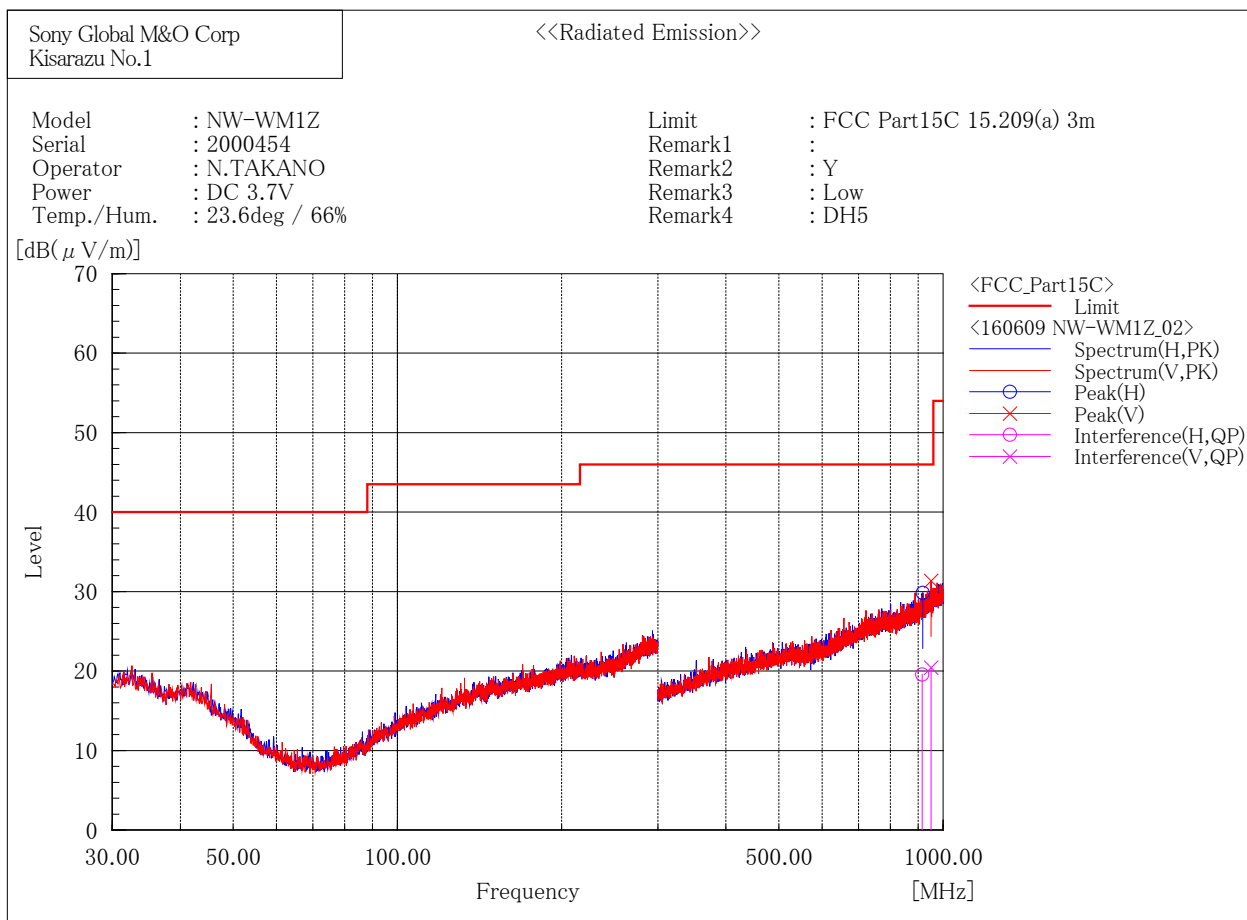

Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	916.000	19.5	0.1	19.6	46.0	26.4	100.0	261.1


--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	950.417	19.1	1.3	20.4	46.0	25.6	100.0	14.8

1) Date of measurement

: June 09, 2016

[BDR(DH5)/2441MHz]

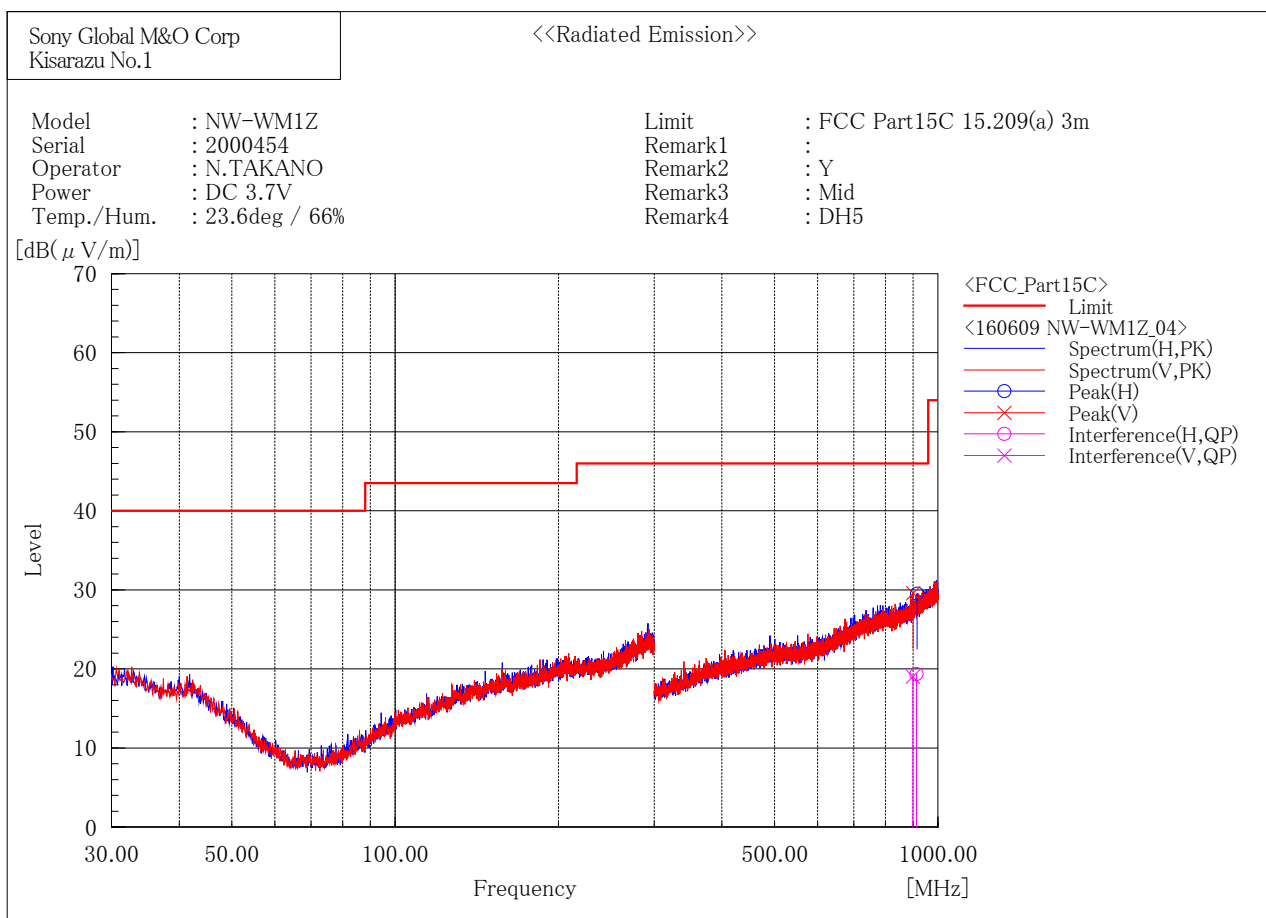

Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	912.733	19.4	0.0	19.4	46.0	26.6	100.0	327.2


--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	899.160	19.4	-0.4	19.0	46.0	27.0	100.0	16.0

1) Date of measurement

: June 09, 2016

[BDR(DH5)/2480MHz]

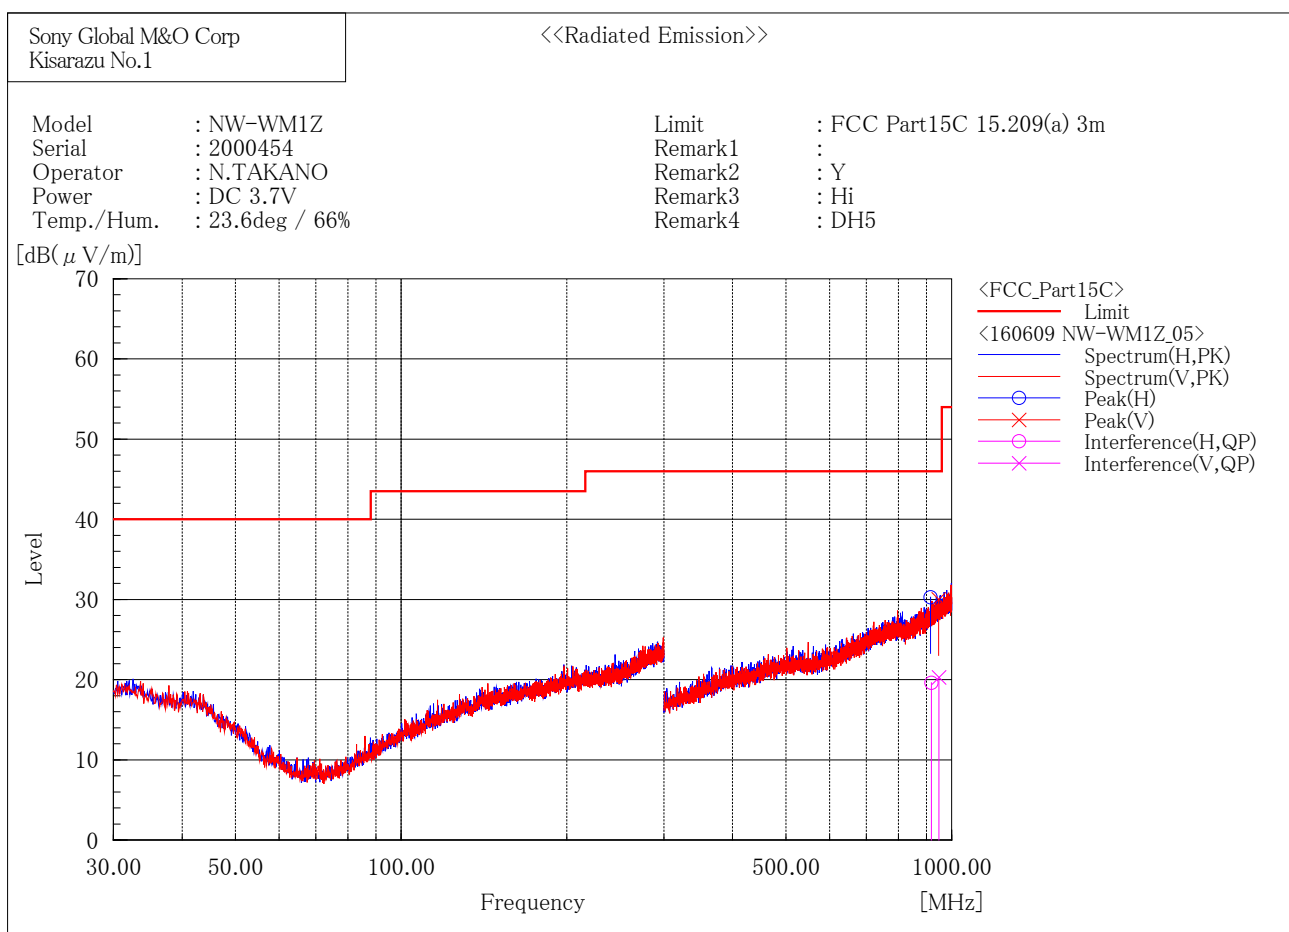

Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	918.780	19.4	0.2	19.6	46.0	26.4	100.0	350.1


--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	948.410	19.1	1.2	20.3	46.0	25.7	100.0	299.4

1) Date of measurement

: June 09, 2016

[EDR(3DH5)/2402MHz]

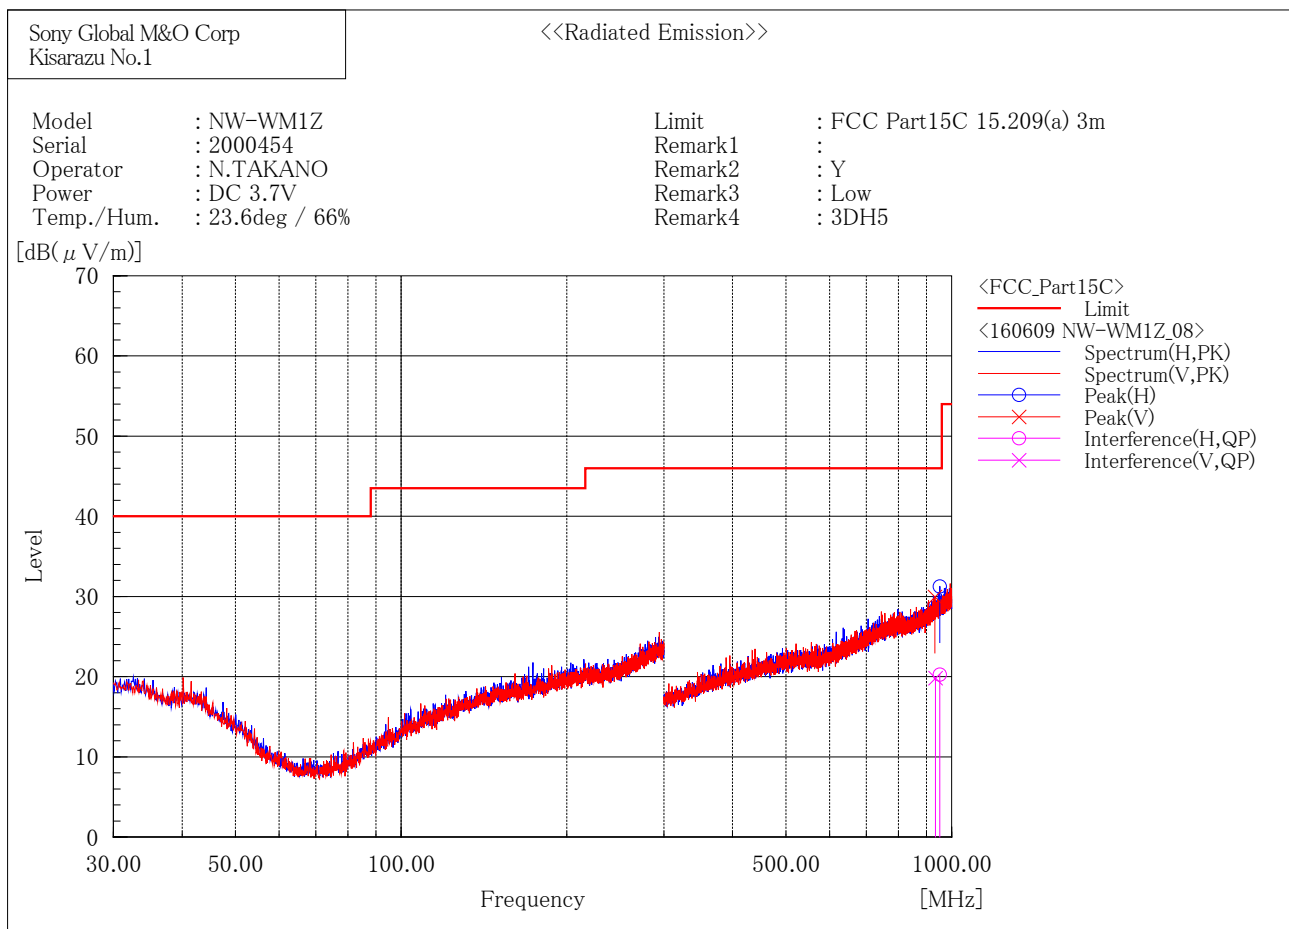

Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	952.163	19.0	1.3	20.3	46.0	25.7	100.0	335.1


--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	934.437	19.1	0.7	19.8	46.0	26.2	100.0	32.2

1) Date of measurement

: June 09, 2016

[EDR(3DH5)/2441MHz]

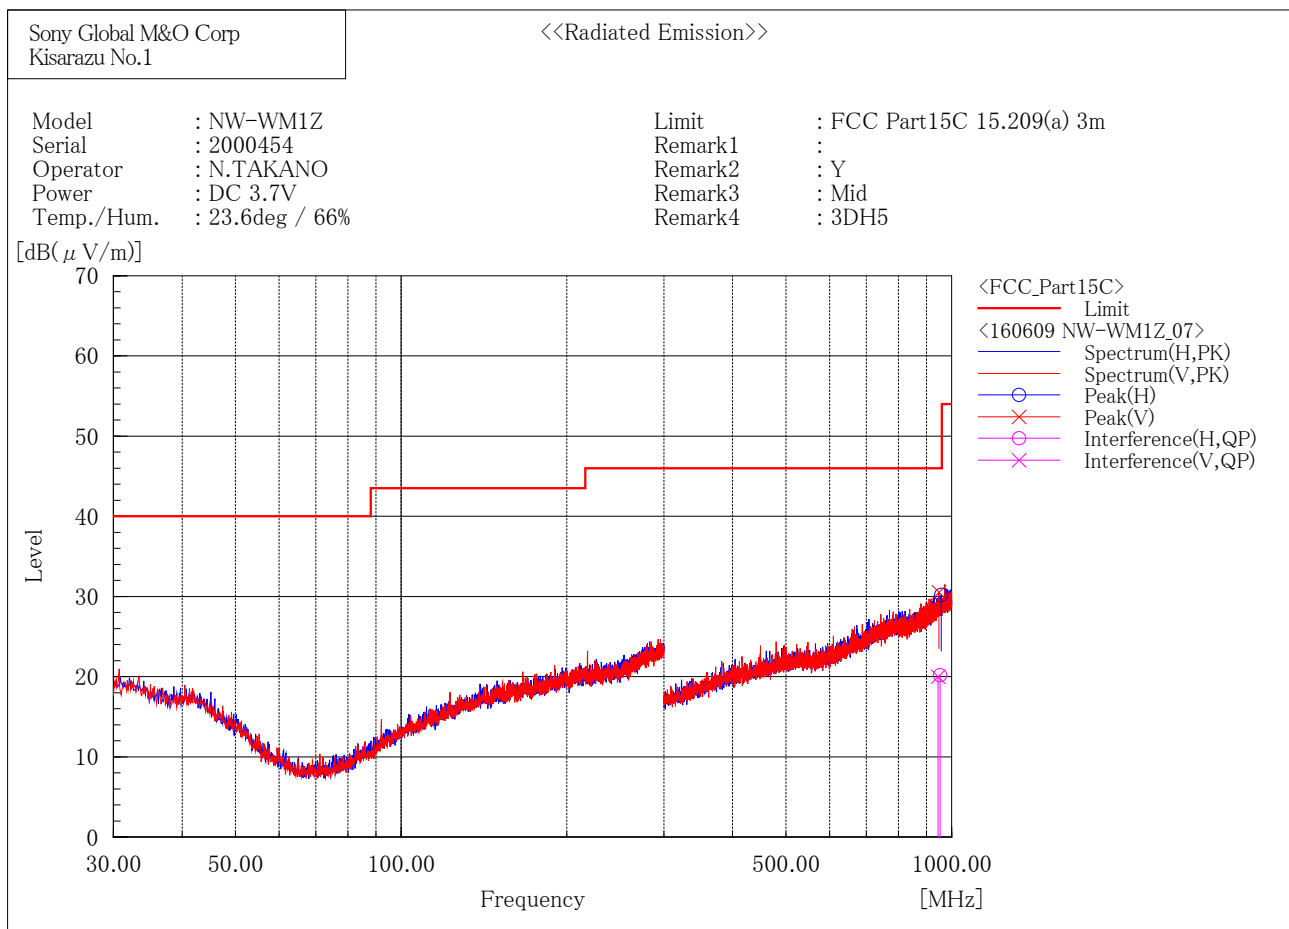

Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	953.147	18.8	1.4	20.2	46.0	25.8	100.0	109.8


--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	945.273	18.9	1.1	20.0	46.0	26.0	100.0	17.2

1) Date of measurement

: June 09, 2016

[EDR(3DH5)/2480MHz]

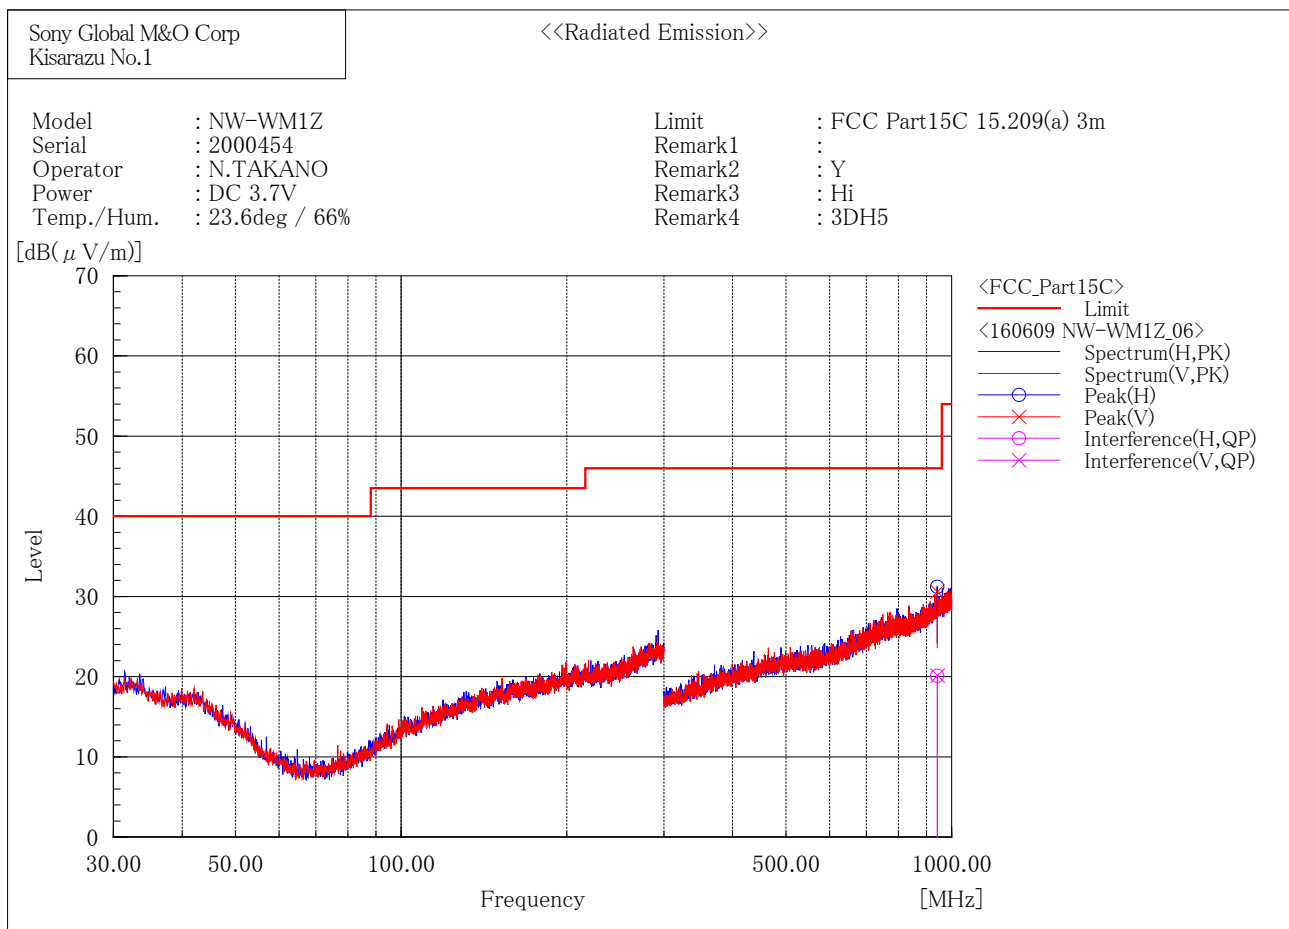

Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	941.570	19.1	1.0	20.1	46.0	25.9	100.0	175.0

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	941.913	19.2	1.0	20.2	46.0	25.8	100.0	53.3

1GHz - 6 GHz

1) Date of measurement

: June 14, 2016

[BDR(DH5)/2402MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 22.9deg / 68%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Low
 Remark4 : DH5

[dB(μV/m)]

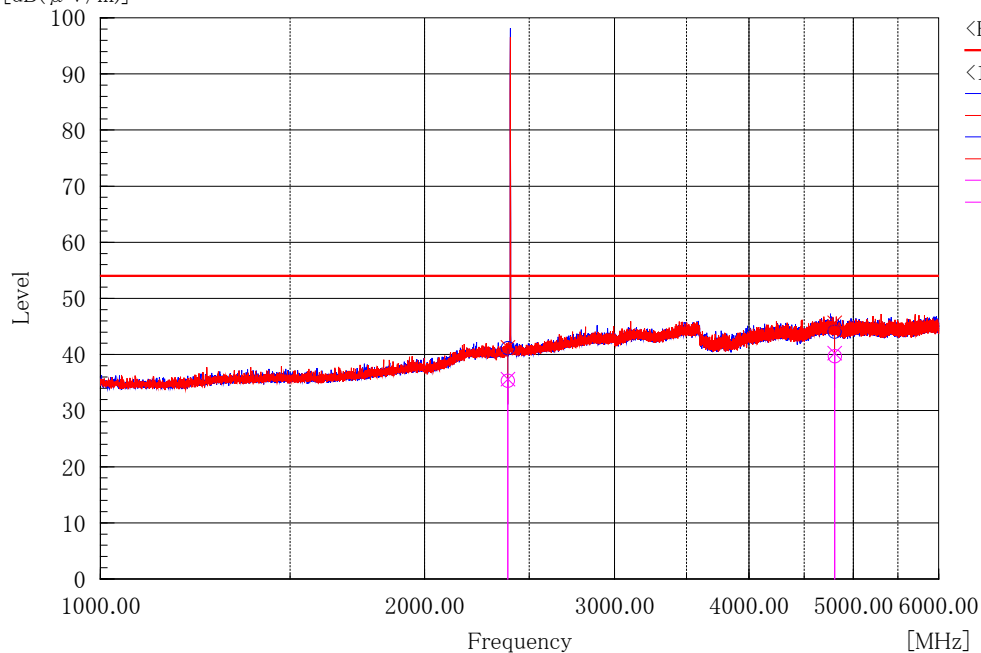

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2388.449	33.7	1.6	35.3	54.0	18.7	130.0	103.4
2	4804.766	30.1	9.6	39.7	54.0	14.3	148.0	20.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2389.549	34.0	1.6	35.6	54.0	18.4	142.0	279.3
2	4804.353	30.7	9.6	40.3	54.0	13.7	145.0	195.9

1) Date of measurement

: June 15, 2016

[BDR(DH5)/2441MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 22.6deg / 63%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Mid
 Remark4 : DH5

[dB(μV/m)]

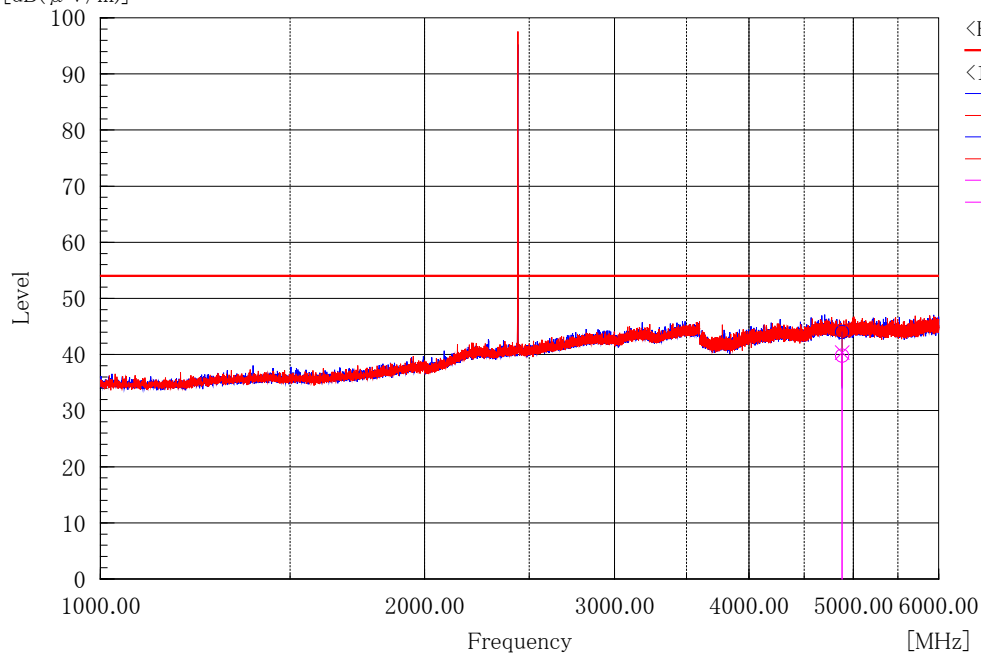

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.158	30.3	9.5	39.8	54.0	14.2	139.0	251.3

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4881.820	30.9	9.5	40.4	54.0	13.6	144.2	222.3

1) Date of measurement

: June 15, 2016

[BDR(DH5)/2480MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 22.6deg / 63%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Hi
 Remark4 : DH5

[dB(μV/m)]

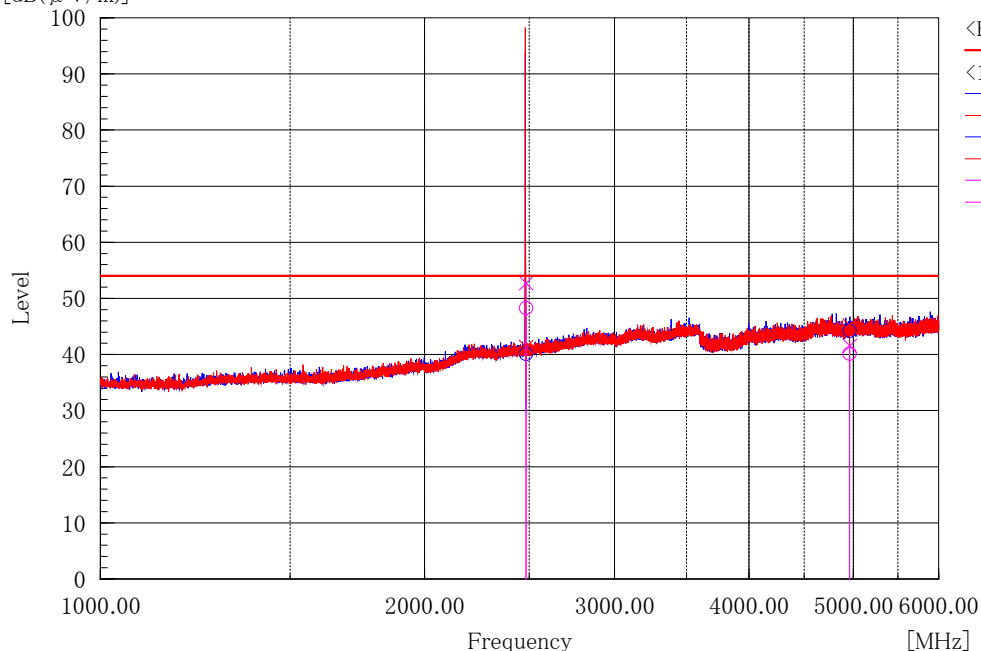

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	46.4	1.9	48.3	54.0	5.7	131.5	235.8
2	4959.990	30.4	9.8	40.2	54.0	13.8	124.3	226.6


--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	50.8	1.9	52.7	54.0	1.3	113.0	269.1
2	4959.929	31.8	9.8	41.6	54.0	12.4	111.0	240.4

1) Date of measurement

: June 14, 2016

[BDR(DH5)/2402MHz]

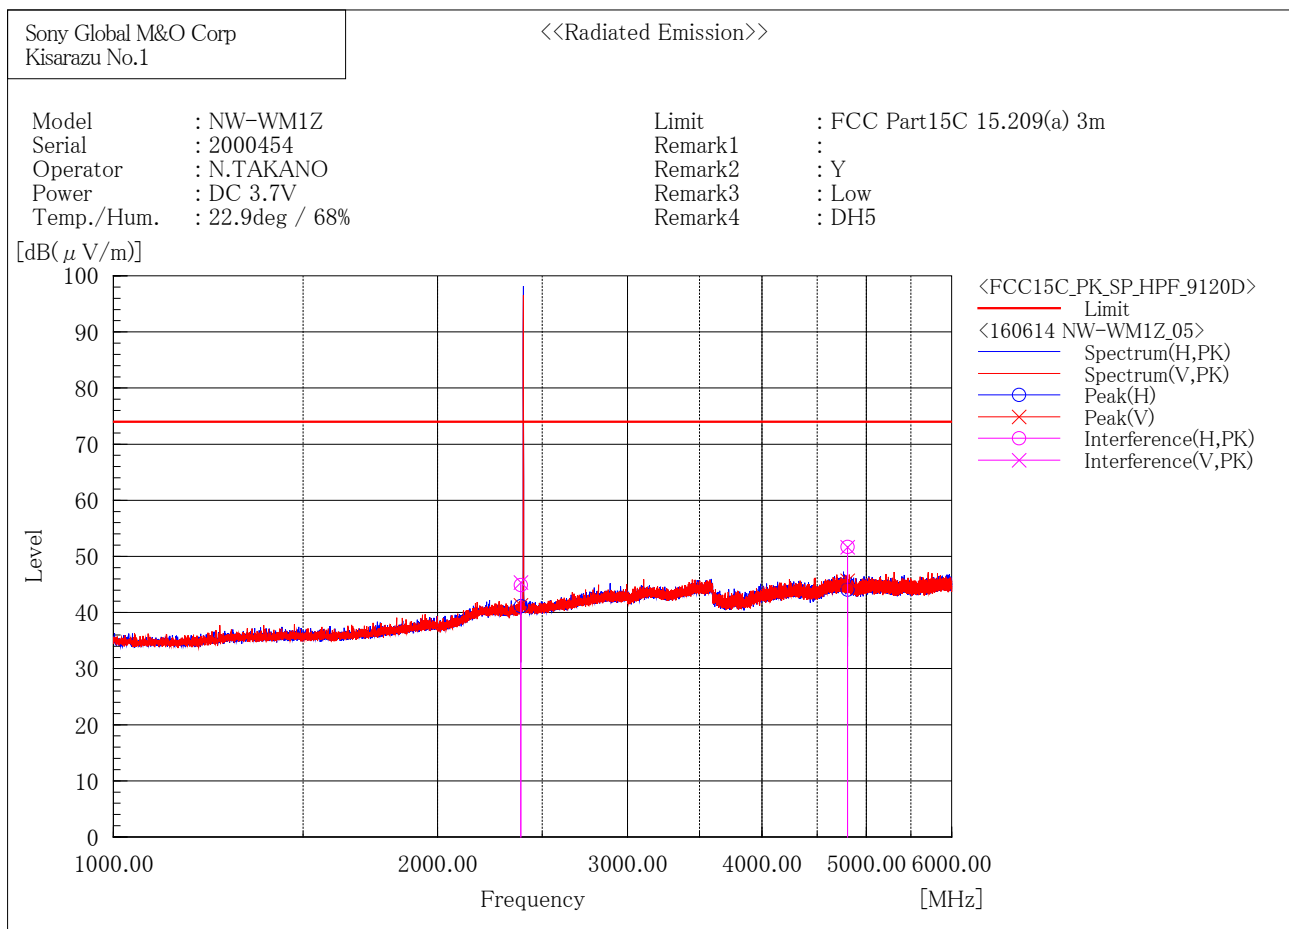

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2389.253	43.3	1.6	44.9	74.0	29.1	130.0	103.3
2	4804.011	42.1	9.6	51.7	74.0	22.3	149.0	19.8

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2389.207	43.8	1.6	45.4	74.0	28.6	142.0	259.4
2	4804.518	42.1	9.6	51.7	74.0	22.3	145.0	200.9

1) Date of measurement

: June 15, 2016

[BDR(DH5)/2441MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 22.6deg / 63%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Mid
 Remark4 : DH5

[dB(μV/m)]

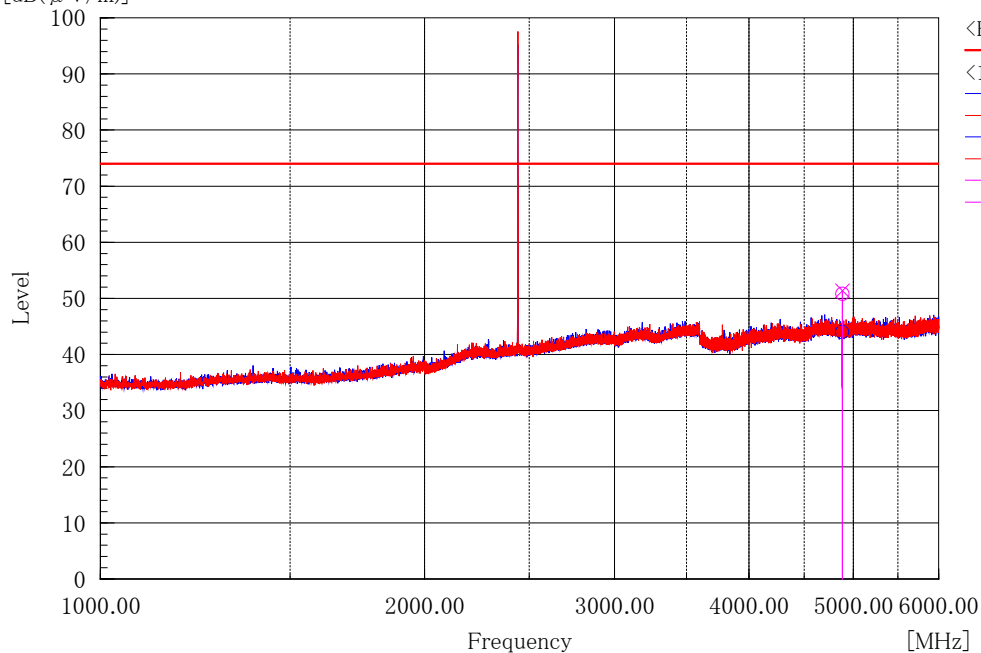

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.466	41.3	9.5	50.8	74.0	23.2	140.0	250.6

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.498	41.9	9.5	51.4	74.0	22.6	160.9	222.4

1) Date of measurement

: June 15, 2016

[BDR(DH5)/2480MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 22.6deg / 63%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Hi
 Remark4 : DH5

[dB(μV/m)]

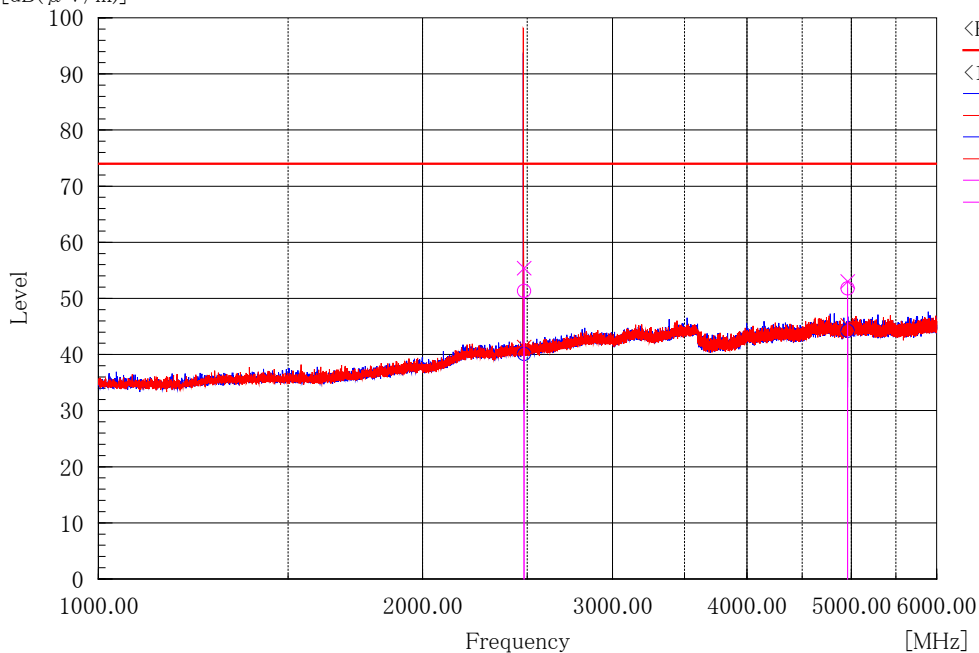

<FCC15C_PK_SP_HPF_9120D>
 Limit
 <160615 NW-WM1Z_04>
 Spectrum(H,PK)
 Spectrum(V,PK)
 Peak(H)
 Peak(V)
 Interference(H,PK)
 Interference(V,PK)

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.505	49.5	1.9	51.4	74.0	22.6	128.2	223.1
2	4959.789	42.0	9.8	51.8	74.0	22.2	120.0	223.2

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.506	53.5	1.9	55.4	74.0	18.6	117.9	270.8
2	4959.278	43.2	9.8	53.0	74.0	21.0	116.0	245.7

1) Date of measurement

: June 15, 2016


[EDR(3DH5)/2402MHz]

Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 22.6deg / 63%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Low
 Remark4 : 3DH5

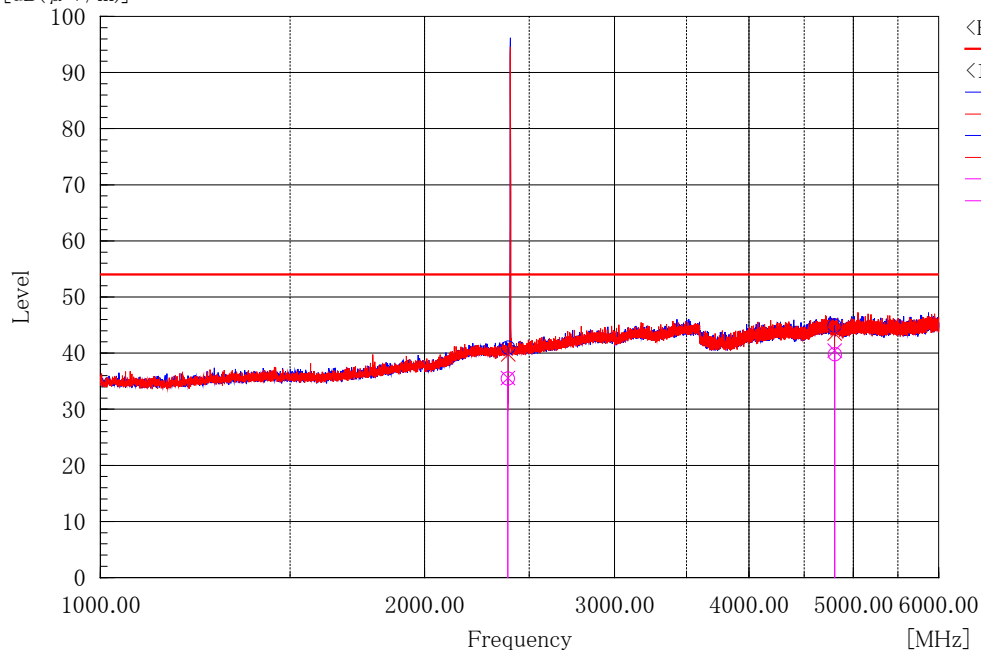[dB(μ V/m)]

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2388.555	33.9	1.6	35.5	54.0	18.5	161.6	296.4
2	4804.834	30.2	9.6	39.8	54.0	14.2	119.0	295.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2388.318	34.0	1.6	35.6	54.0	18.4	124.0	245.5
2	4804.050	30.9	9.6	40.5	54.0	13.5	140.0	257.8

1) Date of measurement

: June 15, 2016

[EDR(3DH5)/2441MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 22.6deg / 63%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Mid
 Remark4 : 3DH5

[dB(μV/m)]

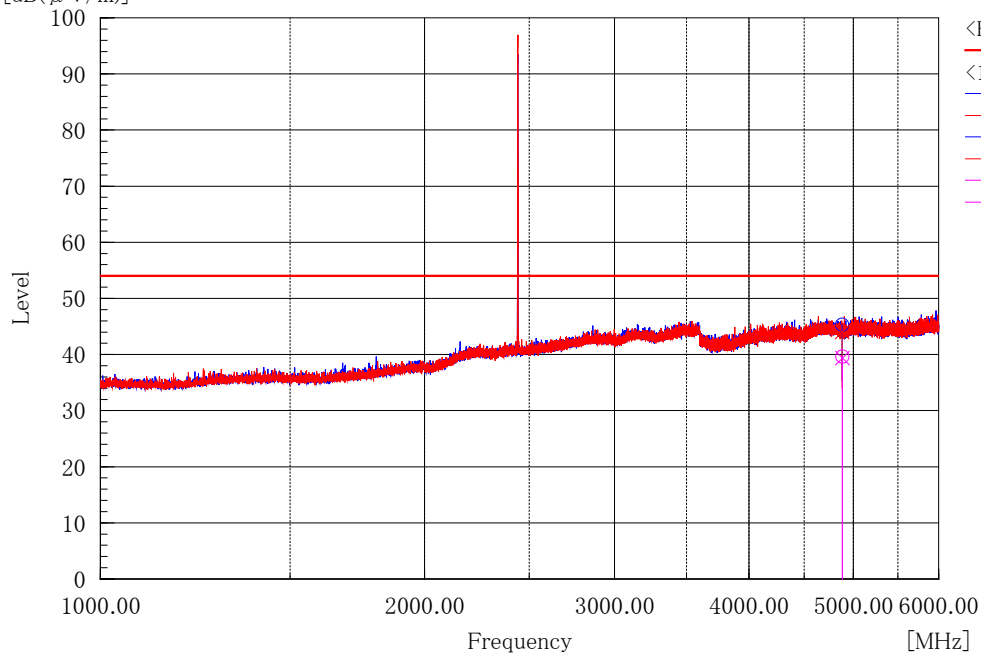

Final Result

--- Horizontal Polarization (AV) ---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.861	30.2	9.5	39.7	54.0	14.3	100.0	226.8


--- Vertical Polarization (AV) ---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.709	29.9	9.5	39.4	54.0	14.6	185.5	108.4

1) Date of measurement

: June 15, 2016

[EDR(3DH5)/2480MHz]

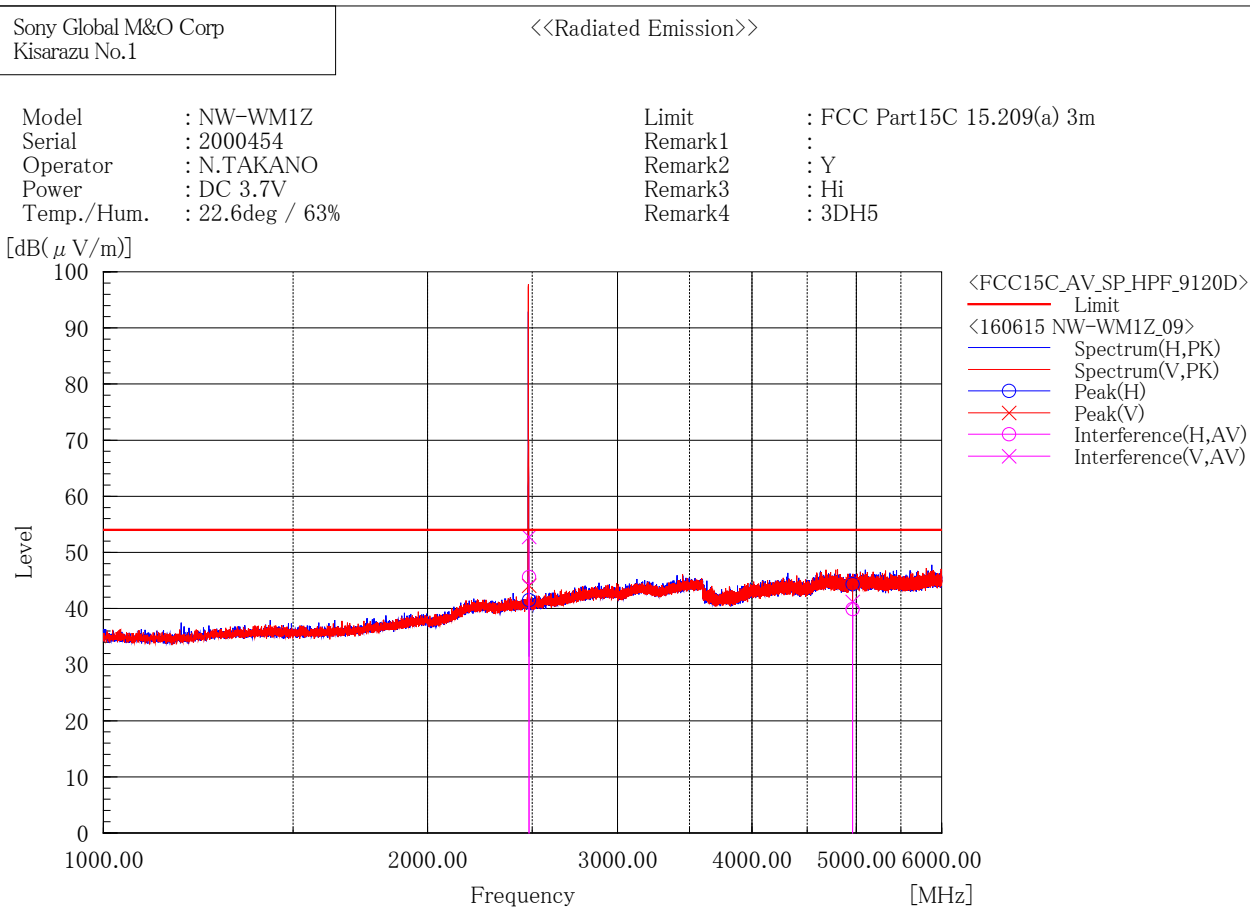

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	43.7	1.9	45.6	54.0	8.4	228.6	282.4
2	4960.594	30.1	9.8	39.9	54.0	14.1	374.6	29.6


--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	50.9	1.9	52.8	54.0	1.2	133.1	285.2
2	4959.769	31.4	9.8	41.2	54.0	12.8	137.4	267.4

1) Date of measurement

: June 15, 2016

[EDR(3DH5)/2402MHz]

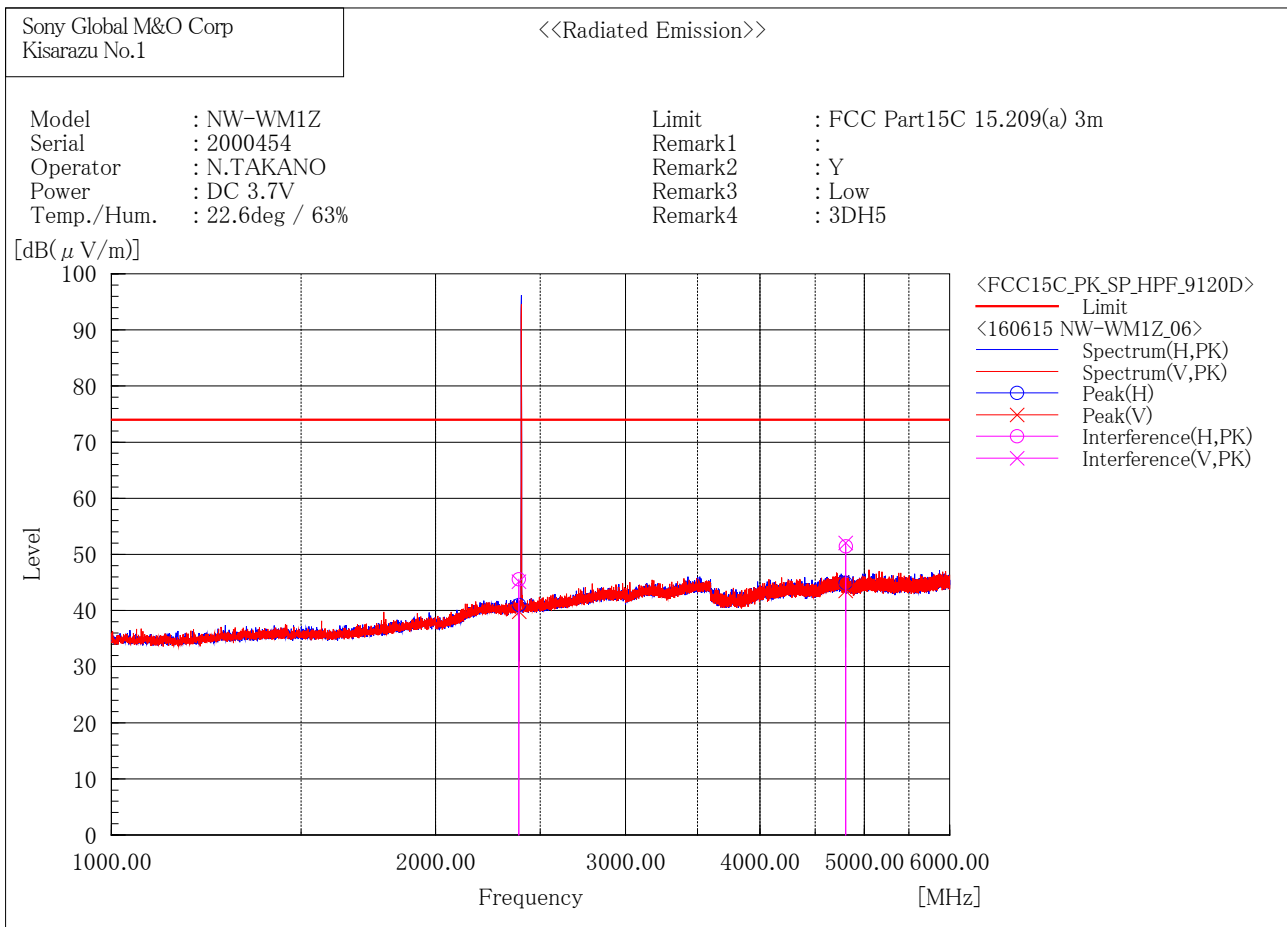

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2388.892	44.0	1.6	45.6	74.0	28.4	137.1	292.7
2	4804.995	41.9	9.6	51.5	74.0	22.5	116.6	295.9


--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2389.462	43.6	1.6	45.2	74.0	28.8	124.0	269.0
2	4803.799	42.4	9.6	52.0	74.0	22.0	140.0	260.0

1) Date of measurement

: June 15, 2016

[EDR(3DH5)/2441MHz]

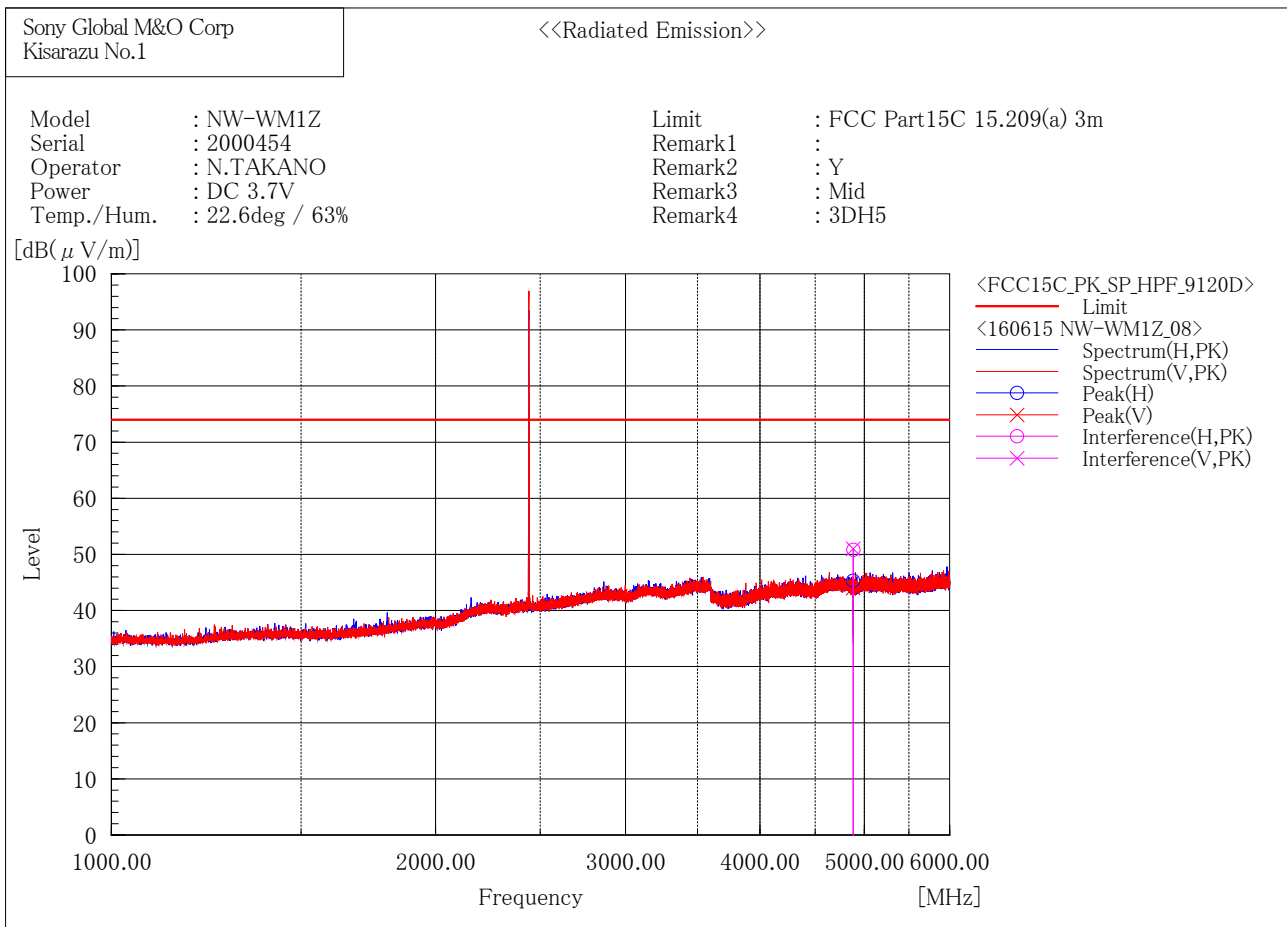

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.923	41.3	9.5	50.8	74.0	23.2	100.0	226.8


--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.086	41.5	9.5	51.0	74.0	23.0	185.5	108.4

1) Date of measurement

: June 15, 2016

[EDR(3DH5)/2480MHz]

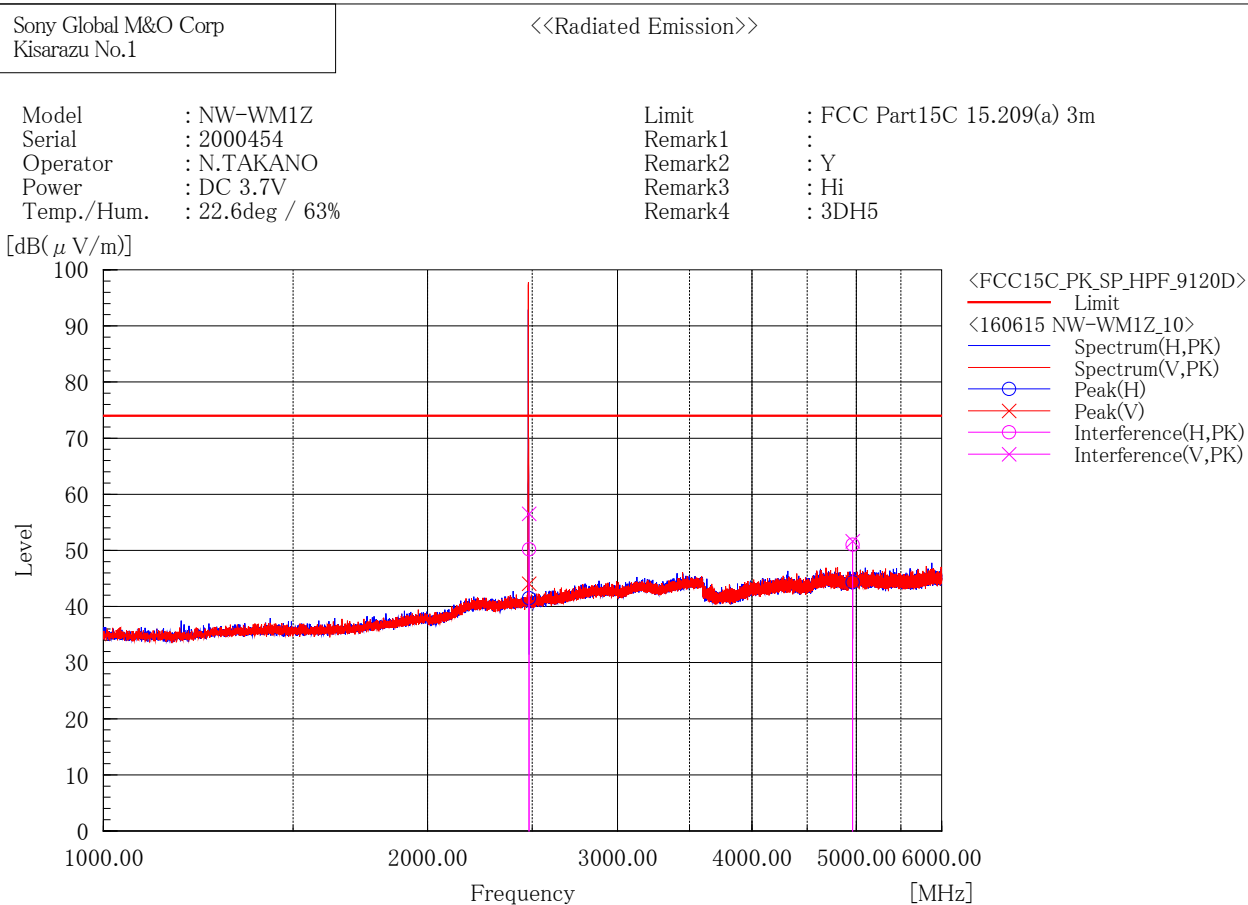

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.505	48.3	1.9	50.2	74.0	23.8	228.6	282.4
2	4960.587	41.2	9.8	51.0	74.0	23.0	374.7	29.5

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.515	54.6	1.9	56.5	74.0	17.5	133.1	285.8
2	4959.721	41.8	9.8	51.6	74.0	22.4	137.4	267.4

6 GHz - 18 GHz

1) Date of measurement

: June 16, 2016

[BDR(DH5)/2402MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Low
 Remark4 : DH5

[dB(μV/m)]

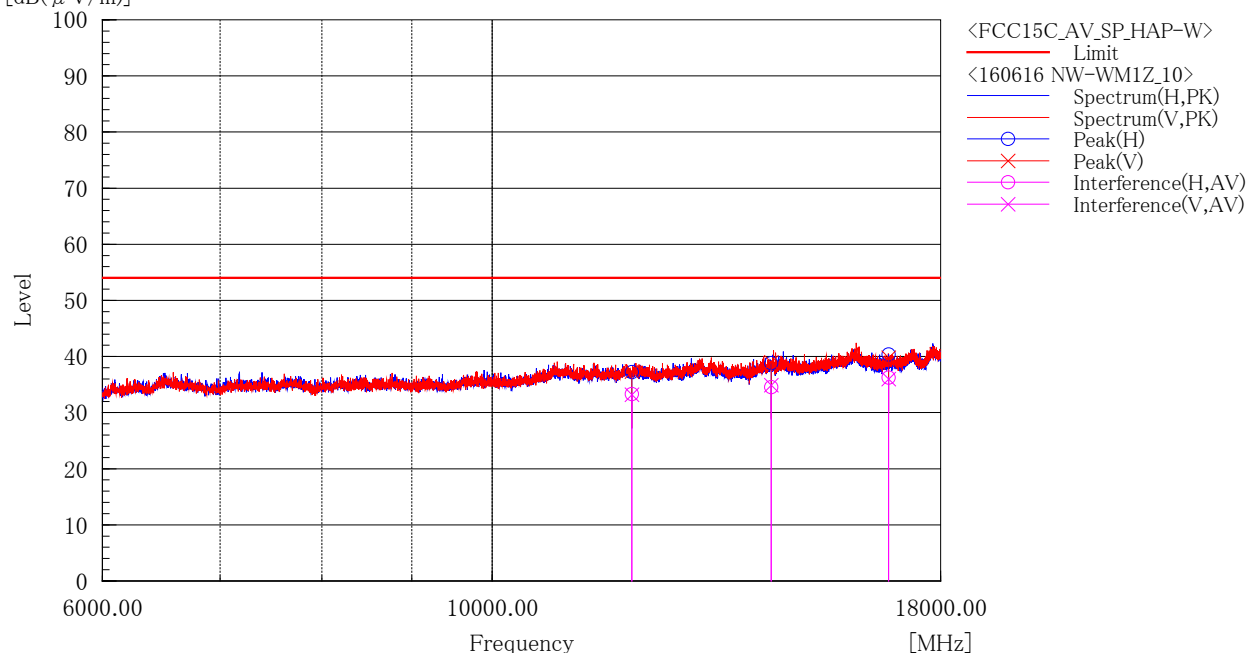

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12008.584	37.5	-4.2	33.3	54.0	20.7	100.0	339.7
2	14414.157	37.5	-3.0	34.5	54.0	19.5	130.0	53.5
3	16814.836	37.1	-0.8	36.3	54.0	17.7	230.0	62.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12008.949	37.4	-4.2	33.2	54.0	20.8	131.3	170.7
2	14413.126	37.9	-3.0	34.9	54.0	19.1	133.9	163.9
3	16810.792	36.8	-0.8	36.0	54.0	18.0	100.0	163.6

1) Date of measurement : June 16, 2016


[BDR(DH5)/2441MHz]

Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Mid
 Remark4 : DH5

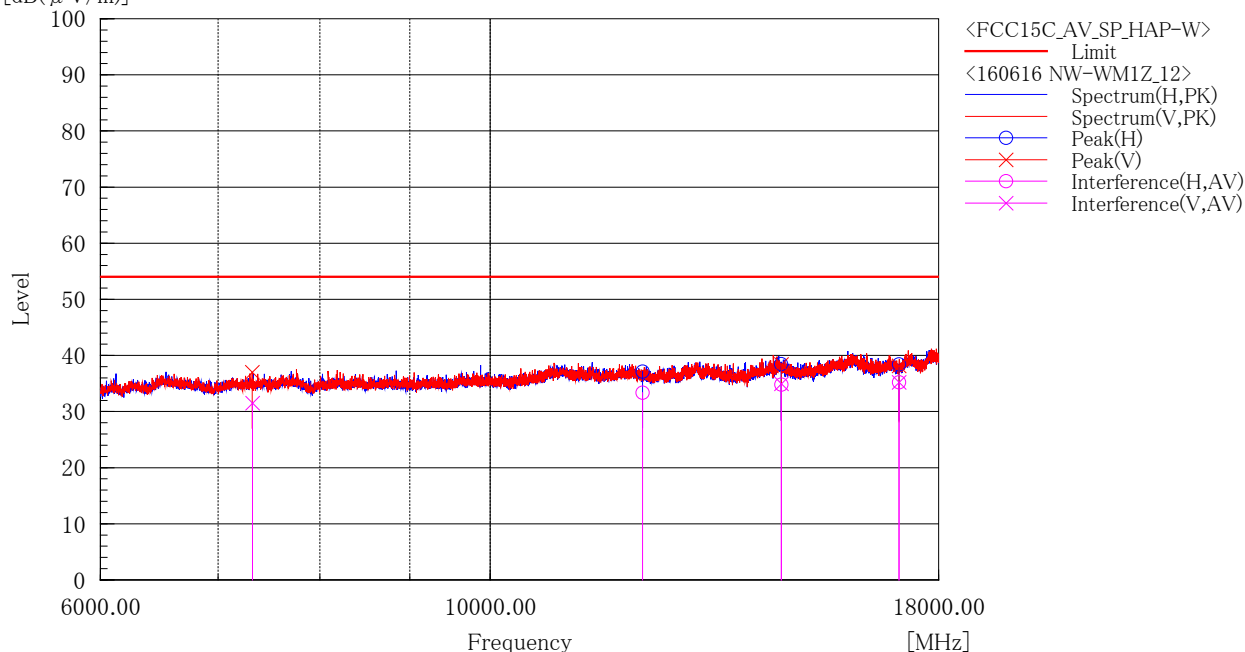[dB(μ V/m)]

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12209.929	37.9	-4.5	33.4	54.0	20.6	302.9	298.4
2	14644.100	37.5	-2.7	34.8	54.0	19.2	195.5	65.0
3	17087.668	35.2	0.0	35.2	54.0	18.8	301.3	230.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.012	42.5	-11.0	31.5	54.0	22.5	287.1	311.0
2	14645.430	37.7	-2.7	35.0	54.0	19.0	202.2	310.8
3	17086.590	35.2	0.0	35.2	54.0	18.8	200.9	262.8

1) Date of measurement

: June 16, 2016


[BDR(DH5)/2480MHz]

Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Hi
 Remark4 : DH5

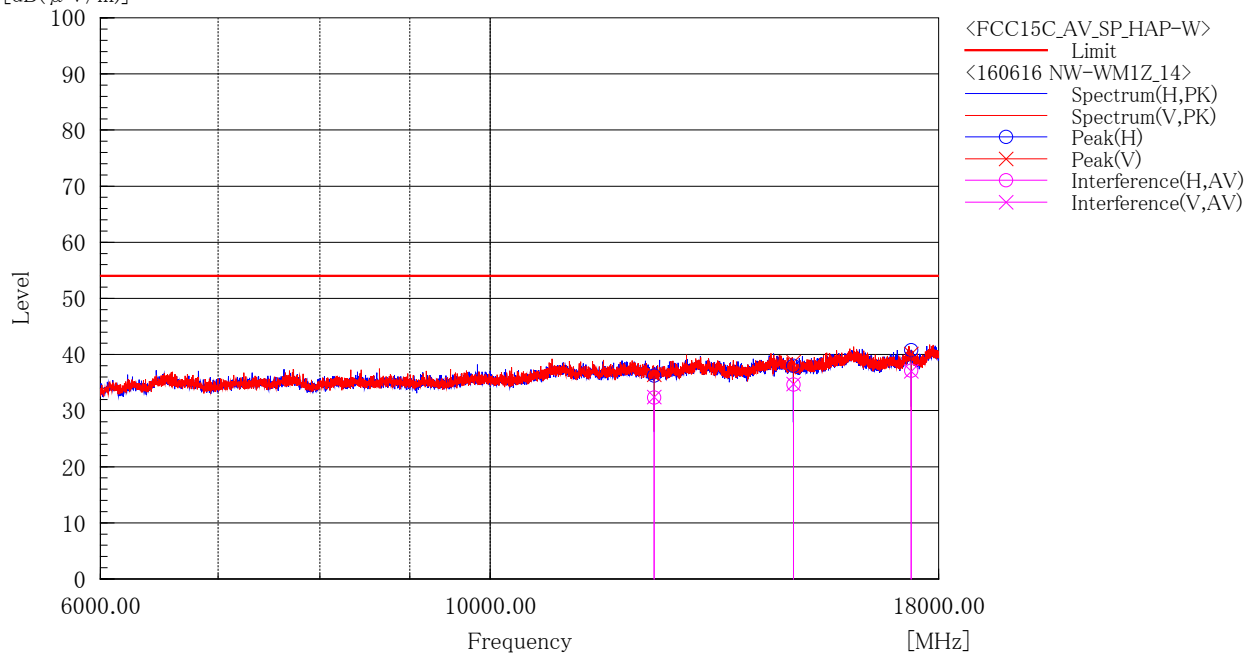[dB(μ V/m)]

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12398.740	37.0	-4.7	32.3	54.0	21.7	432.2	6.3
2	14879.288	37.3	-2.7	34.6	54.0	19.4	222.4	59.4
3	17362.432	36.9	0.2	37.1	54.0	16.9	210.7	48.7

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12399.524	37.1	-4.7	32.4	54.0	21.6	322.3	188.5
2	14880.788	37.5	-2.7	34.8	54.0	19.2	429.4	73.3
3	17362.946	36.8	0.2	37.0	54.0	17.0	146.0	334.0

1) Date of measurement

: June 16, 2016

[BDR(DH5)/2402MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Low
 Remark4 : DH5

[dB(μV/m)]

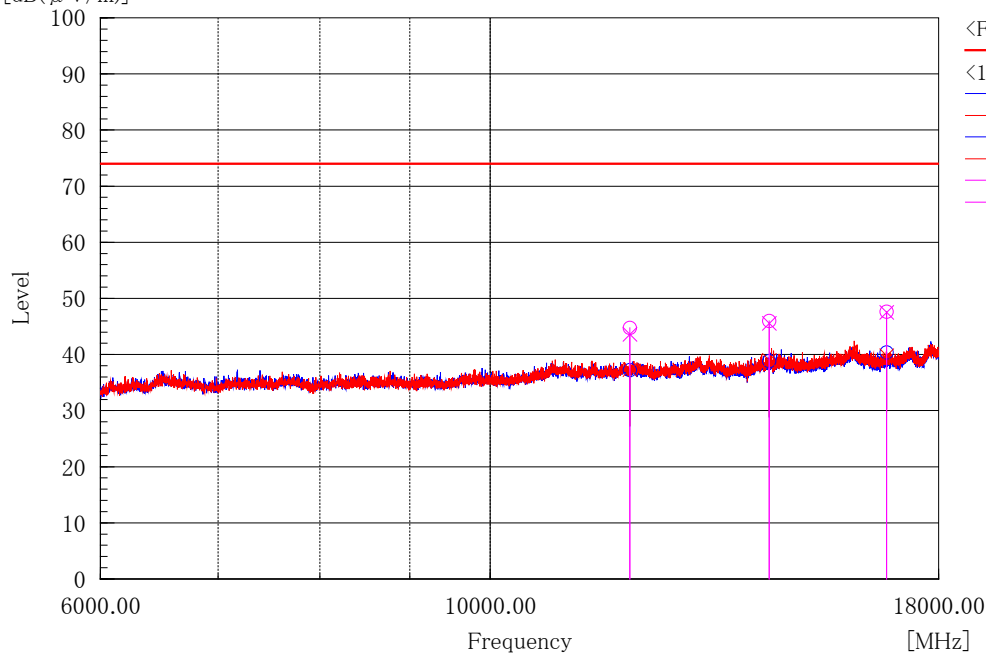

<FCC15C_PK_SP_HAP-W>
 Limit
 <160616 NW-WM1Z_11>
 Spectrum(H,PK)
 Spectrum(V,PK)
 Peak(H)
 Peak(V)
 Interference(H,PK)
 Interference(V,PK)

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12007.754	48.9	-4.2	44.7	74.0	29.3	100.0	339.8
2	14414.588	49.0	-3.0	46.0	74.0	28.0	130.0	53.4
3	16813.230	48.4	-0.8	47.6	74.0	26.4	230.0	62.7

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12008.196	47.8	-4.2	43.6	74.0	30.4	131.3	170.7
2	14413.808	48.6	-3.0	45.6	74.0	28.4	134.0	163.9
3	16811.008	48.3	-0.8	47.5	74.0	26.5	100.0	163.9

1) Date of measurement

: June 16, 2016

[BDR(DH5)/2441MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : N.TAKANO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Mid
 Remark4 : DH5

[dB(μV/m)]

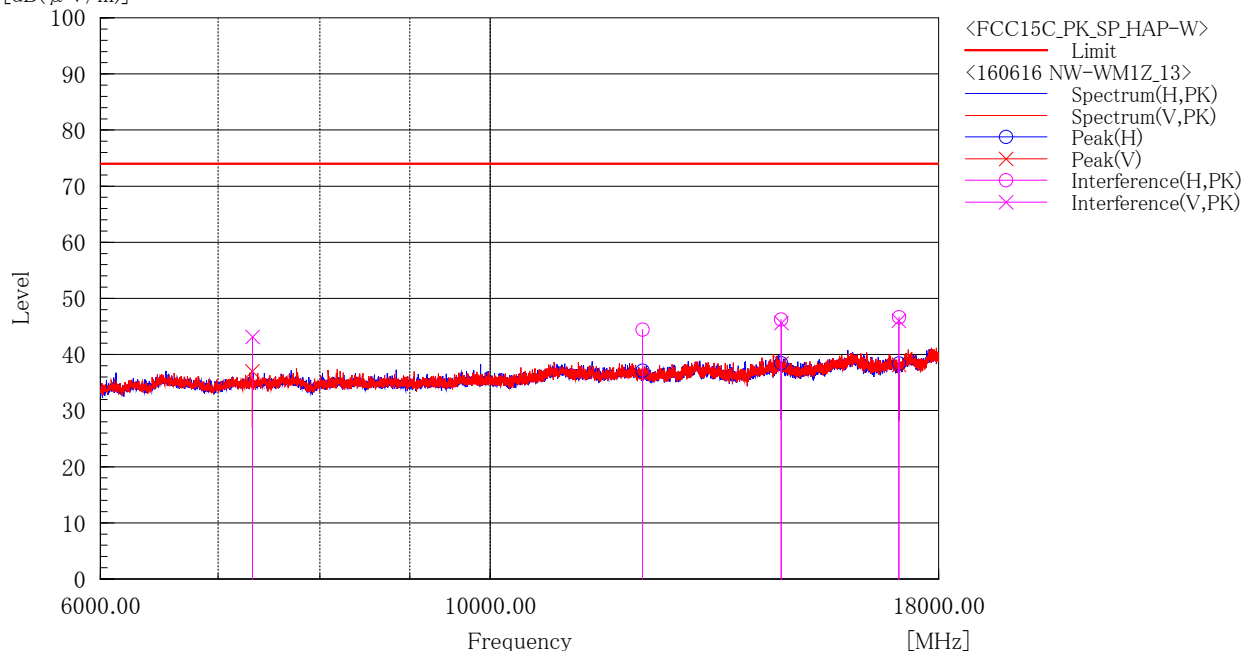

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12211.097	48.9	-4.5	44.4	74.0	29.6	303.0	298.5
2	14643.906	49.0	-2.7	46.3	74.0	27.7	195.5	64.9
3	17086.670	46.7	0.0	46.7	74.0	27.3	301.4	230.0


--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.066	54.2	-11.0	43.2	74.0	30.8	287.2	311.1
2	14644.572	48.3	-2.7	45.6	74.0	28.4	202.2	311.1
3	17086.004	46.0	0.0	46.0	74.0	28.0	200.9	262.8

1) Date of measurement

: June 16, 2016

[BDR(DH5)/2480MHz]

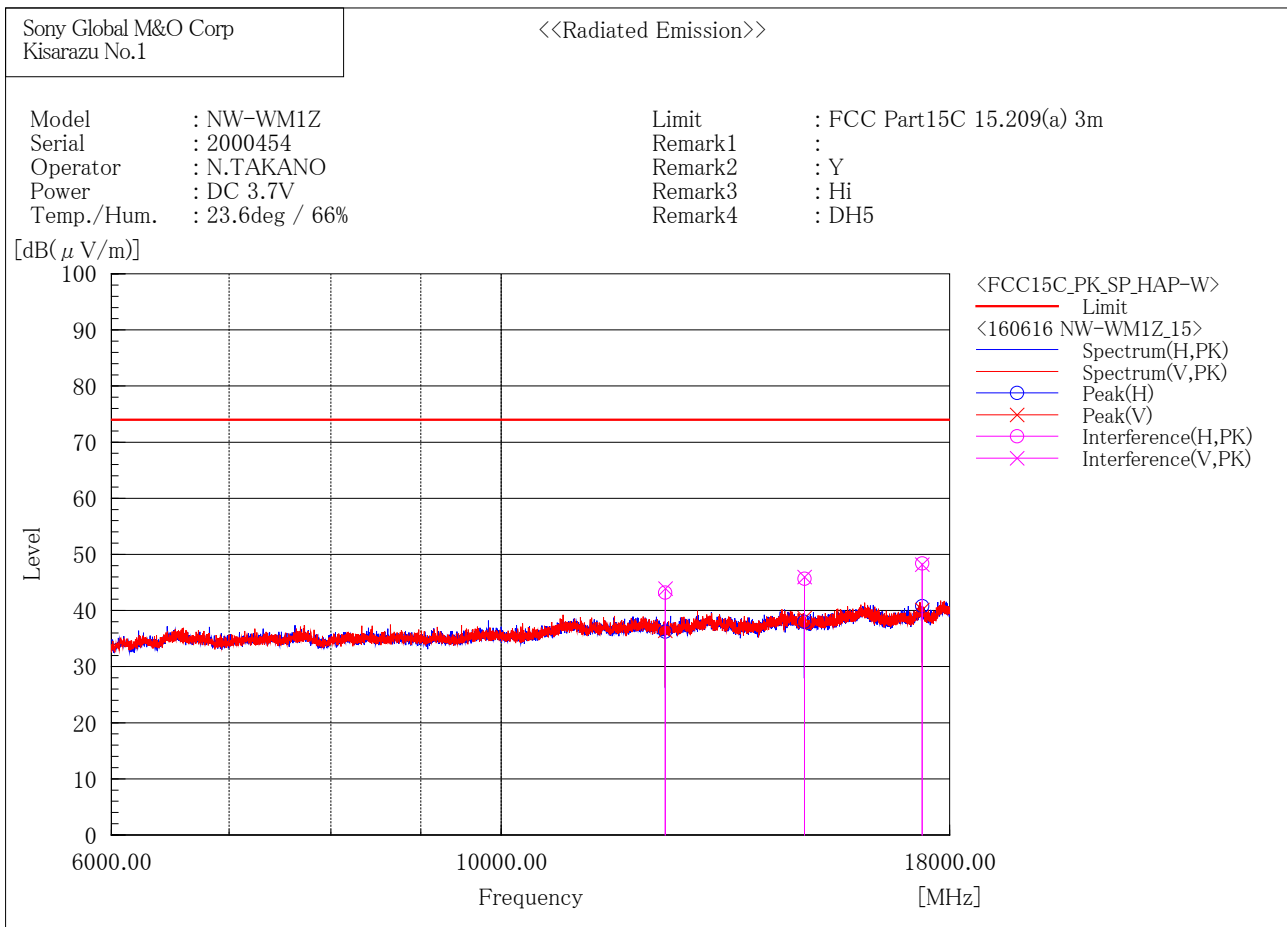

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12398.380	47.9	-4.7	43.2	74.0	30.8	432.2	6.2
2	14879.619	48.4	-2.7	45.7	74.0	28.3	222.4	59.4
3	17361.468	48.2	0.2	48.4	74.0	25.6	210.7	48.7

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12400.291	48.6	-4.7	43.9	74.0	30.1	322.4	188.5
2	14881.632	48.7	-2.7	46.0	74.0	28.0	429.5	73.3
3	17363.580	48.0	0.2	48.2	74.0	25.8	146.0	334.1

1) Date of measurement

: June 16, 2016


[EDR(3DH5)/2402MHz]

Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.AOYAMA
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Low
 Remark4 : 3DH5

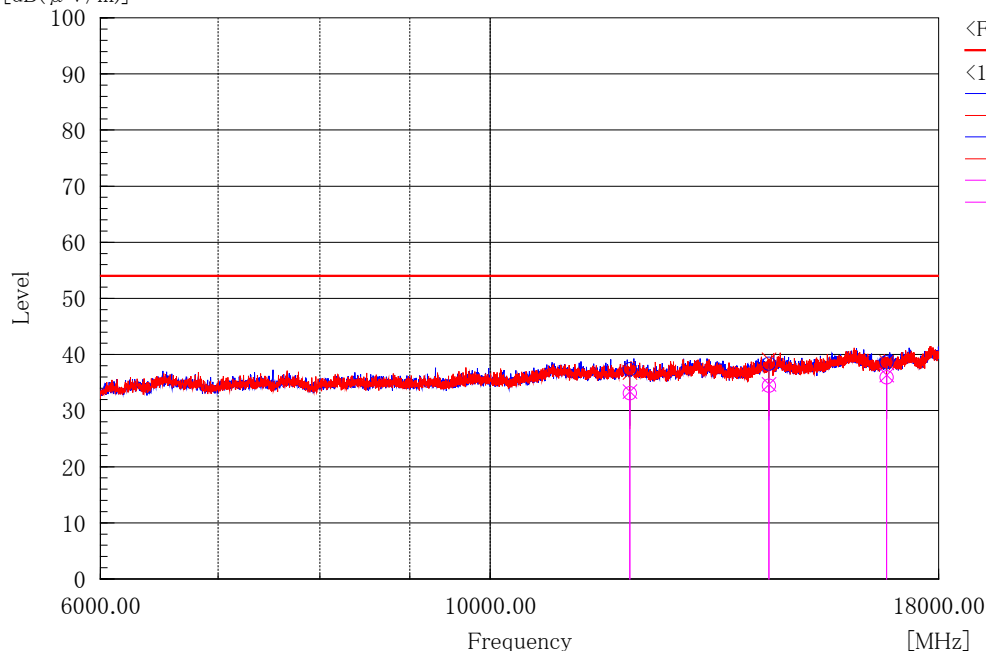[dB(μ V/m)]

<FCC15C_AV_SP_HAP-W>
 Limit
 <160616 NW-WM1Z_20>
 Spectrum(H,PK)
 Spectrum(V,PK)
 Peak(H)
 Peak(V)
 Interference(H,AV)
 Interference(V,AV)

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12010.790	37.3	-4.2	33.1	54.0	20.9	403.3	142.2
2	14412.166	37.5	-3.0	34.5	54.0	19.6	121.7	345.0
3	16815.336	36.8	-0.8	36.0	54.0	18.0	115.7	329.3

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12008.608	37.6	-4.2	33.4	54.0	20.6	304.6	258.6
2	14411.368	37.7	-3.0	34.7	54.0	19.3	145.4	305.4
3	16816.124	37.2	-0.8	36.4	54.0	17.6	375.6	295.8

1) Date of measurement

: June 16, 2016


[EDR(3DH5)/2441MHz]

Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.AOYAMA
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Mid
 Remark4 : 3DH5

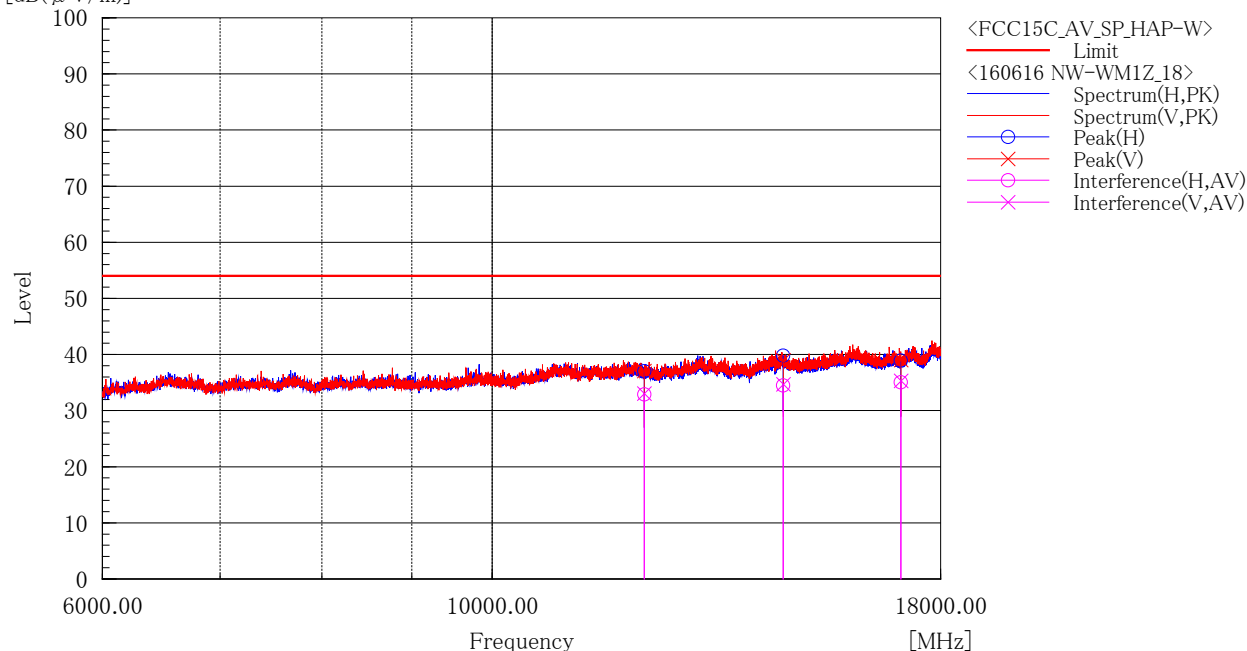[dB(μ V/m)]

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12205.850	37.4	-4.5	32.9	54.0	21.1	227.2	159.4
2	14643.685	37.2	-2.7	34.5	54.0	19.5	135.3	118.0
3	17085.102	35.1	0.0	35.1	54.0	18.9	178.1	55.6


--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12207.627	37.6	-4.5	33.1	54.0	20.9	276.2	324.8
2	14647.764	37.4	-2.7	34.7	54.0	19.3	195.0	332.8
3	17086.564	35.3	0.0	35.3	54.0	18.7	286.2	122.6

1) Date of measurement

: June 16, 2016

[EDR(3DH5)/2480MHz]

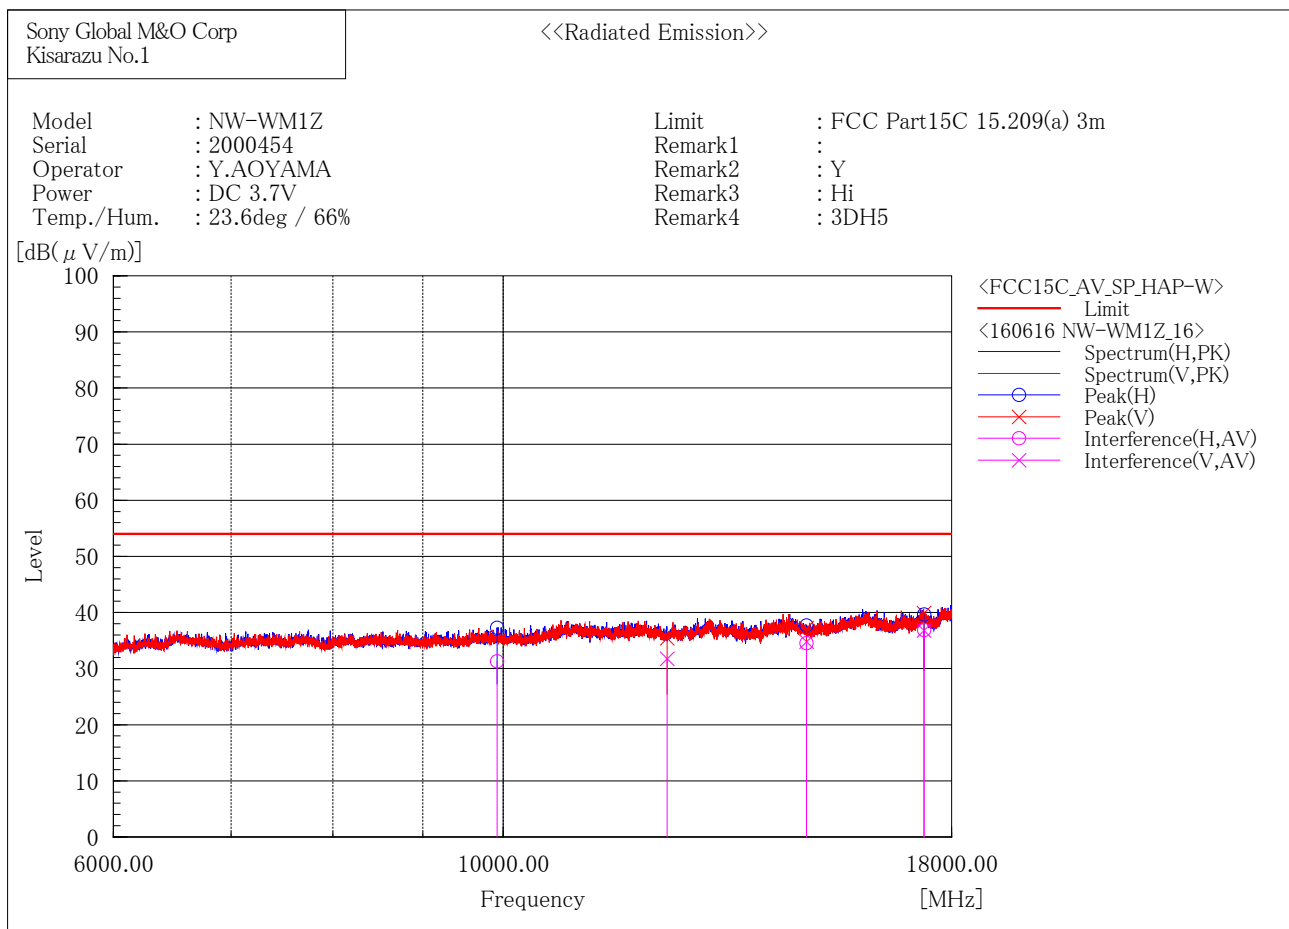

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	9921.799	38.3	-7.0	31.3	54.0	22.7	275.0	143.4
2	14882.650	37.3	-2.7	34.6	54.0	19.4	103.0	154.6
3	17362.182	36.7	0.2	36.9	54.0	17.1	225.6	83.4

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12396.754	36.5	-4.7	31.8	54.0	22.2	180.8	166.0
2	14880.436	37.5	-2.7	34.8	54.0	19.2	349.2	311.5
3	17359.130	36.6	0.2	36.8	54.0	17.2	142.0	18.4

1) Date of measurement

: June 16, 2016

[EDR(3DH5)/2402MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.AOYAMA
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Low
 Remark4 : 3DH5

[dB(μV/m)]

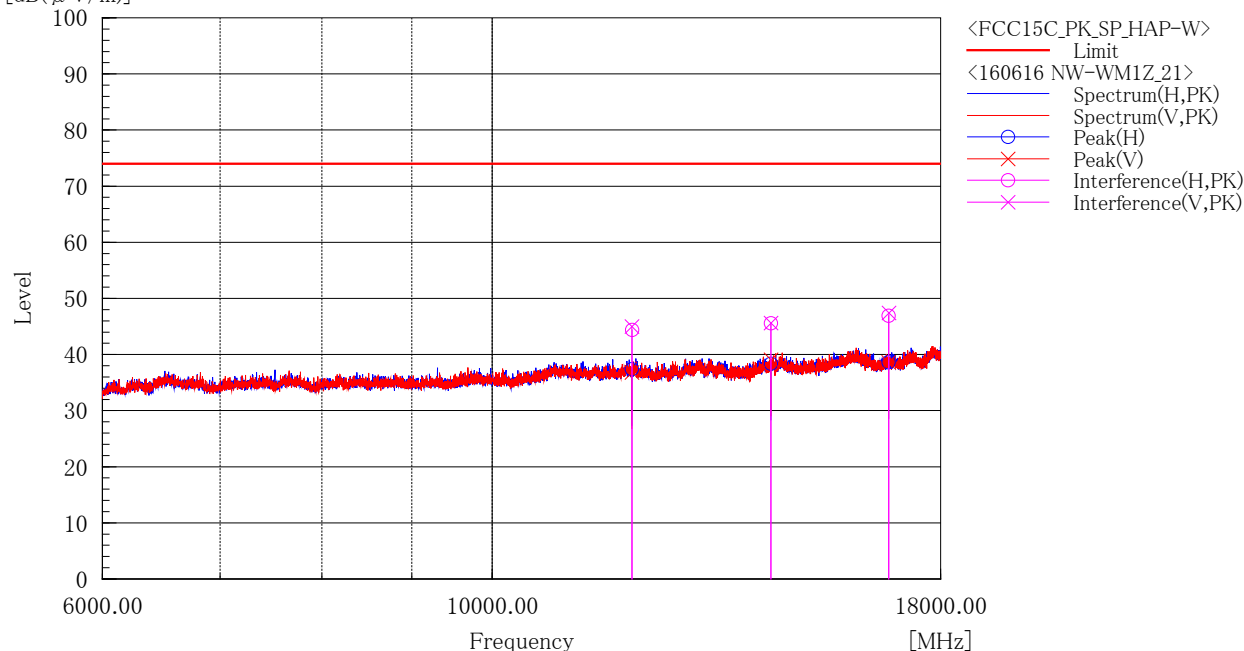

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12011.663	48.6	-4.2	44.4	74.0	29.6	403.4	142.2
2	14412.007	48.6	-3.0	45.6	74.0	28.4	121.7	345.1
3	16815.208	47.7	-0.8	46.9	74.0	27.1	115.7	329.4

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12007.841	49.2	-4.2	45.0	74.0	29.0	304.7	258.7
2	14411.242	48.6	-3.0	45.6	74.0	28.4	145.4	305.5
3	16816.376	48.2	-0.8	47.4	74.0	26.6	375.6	295.8

1) Date of measurement

: June 16, 2016

[EDR(3DH5)/2441MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.AOYAMA
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Mid
 Remark4 : 3DH5

[dB(μV/m)]

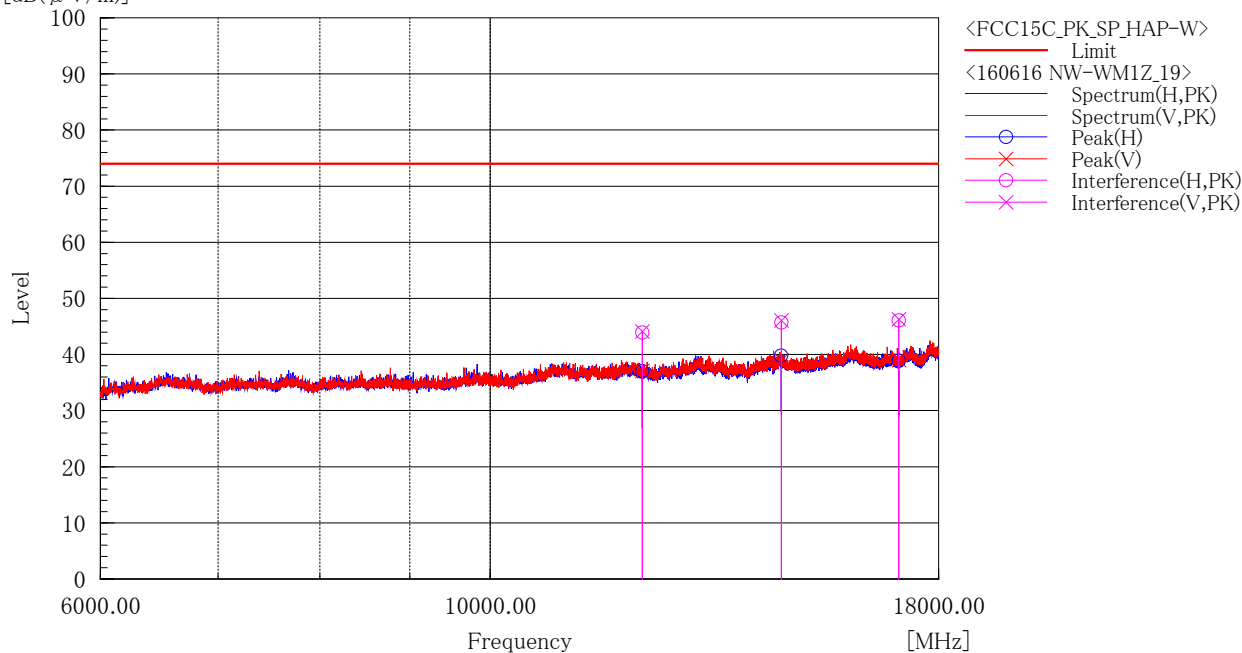

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12205.533	48.4	-4.5	43.9	74.0	30.1	227.2	159.4
2	14644.009	48.4	-2.7	45.7	74.0	28.3	135.3	118.0
3	17084.992	46.1	0.0	46.1	74.0	27.9	178.1	55.6


--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12207.466	48.6	-4.5	44.1	74.0	29.9	276.4	325.0
2	14648.295	48.8	-2.7	46.1	74.0	27.9	195.0	332.9
3	17085.888	46.3	0.0	46.3	74.0	27.7	286.3	122.6

1) Date of measurement

: June 16, 2016

[EDR(3DH5)/2480MHz]

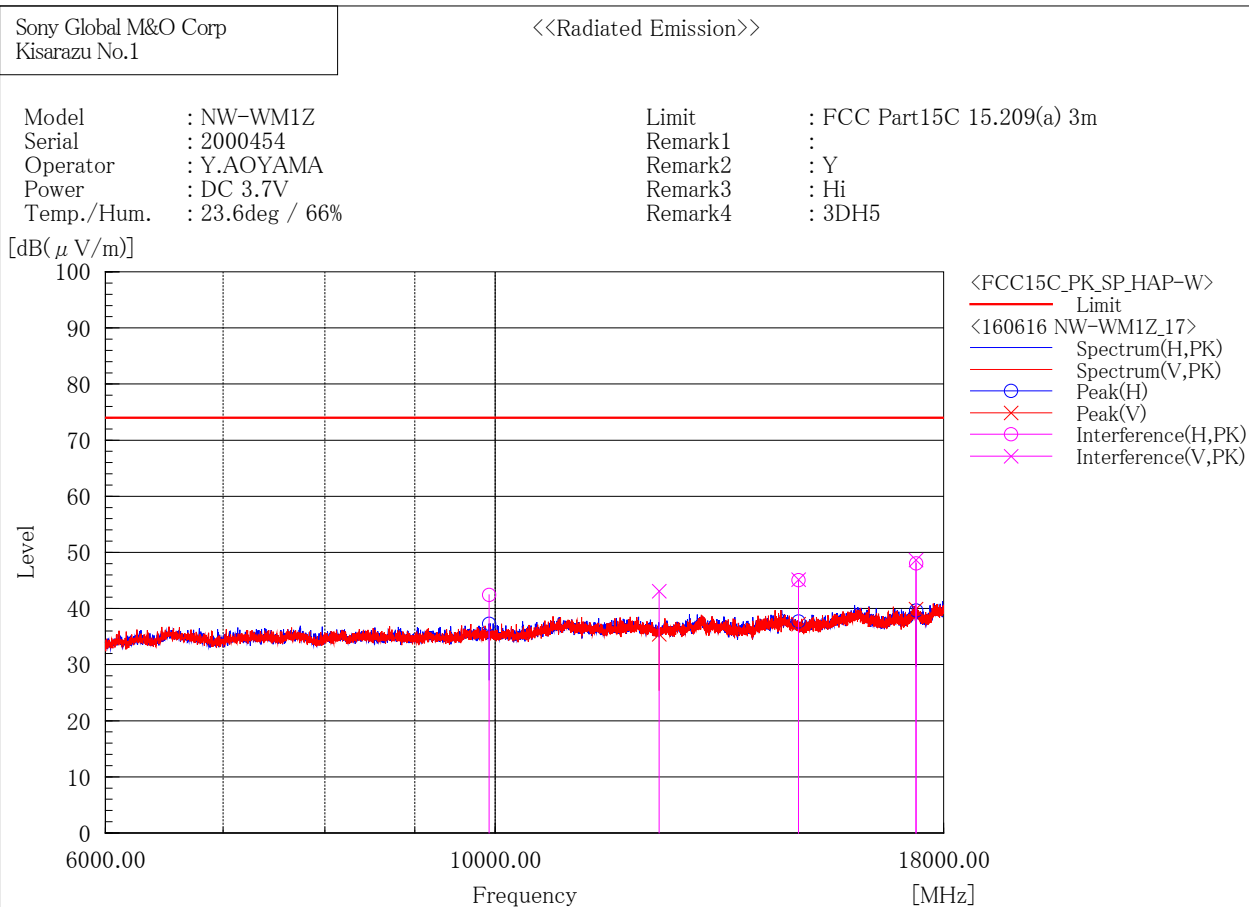

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	9922.702	49.4	-7.0	42.4	74.0	31.6	275.1	143.4
2	14882.421	47.7	-2.7	45.0	74.0	29.0	103.0	154.6
3	17362.884	47.8	0.2	48.0	74.0	26.0	225.6	83.4

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12397.357	47.8	-4.7	43.1	74.0	30.9	180.8	166.0
2	14880.483	47.8	-2.7	45.1	74.0	28.9	349.3	311.6
3	17360.092	48.5	0.2	48.7	74.0	25.3	142.0	18.4

18 GHz – 24.835 GHz

1) Date of measurement

: June 16, 2016

[BDR(DH5)/2402MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.MORIMOTO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Low
 Remark4 : DH5

[dB(μV/m)]

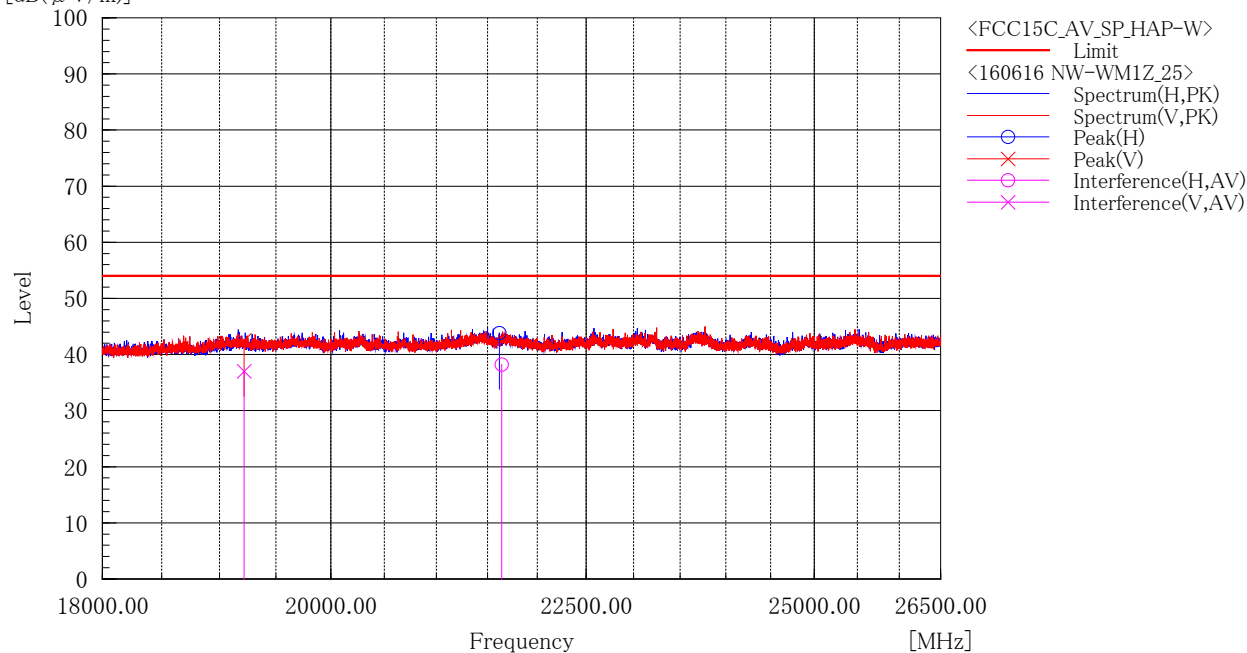

Final Result

--- Horizontal Polarization (AV) ---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21640.276	39.0	-0.8	38.2	54.0	15.8	143.8	263.5

--- Vertical Polarization (AV) ---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19216.324	37.4	-0.4	37.0	54.0	17.0	372.0	255.0

1) Date of measurement

: June 16, 2016


[BDR(DH5)/2441MHz]

Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
Serial : 2000454
Operator : Y.MORIMOTO
Power : DC 3.7V
Temp./Hum. : 23.6deg / 66%Limit : FCC Part15C 15.209(a) 3m
Remark1 :
Remark2 : Y
Remark3 : Mid
Remark4 : DH5

[dB(μV/m)]

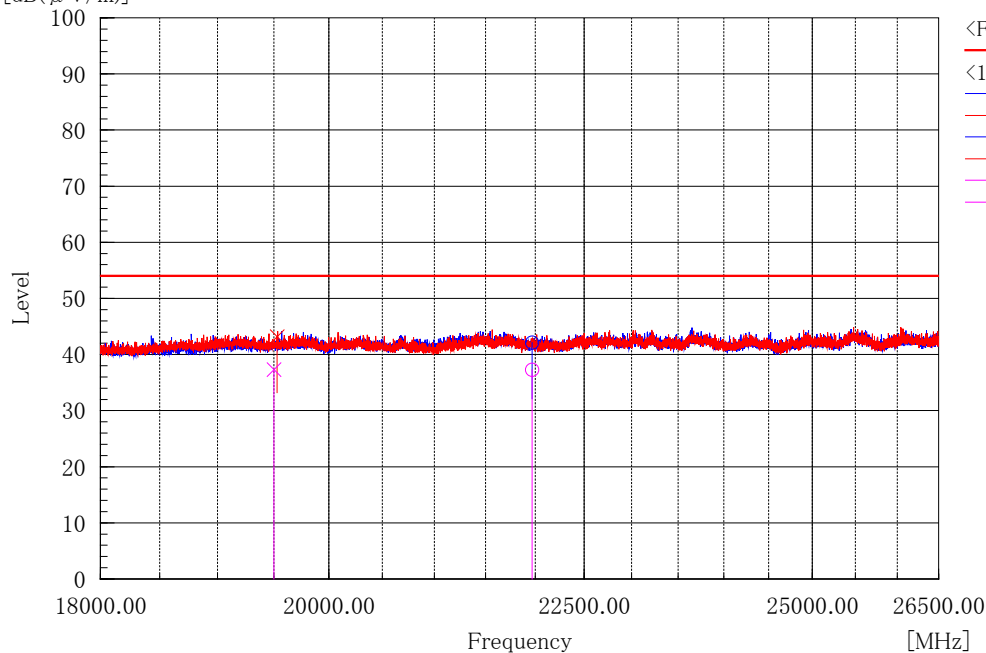

Final Result

--- Horizontal Polarization (AV) ---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21968.660	38.3	-1.0	37.3	54.0	16.7	126.1	226.3

--- Vertical Polarization (AV) ---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19499.588	37.9	-0.5	37.4	54.0	16.6	318.9	127.0

1) Date of measurement

: June 16, 2016


[BDR(DH5)/2480MHz]

Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.MORIMOTO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Hi
 Remark4 : DH5

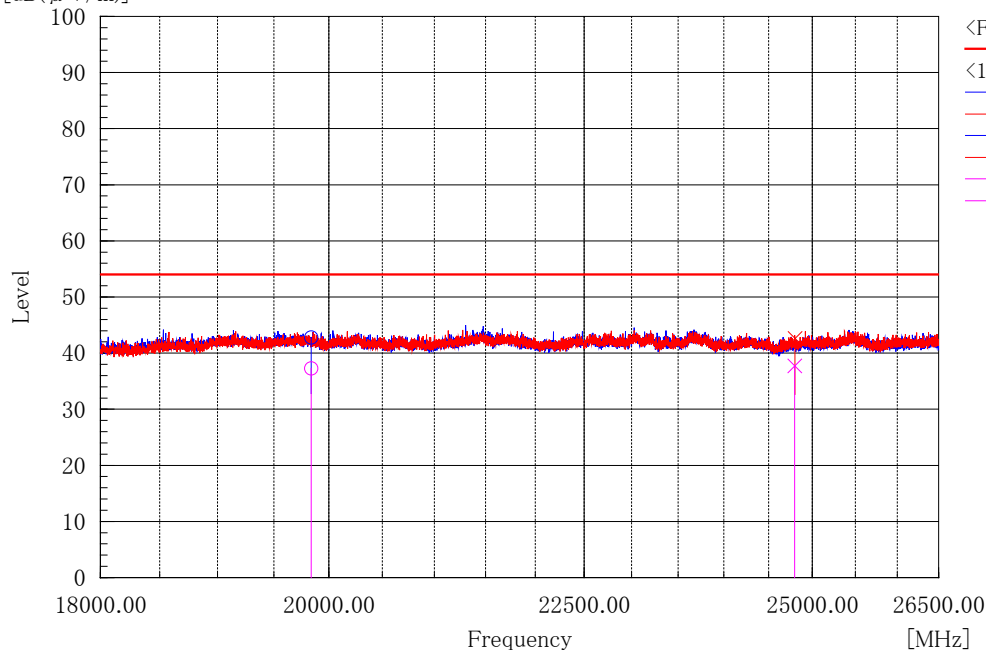[dB(μ V/m)]

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19839.940	37.8	-0.5	37.3	54.0	16.7	246.6	47.2

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μ V)]	c. f [dB(1/m)]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24797.796	39.8	-2.1	37.7	54.0	16.3	383.6	160.3

1) Date of measurement

: June 16, 2016


[BDR(DH5)/2402MHz]

Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
Serial : 2000454
Operator : Y.MORIMOTO
Power : DC 3.7V
Temp./Hum. : 23.6deg / 66%Limit : FCC Part15C 15.209(a) 3m
Remark1 :
Remark2 : Y
Remark3 : Low
Remark4 : DH5

[dB(μV/m)]

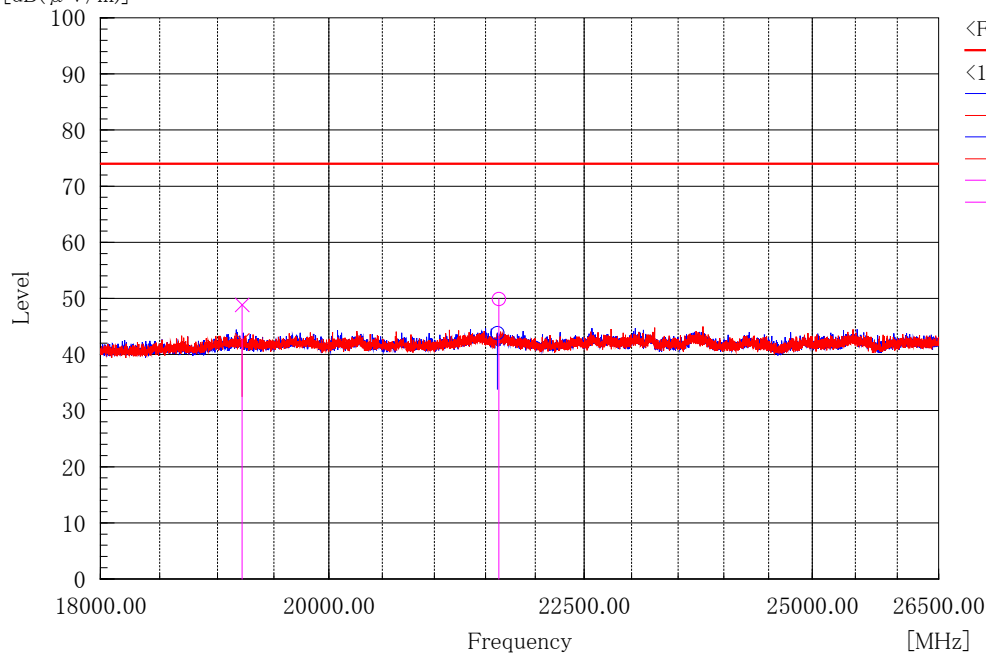

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21633.292	50.7	-0.8	49.9	74.0	24.1	143.8	263.6

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19216.474	49.3	-0.4	48.9	74.0	25.1	372.0	255.0

1) Date of measurement

: June 16, 2016

[BDR(DH5)/2441MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.MORIMOTO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Mid
 Remark4 : DH5

[dB(μV/m)]

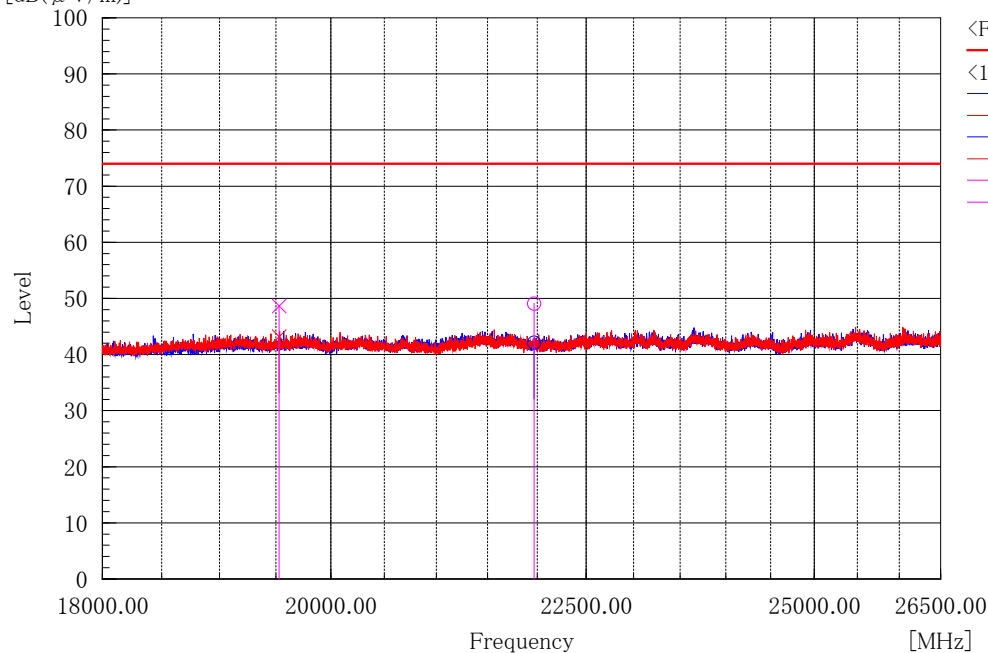

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21967.684	50.1	-1.0	49.1	74.0	24.9	126.1	226.3

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19528.966	49.2	-0.5	48.7	74.0	25.3	318.8	127.0

1) Date of measurement

: June 16, 2016

[BDR(DH5)/2480MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.MORIMOTO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Hi
 Remark4 : DH5

[dB(μV/m)]

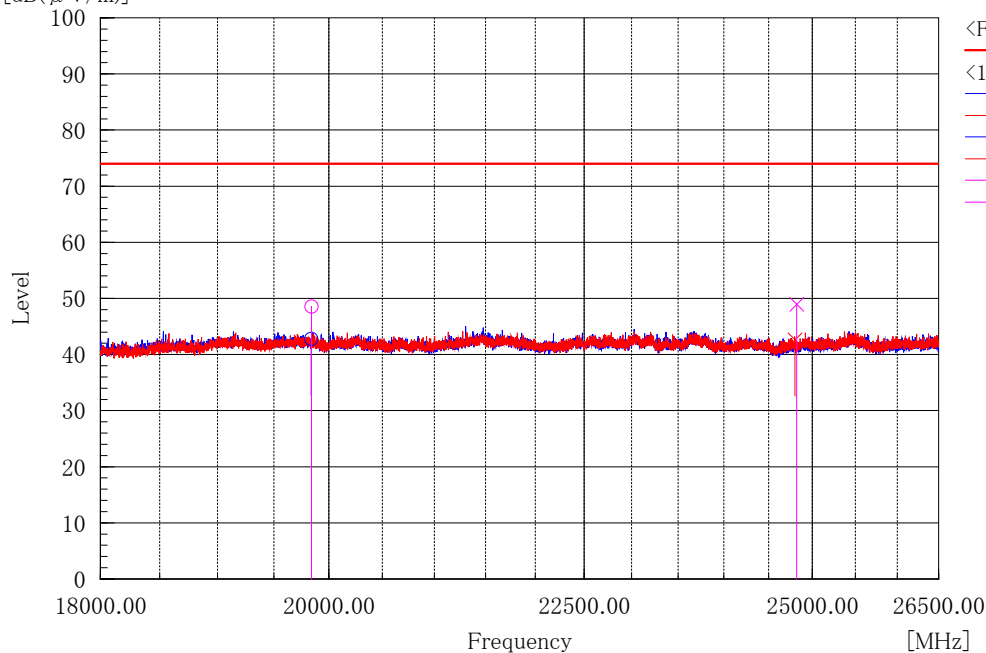

<FCC15C_PK_SP_HAP-W>
 Limit
 <160616 NW-WM1Z_30>
 Spectrum(H,PK)
 Spectrum(V,PK)
 Peak(H)
 Peak(V)
 Interference(H,PK)
 Interference(V,PK)

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19840.698	49.1	-0.5	48.6	74.0	25.4	246.6	47.2

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24818.368	51.1	-2.1	49.0	74.0	25.0	383.6	160.3

1) Date of measurement

: June 16, 2016

[EDR(3DH5)/2402MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.MORIMOTO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Low
 Remark4 : 3DH5

[dB(μV/m)]

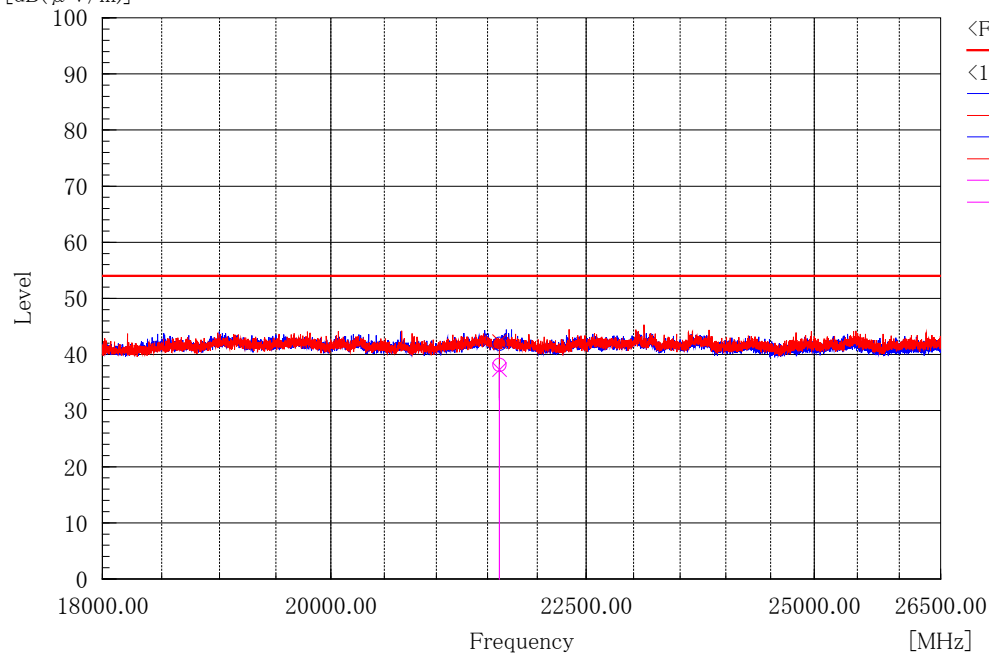

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.128	39.0	-0.8	38.2	54.0	15.8	414.4	285.5

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21619.550	38.1	-0.8	37.3	54.0	16.7	102.3	147.7

1) Date of measurement

: June 16, 2016

[EDR(3DH5)/2441MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.MORIMOTO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Mid
 Remark4 : 3DH5

[dB(μV/m)]

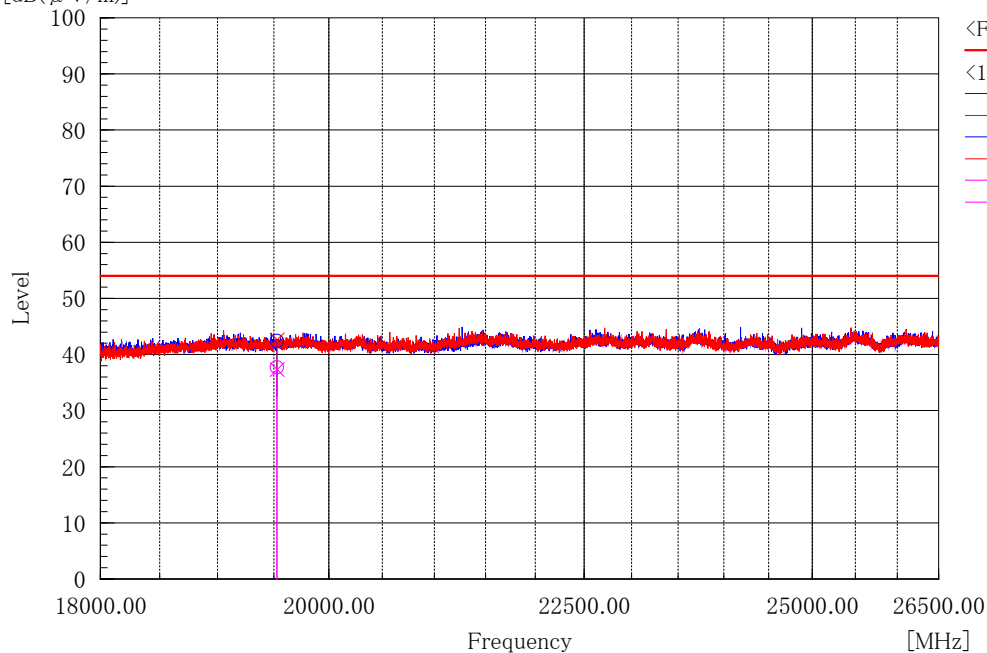

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19526.072	38.2	-0.5	37.7	54.0	16.3	190.5	220.5


--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19529.396	37.8	-0.5	37.3	54.0	16.7	104.7	111.1

1) Date of measurement

: June 16, 2016

[EDR(3DH5)/2480MHz]

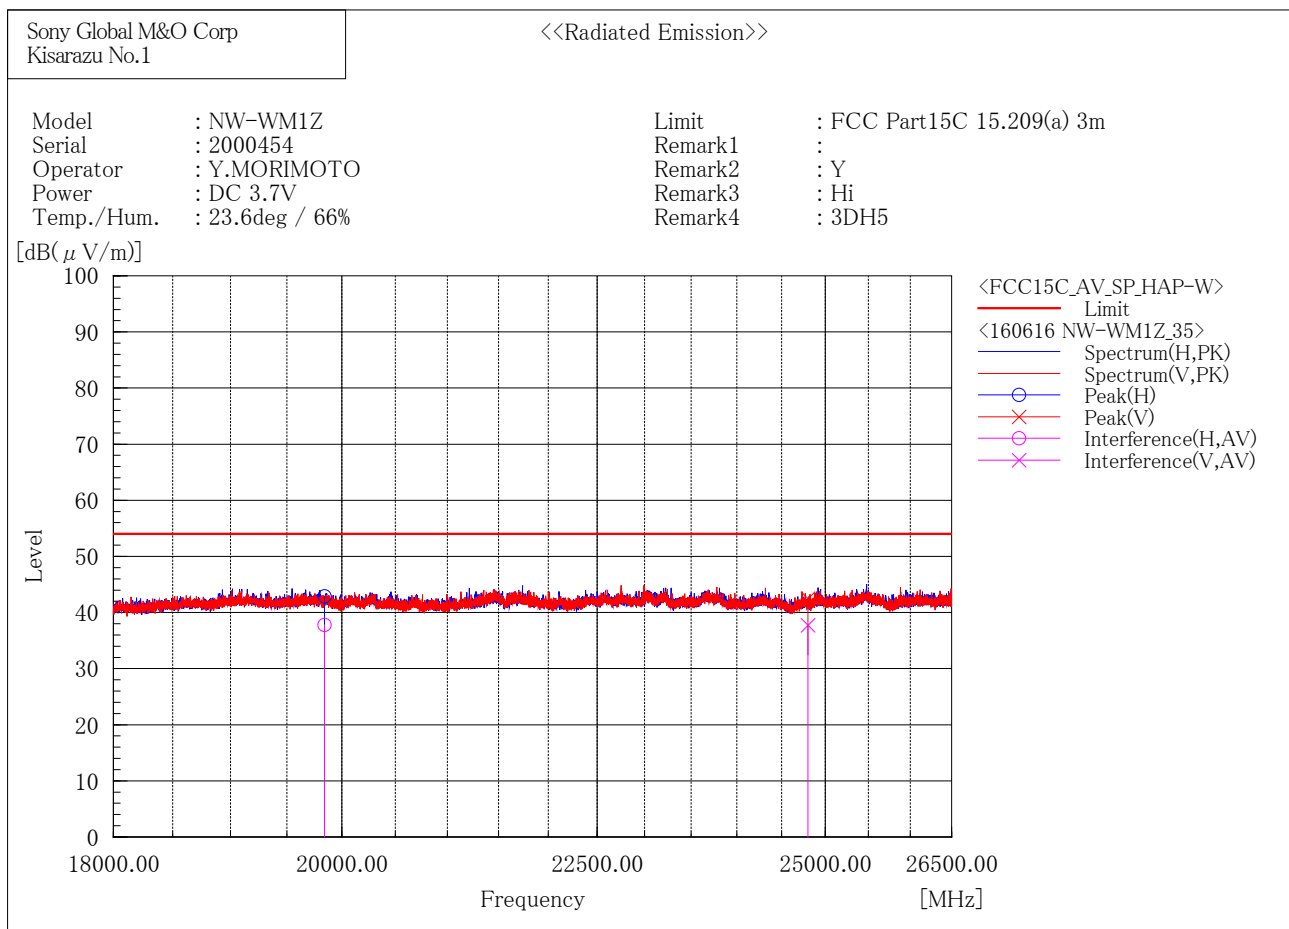

Final Result

--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19841.830	38.3	-0.5	37.8	54.0	16.2	432.2	249.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24801.010	39.8	-2.1	37.7	54.0	16.3	219.1	122.3

1) Date of measurement

: June 16, 2016

[EDR(3DH5)/2402MHz]


Sony Global M&O Corp
Kisarazu No.1

<<Radiated Emission>>

Model : NW-WM1Z
 Serial : 2000454
 Operator : Y.MORIMOTO
 Power : DC 3.7V
 Temp./Hum. : 23.6deg / 66%

Limit : FCC Part15C 15.209(a) 3m
 Remark1 :
 Remark2 : Y
 Remark3 : Low
 Remark4 : 3DH5

[dB(μV/m)]

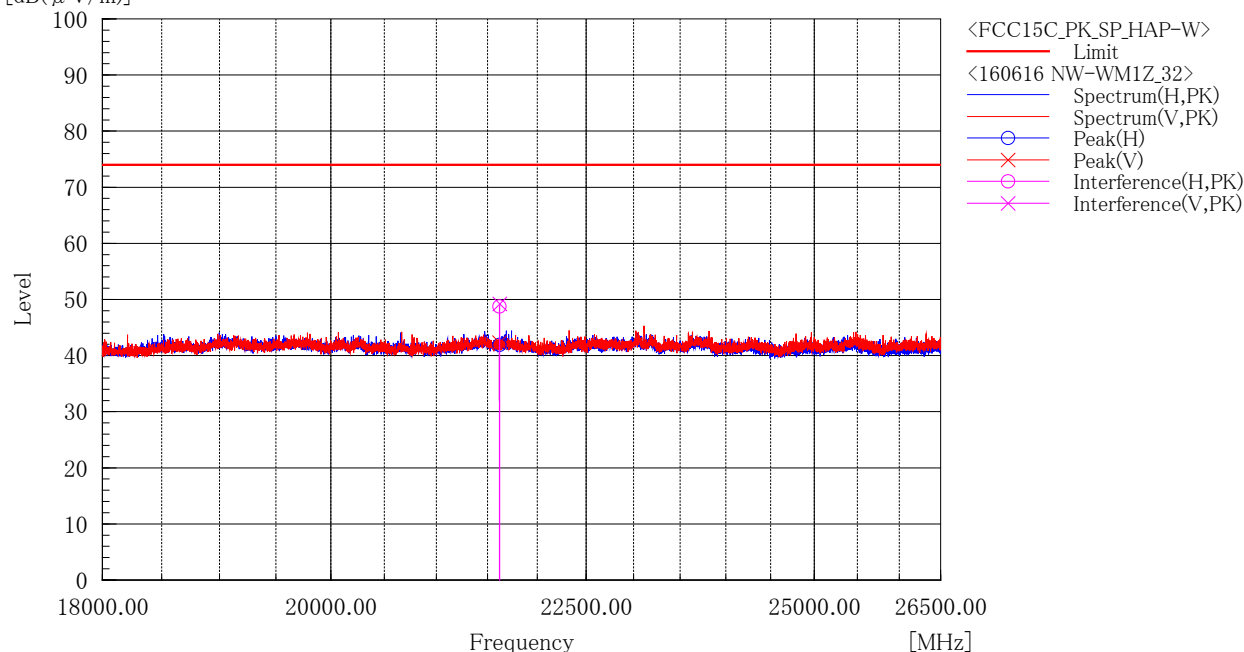

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.752	49.6	-0.8	48.8	74.0	25.2	414.4	285.5


--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21620.308	50.0	-0.8	49.2	74.0	24.8	102.3	147.7

1) Date of measurement

: June 16, 2016

[EDR(3DH5)/2441MHz]

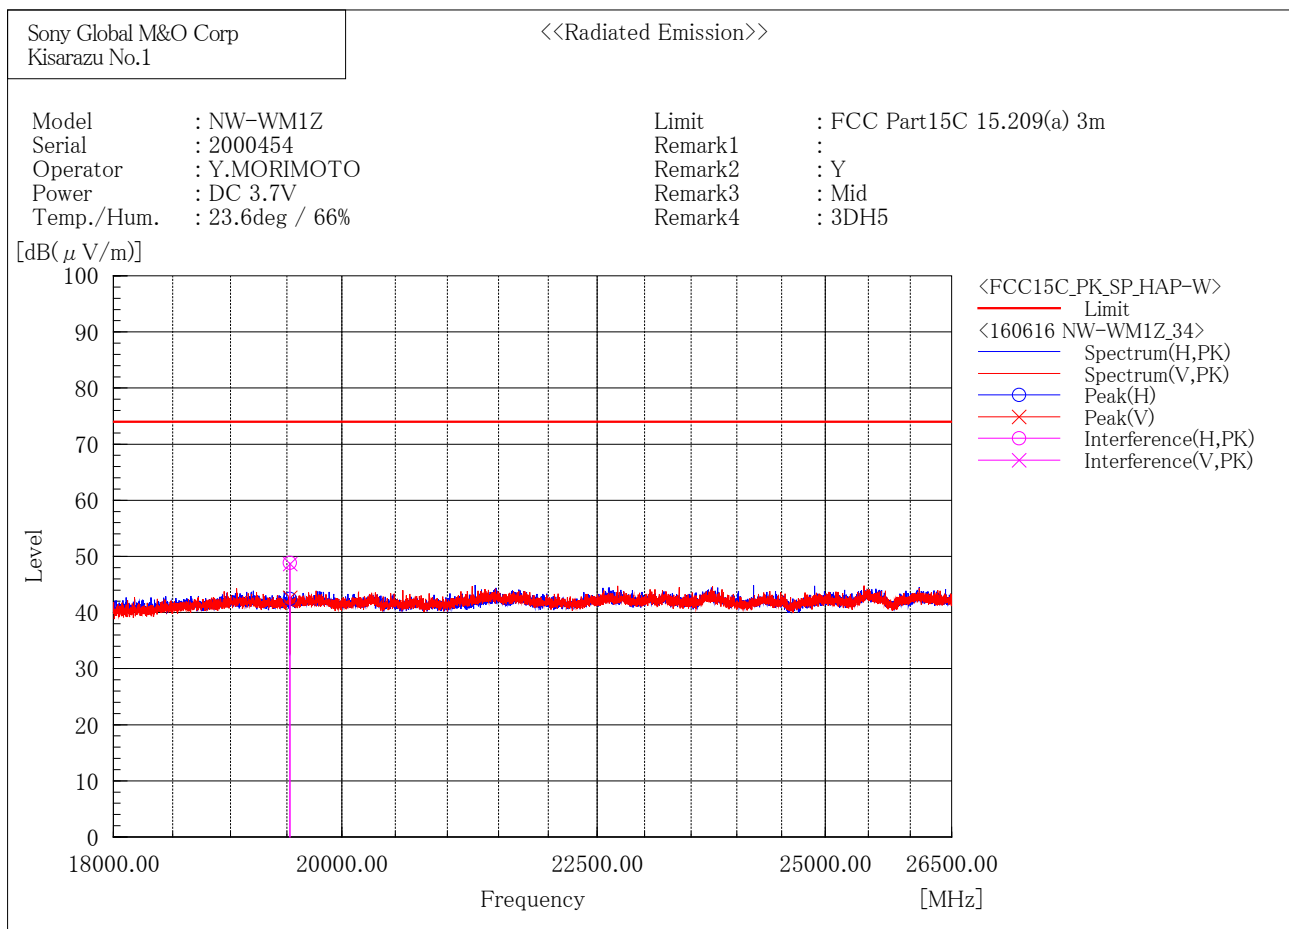

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19526.590	49.4	-0.5	48.9	74.0	25.1	190.5	220.4


--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19528.796	49.2	-0.5	48.7	74.0	25.3	104.7	111.1

1) Date of measurement

: June 16, 2016

[EDR(3DH5)/2480MHz]

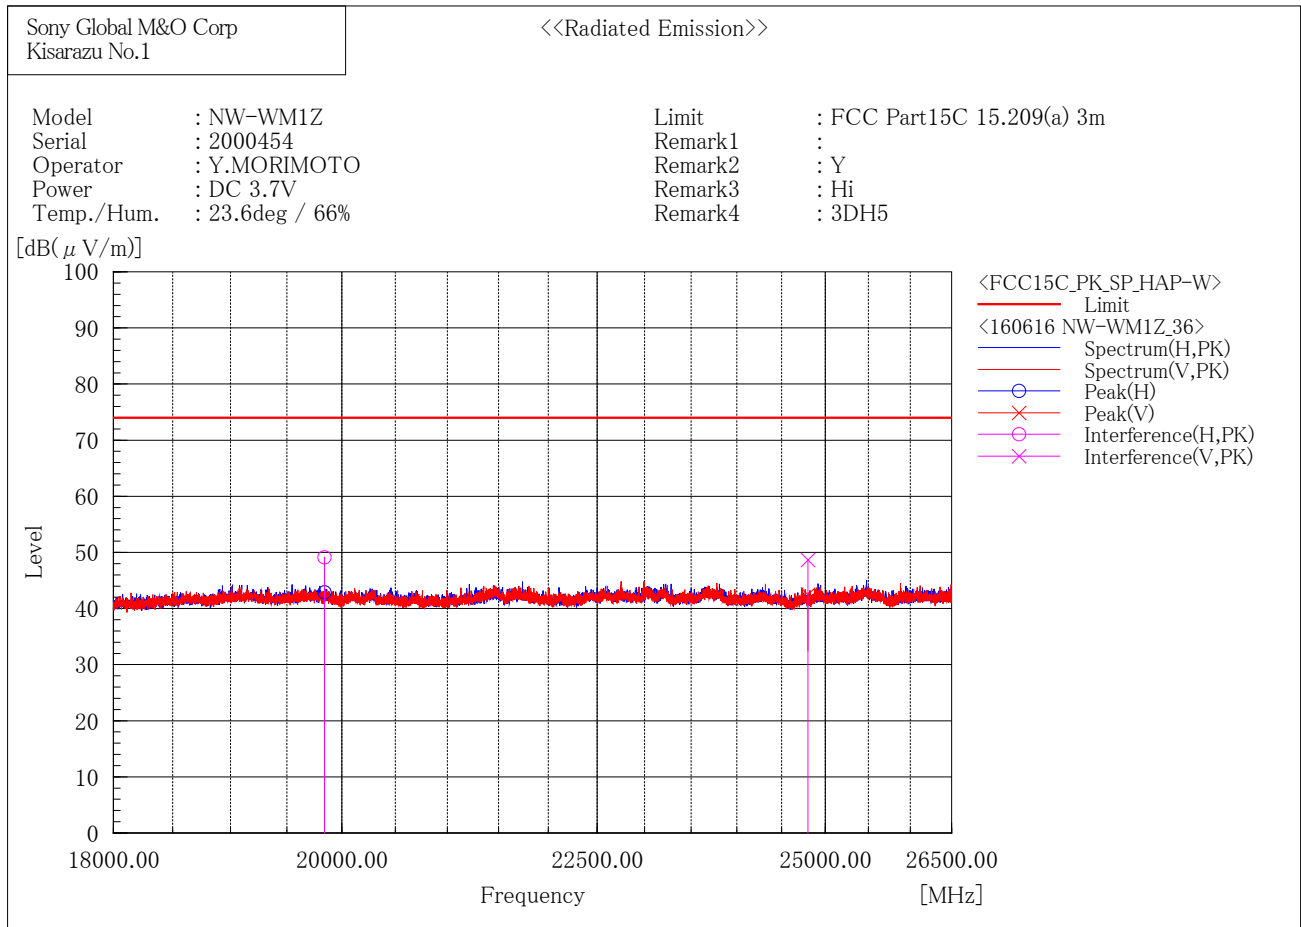

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19841.870	49.6	-0.5	49.1	74.0	24.9	432.2	249.0

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24800.974	50.7	-2.1	48.6	74.0	25.4	219.1	122.3


2.4GHz Restricted-Band Edge (Plot data)

These plot data show peak (trace blue) and average (trace black) spectrum for worst case emissions in the restricted-band edges. (Restricted band edges: below 2390MHz and above 2483.5MHz)

The result of the final radiated emissions measurement refers in previous pages.


[BDR / 2402MHz]

Horizontal

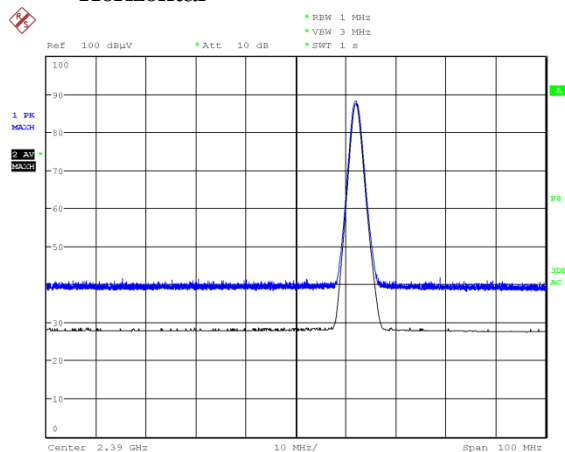

Date: 14.JUN.2016 19:22:11


Vertical

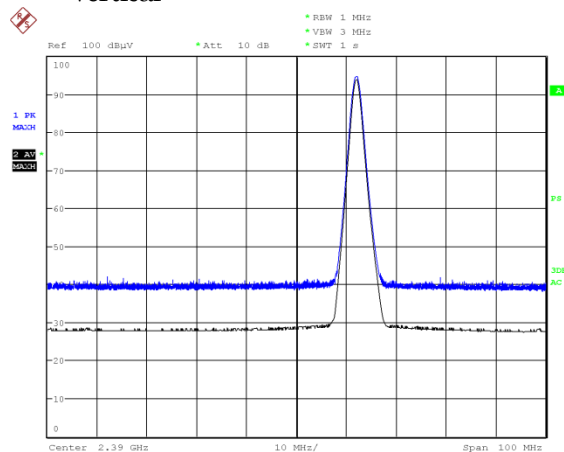

Date: 14.JUN.2016 19:13:35


[BDR / 2480MHz]

Horizontal

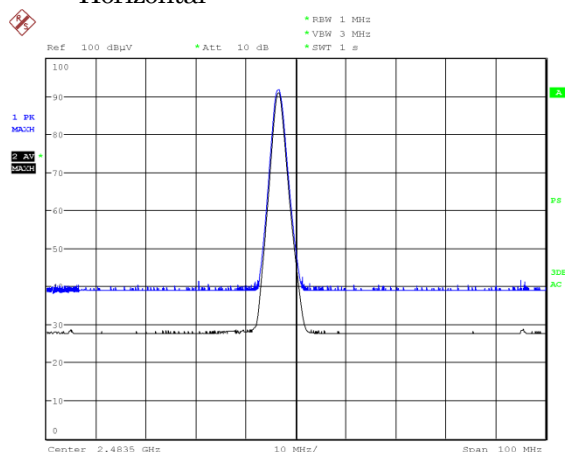


Date: 15.JUN.2016 14:30:02

Vertical

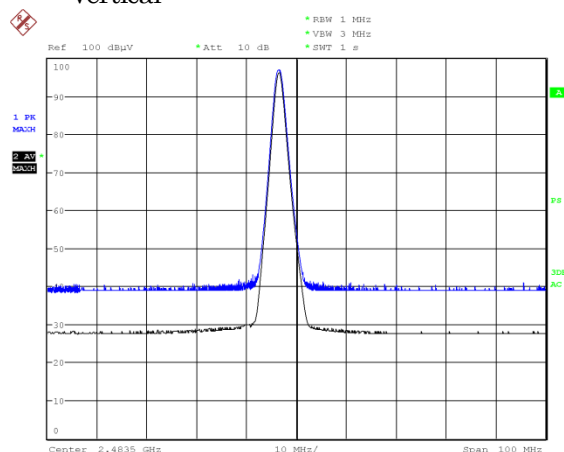


Date: 15.JUN.2016 14:23:10

[EDR / 2402MHz]
Horizontal

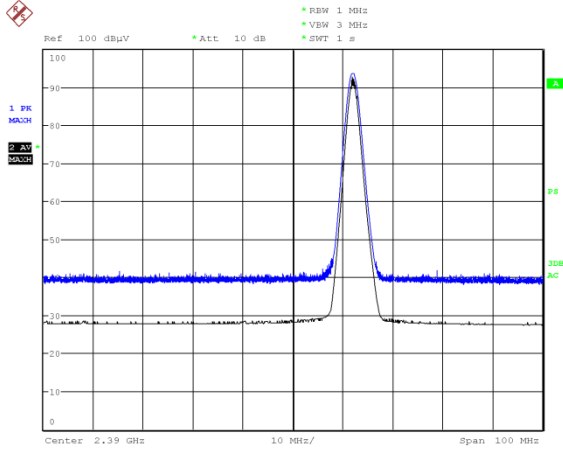


Date: 15 JUN 2016 15:20:31

Vertical

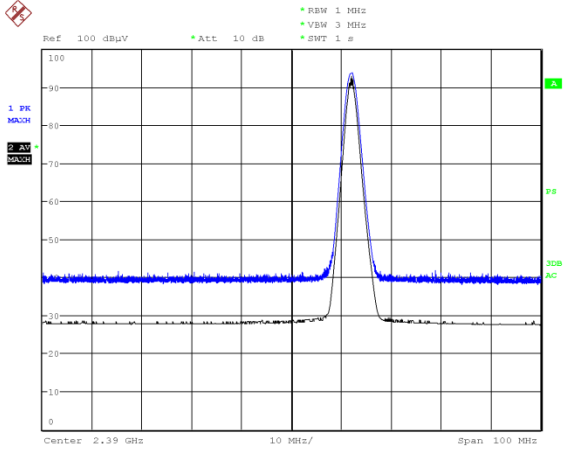


Date: 15 JUN 2016 15:16:29

[EDR / 2480MHz]
Horizontal

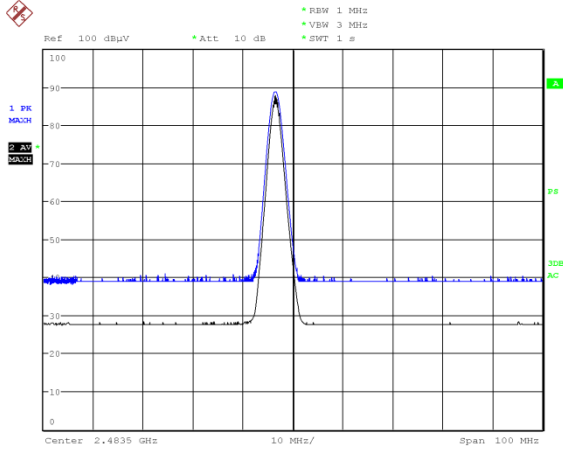

Date: 15 JUN 2016 19:21:35

Vertical

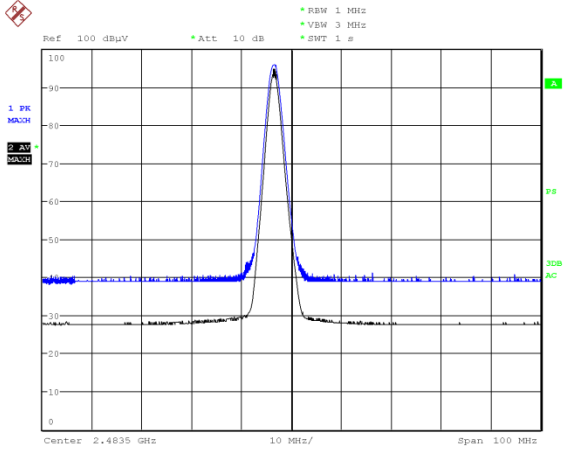


Date: 15 JUN 2016 19:15:12

3.8. Conducted Spurious Emissions for Band Edge


- 1) Ambient temperature : 24.1 °C
- 2) Relative humidity : 77.7 %
- 3) Date of measurement : 09 June 2016
- 4) Measured by : H.WAKI
- 5) Operating mode : Transmitting mode

Mode		Channel [MHz]	Frequency [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Limit [dBm]	Margin [dB]
BDR	DH5	2402	2399.98	-52.59	0.87	-51.72	-13.4	38.34
			2402.16	5.75	0.87	6.62	-	-
EDR	3DH5	2402	2399.68	-51.69	0.87	-50.82	-15.0	35.83
			2402.15	4.14	0.87	5.01	-	-

[BDR (DH5)]

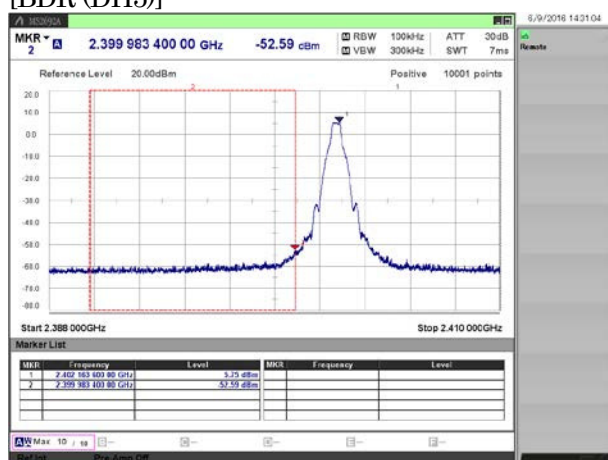

[EDR (3DH5)]

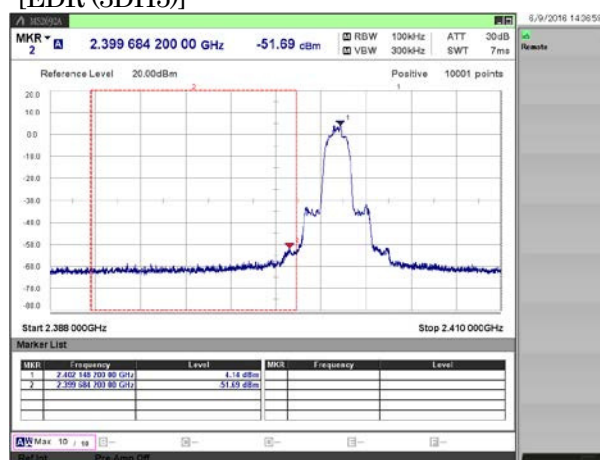

4. Method of Calculation

4.1. AC Power-line Conducted Emissions Measurement

Method of calculation : Software
 The Software for Calculation Name : EP5/ CE
 Version : Ver5.0.0

$$\text{Test Result [dBuV]} = \text{Meter Reading [dBuV]} + \text{C.F. [dB]}$$

Note :

- (a) Meter Reading : Reading of the EMI test receiver or spectrum analyzer
- (b) C.F. : System Loss + Correction Factor of LISN

4.2. Time of Occupancy (Dwell Time) Measurement

Method of calculation : Software
 The Software for Calculation Name : SW-308
 Version : Ver2.5

$$\text{Test Result [msec]} = \text{Dwell Time [msec]} * \text{Cycle [time]} * 31.6 [\text{sec}] / \text{Sweep Time [sec]}$$

Notes :

- (a) Dwell Time : Transmission duration of 1 hopping.
- (b) Cycle : Number of hopping appearances on the spectrum analyzer.
(The average of 5 measurements if it is random hopping equipment)
- (c) 31.6 : $0.4 [\text{sec}] * \text{Number of Hopping Frequencies(79)}$
- (d) Sweep Time : Sweep time settings on the spectrum analyzer.

4.3. Maximum Peak Conducted Output Power Measurement

Method of calculation : Software
 The Software for Calculation Name : SW-308
 Version : Ver2.5

$$\text{Test Result [dBm]} = \text{Meter Reading [dBm]} + \text{C.F. [dB]}$$

$$\text{Duty Cycle [\%]} = \text{Tx ON Time} / (\text{Tx ON Time} + \text{Tx OFF Time}) * 100$$

Notes :

- (a) Meter Reading : Reading of the spectrum analyzer.
- (b) C.F. : System Cable Loss + EUT Cable Loss

4.4. Radiated Spurious Emission Measurement

Method of calculation : Software
The Software for Calculation Name : V-Scan
Version : Ver4.0.30

Test Result [dBuV/m] = Meter Reading [dBuV] + C.F. [dB/m]

Notes :

- (a) Meter Reading : Reading of the EMI test receiver or spectrum analyzer.
- (b) C.F. : ☒ Antenna Factor (including Balun Loss) + System GainLoss
: ☐ Antenna Factor (including Balun Loss) + System GainLoss + 20 log (3 m/ 10 m)

4.5. Conducted Spurious Emission for Band Edge Measurement

Method of calculation : Software
The Software for Calculation Name : SW-308
Version : Ver2.5

Test Result [dBm] = Meter Reading [dBm] + C.F. [dB]

Notes :

- (a) Meter Reading : Reading of the spectrum analyzer.
- (b) C.F. : System Cable Loss + EUT Cable Loss

5. List of Test Equipment

All test results are traceable to the national and/or international standards.

5.1. AC Power-line Conducted Emissions

4th Site Shielded Room

	Control No.	Description	Model No.	Serial No.	Manufacture	Cal Int.	Last Cal.
☒	-	Shield Room	-	-	TDK	-	-
☒	M515	EMI Receiver	ESCI	100606	Rohde & Schwarz	12	15.07.07
☐	M109	EMI Receiver	ES17	100051	Rohde & Schwarz	12	16.03.15
☒	M514	LISN	ENV216	100424	Rohde & Schwarz	12	16.05.25
☒	CS043	4th Site CE Cable SYSTEM	-	-	EMC/RF Test Lab.	12	15.10.28
☒	M664	6dB Attenuator	6806.01.A	-	HUBER+SUHNER	12	15.10.28
☒	M619	HIGH FREQUENCY FUSE	MP612A	-	Anritsu	12	15.10.28
☐	M153	50 ohm Terminator	CT-01	-	TME	12	15.08.04
☐	M159	50 ohm Terminator	T1302	-	Stack	12	15.08.04
☒	M690	Thermo Meter	AD-5640A	201304	AND	12	15.11.15
☐							

5.2. Antenna-port Conducted Measurements

4th Site Shielded Room 1

	Control No.	Description	Model No.	Serial No.	Manufacture	Cal Int.	Last Cal.
☒	-	Shield Room	B83117-B2432-T161	P26428	Albatross Projects	-	-
☐	W003	Spectrum Analyzer	E4440A	US42511926	Keysight Technologies	12	15.06.02
☒	W006	Power meter	N1911A	MY50000295	Keysight Technologies	12	15.09.02
☒	W007	Power Sensor	N1922A	MY50180022	Keysight Technologies	12	15.09.09
☐	W104	Power Sensor	U2021XA	MY54040006	Keysight Technologies	12	15.12.14
☐	W105	Power Sensor	U2021XA	MY54080005	Keysight Technologies	12	15.12.14
☒	W029	10dB Attenuator	8493C	76549	Keysight Technologies	12	15.09.24
☐	W110	10dB Attenuator	6610-SK-50-1	2	HUBER + SUHNER	12	15.06.08
☐	WC02	RF Cable	SUCOFLEX102	34124/2	HUBER + SUHNER	12	15.10.16
☐	WC03	RF Cable	SUCOFLEX102	34127/2	HUBER + SUHNER	12	15.10.08
☒	WC05	RF Cable	SUCOFLEX102	34287/2	HUBER + SUHNER	12	15.10.16
☐	WC06	RF Cable	SUCOFLEX102	34289/2	HUBER + SUHNER	12	15.10.08
☒	M719	Thermo Meter	TH-321	140053	ASONE	12	15.06.10
☒	W100	Signal Analyzer	MS2692A	6201338954	Anritsu	12	16.04.15
☐							

About calibration interval

Valid until the end of the month listed in "Cal. Int." column.

5.3. Radiated Spurious Emissions

EMC Site 3m Semi-Anechoic Chamber

	Control No.	Description	Model No.	Serial No.	Manufacture	Cal Int.	Last Cal.
☒	M115	Semi-Anechoic Chamber	-	7D1-8A11	Otsuka Science	12	16.06.03
☒	M486	EMI Receiver	ESU 40	100050	Rohde & Schwarz	12	16.02.23
☒	M686	EMI Receiver	N9038A	MY52260113	Keysight Technologies	12	15.11.11
☒	A073	Loop Antenna	HFH2-Z2	100171	Rohde & Schwarz	12	15.10.12
☒	A089	Biconical Antenna	BBA9106	VHA91032835	Schwarzbeck	12	16.01.27
☒	A088	Logperiodic Antenna	UHALP9108A1	0649	Schwarzbeck	12	16.01.27
☒	A064	Horn Antenna	BBHA9120D	746	Schwarzbeck	12	16.01.27
☒	A078	Horn Antenna	HAP06-18W	00000070	Toyo Corporation	12	16.02.04
☒	A058	Horn Antenna	HAP18-26W	00000016	Toyo Corporation	12	16.01.26
☒	CS017	N-RE Cable SYS1	-	-	EMC/RF Test Lab.	12	16.06.03
☒	CS018	N-RE Cable SYS2	-	-	EMC/RF Test Lab.	12	16.06.03
☒	CS045	N-3m EMF Cable SYS	-	-	EMC/RF Test Lab.	12	16.06.03
☒	CS074	N-RE Cable SYS4	-	-	EMC/RF Test Lab.	12	16.06.03
☒	CS075	N-RE Cable SYS4	-	-	EMC/RF Test Lab.	12	16.06.03
☒	M126	Step Attenuator	8494H	3837M01144	Agilent Technologies	12	16.06.03
☒	M609	3dB Attenuator	8491B	MY39265960	Agilent Technologies	12	16.06.03
☒	M752	RF Pre-Amp	310N	320621	Sonoma Instrument	12	16.06.03
☒	M128	3dB Attenuator	8491A	53451	Agilent Technologies	12	16.06.03
☒	M737	GHz Filter Box	FB-G1	001	Sony Global M&O	12	16.06.03
☐	M485	EMI Receiver	ESCI	100626	Rohde & Schwarz	12	16.04.18
☒	M687	Thermo Meter	AD-5640A	201301	AND	12	15.10.15
☐							

About calibration interval

Valid until the end of the month listed in “Cal. Int.” column.