

EMI TEST REPORT

Test Report No. : 22DE0015-YW-1

Applicant: Sony Corporation

Type of Equipment: Notebook Computer (Wireless LAN built in PC)

Model No.: PCG-441L

FCC ID: AK8PCG441L

Test standard: FCC Part15 Subpart C, Section 15.247

Test Result: Complied

This report may not be reproduced in full, partial reproduction may only be made with the written consent of the laboratory.

The results in this report apply only to the sample tested.

Date of test: November 19-22, 2001

Issued date: December 3, 2001

Tested by:



Naoki Sakamoto

Group Leader of EMC section

Approved by:



Kazutoyo Nakanishi

Site Operation Manager of EMC section

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Table of Contents	Page
1 GENERAL INFORMATION	3
1.1 Tested Methodology	4
1.2 Test Facility	4
2 PRODUCT DESCRIPTION	5
2.1 Test system Details	5
3 SYSTEM TEST CONFIGURATION	6
3.1 Justification	6
3.2. Configuration of Tested System	6
4 MEASUREMENT UNCERTAINTY	7
5 TEST INSTRUMENTS	8
6 SUMMARY OF TEST	9
6.1 §15.207 Conducted Emissions	9
6.2 §15.247(a)(2)6dB Bandwidth	9
6.3 §15.247(b) Maximum Peak Out Put Power(Radiated and Conducted)	10
6.4 §15.247(c) Out of Band Emissions(Radiated)	11
6.5 §15.247(c) Out of Band Emissions(Conducted)	11
6.6 §15.247(d) Power Density(Conducted)	12
6.7 §15.247(e) Processing Gain	12
Photographs of test setup	13-14
APPENDIX	15
Test data	A1toA40

1 GENERAL INFORMATION

APPLICANT : Sony Corporation

ADDRESS : 6-7-35 Kitashinagawa, Shinagawa-ku, Tokyo
141-0001 Japan
TEL : 81-3-5795-8716
FAX : 81-3-5795-8981

REGULATION(S) : FCC Part15 Subpart C, Section 15.247

MODEL NUMBER : PCG-441L

SERIAL NUMBER : 013 (Radiated and AC Main Conducted Emissions tests)
001 (Antenna connector Conducted tests)

KIND OF EQUIPMENT : Notebook Computer (Wireless LAN built in PC)

TESTED DATE : November 19-22, 2001

RECEIPT DATE OF SAMPLE : November 19, 2001

REPORT FILE NUMBER : 22DE0015-YW-1

TEST SITE : A-PEX Yokowa No.3 Open Test Sites

1.1 Tested Methodology

The measurement was performed according to the procedures in ANSI C63.4(1992).

1.2 Test Facility

The open area site measurement facilities used to collect the radiated data are located at 108, Yokowa-cho, Ise-shi, Mie-ken, 516-1106 Japan.

These sites have been fully described in reports submitted to the FCC office.

No.1 and No.3 test site has filed to the FCC on September 12, 2000 as number: 90412 and is accepted by Industry Canada on May 01, 2001 as number IC2973-3.

2 PRODUCT DESCRIPTION

Sony Corporation, Model PCG-441L (referred to as the EUT in this report) is a Notebook Computer.
The specification is as following :

LAN Module

Frequency characteristics : 2412MHz through 2462MHz
No. of channels / channel spacing : 11 channels / 5MHz channel spacing
Modulation : DSSS:Direct sequence spread spectrum.(IEEE 802.11b)
Antenna type : λ /4 monopole antenna (Integral)
Antenna Gain : 2.14dBi (Peak)
I/F : PCMCIA-bus

*FccPart15.31(e)

The host device PCG-441L provide the LAN Module with stable power supply(DC:3.3V), and the LAN Module complies power supply regulation.

*FccPart15.203 Antenna requirement

Wireless LAN Module and its antenna comply with this requirement since they are built in host device PCG-441L when they are put up for sale and they are used with a particular antenna connector.

2.1 Test System Details

Model	FCC ID	Description
(1)Sony Corporation M/N: PCG-441L S/N: 013 (Radiated and AC Main Conducted Emissions tests) 001 (Antenna connector Conducted tests)	AK8PCG441L	Notebook Computer (Wireless LAN built in PC)
*FccPart15 Subpart B Class B Digital Device	DOC	
(2) Sony Corporation M/N: PCGA-AC16V3 S/N: 0110 A 0000069P (Radiated and AC Main Conducted Emissions tests) 0110 A 0000048P (Antenna connector Conducted tests)	DOC	AC Adapter

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

3 SYSTEM TEST CONFIGURATION


3.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Test mode : Transmitting mode
 Performed the test about channels 1(low), 6(mid) and 11(high) among 11 channels of all
 Carrier frequencies.

 Receiving mode

3.2 Configuration of Tested System

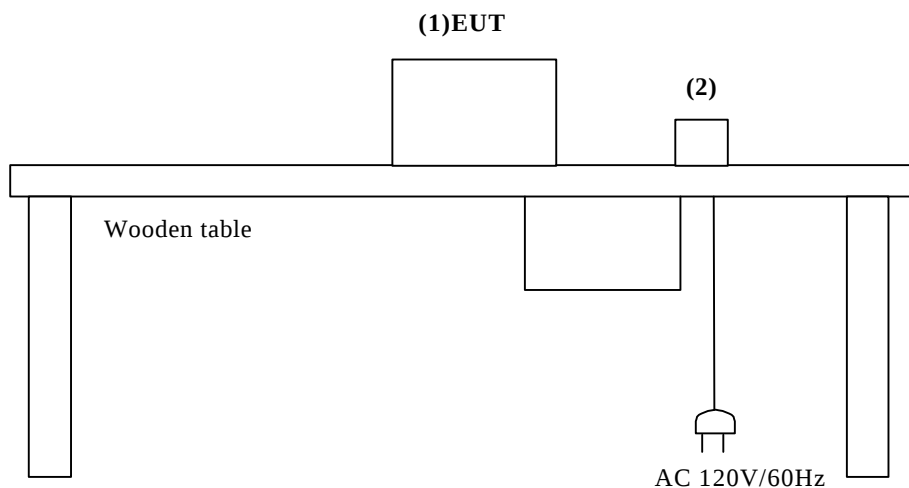

* Cabling was taken into consideration and test data was taken under worst case conditions.

List of cables used

No.	Name	Length (m)	Shield	Remark
	AC Power Cable	0.75	N	Polyvinyl chloride
	DC Power Cable	2.0	N	Polyvinyl chloride

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

4 Measurement Uncertainty

Conducted Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was $\pm 2.0\text{dB}$.

- ☐ The data listed in this test report may exceed the test limit because it does not have enough margin (more than 2.0dB).
- The data listed in this test report has enough margin, more than 2.0dB.

Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is $\pm 4.4\text{dB}$.

The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is $\pm 4.8\text{dB}$.

The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is $\pm 5.8\text{dB}$.

- The data listed in this test report may exceed the test limit because it does not have enough margin.
- ☐ The data listed in this test report has enough margin, more than site margin.

Test report**FCC ID** : AK8PCG441L**Our reference** : 22DE0015-YW-1**Page** : 8 of 15**Issued date** : December 3, 2001**5 TEST EQUIPMENT USED**

<u>Name</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Control No.</u>	<u>Calibrated Until</u>
Pre Amplifier	Hewlett Packard	8447D	AF-01	March 30, 2002
Pre Amplifier	Hewlett Packard	8449B	AF-04	November 3, 2002
Biconical Antenna	Schwarzbeck	BBA9106	BA-03	April 30, 2002
Logperiodic Antenna	Schwarzbeck	UKLP9140-A	LA-06	April 30, 2002
LISN	Schwarzbeck	NSLK8126	LS-04	November 5, 2002
Horn Antenna	AH System, Inc	SAS-200/571	HA-01	May 19 , 2002
Horn Antenna	Schwarzbeck	BBHA9170	HA-03	November 22 , 2001
Spectrum Analyzer	Hewlett packard	8567A	SA-04	March 30, 2002
Spectrum Analyzer	Advantest	R3271	SA-05	January 31, 2002
Test Receiver	Rohde & Schwarz	ESVS30	TR-02	April 11, 2002
Test Receiver	Rohde & Schwarz	ESHS10	TR-05	August 23, 2002
Power Sensor	Hewlett packard	ECP-E18A	PS-01	May 28, 2002
Power Metor	Hewlett packard	EPM-442A	PM-01	May 28, 2002

All measurement equipment is traceable to national standards.

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

6 SUMMARY OF TESTS

6.1 ~~§15.207~~ Conducted Emissions

Test Procedure

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flush with rear of tabletop. All other surfaces of tabletop was at least 80cm from any other grounded conducting surface. I/O cables and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, were individually connected through a LISN to the input power source. All unused 50 Ω connectors of the LISN were resistively terminated in 50 Ω when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT on a shielded room.

The EUT was connected to a Line Impedance Stabilization Network (LISN).

An overview sweep with peak detection has been performed.

The measurements have been performed with a CISPR quasi-peak detector (IF BW 10kHz) .

(Measurement range : 450kHz to 30MHz)

Test data : APPENDIX A1 to A5
Photographs of test setup : Page 14(1)
Test result : Pass
Test instruments : LS-04, SA-04, TR-05

6.2 ~~§ 15.247(a)(2)~~ 6dB Bandwidth

Test Procedure

The minimum 6dB bandwidth was measured with a spectrum analyzer connected to the antenna port.

2412MHz(Low) : 9.4571MHz > 500kHz

2437MHz(Mid) : 5.8286MHz > 500kHz

2462MHz(High) : 7.5429MHz > 500kHz

Test data : APPENDIX A6 to A8
Test result : Pass
Test instruments : SA-05

6.3 § 15.247(b) Maximum Peak Out Put Power

Radiated : Test Procedure

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged 40cm height to the ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

The Radiated Electric Field Strength intensity has been measured on an open test site with a ground plane and at a distance of 3m.

The measuring antenna height was varied between 1 to 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Test data : APPENDIX A9 to A15
Photographs of test setup : Page15(2)
Test result : Pass
Test instruments : SA-05, HA-01, AF-04

Conducted :Test Procedure

The Maximum Peak Output power was measured with a power meter connected to the antenna port.

* Antenna Gain dose not exceed 6dBi.

Test data : APPENDIX A16
Test result : Pass
Test instruments : PS-01, PM-01, SA-05

6.4 § 15.247(c) Out of Band Emissions(Radiated)

Test Procedure

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged 40cm height to the ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

The Radiated Electric Field Strength intensity has been measured on an open test site with a ground plane and at a distance of 3m.

The measuring antenna height was varied between 1 to 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Radiated Spurious emissions

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement. The result was also satisfied the general limits specified in Sec.15.209(a).

Measurement range : 30MHz to 1000MHz CISPR QP Detector, IF BW 120kHz

: 1GHz to 26GHz PK and AV Detector

Test data : APPENDIX A17 to A20(30 –1000MHz)
: APPENDIX A21 to A24(1 – 26GHz)

Photographs of test setup : Page14(2)

Test result : Pass

Test instruments : AF-01, AF-04, BA-03, LA-06, HA-01, HA-03, SA-04, SA-05, TR-06

6.5 § 15.247(c) Out of Band Emissions(Conducted)

Test Procedure

The Out of Band Emissions(Conducted) was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX A25 to A36

Test result : Pass

Test instruments : SA-05

6.6 § 15.247(d) Power Density(Conducted)

Test Procedure

The Power Density was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX A37 to A40
Test result : Pass
Test instruments : SA-05

6.7 §15.247(e) Processing Gain Requirement

Test data : See attached test report No.
LucFCC ProcGain AddInformation 30May01.doc
015127a_Spr_gainHighSpeed_HS_.doc
Spr_gainFCC_HSI3E(012527a) Number2.xls
Test result : Pass

Photographs of test setup(1)




A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Photographs of test setup(2)

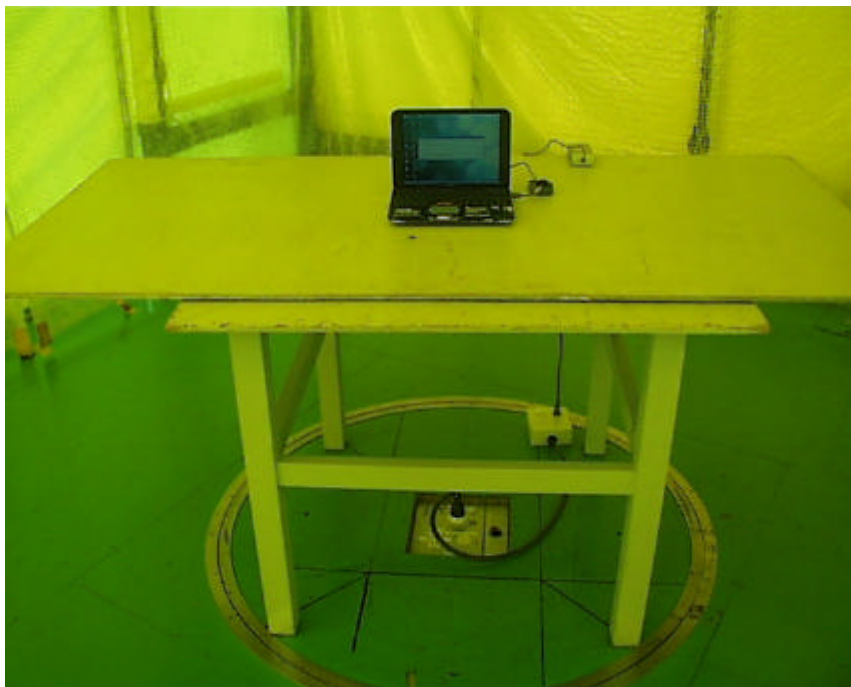

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

APPENDIX


Test Data

Conducted Emission (6.1)	<u>A1 to A5</u>
6dB Bandwidth (6.2)	<u>A6 to A8</u>
Maximum peak output power (6.3)	<u>A9 to A16</u>
Out of band emissions(Radiated) (6.4)	<u>A17 to A24</u>
Out of band emissions(Conducted) (6.5)	<u>A25 to A36</u>
Power density (6.6)	<u>A37 to A40</u>

DATA OF CONDUCTION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22DE0015-YW-1

Applicant : Sony Corporation
Kind of Equipment : Notebook Computer
Model No. : PCG-441L
Serial No. :
Power : AC120V/60Hz
Mode : Transmitting (Ch1)
Remarks : FCC ID: AK8PCG441L
Date : 11/20/2001
Phase : Single Phase
Temperature : 28 °C
Humidity : 28 %
Regulation : FCC Part15.207


Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP	AV	QP	AV				QP	AV	QP	AV	QP	AV
		[dBuV]		[dBuV]					[dBuV]		[dBuV]		[dB]	
1.	0.5819	27.3	-	26.3	-	0.1	0.1	0.0	27.5	-	48.0	0.0	20.5	-
2.	0.6660	32.4	-	32.2	-	0.1	0.1	0.0	32.6	-	48.0	0.0	15.4	-
3.	0.9167	26.0	-	26.1	-	0.1	0.1	0.0	26.3	-	48.0	0.0	21.7	-
4.	1.3355	24.7	-	26.5	-	0.1	0.1	0.0	26.7	-	48.0	0.0	21.3	-
5.	4.8535	21.5	-	22.6	-	0.2	0.2	0.0	23.0	-	48.0	0.0	25.0	-
6.	7.7406	20.1	-	21.5	-	0.4	0.3	0.0	22.2	-	48.0	0.0	25.8	-
7.	20.8642	13.4	-	14.1	-	0.9	0.4	0.0	15.4	-	48.0	0.0	32.6	-


CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.



All other spurious emissions are more than 20dB below the limits.

DATA OF CONDUCTION TEST CHART

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22DE0015-YW-1

Applicant : Sony Corporation
Kind of Equipment : Notebook Computer
Model No. : PCG-441L
Serial No. :
Power : AC120V/60Hz
Mode : Transmitting(Ch1)
Remarks : FCC ID: AK8PCG441L
Date : 11/20/2001
Phase : Single Phase
Temperature : 28 °C
Humidity : 28 %
Regulation 1 : FCC Part15. 207
Regulation 2 : None


Engineer : Naoki Sakamoto

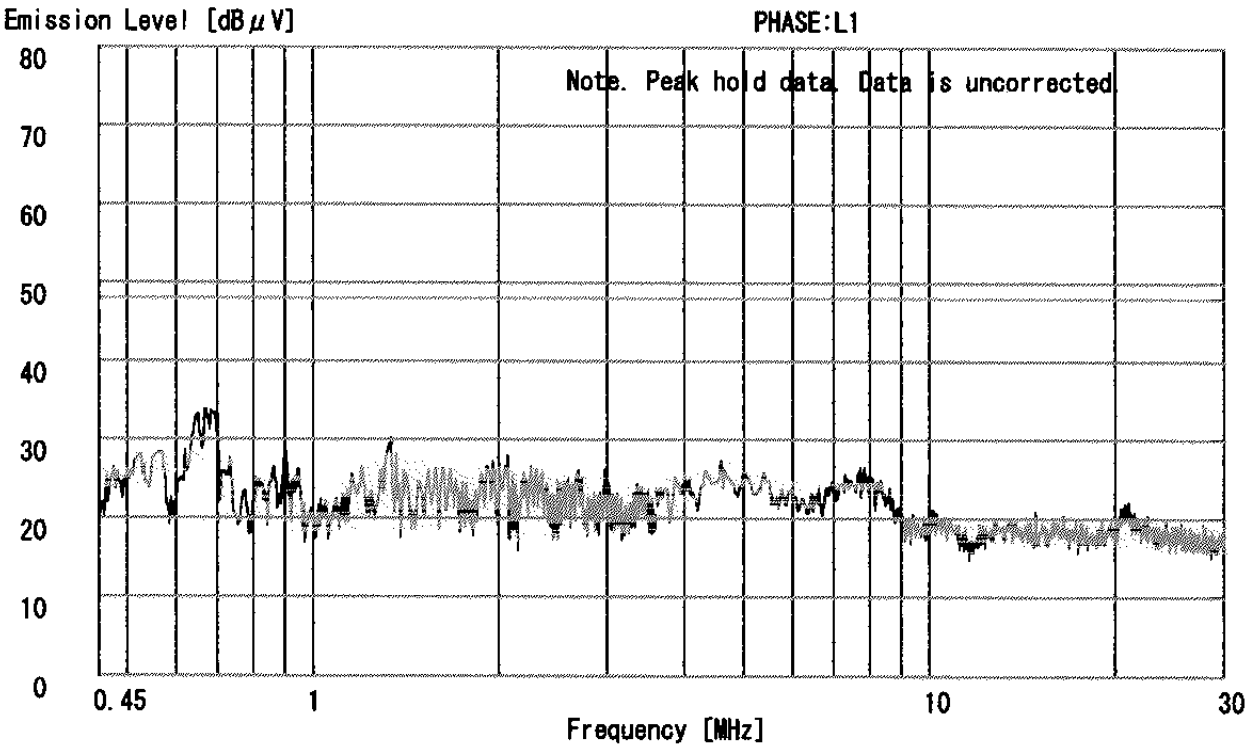
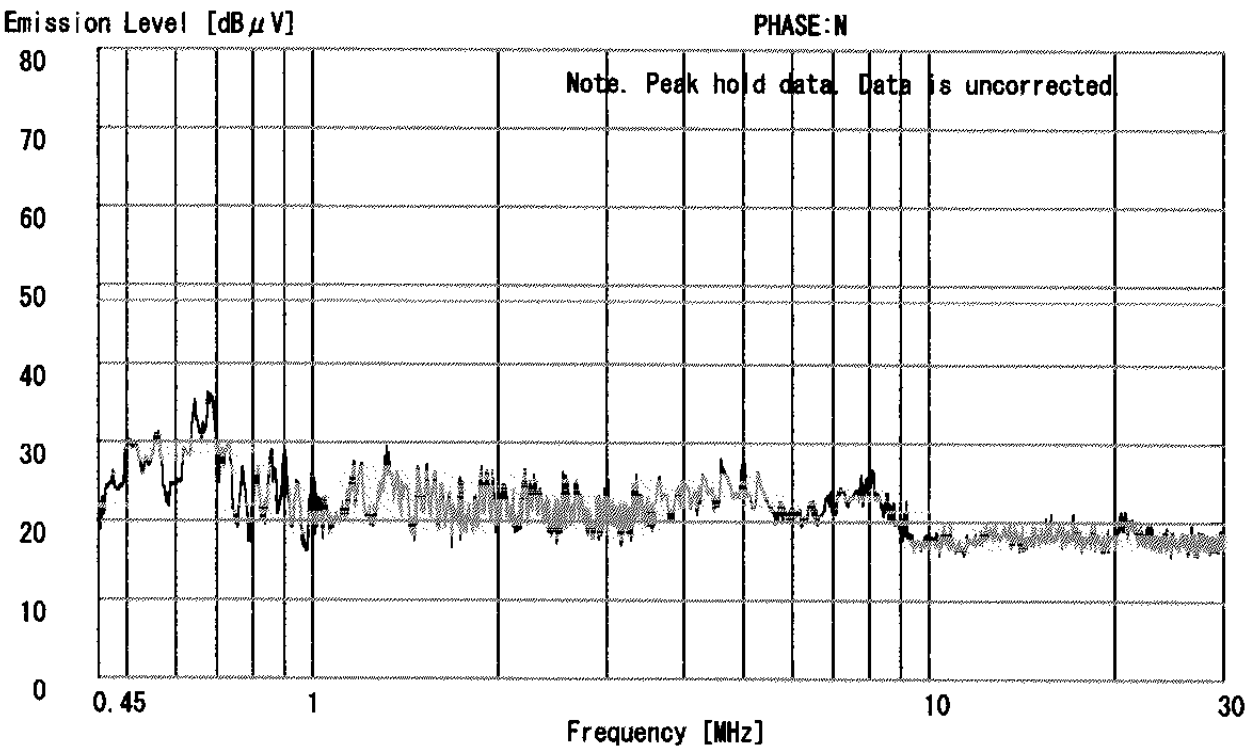


DATA OF CONDUCTION TEST CHART

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22DE0015-YW-1

Applicant : Sony Corporation
Kind of Equipment : Notebook Computer
Model No. : PCG-441L
Serial No. :
Power : AC120V/60Hz
Mode : Transmitting(Ch6)
Remarks : FCC ID: AK8PCG441L
Date : 11/20/2001
Phase : Single Phase
Temperature : 28 °C
Humidity : 28 %
Regulation 1 : FCC Part15. 207
Regulation 2 : None


Engineer : Naoki Sakamoto

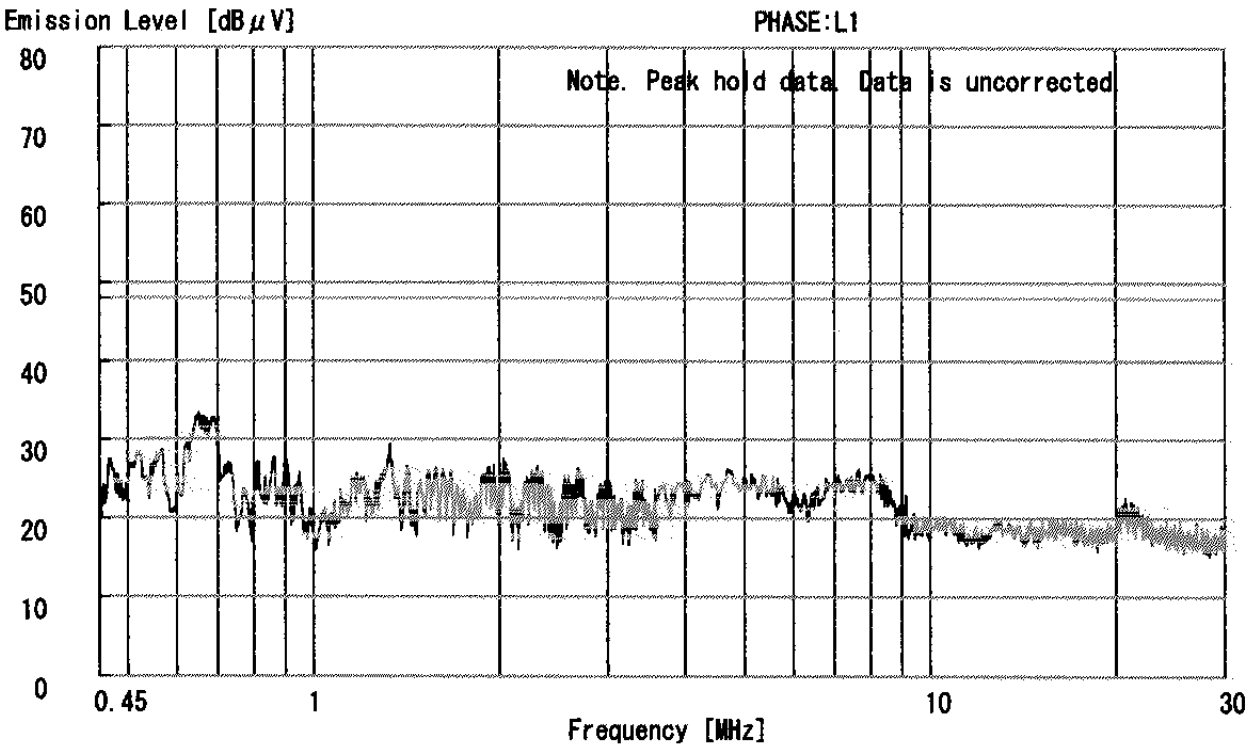
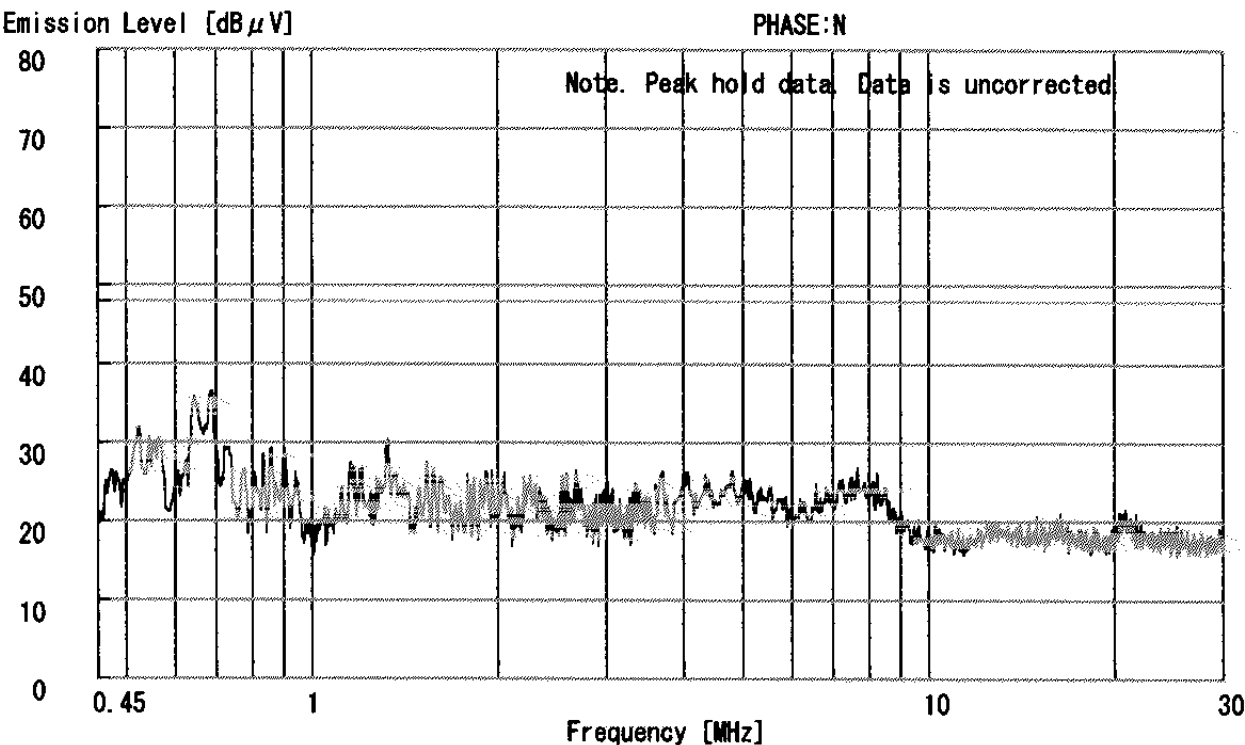


DATA OF CONDUCTION TEST CHART

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22DE0015-YW-1

Applicant : Sony Corporation
Kind of Equipment : Notebook Computer
Model No. : PCG-441L
Serial No. :
Power : AC120V/60Hz
Mode : Transmitting(Ch11)
Remarks : FCC ID: AK8PCG441L
Date : 11/20/2001
Phase : Single Phase
Temperature : 28 °C
Humidity : 28 %
Regulation 1 : FCC Part15. 207
Regulation 2 : None



Engineer : Naoki Sakamoto

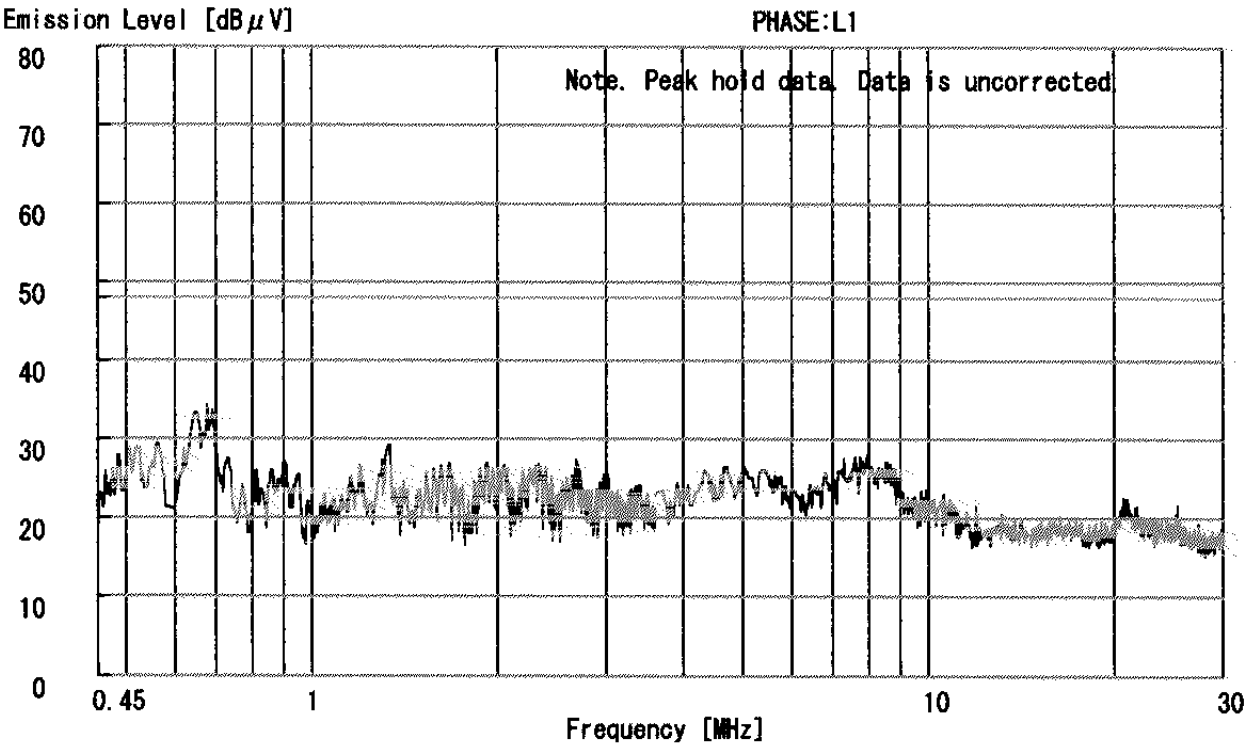
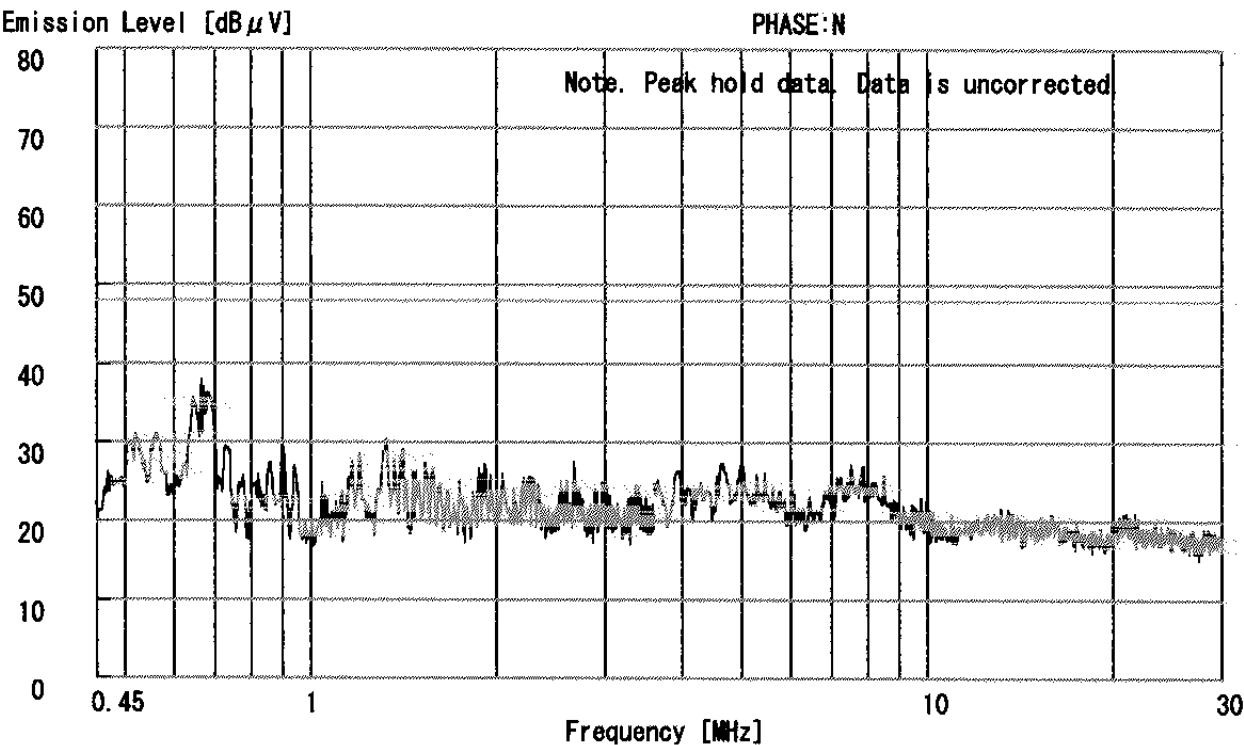


DATA OF CONDUCTION TEST CHART

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22DE0015-YW-1

Applicant : Sony Corporation
Kind of Equipment : Notebook Computer
Model No. : PCG-441L
Serial No. :
Power : AC120V/60Hz
Mode : Receiving
Remarks : FCC ID: AK8PCG441L
Date : 11/20/2001
Phase : Single Phase
Temperature : 28 °C
Humidity : 28 %
Regulation 1 : FCC Part15.207
Regulation 2 : None


Engineer : Naoki Sakamoto

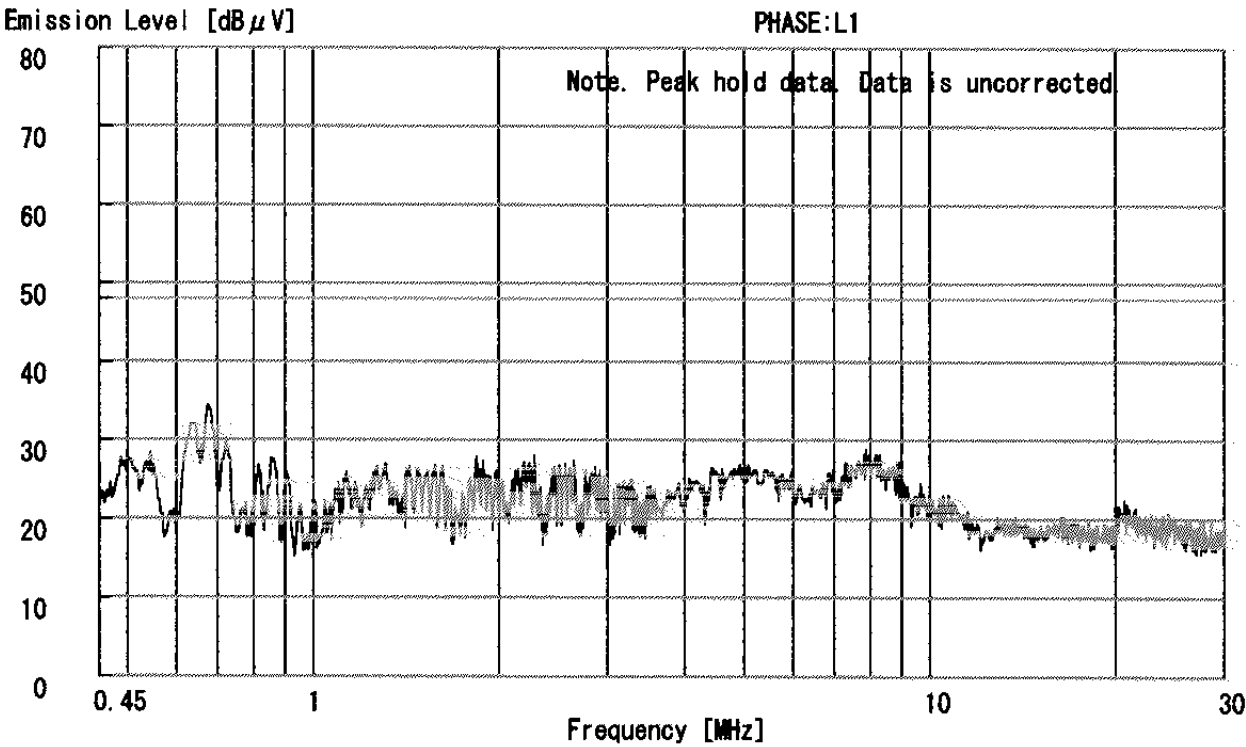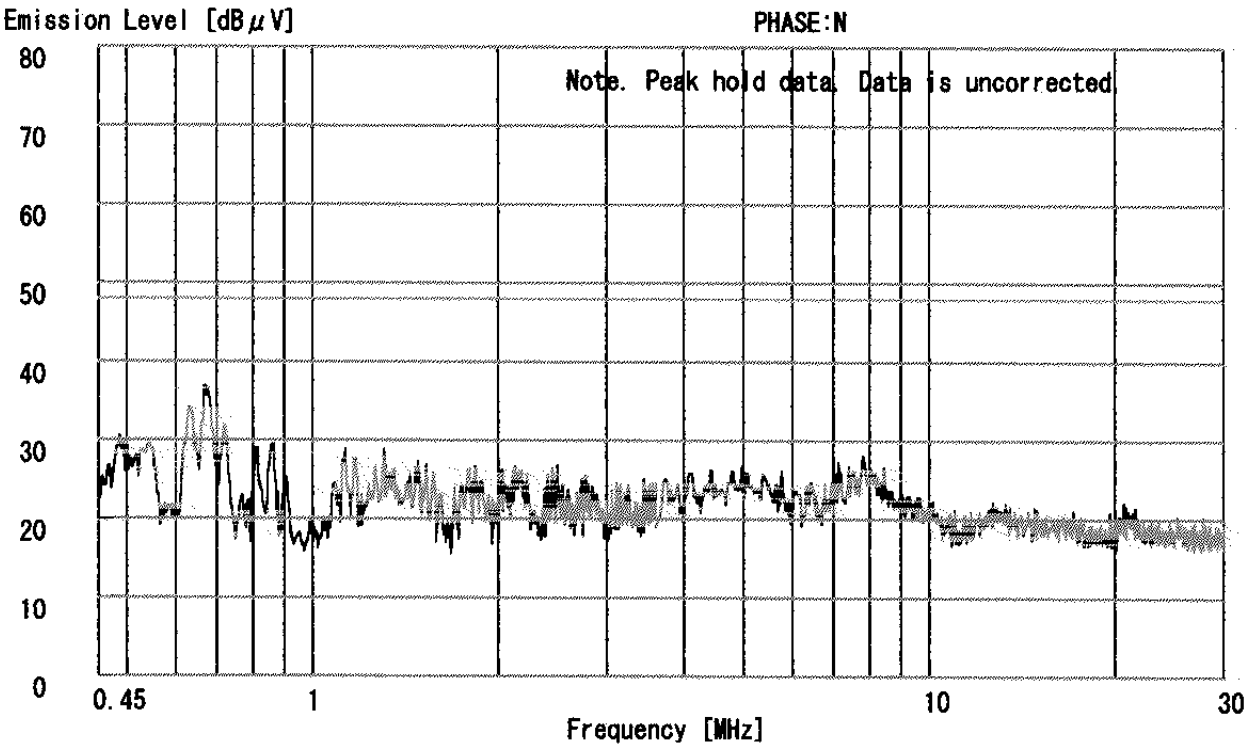


Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/Page.A6
15.247(a)(2)6dB Bandwidth/2412MHz/22DE0015-YW-1
REF 117 dBuV ATT 20 dB

MAKER
2.4168 GHz
102.13 dBuV

Δ MAKER
-9.4571 MHz
.25 dBuV

5dB/

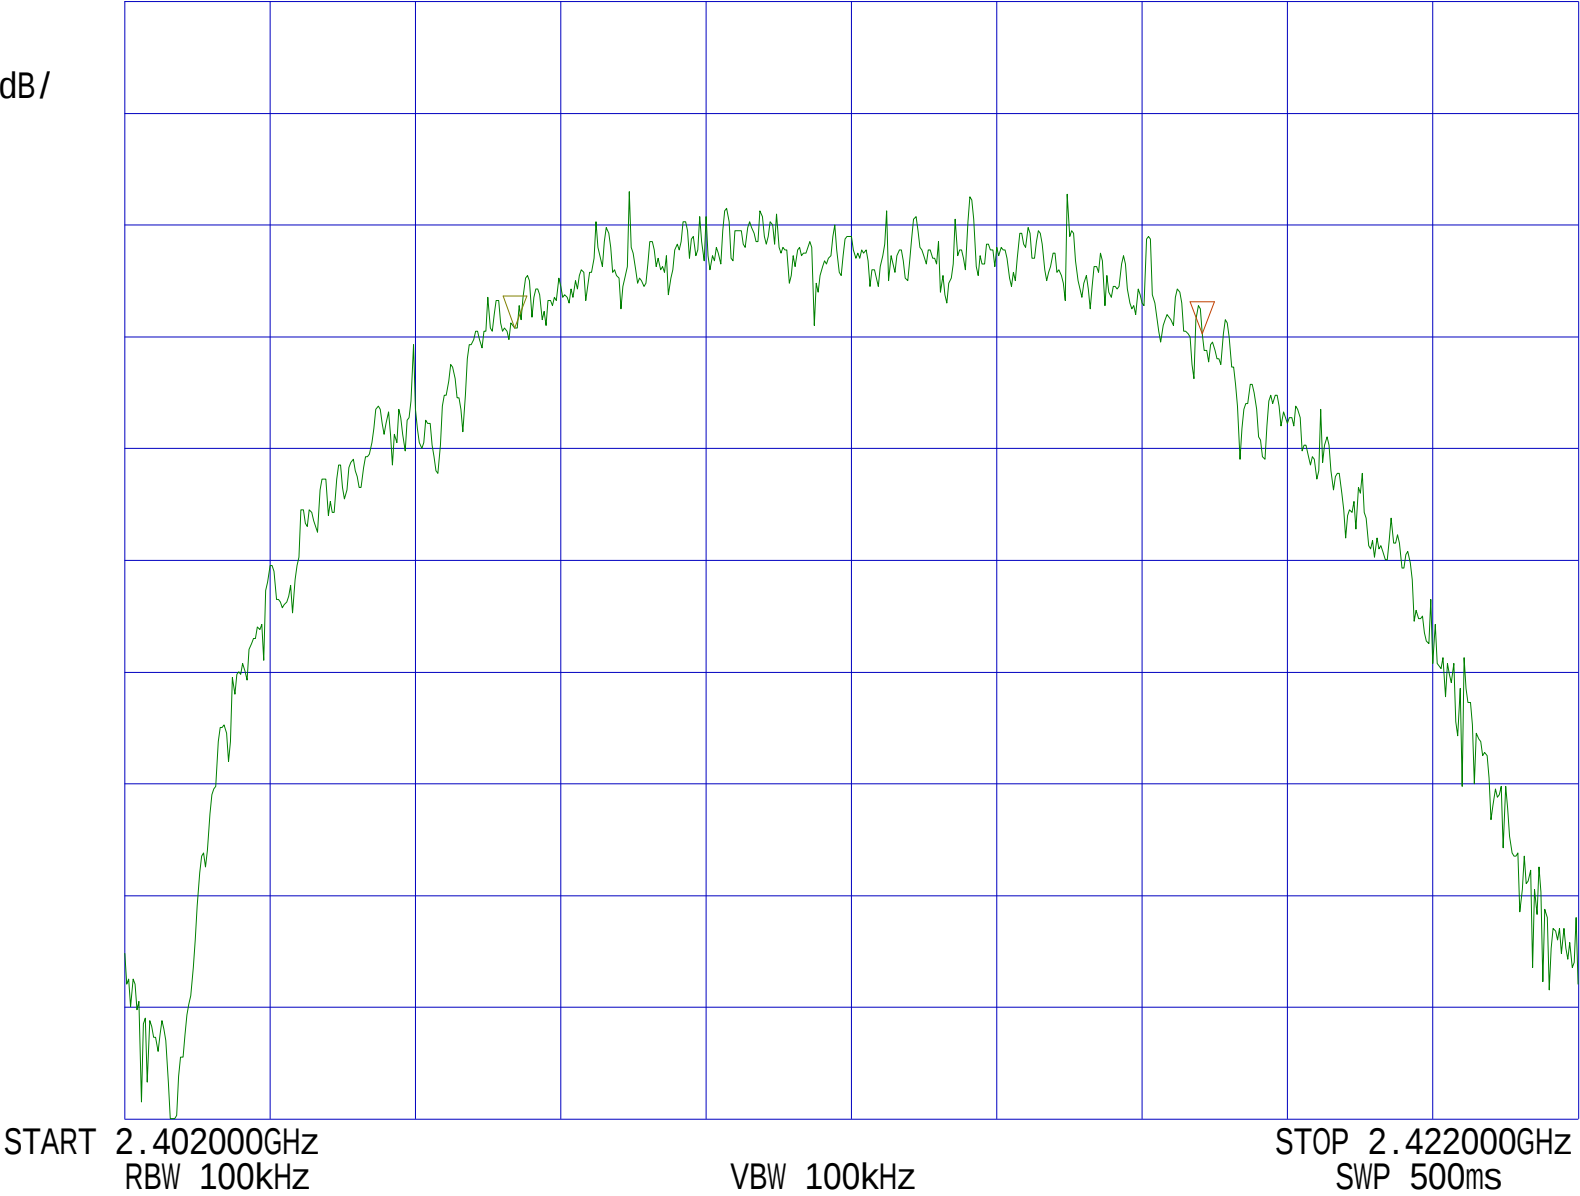


Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/Page.A7
15.247(a)(2)6dB Bandwidth/2437MHz/22DE0015-YW-1
REF 117 dBuV ATT 20 dB

MAKER
2.4383 GHz
103.75 dBuV

Δ MAKER
-5.8286 MHz
-.37 dBuV

5dB/

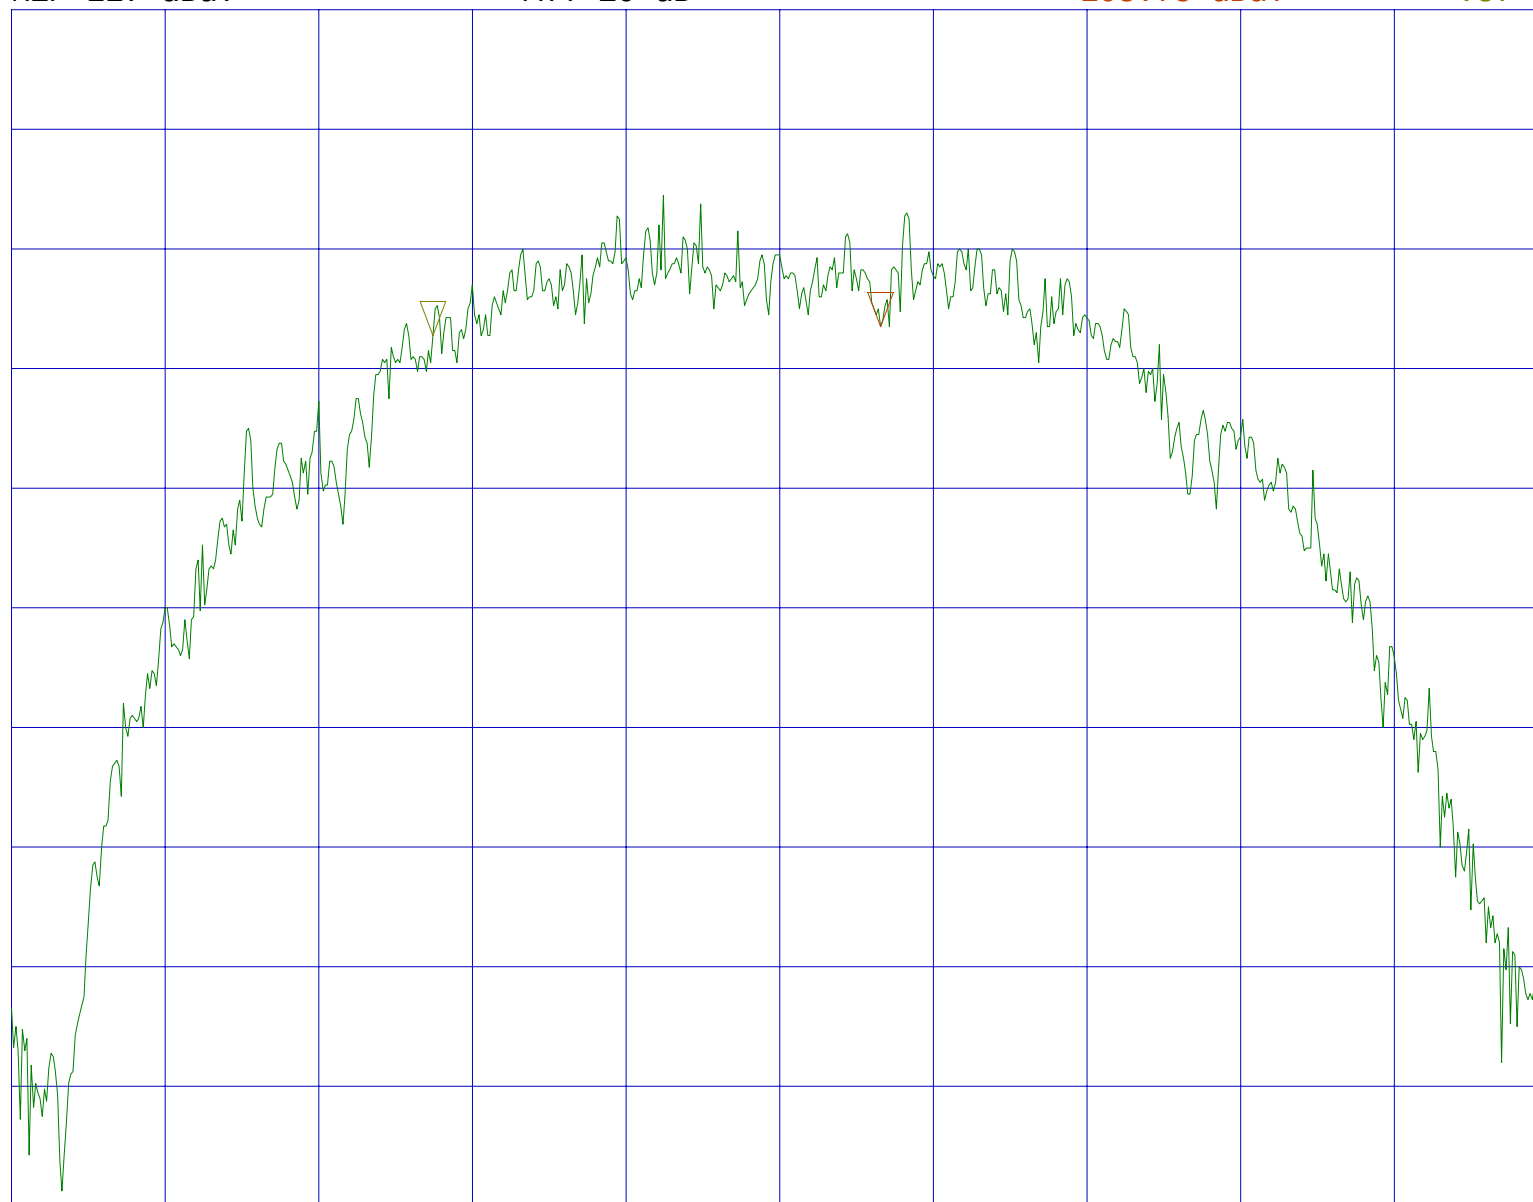

START 2.427000GHz
RBW 100kHz

VBW 100kHz


STOP 2.447000GHz
SWP 500ms

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/Page.A8
15.247(a)(2)6dB Bandwidth/2462MHz/22DE0015-YW-1
REF 117 dBuV ATT 20 dB

MAKER
2.4653 GHz
102.38 dBuV

Δ MAKER
-7.5429 MHz
.00 dBuV

5dB/

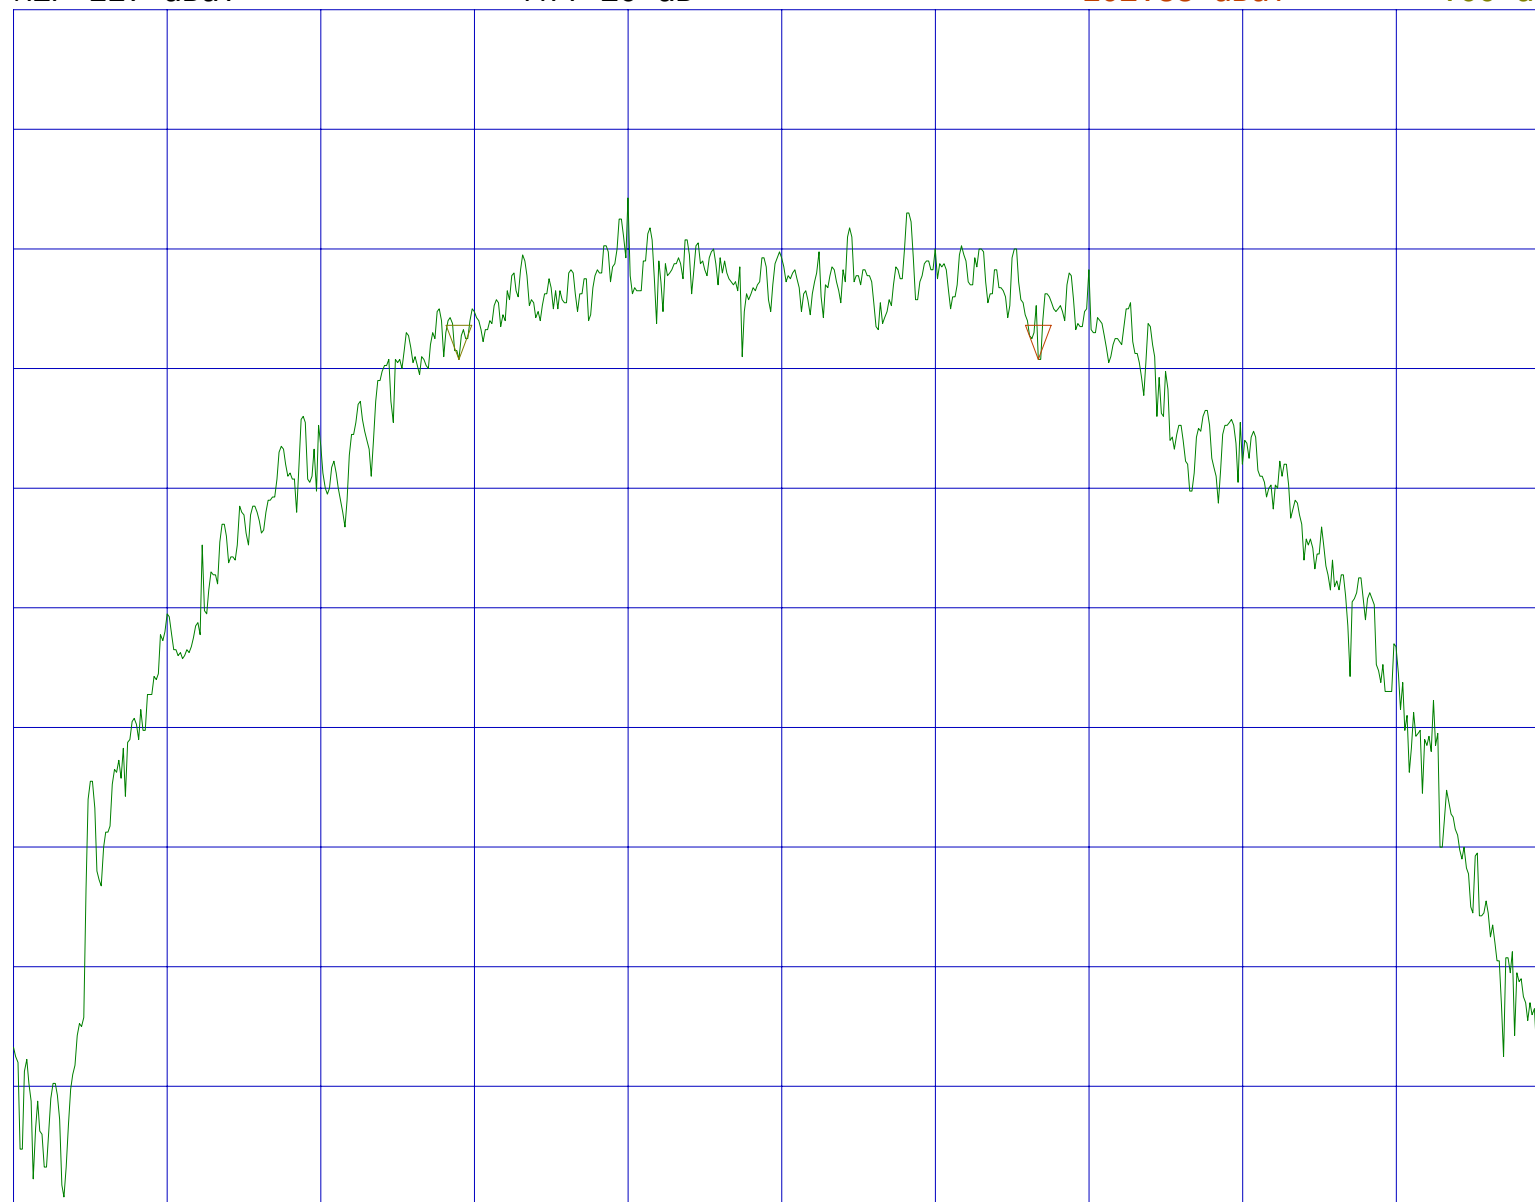

START 2.452000GHz
RBW 100kHz

VBW 100kHz

STOP 2.472000GHz
SWP 500ms

Peak Out Put Power(Radiated)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

COMPANY : Sony Corporation
EQUIPMENT : Notebook Computer
MODEL : PCG-441L
FCC ID : AK8PCG441L
POWER : AC120V/60Hz
Mode : Transmitting

REPORT NO : 22DE0015-YW-1
REGULATION : Fcc Part15 SubpartC 247(b)
TEST DISTANCE : 3m
DATE : 11/21/2001
Temp./Humi. : 22°C/48%

ENGINEER : Naoki Sakamoto

PK DETECT(S/A : RBW 3MHz and VBW 3MHz)

Ch	FREQ [GHz]	S/A READING		All Factor [dB]	E1		E		Limit (1W) [mW]	Result	
		HOR	VER		HOR	VER	HOR	VER		HOR	VER
		[dB μV]			[dB μV/m]		[V/m]			[mW]	
Low	2.4120	102.5	100.8	5.9	108.4	106.7	0.2630	0.2150	1000.0	12.7	8.5
Mid	2.4370	102.4	101.3	5.9	108.3	107.2	0.2594	0.2278	1000.0	12.3	9.5
High	2.4620	100.4	102.1	6.1	106.5	108.2	0.2109	0.2579	1000.0	8.1	12.2

Sample Calculation :

All Factor = ANT Factor - Amp Gain + CABLE LOSS + ATTEN

Low(2412MHz):ANT Factor(31.4dB) - Amp Gain(34.5dB) + CABLE LOSS(3.0dB) + ATTEN(6.0dB)

Mid(2437MHz):ANT Factor(31.4dB) - Amp Gain(34.5dB) + CABLE LOSS(3.0dB) + ATTEN(6.0dB)

High(2462MHz):ANT Factor(31.5dB) - Amp Gain(34.5dB) + CABLE LOSS(3.1dB) + ATTEN(6.0dB)

RESULT = (E*d) (E*d) / (30G)

E : Converted to V/m

E1: S/A Reading + All Factor


d : Test distance(3.0m)

G : Antenna Gaine(1.64)

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA10
15.247(c)PeakOutPower/2412MHz(VER)/22DE0015-YW-1
REF 107 dBuV ATT 20 dB

MAKER
2.4129 GHz
100.75 dBuV

5dB/

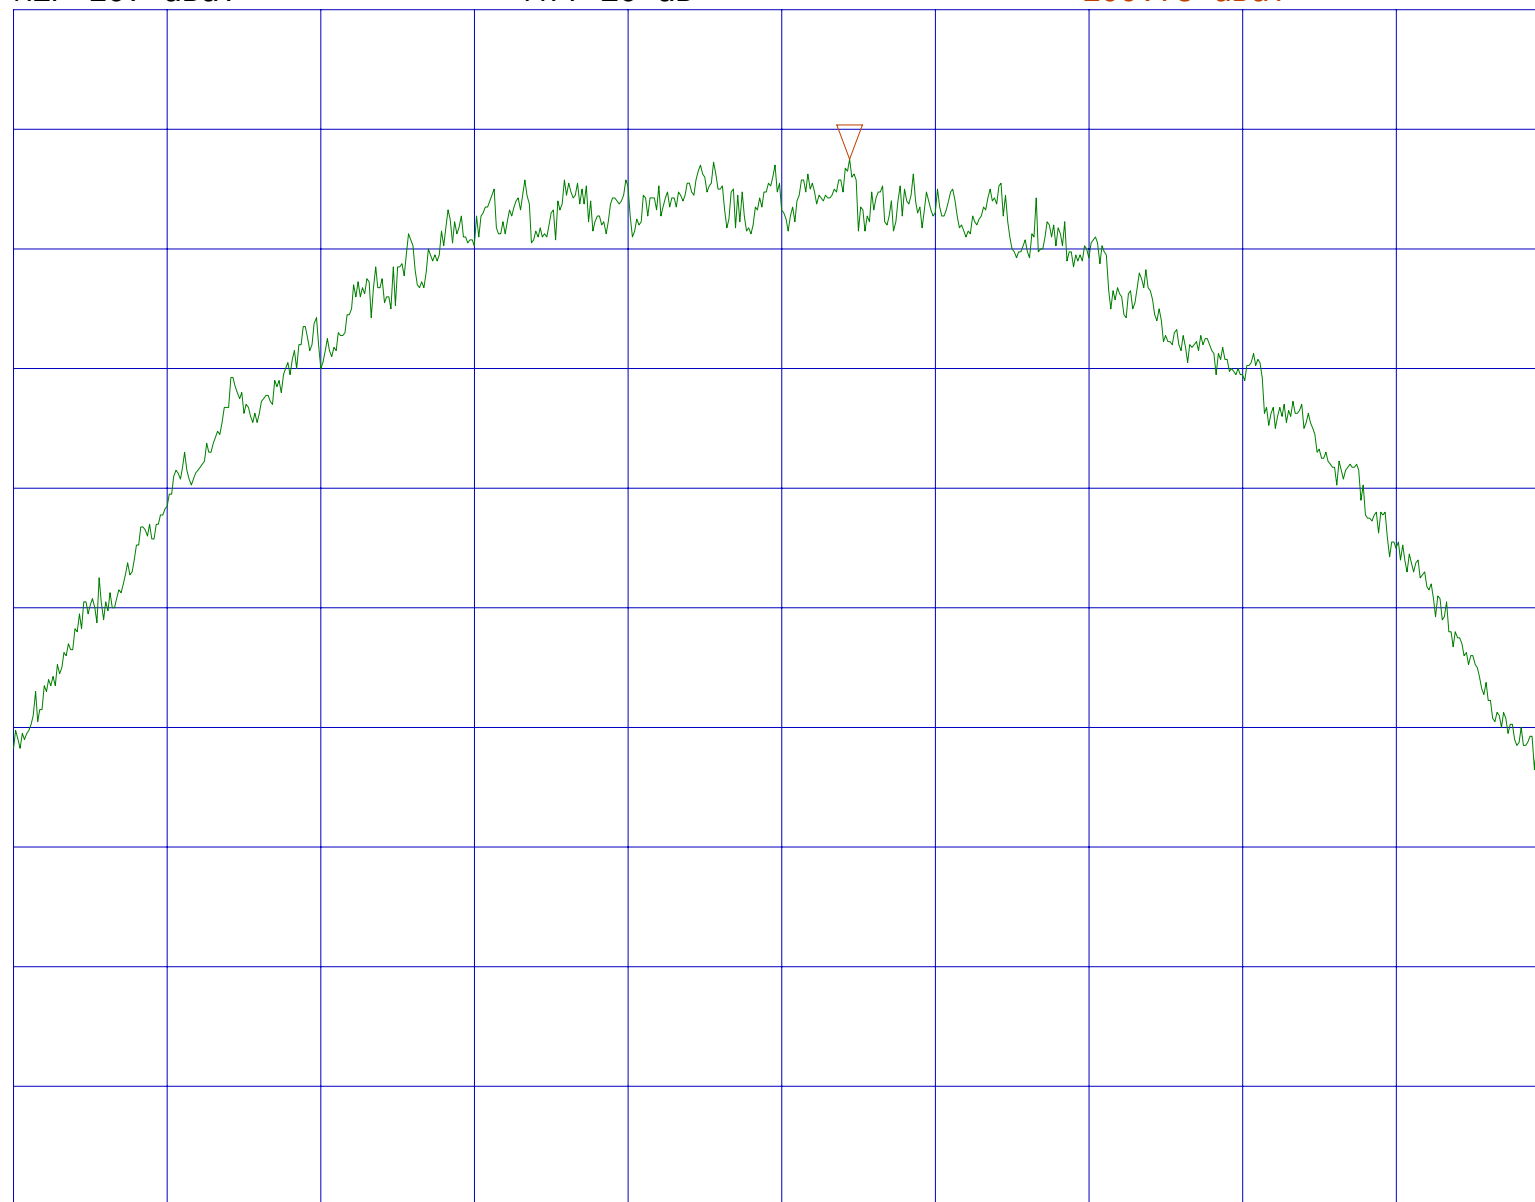

START 2.402000GHz
RBW 3MHz


VBW 3MHz

STOP 2.422000GHz
SWP 500ms

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA11
15.247(c)PeakOutPower/2412MHz(HOR)/22DE0015-YW-1
REF 107 dBuV ATT 20 dB

MAKER
2.4110 GHz
102.50 dBuV

5dB/

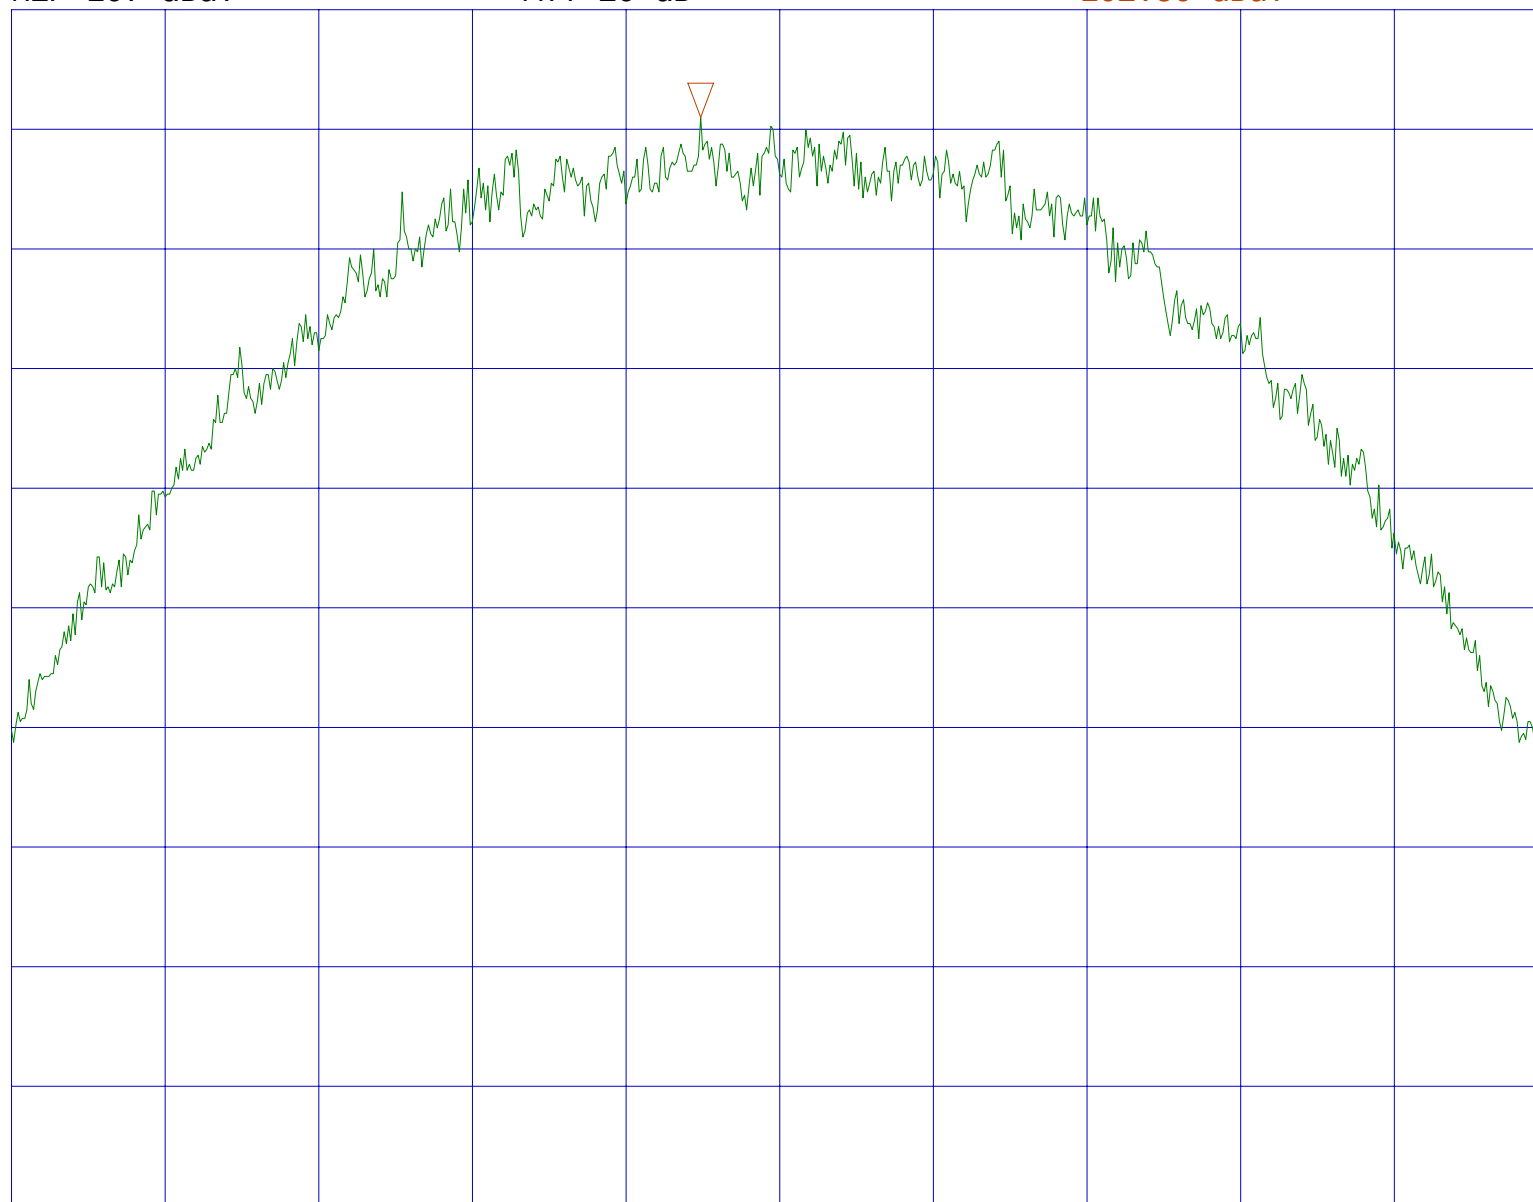

START 2.402000GHz
RBW 3MHz


VBW 3MHz

STOP 2.422000GHz
SWP 500ms

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA12
15.247(c)PeakOutPower/2437MHz(VER)/22DE0015-YW-1
REF 107 dBuV ATT 20 dB

MAKER
2.4387 GHz
101.25 dBuV

5dB/

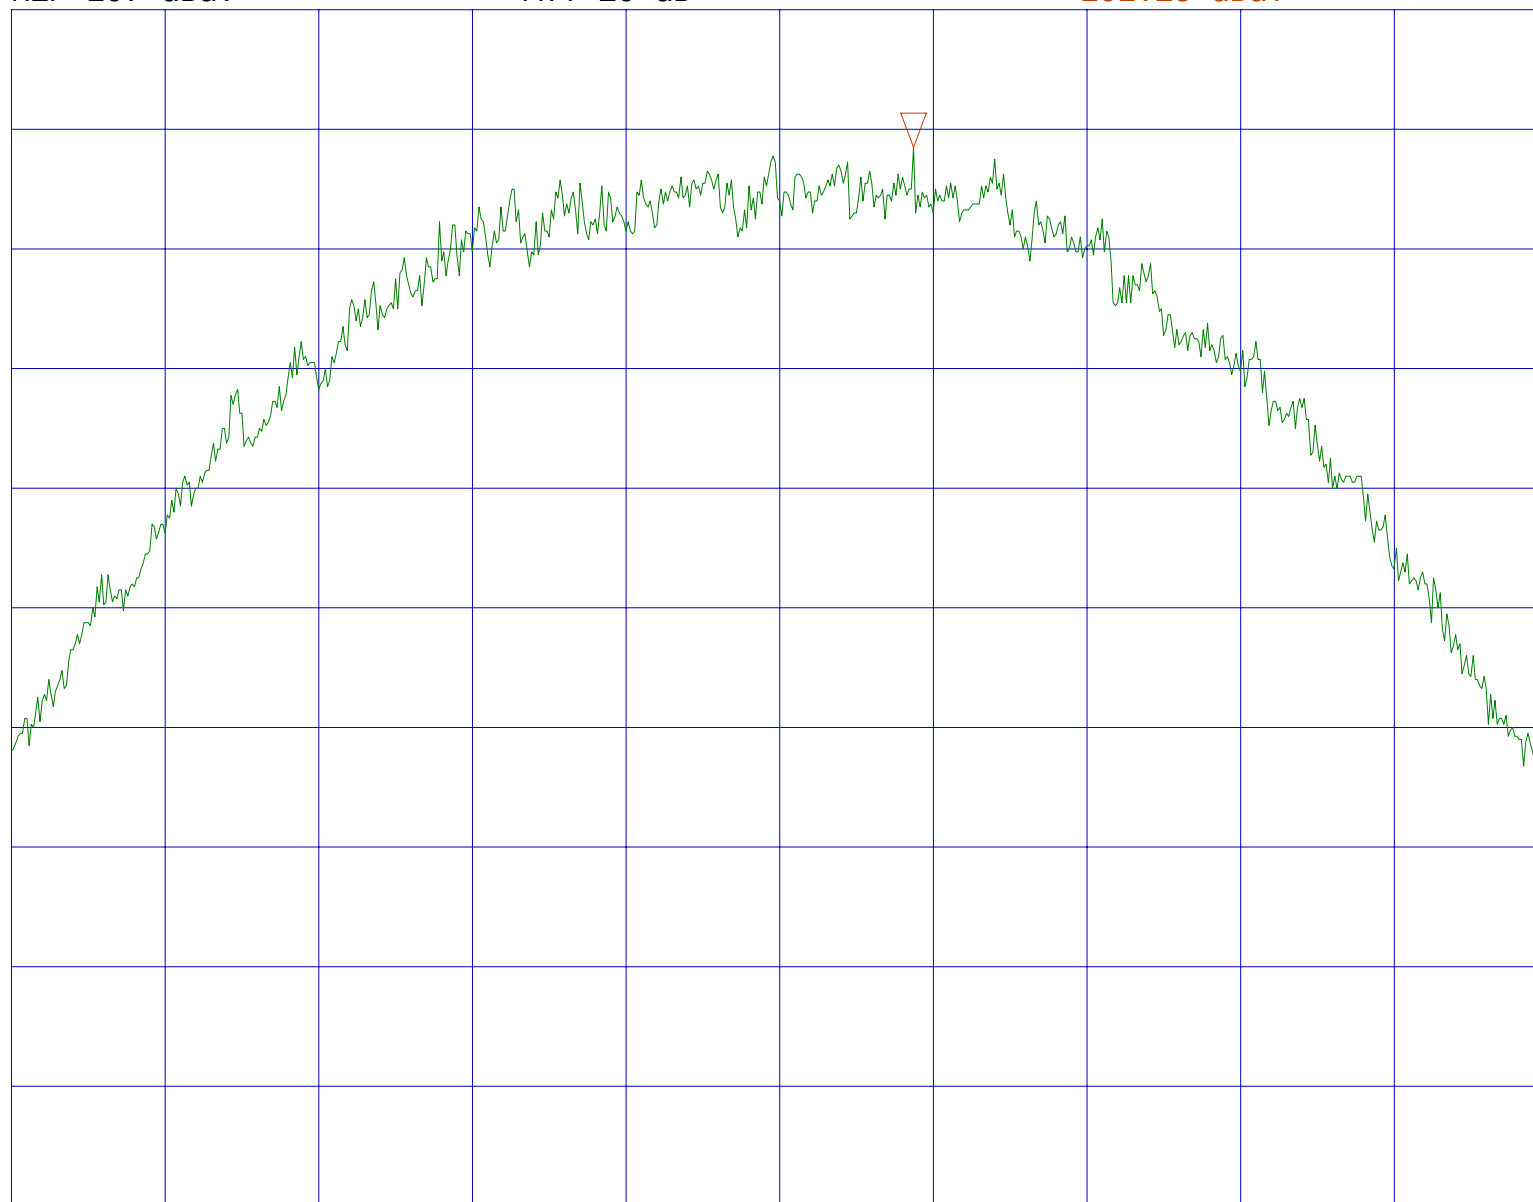

START 2.427000GHz
RBW 3MHz


VBW 3MHz

STOP 2.447000GHz
SWP 500ms

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA13
15.247(c)PeakOutPower/2437MHz(HOR)/22DE0015-YW-1
REF 107 dBuV ATT 20 dB

MAKER
2.4370 GHz
102.38 dBuV

5dB/

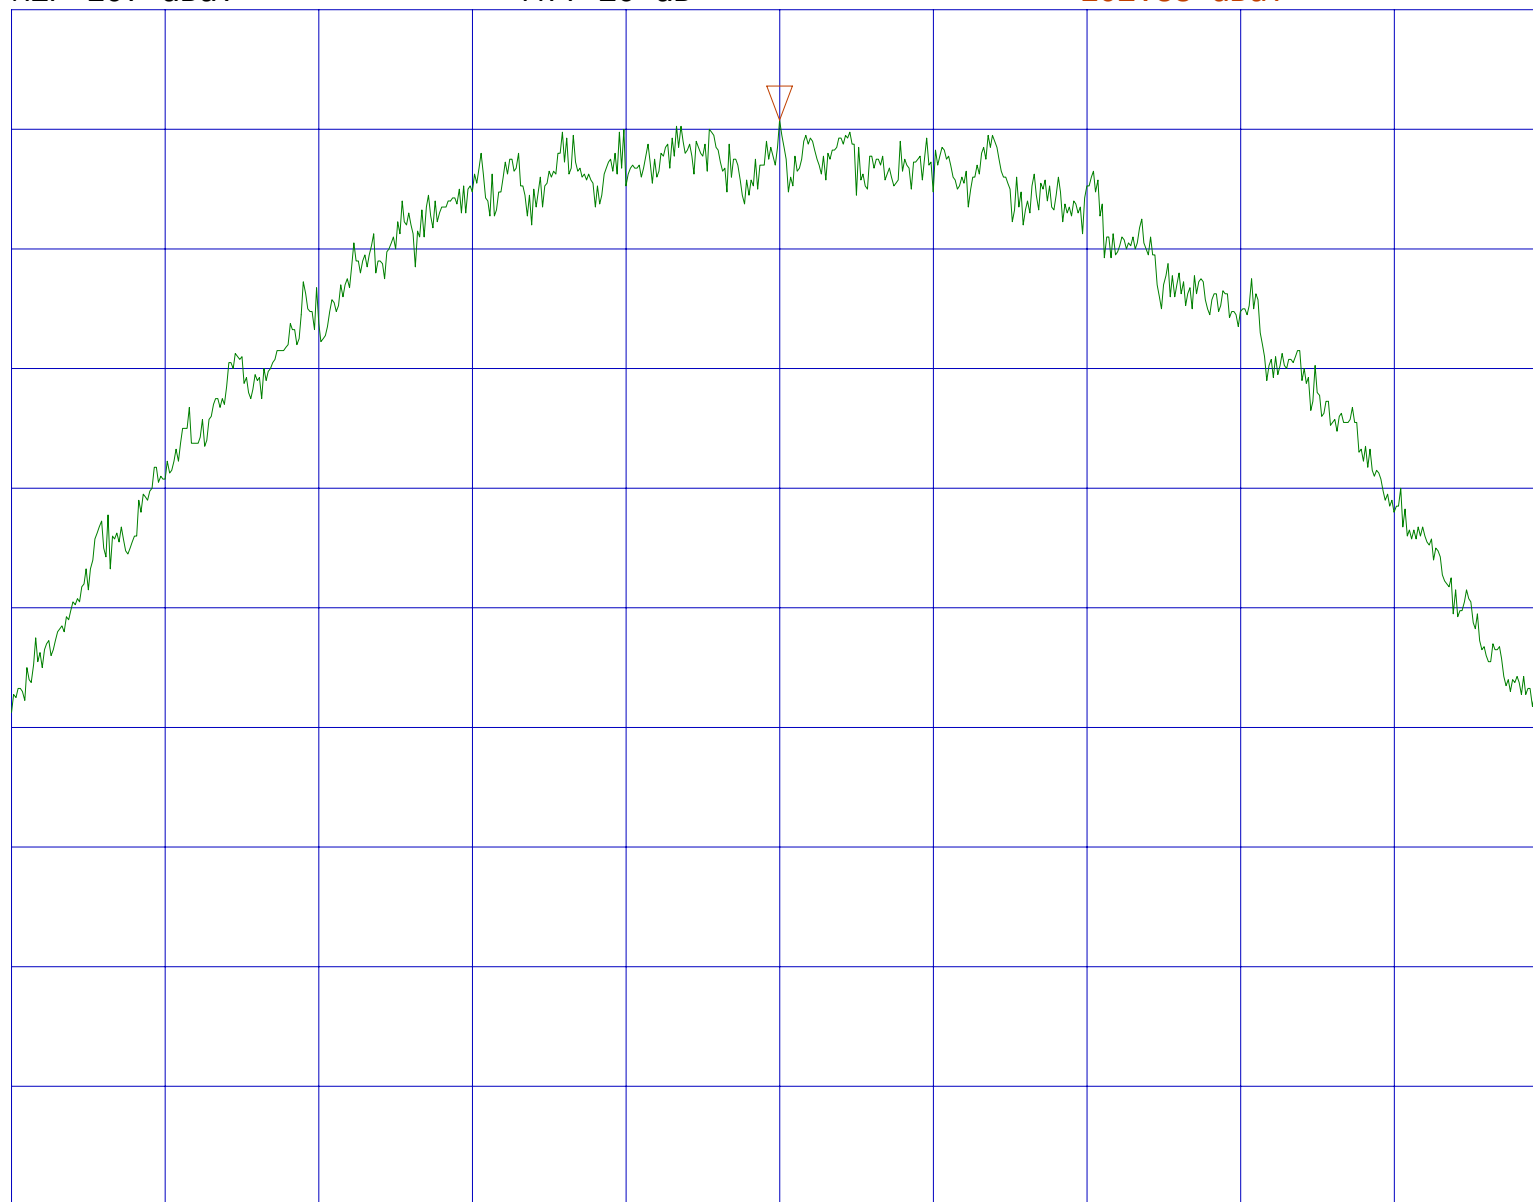

START 2.427000GHz
RBW 3MHz


VBW 3MHz

STOP 2.447000GHz
SWP 500ms

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA14
15.247(c)PeakOutPower/2462MHz(VER)/22DE0015-YW-1
REF 107 dBuV ATT 20 dB

MAKER
2.4628 GHz
102.13 dBuV

5dB/

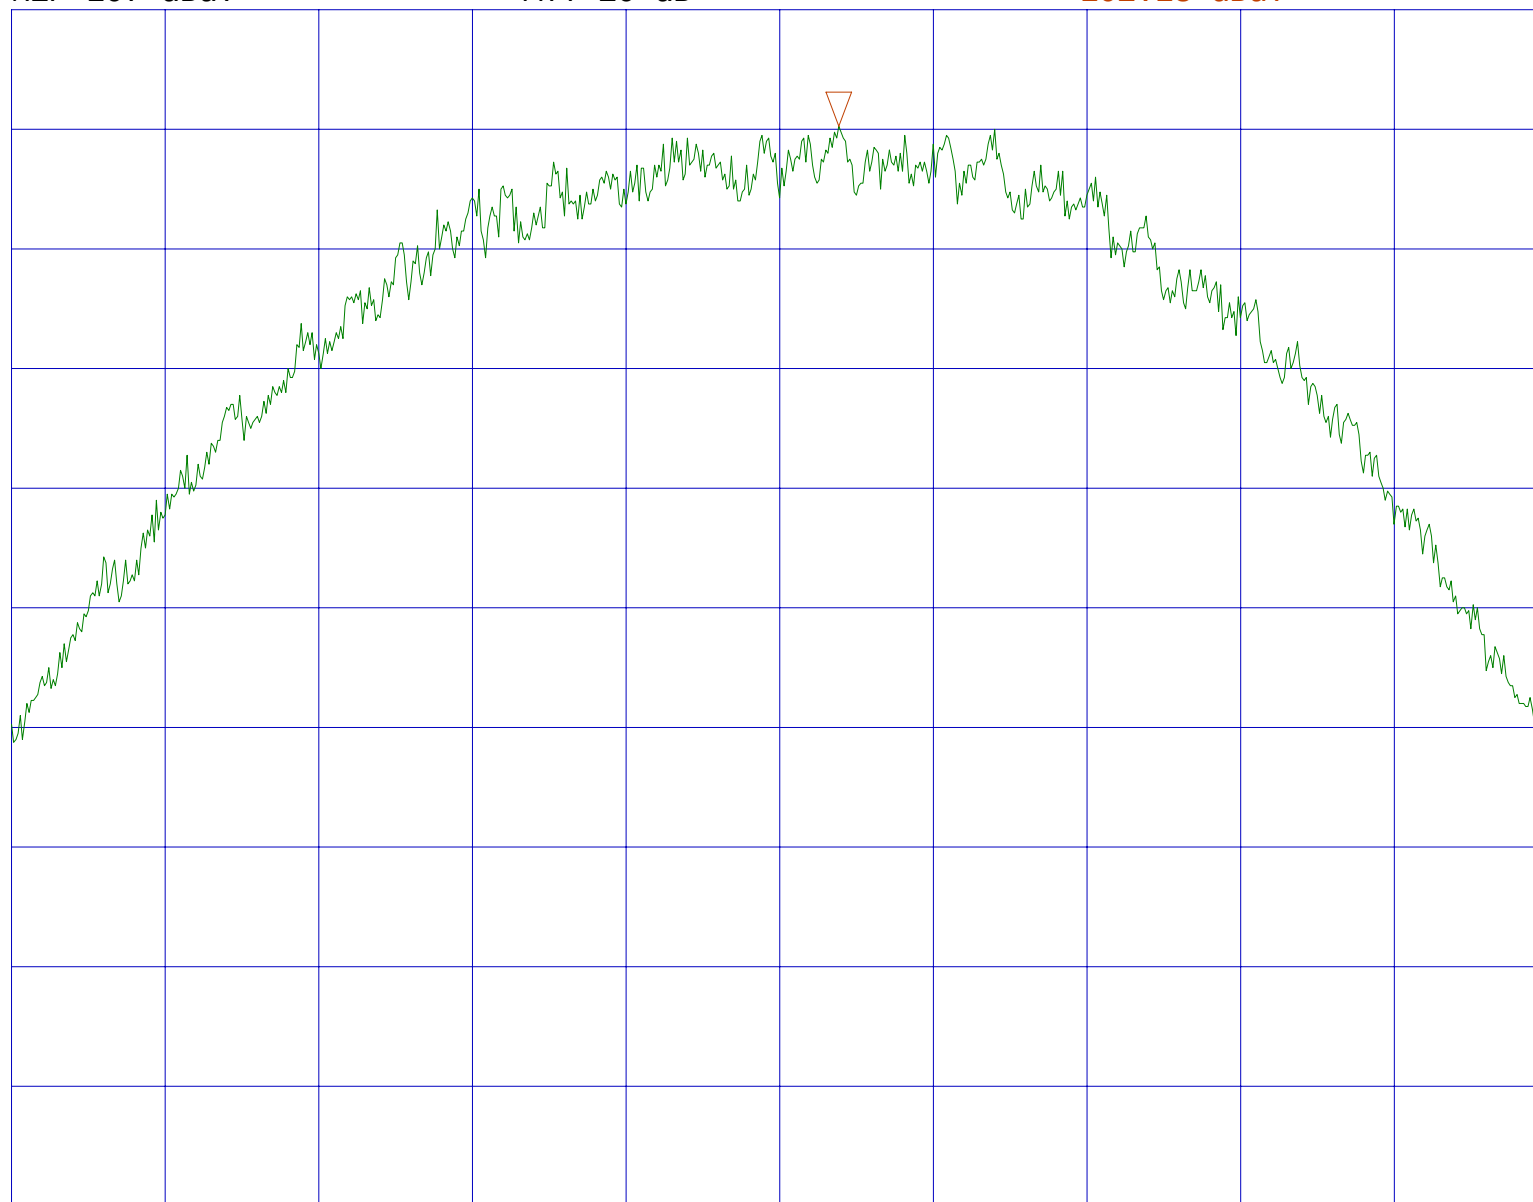

START 2.452000GHz
RBW 3MHz


VBW 3MHz

STOP 2.472000GHz
SWP 500ms

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA15
15.247(c)PeakOutPower/2462MHz(HOR)/22DE0015-YW-1
REF 107 dBuV ATT 20 dB

MAKER
2.4628 GHz
100.38 dBuV

5dB/

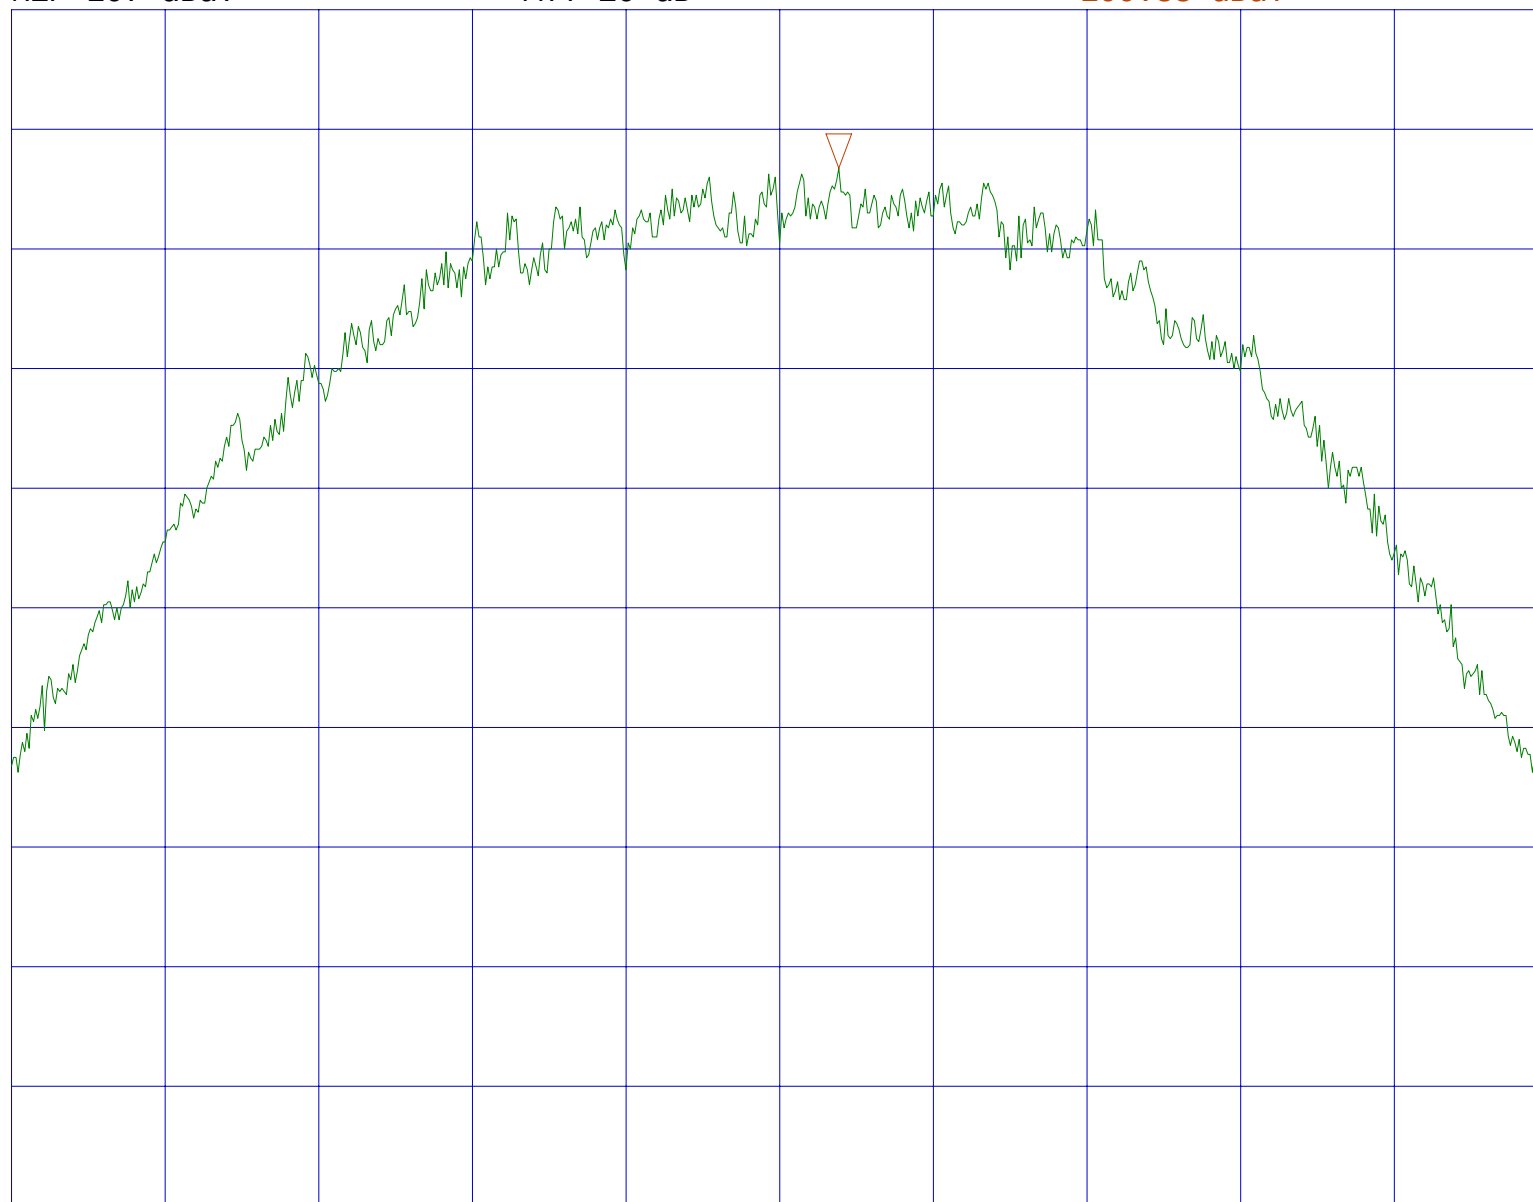

START 2.452000GHz
RBW 3MHz

VBW 3MHz

STOP 2.472000GHz
SWP 500ms

Peak Out Put Power(Conducted)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

COMPANY : Sony Corporation
EQUIPMENT : Notebook Computer
MODEL : PCG-441L
FCC ID : AK8PCG441L
POWER : AC120V/60Hz
Mode : Transmitting

REPORT NO : 22DE0015-YW-1
REGULATION : Fcc Part15 SubpartC 247(b)
DATE : 2001/11/19
Temp./Humi. : 20°C/43%

ENGINEER : Naoki Sakamoto

CH	FREQ	PM Reading	Limit	MARGIN
	[GHz]	[dBm]	[dBm]	[dB]
Low	2.41200	14.6	30.0	15.4
Mid	2.43800	14.7	30.0	15.3
High	2.46200	14.7	30.0	15.3

DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22DE0015-YW-1

Applicant : Sony Corporation
Kind of Equipment : Notebook Computer
Model No. : PCG-441L
Serial No. :
Power : AC120V/60Hz
Mode : Transmitting (Ch1)
Remarks : FCC ID: AK8PCG441L
Date : 11/19/2001
Test Distance : 3 m
Temperature : 25 °C
Humidity : 35 %
Regulation : Fcc 15C § 15.209(a)

Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	81.31	BB	26.9	38.6	6.5	27.9	1.7	5.9	13.1	24.8	40.0	26.9	15.2
2.	325.06	BB	42.1	38.2	14.5	27.6	3.6	5.8	38.4	34.5	46.0	7.6	11.5
3.	364.41	BB	35.6	33.2	15.0	27.6	3.9	5.8	32.7	30.3	46.0	13.3	15.7
4.	390.06	BB	33.7	33.7	15.3	27.5	4.1	5.8	31.4	31.4	46.0	14.6	14.6
5.	397.54	BB	33.1	32.0	15.4	27.5	4.1	5.8	30.9	29.8	46.0	15.1	16.2
6.	520.10	BB	34.1	35.2	18.2	27.5	4.9	5.9	35.6	36.7	46.0	10.4	9.3
7.	528.09	BB	30.8	30.9	18.3	27.5	4.9	5.9	32.4	32.5	46.0	13.6	13.5
8.	585.09	BB	36.4	36.5	18.7	27.3	5.2	5.9	38.9	39.0	46.0	7.1	7.0
9.	780.13	BB	27.7	25.0	21.1	26.7	6.0	5.8	33.9	31.2	46.0	12.1	14.8

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

All other spurious emissions are more than 20dB below the limits.
ANT. TYPE: 30-300MHz Biconical, 300-1000MHz Logperiodic

DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22DE0015-YW-1

Applicant : Sony Corporation
Kind of Equipment : Notebook Computer
Model No. : PCG-441L
Serial No. :
Power : AC120V/60Hz
Mode : Transmitting(Ch6)
Remarks : FCC ID: AK8PCG441L
Date : 11/20/2001
Test Distance : 3 m
Temperature : 20 °C
Humidity : 43 %
Regulation : Fcc 15C § 15. 209 (a)


Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	81.31	BB	26.9	37.4	6.5	27.9	1.7	5.9	13.1	23.6	40.0	26.9	16.4
2.	325.06	BB	42.9	38.4	14.5	27.6	3.6	5.8	39.2	34.7	46.0	6.8	11.3
3.	364.41	BB	35.3	32.2	15.0	27.6	3.9	5.8	32.4	29.3	46.0	13.6	16.7
4.	390.08	BB	32.1	33.3	15.3	27.5	4.1	5.8	29.8	31.0	46.0	16.2	15.0
5.	397.55	BB	33.4	32.4	15.4	27.5	4.1	5.8	31.2	30.2	46.0	14.8	15.8
6.	520.10	BB	32.2	33.4	18.2	27.5	4.9	5.9	33.7	34.9	46.0	12.3	11.1
7.	528.09	BB	30.5	30.2	18.3	27.5	4.9	5.9	32.1	31.8	46.0	13.9	14.2
8.	585.10	BB	36.0	35.9	18.7	27.3	5.2	5.9	38.5	38.4	46.0	7.5	7.6
9.	780.13	BB	28.5	24.9	21.1	26.7	6.0	5.8	34.7	31.1	46.0	11.3	14.9


CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

All other spurious emissions are more than 20dB below the limits.
ANT. TYPE:30-300MHz Biconical,300-1000MHz Logperiodic

DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22DE0015-YW-1

Applicant : Sony Corporation
Kind of Equipment : Notebook Computer
Model No. : PCG-441L
Serial No. :
Power : AC120V/60Hz
Mode : Transmitting(Ch11)
Remarks : FCC ID: AK8PCG441L
Date : 11/20/2001
Test Distance : 3 m
Temperature : 20 °C
Humidity : 43 %
Regulation : Fcc 15C § 15.209(a)


Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR	AMP GAIN	CABLE LOSS	ATTEN. [dB]	RESULT		LIMITS	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	81.31	BB	26.8	38.0	6.5	27.9	1.7	5.9	13.0	24.2	40.0	27.0	15.8
2.	325.06	BB	42.4	37.3	14.5	27.6	3.6	5.8	38.7	33.6	46.0	7.3	12.4
3.	364.45	BB	36.4	32.1	15.0	27.6	3.9	5.8	33.5	29.2	46.0	12.5	16.8
4.	390.06	BB	32.6	33.1	15.3	27.5	4.1	5.8	30.3	30.8	46.0	15.7	15.2
5.	396.53	BB	33.9	32.3	15.4	27.5	4.1	5.8	31.7	30.1	46.0	14.3	15.9
6.	520.10	BB	33.2	33.3	18.2	27.5	4.9	5.9	34.7	34.8	46.0	11.3	11.2
7.	528.09	BB	30.4	30.2	18.3	27.5	4.9	5.9	32.0	31.8	46.0	14.0	14.2
8.	585.09	BB	38.5	35.8	18.7	27.3	5.2	5.9	41.0	38.3	46.0	5.0	7.7
9.	780.13	BB	30.1	25.2	21.1	26.7	6.0	5.8	36.3	31.4	46.0	9.7	14.6


CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

All other spurious emissions are more than 20dB below the limits.
ANT. TYPE: 30-300MHz Biconical, 300-1000MHz Logperiodic

DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22DE0015-YW-1

Applicant : Sony Corporation
Kind of Equipment : Notebook Computer
Model No. : PCG-441L
Serial No. :
Power : AC120V/60Hz
Mode : Receiving
Remarks : FCC ID: AK8PCG441L
Date : 11/20/2001
Test Distance : 3 m
Temperature : 20 °C
Humidity : 43 %
Regulation : Fcc 15C § 15.209(a)


Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	81.33	BB	26.2	38.8	6.5	27.9	1.7	5.9	12.4	25.0	40.0	27.6	15.0
2.	325.06	BB	43.3	40.5	14.5	27.6	3.6	5.8	39.6	36.8	46.0	6.4	9.2
3.	364.45	BB	36.2	33.3	15.0	27.6	3.9	5.8	33.3	30.4	46.0	12.7	15.6
4.	390.09	BB	33.2	33.7	15.3	27.5	4.1	5.8	30.9	31.4	46.0	15.1	14.6
5.	396.48	BB	34.1	33.2	15.4	27.5	4.1	5.8	31.9	31.0	46.0	14.1	15.0
6.	520.09	BB	34.0	34.2	18.2	27.5	4.9	5.9	35.5	35.7	46.0	10.5	10.3
7.	528.08	BB	31.4	30.8	18.3	27.5	4.9	5.9	33.0	32.4	46.0	13.0	13.6
8.	585.10	BB	38.8	36.6	18.7	27.3	5.2	5.9	41.3	39.1	46.0	4.7	6.9
9.	780.13	BB	28.8	23.7	21.1	26.7	6.0	5.8	35.0	29.9	46.0	11.0	16.1

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

All other spurious emissions are more than 20dB below the limits.
ANT. TYPE:30-300MHz Biconical,300-1000MHz Logperiodic

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

COMPANY : Sony Corporation
EQUIPMENT : Notebook Computer
MODEL : PCG-441L
FCC ID : AK8PCG441L
POWER : AC120V/60Hz
Mode : Transmitting (ch1:2412MHz)

REPORT NO : 22DE0015-YW-1
REGULATION : Fcc Part15 SubpartC 247/209
TEST DISTANCE : 3m / 1m
DATE : 11/19/2001, 11/21/2001
Temp./Humi. : 20°C/43%, 22°C/48%

ENGINEER : Naoki Sakamoto

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H.P.Filter or ATTN [dB]	RESULT		Limit PK [dB μV/m]	MARGIN	
		HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
#1	1.04018	52.6	55.0	24.9	35.4	2.2	6.0	49.3	49.8	74.0	24.7	24.2
#2	1.16674	48.7	52.0	25.6	35.2	2.3	6.0	47.4	50.7	74.0	26.6	23.3
#3	1.31586	57.4	59.0	26.4	35.0	2.4	6.0	57.2	58.8	74.0	16.8	15.2
#4	1.36139	50.7	52.3	26.7	34.9	2.4	6.0	50.9	52.5	74.0	23.1	21.5
#5	1.57403	50.5	53.2	27.8	34.7	2.6	6.0	52.2	54.9	74.0	21.8	19.1
#6	2.39000	46.0	49.5	31.3	34.5	3.4	6.0	52.2	55.7	74.0	21.8	18.3
7	4.82400	39.8	39.0	35.4	34.5	8.0	1.2	49.9	49.1	74.0	24.1	24.9
8	7.23600	38.2	39.4	39.1	34.8	9.4	1.0	52.9	54.1	74.0	21.1	19.9
9	9.64800	41.8	42.2	39.2	35.0	11.0	1.3	58.3	58.7	74.0	15.7	15.3
*10	12.06000	38.9	39.5	43.5	34.4	12.1	1.5	61.6	62.2	83.5	21.9	21.3
*11	14.47200	39.3	39.1	42.2	33.1	13.5	1.1	63.0	62.8	83.5	20.5	20.7
*12	16.88400	41.3	40.2	43.8	33.4	14.8	1.1	67.6	66.5	83.5	15.9	17.0
*13	19.29600	43.9	43.5	38.0	33.4	15.8	1.0	65.3	64.9	83.5	18.2	18.6
*14	21.70800	43.8	44.3	37.8	33.0	16.5	0.8	65.9	66.4	83.5	17.6	17.1
*15	24.12000	44.9	44.6	39.6	33.2	15.8	0.7	67.8	67.5	83.5	15.7	16.0

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H.P.Filter or ATTN [dB]	RESULT		Limit AV [dB μV/m]	MARGIN	
		HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
#1	1.04018	38.3	42.4	24.9	35.4	2.2	6.0	36.0	40.1	54.0	18.0	13.9
#2	1.16674	35.7	36.7	25.6	35.2	2.3	6.0	34.4	35.4	54.0	19.6	18.6
#3	1.31586	35.5	35.9	26.4	35.0	2.4	6.0	35.3	35.7	54.0	18.7	18.3
#4	1.36139	35.3	36.3	26.7	34.9	2.4	6.0	35.5	36.5	54.0	18.5	17.5
#5	1.57403	35.3	36.4	27.8	34.7	2.6	6.0	37.0	38.1	54.0	17.0	15.9
#6	2.39000	35.5	39.2	31.1	34.5	3.4	6.0	41.5	45.2	54.0	12.5	8.8
7	4.82400	28.2	28.0	35.4	34.5	8.0	1.2	38.3	38.1	54.0	15.7	15.9
8	7.23600	27.4	28.5	39.1	34.8	9.4	1.0	42.1	43.2	54.0	11.9	10.8
9	9.64800	31.0	31.0	39.2	35.0	11.0	1.3	47.5	47.5	54.0	6.5	6.5
*10	12.06000	28.5	28.6	43.5	34.4	12.1	1.5	51.2	51.3	63.5	12.3	12.2
*11	14.47200	28.3	28.3	42.2	33.1	13.5	1.1	52.0	52.0	63.5	11.5	11.5
*12	16.88400	30.4	30.2	43.8	33.4	14.8	1.1	56.7	56.5	63.5	6.8	7.0
*13	19.29600	32.7	32.5	38.0	33.4	15.8	1.0	54.1	53.9	63.5	9.4	9.6
*14	21.70800	32.8	32.5	37.8	33.0	16.5	0.8	54.9	54.6	63.5	8.6	8.9
*15	24.12000	33.6	34.0	39.6	33.2	15.8	0.7	56.5	56.9	63.5	7.1	6.7

Sample Calculation :

RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass Filter or ATTN.

Except for the above table : All other spurious emissions are more than 20dB below the limit.

* Test Distance 1m, 1m Limit = 3m Limit + 20log(3/1)

Use ATTN, Other points use high pass filter.

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

COMPANY : Sony Corporation
EQUIPMENT : Notebook Computer
MODEL : PCG-441L
FCC ID : AK8PCG441L
POWER : AC120V/60Hz
Mode : Transmitting (ch6:2437MHz)

REPORT NO : 22DE0015-YW-1
REGULATION : Fcc Part15 SubpartC 247/209
TEST DISTANCE : 3m / 1m
DATE : 11/19/2001, 11/21/2001
Temp./Humi. : 20℃/43%, 22℃/48%

ENGINEER : Naoki Sakamoto

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H. P. Filter or ATTN [dB]	RESULT		Limit PK [dB μV/m]	MARGIN	
		HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
#1	1.04018	53.0	55.3	24.9	35.4	2.2	6.0	50.7	53.0	74.0	23.3	21.0
#2	1.16674	49.1	51.8	25.6	35.2	2.3	6.0	47.8	50.5	74.0	26.2	23.5
#3	1.31586	57.5	58.8	26.4	35.0	2.4	6.0	57.3	58.6	74.0	16.7	15.4
#4	1.36139	50.7	52.3	26.7	34.9	2.4	6.0	50.9	52.5	74.0	23.1	21.5
#5	1.57403	50.2	53.2	27.8	34.7	2.6	6.0	51.9	54.9	74.0	22.1	19.1
6	4.87400	38.7	38.5	35.6	34.5	7.8	1.3	48.9	48.7	74.0	25.1	25.3
7	7.31100	40.0	39.9	39.2	34.9	9.4	1.0	54.7	54.6	74.0	19.3	19.4
8	9.74800	42.4	42.7	39.2	35.0	11.0	1.3	58.9	59.2	74.0	15.1	14.8
*9	12.18500	39.2	40.6	43.4	34.3	12.3	1.5	62.1	63.5	83.5	21.4	20.0
*10	14.62200	38.4	38.5	42.6	33.1	13.6	1.1	62.6	62.7	83.5	20.9	20.8
*11	17.05900	40.4	41.5	43.8	33.2	14.8	1.1	66.9	68.0	83.5	16.6	15.5
*12	19.49600	43.3	41.9	38.0	33.4	15.9	1.4	65.2	63.8	83.5	18.3	19.7
*13	21.93300	42.1	43.2	37.8	33.0	16.5	0.6	64.0	65.1	83.5	19.5	18.4
*14	24.37000	44.9	44.4	39.5	33.2	15.7	0.5	67.4	66.9	83.5	16.1	16.6

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H. P. Filter or ATTN [dB]	RESULT		Limit AV [dB μV/m]	MARGIN	
		HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
#1	1.04018	38.6	43.0	24.9	35.4	2.2	6.0	36.3	40.7	54.0	17.7	13.3
#2	1.16674	35.8	36.8	25.6	35.2	2.3	6.0	34.5	35.5	54.0	19.5	18.5
#3	1.31586	35.5	36.0	26.4	35.0	2.4	6.0	35.3	35.8	54.0	18.7	18.2
#4	1.36139	35.6	36.4	26.7	34.9	2.4	6.0	35.8	36.6	54.0	18.2	17.4
#5	1.57403	35.5	36.5	27.8	34.7	2.6	6.0	37.2	38.2	54.0	16.8	15.8
6	4.87400	28.6	28.5	35.6	34.5	7.8	1.3	38.8	38.7	54.0	15.2	15.3
7	7.31100	28.9	27.9	39.2	34.9	9.4	1.0	43.6	42.6	54.0	10.4	11.4
8	9.74800	31.9	32.0	39.2	35.0	11.0	1.3	48.4	48.5	63.5	15.1	15.0
9	12.18500	28.7	29.3	43.4	34.3	12.3	1.5	51.6	52.2	63.5	11.9	11.3
*10	14.62200	27.4	27.7	42.6	33.1	13.6	1.1	51.6	51.9	63.5	11.9	11.6
*11	17.05900	31.1	31.2	43.8	33.2	14.8	1.1	57.6	57.7	63.5	5.9	5.8
*12	19.49600	32.4	32.3	38.0	33.4	15.9	1.4	54.3	54.2	63.5	9.2	9.3
*13	21.93300	32.7	33.1	37.8	33.0	16.5	0.6	54.6	55.0	63.5	8.9	8.5
*14	24.37000	34.1	34.3	39.5	33.2	15.7	0.5	56.6	56.8	63.5	7.0	6.8

Sample Calculation :

RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass Filter or ATTN.

Except for the above table : All other spurious emissions are more than 20dB below the limit.

* Test Distance 1m, 1m Limit = 3m Limit + 20log(3/1)

Use ATTN, Other points use high pass filter.

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

COMPANY : Sony Corporation
EQUIPMENT : Notebook Computer
MODEL : PCG-441L
FCC ID : AK8PCG441L
POWER : AC120V/60Hz
Mode : Transmitting (ch11:2462MHz)

REPORT NO : 22DE0015-YW-1
REGULATION : Fcc Part15 SubpartC 247/209
TEST DISTANCE : 3m / 1m
DATE : 11/19/2001, 11/21/2001
Temp./Humi. : 20°C/43%, 22°C/48%

ENGINEER : Naoki Sakamoto

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H.P.Filter or ATTN [dB]	RESULT		Limit PK [dB μV/m]	MARGIN	
		HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
#1	1.04018	52.7	55.2	24.9	35.4	2.2	6.0	50.4	52.9	74.0	23.6	21.1
#2	1.16674	49.0	51.9	25.6	35.2	2.3	6.0	47.7	50.6	74.0	26.3	23.4
#3	1.31586	57.2	59.2	26.4	35.0	2.4	6.0	57.0	59.0	74.0	17.0	15.0
#4	1.36139	50.9	52.5	26.7	34.9	2.4	6.0	51.1	52.7	74.0	22.9	21.3
#5	1.57403	50.4	52.0	27.8	34.7	2.6	6.0	52.1	53.7	74.0	21.9	20.3
#6	2.48350	45.9	49.7	31.3	34.5	3.5	6.0	52.2	56.0	74.0	21.8	18.0
7	4.92400	39.4	39.7	35.8	34.5	7.9	1.3	49.9	50.2	74.0	24.1	23.8
8	7.38600	39.5	39.2	39.2	34.9	9.5	0.9	54.2	53.9	74.0	19.8	20.1
9	9.84800	42.8	42.1	39.2	34.9	11.0	1.1	59.2	58.5	74.0	14.8	15.5
*10	12.31000	39.5	39.2	43.3	34.2	12.3	1.5	62.4	62.1	83.5	21.1	21.4
*11	14.77200	39.4	38.9	42.9	33.0	13.7	1.2	64.2	63.7	83.5	19.3	19.8
*12	17.23400	42.0	41.6	43.9	33.1	14.8	0.8	68.4	68.0	83.5	15.1	15.5
*13	19.69600	41.6	42.3	38.0	33.4	16.0	1.6	63.8	64.5	83.5	19.7	19.0
*14	22.15800	42.4	41.2	38.3	33.0	16.5	0.7	64.9	63.7	83.5	18.7	19.9
*15	24.62000	44.5	44.4	39.4	33.2	15.4	0.6	66.7	66.6	83.5	16.8	16.9

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H.P.Filter or ATTN [dB]	RESULT		Limit AV [dB μV/m]	MARGIN	
		HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
#1	1.04018	38.2	43.1	24.9	35.4	2.2	6.0	35.9	40.8	54.0	18.1	13.2
#2	1.16674	36.0	36.9	25.6	35.2	2.3	6.0	34.7	35.6	54.0	19.3	18.4
#3	1.31586	35.7	35.6	26.4	35.0	2.4	6.0	35.5	35.4	54.0	18.5	18.6
#4	1.36139	35.8	36.6	26.7	34.9	2.4	6.0	36.0	36.8	54.0	18.0	17.2
#5	1.57403	35.4	36.6	27.8	34.7	2.6	6.0	37.1	38.3	54.0	16.9	15.7
#6	2.48350	35.5	39.8	31.3	34.5	3.5	6.0	41.8	46.1	54.0	12.2	7.9
7	4.92400	28.1	28.4	35.8	34.5	7.9	1.3	38.6	38.9	54.0	15.4	15.1
8	7.38600	27.9	28.1	39.2	34.9	9.5	0.9	42.6	42.8	54.0	11.4	11.2
9	9.84800	31.8	31.8	39.2	34.9	11.0	1.1	48.2	48.2	54.0	5.8	5.8
*10	12.31000	28.2	27.9	43.3	34.2	12.3	1.5	51.1	50.8	63.5	12.4	12.7
*11	14.77200	27.9	28.5	42.9	33.0	13.7	1.2	52.7	53.3	63.5	10.8	10.2
*12	17.23400	30.7	31.4	43.9	33.1	14.8	0.8	57.1	57.8	63.5	6.4	5.7
*13	19.69600	30.4	31.4	38.0	33.4	16.0	1.6	52.6	53.6	63.5	10.9	9.9
*14	22.15800	30.4	32.0	38.3	33.0	16.5	0.7	52.9	54.5	63.5	10.7	9.1
*15	24.62000	33.9	34.2	39.4	33.2	15.4	0.6	56.1	56.4	63.5	7.4	7.1

Sample Calculation :

RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass Filter or ATTN.

Except for the above table : All other spurious emissions are more than 20dB below the limit.

* Test Distance 1m, 1m Limit = 3m Limit + 20log(3/1)

Use ATTN, Other points use high pass filter.

DATA OF SUPURIOUS EMISSIONS(1GHz to 5GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

COMPANY : Sony Corporation
EQUIPMENT : Notebook Computer
MODEL : PCG-441L
FCC ID : AK8PCG441L
POWER : AC120V/60Hz
Mode : Receiving

REPORT NO : 22DE0015-YW-1
REGULATION : Fcc Part15 SubpartC 247/209
TEST DISTANCE : 3m
DATE : 2001/11/19
Temp./Humi. : 20°C/43%

ENGINEER : Naoki Sakamoto

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN [dB]	RESULT		Limit PK [dB μ V/m]	MARGIN	
		HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1	1.03987	53.5	56.5	24.9	35.4	2.2	6.0	51.2	54.2	74.0	22.8	19.8
2	1.16676	49.8	51.4	25.6	35.2	2.3	6.0	48.5	50.1	74.0	25.5	23.9
3	1.36138	51.0	52.4	26.7	34.9	2.4	6.0	51.2	52.6	74.0	22.8	21.4
4	1.57203	48.2	53.8	27.8	34.7	2.6	6.0	49.9	55.5	74.0	24.1	18.5

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN [dB]	RESULT		Limit AV [dB μ V/m]	MARGIN	
		HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1	1.03987	39.0	38.3	24.9	35.4	2.2	6.0	36.7	36.0	54.0	17.3	18.0
2	1.16676	36.2	36.5	25.6	35.2	2.3	6.0	34.9	35.2	54.0	19.1	18.8
3	1.36138	36.1	36.5	26.7	34.9	2.4	6.0	36.3	36.7	54.0	17.7	17.3
4	1.57203	35.5	36.5	27.8	34.7	2.6	6.0	37.2	38.2	54.0	16.8	15.8

Sample Calculation :

RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + ATTEN.

Except for the above table : All other spurious emissions are more than 20dB below the limit.


Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA25
15.247(c)OutOfBand/2412MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB

10dB/

START 30.00MHz
RBW 100kHz

VBW 100kHz

STOP 1.000000GHz
SWP 500ms

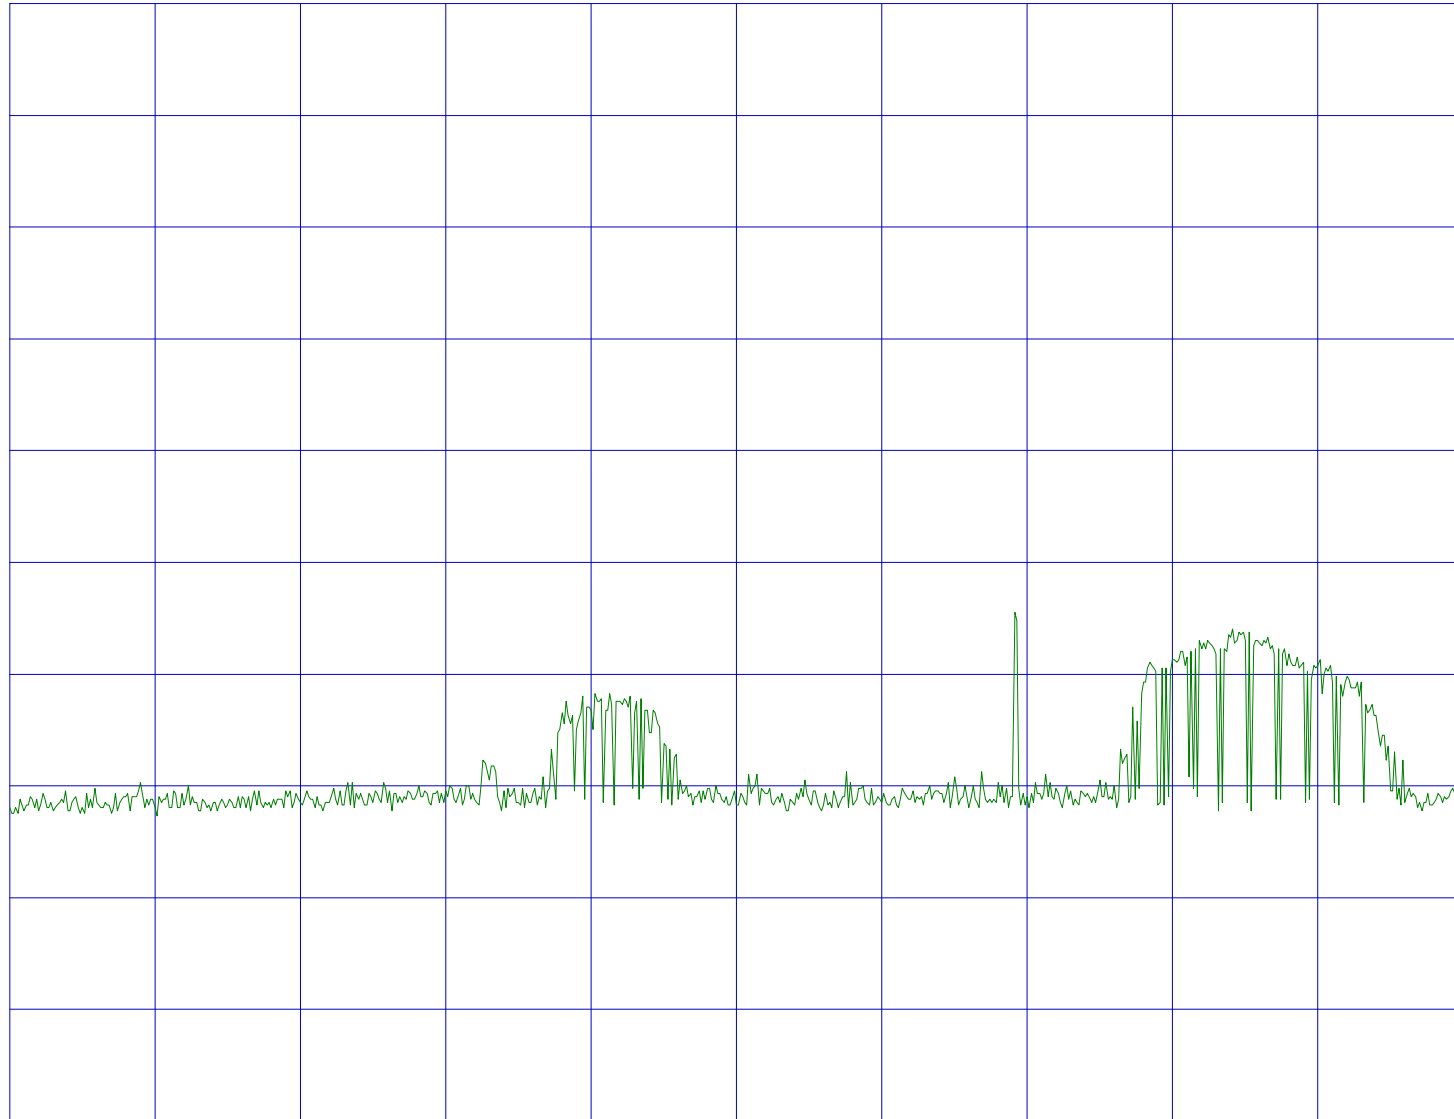


Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA26
15.247(c)OutOfBand/2412MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB

10dB/

START 1.000000GHz
RBW 100kHz


VBW 100kHz

STOP 3.000000GHz
SWP 1s

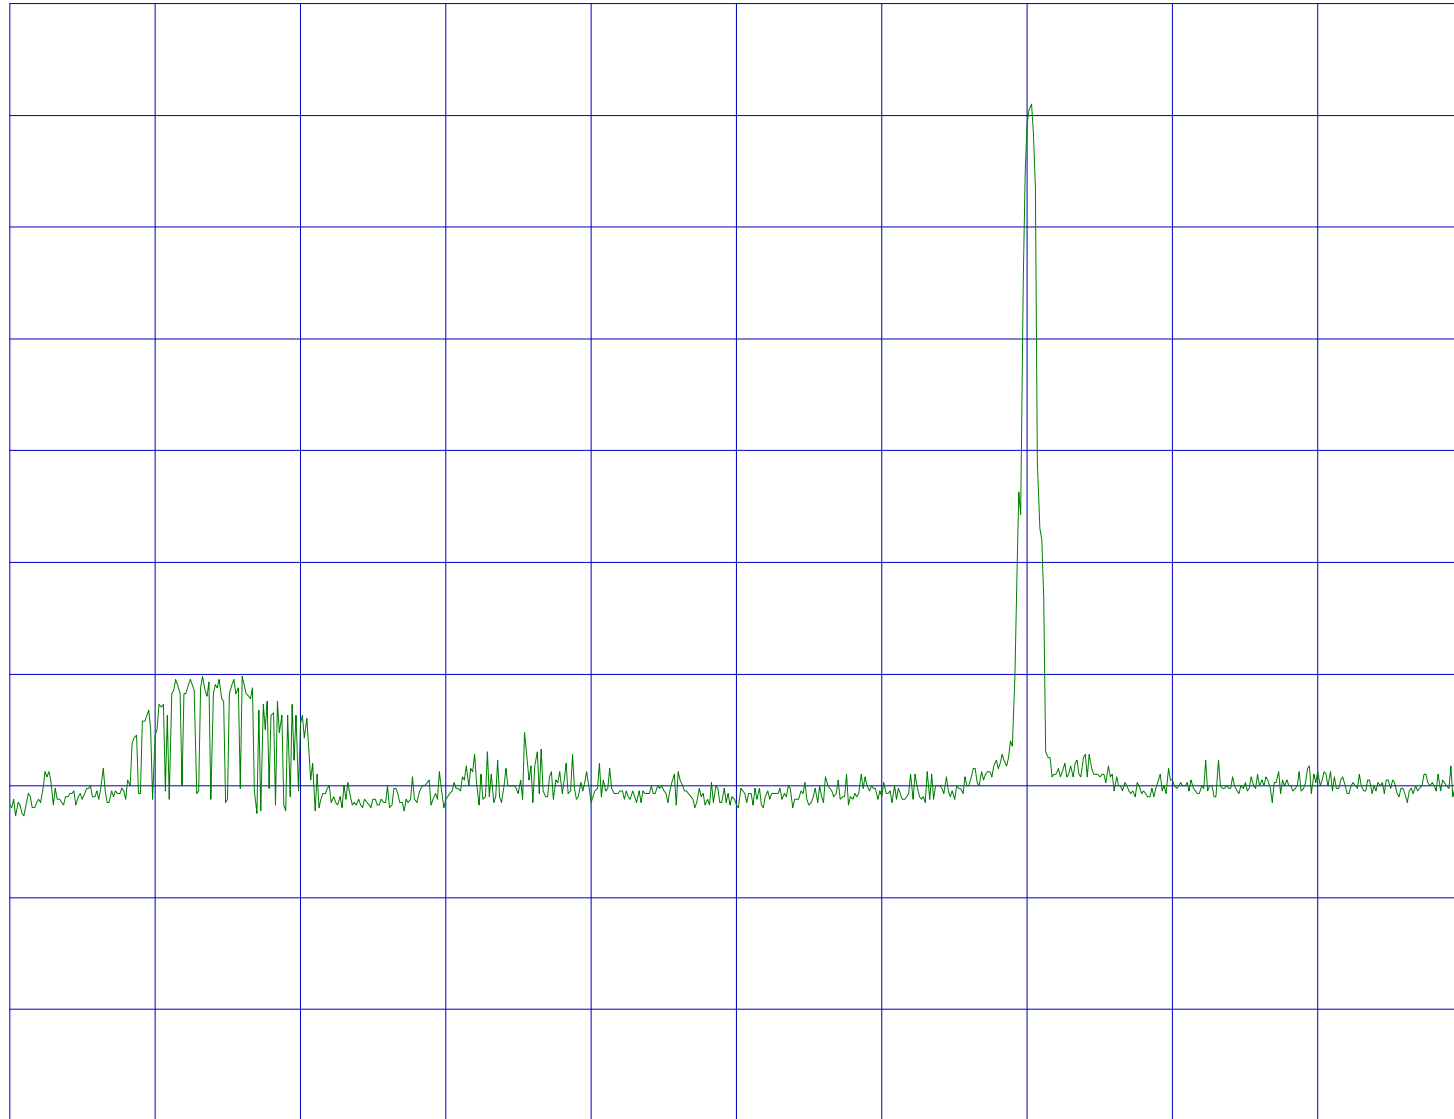

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA27
15.247(c)OutOfBand/2412MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB

10dB/

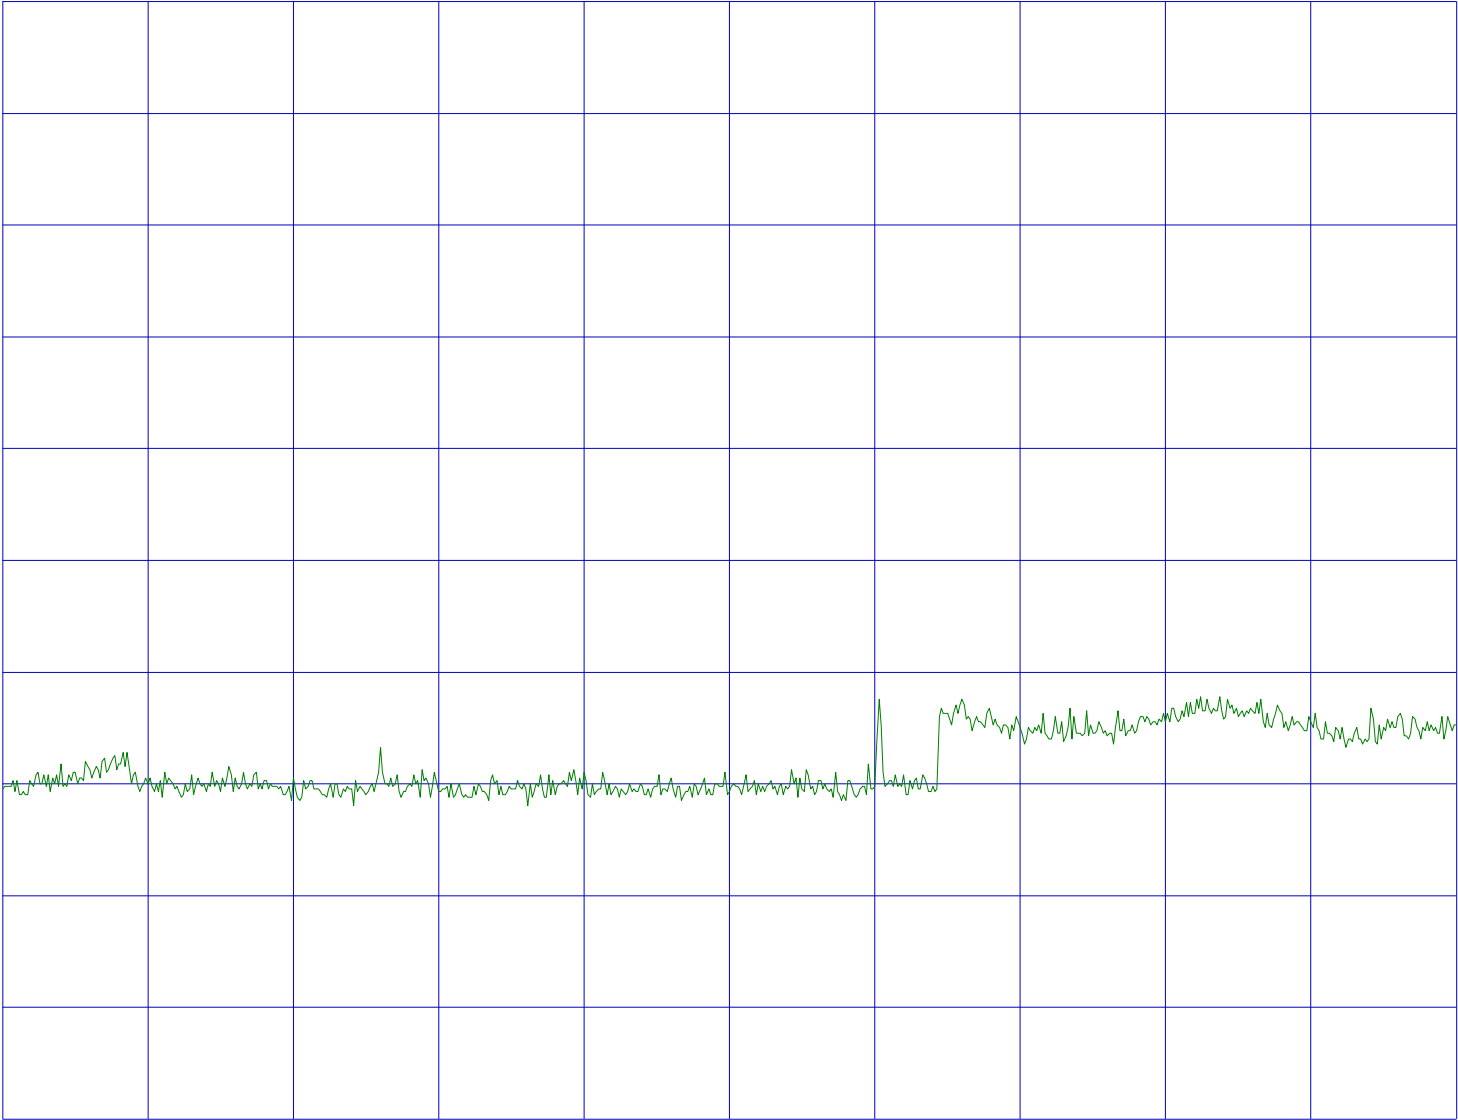


START 3.000000GHz
RBW 100kHz

VBW 100kHz

STOP 10.000000GHz
SWP 2s

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA28
15.247(c)OutOfBand/2412MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB

10dB/

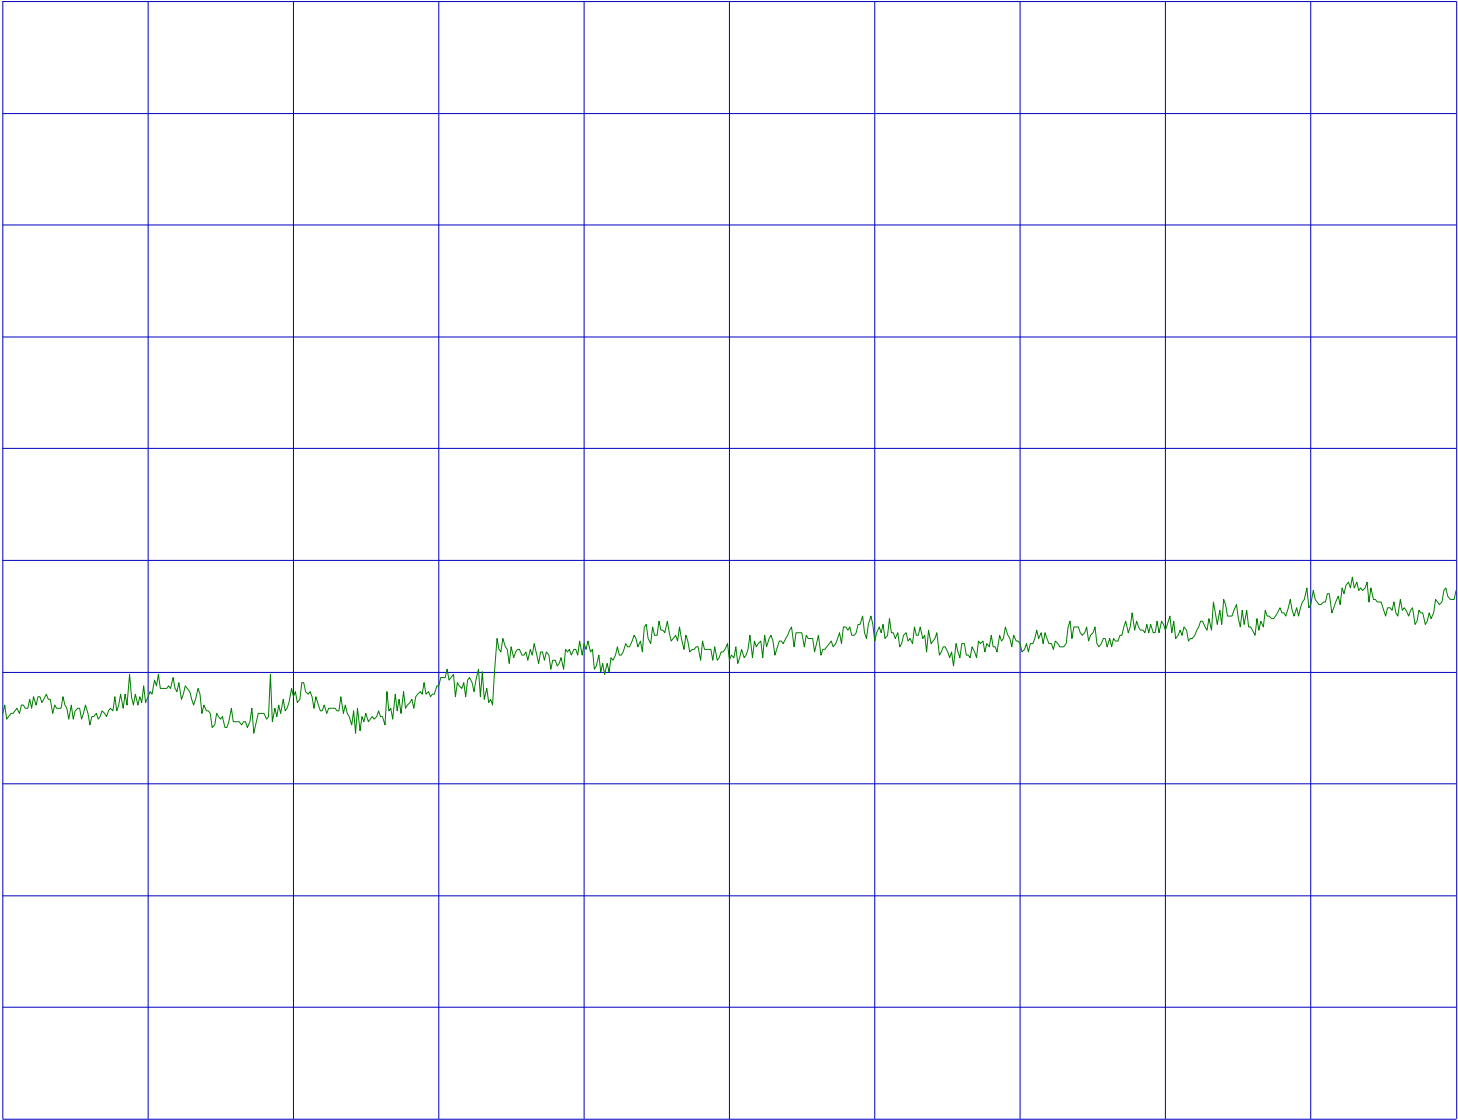


START 10.000000GHz
RBW 100kHz

VBW 100kHz

STOP 26.000000GHz
SWP 5s

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA29
15.247(c)OutOfBand/2437MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB

10dB/

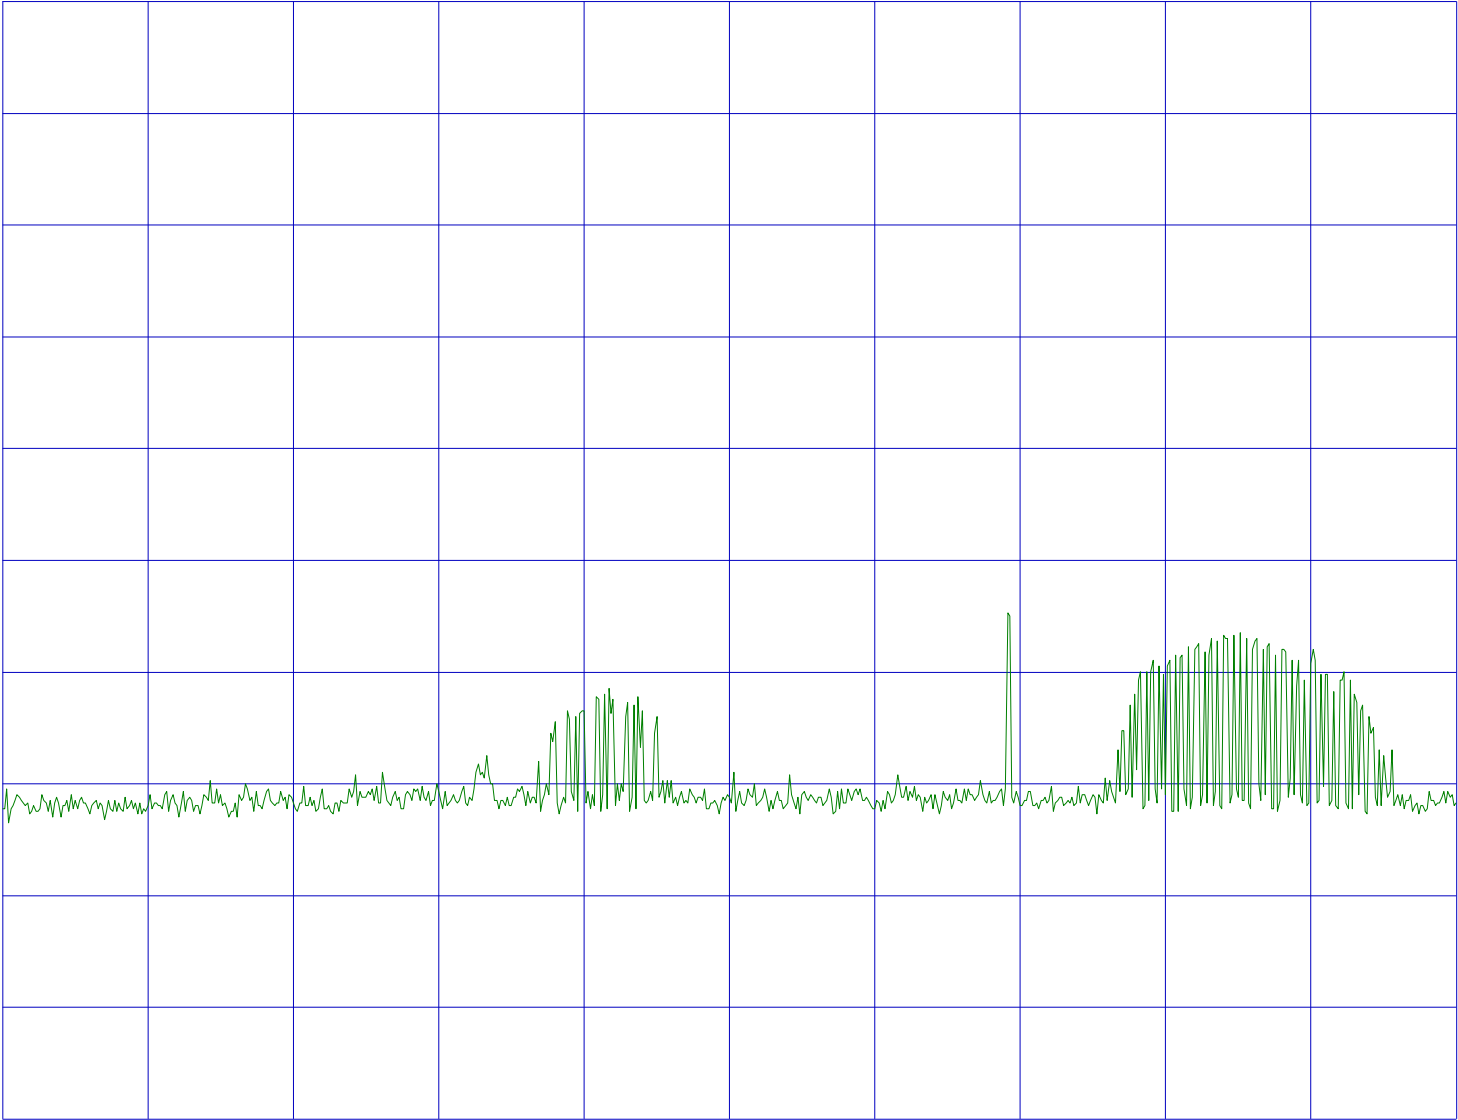

START 30.00MHz
RBW 100kHz


VBW 100kHz

STOP 1.000000GHz
SWP 500ms

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA30
15.247(c)OutOfBand/2437MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB


10dB/

START 1.000000GHz RBW 100kHz VBW 100kHz STOP 3.000000GHz SWP 1s

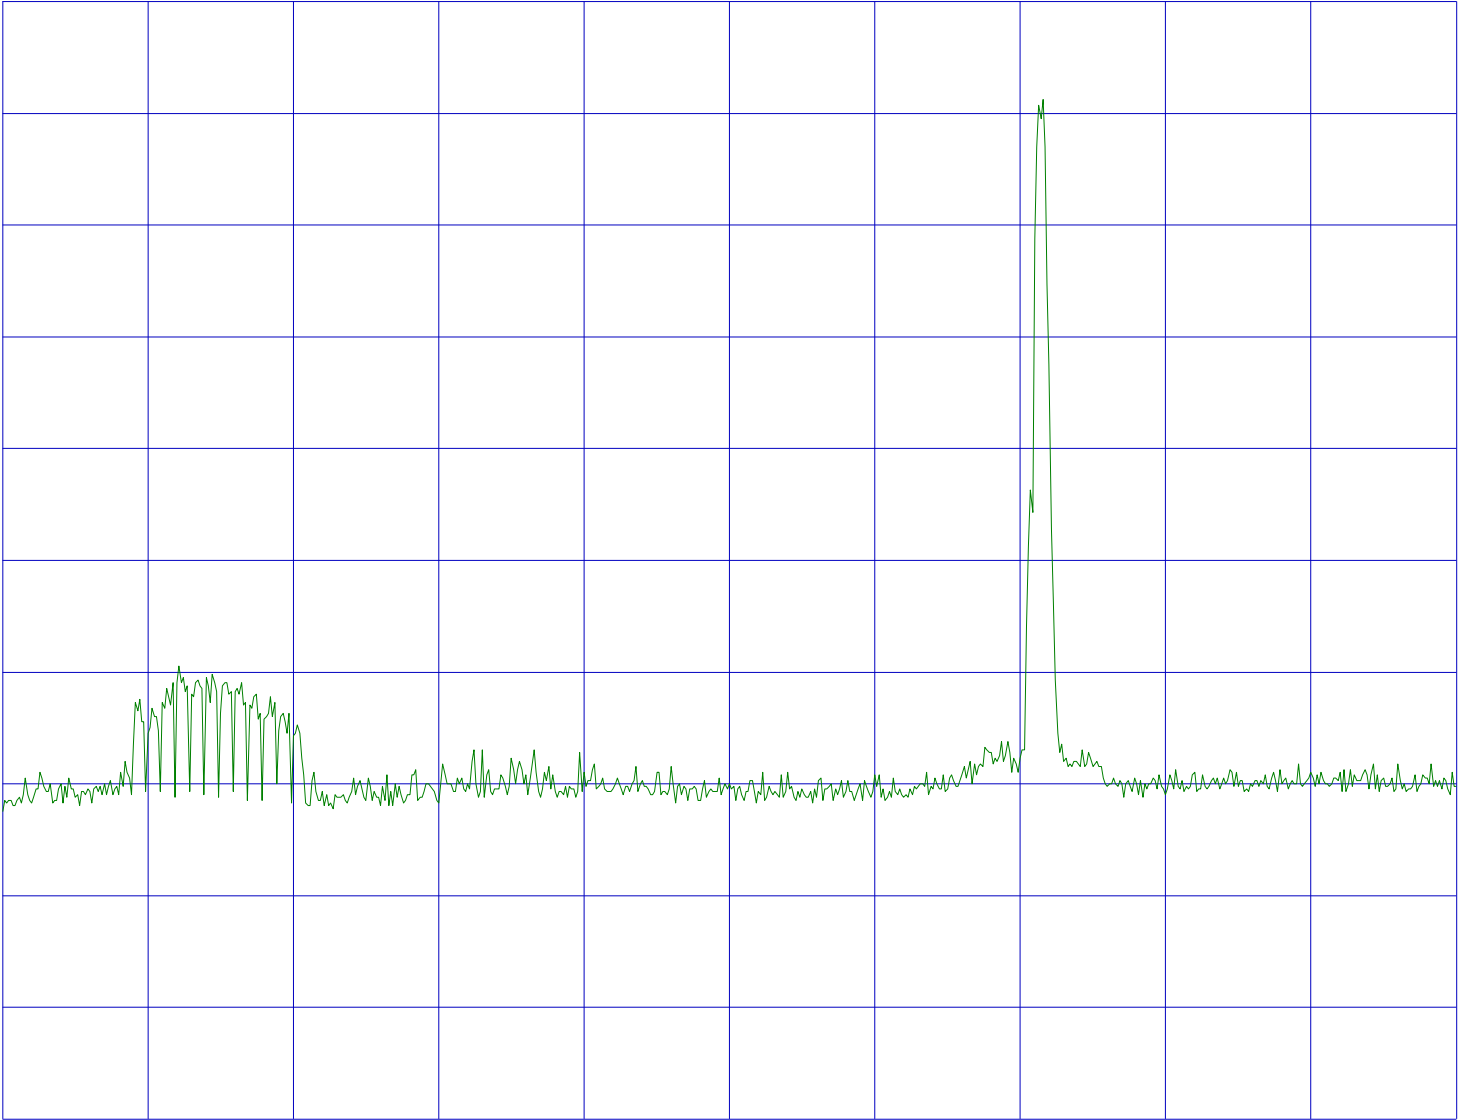

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA31
15.247(c)OutOfBand/2437MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB

10dB/

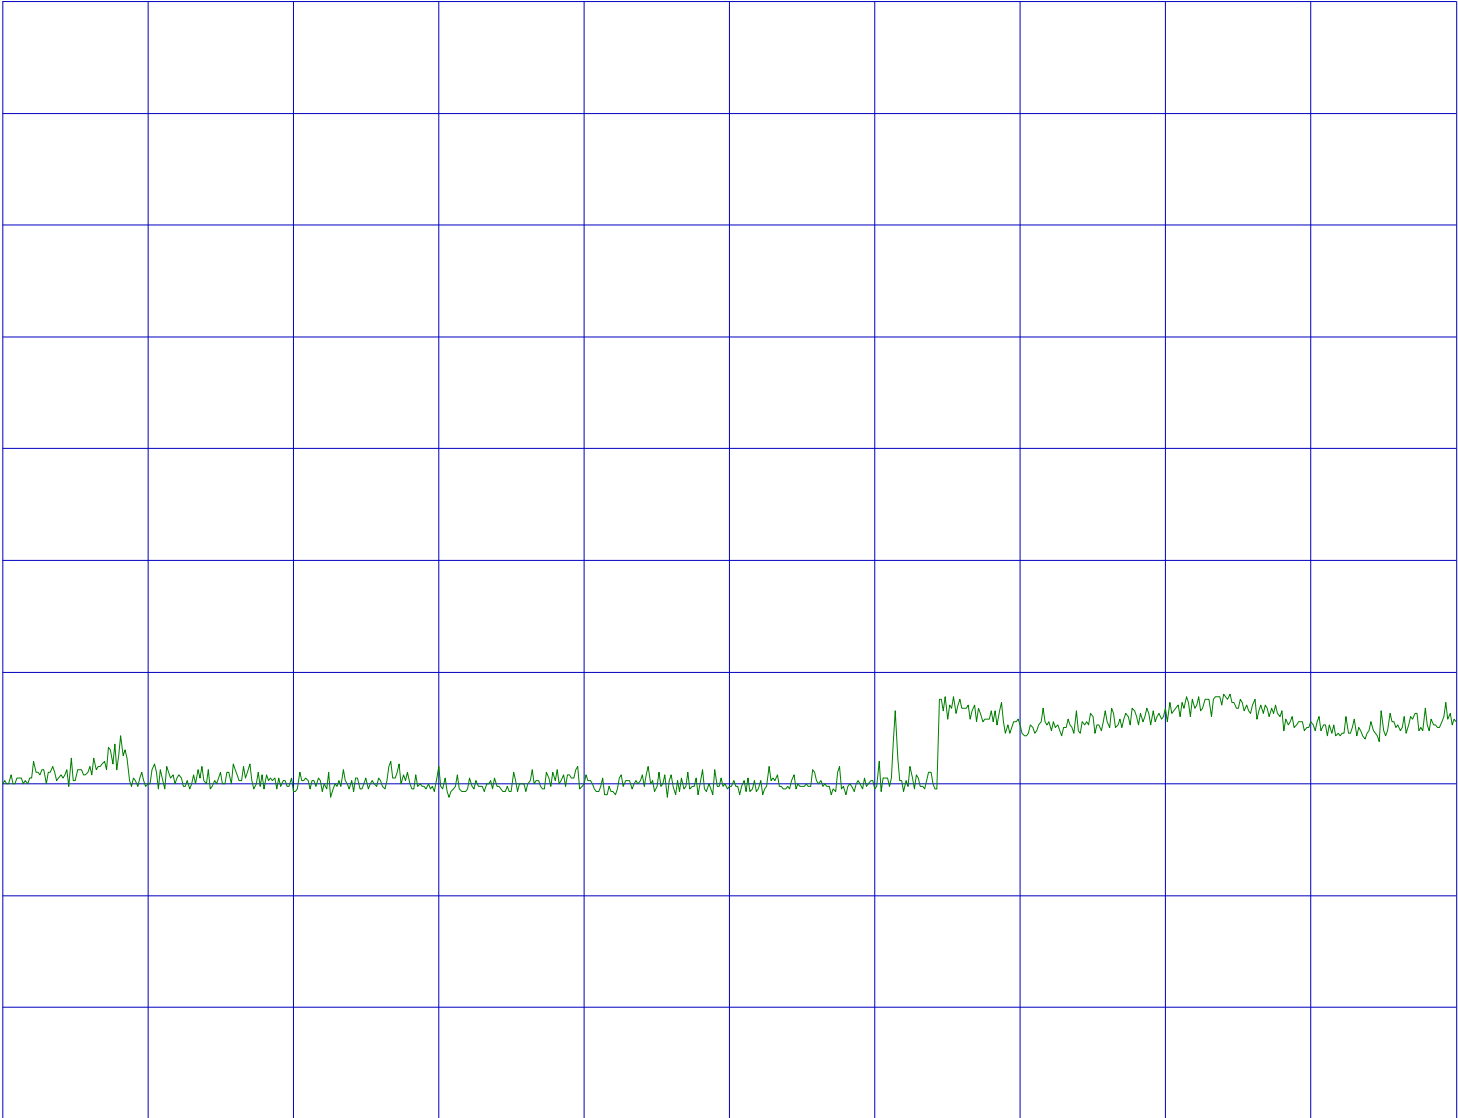


START 3.000000GHz
RBW 100kHz

VBW 100kHz

STOP 10.000000GHz
SWP 2s

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA32
15.247(c)OutOfBand/2437MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB

10dB/

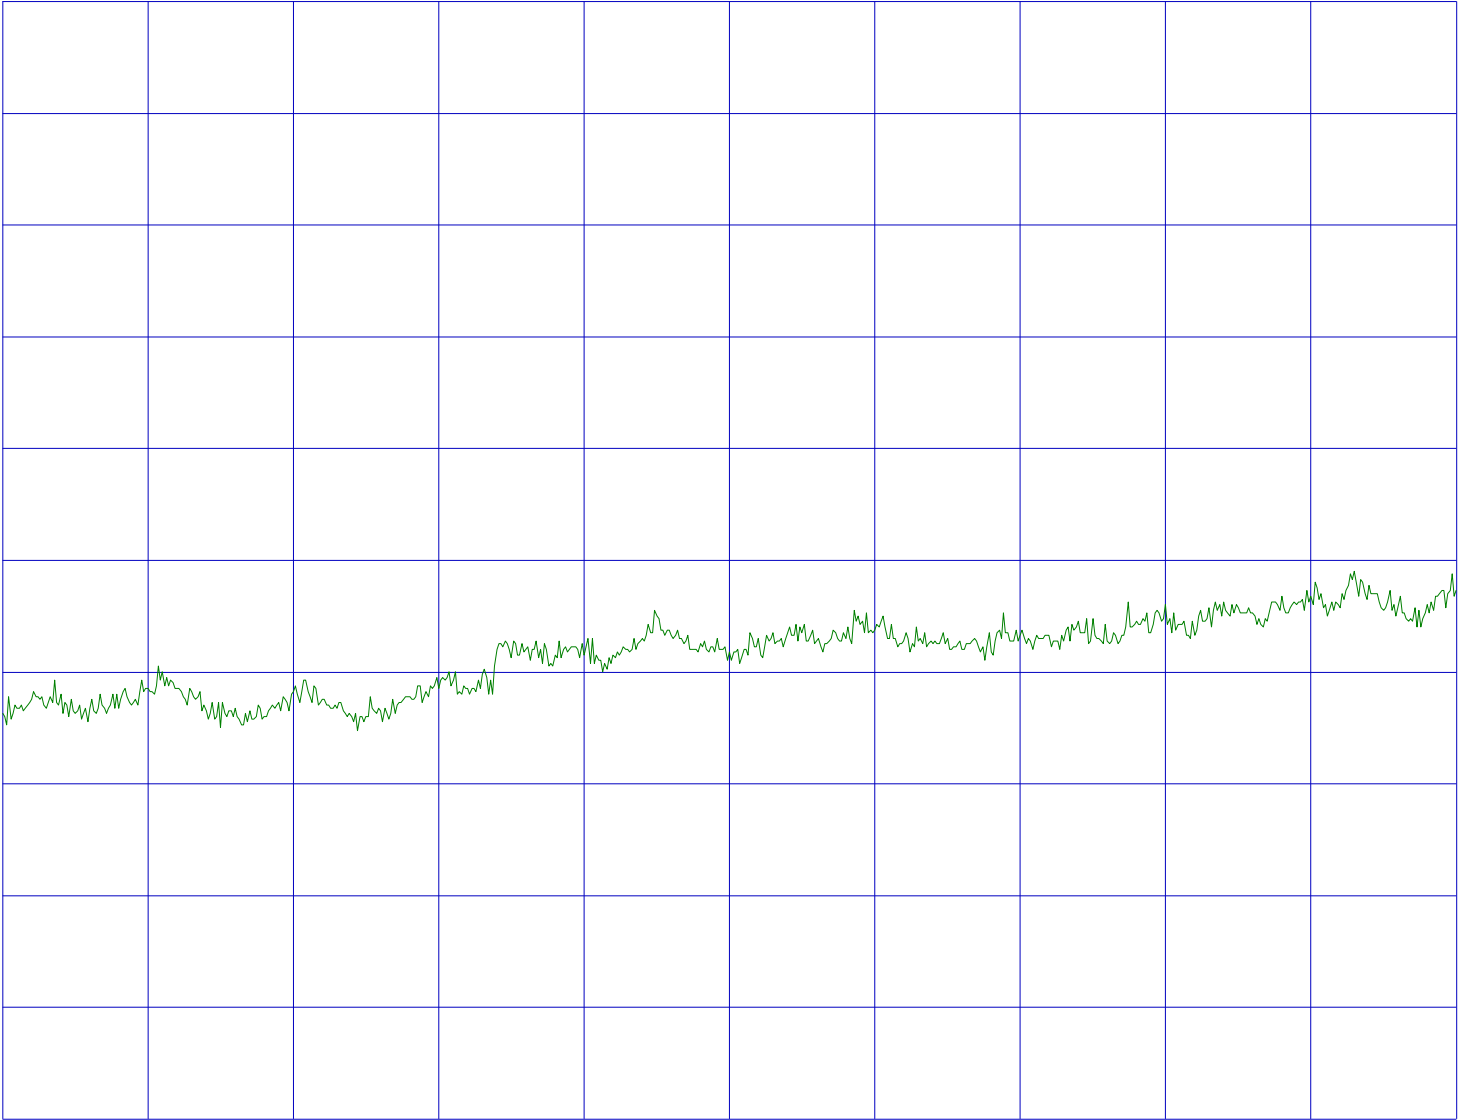

START 10.000000GHz
RBW 100kHz

VBW 100kHz

STOP 26.000000GHz
SWP 5s


Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA33
15.247(c)OutOfBand/2462MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB

10dB/

START 30.00MHz
RBW 100kHz

VBW 100kHz


STOP 1.000000GHz
SWP 500ms

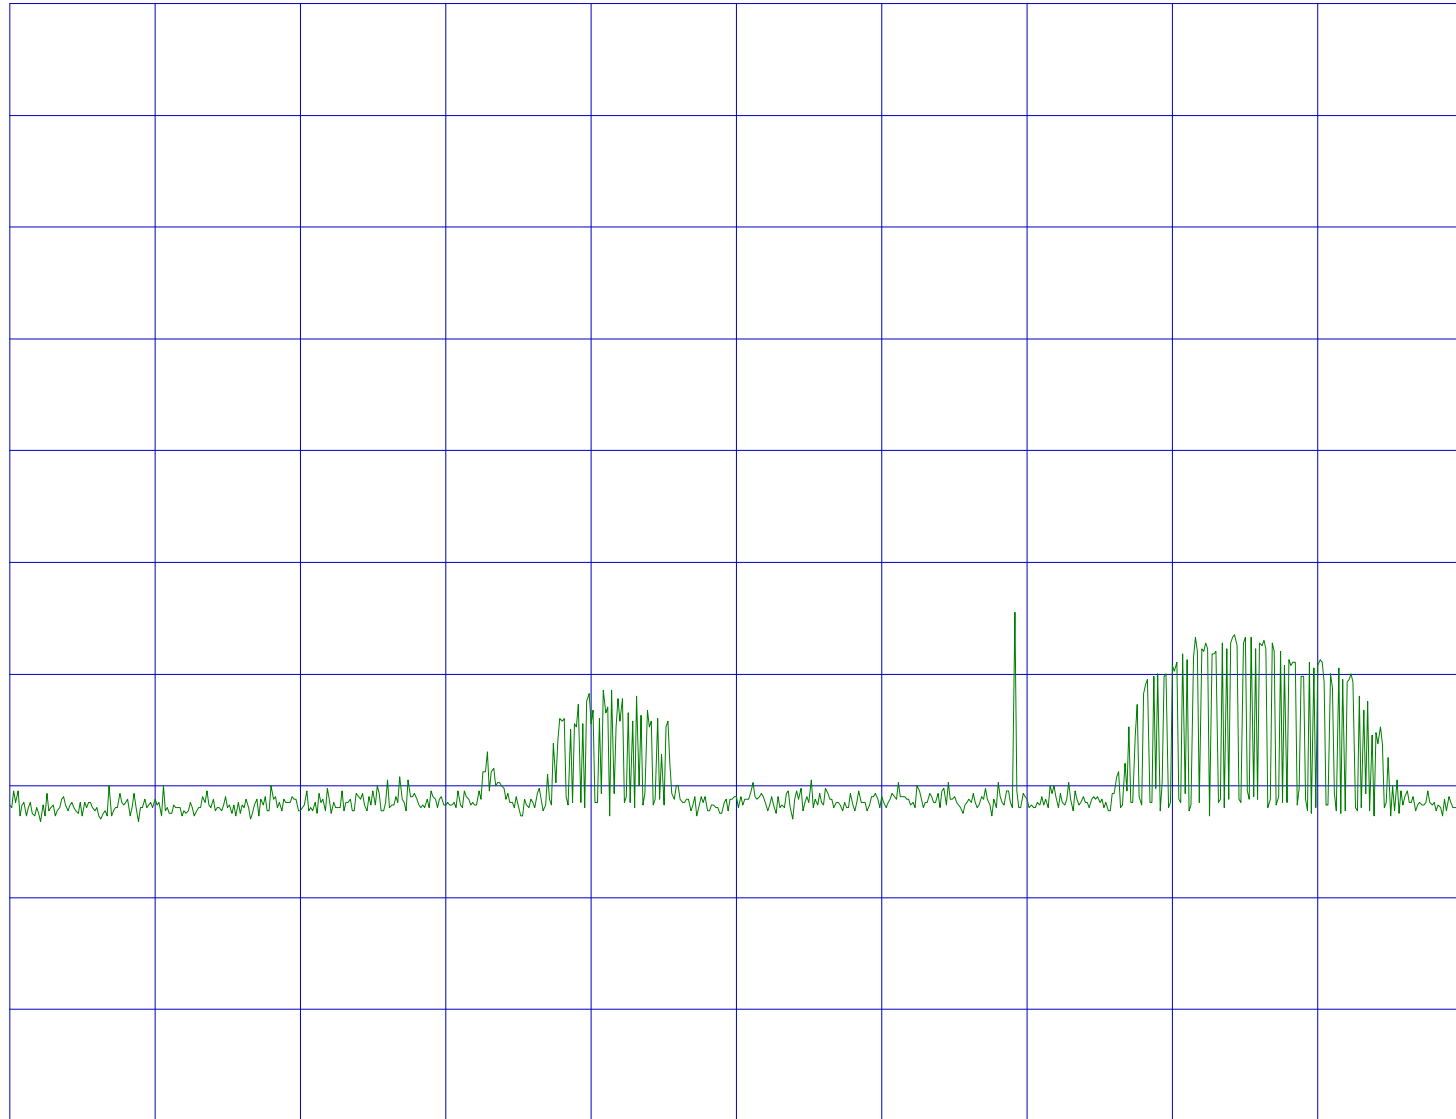

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA34
15.247(c)OutOfBand/2462MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB


10dB/

START 1.000000GHz RBW 100kHz VBW 100kHz STOP 3.000000GHz SWP 1s

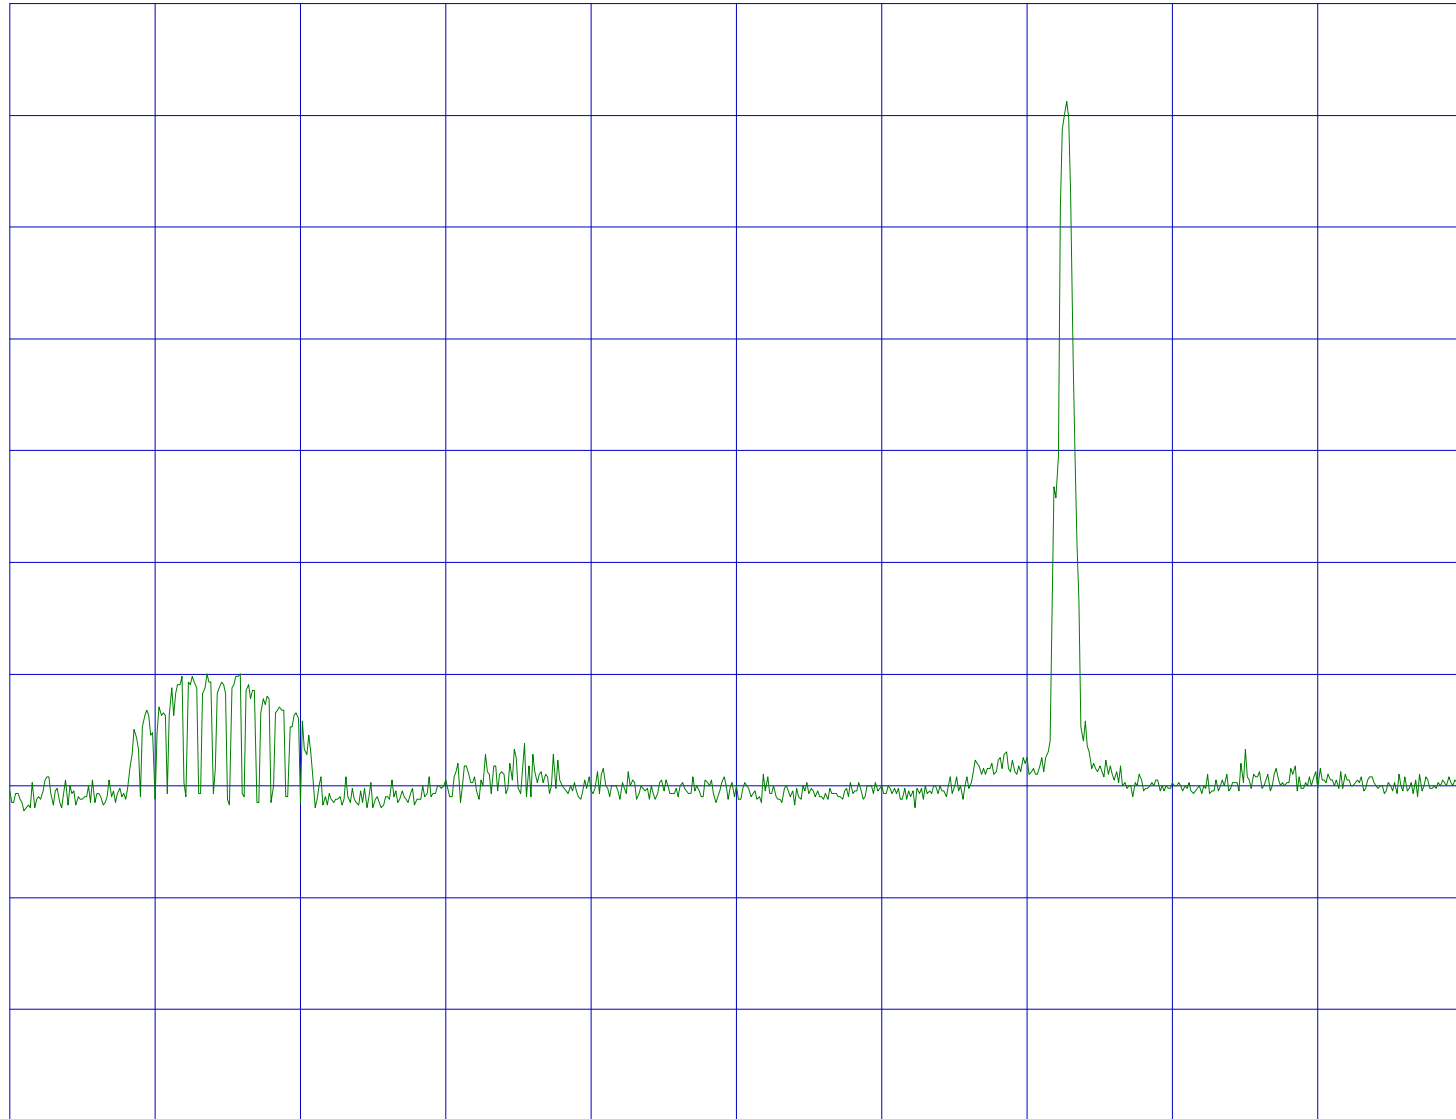

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA35
15.247(c)OutOfBand/2462MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB

10dB/

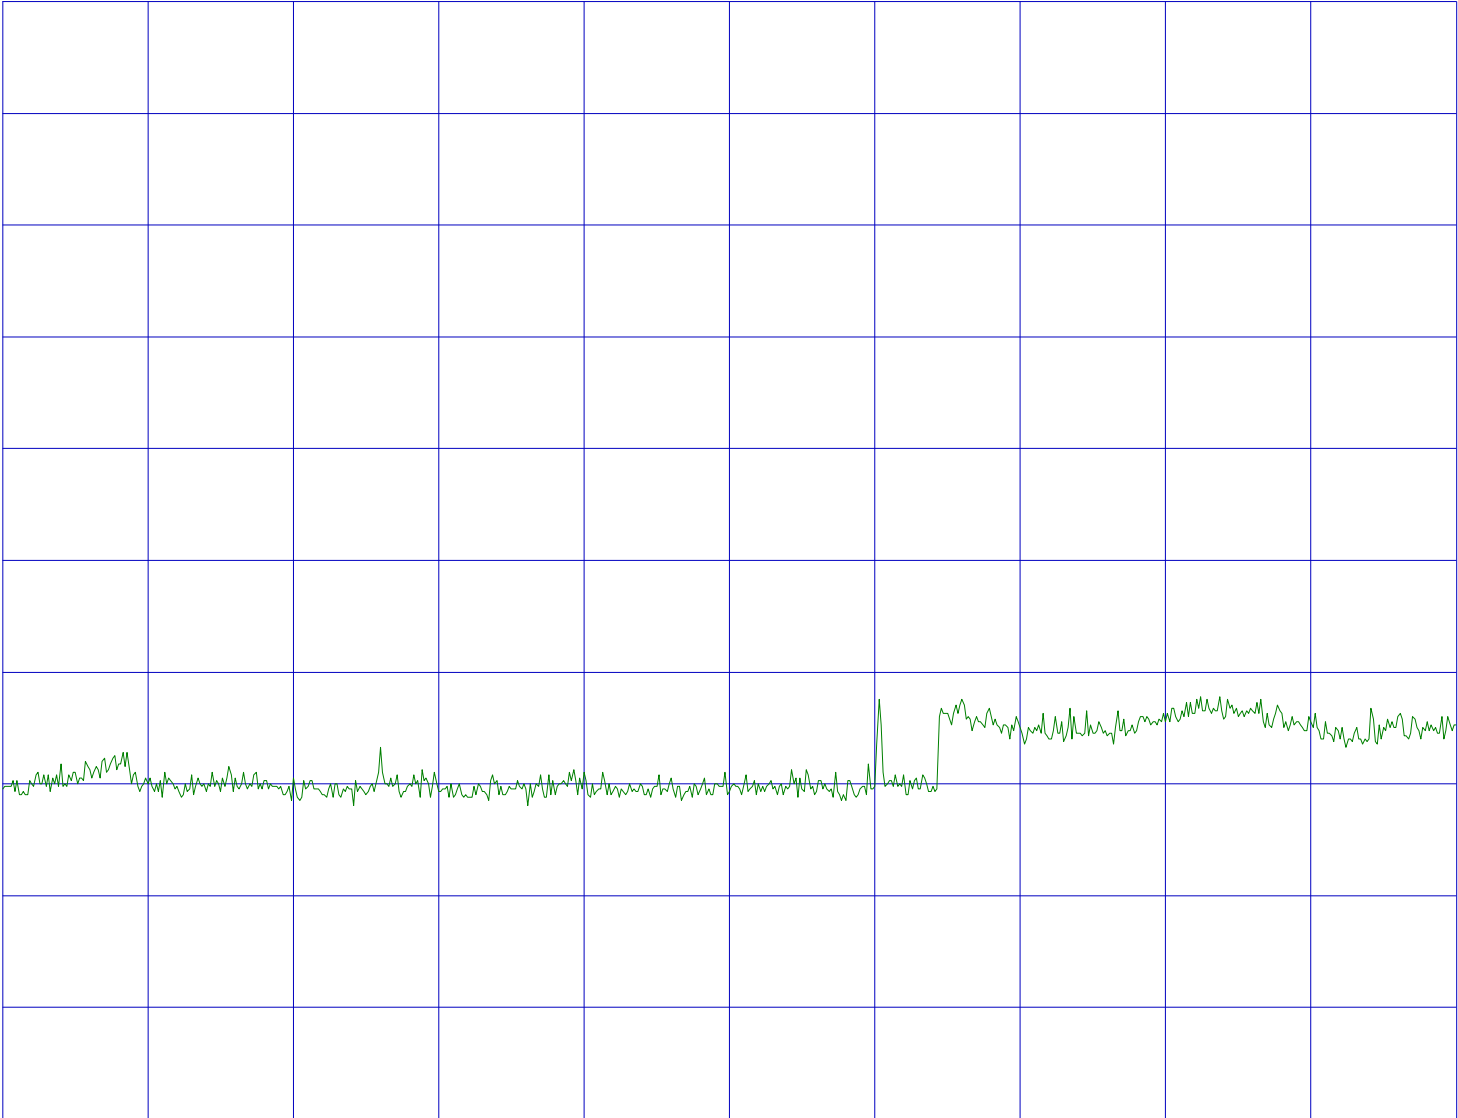


START 3.000000GHz
RBW 100kHz

VBW 100kHz

STOP 10.000000GHz
SWP 2s

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA36
15.247(c)OutOfBand/2462MHz/22DE0015-YW-1
REF 117 dBuV ATT 30 dB

10dB/

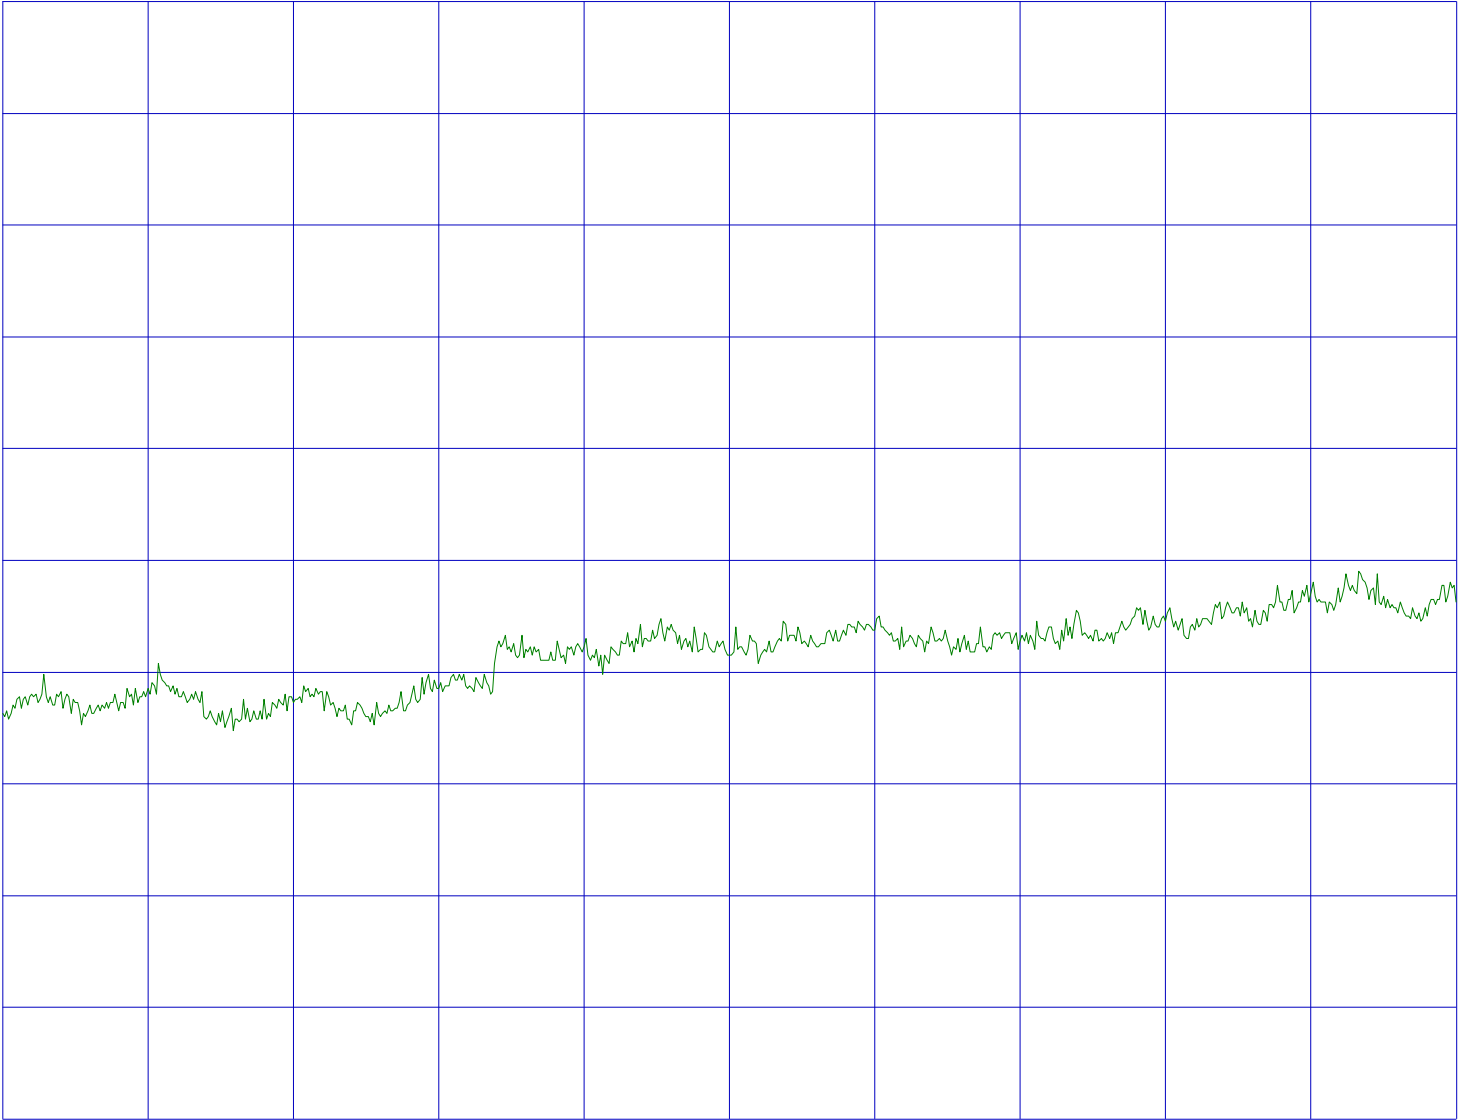

START 10.000000GHz
RBW 100kHz

VBW 100kHz

STOP 26.000000GHz
SWP 5s

Power Density(Conducted)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

COMPANY : Sony Corporation
EQUIPMENT : Notebook Computer
MODEL : PCG-441L
FCC ID : AK8PCG441L
POWER : AC120V/60Hz
Mode : Transmitting

REPORT NO : 22DE0015-YW-1
REGULATION : Fcc Part15 SubpartC.247(d)
DATE : 11/21/2001
Temp./Humi. : 22°C/46%

ENGINEER : Naoki Sakamoto

CH	FREQ [GHz]	S/A Reading [dBuV]	Cable Loss [dB]	ATTEN. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
Low	2.4106	108.6	0.5	0.0	2.1	8.0	5.9
Mid	2.4370	103.3	0.5	0.0	-3.3	8.0	11.3
High	2.4620	103.1	0.5	0.0	-3.4	8.0	11.4


Sample Calculation :

RESULT-Reading(-107:Converted to dBm) + CABLE LOSS + ATTEN.

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA38
15.247(d)PowerDensity/2412MHz/22DE0015-YW-1
REF 116 dBuV ATT 30 dB

MAKER
2.4106 GHz
108.63 dBuV

5dB/

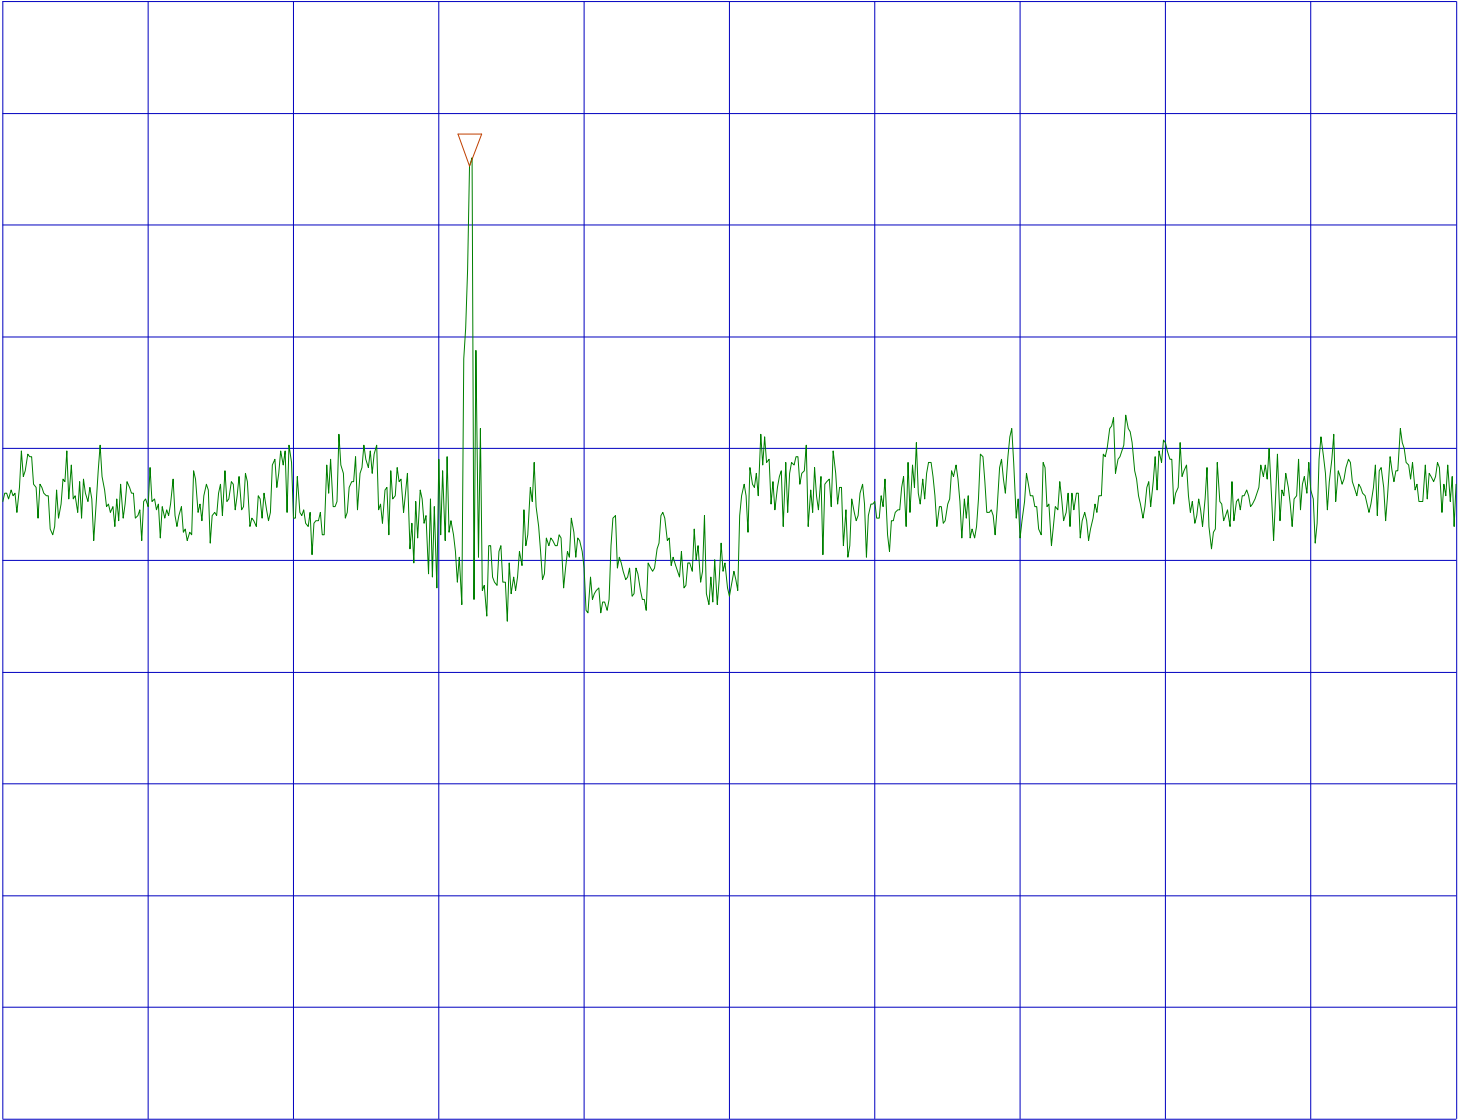

START 2.410314GHz
RBW 3kHz


VBW 10kHz

STOP 2.411314GHz
SWP 500s

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA39
15.247(d)PowerDensity/2437MHz/22DE0015-YW-1
REF 116 dBuV ATT 30 dB

MAKER
2.4370 GHz
103.25 dBuV

5dB/

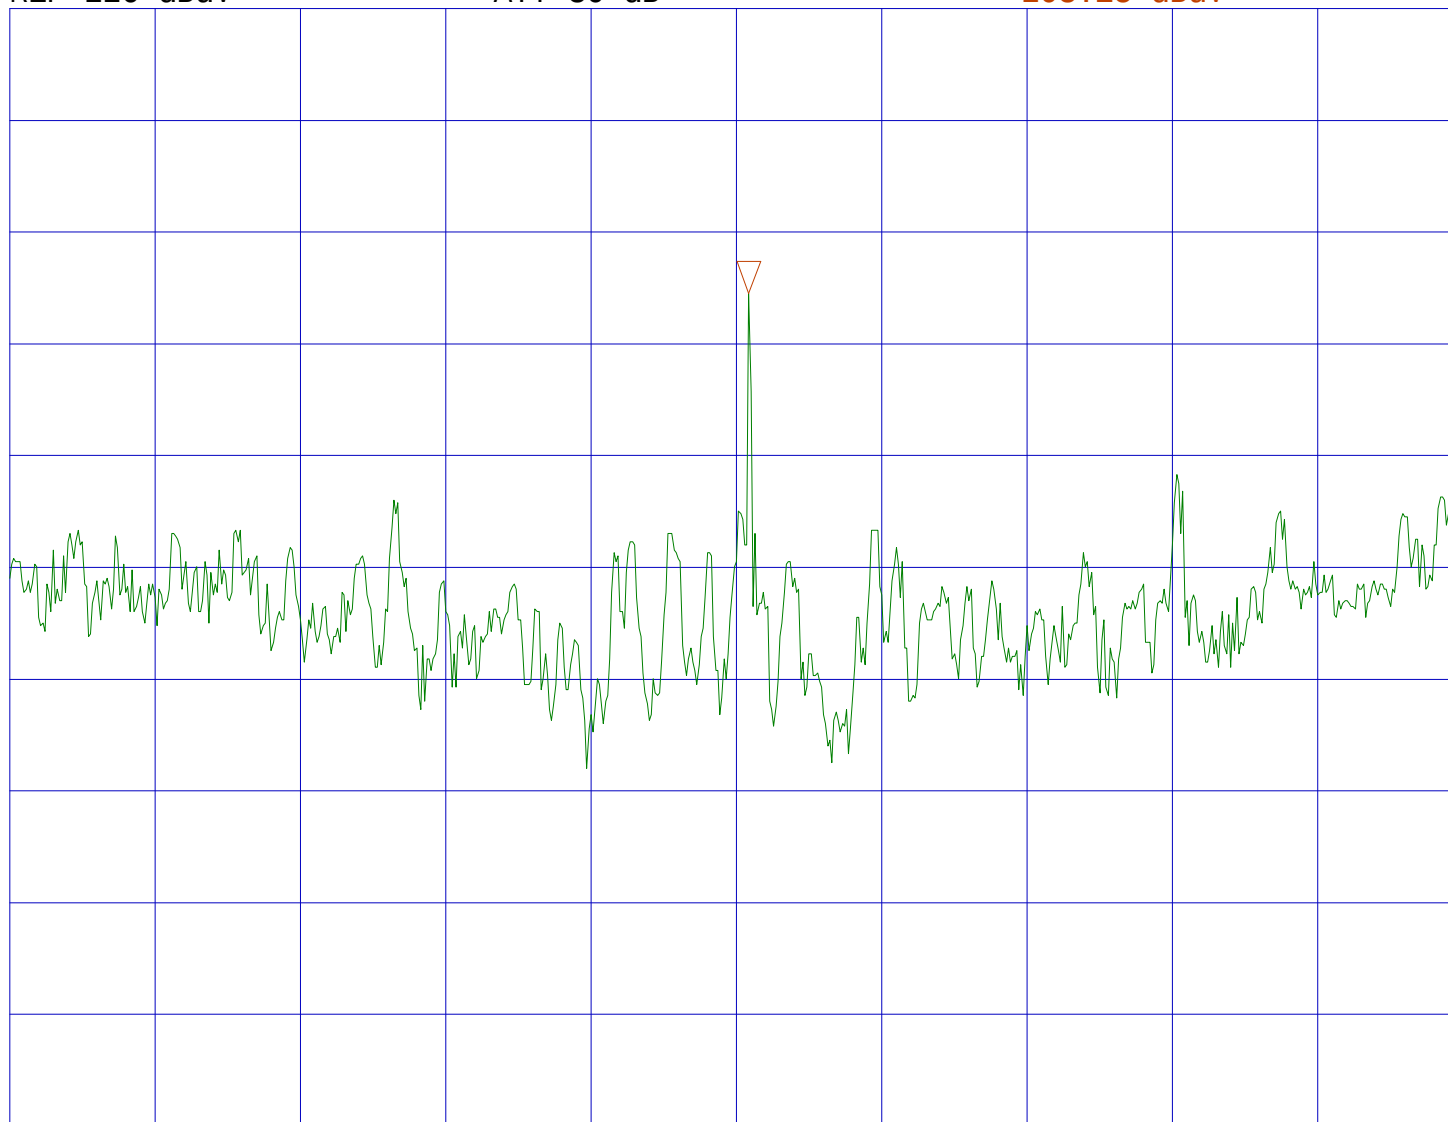

START 2.436500GHz
RBW 3kHz

VBW 10kHz

STOP 2.437500GHz
SWP 500s

Sony Corporaton/PCG-441L/FCC ID:AK8PCG441L/PageA40
15.247(d)PowerDensity/2462MHz/22DE0015-YW-1
REF 110 dBuV ATT 30 dB

MAKER
2.4620 GHz
103.13 dBuV

5dB/

START 2.461500GHz
RBW 3kHz

VBW 10kHz

STOP 2.462500GHz
SWP 500s

