



EMI TEST REPORT

Test Report No. : 23LE0006-HO-1

Applicant : Sony Corporation
Type of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Test standard : FCCPart15 Subpart C
Section15.207, Section 15.247
FCC ID : AK8PCG492L
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this report are traceable to the national or international standards.
5. This test report does not constitute an endorsement by NIST/NVLAP or U.S. Government.

Date of test : July 15,16,17,18,19,20,21,22,23 and 24, 2003

Tested by : 
Hiroka Umeyama
EMC Service

Approved by : 
Hironobu Shimoji
Group Leader of EMC Service

UL Apex Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

CONTENTS

	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures and results	5
SECTION 4: Operation of E.U.T. during testing	7
SECTION 5: Conducted emission, Section 15.207	8
SECTION 6: 6dB Bandwidth, Section 15.247 (a) (2)	8
SECTION 7: Maximum Peak Output power, Section 15.247 (b)(3)	9
SECTION 8: Out of Band Emission, Section 15.247 (c) And Restricted Band Edge, Section 15.247 (c) Spurious Emission, Section 15.247 (c)	9
SECTION 9: Power Density, Section 15.247 (d)	9
 <u>CONTENTS OF APPENDIXES</u>	 10
APPENDIX 1: Photographs of test setup	11
APPENDIX 2: Test instruments	12
APPENDIX 3: Data of EMI test	13

SECTION 1: Client information

Company name : Sony Corporation
Address : 6-7-35 Kita-Shinagawa, Shinagawa-ku, Tokyo, 141-0001 Japan
Telephone Number : +81-3-5795-8033
Facsimile Number : +81-3-5795-8346
Contact Person : Kaoru Ichimura

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25 (only for Radiated emission testing)
DVT26 (only for Conducted emission testing)
Rating : AC120V/60Hz
Country of Manufacture : Japan
Receipt Date of Sample : July 8, 2003
Condition of EUT : Engineering prototype

2.2 Product Description

Sony Corporation Model: PCG-492L referred to as the EUT in this report is a Notebook Personal Computer with IEEE 802.11b/g RF module (FCC ID: MCLT60H67702).

The specification is as following;

Equipment Type	:	Transceiver
Frequency operation	:	2412-2462MHz ISM band 1 st local frequency: 3168MHz 2 nd local frequency: 4464-4504MHz
Clock frequency used in EUT	:	1GHz, 100MHz, 66.6MHz, 65MHz, 48MHz, 44MHz, 33.33MHz, 27MHz, 25MHz, 24.576MHz, 14.318MHz, 12.288Hz, 10MHz
Type of modulation	:	OFDM, DQPSK, DBPSK and CCK
Transfer Rate	:	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
Bandwidth & Channel spacing & Channel number	:	2400MHz-2483.5MHz, 5MHz, 11
Emission Designation (ITU Code)	:	20M0D2D
Antenna Type	:	Lambda/ 4 Monopole antenna
Antenna Gain	:	Main Antenna : -2.8dBi , Sub Antenna : -2.6dBi
Antenna connector	:	CFL connector (Hirose)
Antenna Fixing Method	:	Internal
Transmit power	:	Max 16.5dBm (Average)
Power supply	:	DC3.1V- 3.46V
Operation temperature range	:	0 deg. C to 55 deg. C
Power & Signal Cable Length	:	≤3m
Mode of Operation	:	Half Duplex

*FCC Part 15.31 (e)

The host device PCG-492L provide the stable power supply (DC: 3.3V), and Notebook Personal Computer complies power supply regulation.

*FCC Part 15.203 Antenna requirement

The standard type of antenna connector is applied; however, the EUT complies this requirement since this radio equipment is for professional installation.

UL Apex Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 3: Test specification, procedures and results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted Emissions
Section 15.247 Operation within the Band 902-928MHz, 2400-2483.5MHz and
5725-5850MHz

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	Conducted emission	ANSI C63.4:2001	Section 15.207	-	N/A	12.5dB 0.1515MHz , L	Complied
2	6dB Bandwidth	ANSI C63.4:2001	Section 15.247(a)(2)	Conducted	N/A	-	Complied
3	Maximum Peak Output Power	ANSI C63.4:2001	Section 15.247(b)(3)	Conducted	N/A	9.8dB 2462MHz	Complied
4	Out of Band Emission	ANSI C63.4:2001	Section 15.247 (c)	Radiated	N/A	0.4dB 2400MHz Hor	Complied
5	Restricted Band Edges	ANSI C63.4:2001	Section 15.247 (c)	Radiated	N/A	0.6dB 2483.5MHz Hor	Complied
6	Power Density	ANSI C63.4:2001	Section 15.247 (d)	Conducted	N/A	13.3dB 2412.3MHz	Complied

Note: UL Apex's EMI Work Procedures No.QPM05

3.3 Additions to Standards

No addition, deviation or exclusion has been made from standards.

3.4 Confirmation

UL Apex Co., Ltd. hereby confirms that E.U.T., in the configuration tested, complies with the specifications FCC Part 15 Subpart C Section 15.207 and 247.

3.5 Uncertainty

Conducted Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was ± 1.3 dB.

The data listed in this test report has enough margin, more than the site margin.

Out of Band Emission and Restricted Band Edges(Radiated) Test

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.5 dB.

The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 5.2 dB.

The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 6.6 dB.

The data listed in this test report may exceed the test limit because it does not have enough margin.

6dB Bandwidth , Maximum Peak Output power, Out of Band Emission and Power Density (Conducted) Test

The measurement uncertainty (with a 95% confidence level) for this test was ± 3.0 dB.

The data listed in this test report has enough margin.

3.6 Test Location

UL Apex Co., Ltd. EMC Head Office Division.

No.1and No.2 semi anechoic chamber and No.3 measurement room

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116 Facsimile: +81 596 24 8124

No.1 semi anechoic chamber has been fully described in a report submitted to FCC office, and listed on February 01, 2002. (Registration number: No.1 :313583, Industry Canada: No.1 : IC-4247)

No.2 semi anechoic chamber has been fully described in a report submitted to FCC office, and listed on June 05, 2002. (Registration number: No.2: 846015 Industry Canada: No.2: IC-4247-2)

*NVLAP Lab. code: 200572-0

3.7 Test set up, Data of EMI and Test instruments

Refer to APPENDIX 1 to 3.

UL Apex Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The system was configured in typical fashion (as a customer would normally use it) for testing.

Test mode : Transmitting (IEEE 802.11b) Burst Frame mode DSSS, CCK, 11Mbps
Low channel : 2412MHz
Middle channel : 2437MHz
High channel : 2462MHz

Test mode : Transmitting (IEEE 802.11g) Burst Frame mode OFDM, 64QAM, 54Mbps
Low channel : 2412MHz
Middle channel : 2437MHz
High channel : 2462MHz

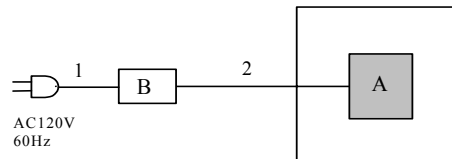
The EUT was tested in all three orthogonal planes in order to determine worst case emissions. Channels at 2412MHz, 2437MHz and 2462MHz were tested and investigated from 30MHz to 26GHz Data for all three channels are

presented in this report.

The EUT has an ability to provide some different modulation and data rates. Some of these modulation and data rates did not change in the spectrum envelopes of the EUT at conducted Measurement with the antenna terminal.

Therefore, the results of the final measurements were the IEEE 802.11b DSSS, CCK, 11Mbps and IEEE 802.11g OFDM, 64QAM, 54Mbps modulation as the highest data rate.

4.2 Configuration and peripherals



* Cabling was taken into consideration and test data was taken under worst case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID	Remark
A	Notebook Personal Computer	PCG-492L	DVT25 (only for Radiated emission testing) DVT26 (only for Conducted emission testing)	Sony Corporation	AK8PCG492L	EUT
B	AC Adaptor	PCGA-16V 6	0266064 (with DVT25) 0266067 (with DVT26)	Sony Corporation	-	-

List of cables used

No.	Name	Length (m)	Shield	Backshell Material
1	AC cable	0.8	N	Polyvinyl chloride
2	DC cable	2.0	N	Polyvinyl chloride

UL Apex Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 5: Conducted Emission

Test Procedure

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. I/O cables and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the input power source. All unused 50ohm connectors of the LISN were resistively terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT on a reference ground plane 4.0 x 4.0m in a No.2 semi anechoic chamber (7.5 x 5.8 x 5.2m).

The EUT was connected to a Line Impedance Stabilization Network (LISN).

An overview sweep with peak detection has been performed.

The measurements have been performed with a CISPR quasi-peak detector (IF BW 9kHz).

Measurement range:0.15-30MHz

Test data : APPENDIX 3
Test result : Pass
Test instruments : MTR-02, SA-07, MCC-13, MLS-06

SECTION 6: 6dB Bandwidth, Section 15.247(a)(2)

Test Procedure

The minimum 6dB bandwidth was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass
Test instruments : MBTR10, MCC-04

SECTION 7: Maximum Peak Output Power, Section 15.247(b)(3)

[Conducted]

Test Procedure

The Maximum Peak Output Power was measured with a power meter and a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass
Test instruments : MBTR10, MCC-04, MPM-01, MPSE-03, MAT-20

SECTION 8: Out of Band Emission ,Restricted Band Edge and Spurious Emission, Section 15.247 (c)

[Conducted]

Test Procedure

The Maximum Peak Output Power was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass
Test instruments : MBTR10, MCC-04

[Radiated]

Test Procedure

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The Radiated Electric Field Strength intensity has been measured in No.1 semi anechoic chamber (19.2 x 11.2 x 7.7m) with a ground plane and at a distance of 3m.

The measuring antenna height was varied between 1 to 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

The maximum output power of EUT was confirmed as the worst case condition in the photo of APPENDIX 1.

Test data : APPENDIX 3
Test result : Pass
Test instruments : MTR-01, MCC-01/05/06, MHA-01/05, MPA-01/04, MBA-01, MLA-01, MAT-06, MBF-01/02/03

SECTION 9: Power Density, Section 15.247(d)

Test Procedure

The Power density was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass
Test instruments : MBTR10, MCC-04

UL Apex Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

CONTENTS OF APPENDIXES

APPENDIX 1: Photographs of test setup

Page 11 : Conducted Emission

Page 12 : Spurious emission

APPENDIX 2: Test instruments

Page 13 : Test instruments

APPENDIX 3: Data of EMI test

Page 14-29 : Conducted Emission

Page 30-34 : 6dB Bandwidth

Page 35-38 : Maximum Peak Output power (Conducted)

Page 39-74 : Spurious emission (Radiated)

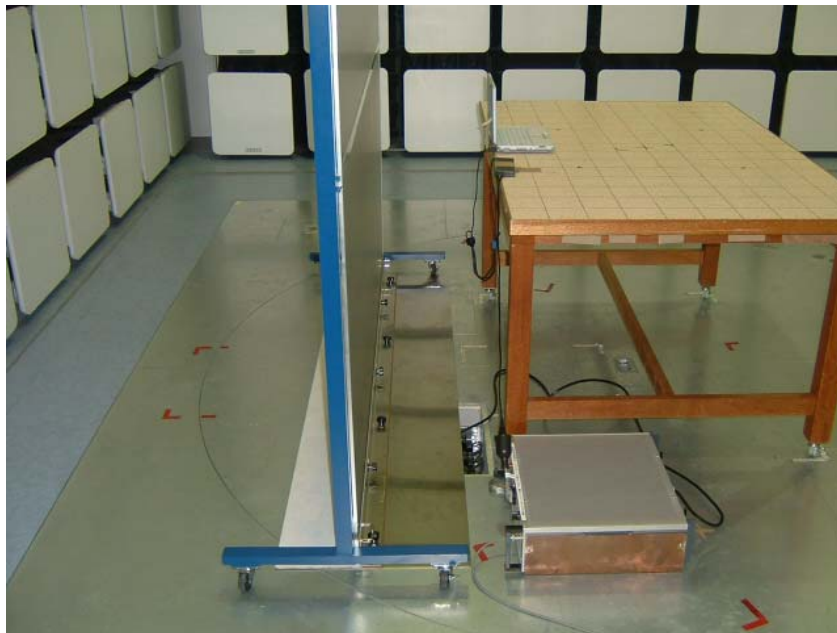
Page 75-86 : Spurious emission (Conducted)

Page 87-88 : Restricted Band Edge

Page 89-93 : Power Density

Page 94-98 : 99% occupied bandwidth

APPENDIX 1: Photographs of test setup
Conducted Emission



Spurious Emission (Radiated)



APPENDIX 2: Test instruments**APPENDIX 3****Test Instruments****EMI test equipment**

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
MAEC-01	Anechoic Chamber	TDK	Semi Anechoic Chamber 10m	RE	2002/12/28 * 12
MAEC-02	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	CE	2003/04/11 * 12
MTR-01	Test Receiver	Rohde & Schwarz	ES140	RE	2002/11/01 * 12
MTR-02	Test Receiver	Rohde & Schwarz	ESCS30	CE	2003/01/31 * 12
SA-07	Spectrum Analyzer	Advantest	R3273	CE	2002/12/10 * 12
MBTR10	Spectrum Analyzer	Rohde & Schwarz	FSP30	RE	2002/11/13 * 12
MBA-01	Biconical Antenna	Schwarzbeck	BBA9106	RE	2002/10/16 * 12
MLA-01	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2002/10/16 * 12
MHA-01	Horn Antenna	EMCO	3160-09	RE	2003/01/11 * 12
MHA-05	Horn Antenna	Schwarzbeck	BBHA9120D	RE	2003/01/11 * 12
MCC-01	Coaxial Cable	Suhner/storm/Agilent/TS J	-	RE	2002/12/19 * 12
MCC-04	Microwave Cable	Storm	421-011	RE	2003/01/14 * 12
MCC-05	Microwave Cable	Storm	421-011	RE	2003/01/14 * 12
MCC-06	Microwave Cable	Storm	421-011	RE	2003/01/14 * 12
MCC-11	Microwave coaxial cable	Suhner	SUCOFLEX 104	RE	2003/03/27 * 12
MPA-01	Pre Amplifier	Agilent	8449B	RE	2003/02/08 * 12
MPA-04	Pre Amplifier	Agilent	8447D	RE	2003/03/13 * 12
MAT-06	Attenuator(6dB)	Weinschel Corp	2	RE	2002/12/24 * 12
MAT-20	Attenuator	HIROSE ELECTRIC CO.,LTD.	AT-110	RE	2003/02/04 * 12
MAT-23	Attenuator	Orient Microwave	BX10-0476-00	RE	2003/03/31 * 12
MBF-01	SHF Bandpass Filter	M-City	5GHz BPF	RE	2003/04/24 * 12
MBF-02	SHF Bandpass Filter	M-City	8GHz BPF	RE	2003/04/24 * 12
MBF-03	SHF Bandpass Filter	M-City	13GHz BPF	RE	2003/04/24 * 12
MLS-06	LISN(AMN)	Schwarzbeck	NSLK8127	CE	2003/03/18 * 12
MPM-01	Power Meter	Agilent	E4417A	RE	2002/11/08 * 12
MPSE-03	Power sensor	Agilent	E9327A	RE	2003/04/14 * 12
MCC-13	Coaxial Cable	Fujikura/Agilent	-	CE	2003/05/08 * 12

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item:

CE: Conducted emission,

RE: Radiated emission,

UL Apex Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

DATA OF CONDUCTION TEST

UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-HO

Applicant : Sony Corp.
 Kind of Equipment : Notebook Personal Computer
 Model No. : PCG-492L
 Serial No. : DVT25
 Power : AC120V/60Hz
 Mode : Main-Antenna, CCK, QPSK, 11Mbps
 Remarks : Tx (CH6: 2437MHz)
 Date : 7/19/2003
 Phase : Single Phase
 Temperature : 24 °C
 Humidity : 64 %
 Regulation : FCC Part15C § 15.207 (0.15-30MHz)


 Engineer : Hiroka Umeyama

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]				QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]
1.	0.1520	50.1	25.1	48.2	20.5	0.0	0.1	0.0	50.2	25.2	65.9	55.9	15.7	30.7
2.	0.2731	46.1	35.1	45.9	35.7	0.0	0.1	0.0	46.2	35.8	61.0	51.0	14.8	15.2
3.	0.4110	37.7	26.5	36.9	27.4	0.1	0.1	0.0	37.9	27.6	57.6	47.6	19.7	20.0
4.	4.7530	37.3	17.5	36.3	16.5	0.2	0.5	0.0	38.0	18.2	56.0	46.0	18.0	27.8
5.	6.3040	36.3	17.2	37.4	19.1	0.2	0.6	0.0	38.2	19.9	60.0	50.0	21.8	30.1
6.	17.7500	30.0	23.1	32.0	24.9	0.7	1.1	0.0	33.8	26.7	60.0	50.0	26.2	23.3

CALCULATION: READING[dBμV] + LISN FACTOR[dB] + CABLE LOSS[dB] + ATTEN[dB].

All other emission were at least 20dB below the specification limit.

UL Apex Co., Ltd.**EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)


DATA OF CONDUCTION TEST

UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
 Kind of Equipment : Notebook Personal Computer
 Model No. : PCG-492L
 Serial No. : DVT25
 Power : AC120V/60Hz
 Mode : Sub-Antenna, CCK, QPSK, 11Mbps
 Remarks : Tx (CH6: 2437MHz)
 Date : 7/19/2003
 Phase : Single Phase
 Temperature : 26 °C
 Humidity : 61 %
 Regulation : FCC Part15C § 15.207 (0.15-30MHz)


 Engineer : Hiroka Umeyama

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP	AV	QP	AV				QP	AV	QP	AV	QP	AV
		[dBuV]		[dBuV]					[dBuV]		[dBuV]		[dB]	
1.	0.1500	48.9	23.8	48.3	22.6	0.0	0.1	0.0	49.0	23.9	66.0	56.0	17.0	32.1
2.	0.2730	45.4	34.4	45.4	35.3	0.0	0.1	0.0	45.5	35.4	61.0	51.0	15.5	15.6
3.	0.4095	37.1	26.2	36.3	27.0	0.1	0.1	0.0	37.3	27.2	57.7	47.7	20.4	20.5
4.	4.5300	36.9	17.5	37.8	18.3	0.2	0.5	0.0	38.5	19.0	56.0	46.0	17.5	27.0
5.	5.8961	34.3	14.5	36.2	18.6	0.2	0.6	0.0	37.0	19.4	60.0	50.0	23.0	30.6
6.	17.3710	30.8	23.7	32.8	25.7	0.7	1.1	0.0	34.6	27.5	60.0	50.0	25.4	22.5

CALCULATION: READING[dBμV] + LISN FACTOR[dB] + CABLE LOSS[dB] + ATTEN[dB].

All other emission were at least 20dB below the specification limit.

UL Apex Co., Ltd.**EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

DATA OF CONDUCTION TEST

UL Apex Co., Ltd. Head Office EMC Lab.
 No.2 Semi Anechoic Chamber
 Report No. : 23LE0006-HO

Applicant : Sony Corp.
 Kind of Equipment : Notebook Personal Computer
 Model No. : PCG-492L
 Serial No. : DVT25
 Power : AC120V/60Hz
 Mode : Main-Antenna, OFDM, 64QAM, 54Mbps
 Remarks : Tx (CH6:2437MHz)
 Date : 7/19/2003
 Phase : Single Phase
 Temperature : 25 °C
 Humidity : 68 %
 Regulation : FCC Part15C § 15.207 (0.15-30MHz)


 Engineer : Hiroka Umeyama

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP	AV	QP	AV				QP	AV	QP	AV	QP	AV
		[dBuV]		[dBuV]					[dBuV]		[dBuV]		[dB]	
1.	0.1515	53.0	32.0	53.3	33.0	0.0	0.1	0.0	53.4	33.1	65.9	55.9	12.5	22.8
2.	0.2737	46.0	33.6	46.0	34.9	0.0	0.1	0.0	46.1	35.0	61.0	51.0	14.9	16.0
3.	0.4079	37.6	25.8	37.0	26.9	0.1	0.1	0.0	37.8	27.1	57.7	47.7	19.9	20.6
4.	4.4860	37.3	19.7	38.0	20.1	0.2	0.5	0.0	38.7	20.8	56.0	46.0	17.3	25.2
5.	6.1150	36.3	19.0	36.8	21.7	0.2	0.6	0.0	37.6	22.5	60.0	50.0	22.4	27.5
6.	17.8030	30.1	23.7	32.0	25.5	0.7	1.1	0.0	33.8	27.3	60.0	50.0	26.2	22.7

CALCULATION: READING[dBμV] + LISN FACTOR[dB] + CABLE LOSS[dB] + ATTEN[dB].

All other emission were at least 20dB below the specification limit.

UL Apex Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116


Facsimile : +81 596 24 8124

MF060b(10.04.03)

DATA OF CONDUCTION TEST

UL Apex Co., Ltd. Head Office EMC Lab.
 No.2 Semi Anechoic Chamber
 Report No. : 23LE0006-HO

Applicant : Sony Corp.
 Kind of Equipment : Notebook Personal Computer
 Model No. : PCG-492L
 Serial No. : DVT25
 Power : AC120V/60Hz
 Mode : Sub-Antenna, OFDM, 64QAM, 54Mbps
 Remarks : Tx (CH6:2437MHz)
 Date : 7/19/2003
 Phase : Single Phase
 Temperature : 26 °C
 Humidity : 61 %
 Regulation : FCC Part15C § 15.207 (0.15-30MHz)


 Engineer : Hiroka Umeyama

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP	AV	QP	AV				QP	AV	QP	AV	QP	AV
		[dBuV]		[dBuV]					[dBuV]		[dBuV]		[dB]	
1.	0.1510	52.6	31.6	52.7	31.8	0.0	0.1	0.0	52.8	31.9	65.9	55.9	13.1	24.0
2.	0.2720	46.1	34.6	45.8	36.1	0.0	0.1	0.0	46.2	36.2	61.1	51.1	14.9	14.9
3.	0.4078	37.8	26.9	37.2	27.7	0.1	0.1	0.0	38.0	27.9	57.7	47.7	19.7	19.8
4.	4.4955	39.8	21.3	40.4	21.9	0.2	0.5	0.0	41.1	22.6	56.0	46.0	14.9	23.4
5.	6.2580	38.6	21.7	40.0	23.6	0.2	0.6	0.0	40.8	24.4	60.0	50.0	19.2	25.6
6.	17.3205	31.6	25.3	32.8	26.4	0.7	1.1	0.0	34.6	28.2	60.0	50.0	25.4	21.8

CALCULATION: READING[dB μ V] + LISN FACTOR[dB] + CABLE LOSS[dB] + ATTEN[dB].

All other emission were at least 20dB below the specification limit.

UL Apex Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

DATA OF CONDUCTION TEST CHART

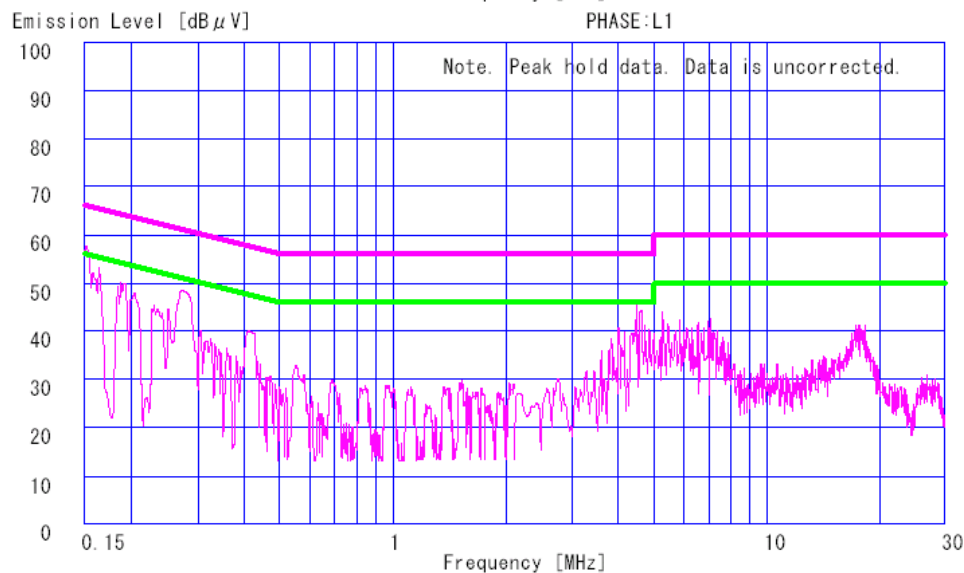
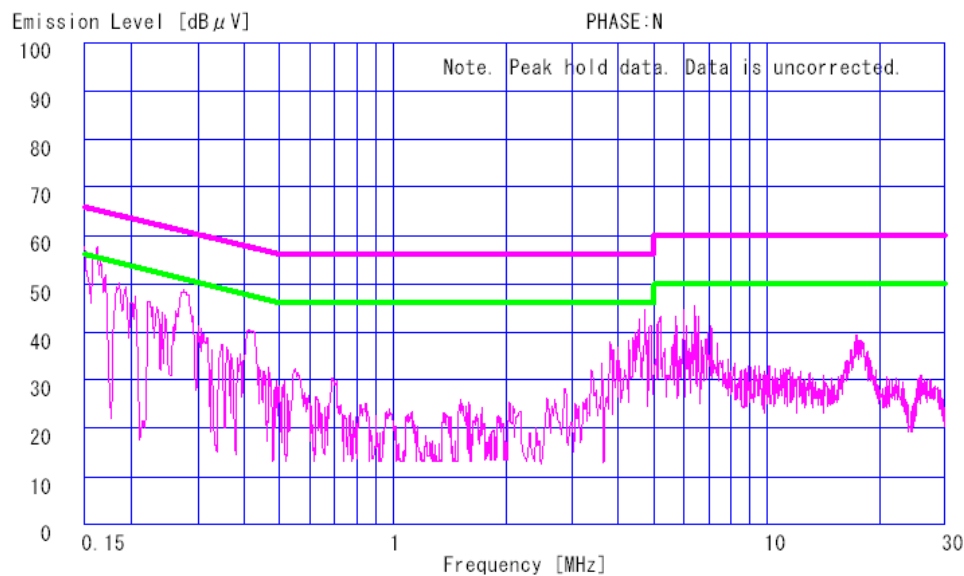
UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Main-Antenna, CCK, QPSK, 11Mbps
Remarks : Tx (CH1:2412MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 24 °C
Humidity : 64 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None

Engineer : Hiroka Umeyama

**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

DATA OF CONDUCTION TEST CHART

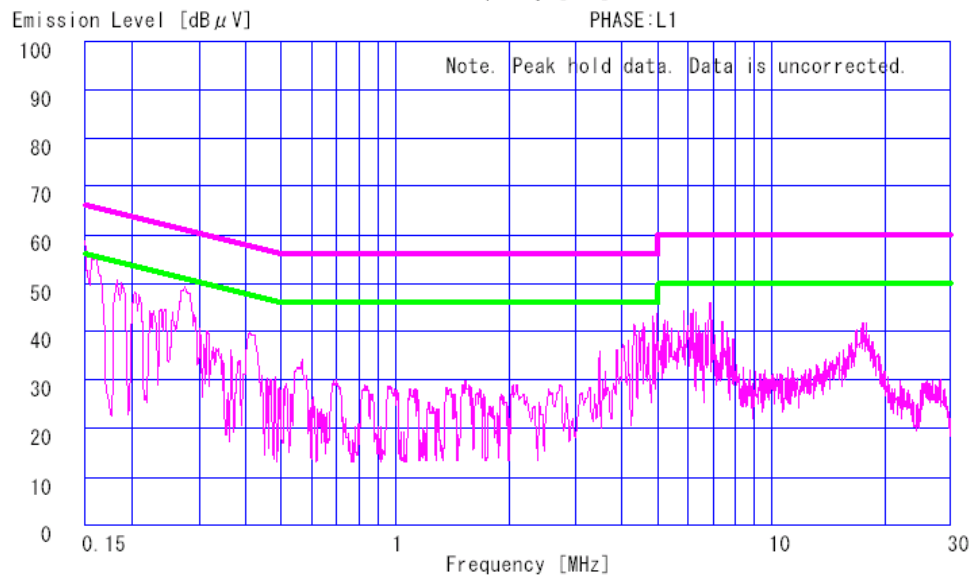
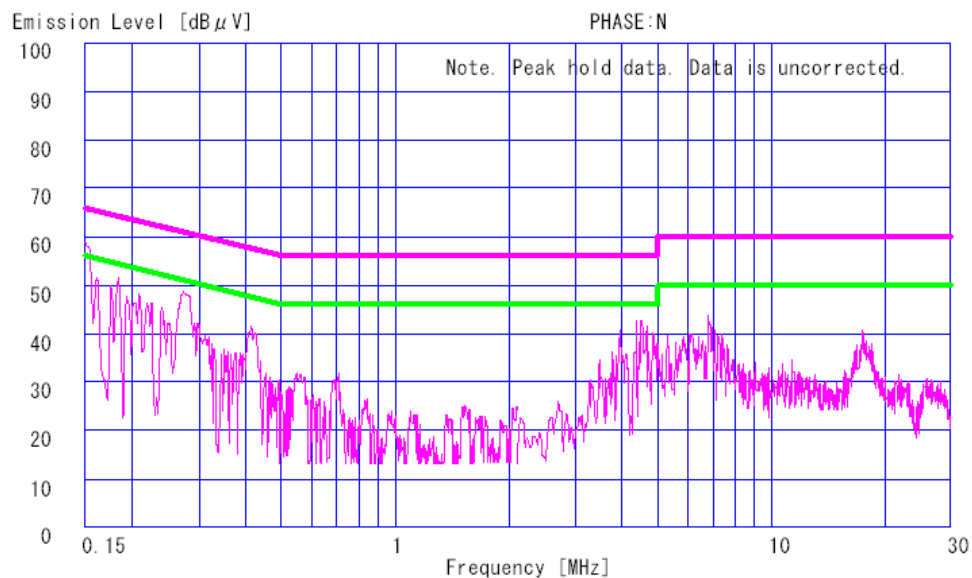
UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Main-Antenna, CCK, QPSK, 11Mbps
Remarks : Tx (CH6:2437MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 24 °C
Humidity : 64 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None

Engineer : Hiroka Umeyama

**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

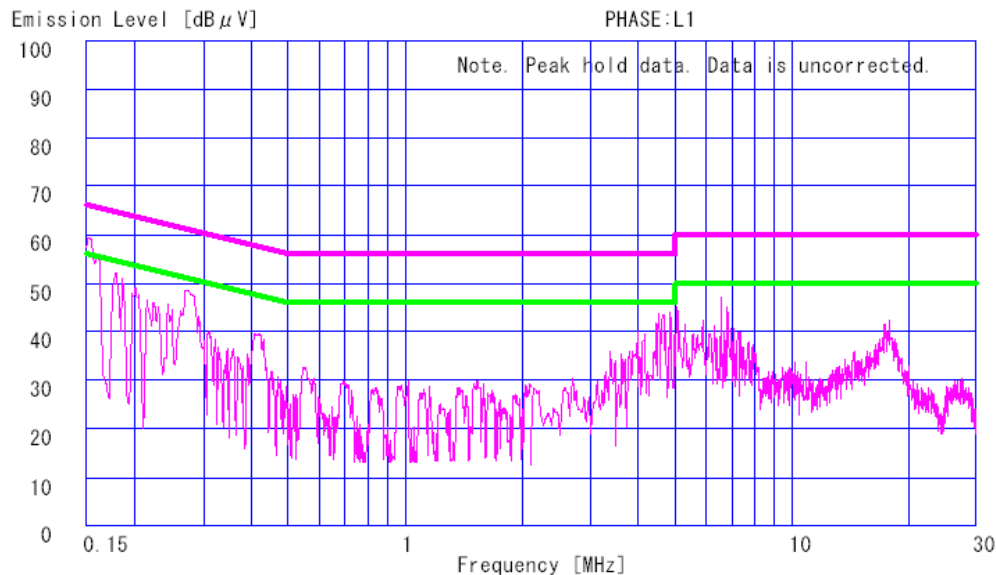
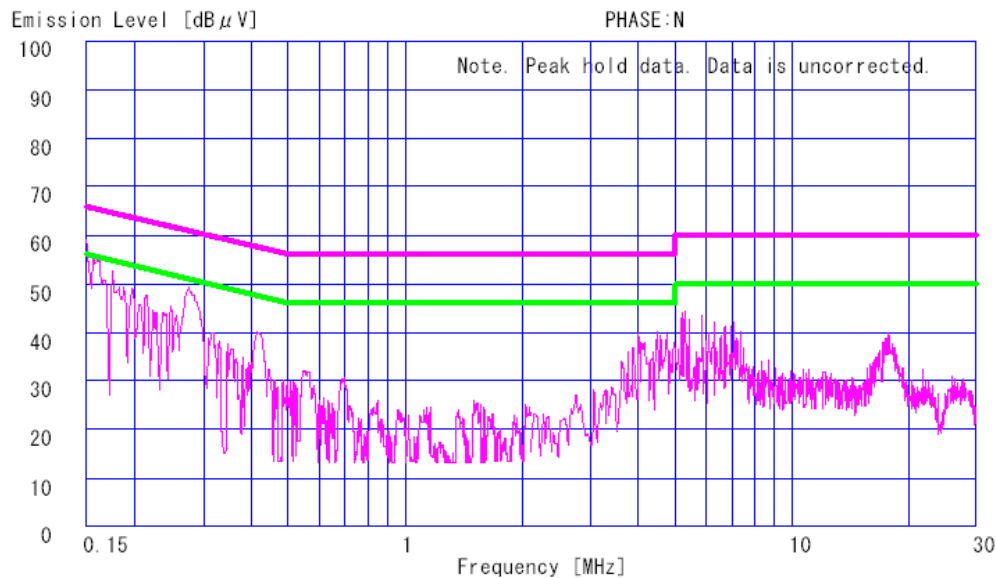
DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-HO

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Main-Antenna, CCK, QPSK, 11Mbps
Remarks : Tx (CH11:2462MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 24 °C
Humidity : 64 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None


Engineer : Hiroka Umeyama**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

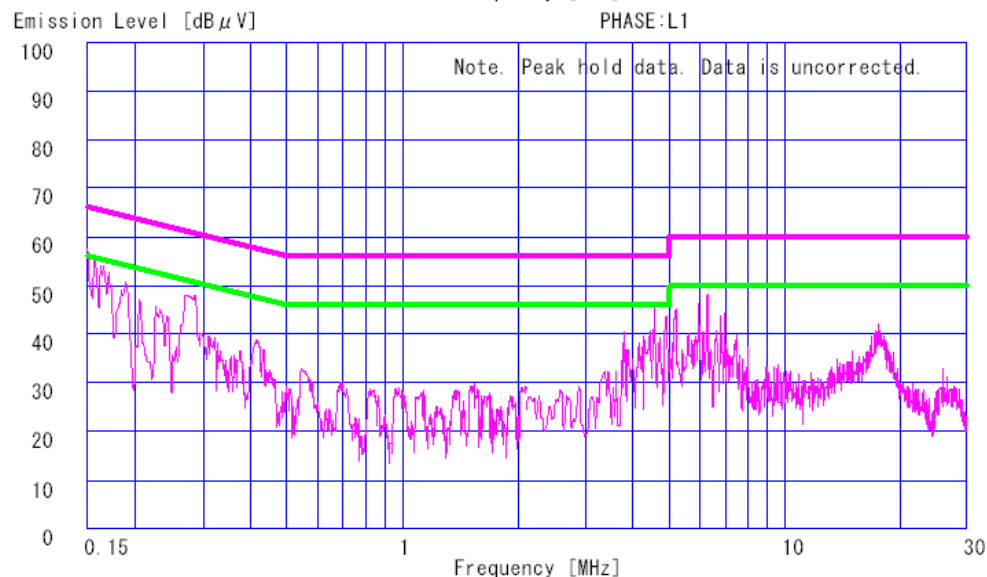
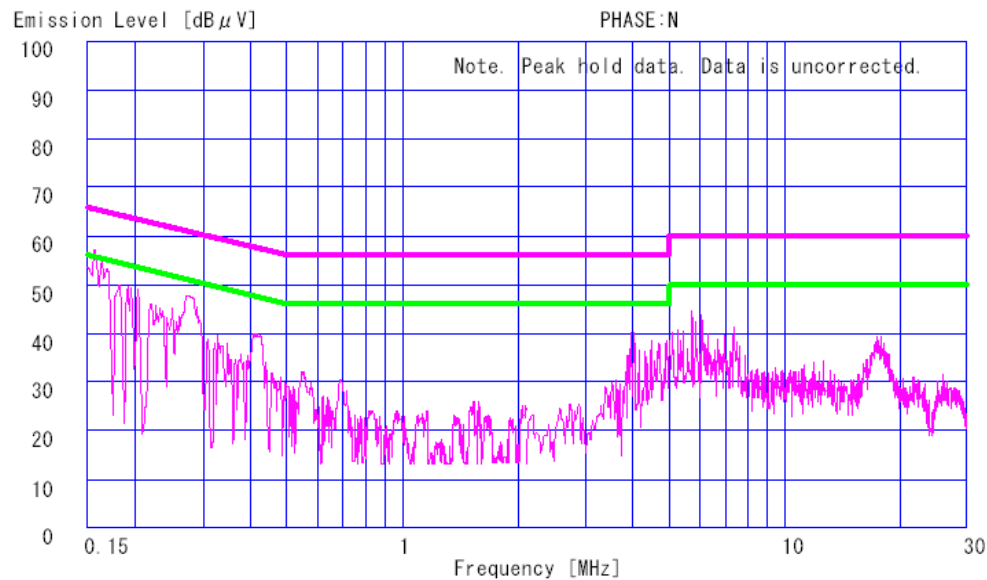
DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Sub-Antenna, CCK, QPSK, 11Mbps
Remarks : Tx (CH1: 2412MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 26 °C
Humidity : 61 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None


Engineer : Hiroka Umeyama**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

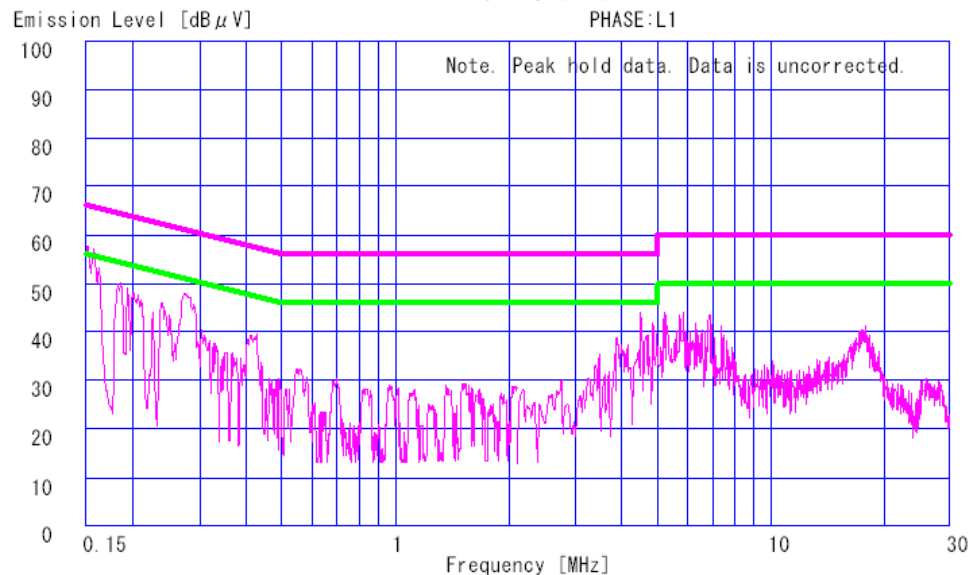
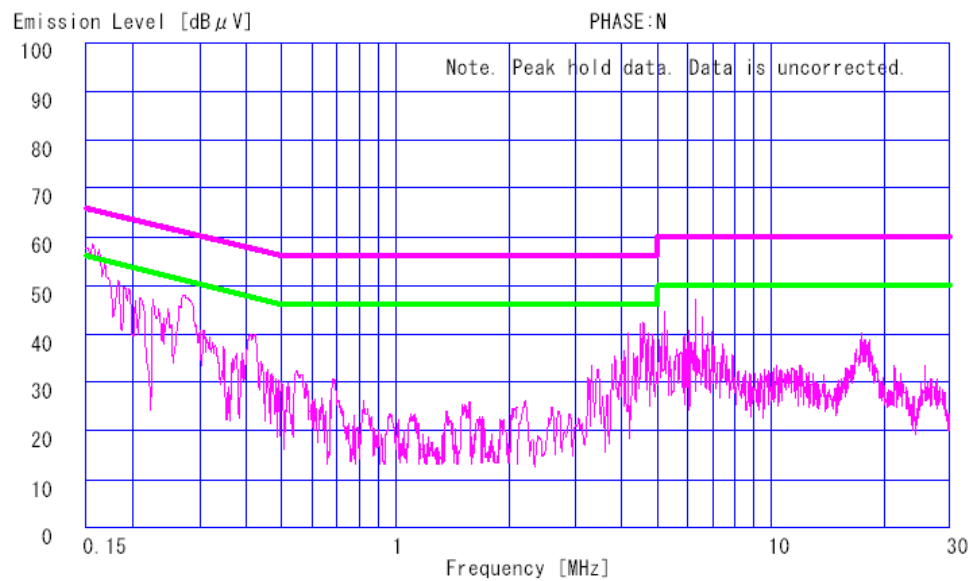
DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Sub-Antenna, CCK, QPSK, 11Mbps
Remarks : Tx (CH6:2437MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 26 °C
Humidity : 61 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None


Engineer : Hiroka Umeyama**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

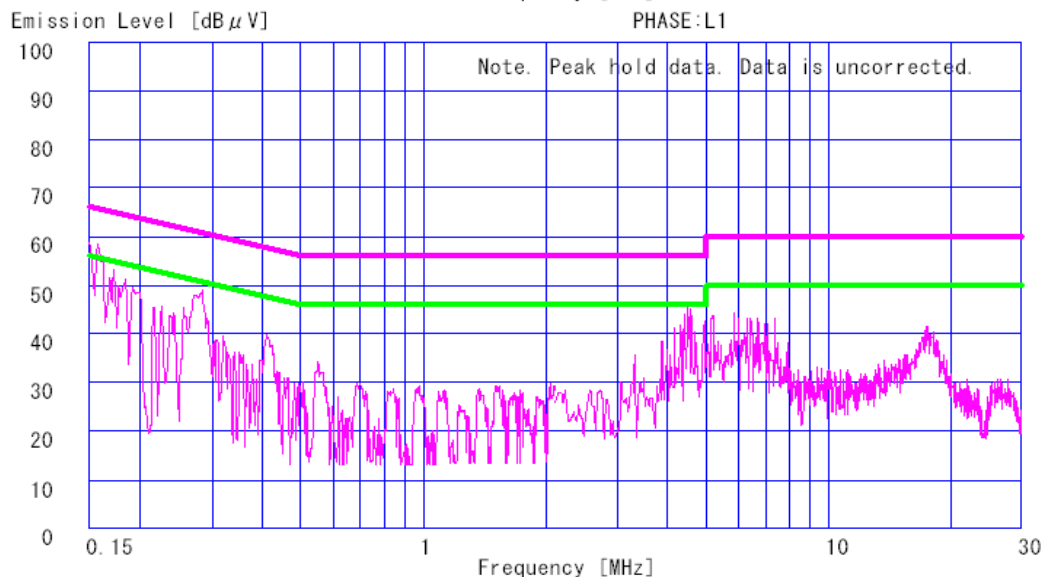
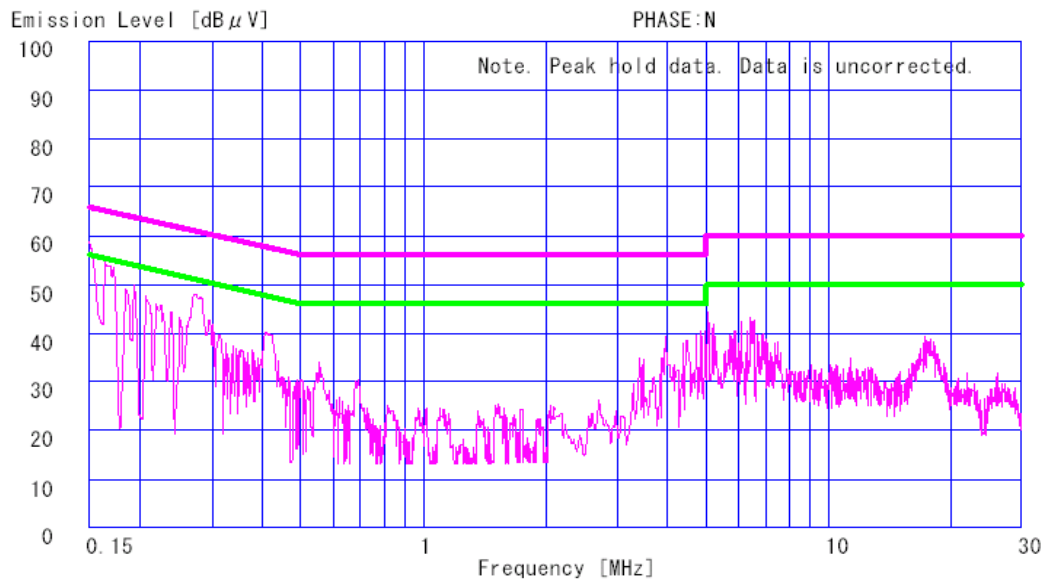
DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-HO

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Sub-Antenna, CCK, QPSK, 11Mbps
Remarks : Tx (CH11: 2462MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 26 °C
Humidity : 61 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None


Engineer : Hiroka Umeyama**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)


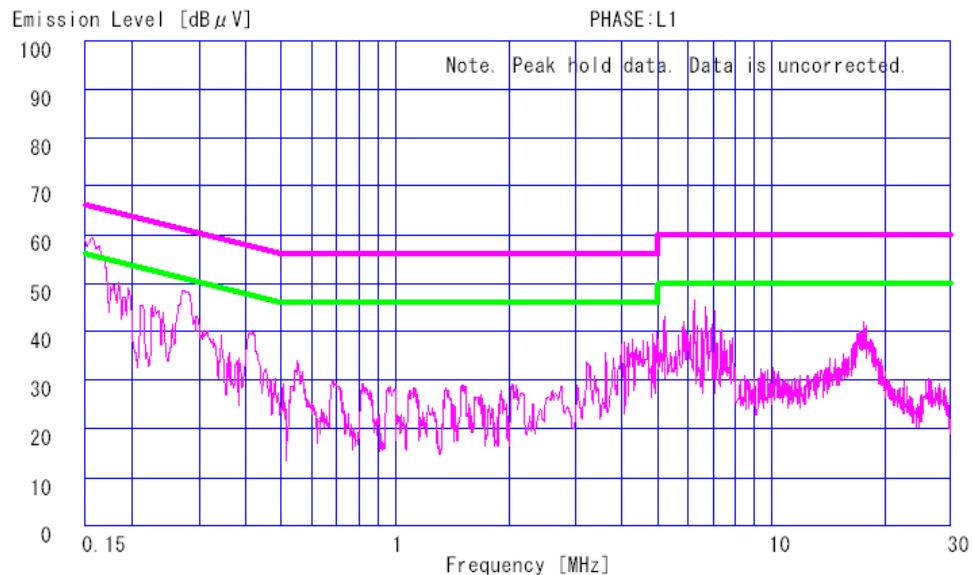
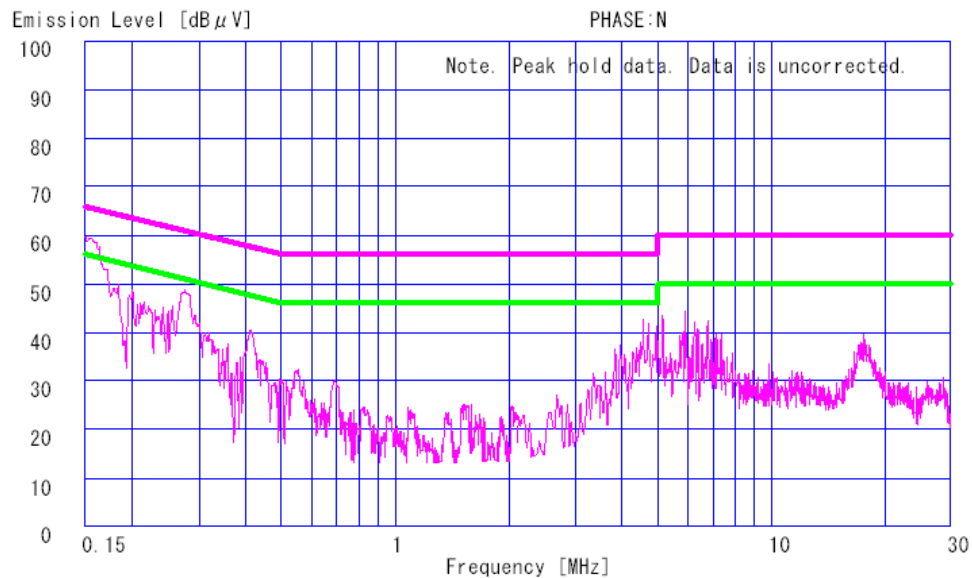
DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Main-Antenna, OFDM, 64QAM, 54Mbps
Remarks : Tx (CH1:2412MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 25 °C
Humidity : 68 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None


Engineer : Hiroka Umeyama**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

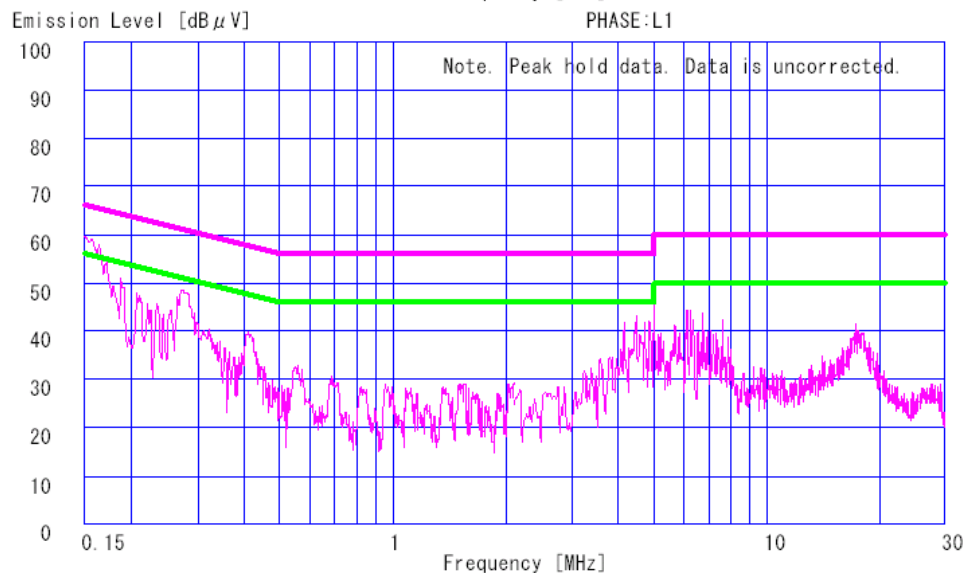
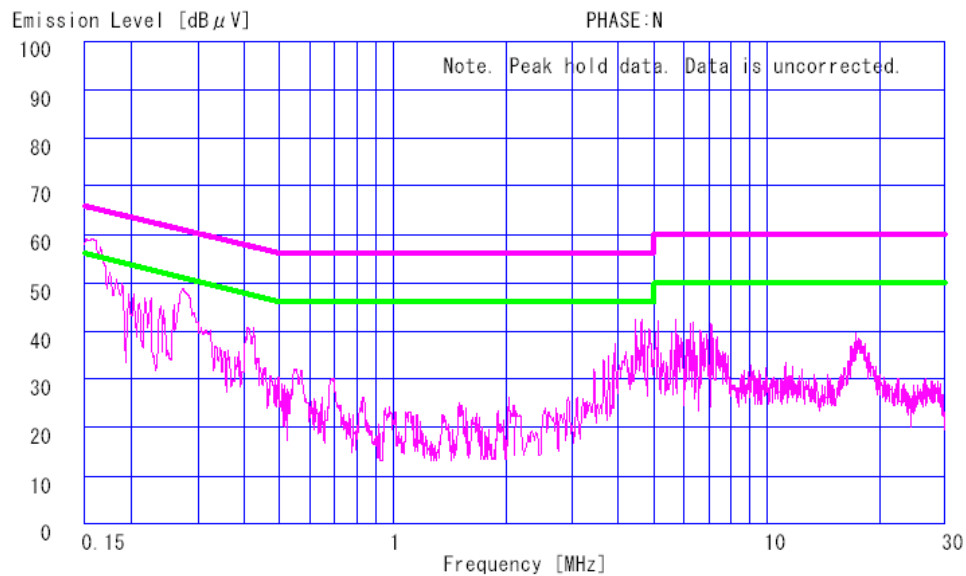
DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Main-Antenna, OFDM, 64QAM, 54Mbps
Remarks : Tx (CH6:2437MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 25 °C
Humidity : 68 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None


Engineer : Hiroka Umeyama**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

DATA OF CONDUCTION TEST CHART

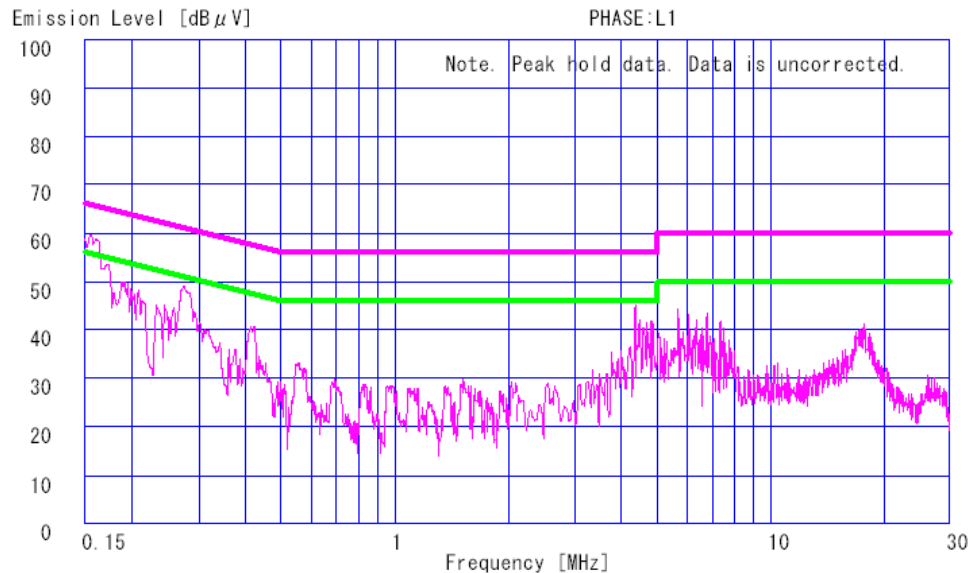
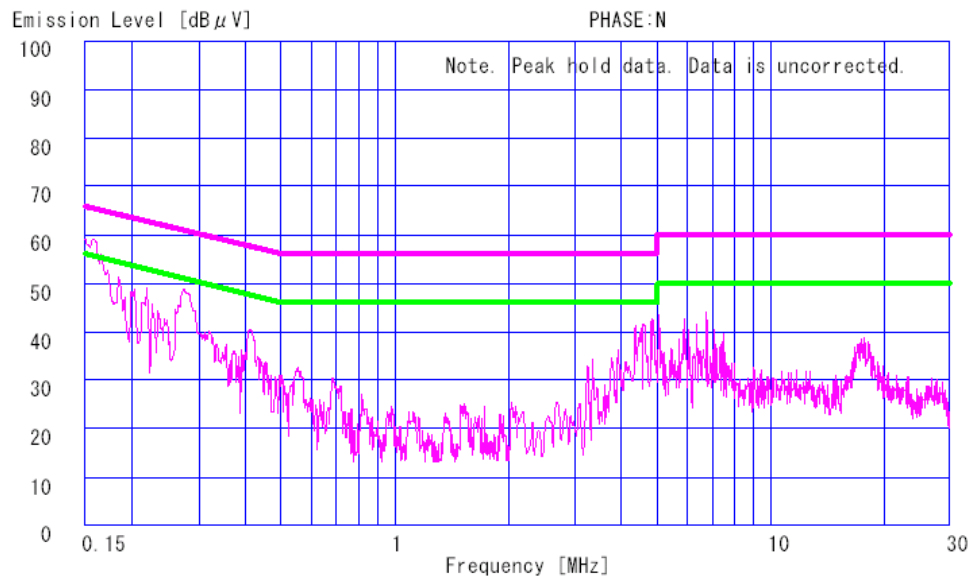
UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Main-Antenna, OFDM, 64QAM, 54Mbps
Remarks : Tx (CH11:2462MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 25 °C
Humidity : 68 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None

Engineer : Hiroka Umeyama

**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

DATA OF CONDUCTION TEST CHART

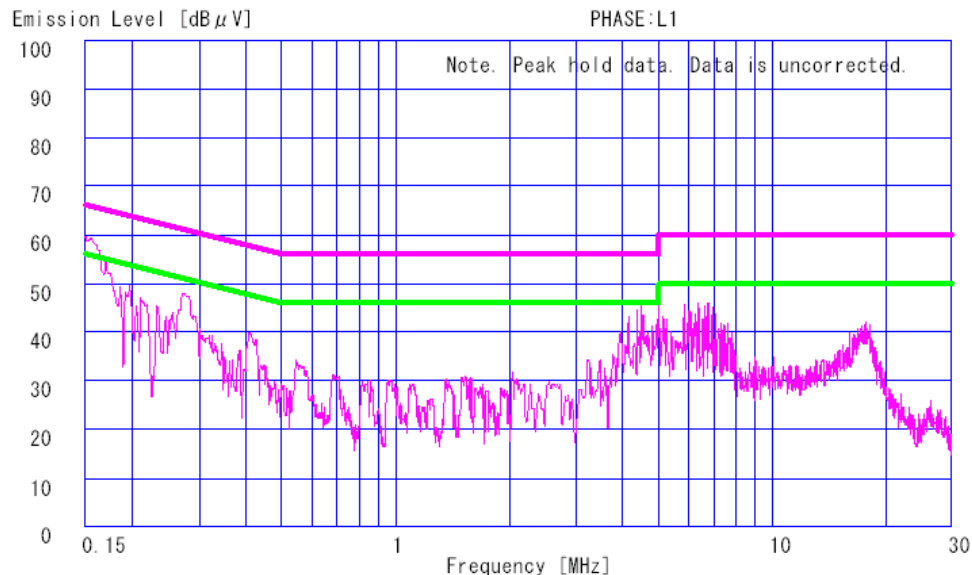
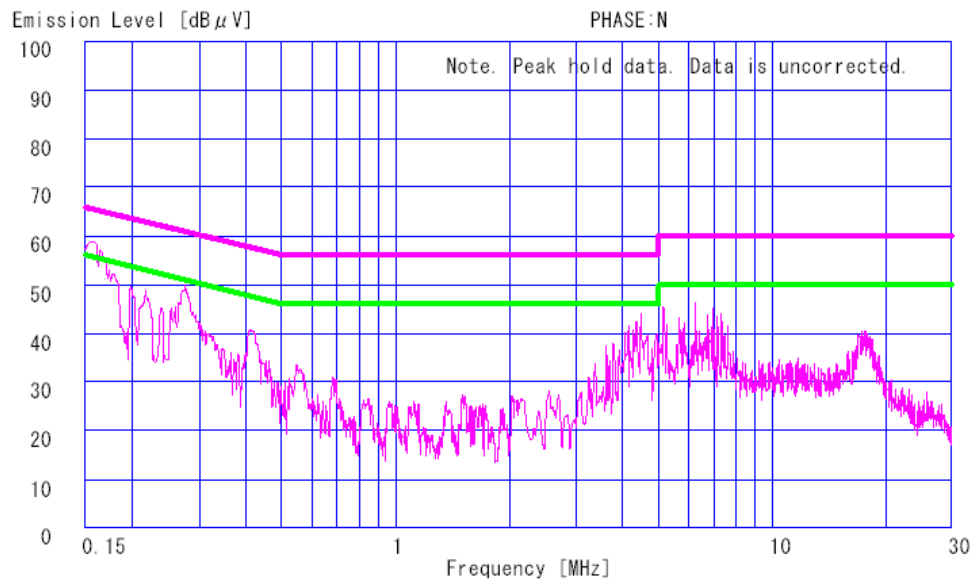
UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Sub-Antenna, OFDM, 64QAM, 54Mbps
Remarks : Tx (CH1:2412MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 26 °C
Humidity : 61 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None

Engineer : Hiroka Umeyama

**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

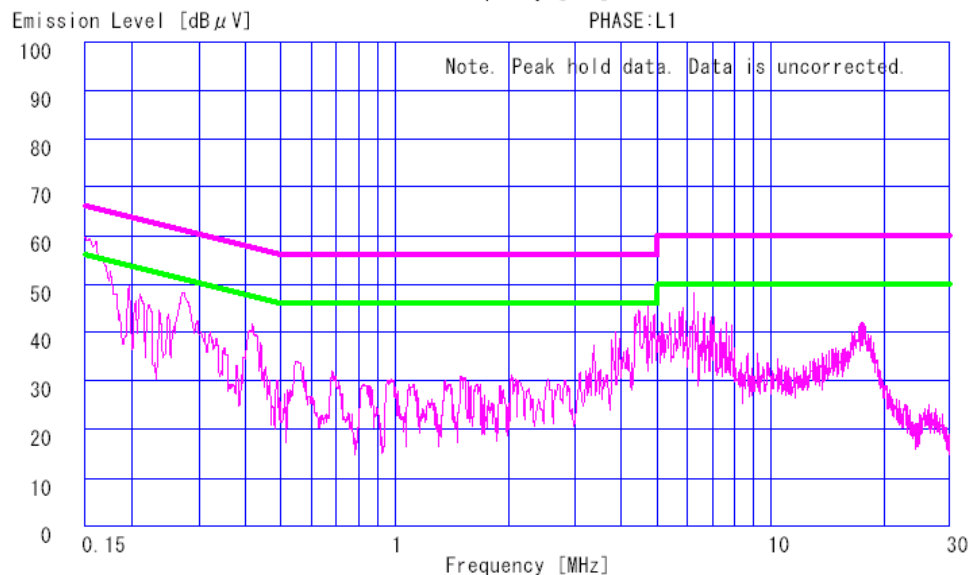
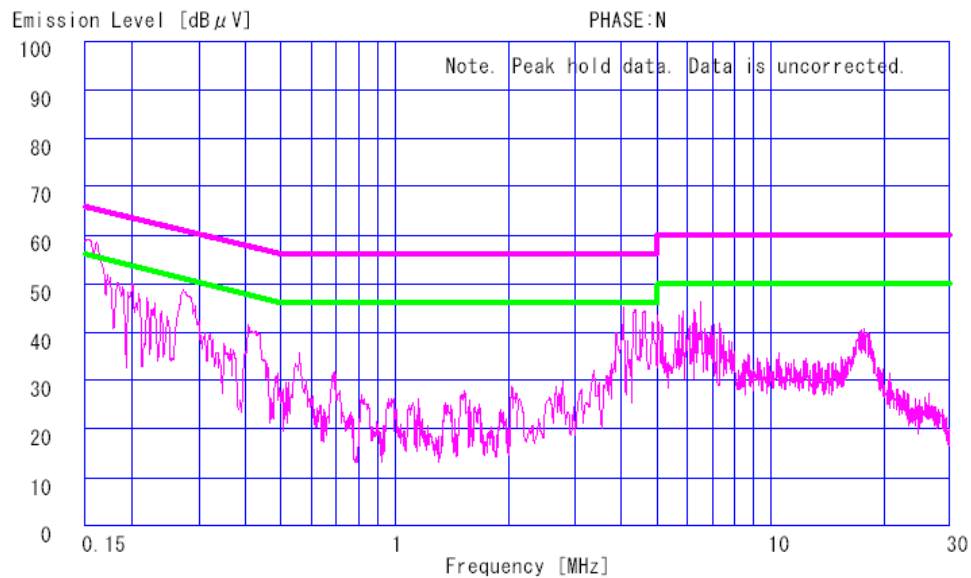
DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Sub-Antenna, OFDM, 64QAM, 54Mbps
Remarks : Tx (CH6:2437MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 26 °C
Humidity : 61 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None


Engineer : Hiroka Umeyama**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)


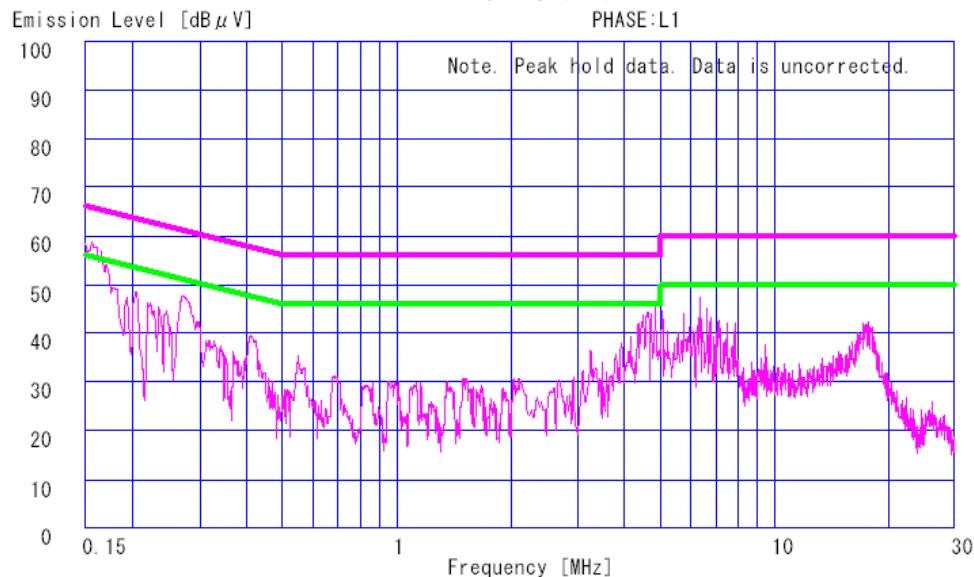
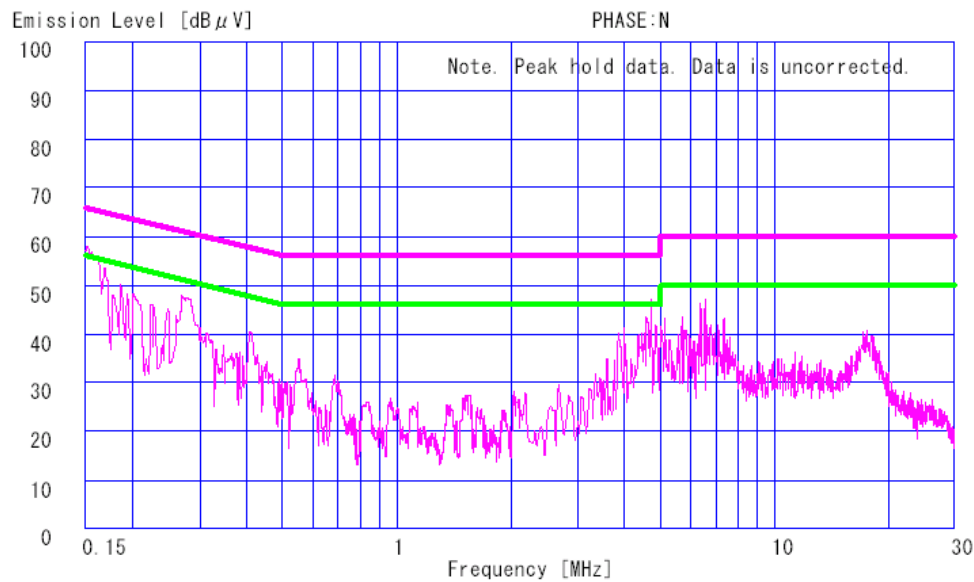
DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd. Head Office EMC Lab.

No.2 Semi Anechoic Chamber

Report No. : 23LE0006-H0

Applicant : Sony Corp.
Kind of Equipment : Notebook Personal Computer
Model No. : PCG-492L
Serial No. : DVT25
Power : AC120V/60Hz
Mode : Sub-Antenna, OFDM, 64QAM, 54Mbps
Remarks : Tx (CH11:2462MHz)
Date : 7/19/2003
Phase : Single Phase
Temperature : 26 °C
Humidity : 61 %
Regulation 1 : FCC Part15C § 15.207 (0.15-30MHz)
Regulation 2 : None


Engineer : Hiroka Umeyama**UL Apex Co., Ltd.****EMC Head Office Division.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124


MF060b(10.04.03)

DATA OF 6dB BANDWIDTH

UL Apex Co., Ltd.
Head Office EMC Lab. No.3 Measurement room

Company : Sony Corp.
Equipment : Notebook Personal Computer
Model : PCG-492L
Sample No. : DVT26
Power : AC120V/60Hz
Mode : Transmitting (IEEE 802.11b/g) Burst Frame mode
FCC ID : AK8PCG492L
IC No. : 409B-PCG492L

REPORT NO : 23LE0006-HO
REGULATION : Fcc Part15 Subpart C 15.247(a)
TEST DISTANCE : -
DATE : 07/15/2003
TEMPERATURE : 25deg.C
HUMIDITY : 60%


ENGINEER : Hiroka Umeyama

Main Antenna , CCK , QPSK , 11b 11Mbps

CH	FREQ	6dB Bandwidth	Limit
	[MHz]	[MHz]	[kHz]
Low(1)	2412.0	12.4	500.0
Mid(6)	2437.0	12.4	500.0
High(11)	2462.0	12.8	500.0

Sub Antenna , CCK , QPSK , 11b 11Mbps

CH	FREQ	6dB Bandwidth	Limit
	[MHz]	[MHz]	[kHz]
Low(1)	2412.0	10.8	500.0
Mid(6)	2437.0	9.9	500.0
High(11)	2462.0	9.5	500.0

Main Antenna , OFDM , 64QAM , 11g 54Mbps

CH	FREQ	6dB Bandwidth	Limit
	[MHz]	[MHz]	[kHz]
Low(1)	2412.0	16.5	500.0
Mid(6)	2437.0	16.5	500.0
High(11)	2462.0	16.5	500.0

Sub Antenna , OFDM , 64QAM , 11g 54Mbps

CH	FREQ	6dB Bandwidth	Limit
	[MHz]	[MHz]	[kHz]
Low(1)	2412.0	16.5	500.0
Mid(6)	2437.0	16.5	500.0
High(11)	2462.0	16.5	500.0

UL Apex Co., Ltd.
EMC Head Office Division.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124