




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/16/2006 10:23:21 AM	DUT Battery Model/No:	
Filename:	190lapv_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Sony D platform	Relative Permittivity:	55.55
Relative Humidity:	50%	Conductivity:	0.987
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-22.67 mm
DUT Position:	lap	Max SAR Z-axis Location:	-165.00 mm
Antenna Configuration:	vertical	Max E Field:	13.02 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.149 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.106 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.072 W/kg
Type of Modulation:		SAR End:	0.073 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	01/11/2006
Input Power Level:	max	Extrapolation:	poly4

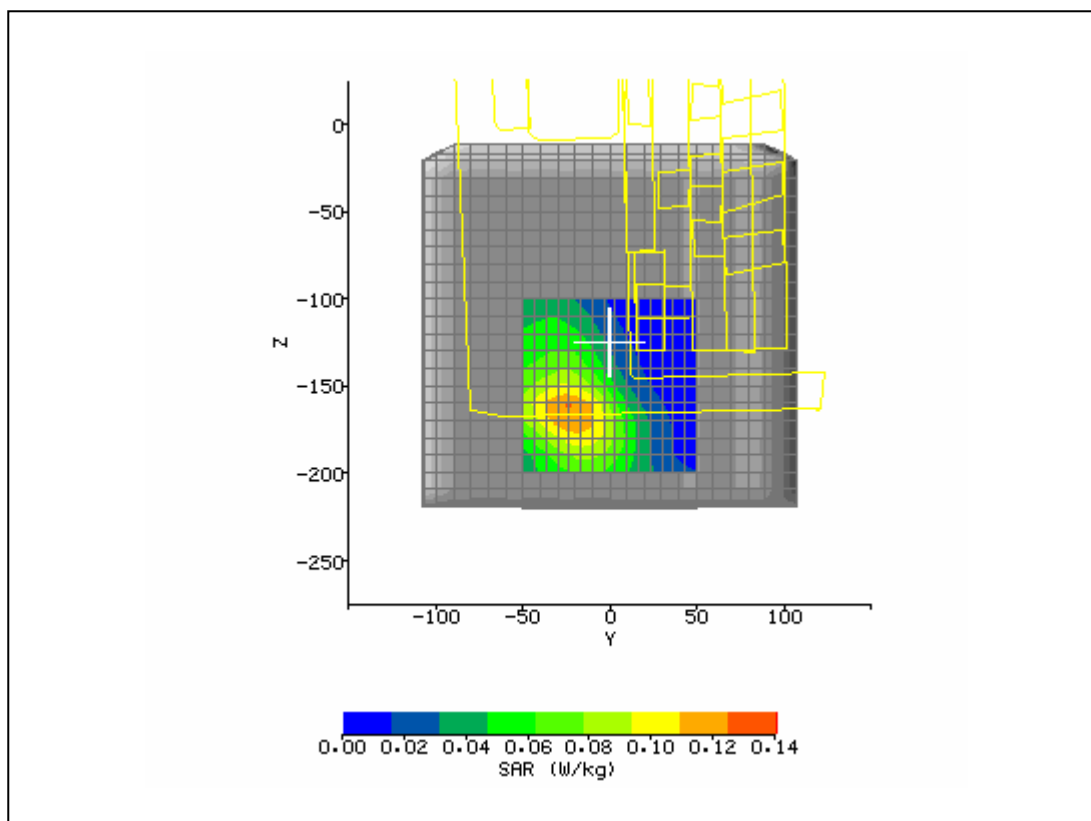


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/16/2006 11:22:51 AM	DUT Battery Model/No:	
Filename:	190laph_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Sony D platform	Relative Permittivity:	55.55
Relative Humidity:	50%	Conductivity:	0.987
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	0.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-146.40 mm
Antenna Configuration:	horizontal	Max E Field:	10.23 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.091 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.063 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.043 W/kg
Type of Modulation:		SAR End:	0.043 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	01/11/2006
Input Power Level:	max	Extrapolation:	poly4

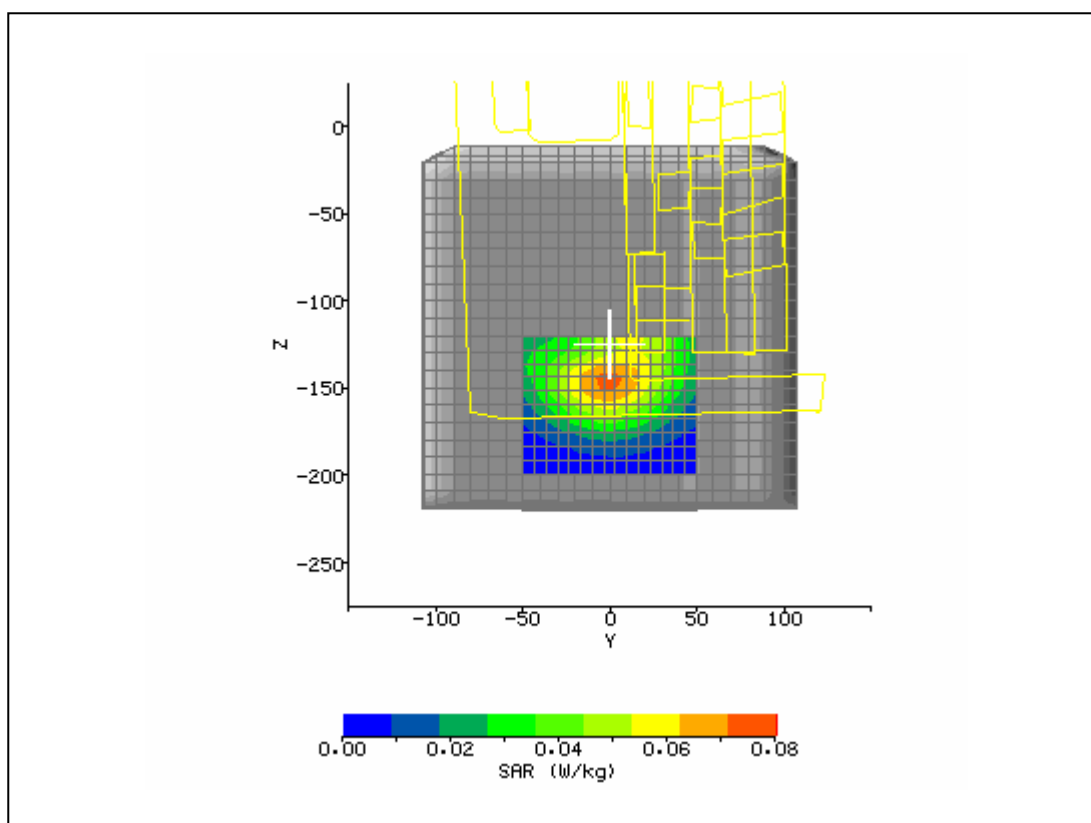


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/16/2006 12:46:27 PM	DUT Battery Model/No:	
Filename:	128lapv_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Sony D platform	Relative Permittivity:	56.07
Relative Humidity:	50%	Conductivity:	0.973
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-164.00 mm
Antenna Configuration:	vertical	Max E Field:	12.65 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.138 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.096 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.064 W/kg
Type of Modulation:		SAR End:	0.065 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.05 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	01/11/2006
Input Power Level:	max	Extrapolation:	poly4

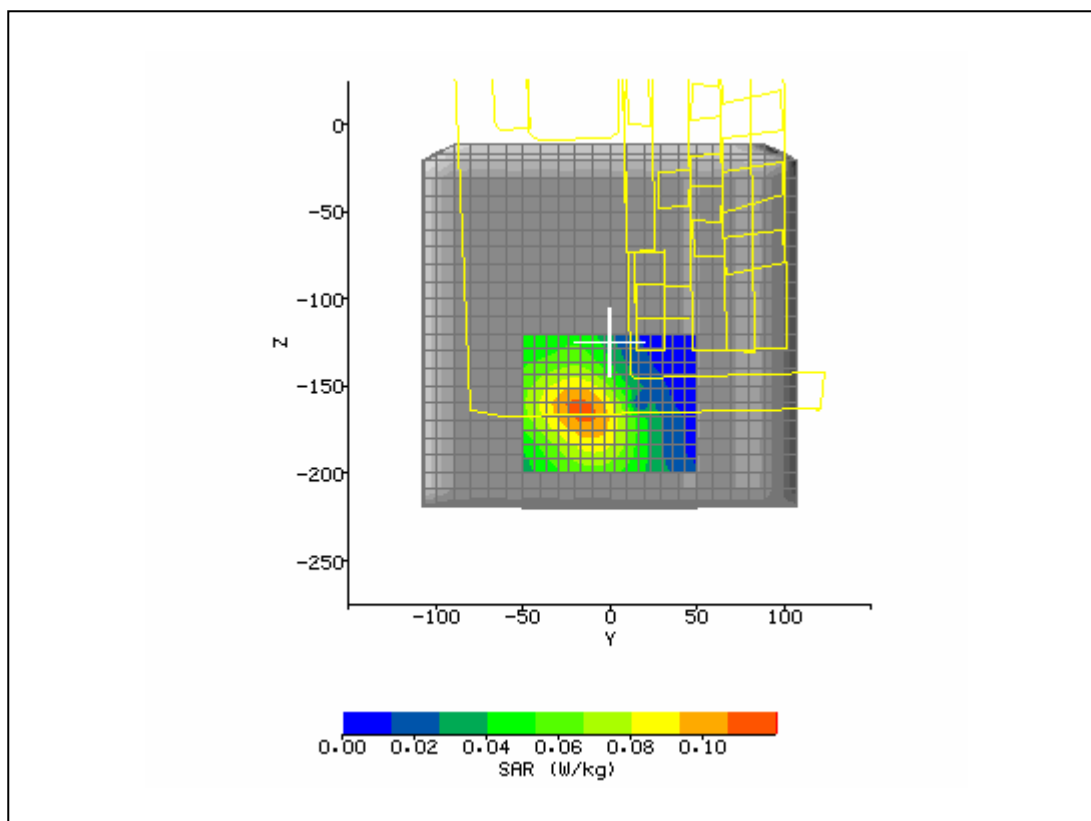


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/16/2006 2:37:33 PM	DUT Battery Model/No:	
Filename:	251lapv_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Sony D platform	Relative Permittivity:	55.46
Relative Humidity:	50%	Conductivity:	0.983
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-6.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-174.67 mm
Antenna Configuration:	vertical	Max E Field:	22.67 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.130 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.085 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.054 W/kg
Type of Modulation:		SAR End:	0.054 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	01/11/2006
Input Power Level:	max	Extrapolation:	poly4

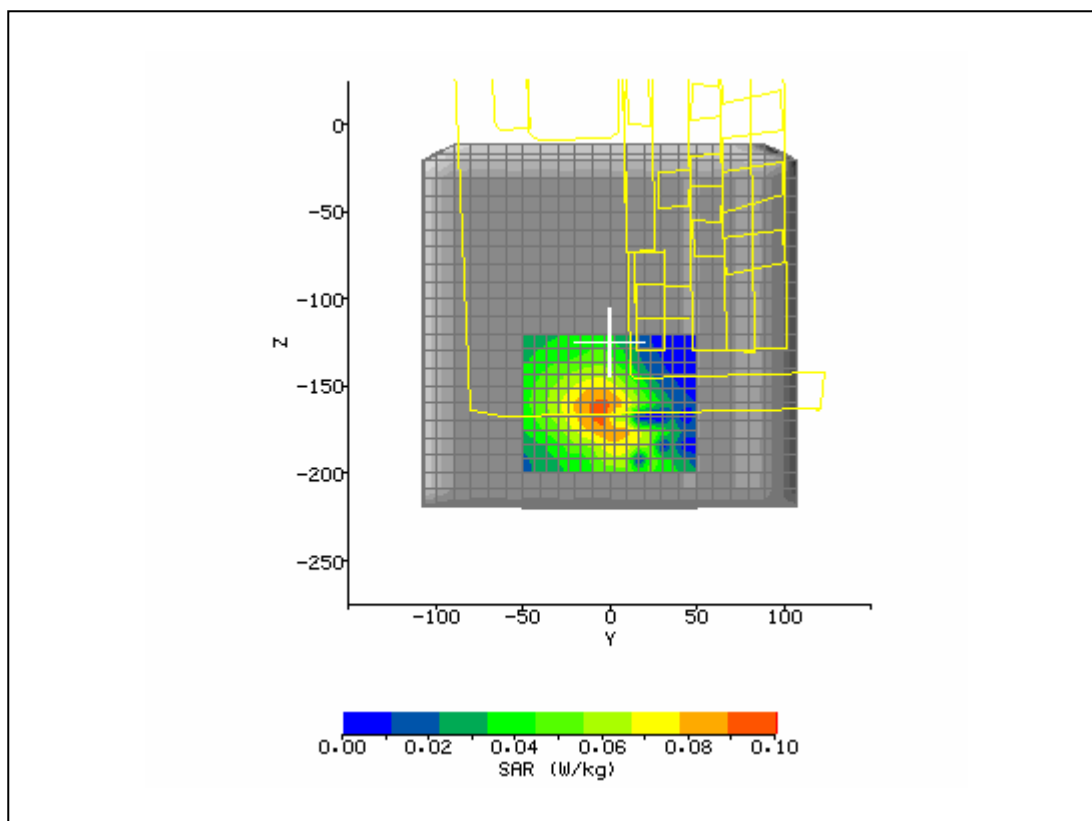


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/11/2006 1:53:17 PM	DUT Battery Model/No:	
Filename:	lap661v_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Sony D platform	Relative Permittivity:	53.21
Relative Humidity:	50%	Conductivity:	1.577
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-28.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-156.00 mm
Antenna Configuration:	vertical	Max E Field:	9.57 V/m
Test Frequency:	1880MHz	SAR 1g:	0.118 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.065 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.036 W/kg
Type of Modulation:		SAR End:	0.036 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	01/11/2006
Input Power Level:	max	Extrapolation:	poly4

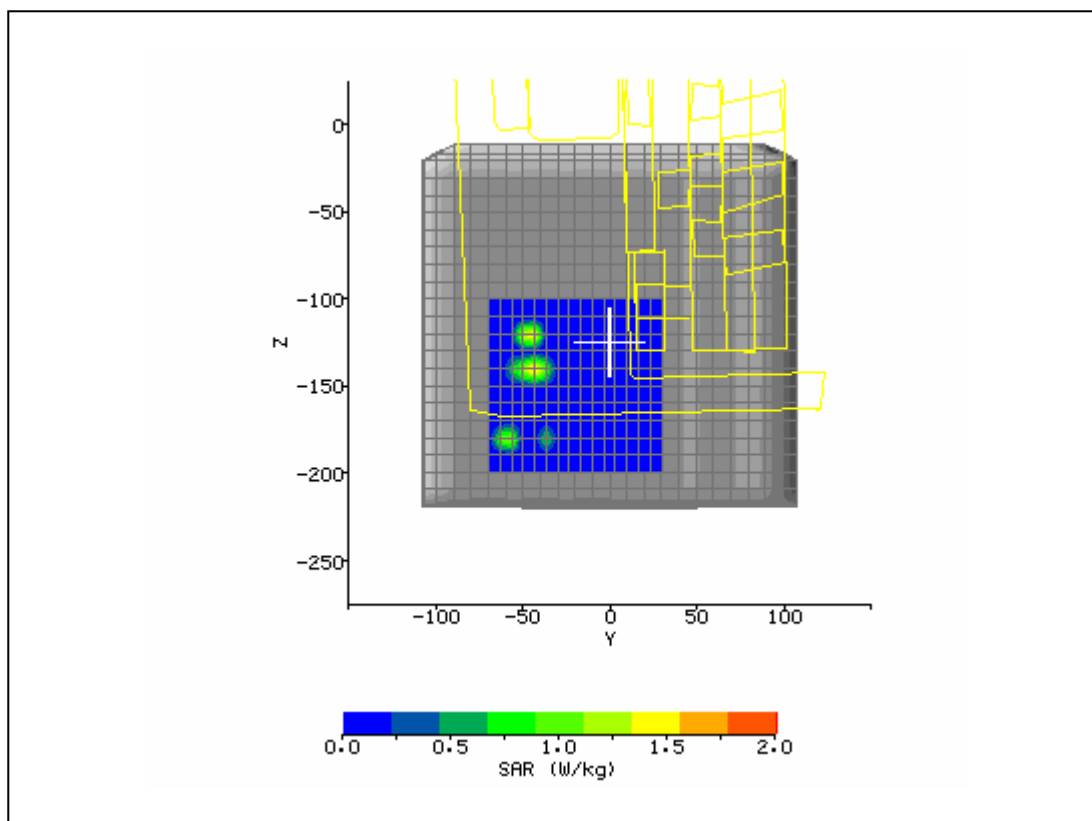

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/11/2006 3:05:39 PM	DUT Battery Model/No:	
Filename:	lap661h_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Sony D platform	Relative Permittivity:	53.21
Relative Humidity:	50%	Conductivity:	1.577
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-23.33 mm
DUT Position:	lap	Max SAR Z-axis Location:	-162.00 mm
Antenna Configuration:	horizontal	Max E Field:	10.91 V/m
Test Frequency:	1880MHz	SAR 1g:	0.157 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.094 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.047 W/kg
Type of Modulation:		SAR End:	0.047 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	01/11/2006
Input Power Level:	max	Extrapolation:	poly4

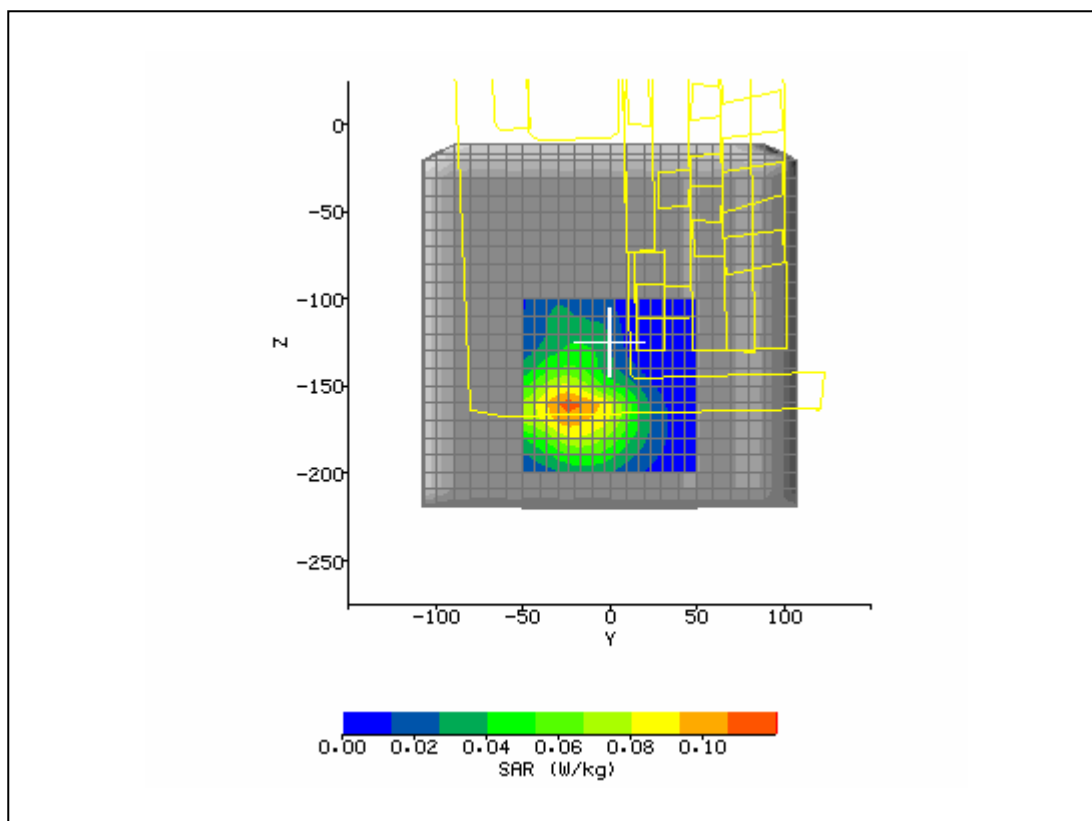

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/11/2006 3:38:54 PM	DUT Battery Model/No:	
Filename:	lap512h_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Sony D platform	Relative Permittivity:	53.39
Relative Humidity:	50%	Conductivity:	1.565
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-24.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-163.00 mm
Antenna Configuration:	horizontal	Max E Field:	9.28 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.114 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.069 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.032 W/kg
Type of Modulation:		SAR End:	0.033 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	01/11/2006
Input Power Level:	max	Extrapolation:	poly4

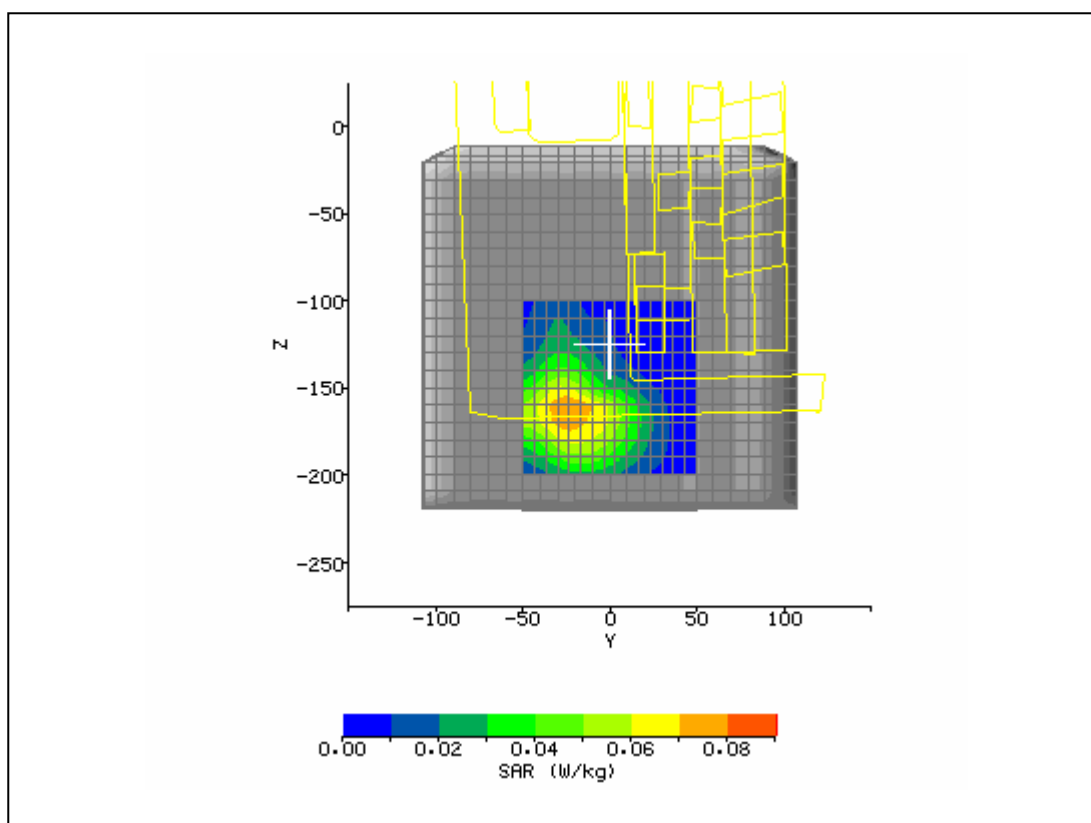

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/11/2006 4:24:04 PM	DUT Battery Model/No:	
Filename:	lap810h_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Sony D platform	Relative Permittivity:	53.03
Relative Humidity:	50%	Conductivity:	1.585
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-24.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-163.00 mm
Antenna Configuration:	horizontal	Max E Field:	9.26 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.115 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.070 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.033 W/kg
Type of Modulation:		SAR End:	0.032 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.12 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	01/11/2006
Input Power Level:	max	Extrapolation:	poly4

