



FCC Test Report

FCC Part 15.247 for FHSS systems/ CANADA RSS-210

FOR:

NOTEBOOK PC

MODEL #: PCG-9W6L

SONY CORPORATION
6-7-35, KITASHINAGAWA, SHINAGAWA-KU
TOKYO 141-0001
JAPAN

FCC ID: AK8PCG9W6L
IC ID: 409B-PCG9W6L

TEST REPORT #: EMC_1088_2005_BLUETOOTH
DATE: NOVEMBER 4, 2005



TTI-P-G 081/94-A0

Accredited according to ISO/IEC 17025



Bluetooth Qualification
Test Facility
(BQTF)



FCC listed # 101450

IC recognized # 3925

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

TABLE OF CONTENTS

1	Assessment	3
2	Administrative Data	4
2.1	Identification of the Testing Laboratory Issuing the EMC Test Report	4
2.2	Identification of the Client	4
2.3	Identification of the Manufacturer	4
3	Equipment under Test (EUT)	5
3.1	Identification of the Equipment under Test	5
4	Subject Of Investigation	6
5	Measurements	7
5.1	MAXIMUM PEAK OUTPUT POWER § 15.247 (RADIATED)	7
5.1.1	LIMIT SUB CLAUSE § 15.247 (b) (1) (2) (3) (4)	7
5.1.2	EIRP:	7
5.2	RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205	11
5.2.1	LIMITS	11
5.2.2	RESULTS (2402MHz)	12
5.2.3	RESULTS (2480MHz)	14
5.3	TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209	16
5.3.1	LIMITS	16
5.3.2	RESULTS	17
5.4	RECEIVER SPURIOUS RADIATION § 15.209/RSS210	32
5.4.1	LIMITS	32
5.4.2	RESULTS	33
5.5	CO-LOCATION	38
5.5.1	RESULTS (WLAN AND BLUETOOTH)	39
5.5.2	RESULTS (PCS AND BLUETOOTH)	45
5.6	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	51
5.6.1	LIMITS	51
5.6.2	RESULTS (WLAN AND BLUETOOTH)	52
5.6.3	RESULTS (PCS AND BLUETOOTH)	54
5.7	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	56
5.8	BLOCK DIAGRAMS	57

1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Part 15.247 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS210.

Company	Description	Model #
SONY CORPORATION	NOTEBOOK PC	PCG-9W6L



2005-11-04
Neelesh Raj
Project Leader



2005-11-04
Lothar Schmidt
Test Lab Manager

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Neelesh Raj
Date of test:	2005-10-31 to 2005-11-04

2.2 Identification of the Client

Applicant's Name:	SONY Corporation
Street Address:	6-7-35, Kitashinagawa, Shinagawa-ku,
City/Zip Code	Tokyo 141-0001
Country	Japan
Contact Person:	Takumi Ozawa
Phone No.	81-3-5795-8716
Fax:	81-3-5795-8981
e-mail:	ozawa@sm.sony.co.jp

2.3 Identification of the Manufacturer

Manufacturer's Name:	Tech-Pro (Shanghai) Computer Co.,Ltd
Manufacturers Address:	No.6 Lane 58, San-Zhuang Road, Songjiang Export Processing Zone
City/Zip Code	Shanghai 201613
Country	P.R. China

3 Equipment under Test (EUT)

3.1 Identification of the Equipment under Test

Marketing Name:	VGN-BX
Description:	Notebook PC
Model No:	PCG-9W6L
FCC ID:	AK8PCG9W6L
IC ID:	409B-PCG9W6L
Frequency Range:	2400-2483.5
Type(s) of Modulation:	GFSK
Number of Channels:	79
Antenna Type:	Bluetooth: λ/monopole (Film Antenna)
Output Power:	0.86mW EIRP @ 2441MHz



4 Subject Of Investigation

All testing was performed on the PCG-9W6L referred to as EUT. The EUT carries a pre-certified Bluetooth module with FCC ID# CWTUGPZ6. This test report contains full radiated testing as per FCC15.247 on the EUT with the pre-certified Bluetooth module. All conducted measurements are covered under *test report# 25JE0028-YK-1*.

During the testing process the EUT was tested on a single channel using PRBS9 payload.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS210.

5 Measurements

5.1 MAXIMUM PEAK OUTPUT POWER § 15.247 (RADIATED)

5.1.1 LIMIT SUB CLAUSE § 15.247 (b) (1) (2) (3) (4)

Frequency range	RF power output
2400-2483.5 MHz	36dBm EIRP

*limit is based upon antenna gain of less than or equal to 6dBi.


5.1.2 EIRP:

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	-1.17	-0.67	-1.35
Measurement uncertainty		±0.5dBm		



EIRP (2402 MHz)


Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
2397 MHz	2407 MHz	Max Peak	Coupled	3 MHz

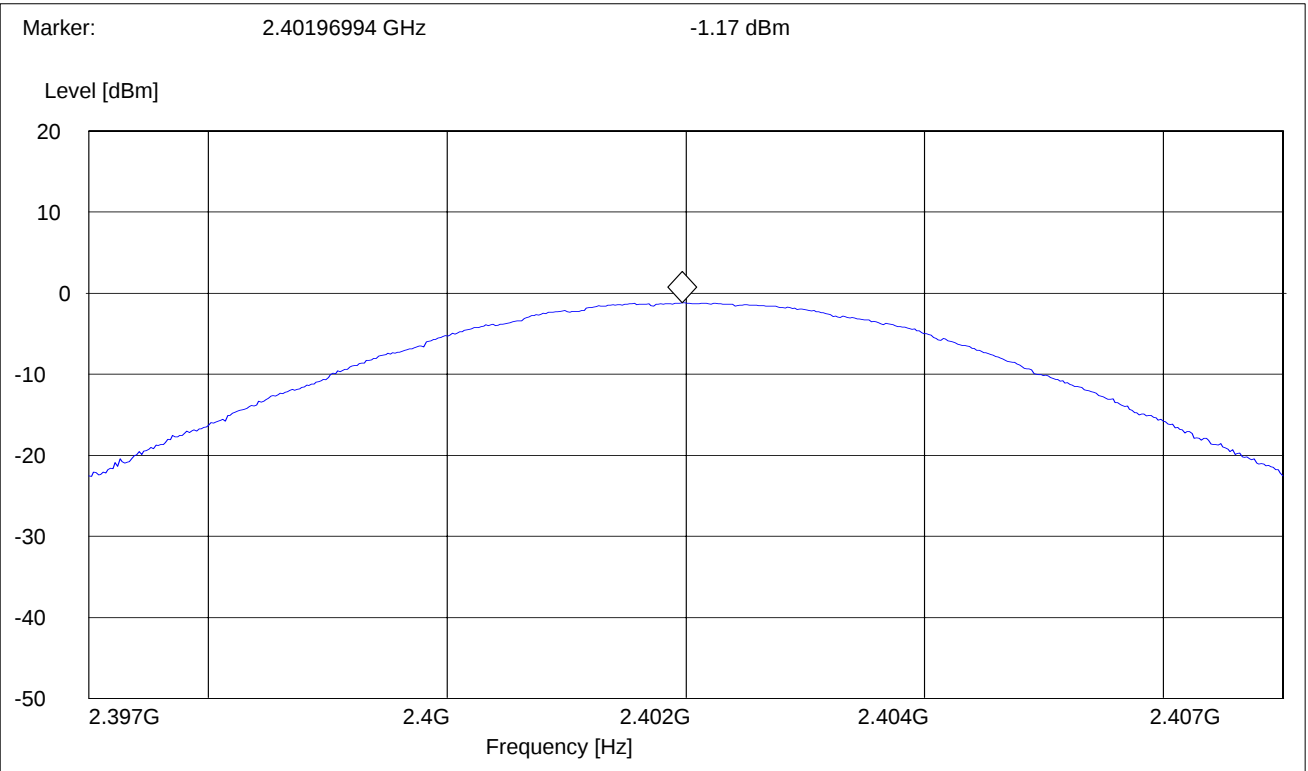



EIRP (2441 MHz)


Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
2436 MHz	2446 MHz	Max Peak	Coupled	3 MHz

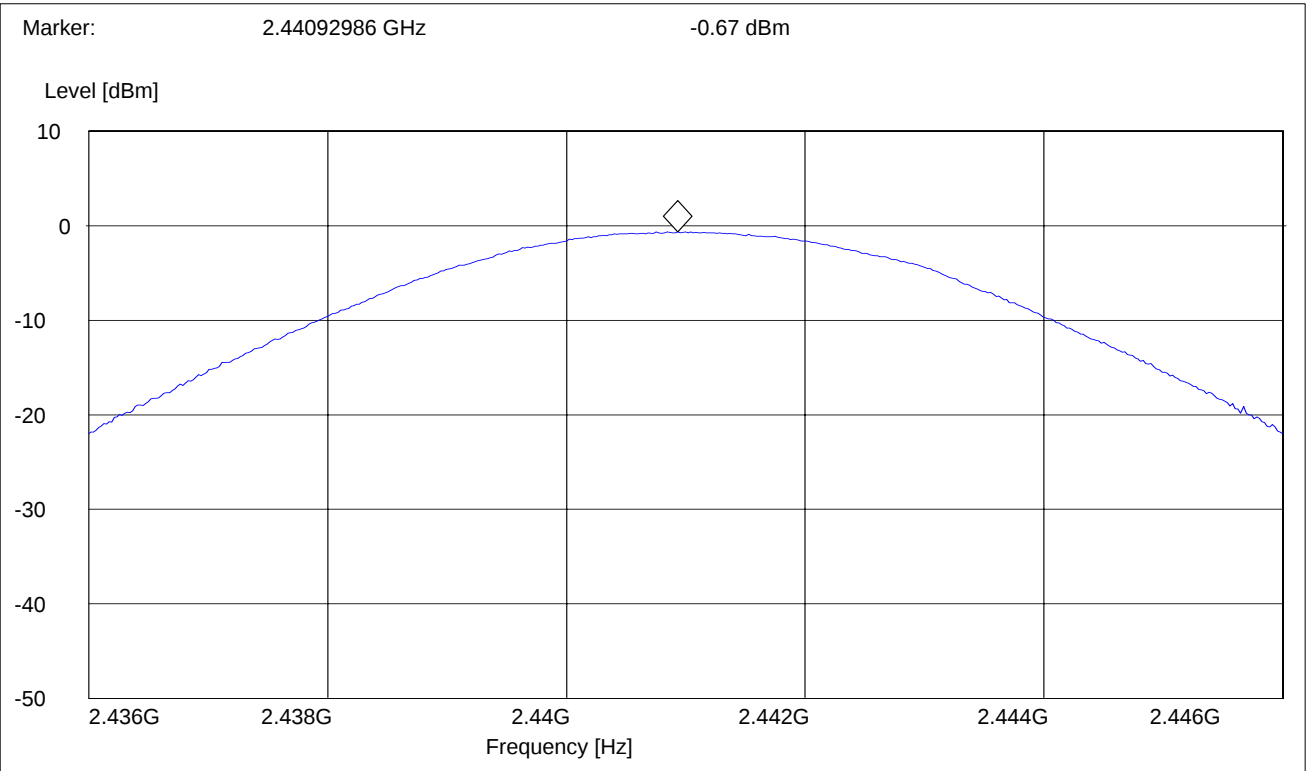



EIRP (2480 MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
2475 MHz	2478 MHz	Max Peak	Coupled	3 MHz

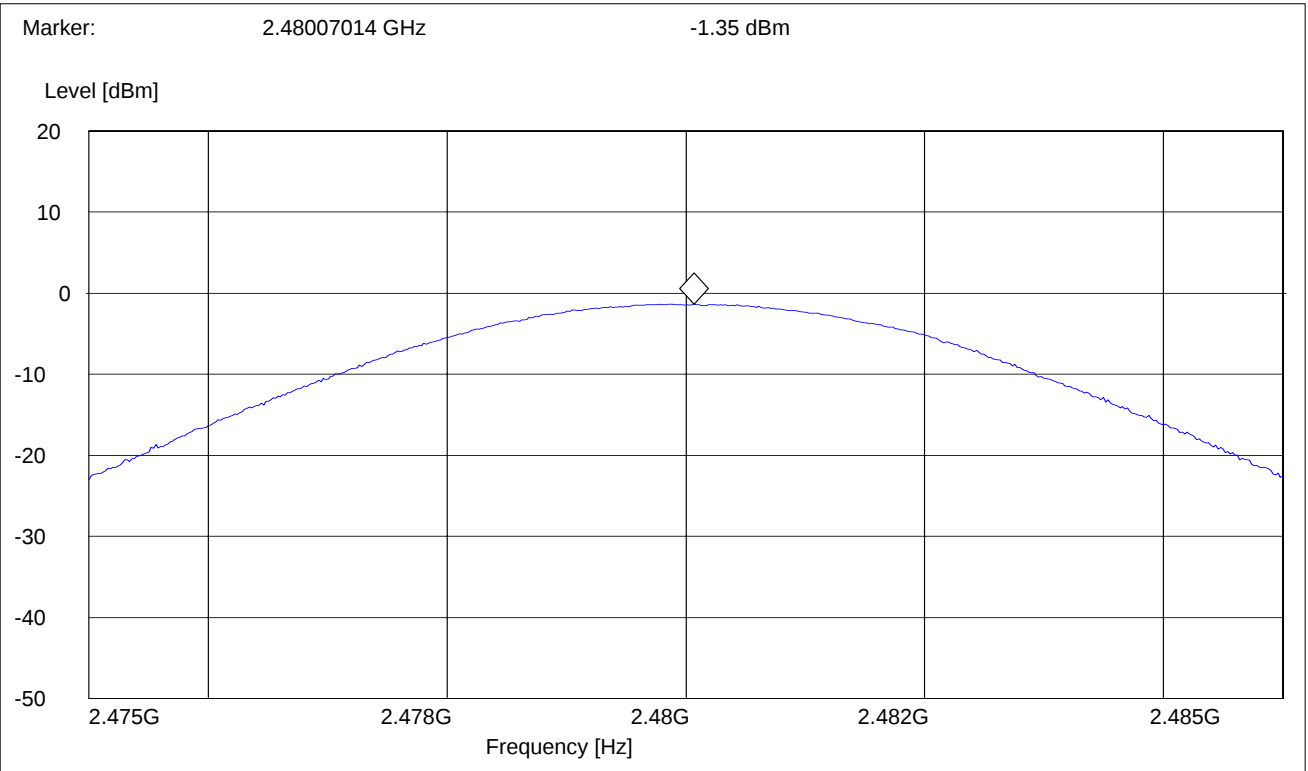

5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205

5.2.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			


*PEAK LIMIT= 74dBuV

*AVG. LIMIT= 54dBuV

5.2.2 RESULTS (2402MHz)

PEAK


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
2310 MHz	2442 MHz	Max Peak	Coupled	1 MHz	1 MHz

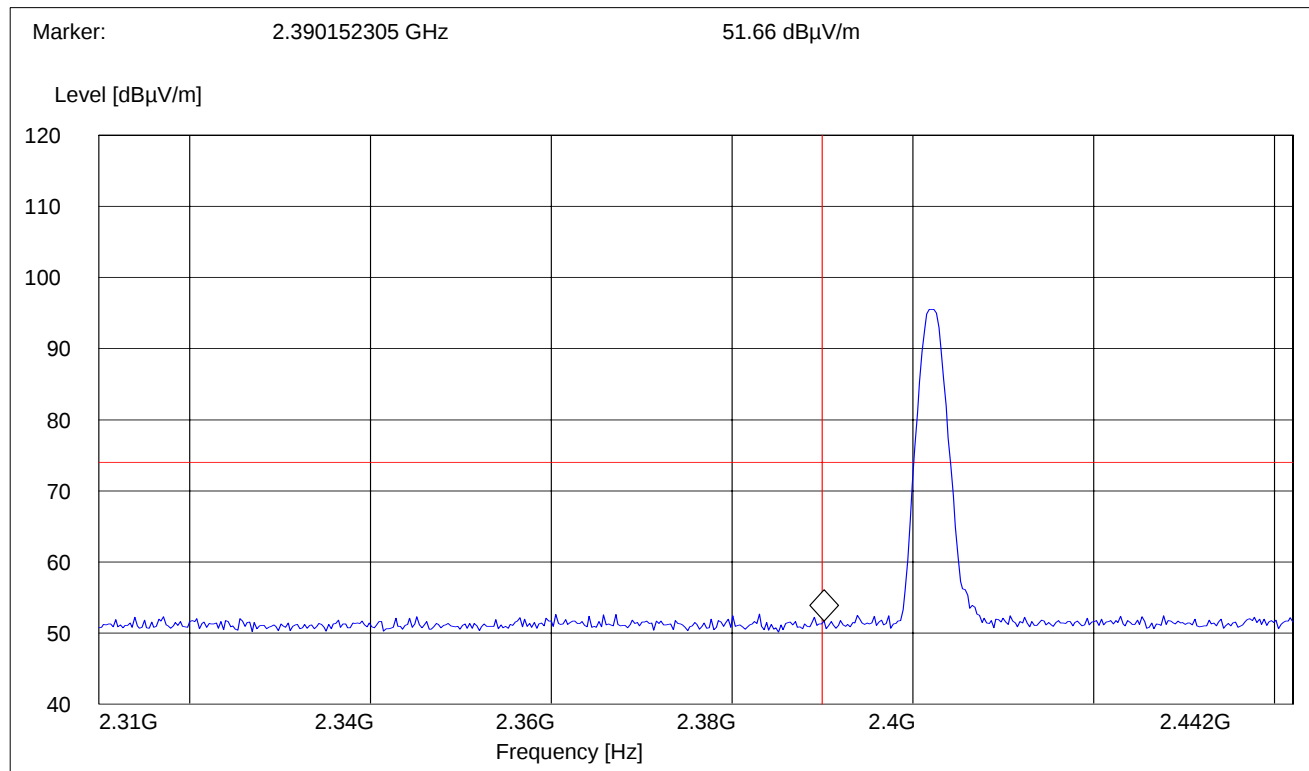



AVG

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
2310 MHz	2420 MHz	Max Peak	Coupled	1 MHz	10 Hz

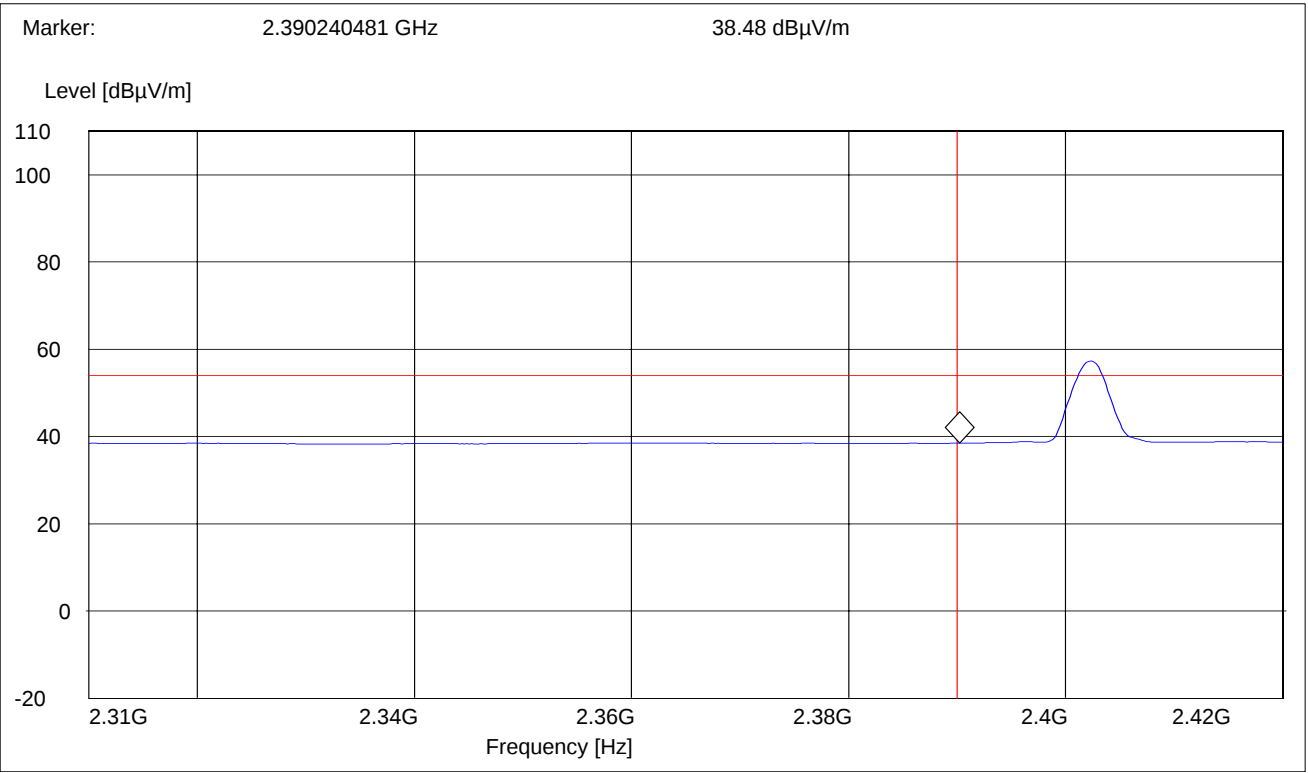




5.2.3 RESULTS (2480MHz)


PEAK

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
2462 MHz	2500 MHz	Max Peak	Coupled	1 MHz	1 MHz

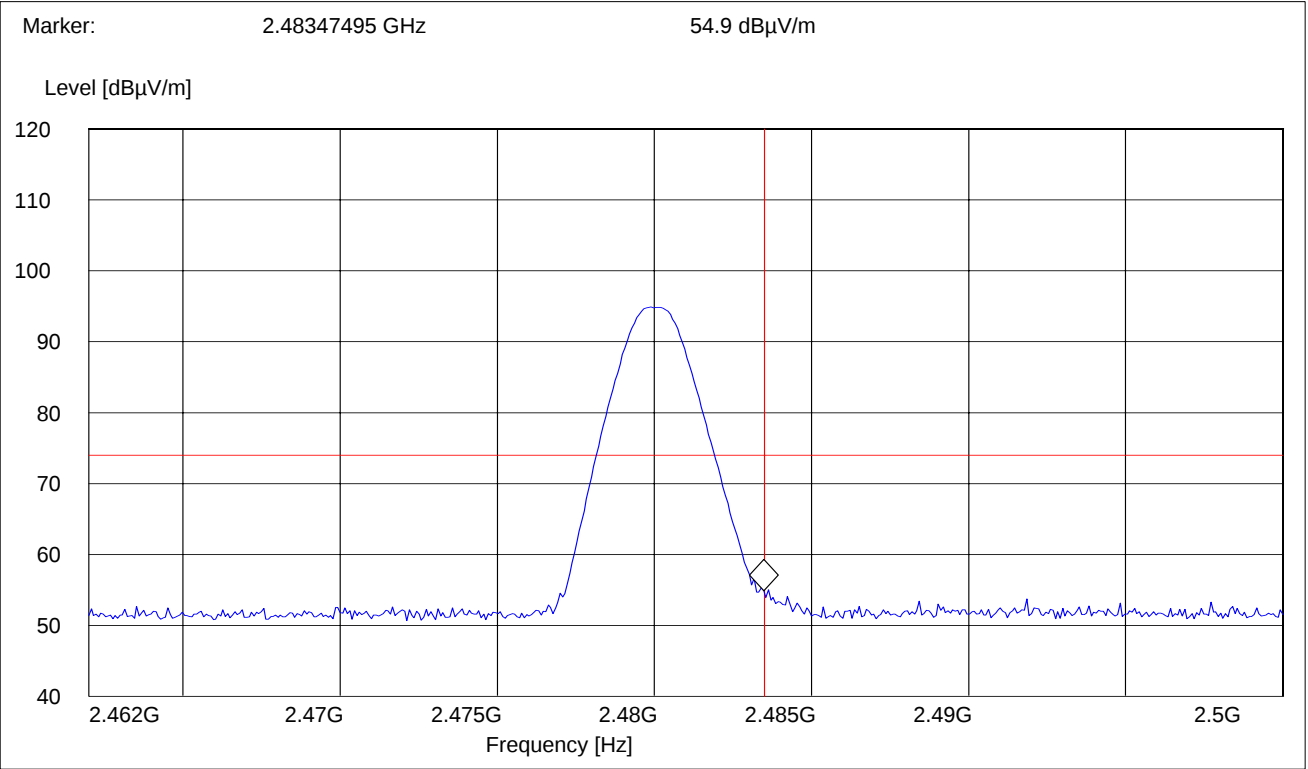

AVG

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
2462 MHz	2500 MHz	Max Peak	Coupled	1 MHz	10 Hz

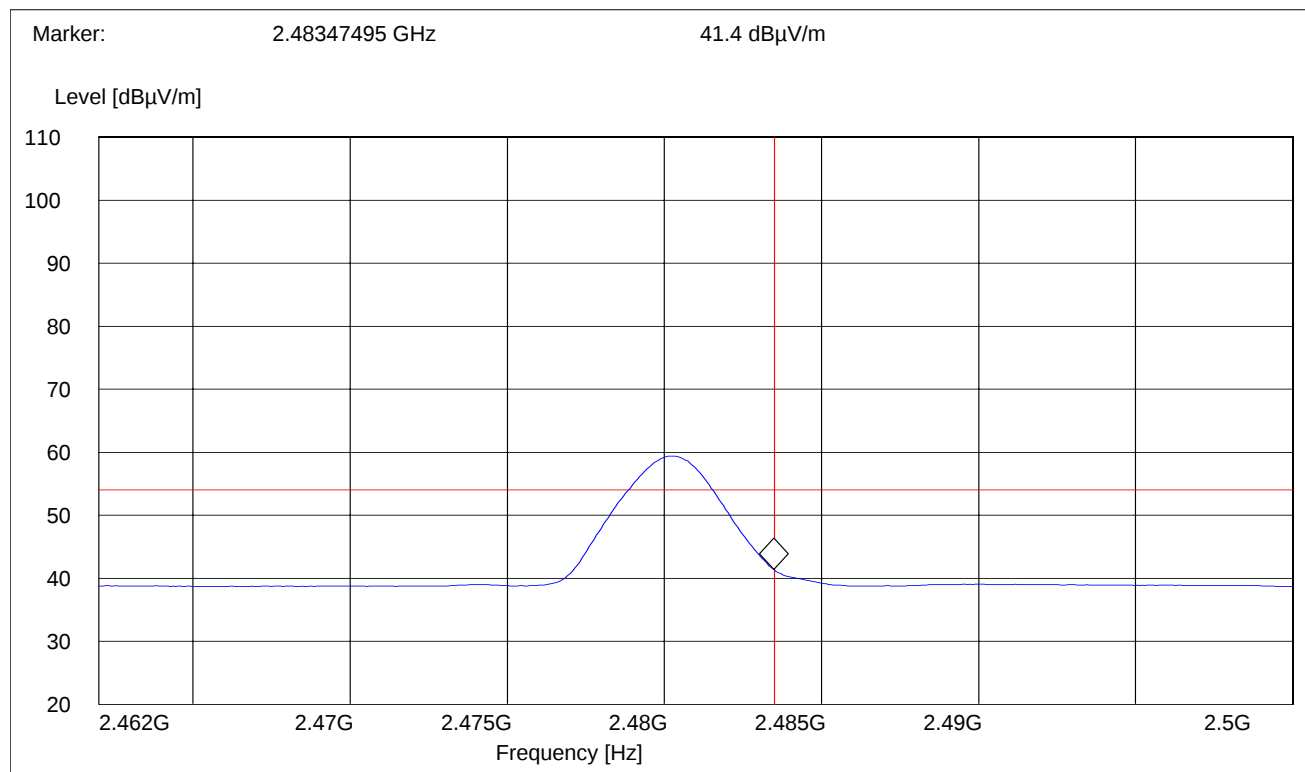

5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209

5.3.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dBuV

*AVG. LIMIT= 54dBuV

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode using an average limit , unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

5.3.2 RESULTS


30MHz – 1GHz

Antenna: vertical

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak reading vs. Quasi-peak limit

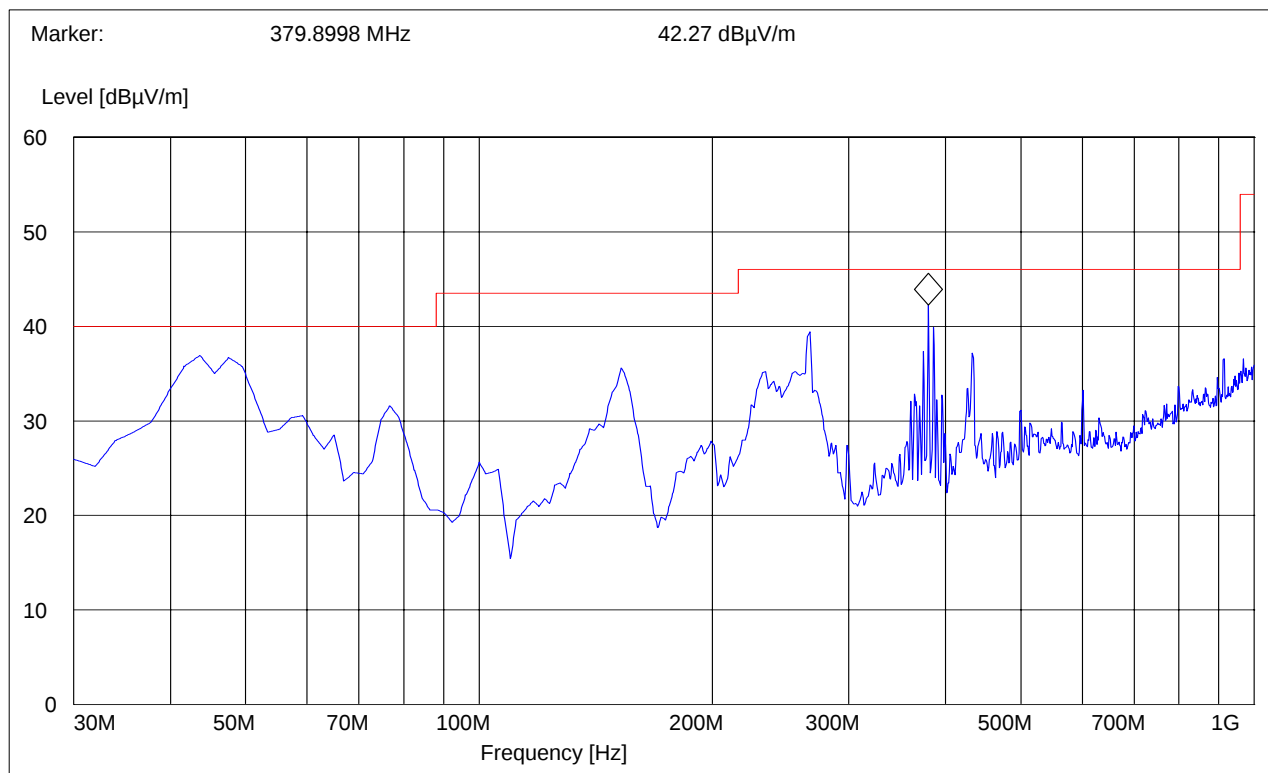


30MHz – 1GHz
Antenna: horizontal

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak reading vs. Quasi-peak limit

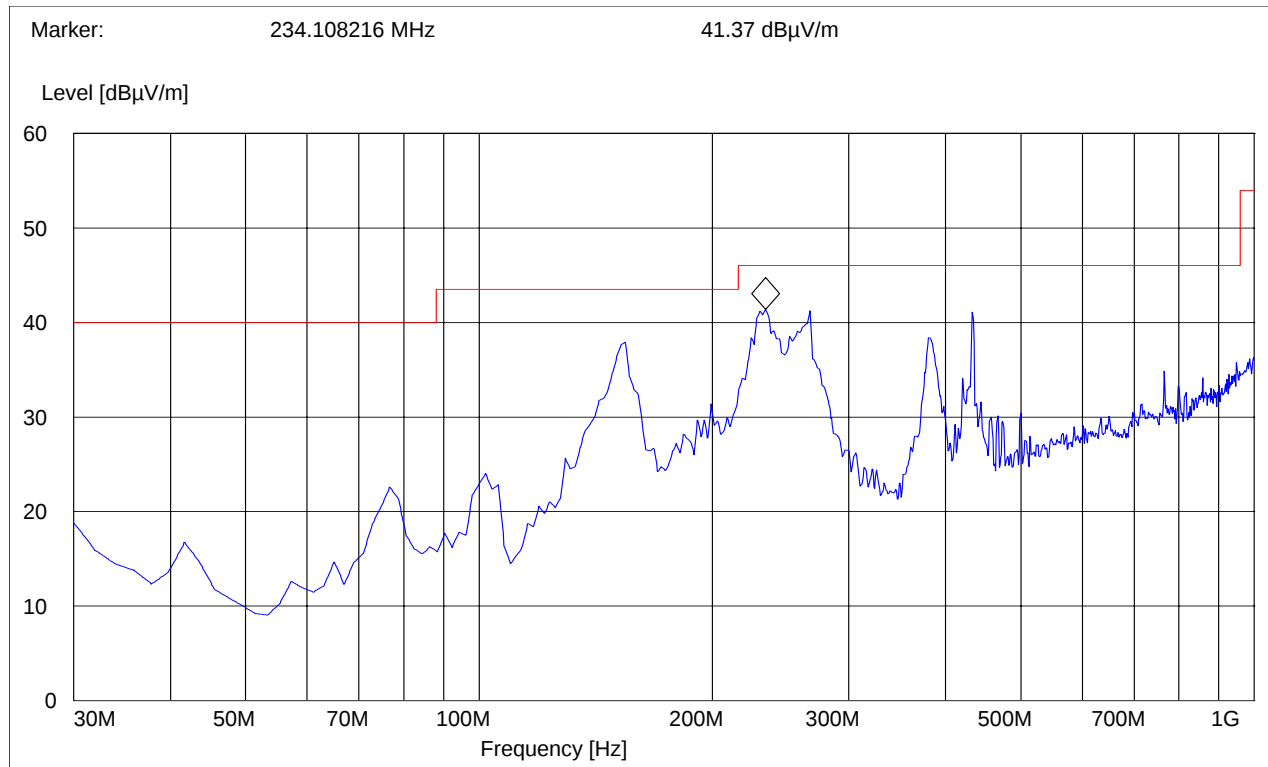


1-3GHz (2402MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: The marker peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit, see next page for Average reading vs. average limit.

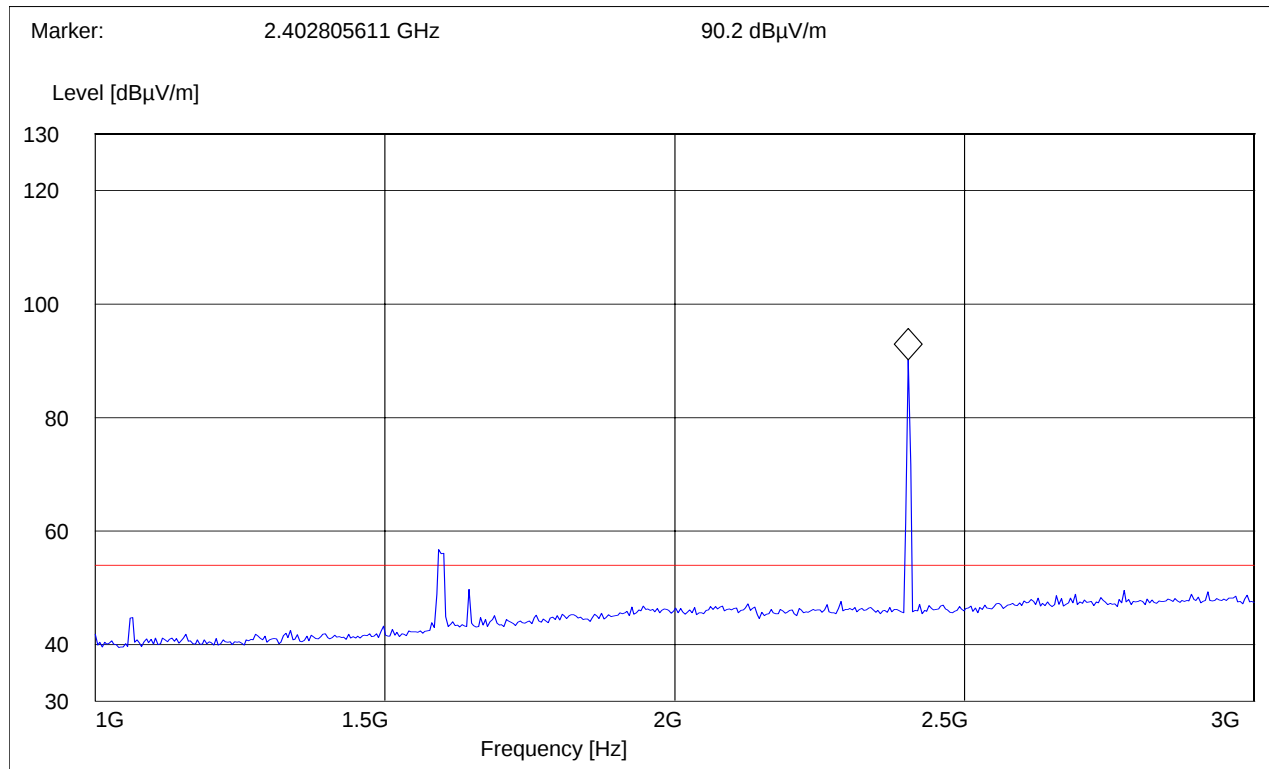


1-3GHz (2402MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	10 Hz

Note: The marker peak above the limit line is the carrier freq.

Note: Average reading vs. average limit.

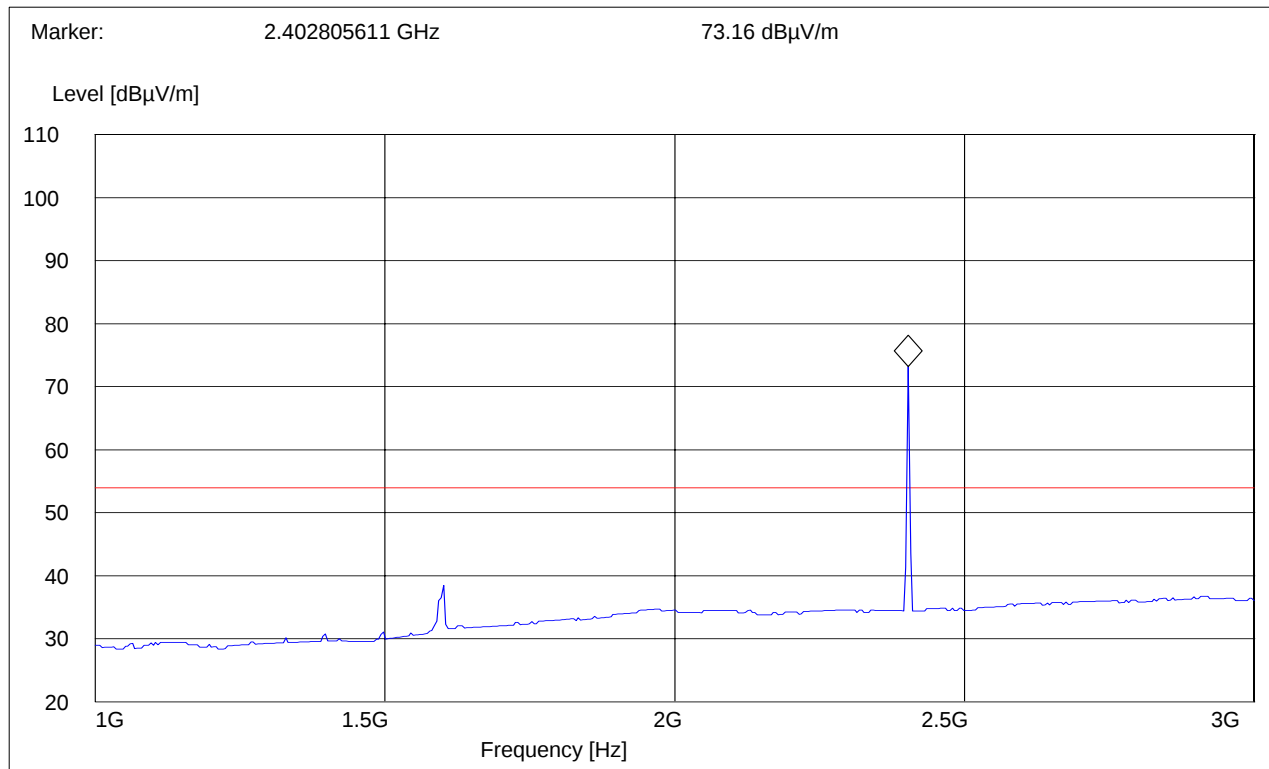


1-3GHz (2441MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: The marker peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit, see next page for Average reading vs. average limit.

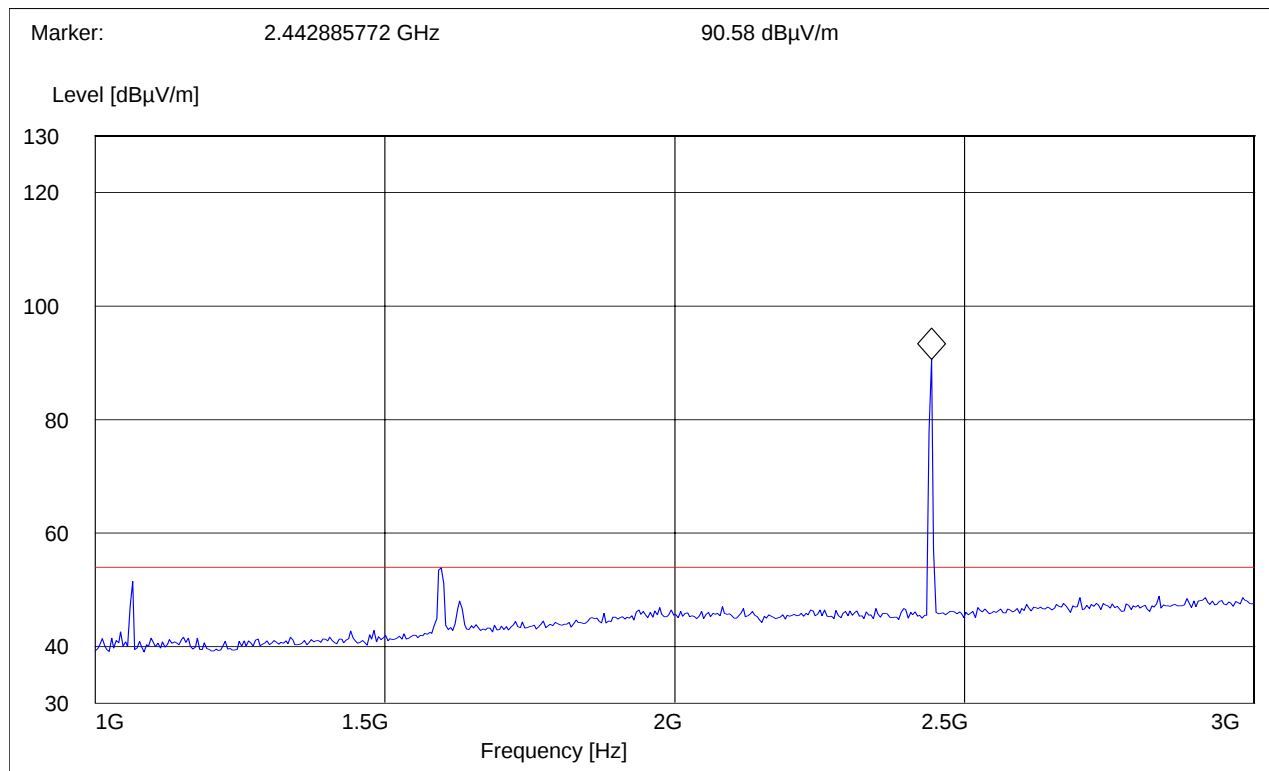


1-3GHz (2441MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	10 Hz

Note: The marker peak above the limit line is the carrier freq.

Note: Average reading vs. average limit.

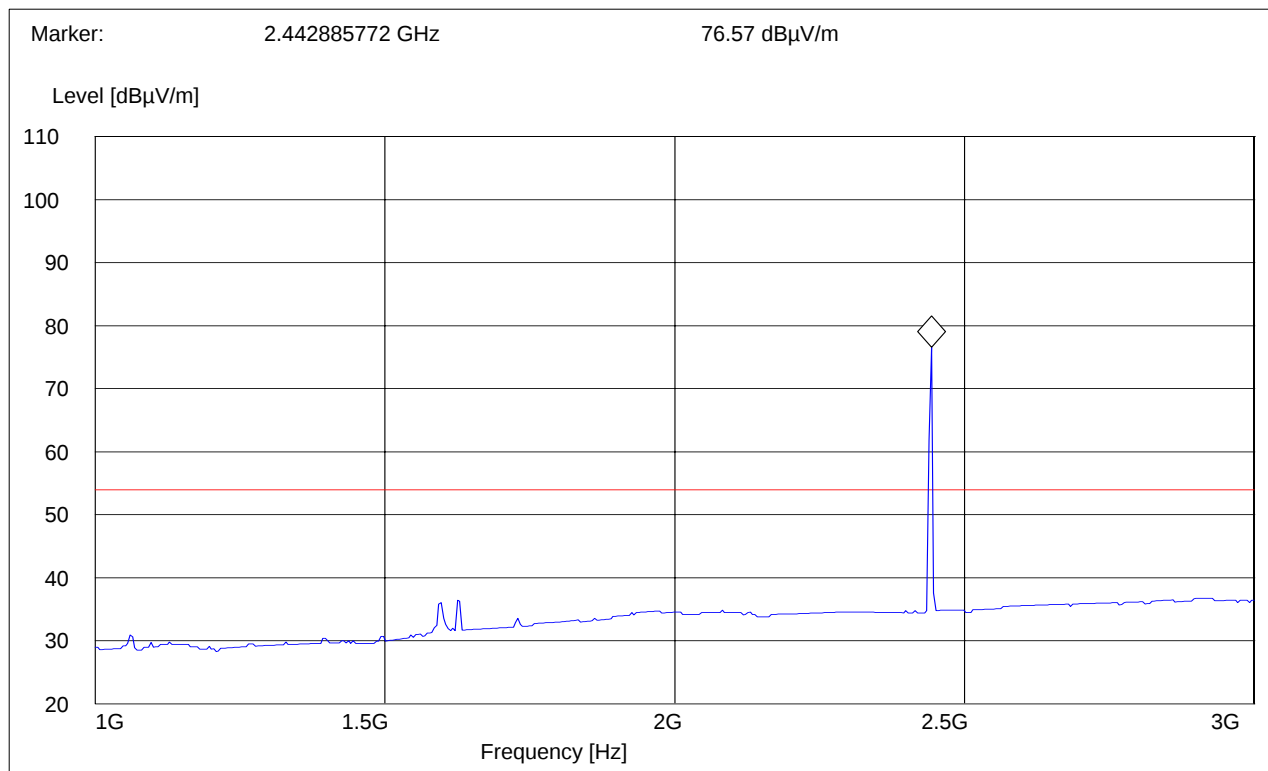


1-3GHz (2480MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: The marker peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit, see next page for Average reading vs. average limit.

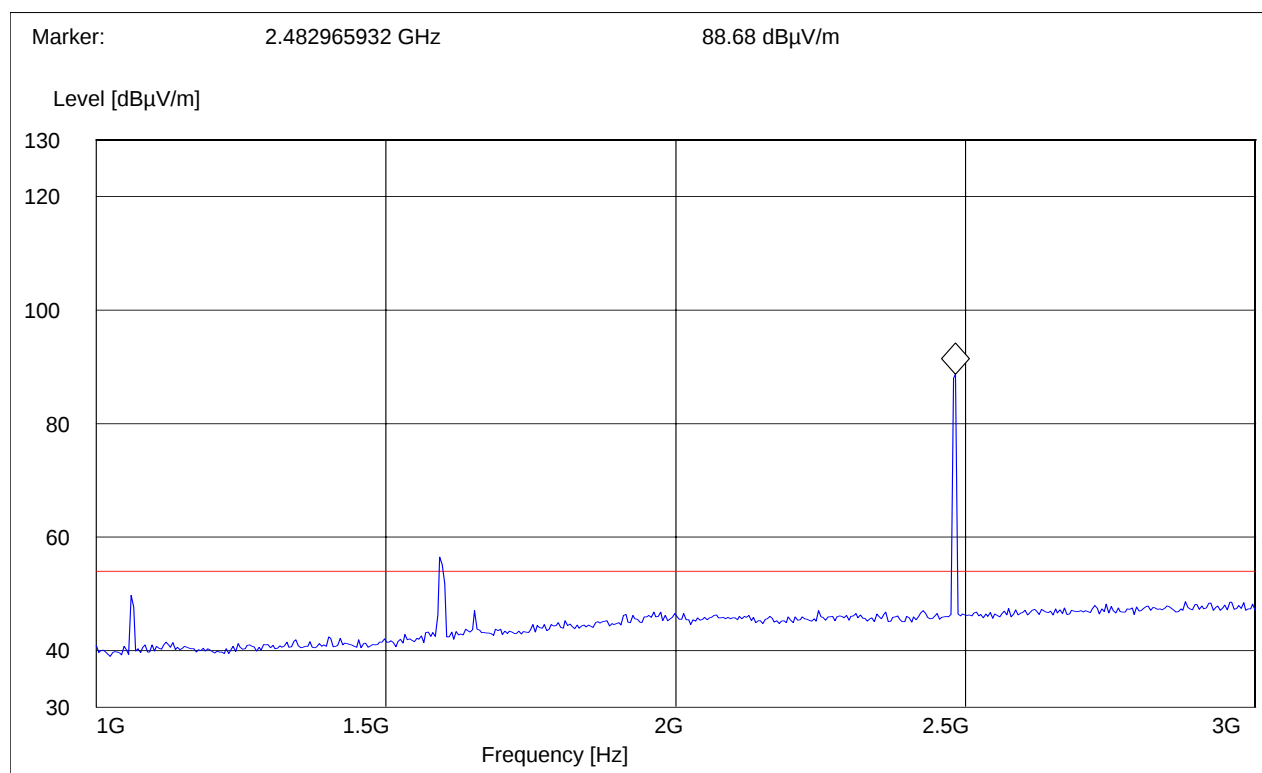


1-3GHz (2480MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	10 Hz

Note: The marker peak above the limit line is the carrier freq.


Note: Average reading vs. average limit.

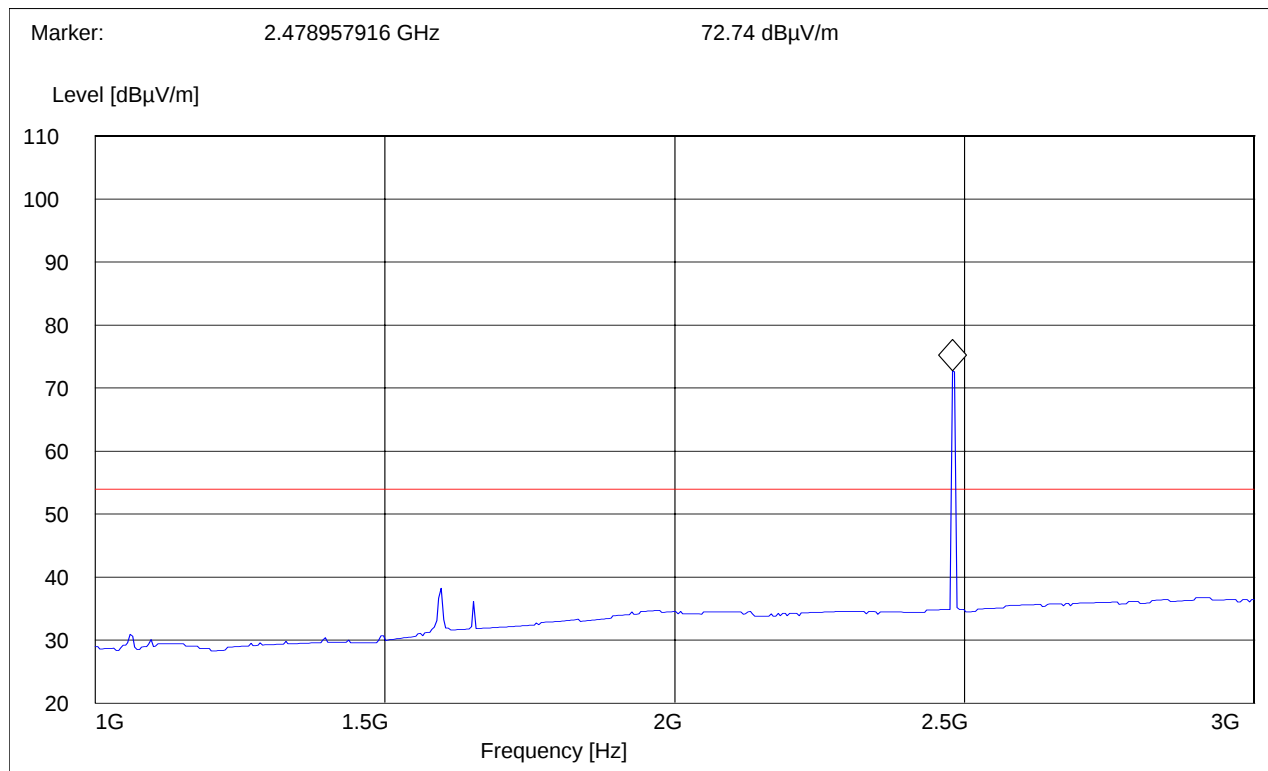

3-18GHz (2402MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz


Note: Peak Reading vs. Average limit, see next page for Average reading vs. Average Limit.

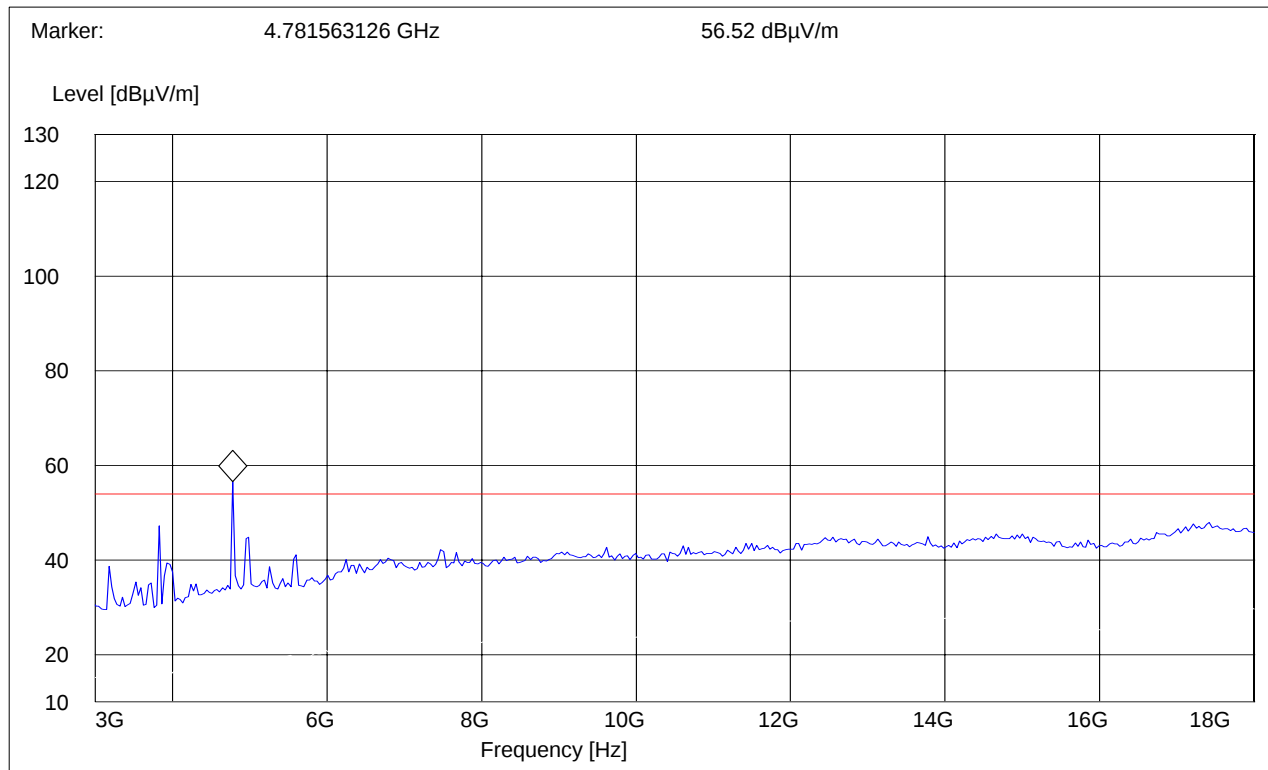

3-18GHz (2402MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz


Note: Average reading vs. Average Limit.

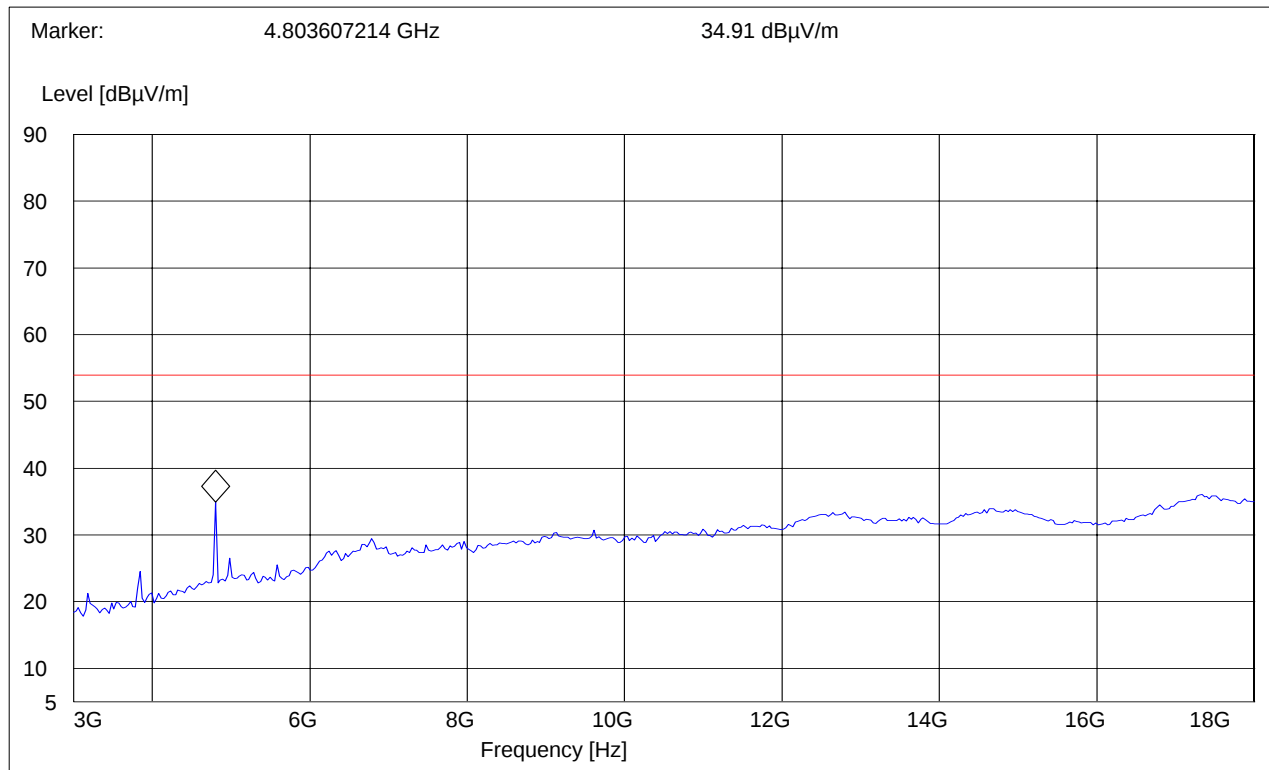

3-18GHz (2441MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz


Note: Peak Reading vs. Average limit, see next page for Average reading vs. Average Limit.

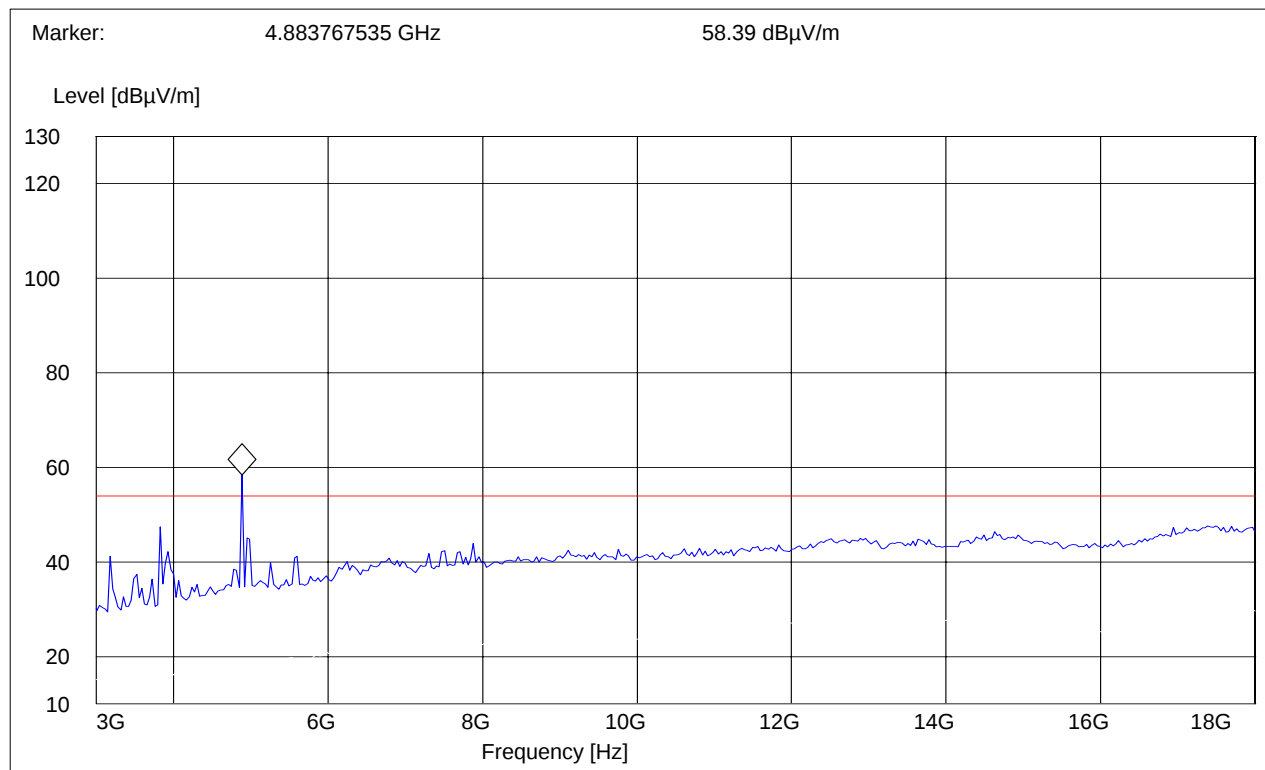

3-18GHz (2441MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz


Note: Average reading vs. Average Limit.

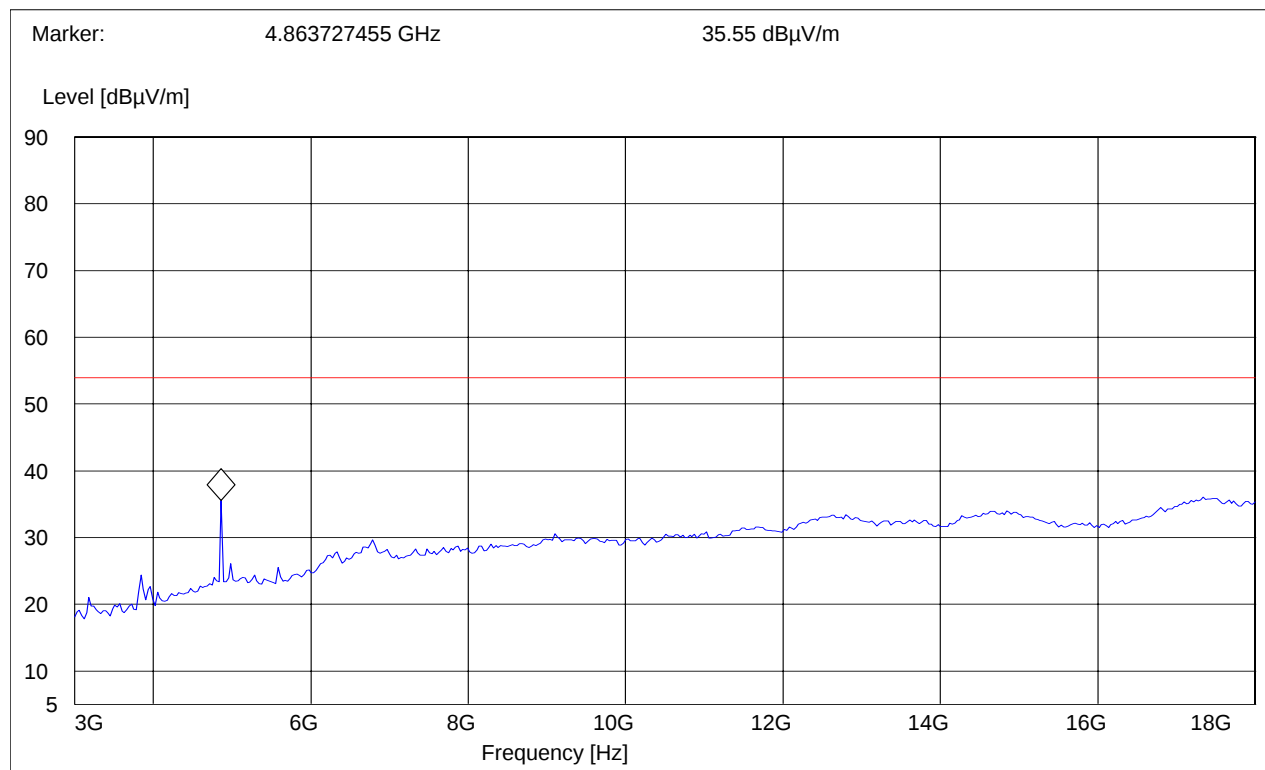

3-18GHz (2480MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz


Note: Peak Reading vs. Average limit, see next page for Average reading vs. Average Limit.

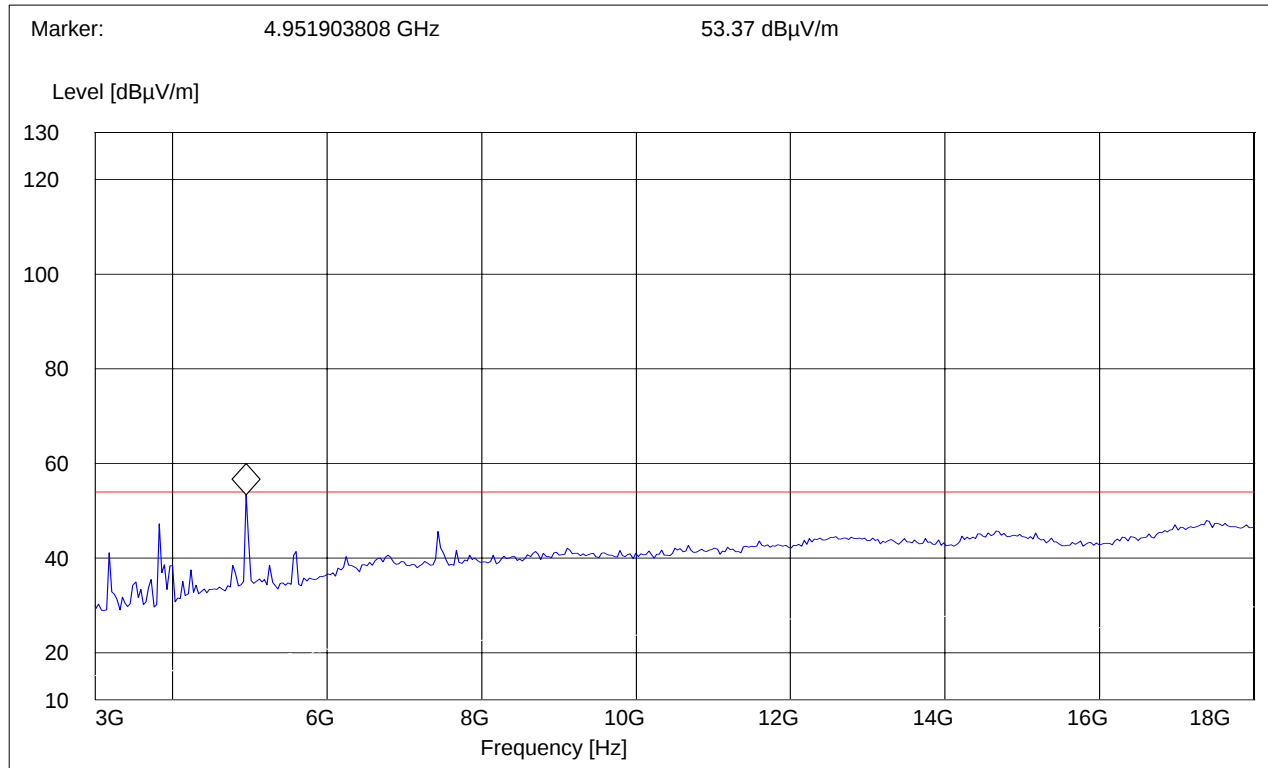

3-18GHz (2480MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz

Note: Average reading vs. Average Limit.

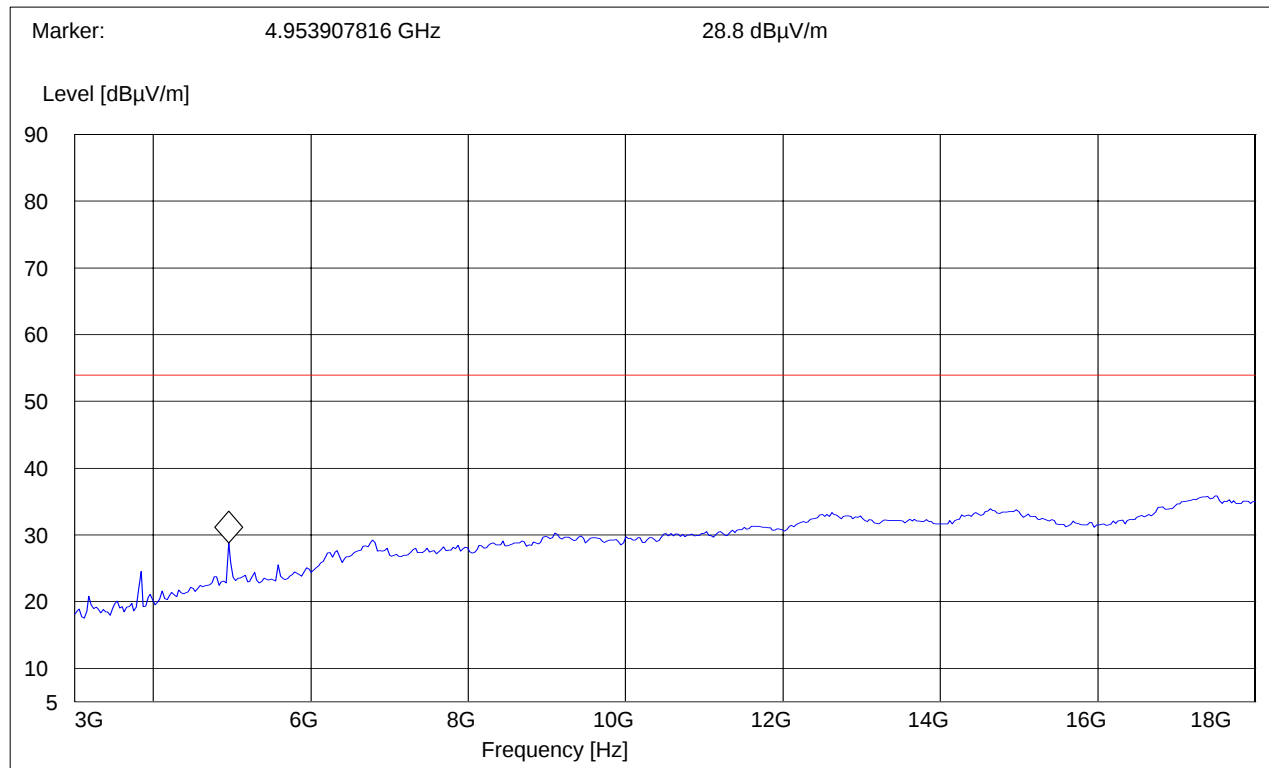


18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	25GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak Reading vs. Average limit

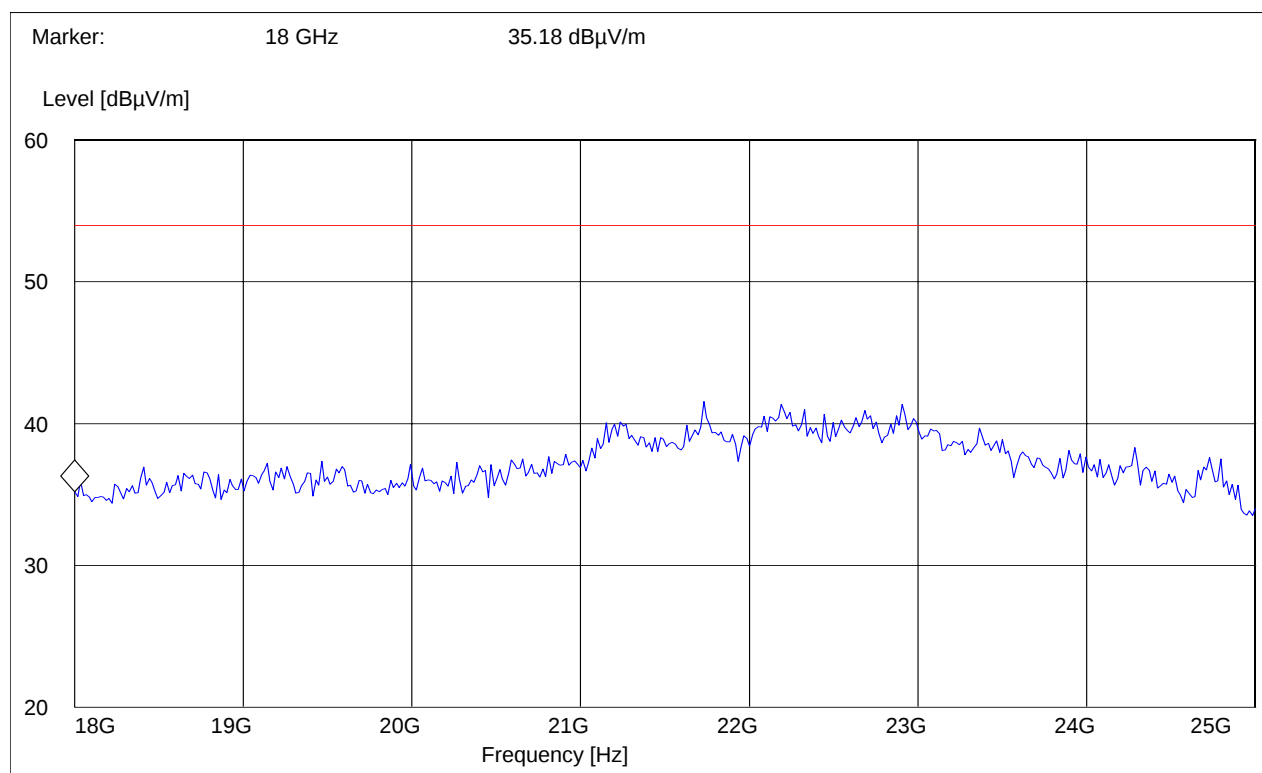

5.4 RECEIVER SPURIOUS RADIATION § 15.209/RSS210

5.4.1 LIMITS

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode using a quasi-peak/average limit , unless specified with the plots.


5.4.2 RESULTS

30MHz – 1GHz

Antenna: vertical

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz


Note: Peak Reading vs. Quasi-peak limit

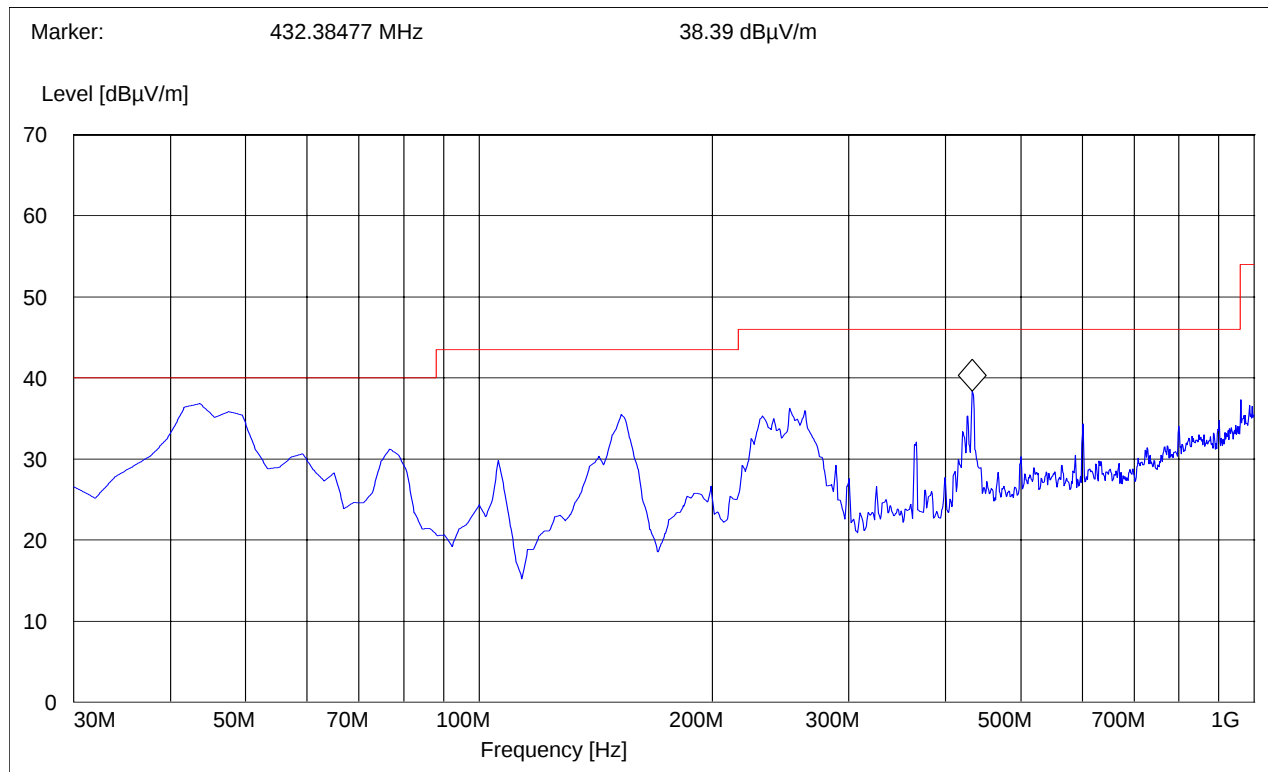

30MHz – 1GHz
Antenna: horizontal

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz


Note: Peak Reading vs. Quasi-peak limit

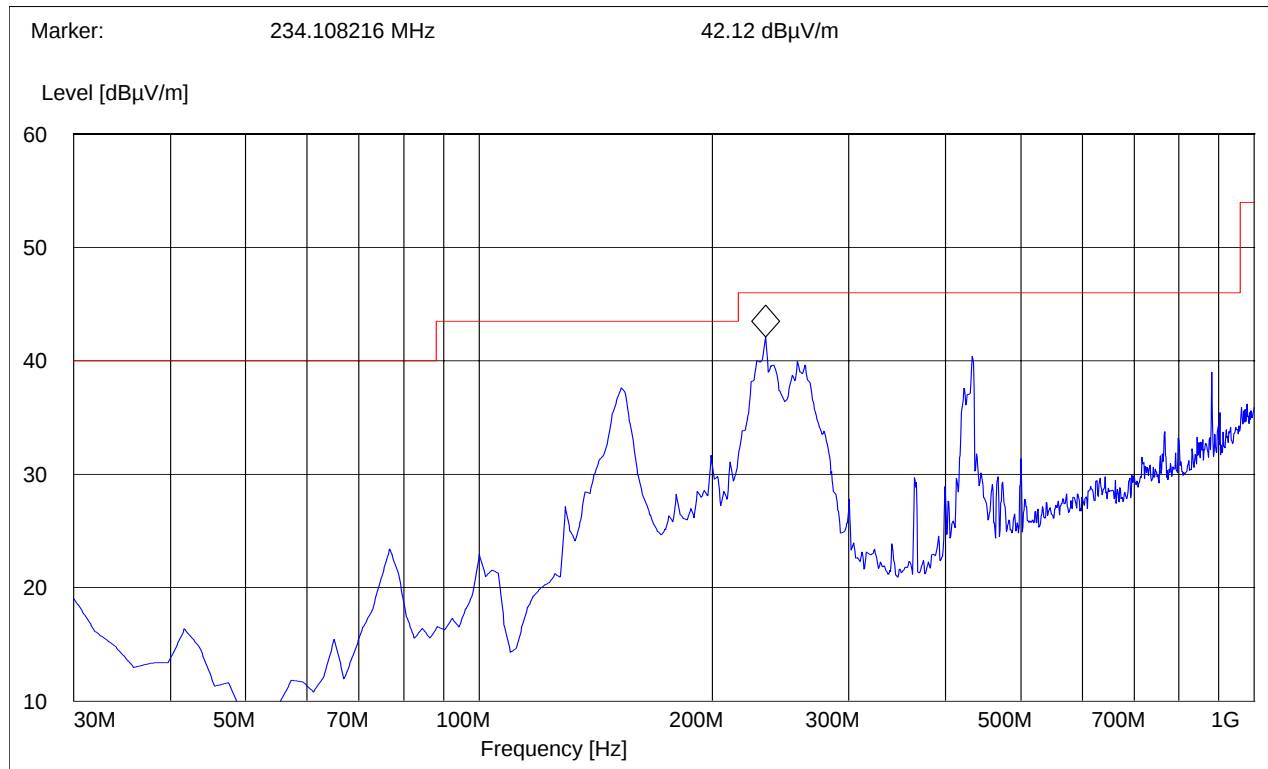

1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz


Note: Peak Reading vs. Average limit

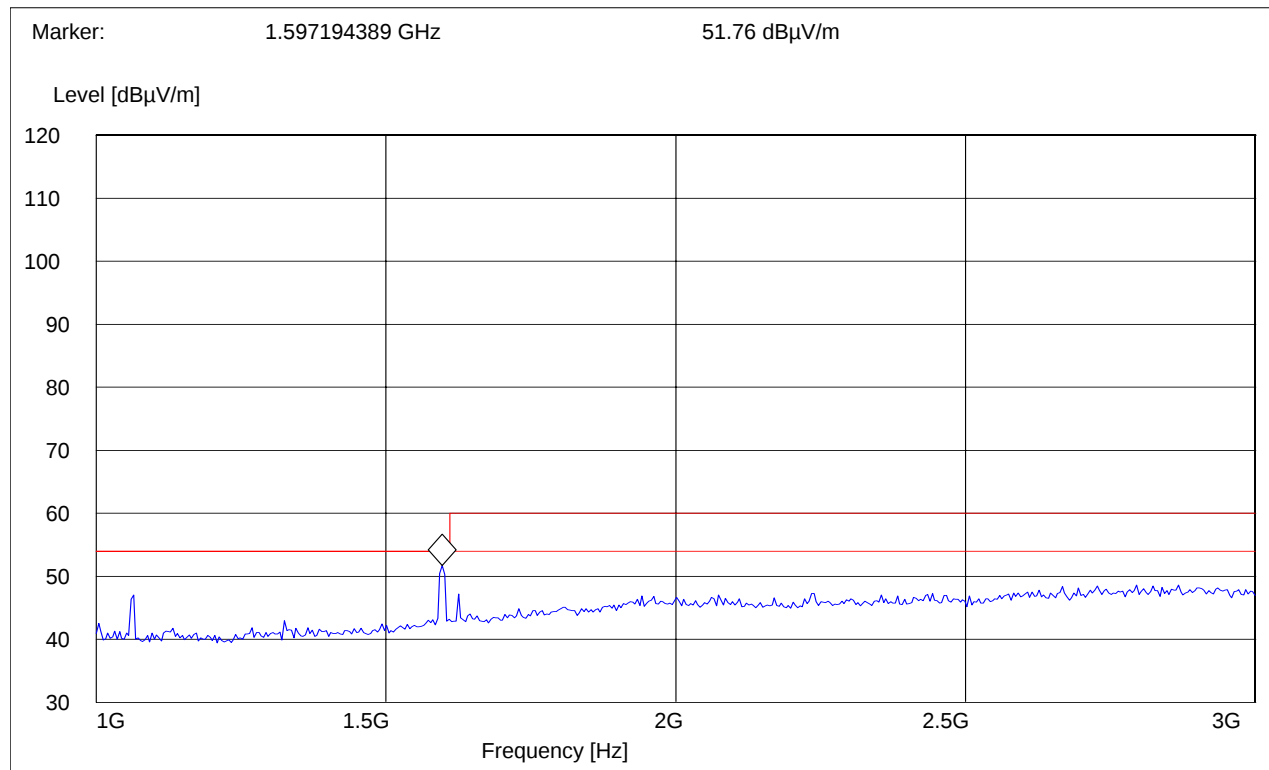

3-18GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz


Note: Peak Reading vs. Average limit

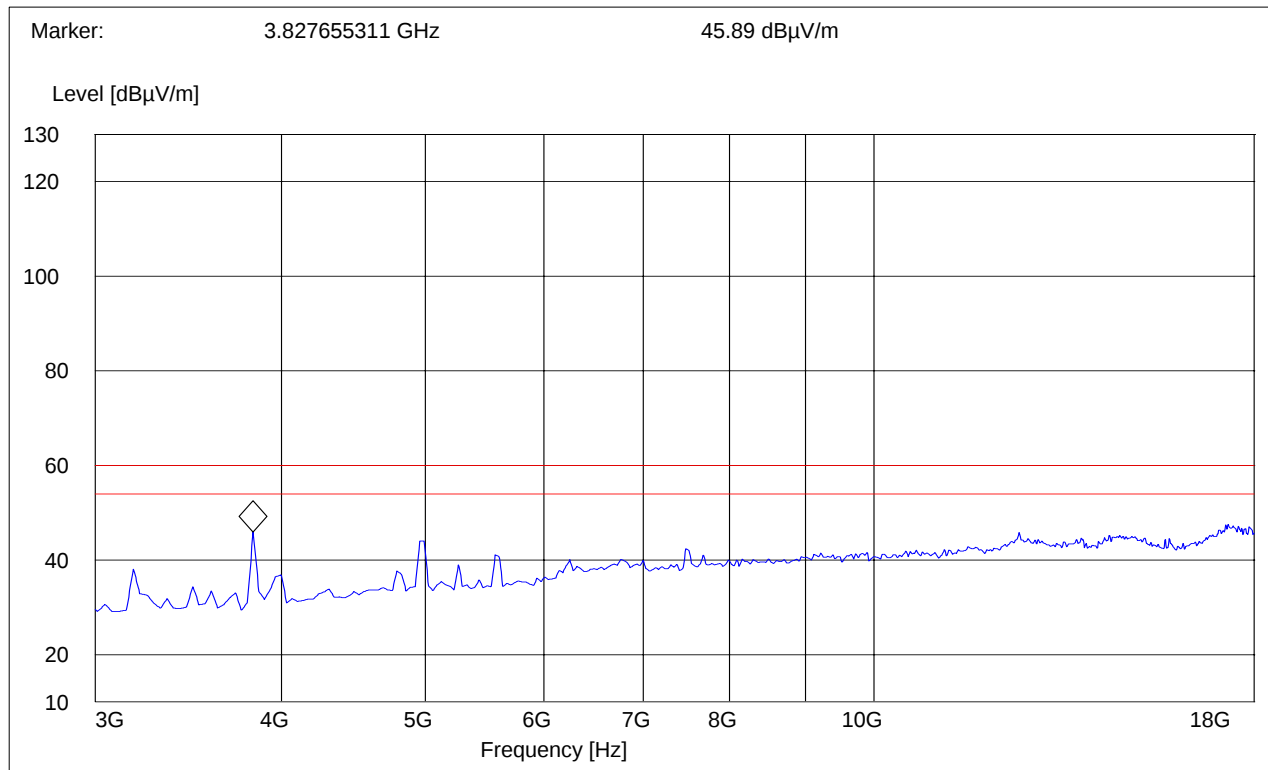

18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	25GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit

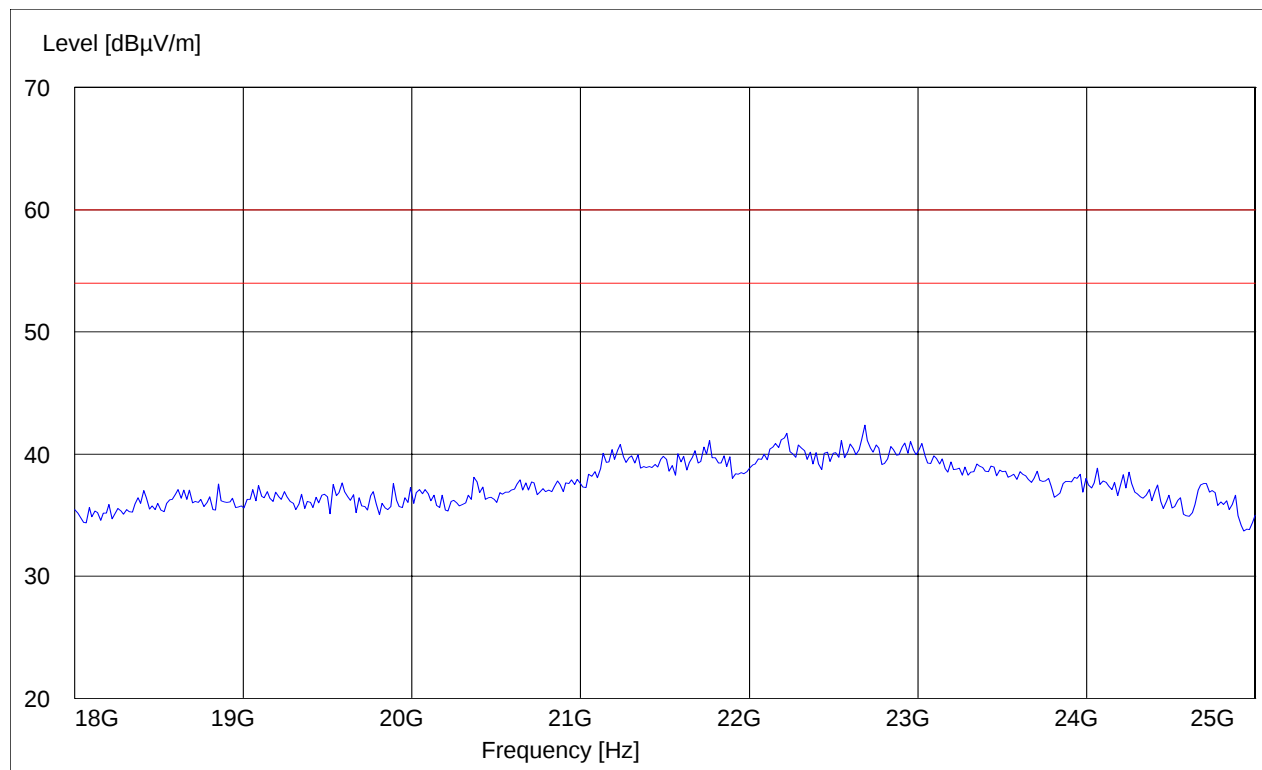

5.5 CO-LOCATION

All Co-location testing was performed with the EUT transmitting in WLAN b mode (2412MHz) and the EUT transmitting in Bluetooth mode(2441MHz).

All Co-location testing was also performed with the EUT transmitting in the PCS band (1880MHz) and the EUT transmitting in Bluetooth mode(2441MHz).

These channels were deemed worst case due to there EIRP readings. All testing was performed using FCC 15.247 procedures/limits.


5.5.1 RESULTS (WLAN AND BLUETOOTH)

30MHz – 1GHz

Antenna: vertical


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: Peak Reading vs. Quasi-peak limit

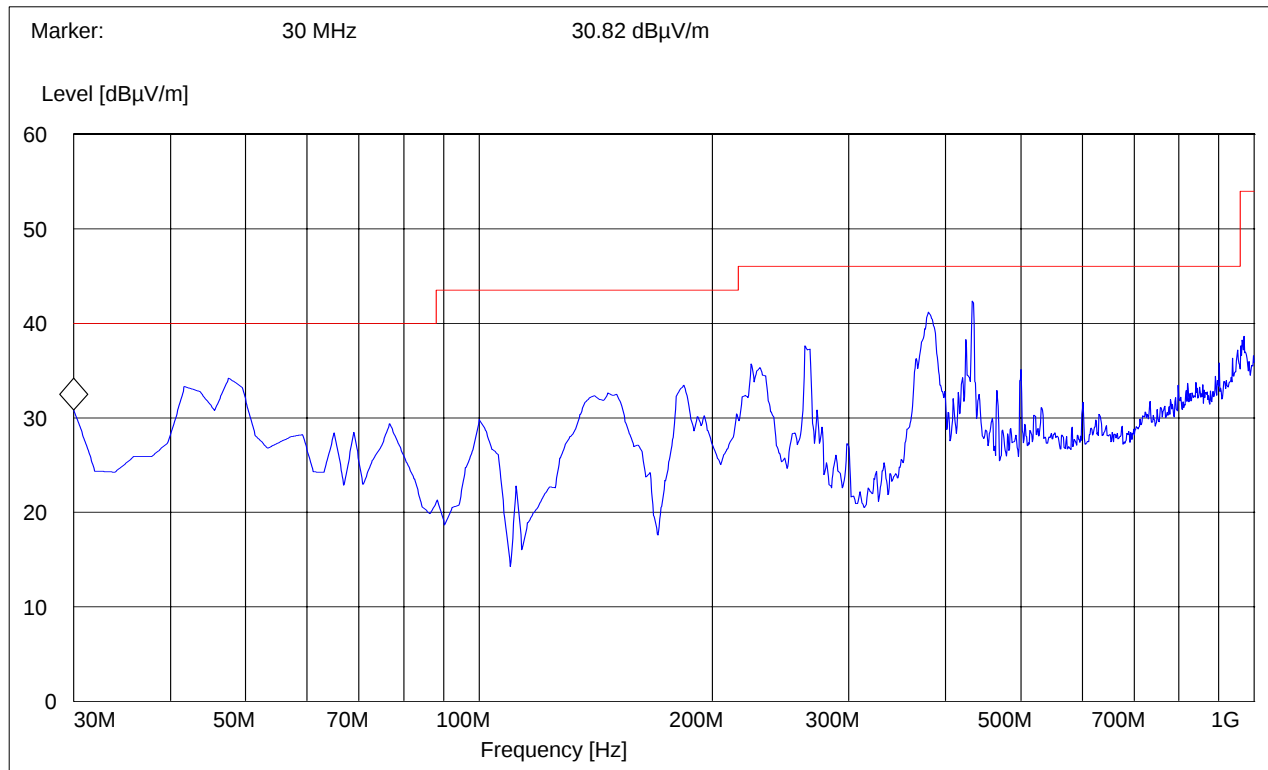

30MHz – 1GHz**Antenna: horizontal**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

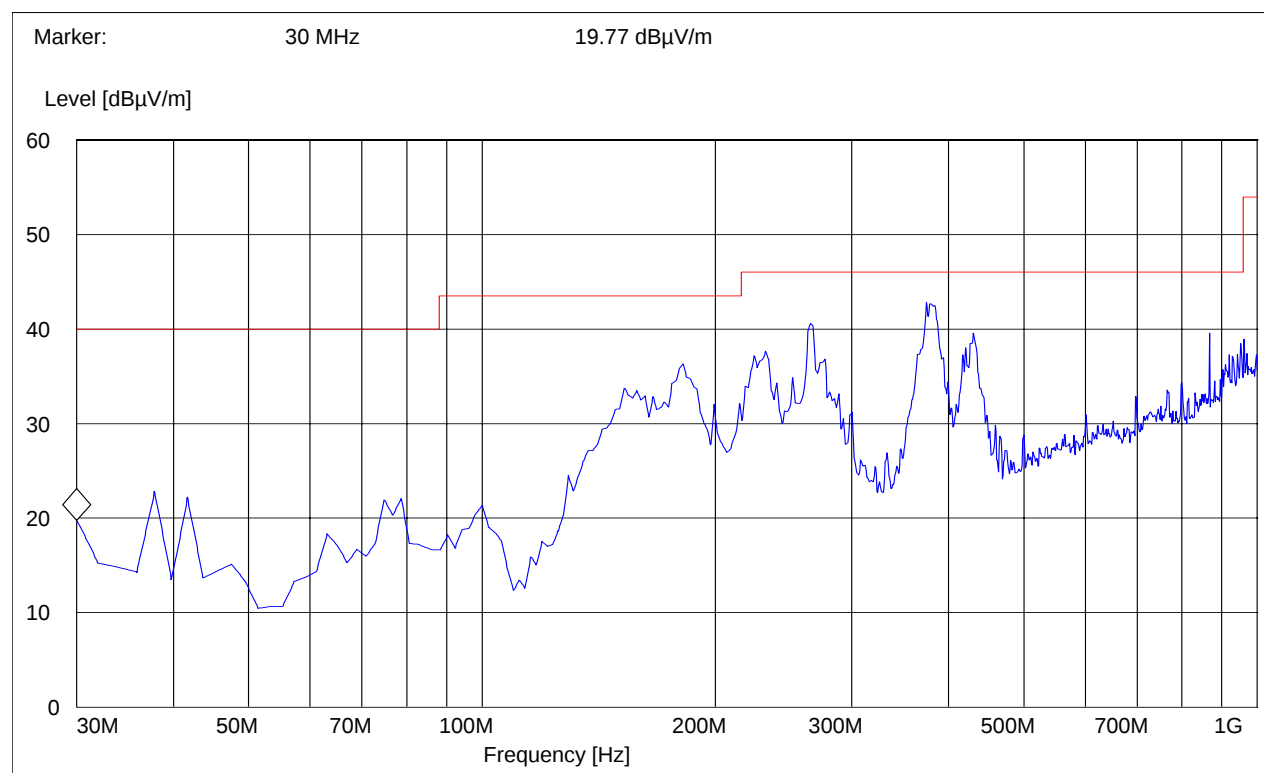
Note: Peak Reading vs. Quasi-peak limit

1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: The peaks above the limit line is the carrier freq of the Bluetooth and WLAN transmitter.


Note: Peak Reading vs. Average limit

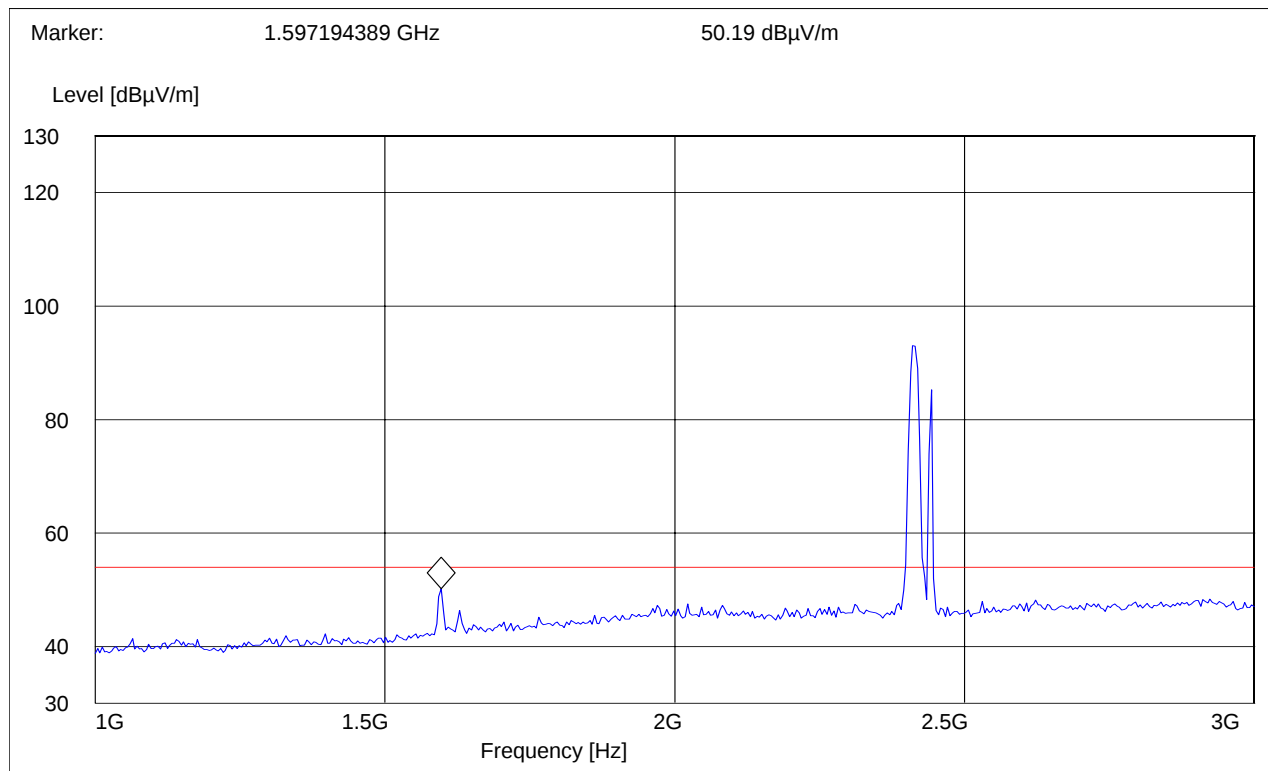

3-18GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz


Note: Peak Reading vs. Average limit, see next page for Average reading vs. Average limit.

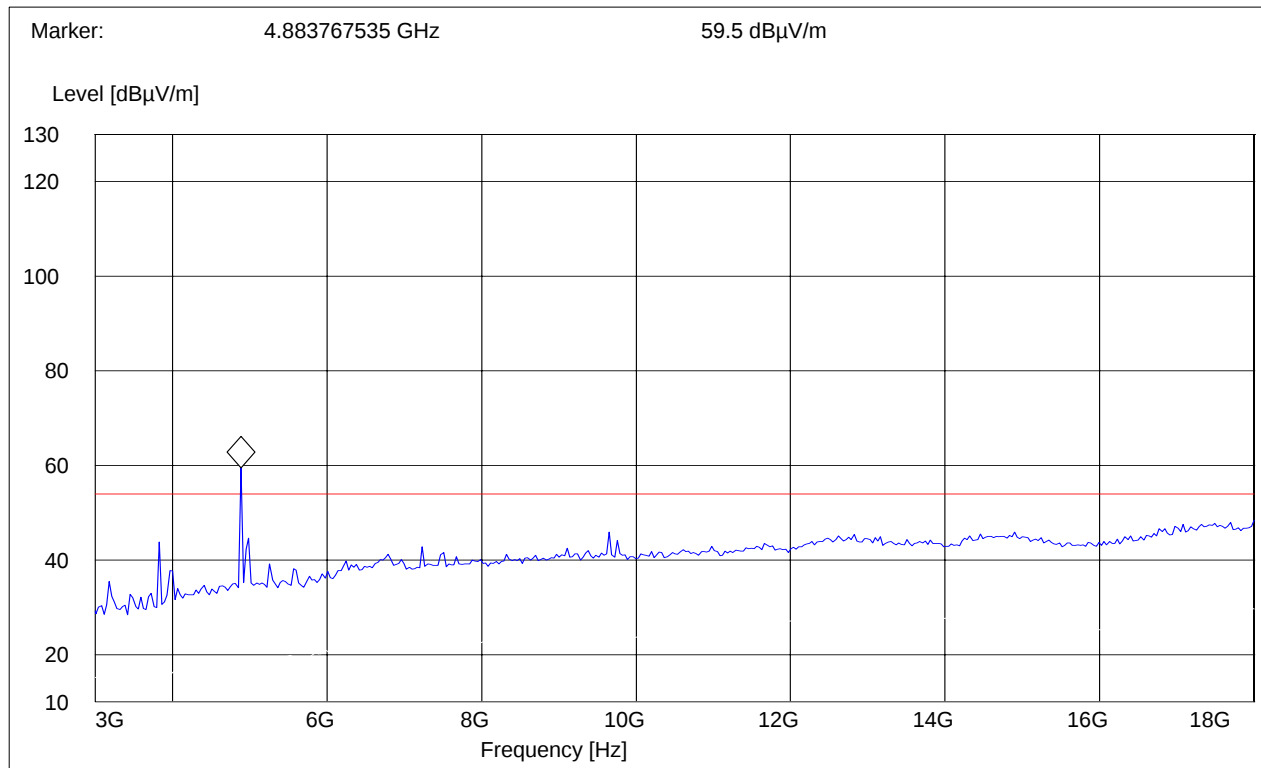

3-18GHz


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz

Note: Average Reading vs. Average limit

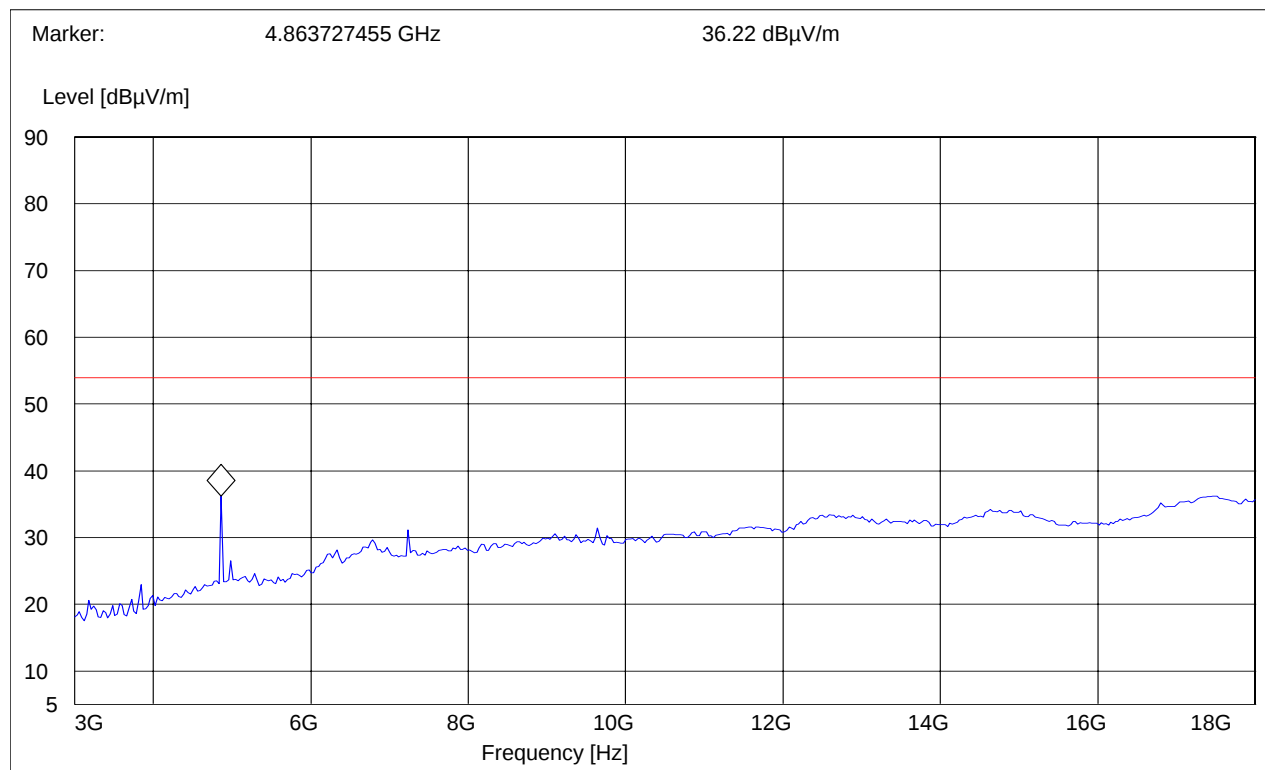

18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	25GHz	Max Peak	Coupled	1 MHz	1 MHz

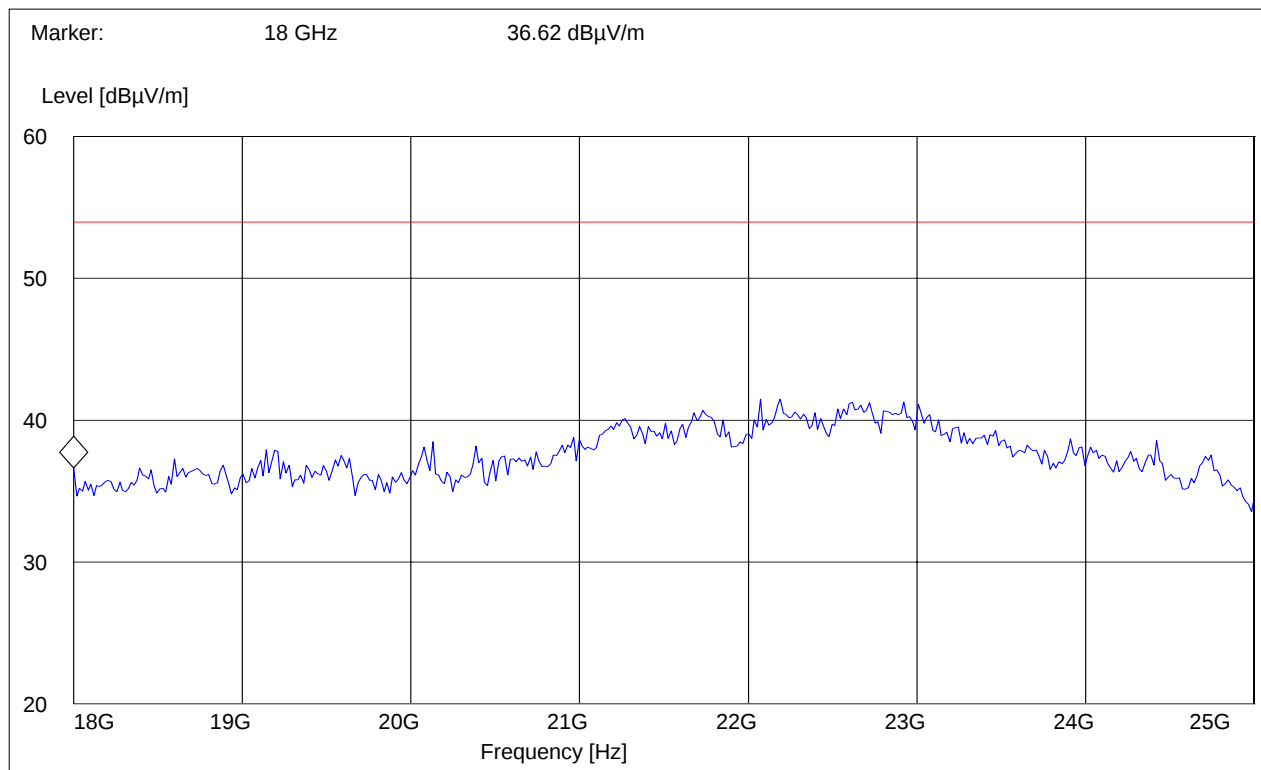Note: Peak Reading vs. Average limit


5.5.2 RESULTS (PCS AND BLUETOOTH)

30MHz – 1GHz

Antenna: vertical

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz


Note: Peak Reading vs. Quasi-Peak Limit

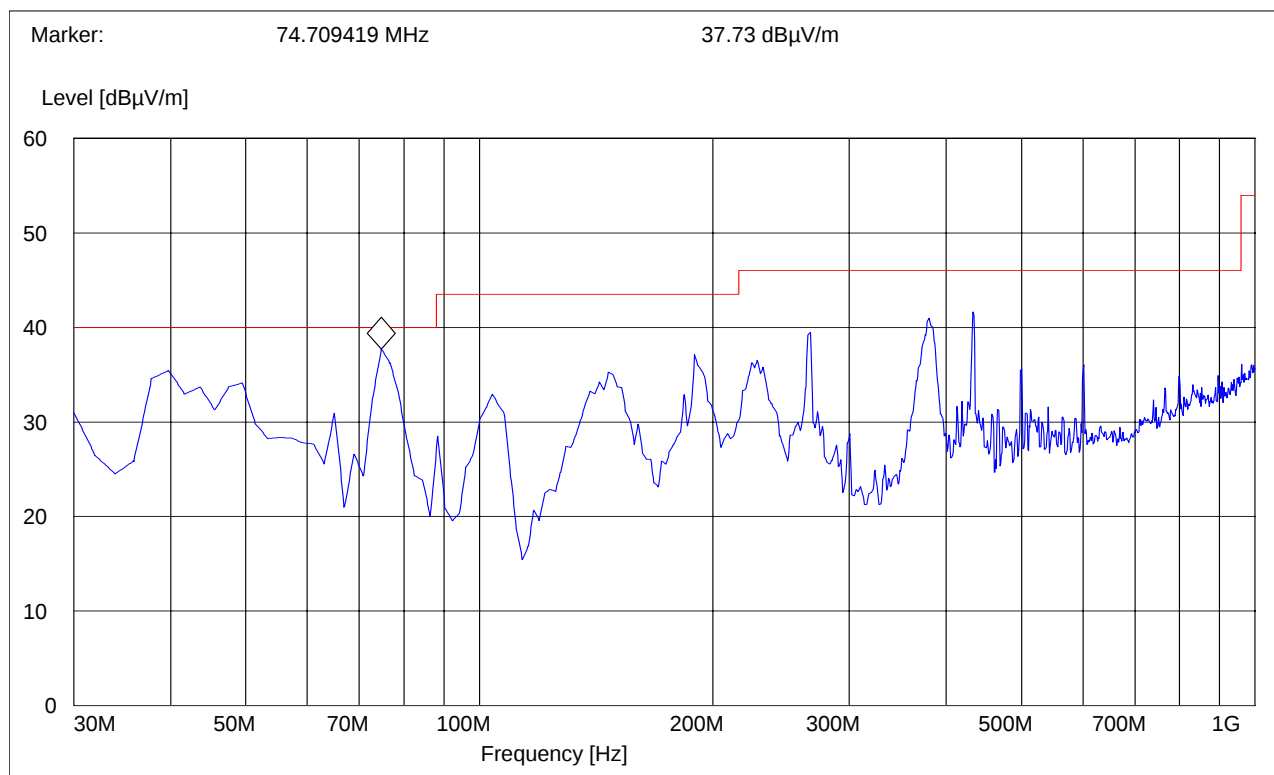

30MHz – 1GHz
Antenna: horizontal

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: Peak Reading vs. Quasi-Peak Limit

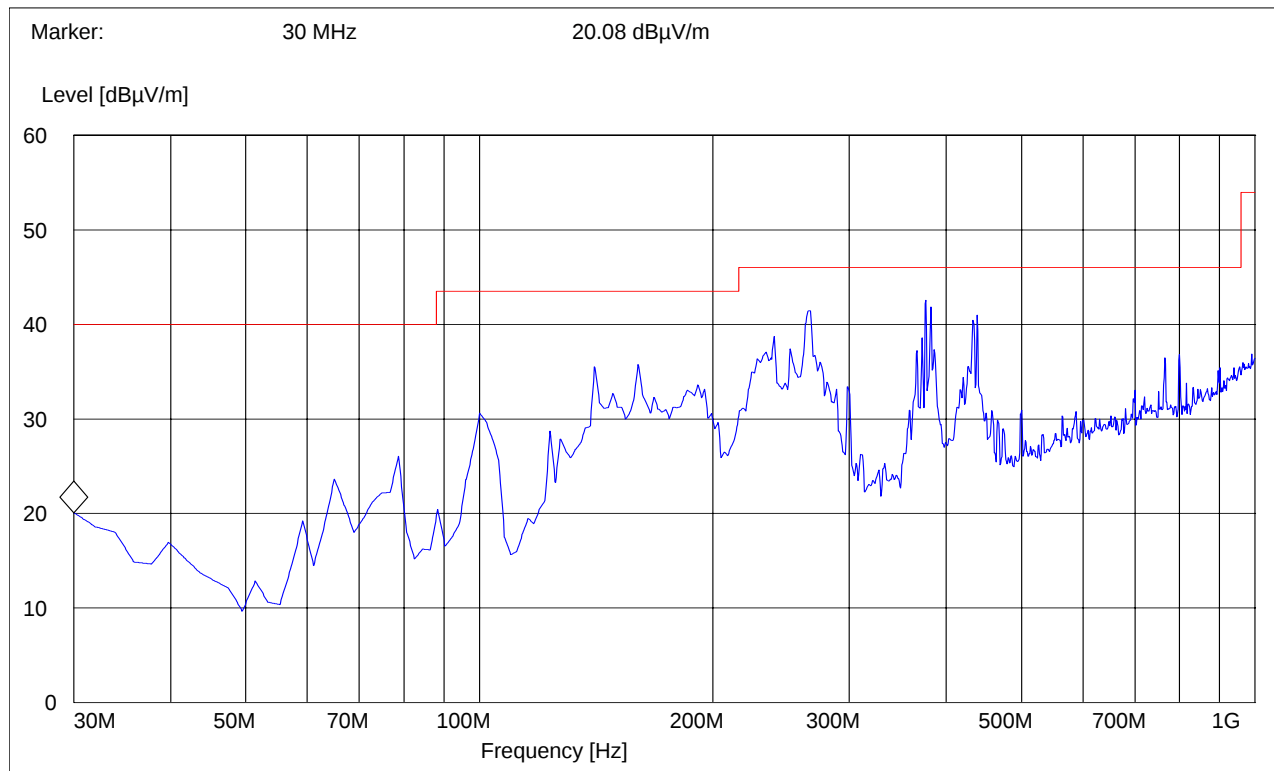


1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: The peaks above the limit line is the carrier freq of the Bluetooth and PCS transmitter.


Note: Peak Reading vs. Average limit

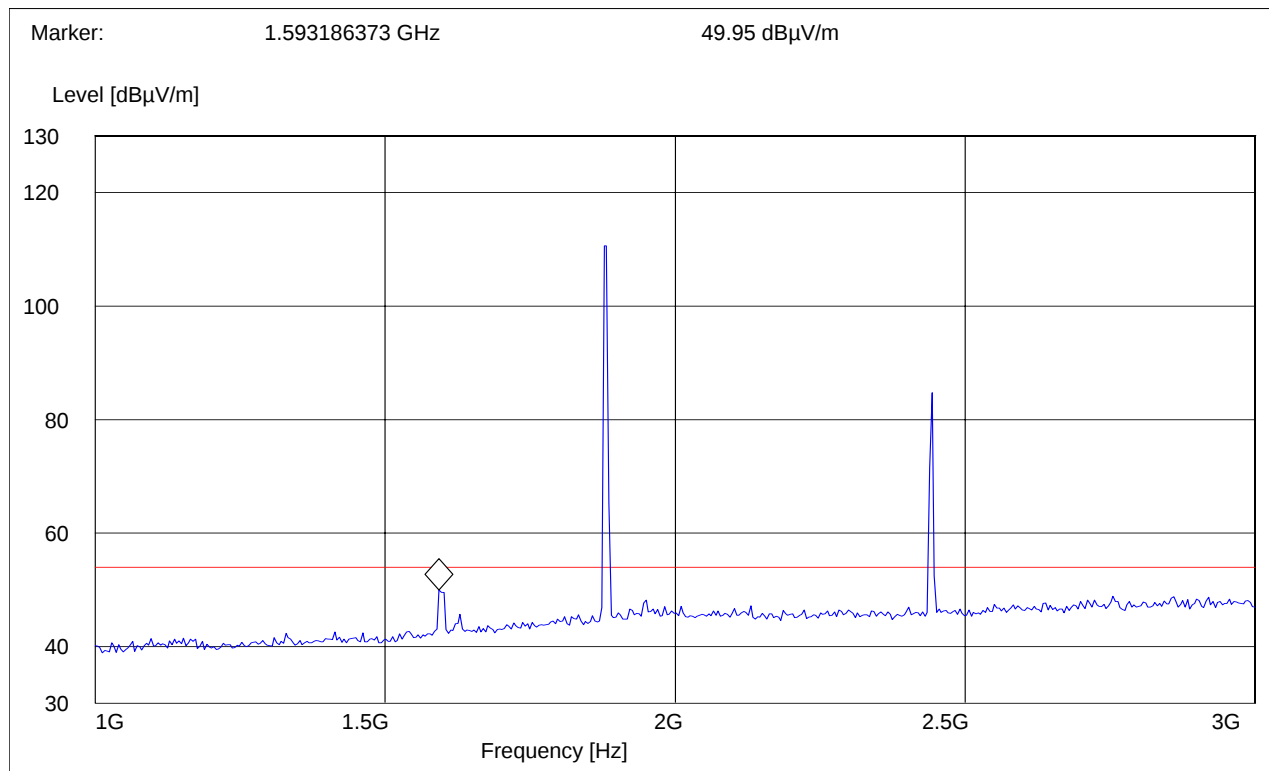

3-18GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz


Note: Peak Reading vs. Average limit, see next page for Average reading vs. Average limit.

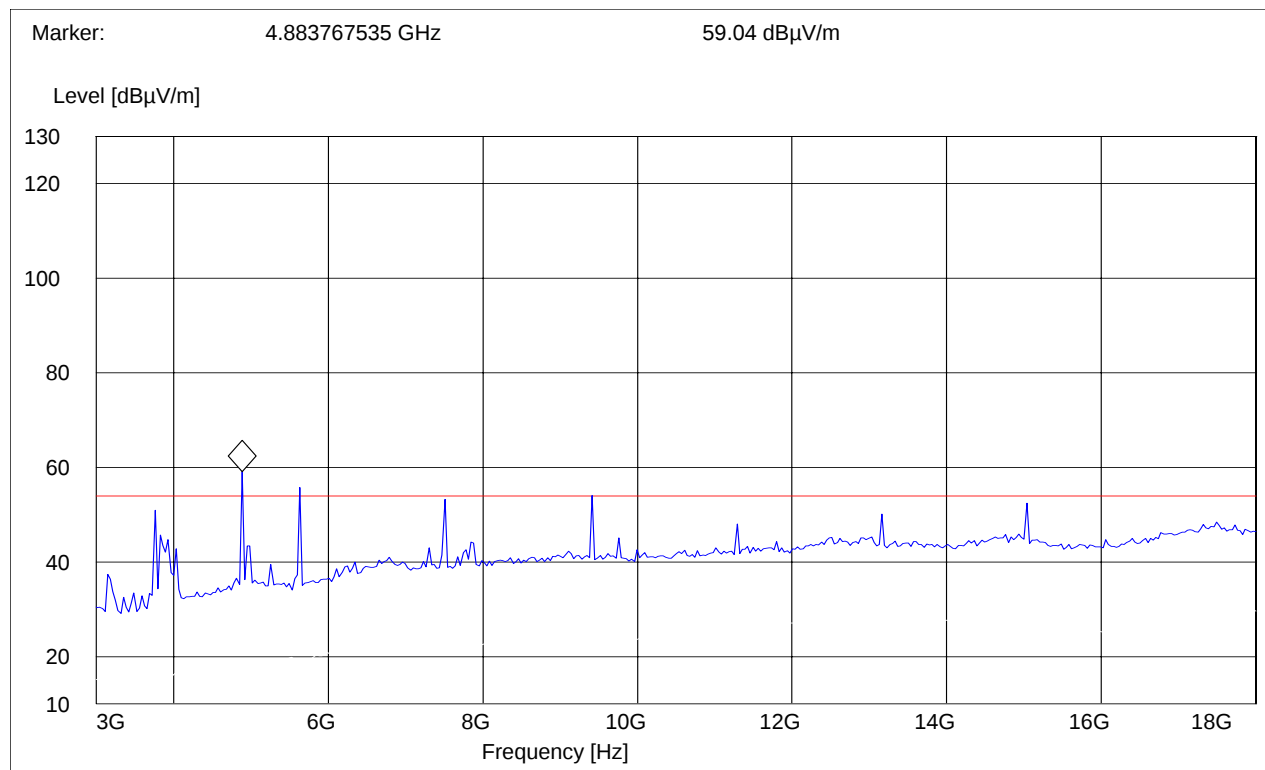

3-18GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz


Note: Average Reading vs. Average limit

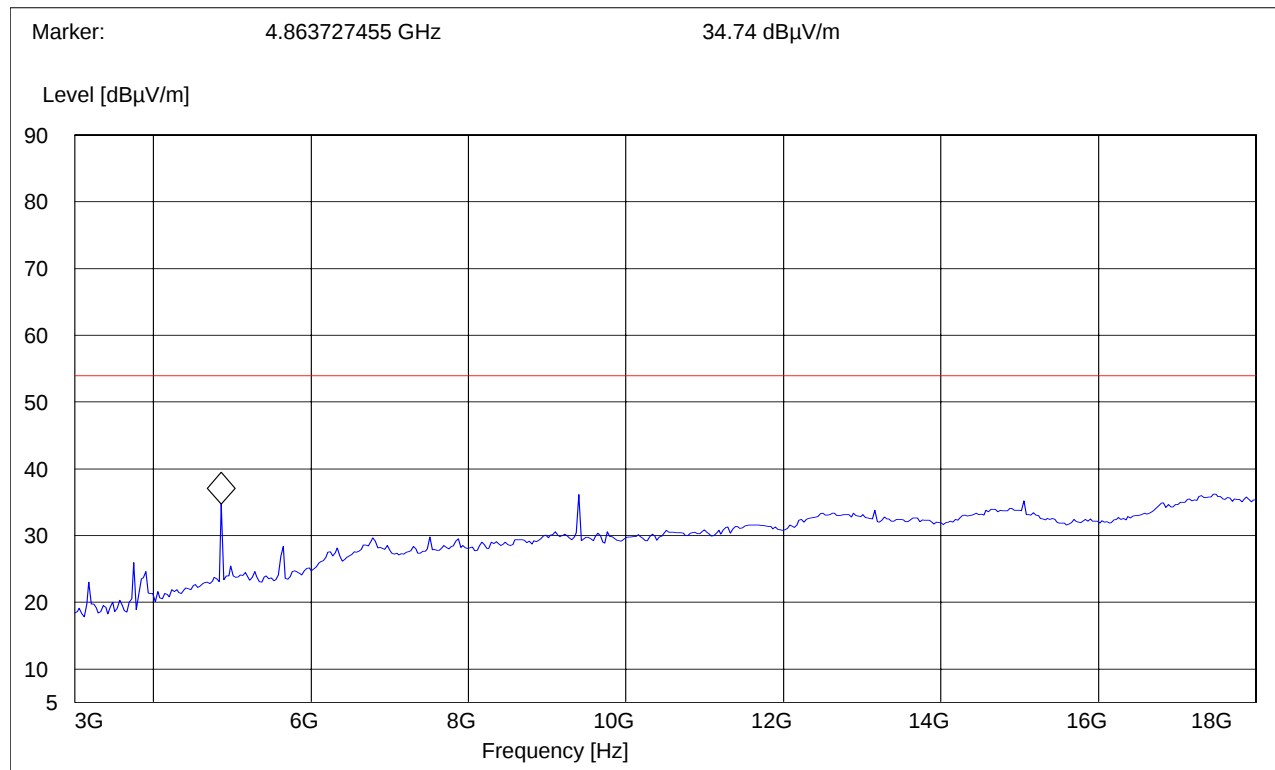

18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	25GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit

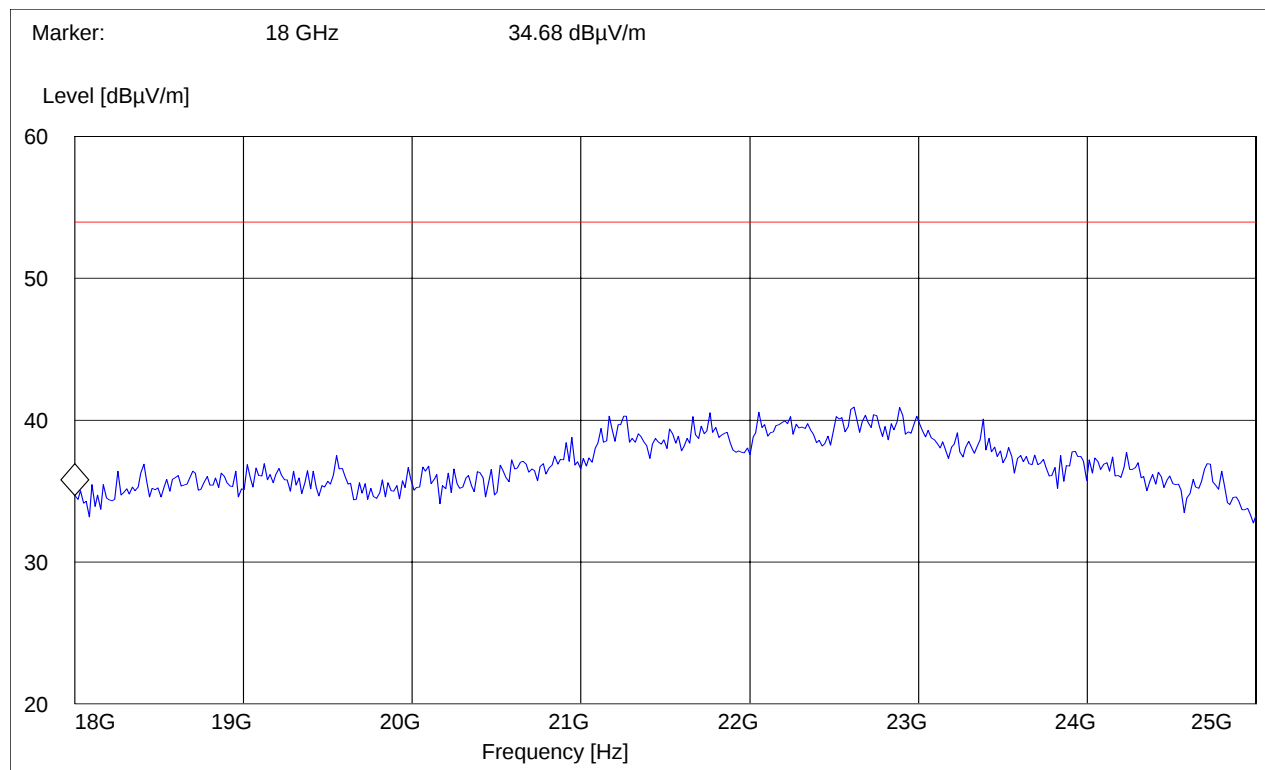

5.6 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

5.6.1 LIMITS

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

* The following results were done with the WLAN and Bluetooth transmitters operating simultaneously and with the PCS and Bluetooth transmitters operating simultaneously.

5.6.2 RESULTS (WLAN AND BLUETOOTH)

LISN


411 Dixon Landing Road, CA 95035

EUT / Description: PCG-9W6L
Manufacturer: SONY
Test mode: TX WLAN AND BLUETOOTH
Test Engineer: Neelesh
Phase: L & N
Comment: 110 volt

Start of Test: 11/3/2005 / 12:38:19PM

SCAN TABLE: "EN 55022 Voltage"

Short Description:			EN 55022 Voltage				
Start	Stop	Step	Detector	Meas.	IF		
Transducer							
Frequency	Frequency	Width		Time	Bandw.		
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

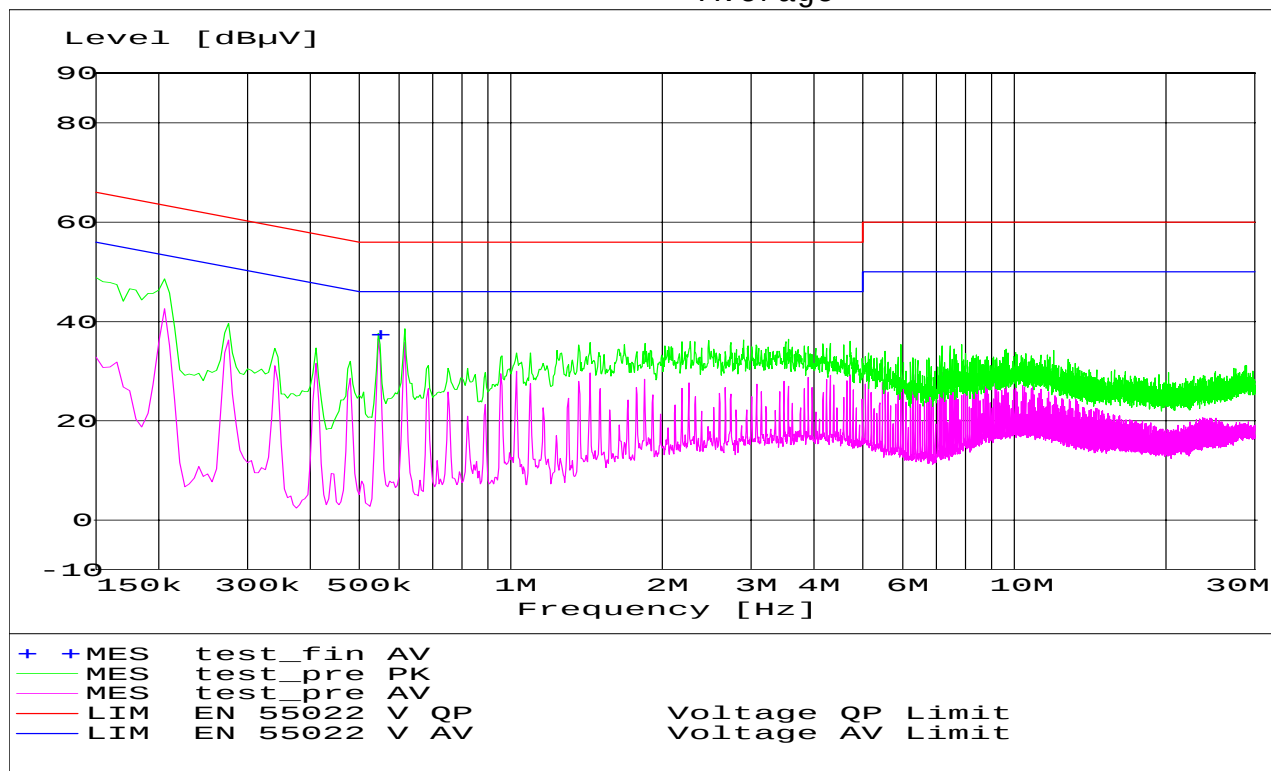

Test Report #: EMC_1088_2005_BLUETOOTH

Date of Report: 2005-11-04

Page 53 of 57



MEASUREMENT RESULT: "test_fin AV"

11/3/2005 12:41PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.545000	37.20	0.0	46	8.8	L1	GND

5.6.3 RESULTS (PCS AND BLUETOOTH) LISN


411 Dixon Landing Road, CA 95035

EUT / Description: PCG-9W6L
Manufacturer: SONY
Test mode: TX GSM AND BLUETOOTH
Test Engineer: Neelesh
Phase: L & N
Comment: 110 volt

Start of Test: 11/3/2005 / 12:45:28PM

SCAN TABLE: "EN 55022 Voltage"

Short Description:			EN 55022 Voltage				
Start	Stop	Step	Detector	Meas.	IF		
Transducer							
Frequency	Frequency	Width		Time	Bandw.		
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

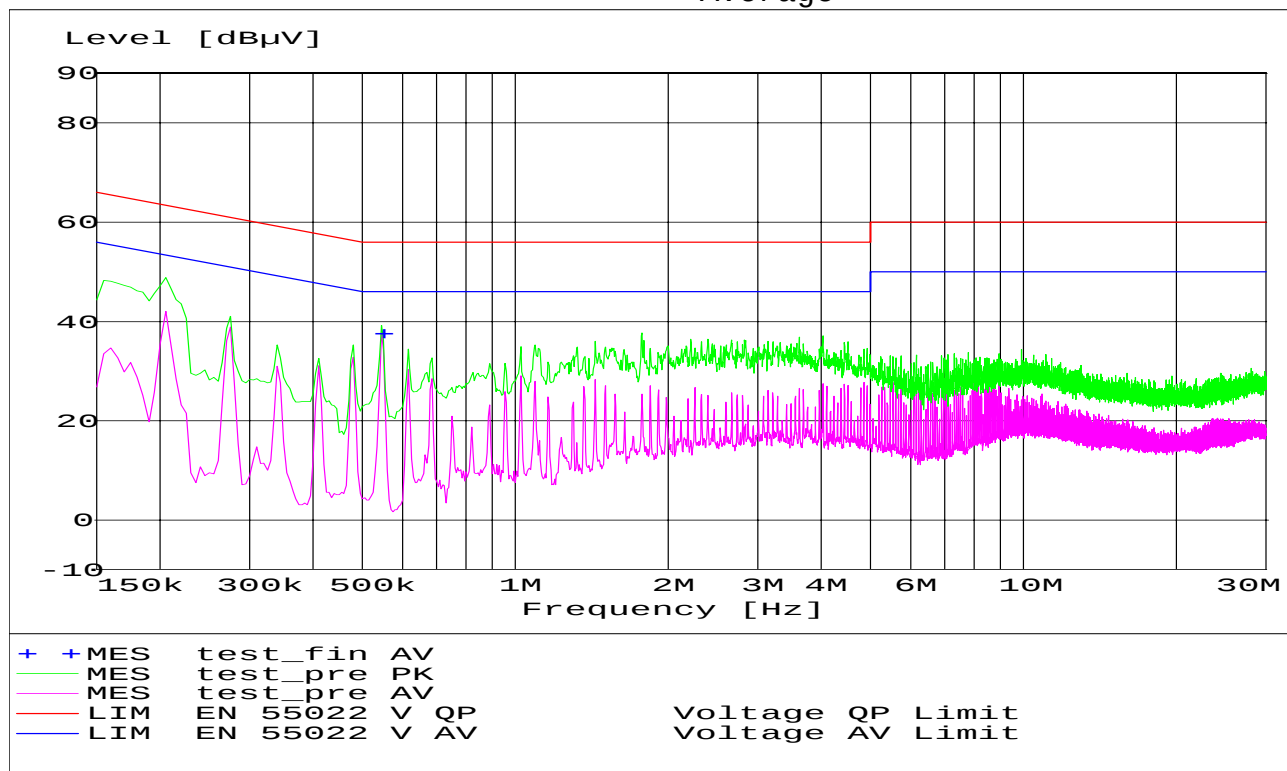

Test Report #: EMC_1088_2005_BLUETOOTH

Date of Report: 2005-11-04

Page 55 of 57



MEASUREMENT RESULT: "test_fin AV"

11/3/2005 12:48PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.545000	37.50	0.0	46	8.5	L1	GND

5.7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Biconilog Antenna	3141	EMCO	0005-1186
04	Horn Antenna (700M-18GHz)	SAS-200/571	AH Systems	325
05	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
06	2-3GHz Band reject filter	BRM50701	Microtronics	6
07	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
08	Pre-Amplifier	TS-ANA	Rohde & Schwarz	--
09	Pre-Amplifier	JS4-00102600	Miteq	00616

5.8 BLOCK DIAGRAMS

Radiated Testing

