


Appendix B. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	40%
Test Engineer	Serway Li	Configurations	Mode 1: EUT (CTX) with 2.4GHz WLAN and BT function – Slate Mode

Horizontal

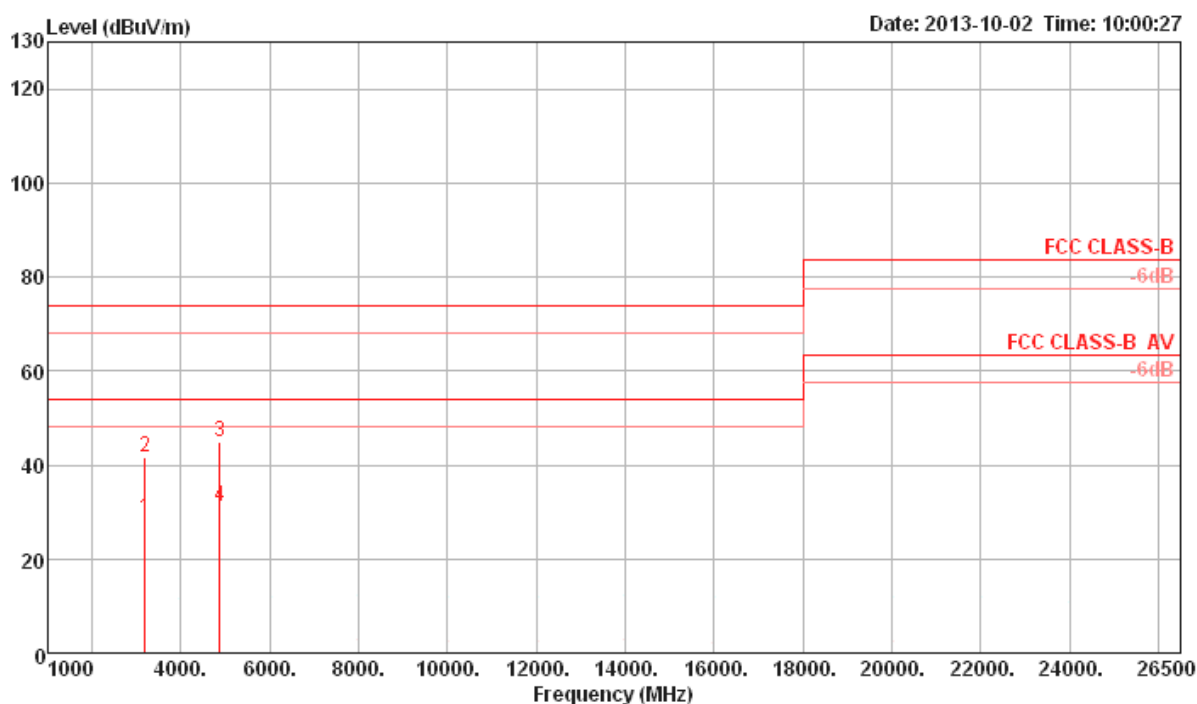

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
											Pol/Phase
1	3190.68	28.68	54.00	-25.32	31.40	2.64	30.00	35.36	Average	127	289 HORIZONTAL
2	3190.76	41.81	74.00	-32.19	44.53	2.64	30.00	35.36	Peak	127	289 HORIZONTAL
3	4874.26	44.74	74.00	-29.26	43.28	3.33	33.16	35.03	Peak	106	163 HORIZONTAL
4	4874.47	31.10	54.00	-22.90	29.64	3.33	33.16	35.03	Average	106	163 HORIZONTAL


Vertical

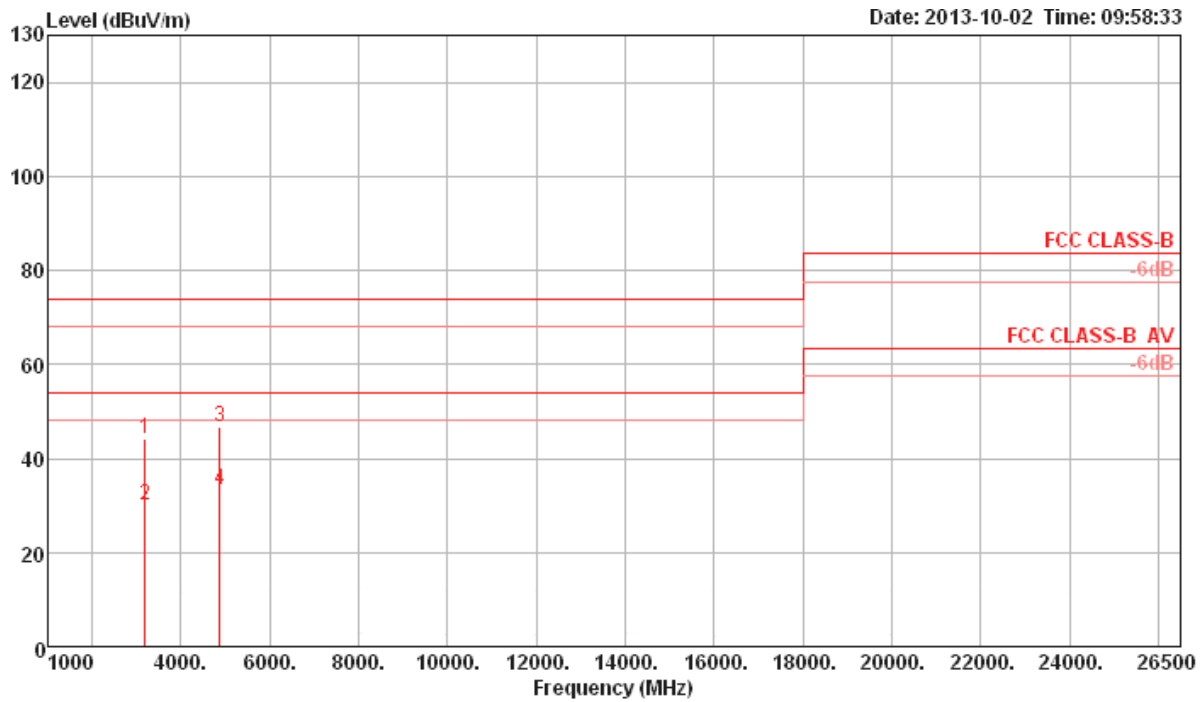

	Freq	Level	Limit	Over	Read	CableAntenna	Preampl		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	3190.85	44.14	74.00	-29.86	46.86	2.64	30.00	35.36	Peak	119	156 VERTICAL
2	3191.16	30.12	54.00	-23.88	32.84	2.64	30.00	35.36	Average	119	156 VERTICAL
3	4873.84	46.74	74.00	-27.26	45.28	3.33	33.16	35.03	Peak	115	231 VERTICAL
4	4874.47	33.23	54.00	-20.77	31.77	3.33	33.16	35.03	Average	115	231 VERTICAL


Temperature	25°C	Humidity	40%
Test Engineer	Serway Li	Configurations	Mode 2: EUT (CTX) with 5GHz WLAN and BT function – Slate Mode

Horizontal

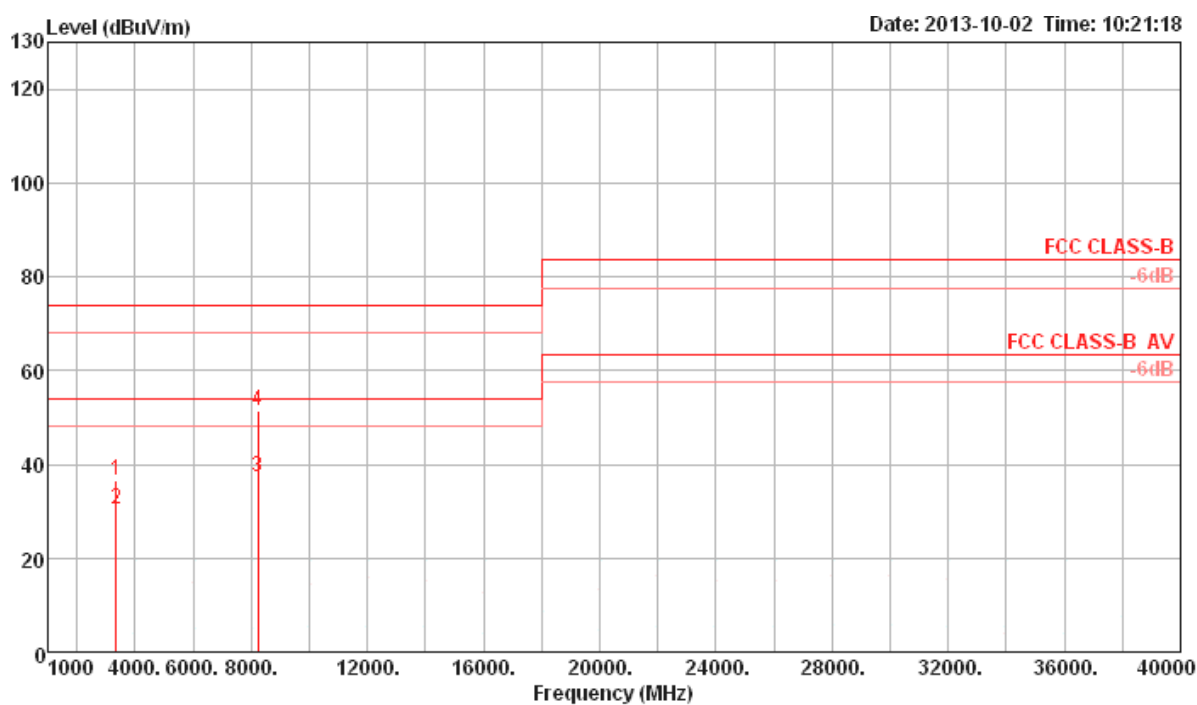

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	3341.06	36.67	74.00	-37.33	39.29	2.71	30.00	35.33	Peak	100	222 HORIZONTAL
2	3342.98	30.50	54.00	-23.50	33.12	2.71	30.00	35.33	Average	100	222 HORIZONTAL
3	8222.82	37.23	54.00	-16.77	31.37	4.30	37.06	35.50	Average	105	260 HORIZONTAL
4	8223.14	51.36	74.00	-22.64	45.50	4.30	37.06	35.50	Peak	105	260 HORIZONTAL

Vertical

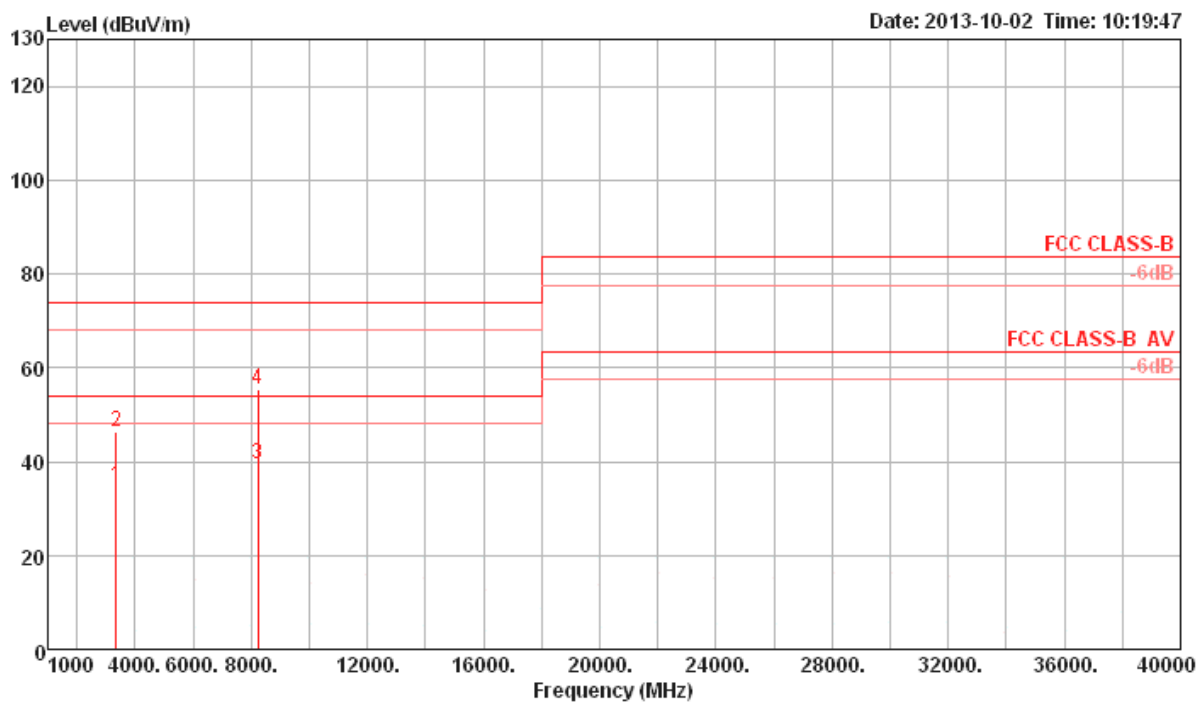

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	3342.00	34.85	54.00	-19.15	37.47	2.71	30.00	35.33	Average	109	161 VERTICAL
2	3342.16	46.49	74.00	-27.51	49.11	2.71	30.00	35.33	Peak	109	161 VERTICAL
3	8222.41	39.61	54.00	-14.39	33.75	4.30	37.06	35.50	Average	100	312 VERTICAL
4	8222.72	55.25	74.00	-18.75	49.39	4.30	37.06	35.50	Peak	100	312 VERTICAL