



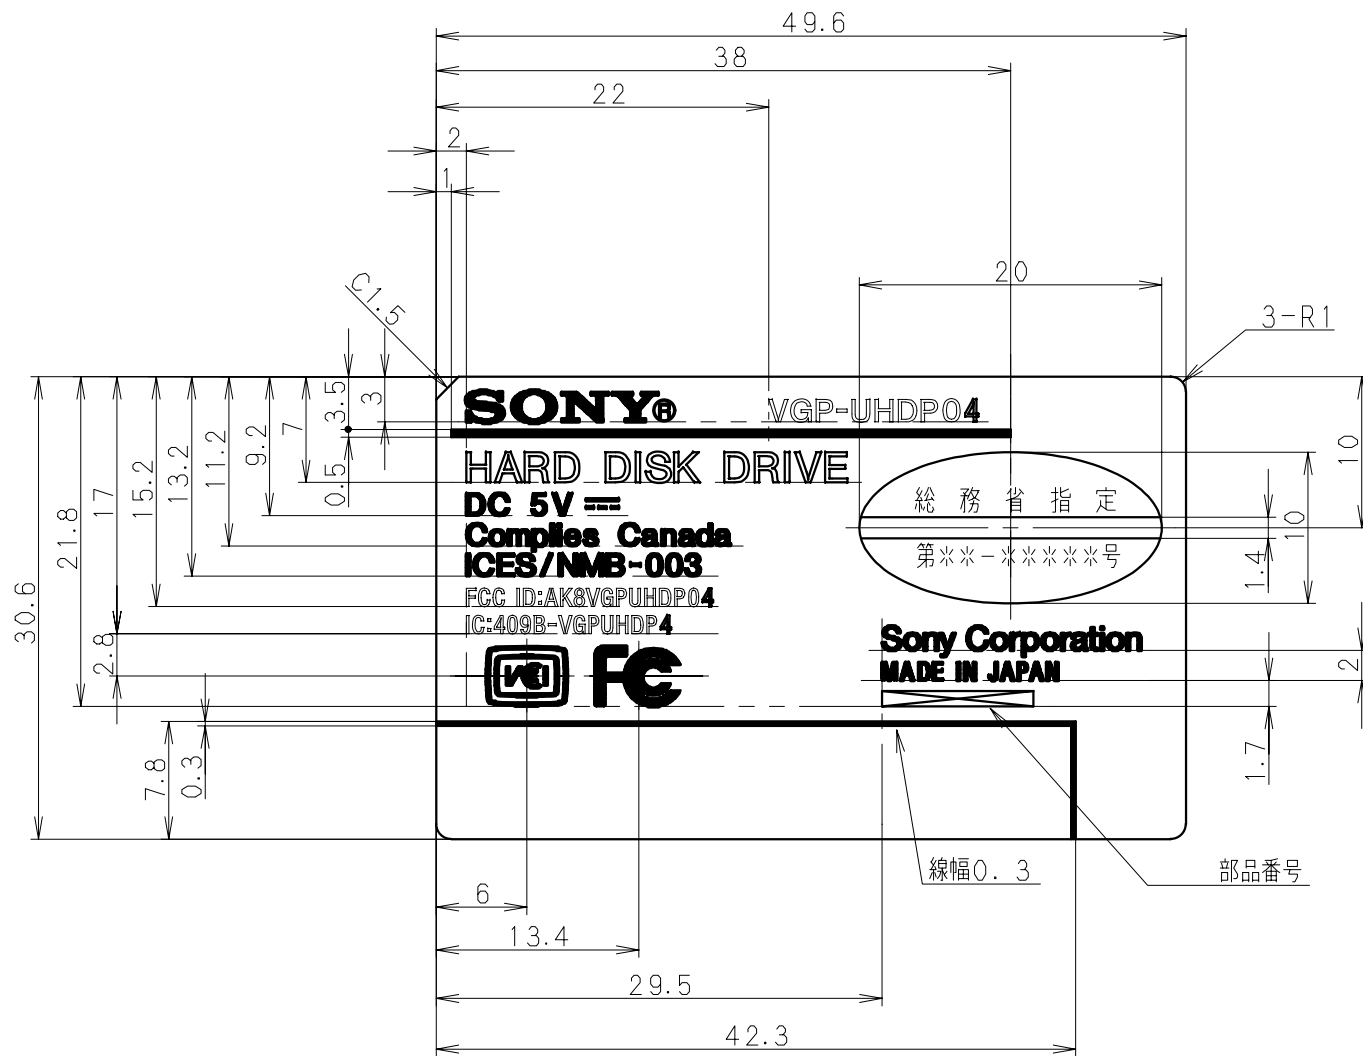

材料構成図

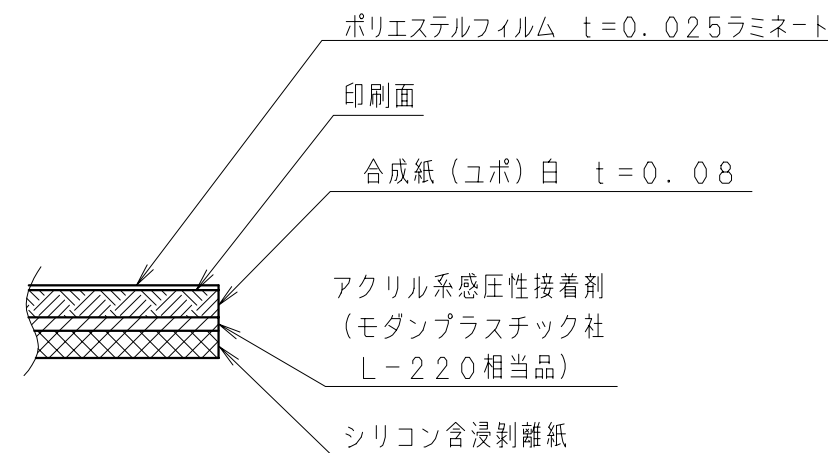

品質特性：ソニー部品設計基準：ラベルの第7-1項に定める各特性を満足する事。
使用注意事項：耐薬品特性の試験は製品に貼付した状態にて行われるので貼付条件には十分留意する事。
(ソニー部品設計基準：ラベル第7-1-4項)

注1) 10枚/1シート状にて納入のこと。この部品には SS-00259-1 に指定する成形用樹脂・インキ・塗料・被覆電線はグリーンパートナー認定取引先から調達すること。
2) 版下は校正，承認を要す。物質を含んだ材料は，使用してはならない。
3) 耐薬品試験で問題の無いこと。This part should not contain any substances which are specified in SS-00259-1. Purchase ink, paint, wire rods, and molding resins only from the business partners that Sony approves as Green Partners.

記載文字/WRITTEN LETTER	字 高 LETTER HEIGHT	タイプフェイス/TYPE FACE
SONY®	L=1.3	清刷参照
Sony Corporation	h=1.6	
FC	h=4.0	
==	a=1.5	
HARD DISK DRIVE	h=2.0	SONY ID TYPE HR
VGP-UHDP04 Complies Canada ICES/NMB-003	h=1.5	
DC 5V		
MADE IN JAPAN FCC ID:AK8VGP UHDM08 IC:409B-VGP UHDM8	h=1.2	SONY ID TYPE HRC
2-664-400-01	h=1.0	
総務省指定 第**-*****号	h=1.5	SONY ID TYPE ND

△x					UNIT mm	TOLERANCE STS-2	USED ON	RANK
△x					ANGLE	L ≤ 4 ± 0.1		
△x					SCALE	4 < L ≤ 16 ± 0.2		FAMILY
△x					2 : 1	16 < L ≤ 63 ± 0.3	ORIGINAL MODEL IRX-9236	
△x						63 < L ≤ 250 ± 0.4	FINISH (COLOR) ネガティブ印刷 (黒) (文字白)	
△x						250 < L ± 0.6		
MATERIAL (COLOR) 上記						DESCRIPTION (E) LABEL, MODEL NUMBER		
HISTORY X COUNT						(J) キメイバン		
SUFFIX REPL.						PART NO. 2-664-400-01		
E.C.N. - NO. DATE						SHEET 1/1		
DRAWN BY PHOENIX '05.11.02 Y. FUKUI						PLANNED BY PHOENIX '05.08.30 Y. FUKUI		
CHECKED BY						APPROVED BY		
MODEL IRX-9236						TENTATIVE		
PART NO. 0-631-495-01								

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF SONY. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR SONY. ALL QUESTIONS MUST BE REFERRED TO THE LOCAL PURCHASING DEPARTMENT OF SONY.

ISSUED '05.08.30

/GRP /SBG /DID

/DT

/TW