

**FCC 15.247 & RSS-247
(Permissive Change)
2.4GHz Test Report**

for

Sony Group Corporation

1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Product Name : WIFI+BT Module
Model Name : WXT2HM2001
Brand : GSD
FCC ID : AK8WXT2HM2001
IC : 409B-WXT2HM2001



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

TABLE OF CONTENTS

Description	Page
TEST REPORT	4
1. REVISION RECORD OF TEST REPORT	4
2. SUMMARY OF TEST RESULTS	5
3. GENERAL INFORMATION	6
3.1. Description of Application	6
3.2. Description of EUT	7
3.3. Reference Test Guidance.....	8
3.4. Information for Permissive Change.....	8
3.5. Antenna Information	9
3.6. EUT Specifications Assessed in Current Report	15
3.7. Description of Key Components	16
3.8. Test Configuration.....	16
3.9. Output Power Setting	16
3.10. Tested Supporting System List.....	17
3.11. Setup Configuration.....	17
3.12. Operating Condition of EUT	17
3.13. Description of Test Facility	18
3.14. Measurement Uncertainty	19
4. MEASUREMENT EQUIPMENT LIST.....	20
4.1. Radiated Emission Measurement	20
4.2. RF Conducted Measurement	20
5. RADIATED EMISSION	21
5.1. Block Diagram of Test Setup	21
5.2. Radiated Emission Limits.....	22
5.3. Test Procedure	23
5.4. Measurement Result Explanation.....	24
5.5. Test Results	24
6. MAXIMUM PEAK OUTPUT POWER	25
6.1. Block Diagram of Test Setup	25
6.2. Specification Limits.....	25
6.3. Test Procedure	25
6.4. Test Results	25
7. DEVIATION TO TEST SPECIFICATIONS	26

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

TEST REPORT (Permissive Change)

Applicant : Sony Group Corporation
Manufacturer : Hui Zhou Gaoshengda Technology Co.,LTD
EUT Description
(1) Product : WIFI+BT Module
(2) Model : WXT2HM2001
(3) Brand : GSD
(4) Power Supply : DC 20V, 5A

Applicable Standards:

Title 47 CFR FCC Part 15 Subpart C
RSS-Gen (Issue 5), Amendment 2, February 2021
RSS-247 (Issue 3), August 2023

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2025. 10. 07

Reviewed by: Annie Yu (Annie Yu/Supervisor)

Approved by: Johnny Hsueh (Johnny Hsueh/Deputy Manager)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2025. 10. 07	Original Report	EM-F250488

2. SUMMARY OF TEST RESULTS

Rule		Description	Results
FCC	IC		
15.207	RSS-Gen §8.8	Conducted Emission	N/A ^{Note2}
15.247(d)/15.205	RSS-Gen §8.9 RSS-247 §5.5	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(1)	RSS-247 §5.1(a)	20dB/Occupied Bandwidth	N/A ^{Note2}
15.247(a)(1)	RSS-247 §5.1(b)	Carrier Frequency Separation	N/A ^{Note2}
15.247(a)(1)(iii)	RSS-247 §5.1(d)	Time of Occupancy	N/A ^{Note2}
15.247(a)(1)(iii)	RSS-247 §5.1(d)	Number of Hopping Channels	N/A ^{Note2}
15.247(b)(1)	RSS-247 §5.1(b)	Maximum Peak Output Power	PASS
15.247(d)	RSS-247 §5.5	Conducted Band Edges and Conducted Spurious Emission	N/A ^{Note2}
15.203	---	Antenna Requirement	Compliance
Note: 1. The uncertainties value is not used in determining the result. 2. Due to add new antennas don't influence on RF characteristics, so it is unnecessary to re-test.			



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

3. GENERAL INFORMATION

The EUT's information described in this section are all provided by the applicant.

3.1. Description of Application

Applicant	Sony Group Corporation 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer	Hui Zhou Gaoshengda Technology Co.,LTD No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China
Product	WIFI+BT Module
Model	WXT2HM2001
Brand	GSD

3.2. Description of EUT

Test Model	WXT2HM2001				
Serial Number	N/A				
Power Rating	DC 3.3V				
Hardware Version	V1.0				
Software Version	V1.0				
RF Features	WLAN:802.11 a/b/g/n/ac/ax Bluetooth BR/EDR Bluetooth LE				
Transmit Type	2.4 GHz Bands		Client	Master	
	802.11b	2T2R	✓	✓	
	802.11g	2T2R	✓	✓	
	802.11n-HT20/40	2T2R	✓	✓	
	802.11ax-HE20/40	2T2R	✓	✓	
	BT/BLE	1T1R			
	U-NII 5G Bands		Client	Master	
	802.11a	2T2R	✓	✓	
	802.11n-HT20/ ac-VHT20/ax-HE20	2T2R	✓	✓	
	802.11n-HT40	2T2R	✓		
	802.11ac-VHT40/80	2T2R	✓		
	802.11ax-HE40/80	2T2R	✓		
	WLAN 6E Bands		Client	Master	
	802.11ax-HE20/40/80	2T2R	✓		
	802.11ax-HE80	2T2R		✓	
	The MIMO is correlated and supported Cyclic Delay Diversity (CDD).				
	Sample Status	Trial sample			
Test Sample	Sample No.	Test Item		Firmware	
	01	RSE, RF Conducted		N/A	
Date of Receipt	2025. 07. 29				
Date of Test	2025. 08. 04 ~ 09. 09				
Interface Ports of EUT	None				
Accessories Supplied	None				

Note: Pursuant ISO 17025:2017 section 7.8.2, Audix Technology Corp. does not assume responsibility for all EUT's information including RF features, transmit type, antenna information...etc are provided by customer.

3.3. Reference Test Guidance

ANSI C63.10-2020
ANSI C63.10-2020 + Cor.1-2023

3.4. Information for Permissive Change

- The EUT is an addition version with original FCC ID: AK8WXT2HM2001 and IC: 409B-WXT2HM2001 is as following.
 - (a) To add new antenna without any other changes. This module has only a change in the antenna; there are no other alterations.
- The differences between this application and original's ID as clarify in following list.
- Due to above different item, there have some test item should be re-tested (see section 2), the test data are recorded in this report.

3.5. Antenna Information

Entry Name	Antenna Model	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)
YY2099C	SH1-Ant-4#-V1.3	ZTX	PCB	5150~5250	4.49
				5250~5350	4.49
				5450-5750	4.24
				5750-5850	4.12
				5925-6425	4.42
				6425-6525	4.42
				6525-6875	4.48
				6875-7125	4.43
	SH1-Ant-3#-V1.0	ZTX	PCB	5150~5250	4.01
				5250~5350	3.99
				5450-5750	4.12
				5750-5850	3.76
				5925-6425	4.01
				6425-6525	3.73
				6525-6875	3.78
				6875-7125	4.08
	SH1-Ant-5#-V1.3	ZTX	PCB	2402-2480	2.79

Entry Name	Antenna Model	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)
YY2100C1	ZTX-AHC-Ant-3#-V02 (WIFI 0)	ZTX	PCB	5150~5250	3.69
				5250~5350	3.52
				5450-5750	4.08
				5750-5850	4.33
				5925-6425	4.38
				6425-6525	4.08
				6525-6875	4.11
				6875-7125	4.48
	ZTX-AHC-Ant-3#-V02 (WIFI 1)	ZTX	PCB	5150~5250	4.38
				5250~5350	4.46
				5450-5750	4.46
				5750-5850	3.48
				5925-6425	4.42
				6425-6525	3.46
				6525-6875	4.06
				6875-7125	4.26
	ZTX-AHC-BT-V03	ZTX	PCB	2402-2480	3.16

Entry Name	Antenna Model	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)
YY2101C	ZTX-RH5-WI FI0-V04 (WIFI0)	ZTX	PCB	2402-2480	3.47
				5150~5250	4.75
				5250~5350	4.75
				5450-5750	4.62
				5750-5850	3.65
				5925-6425	4.74
				6425-6525	3.39
				6525-6875	3.58
				6875-7125	3.56
	ZTX-RH5-WI FI1-V02 (WIFI1)	ZTX	PCB	2402-2480	3.51
				5150~5250	4.67
				5250~5350	4.69
				5450-5750	4.61
				5750-5850	4.61
				5925-6425	4.74
				6425-6525	4.31
				6525-6875	4.08
				6875-7125	4.04
	ZTX-RH5- BT-V02	ZTX	PCB	2402-2480	3.06

Entry Name	Antenna Model	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)
YY2100C2, YY2100C3	ZTX-AHS-Ant-1#-V03 (WIFI0)	ZTX	PCB	5150~5250	3.58
				5250~5350	3.49
				5450-5750	3.71
				5750-5850	3.68
				5925-6425	3.90
				6425-6525	3.90
				6525-6875	3.58
				6875-7125	3.53
	ZTX-AHS-Ant-3#-V02 (WIFI0)	ZTX	PCB	5150~5250	3.11
				5250~5350	3.15
				5450-5750	3.55
				5750-5850	3.60
				5925-6425	3.83
				6425-6525	3.32
				6525-6875	3.27
				6875-7125	3.13

Entry Name	Antenna Model	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)
YY2103C	ZTX-SWH3-WIFI-0-V04 (WIFI0)	ZTX	PCB	2402-2480	2.69
				5150~5250	3.28
				5250~5350	3.89
				5450-5750	3.95
				5750-5850	3.95
				5925-6425	3.85
				6425-6525	3.76
				6525-6875	3.28
				6875-7125	3.78
	ZTX-SWH3-WIFI-1-V02 (WIFI1)	ZTX	PCB	2402-2480	2.86
				5150~5250	3.27
				5250~5350	3.85
				5450-5750	3.98
				5750-5850	3.29
				5925-6425	3.99
				6425-6525	3.96
				6525-6875	3.96
				6875-7125	3.90
	ZTX-SWH3-BT-V04	ZTX	PCB	2402-2480	2.99

Entry Name	Antenna Model	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)
YY2102C	ZTX-SWH5-WIFI-0-V02 (WIFI0)	ZTX	PCB	2402-2480	2.81
				5150~5250	1.98
				5250~5350	3.01
				5450-5750	2.85
				5750-5850	1.75
				5925-6425	3.02
				6425-6525	3.21
				6525-6875	3.32
				6875-7125	3.24
	ZTX-SWH5-WIFI-1-V02 (WIFI1)	ZTX	PCB	2402-2480	2.98
				5150~5250	3.88
				5250~5350	3.86
				5450-5750	4.01
				5750-5850	4.56
				5925-6425	4.30
				6425-6525	2.76
				6525-6875	2.73
				6875-7125	2.86
	ZTX-SWH5-BT-V01	ZTX	PCB	2402-2480	2.94

According to KDB 662911 D01 d) i), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi

Note 1. 2.4G: Directional gain =

2400~2500MHz: Directional gain = $10 \log[(10^{3.47/20} + 10^{3.51/20})^2 / 2] = 6.5$ dBi

Note 2. 5G: Directional gain =

5150~5350MHz: $= 10 \log[(10^{4.75/20} + 10^{4.67/20})^2 / 2] = 7.72$ dBi

Note 3. UNII Band (WLAN 6G):

UNII Band 5: Directional gain = $10 \log[(10^{4.74/10} + 10^{4.74/10})^2 / 2] = 7.75$ dBi

UNII Band 6: Directional gain = $10 \log[(10^{4.42/10} + 10^{3.73/10})^2 / 2] = 7.09$ dBi

UNII Band 7: Directional gain = $10 \log[(10^{4.48/10} + 10^{3.78/10})^2 / 2] = 7.15$ dBi

UNII Band 8: Directional gain = $10 \log[(10^{4.48/10} + 10^{4.29/10})^2 / 2] = 7.40$ dBi

Remark: The EUT supports multiple antenna configurations for WXT2HM2001 module (WiFi 2.4GHz/5GHz/6GHz and BT).

For FCC testing, all antenna configurations were evaluated, and the antenna with the worst-case performance was selected for final measurements to represent the compliance results.

Therefore, only the worst-case antenna configuration was reported in this test report.

3.6. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
Bluetooth	2402-2480	79	FHSS (GFSK, $\pi/4$ DQPSK, 8-DPSK)	1/2/3

Channel List							
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.7. Description of Key Components

None

3.8. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Correction Factor (dB)
BT	N/A	2.880	N/A

Item		Entry Name Note3	Modulation	Data Rate	Test Channel
Radiated Test Case	Radiated Spurious Emission (30MHz~1GHz) ^{Note 1,2}	YY2100C1	8-DPSK	3Mbps	00
	Radiated Band Edge ^{Note 1}	YY2100C1	GFSK	1Mbps	00/78
			8-DPSK	3Mbps	00/78
	Radiated Spurious Emission Note 1,2	YY2100C1	GFSK	1Mbps	00/39/78
			8-DPSK	3Mbps	00/39/78

Item		Entry Name Note3	Modulation	Data Rate	Test Channel
Conducted Test Case	Maximum Peak Output Power	YY2100C1	GFSK	1Mbps	00/39/78
			8-DPSK	3Mbps	00/39/78
			$\pi/4$ DQPSK	2Mbps	00/39/78

Note 1: ☐ Mobile Device ☒ Portable Device and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow: ☒ Lie ☐ Side ☐ Stand

Note 2: We performed testing of the highest and lowest data rate.

Note 3. According to the antenna information provided by the manufacturer, there are six antennas with same type for the application. According to KDB 178919 guidelines, select the antenna with the highest antenna gain for testing.

3.9. Output Power Setting

Centre Frequency (MHz)	Power Setting		
	GFSK	$\pi/4$ DQPSK	8-DPSK
2402	Default	Default	Default
2441	Default	Default	Default
2480	Default	Default	Default

3.10. Tested Supporting System List

3.10.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	LCD Monitor	lenovo	D17195HE3	N/A	N/A
2.	PC System	lenovo	B4550-B031	N/A	N/A
3.	USB Mouse	lenovo	N/A	N/A	N/A
4.	JIG	N/A	N/A	N/A	N/A

3.10.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	DVI Cable: Shielded, Detachable, 1.5m AC Power Cord: Unshielded, Detachable, 1.8m
2.	USB Cable: Unshielded, Undetachable, 1.8 m
3.	Bus Cable: Unshielded, Undetachable, 0.5m

3.11. Setup Configuration

3.11.1. EUT Configuration for Radiated Emission

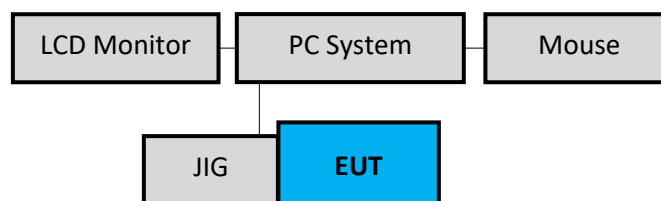

3.11.2. EUT Configuration for RF Conducted Test Items

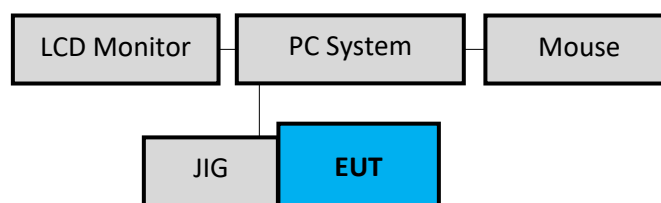

3.12. Operating Condition of EUT

Test program “WCN_Combo_Tool” is used for enabling EUT BT function under continues transmitting and choosing data rate/ channel.

3.13. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.1 3m Semi Anechoic Chamber

3.14.Measurement Uncertainty

The measurement uncertainty levels have been estimated as specified in ETSI TR 100 028-2001

Test Items/Facilities			Frequency Range	Uncertainty
Conduction Test	☐	No. 7 Shielded Room	9kHz-150kHz	±3.7dB
			150kHz-30MHz	±3.4dB
	☐	No. 8 Shielded Room	9kHz-150kHz	±3.7dB
			150kHz-30MHz	±3.4dB
Radiation Test	☒	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.0dB
			200MHz-1000MHz, 3m, Horizontal	±4.0dB
			30MHz-200MHz, 3m, Vertical	±4.8dB
			200MHz-1000MHz, 3m, Vertical	±4.5dB
			1GHz-6GHz, 3m	±4.2dB
			6GHz-18GHz, 3m	±4.0dB
	☐	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±3.9dB
			30MHz-200MHz, 3m, Vertical	±4.6dB
			200MHz-1000MHz, 3m, Vertical	±4.3dB
			1GHz-6GHz, 3m	±4.6dB
			6GHz-18GHz, 3m	±4.1dB
	☐	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.4dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.9dB
			200MHz-1000MHz, 3m, Vertical	±5.1dB
			1GHz-6GHz, 3m	±4.4dB
			6GHz-18GHz, 3m	±4.0dB
	☐	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.2dB
			200MHz-1000MHz, 3m, Horizontal	±4.1dB
			30MHz-200MHz, 3m, Vertical	±4.9dB
			200MHz-1000MHz, 3m, Vertical	±4.6dB
			1GHz-6GHz, 3m	±4.4dB
			6GHz-18GHz, 3m	±4.0dB
	Radiated emissions (18GHz-40GHz)		18GHz-40GHz, 3m	±3.6dB

Remark : Uncertainty = $k_{uc}(y)$

Test Item	Uncertainty
Maximum peak Output power	± 0.8dB

4. MEASUREMENT EQUIPMENTLIST

4.1. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9030B	MY61330403	2024.12.18	1 Year
2.		Agilent	N9010A-526	MY53400071	2025.08.07	1 Year
3.	Test Receiver	R&S	ESCS30	100338	2025.06.14	1 Year
4.	Amplifier	HP	8447D	2944A06305	2024.12.16	1 Year
5.	Microwave Preamplifier	HP	8449B	3008A01284	2025.07.07	1 Year
6.	Microwave Amplifier	Keysight	83051A	MY56480113	2024.09.11	1 Year
7.	Loop antenna	TESEQ	HLA 6121	60478	2025.06.05	1 Year
8.	Bilog Antenna	TESEQ	CBL6112D	33821	2025.02.08	1 Year
9.	Horn Antenna	EMCO	3115	9112-3775	2025.05.06	1 Year
10.	Horn Antenna	COM-POWER	AH-840	101092	2025.01.09	1 Year
11.	2.4GHz Notch Filter	K&L Microwave	7NSL10-2441.5/E 130.5-O/O	1	2025.04.10	1 Year
12.	High-Pass Filter	Microwave	H3G018G1	484796	2025.04.10	1 Year
13.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2025.01.03	1 Year
14.	Coaxial Cable	HUBER+SUHNER	RG223/U	RE-33	2025.06.10	1 Year
15.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	RE-14	2025.01.03	1 Year
16.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	RE-30	2025.08.19	1 Year
17.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2025.04.09	1 Year
18.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.2. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9010B	MY59071380	2025.03.28	1 Year
2.	Power Meter	Anritsu	ML2495A	2127005	2024.11.25	1 Year
3.	Power Sensor	Anritsu	MA2411B	1911360	2024.12.02	1 Year
4.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2025.04.09	1 Year
5.	Coaxial Cable	woken	18GHz Stainless SMA(M)-SMA(M)) for 100cm SS402 Cable Assembly	20241206-1	2025.03.21	1 Year


5. RADIATED EMISSION

5.1. Block Diagram of Test Setup


5.1.1. Block Diagram of EUT

Indicated as section 3.11


5.1.2. Setup Diagram for 9kHz-30MHz

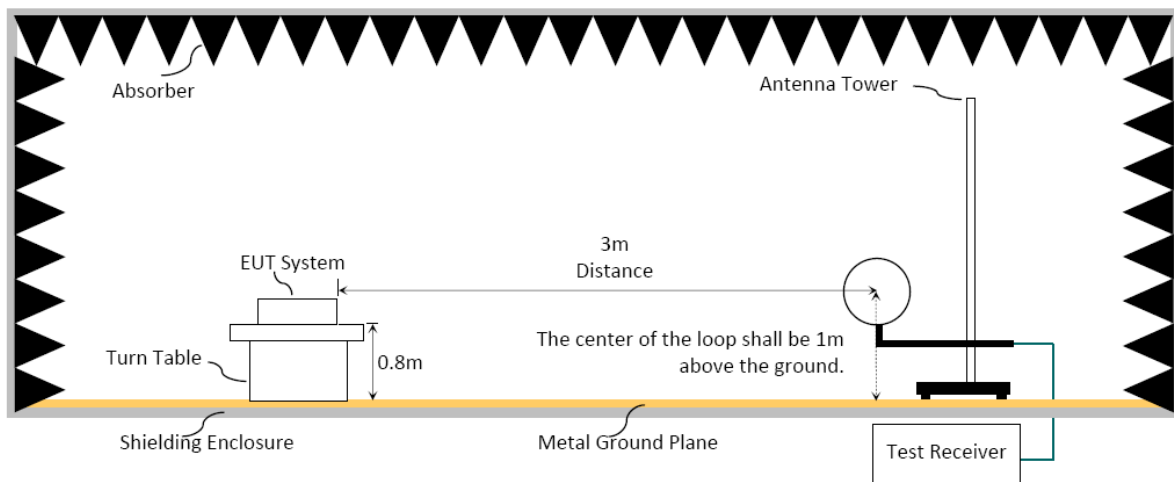

5.1.3. Setup Diagram for 30-1000MHz

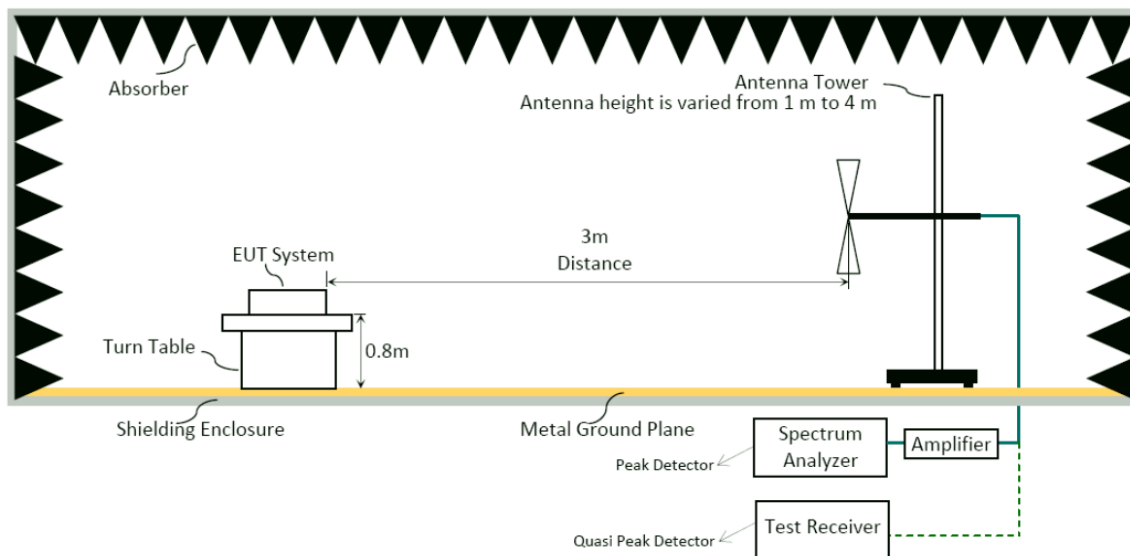

5.1.4. Setup Diagram for above 1GHz

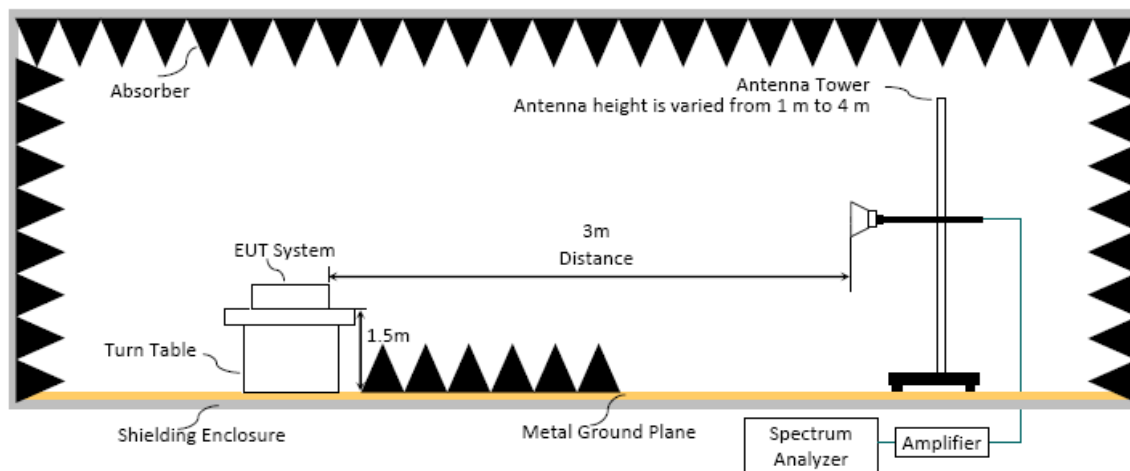

5.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance(m)	Limits	
		dBμV/m	μV/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dBμV/m (Peak) 54.0 dBμV/m (Average)	

Remark : (1) $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

5.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2020 & ANSI C63.10-2020 + Cor.1-2023 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2020 & ANSI C63.10-2020 + Cor.1-2023 regulation.

Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic(up to 25 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:☒ **Option 1:**

(1) RBW = 1MHz

(2) VBW $\geq 1/T$

Mode	TX _{on} (ms)	1/ TX _{on} (kHz)	VBW(>1/ TX _{on}) (kHz)
BT	2.880	0.347	3

(3) Detector = Peak.

(4) Sweep time = auto.

(5) Trace mode = max hold.

(6) Allow sweeps to continue until the trace stabilizes.

☐ **Option 2:**

Average Emission Level = Peak Emission Level + D.C.C.F.

5.4. Measurement Result Explanation

☒ Peak Emission Level(dB μ V/m) = Antenna Factor(dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading(dB μ V).

☒ Average Emission Level(dB μ V/m) = Antenna Factor(dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading(dB μ V).

☐ Average Emission Level(dB μ V/m) = Peak Emission Level(dB μ V/m) + DCCF(dB)
Duty Cycle Correction Factor (DCCF)(dB) = $20\log(TX_{on}/TX_{on+off})$ presented in section 3.7.


☐ ERP(dBm) = Peak Emission Level(dB μ V/m) - 95.2dB - 2.14dB

5.5. Test Results

Please refer to Appendix A.

6. MAXIMUM PEAK OUTPUT POWER

6.1. Block Diagram of Test Setup

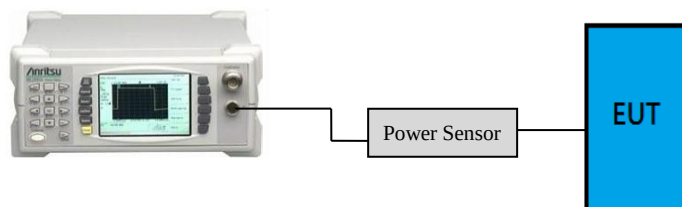

6.2. Specification Limits

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 1Watt. (30dBm) , and E.I.R.P.: 4Watt (36dBm)

6.3. Test Procedure

EUT is connected to power sensor and record the maximum output power.

6.4. Test Results

Please refer to Appendix A



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

7. DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX A

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX A

TEST DATA AND PLOTS

(Model: WXT2HM2001)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX B

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX B

TEST PHOTOGRAPHS

(Model: WXT2HM2001)