

TABLE OF CONTENTS

A.1 RADIATED EMISSION	2
A.1.1 Emissions within Restricted Frequency Bands.....	2
A.1.2 Emissions outside the frequency band.....	128
A.1.3 Emissions in Non-restricted Frequency Bands.....	145
A.2 MAXIMUM OUTPUT POWER	146
A.2.1 Average Output Power Bandwidth.....	146
A.2.2 Measurement Plots	158
A.3 BAND EDGE	162

A.1 RADIATED EMISSION

Test Date	2025/09/02	Temp./Hum.	24°C/56%
Test Voltage	DC 3.3V (Through jig via Notebook PC)	Tested By	Brian Hsieh

A.1.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
42.610	17.41	1.59	26.46	40.45	32.99	40.00	7.01	Peak
188.110	15.16	3.45	25.83	47.01	39.79	43.50	3.71	Peak
393.750	21.28	5.72	26.37	42.14	42.77	46.00	3.23	Peak
642.070	24.40	7.03	27.39	38.41	42.45	46.00	3.55	Peak
925.310	26.60	8.59	26.92	35.42	43.69	46.00	2.31	Peak
966.050	26.88	8.82	26.80	32.92	41.83	54.00	12.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
42.610	17.41	1.59	26.46	43.59	36.14	40.00	3.86	Peak
89.170	14.31	2.36	26.30	49.98	40.35	43.50	3.15	Peak
393.750	21.28	5.72	26.37	42.22	42.85	46.00	3.15	Peak
711.910	24.57	7.37	27.38	38.35	42.91	46.00	3.09	Peak
745.860	24.61	7.54	27.31	37.54	42.38	46.00	3.62	Peak
978.660	26.96	8.89	26.76	32.60	41.70	54.00	12.30	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

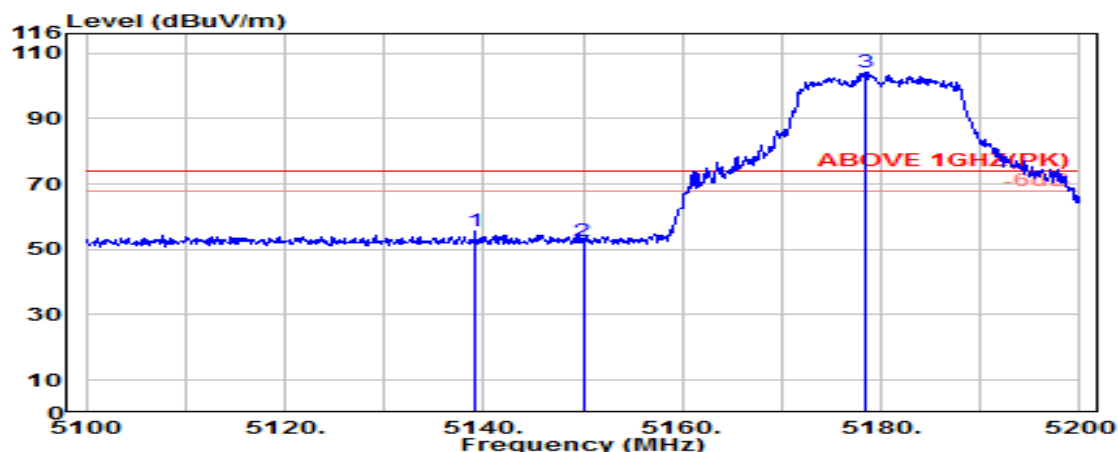

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.100	33.58	8.54	39.09	52.36	55.38	74.00	18.62	Peak
5150.000	33.60	8.54	39.09	49.50	52.55	74.00	21.45	Peak
@ 5178.500	33.60	8.56	39.09	101.08	104.15	---	---	Peak

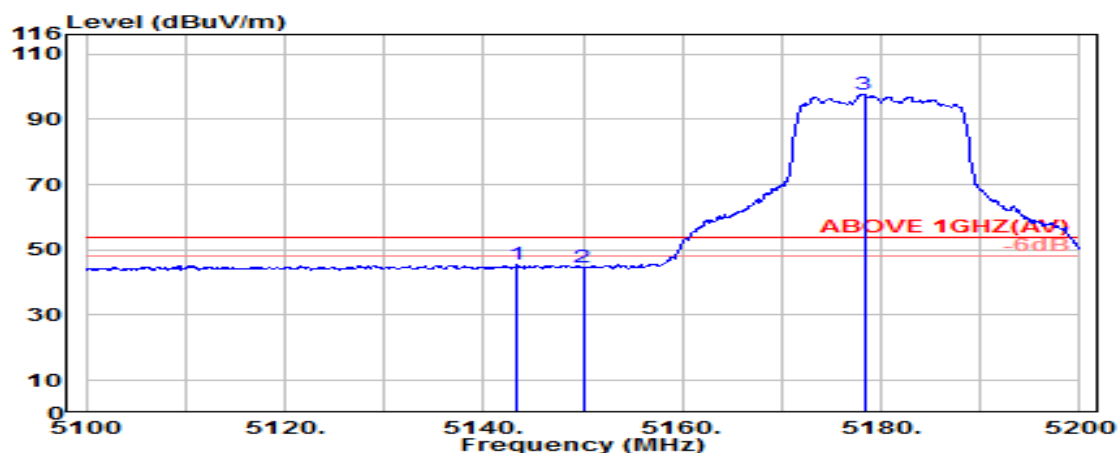

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.300	33.59	8.54	39.09	42.39	45.43	54.00	8.57	Average
5150.000	33.60	8.54	39.09	41.43	44.48	54.00	9.52	Average
@ 5178.300	33.60	8.56	39.09	94.71	97.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

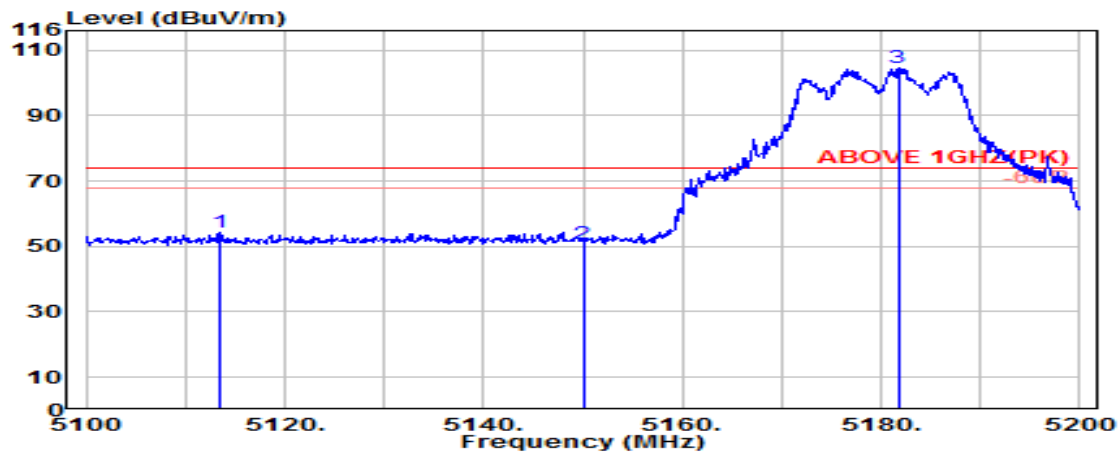

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.400	33.53	8.52	39.09	51.46	54.41	74.00	19.59	Peak
5150.000	33.60	8.54	39.09	47.94	50.99	74.00	23.01	Peak
@ 5181.700	33.60	8.56	39.09	101.44	104.51	---	---	Peak

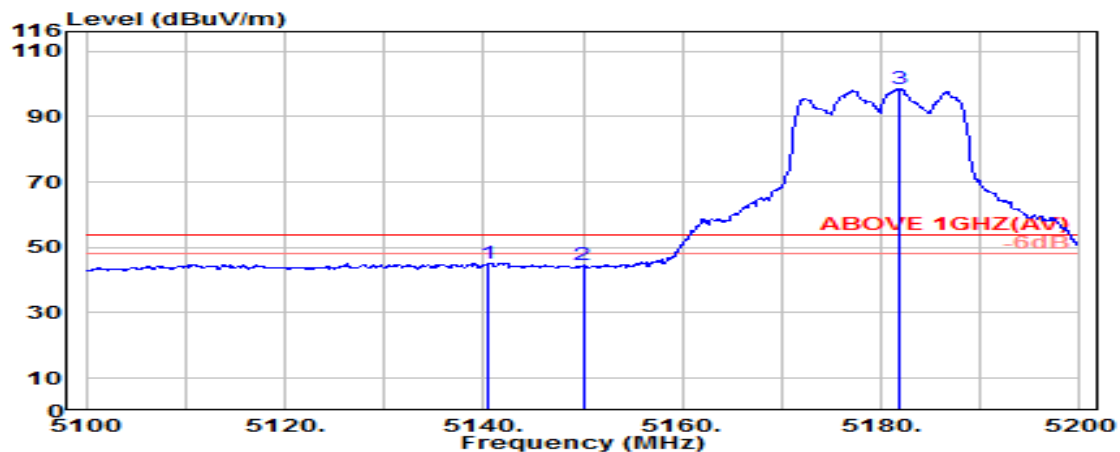

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.500	33.58	8.54	39.09	42.21	45.24	54.00	8.76	Average
5150.000	33.60	8.54	39.09	41.71	44.77	54.00	9.23	Average
@ 5181.800	33.60	8.56	39.09	95.44	98.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

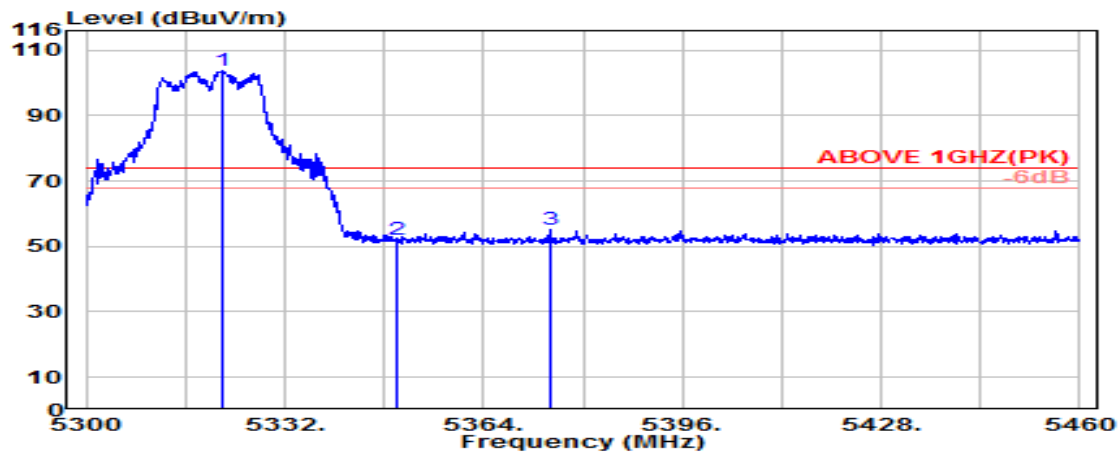

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.100	33.64	8.65	39.08	100.60	103.81	---	---	Peak
5350.000	33.70	8.67	39.08	48.91	52.19	74.00	21.81	Peak
5374.700	33.85	8.68	39.08	51.53	54.98	74.00	19.02	Peak

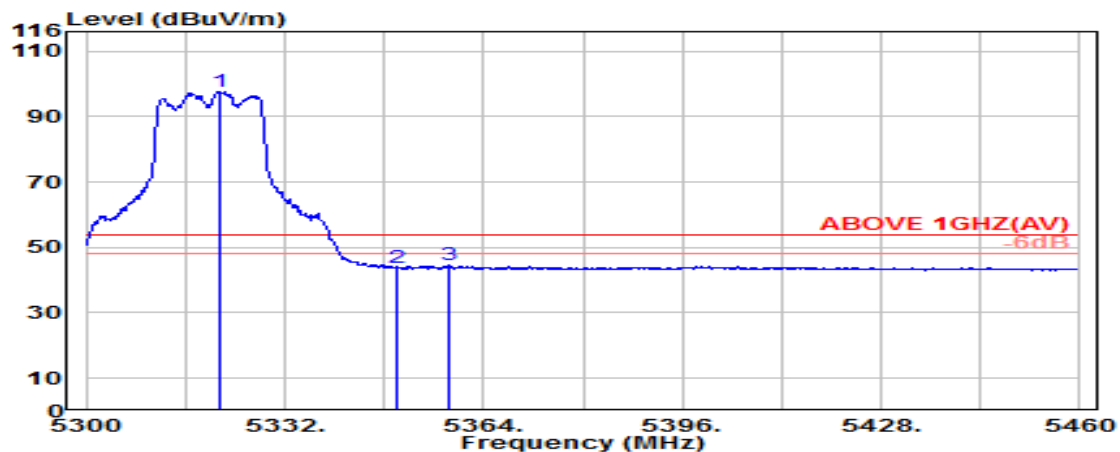

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.500	33.64	8.65	39.08	94.56	97.77	---	---	Average
5350.000	33.70	8.67	39.08	40.68	43.96	54.00	10.04	Average
5358.300	33.75	8.67	39.08	41.24	44.58	54.00	9.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

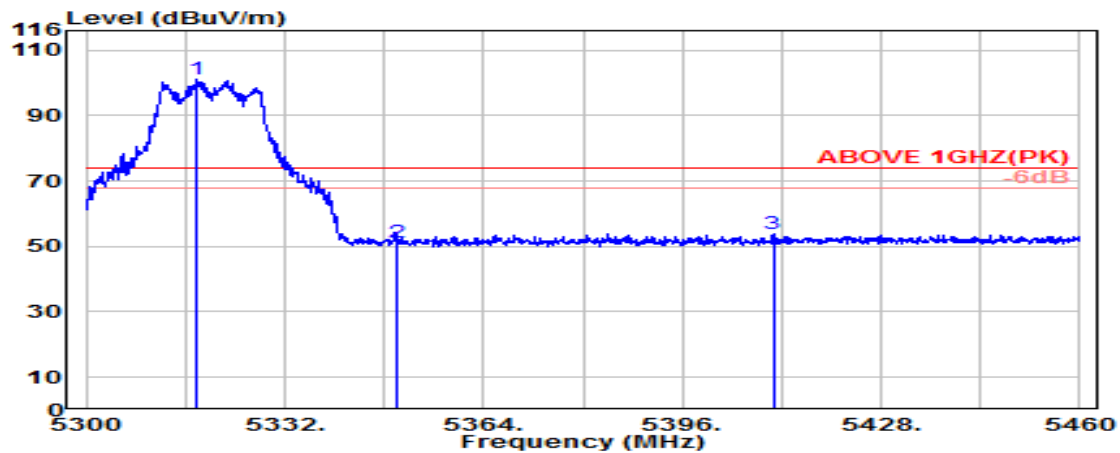

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.900	33.64	8.65	39.08	97.77	100.97	---	---	Peak
5350.000	33.70	8.67	39.08	47.83	51.12	74.00	22.88	Peak
5410.600	34.02	8.70	39.08	50.28	53.93	74.00	20.07	Peak

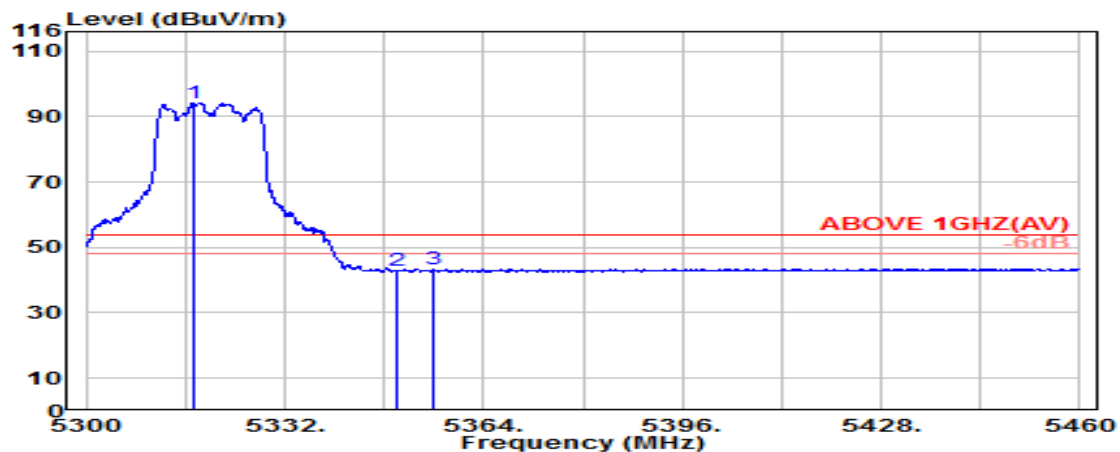

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.300	33.63	8.65	39.08	91.00	94.20	---	---	Average
5350.000	33.70	8.67	39.08	39.80	43.09	54.00	10.91	Average
5356.000	33.74	8.67	39.08	40.18	43.51	54.00	10.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

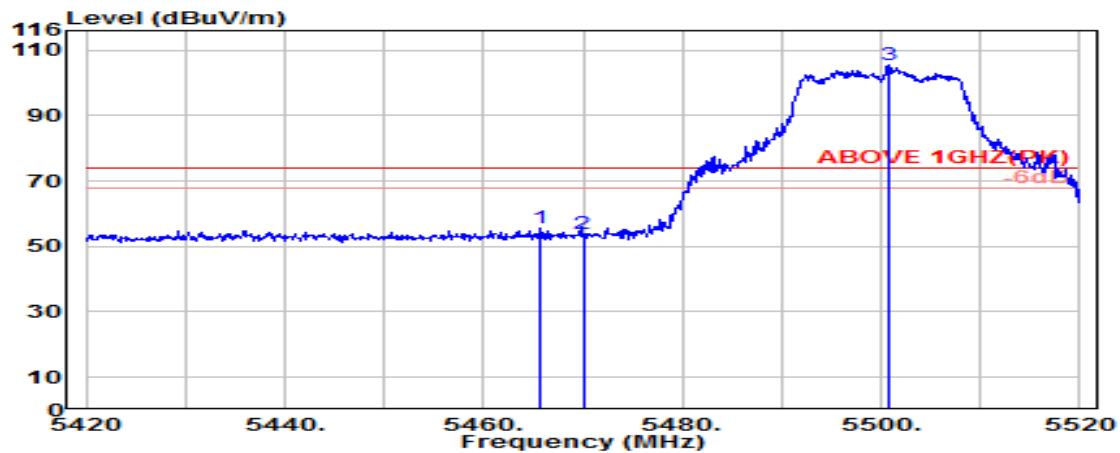

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.10	8.73	39.07	51.67	55.43	74.00	18.57	Peak
5470.000	34.10	8.74	39.07	49.96	53.72	74.00	20.28	Peak
@ 5500.900	34.10	8.75	39.07	101.92	105.70	---	---	Peak

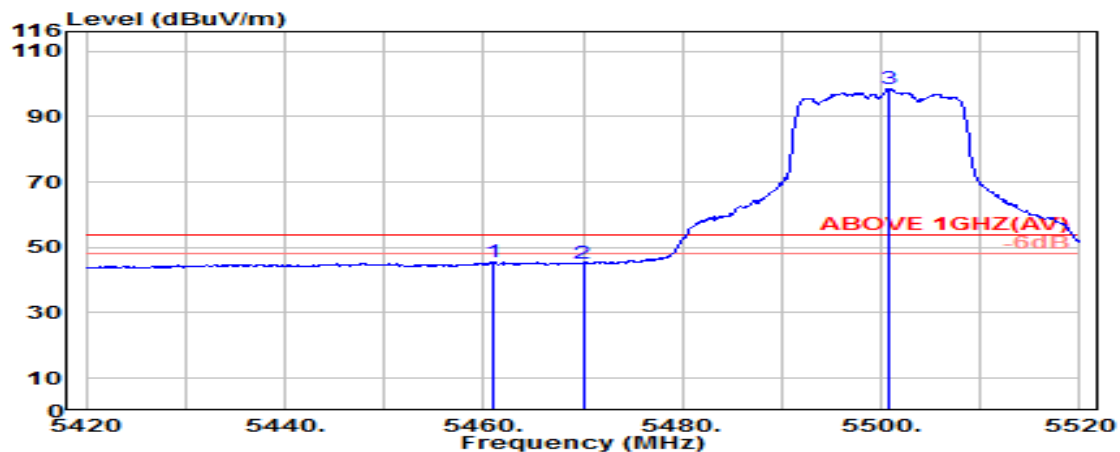


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.900	34.10	8.73	39.07	41.78	45.53	54.00	8.47	Average
5470.000	34.10	8.74	39.07	41.47	45.23	54.00	8.77	Average
@ 5500.700	34.10	8.75	39.07	94.62	98.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

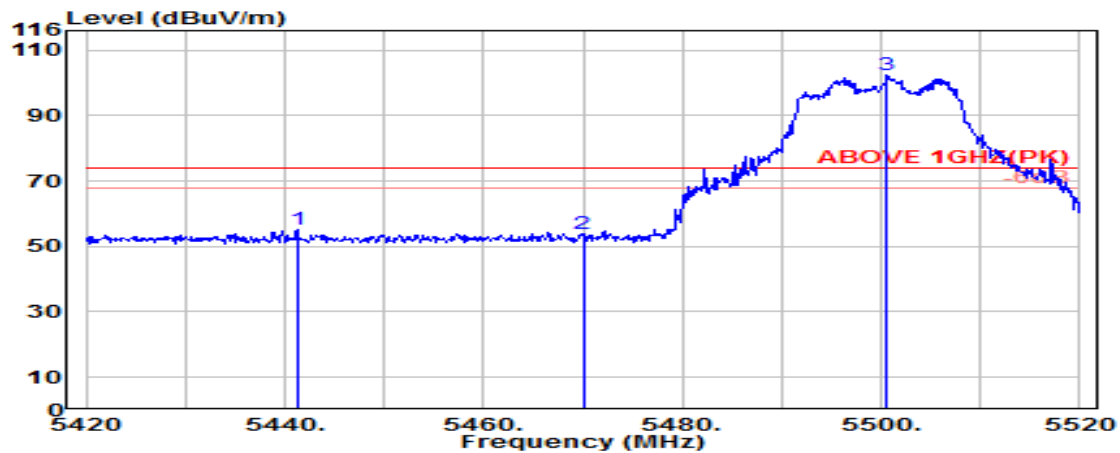

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.200	34.08	8.72	39.07	51.27	55.00	74.00	19.00	Peak
5470.000	34.10	8.74	39.07	50.12	53.88	74.00	20.12	Peak
@ 5500.600	34.10	8.75	39.07	98.47	102.25	---	---	Peak

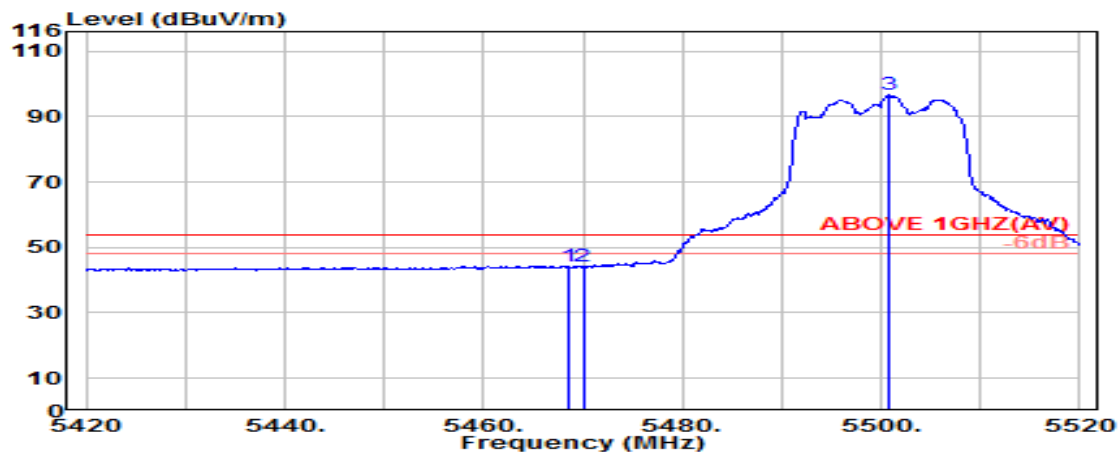

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.10	8.73	39.07	40.64	44.40	54.00	9.60	Average
5470.000	34.10	8.74	39.07	40.34	44.10	54.00	9.90	Average
@ 5500.900	34.10	8.75	39.07	92.85	96.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

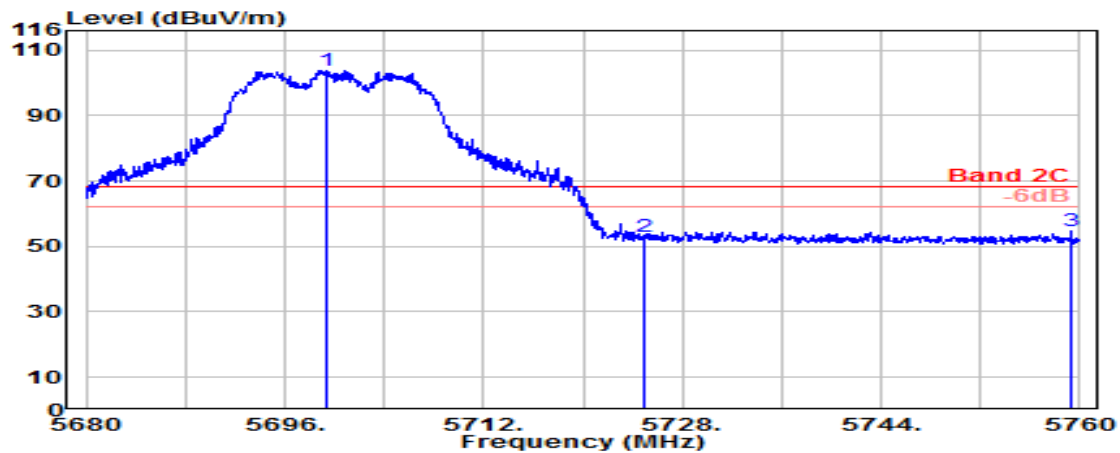

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.450	33.40	8.87	39.13	100.72	103.86	---	---	Peak
5725.000	33.60	8.88	39.14	49.52	52.86	68.20	15.34	Peak
5759.250	33.82	8.90	39.15	50.99	54.56	68.20	13.64	Peak

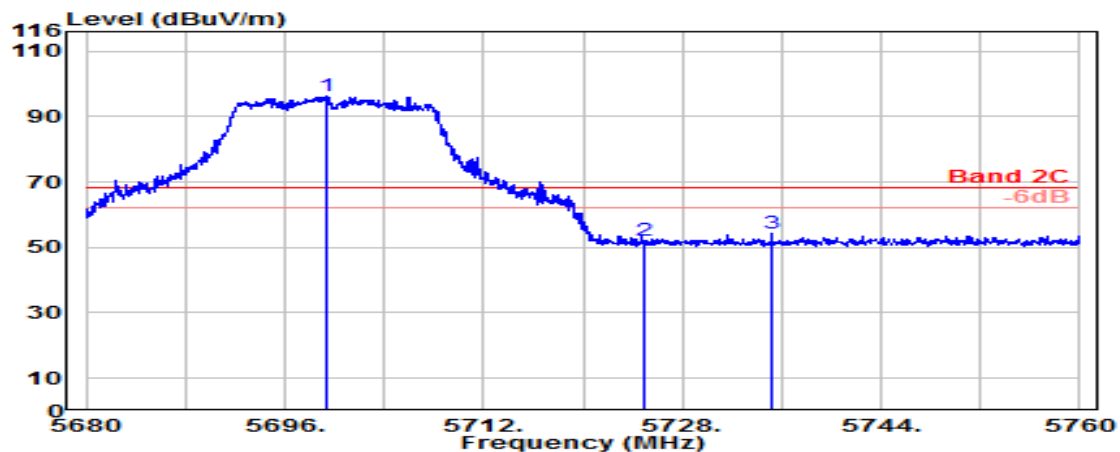


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.350	33.40	8.87	39.13	93.35	96.49	---	---	Peak
5725.000	33.60	8.88	39.14	48.60	51.94	68.20	16.26	Peak
5735.150	33.68	8.89	39.14	50.76	54.18	68.20	14.02	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

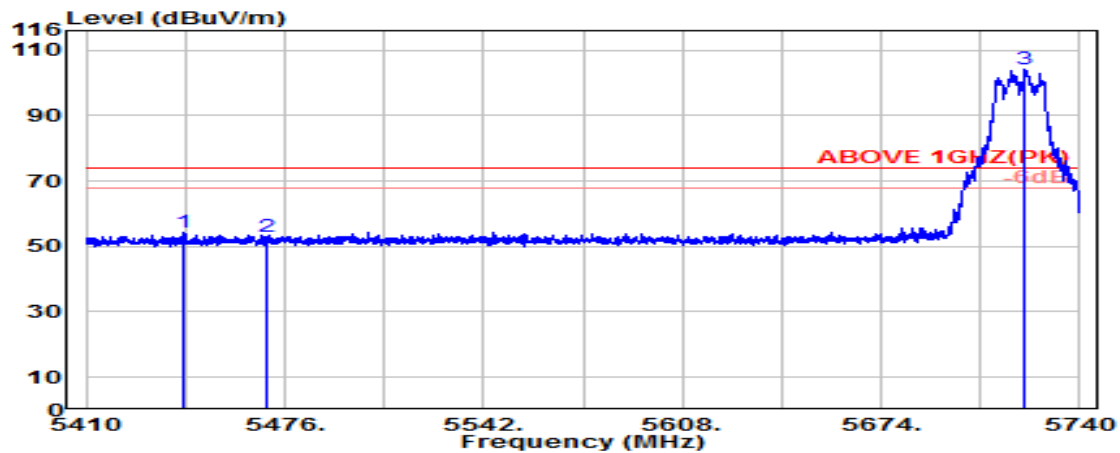

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.700	34.09	8.72	39.07	50.42	54.15	74.00	19.85	Peak
5470.000	34.10	8.74	39.07	49.15	52.92	74.00	21.08	Peak
@ 5721.900	33.58	8.88	39.14	101.08	104.39	---	---	Peak

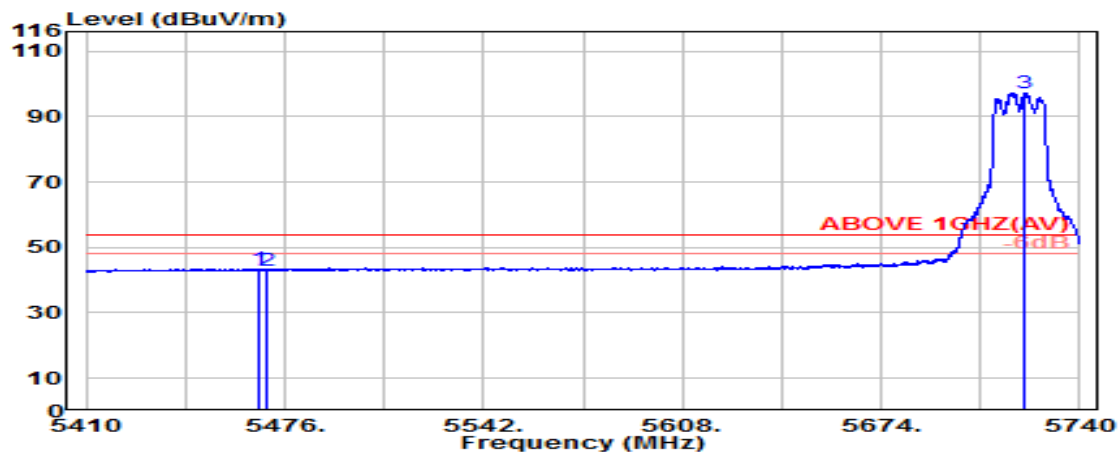


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.10	8.73	39.07	39.69	43.45	54.00	10.55	Average
5470.000	34.10	8.74	39.07	39.25	43.01	54.00	10.99	Average
@ 5721.700	33.57	8.88	39.14	94.06	97.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

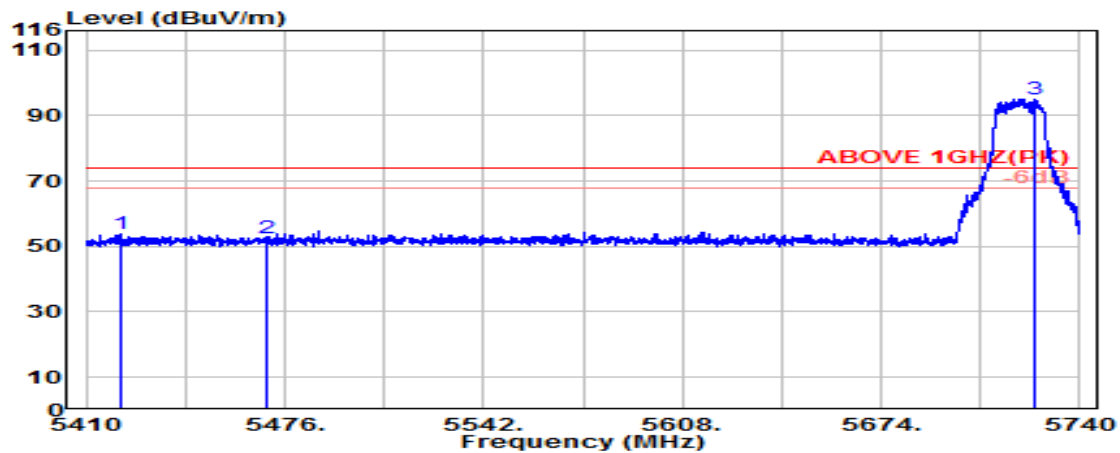

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5421.200	34.04	8.71	39.07	50.02	53.69	74.00	20.31	Peak
5470.000	34.10	8.74	39.07	48.76	52.53	74.00	21.47	Peak
@ 5725.300	33.60	8.88	39.14	91.62	94.97	---	---	Peak

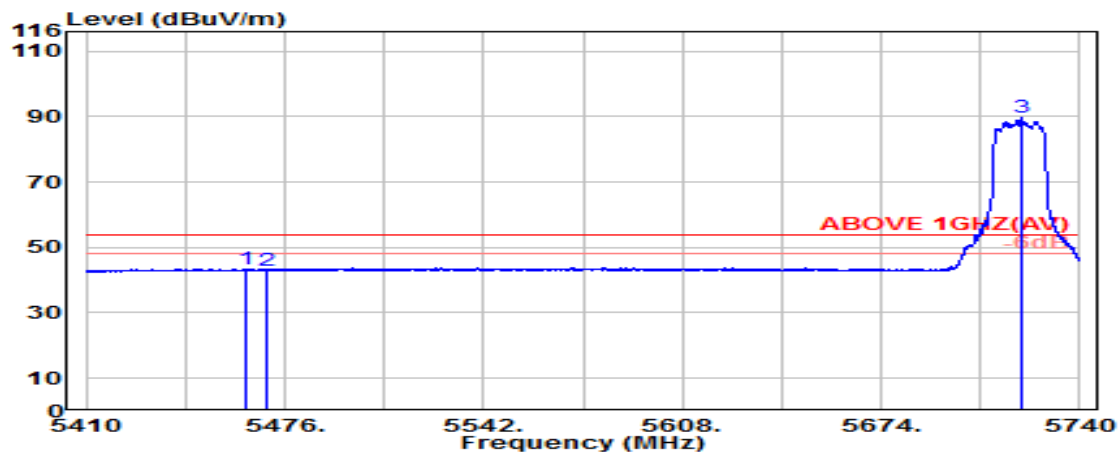

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.700	34.10	8.73	39.07	39.54	43.30	54.00	10.70	Average
5470.000	34.10	8.74	39.07	39.14	42.90	54.00	11.10	Average
@ 5720.600	33.57	8.88	39.14	86.35	89.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

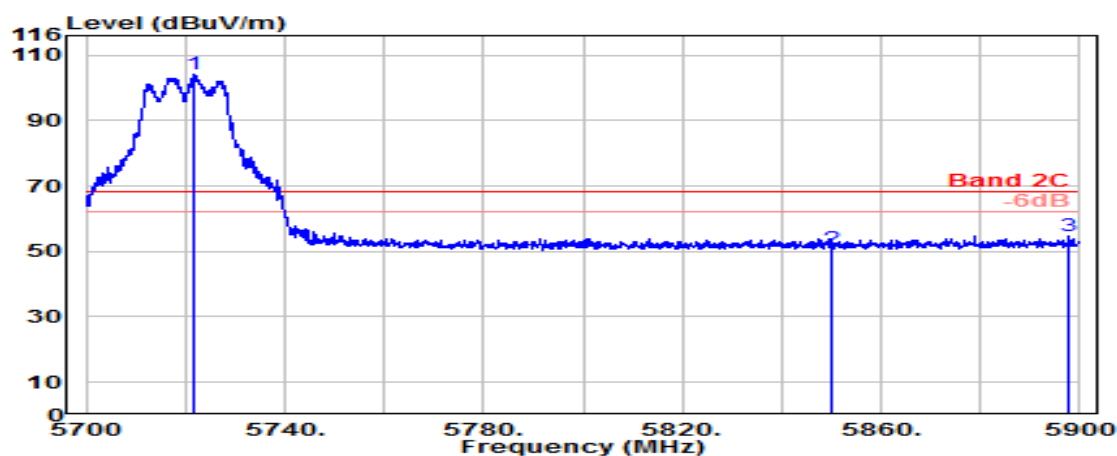

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.900	33.58	8.88	39.14	100.74	104.05	---	---	Peak
5850.000	33.90	8.95	39.18	47.29	50.97	68.20	17.23	Peak
5897.800	34.19	8.98	39.19	50.67	54.64	68.20	13.56	Peak

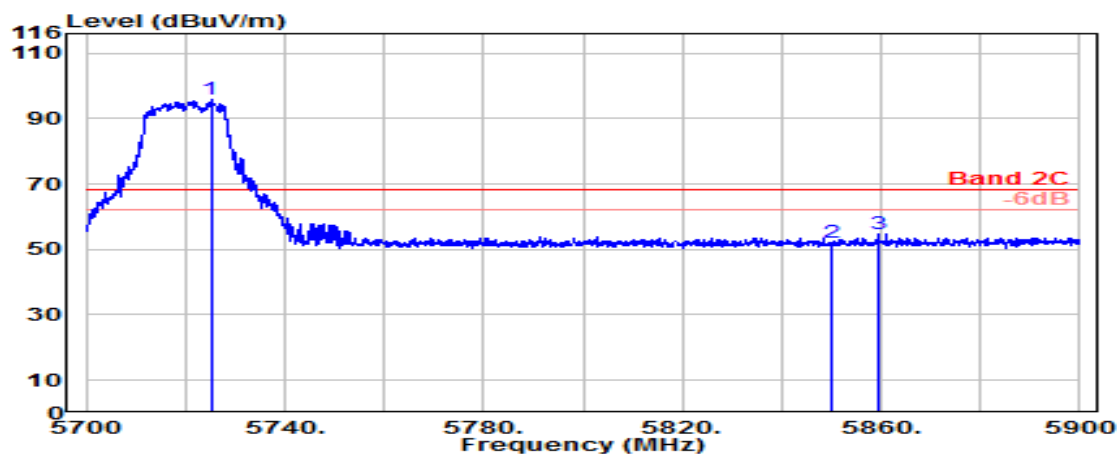

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5725.100	33.60	8.88	39.14	92.63	95.97	---	---	Peak
5850.000	33.90	8.95	39.18	48.40	52.07	68.20	16.13	Peak
5859.300	33.96	8.95	39.18	50.92	54.65	68.20	13.55	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

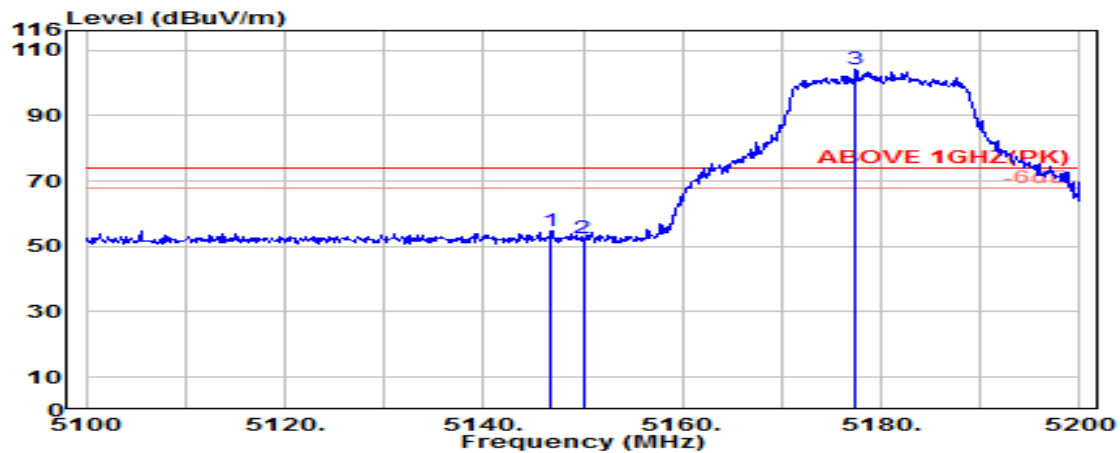

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.800	33.59	8.54	39.09	51.60	54.65	74.00	19.35	Peak
5150.000	33.60	8.54	39.09	49.62	52.67	74.00	21.33	Peak
@ 5177.500	33.60	8.56	39.09	100.97	104.05	---	---	Peak

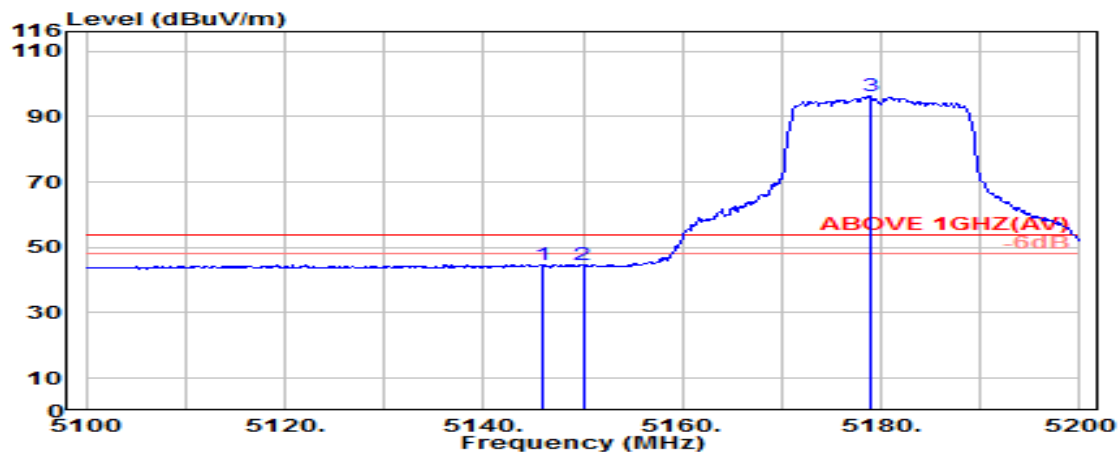

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.900	33.59	8.54	39.09	41.79	44.83	54.00	9.17	Average
5150.000	33.60	8.54	39.09	41.40	44.45	54.00	9.55	Average
@ 5178.900	33.60	8.56	39.09	93.14	96.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

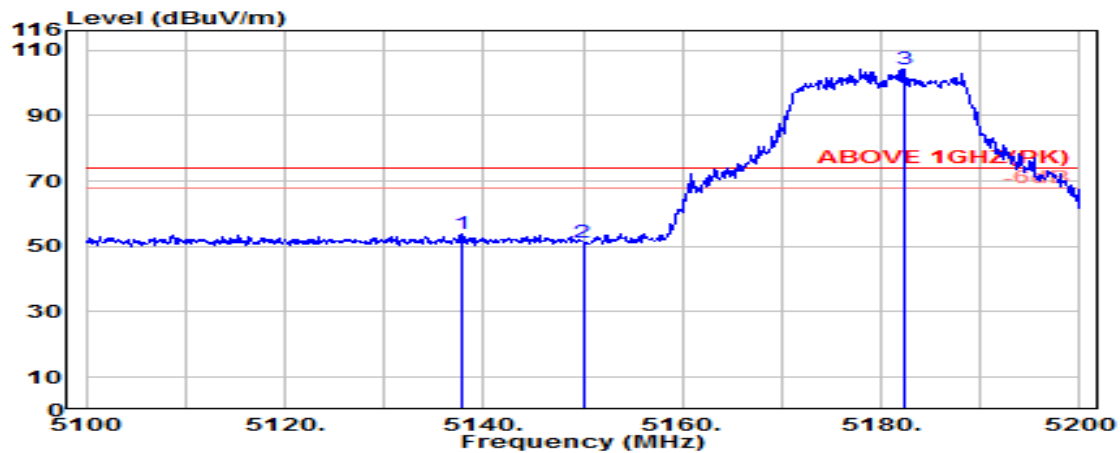

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.700	33.58	8.54	39.09	50.90	53.92	74.00	20.08	Peak
5150.000	33.60	8.54	39.09	48.21	51.27	74.00	22.73	Peak
@ 5182.300	33.60	8.56	39.09	101.23	104.30	---	---	Peak

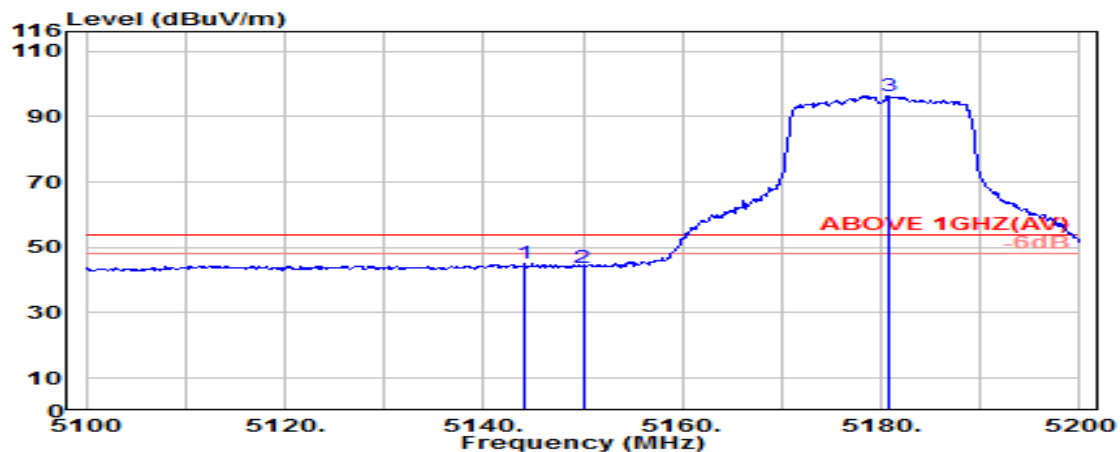

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.100	33.59	8.54	39.09	42.17	45.21	54.00	8.79	Average
5150.000	33.60	8.54	39.09	40.92	43.97	54.00	10.03	Average
@ 5180.700	33.60	8.56	39.09	93.21	96.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

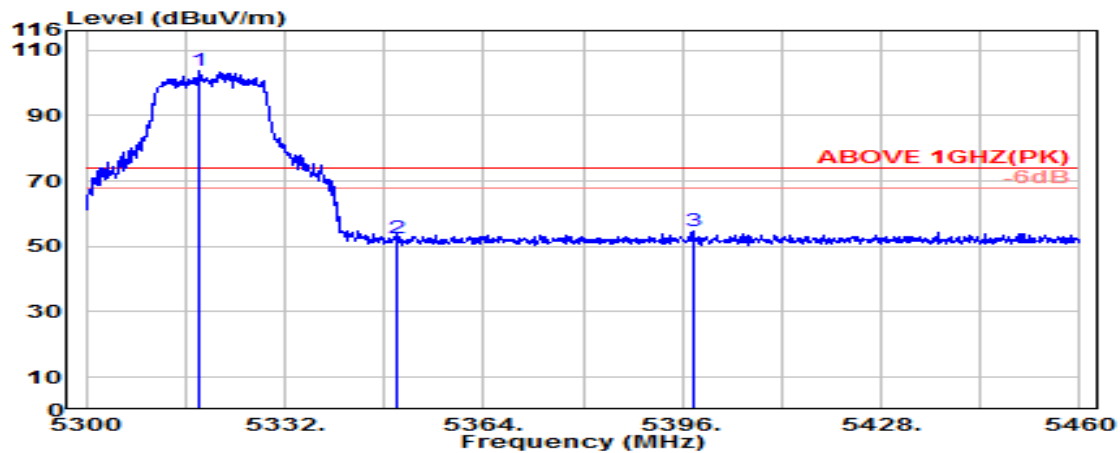

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	33.64	8.65	39.08	100.71	103.92	---	---	Peak
5350.000	33.70	8.67	39.08	49.20	52.49	74.00	21.51	Peak
5397.700	33.99	8.69	39.08	51.04	54.64	74.00	19.36	Peak

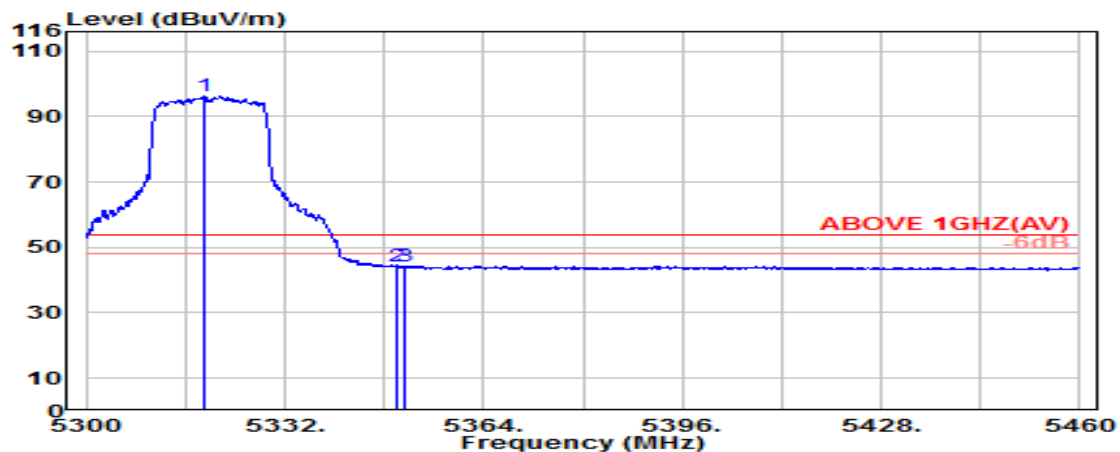

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.100	33.64	8.65	39.08	93.16	96.37	---	---	Average
5350.000	33.70	8.67	39.08	40.99	44.28	54.00	9.72	Average
5351.200	33.71	8.67	39.08	41.13	44.43	54.00	9.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

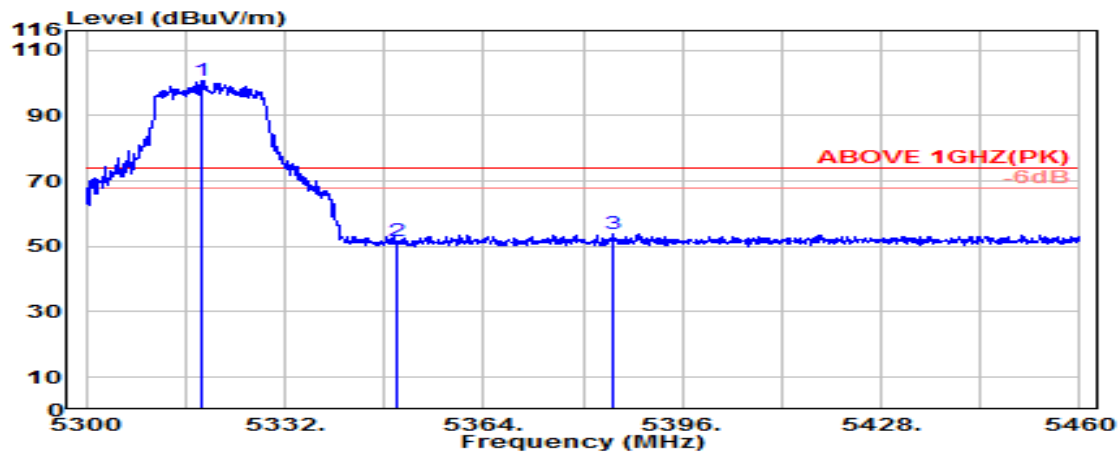

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.600	33.64	8.65	39.08	97.32	100.52	---	---	Peak
5350.000	33.70	8.67	39.08	48.34	51.63	74.00	22.37	Peak
5385.000	33.91	8.69	39.08	50.38	53.90	74.00	20.10	Peak

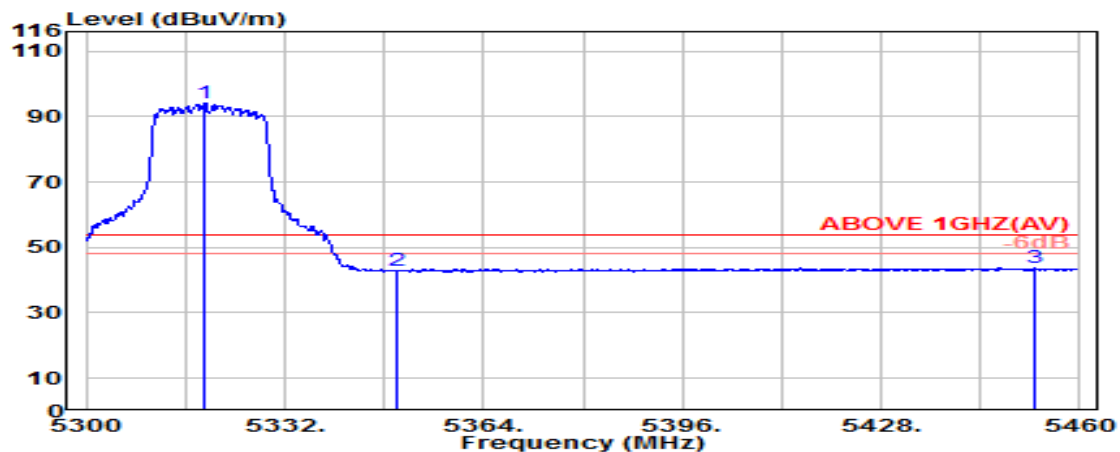

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.200	33.64	8.65	39.08	90.86	94.07	---	---	Average
5350.000	33.70	8.67	39.08	39.72	43.00	54.00	11.00	Average
5452.600	34.10	8.73	39.07	39.94	43.69	54.00	10.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

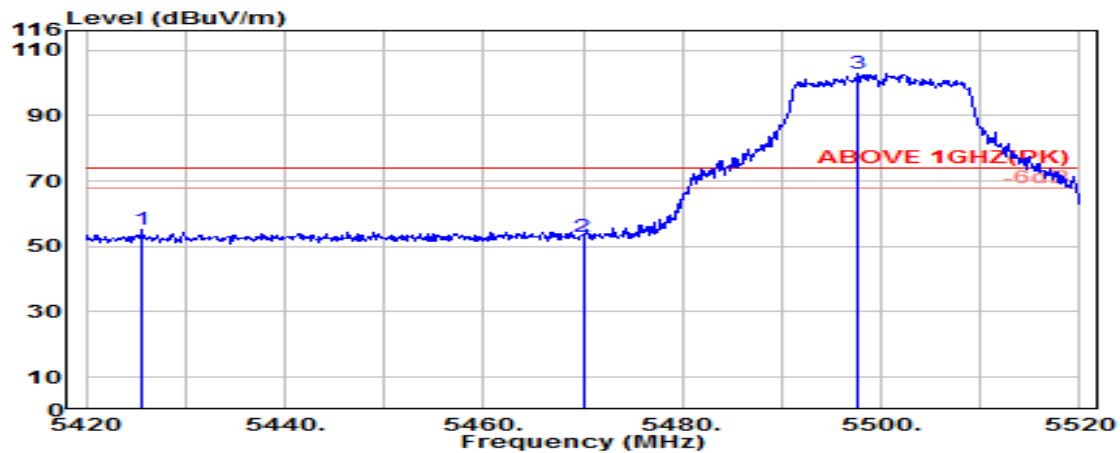

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.700	34.05	8.71	39.07	51.30	54.99	74.00	19.01	Peak
5470.000	34.10	8.74	39.07	49.26	53.02	74.00	20.98	Peak
@ 5497.700	34.10	8.75	39.07	98.94	102.72	---	---	Peak

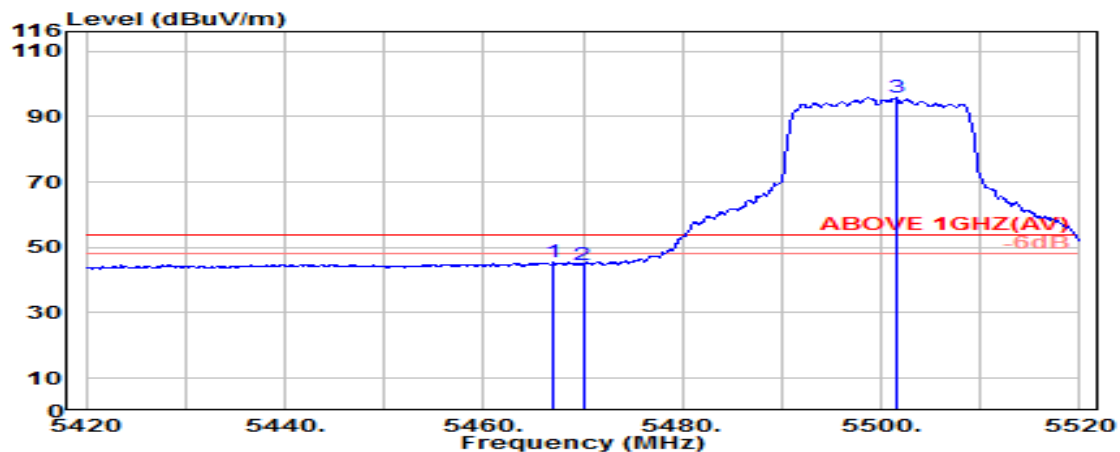


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.10	8.73	39.07	41.68	45.45	54.00	8.55	Average
5470.000	34.10	8.74	39.07	41.08	44.85	54.00	9.15	Average
@ 5501.500	34.10	8.75	39.07	92.22	96.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

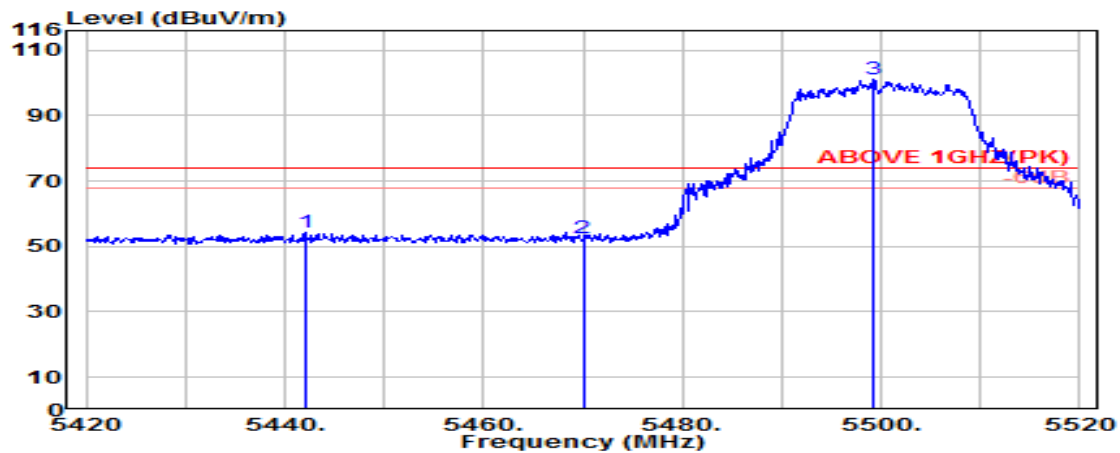

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.000	34.08	8.72	39.07	50.47	54.20	74.00	19.80	Peak
5470.000	34.10	8.74	39.07	48.79	52.55	74.00	21.45	Peak
@ 5499.100	34.10	8.75	39.07	97.15	100.94	---	---	Peak

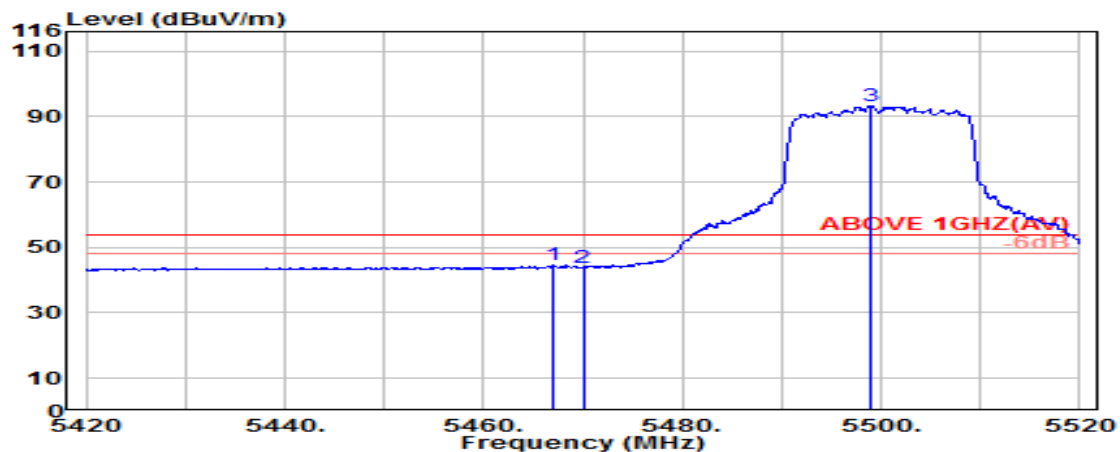


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.10	8.73	39.07	40.97	44.74	54.00	9.26	Average
5470.000	34.10	8.74	39.07	40.14	43.90	54.00	10.10	Average
@ 5499.000	34.10	8.75	39.07	89.64	93.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

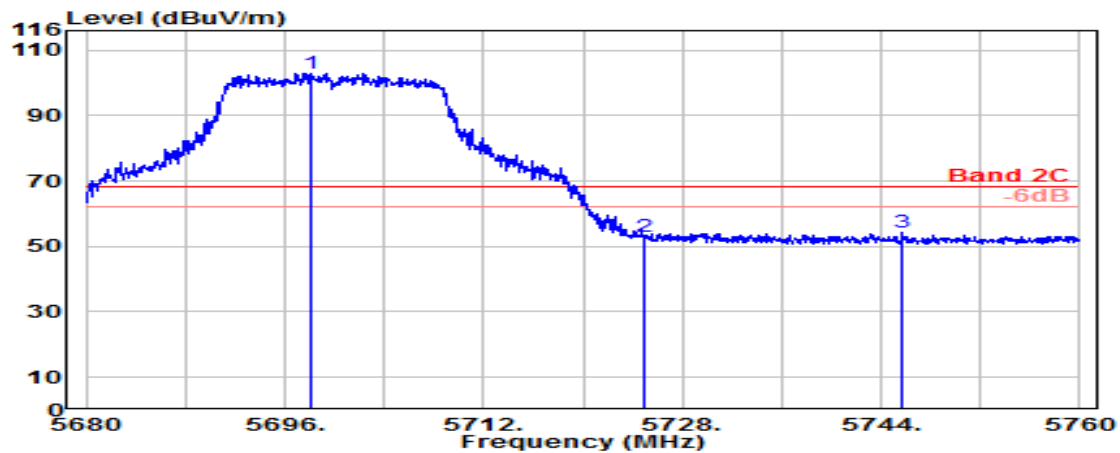

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.050	33.41	8.87	39.13	99.90	103.05	---	---	Peak
5725.000	33.60	8.88	39.14	49.43	52.77	68.20	15.43	Peak
5745.700	33.77	8.89	39.15	50.55	54.06	68.20	14.14	Peak

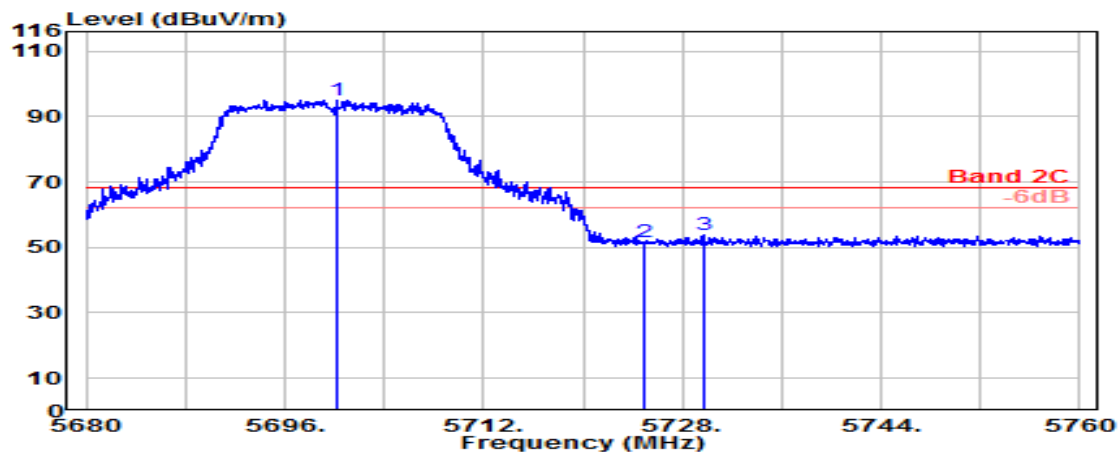

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.100	33.40	8.87	39.13	92.00	95.14	---	---	Peak
5725.000	33.60	8.88	39.14	48.19	51.54	68.20	16.66	Peak
5729.650	33.64	8.88	39.14	50.49	53.87	68.20	14.33	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

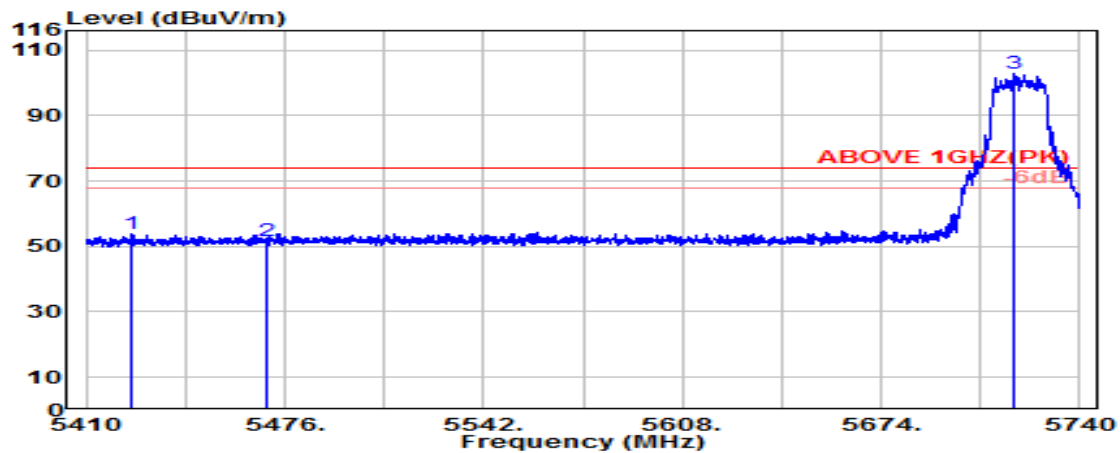

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.300	34.05	8.71	39.07	50.06	53.75	74.00	20.25	Peak
5470.000	34.10	8.74	39.07	47.85	51.61	74.00	22.39	Peak
@ 5717.900	33.54	8.88	39.14	99.76	103.04	---	---	Peak

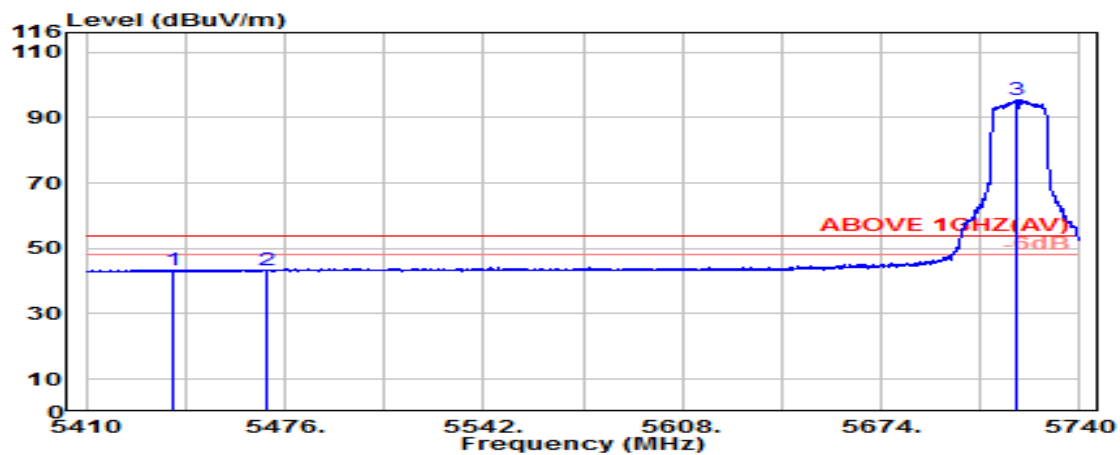

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.800	34.08	8.72	39.07	39.82	43.54	54.00	10.46	Average
5470.000	34.10	8.74	39.07	39.47	43.24	54.00	10.76	Average
@ 5719.300	33.55	8.88	39.14	92.18	95.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

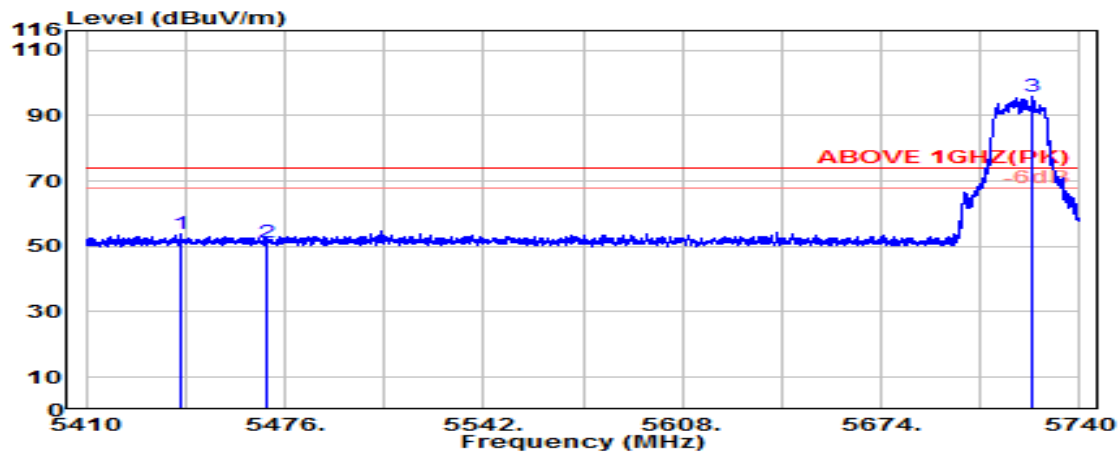

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.600	34.08	8.72	39.07	50.03	53.76	74.00	20.24	Peak
5470.000	34.10	8.74	39.07	47.65	51.41	74.00	22.59	Peak
@ 5724.400	33.60	8.88	39.14	92.43	95.77	---	---	Peak

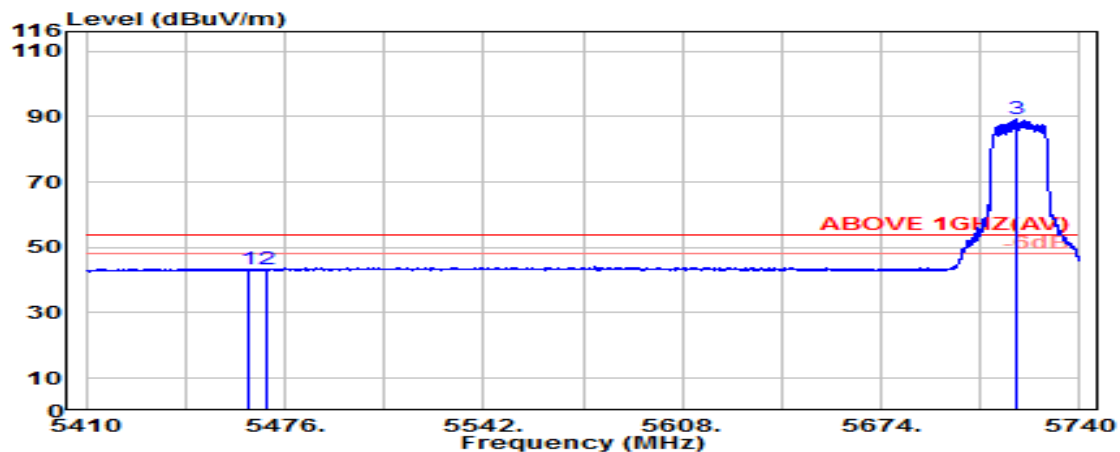

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.200	34.10	8.73	39.07	39.78	43.54	54.00	10.46	Average
5470.000	34.10	8.74	39.07	39.51	43.27	54.00	10.73	Average
@ 5719.100	33.55	8.88	39.14	86.15	89.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

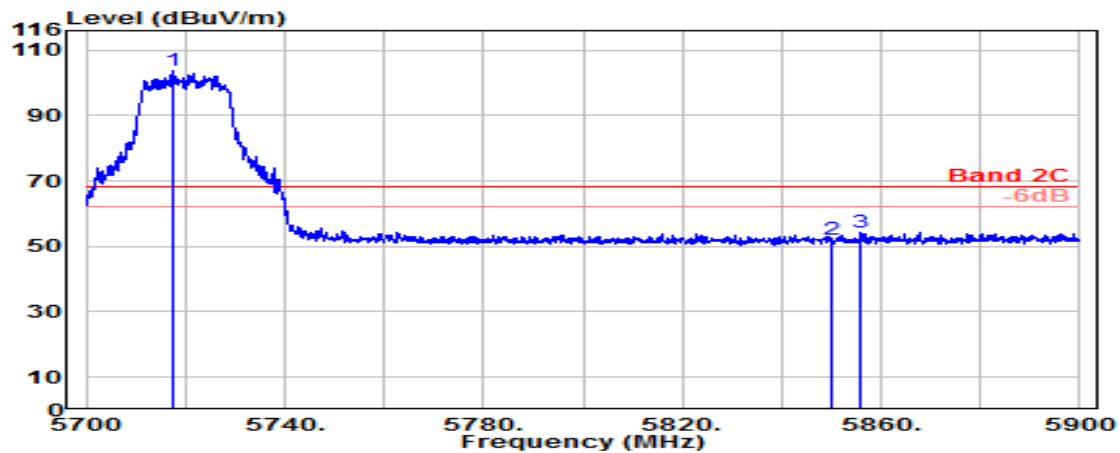

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.400	33.54	8.88	39.14	100.41	103.69	---	---	Peak
5850.000	33.90	8.95	39.18	48.63	52.30	68.20	15.90	Peak
5856.000	33.94	8.95	39.18	50.54	54.25	68.20	13.95	Peak

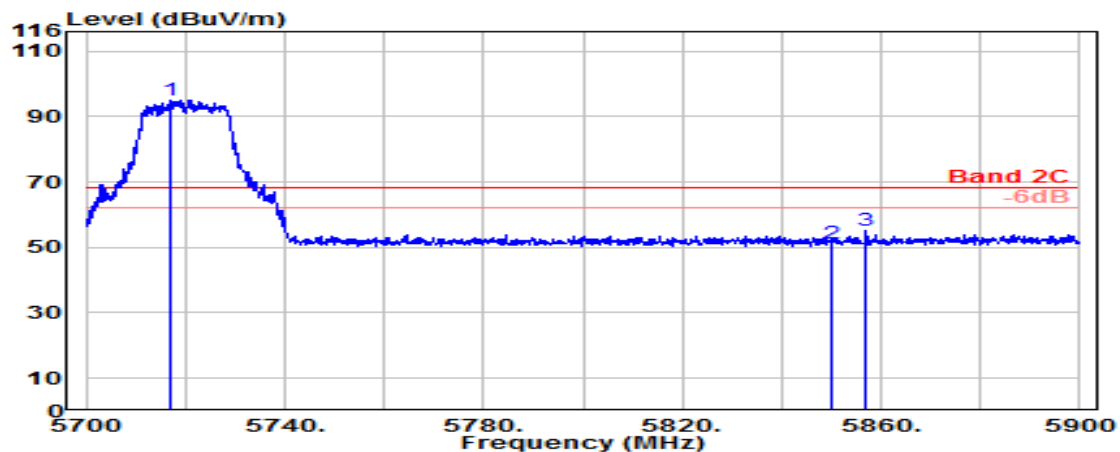

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.000	33.54	8.88	39.14	91.74	95.02	---	---	Peak
5850.000	33.90	8.95	39.18	47.62	51.29	68.20	16.91	Peak
5857.000	33.94	8.95	39.18	51.56	55.28	68.20	12.92	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

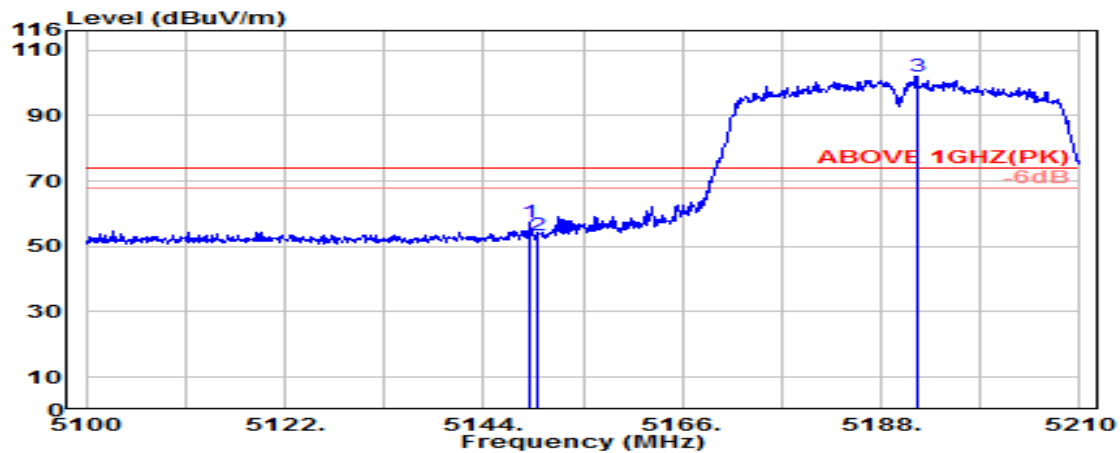

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.60	8.54	39.09	54.19	57.24	74.00	16.76	Peak
5150.000	33.60	8.54	39.09	50.40	53.46	74.00	20.54	Peak
@ 5191.900	33.60	8.57	39.09	98.85	101.93	---	---	Peak

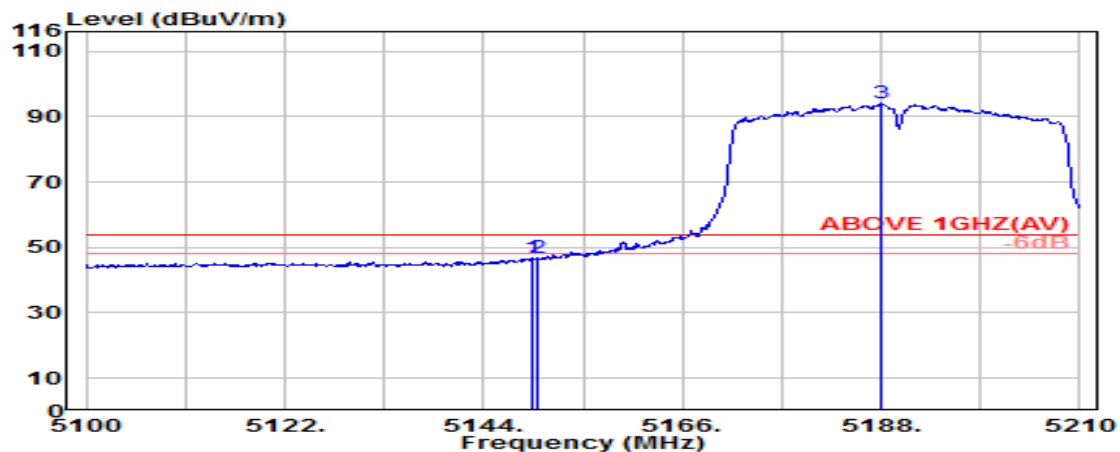

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.60	8.54	39.09	43.75	46.80	54.00	7.20	Average
5150.000	33.60	8.54	39.09	43.61	46.66	54.00	7.34	Average
@ 5187.900	33.60	8.57	39.09	91.05	94.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

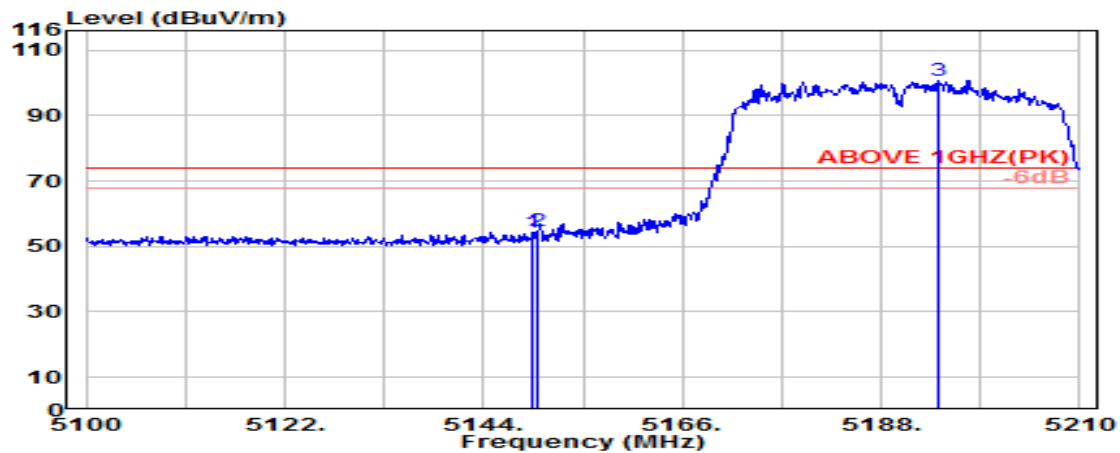

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.60	8.54	39.09	51.39	54.44	74.00	19.56	Peak
5150.000	33.60	8.54	39.09	51.48	54.54	74.00	19.46	Peak
@ 5194.300	33.60	8.57	39.09	97.70	100.78	---	---	Peak

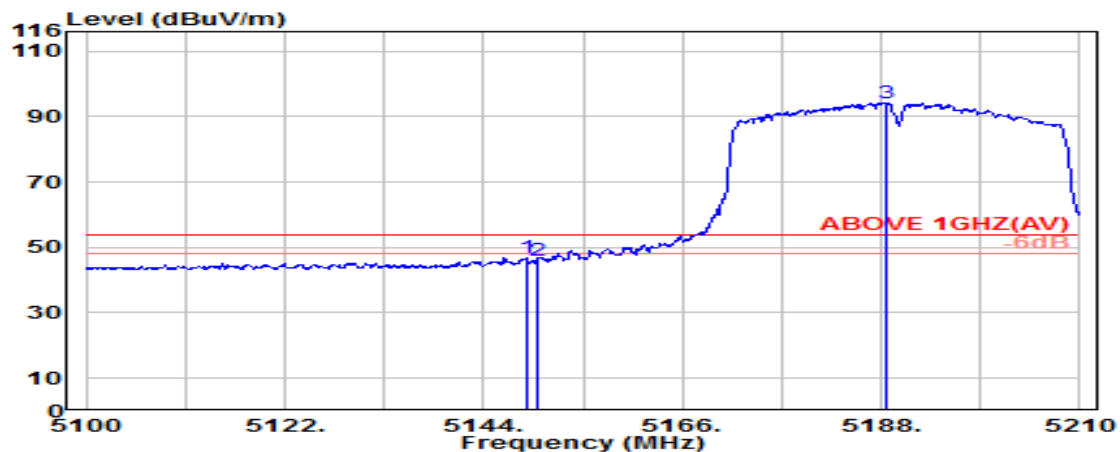

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.60	8.54	39.09	43.80	46.85	54.00	7.15	Average
5150.000	33.60	8.54	39.09	43.12	46.17	54.00	7.83	Average
@ 5188.500	33.60	8.57	39.09	91.22	94.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

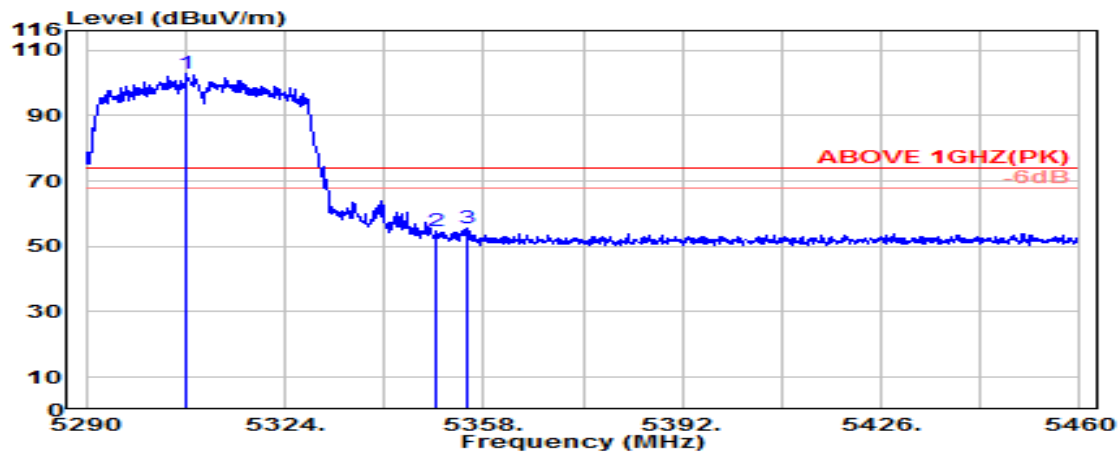

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.200	33.61	8.64	39.08	99.69	102.86	---	---	Peak
5350.000	33.70	8.67	39.08	51.56	54.84	74.00	19.16	Peak
5355.400	33.73	8.67	39.08	52.32	55.64	74.00	18.36	Peak

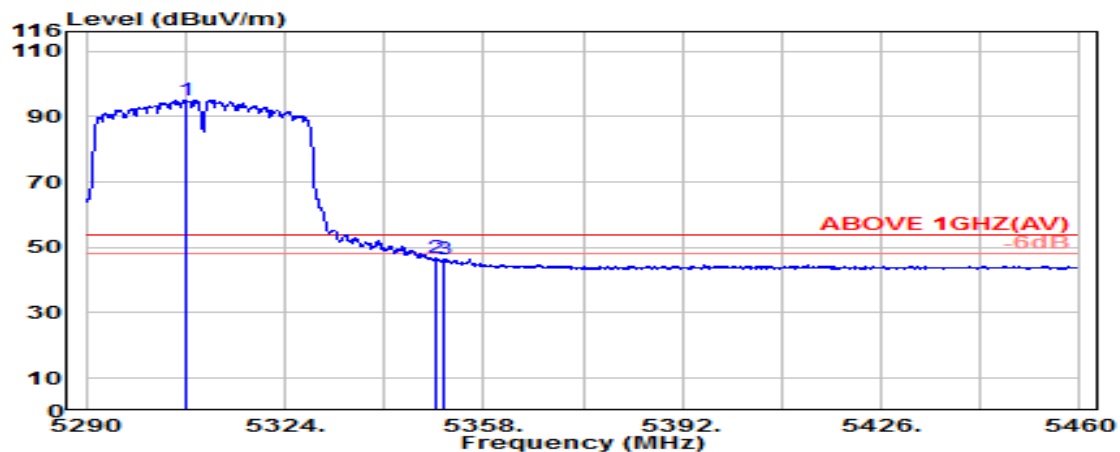

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.100	33.61	8.64	39.08	92.00	95.18	---	---	Average
5350.000	33.70	8.67	39.08	43.47	46.76	54.00	7.24	Average
5351.200	33.71	8.67	39.08	43.09	46.38	54.00	7.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

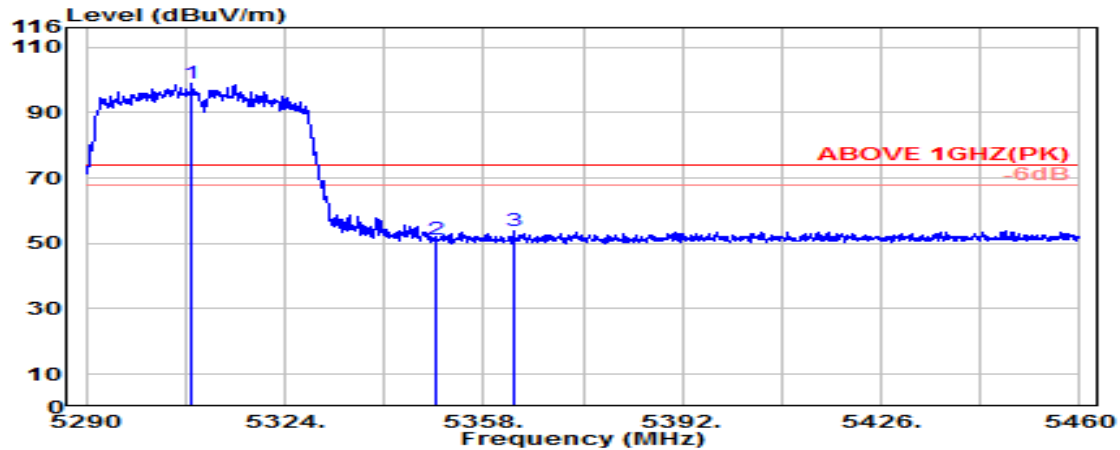

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.100	33.62	8.64	39.08	95.76	98.93	---	---	Peak
5350.000	33.70	8.67	39.08	47.78	51.06	74.00	22.94	Peak
5363.100	33.78	8.67	39.08	50.60	53.98	74.00	20.02	Peak

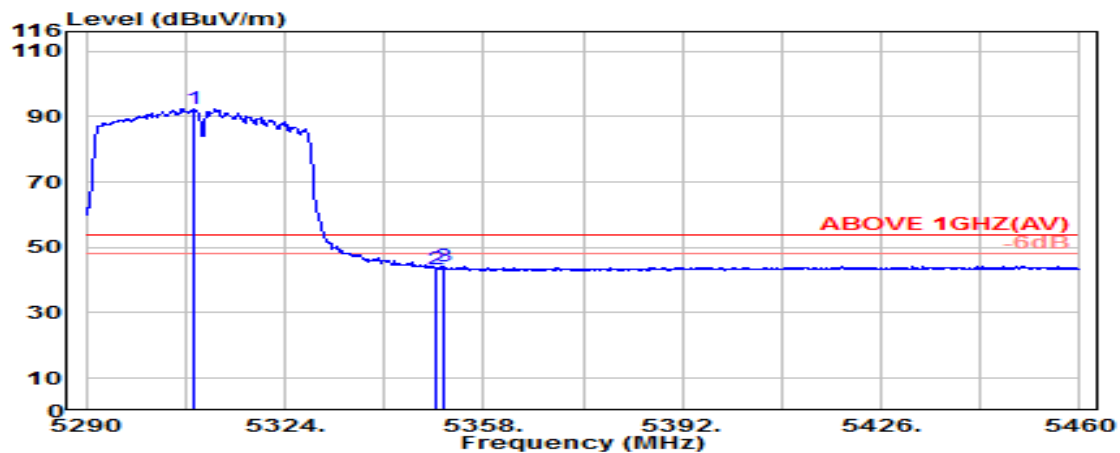

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.600	33.62	8.64	39.08	89.31	92.49	---	---	Average
5350.000	33.70	8.67	39.08	40.19	43.48	54.00	10.52	Average
5351.100	33.71	8.67	39.08	40.77	44.07	54.00	9.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

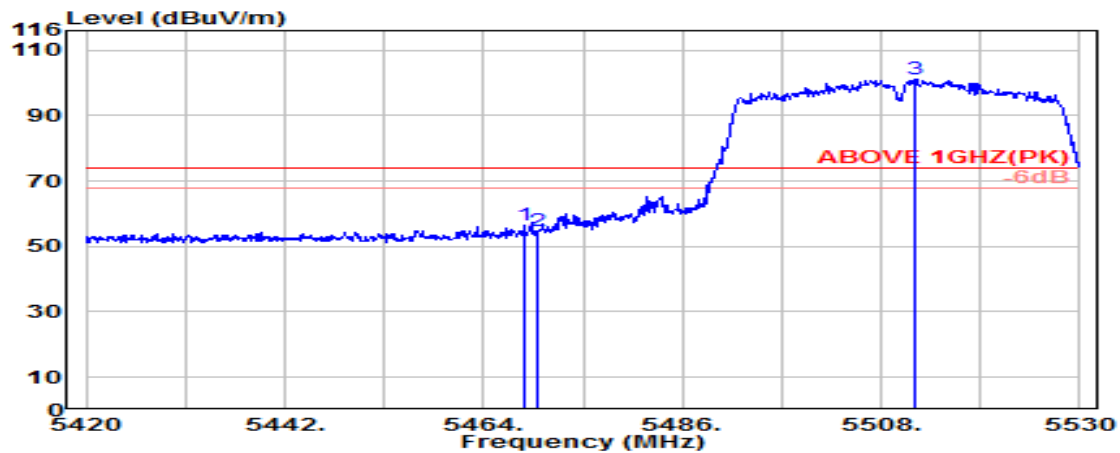

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.10	8.73	39.07	52.69	56.46	74.00	17.54	Peak
5470.000	34.10	8.74	39.07	50.87	54.63	74.00	19.37	Peak
@ 5511.800	34.08	8.76	39.07	97.49	101.25	---	---	Peak

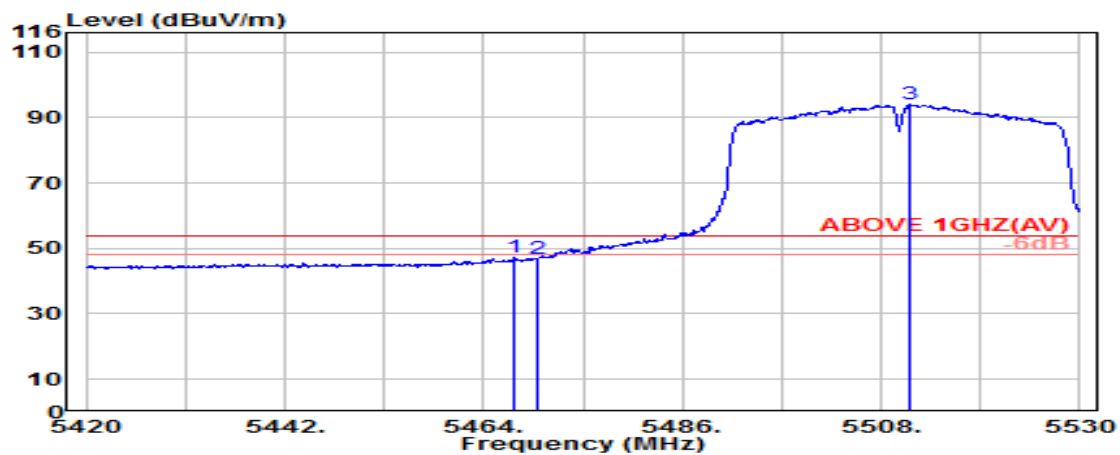

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.10	8.73	39.07	43.34	47.10	54.00	6.90	Average
5470.000	34.10	8.74	39.07	42.90	46.67	54.00	7.33	Average
@ 5511.200	34.08	8.76	39.07	90.46	94.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

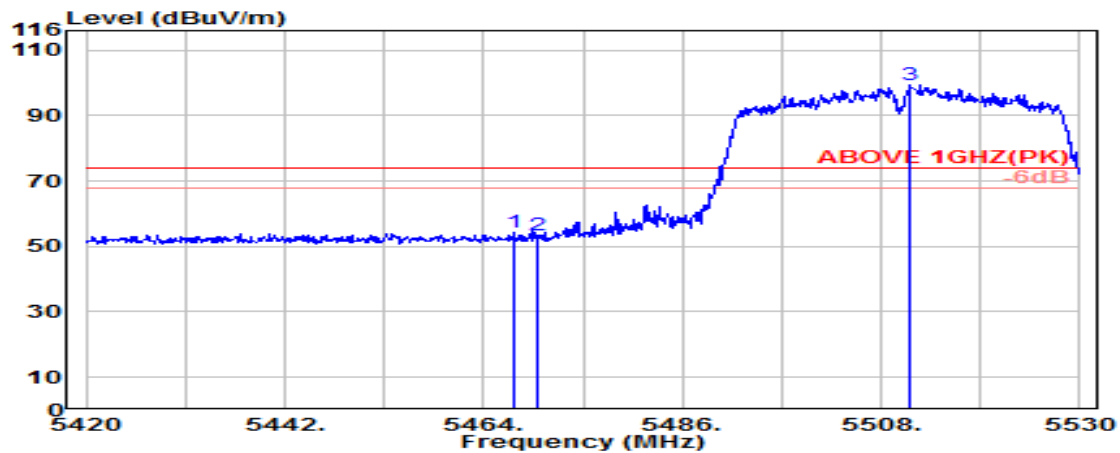

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.10	8.73	39.07	50.33	54.09	74.00	19.91	Peak
5470.000	34.10	8.74	39.07	49.43	53.20	74.00	20.80	Peak
@ 5511.200	34.08	8.76	39.07	95.62	99.38	---	---	Peak

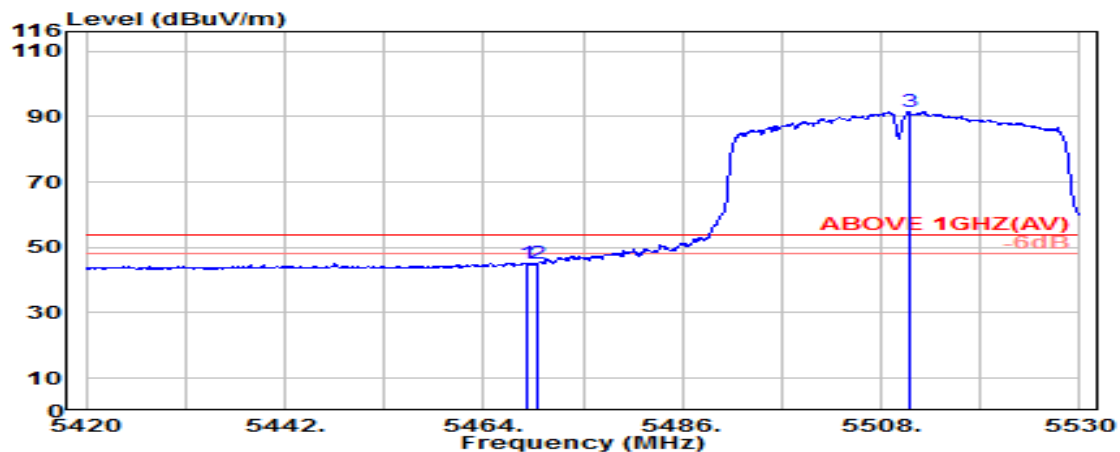

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.10	8.74	39.07	41.54	45.30	54.00	8.70	Average
5470.000	34.10	8.74	39.07	41.43	45.20	54.00	8.80	Average
@ 5511.100	34.08	8.76	39.07	87.93	91.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

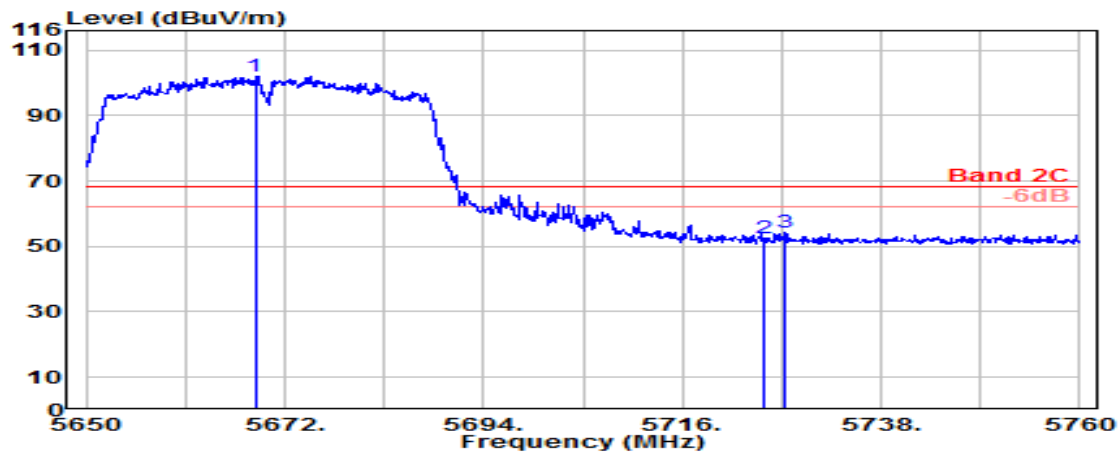

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5668.700	33.59	8.85	39.12	98.73	102.04	---	---	Peak
5725.000	33.60	8.88	39.14	49.31	52.65	68.20	15.55	Peak
5727.400	33.62	8.88	39.14	51.10	54.46	68.20	13.74	Peak

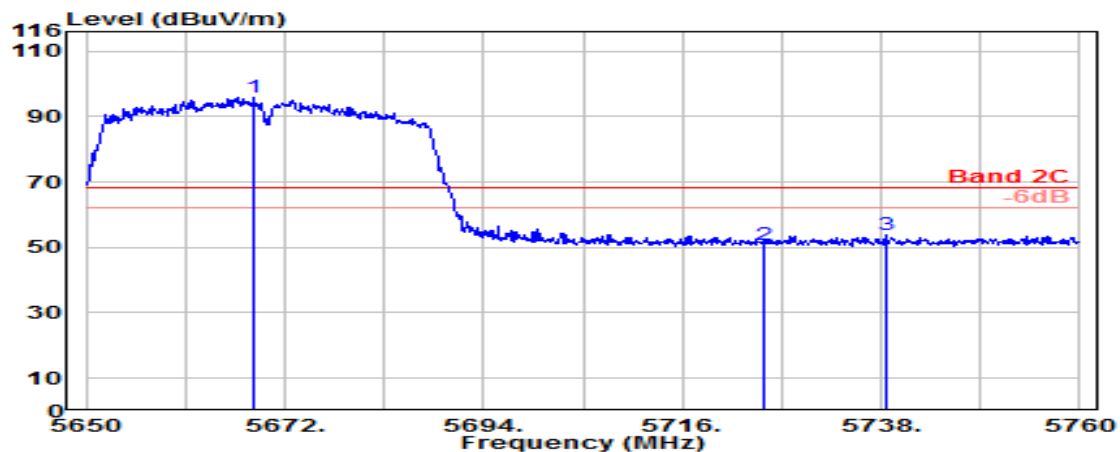


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5668.600	33.59	8.85	39.12	92.40	95.71	---	---	Peak
5725.000	33.60	8.88	39.14	47.42	50.77	68.20	17.43	Peak
5738.500	33.71	8.89	39.14	50.26	53.72	68.20	14.48	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

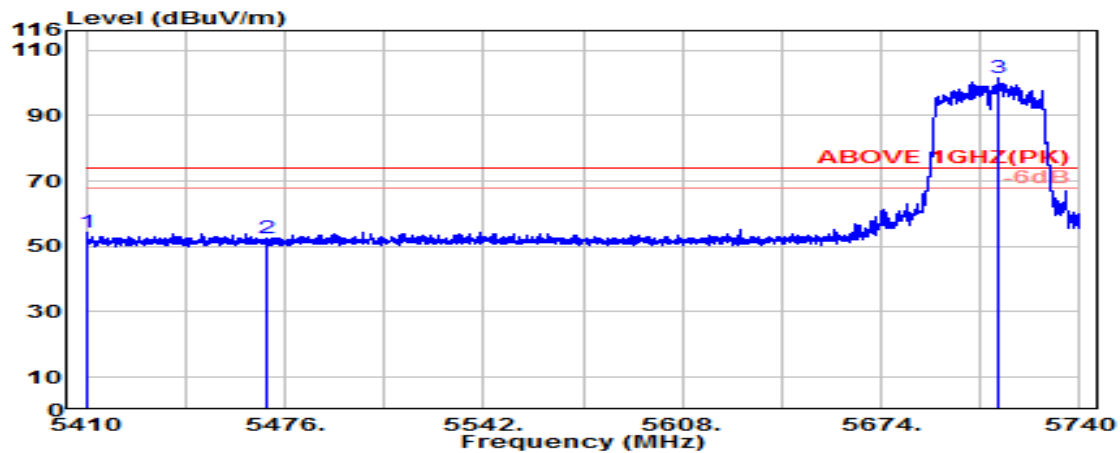

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5410.200	34.02	8.70	39.08	50.55	54.19	74.00	19.81	Peak
5470.000	34.10	8.74	39.07	48.68	52.44	74.00	21.56	Peak
@ 5712.600	33.50	8.87	39.14	98.20	101.44	---	---	Peak

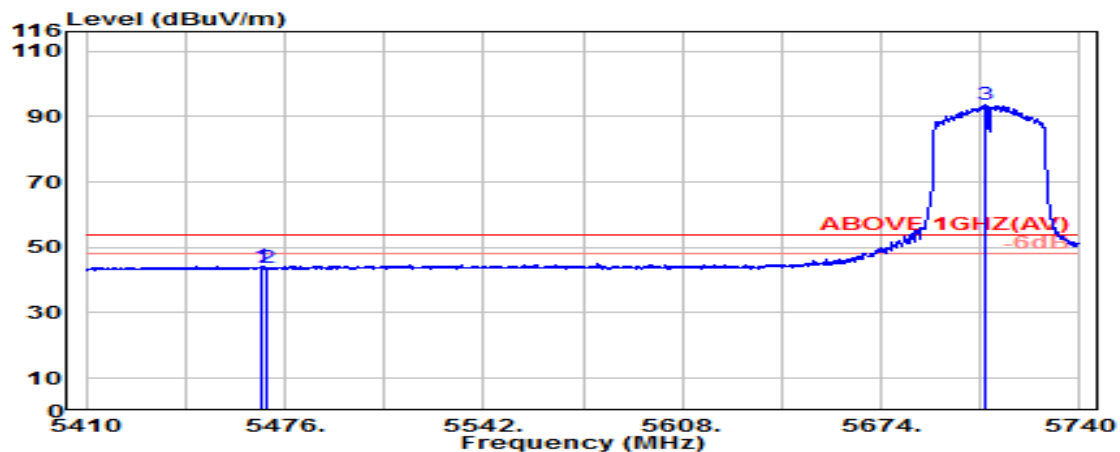

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.10	8.73	39.07	40.39	44.15	54.00	9.85	Average
5470.000	34.10	8.74	39.07	40.08	43.84	54.00	10.16	Average
@ 5708.400	33.47	8.87	39.13	90.32	93.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

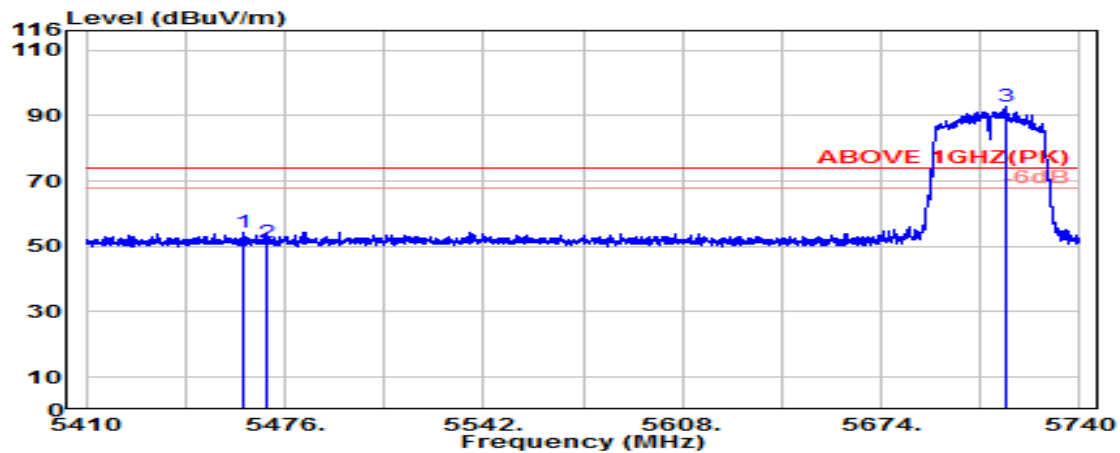

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.10	8.73	39.07	50.68	54.44	74.00	19.56	Peak
5470.000	34.10	8.74	39.07	47.25	51.02	74.00	22.98	Peak
@ 5715.500	33.52	8.88	39.14	89.39	92.65	---	---	Peak

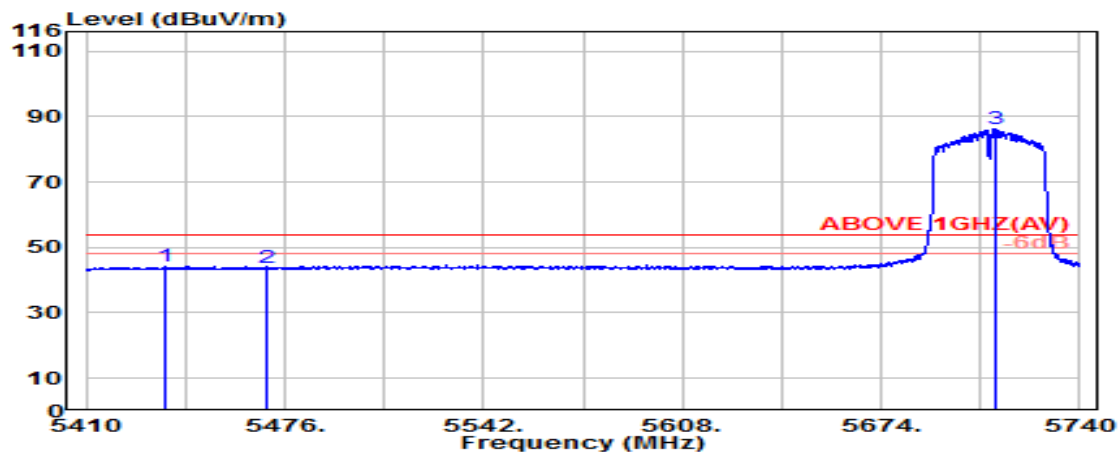

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.500	34.07	8.72	39.07	40.53	44.25	54.00	9.75	Average
5470.000	34.10	8.74	39.07	39.90	43.67	54.00	10.33	Average
@ 5712.200	33.50	8.87	39.14	83.01	86.24	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

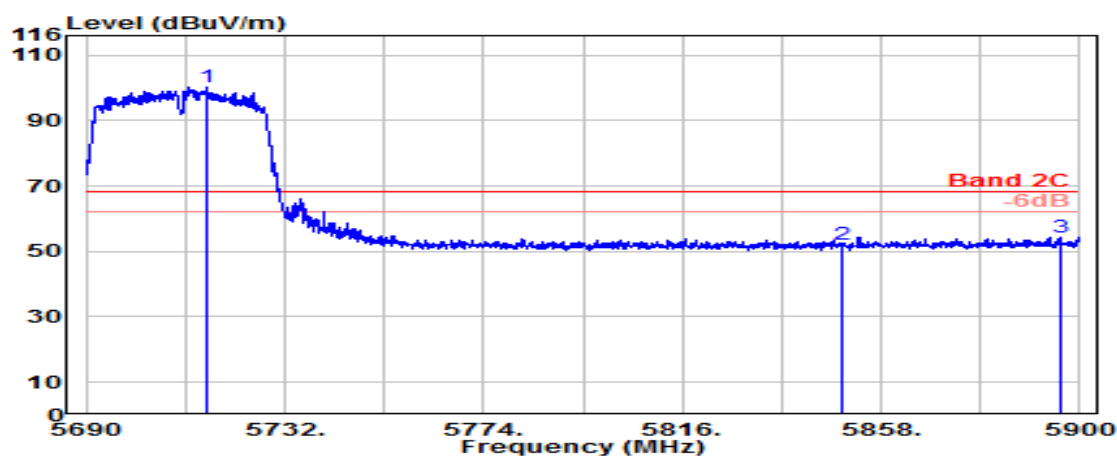

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.400	33.52	8.88	39.14	97.05	100.31	---	---	Peak
5850.000	33.90	8.95	39.18	48.63	52.30	68.20	15.90	Peak
5895.700	34.17	8.97	39.19	50.31	54.26	68.20	13.94	Peak

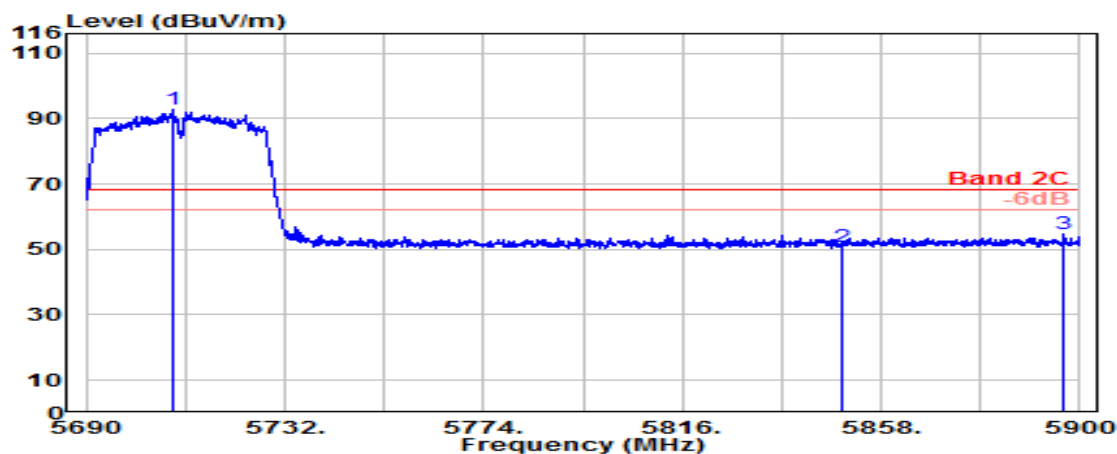

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.300	33.47	8.87	39.13	89.55	92.75	---	---	Peak
5850.000	33.90	8.95	39.18	47.31	50.98	68.20	17.22	Peak
5896.700	34.18	8.97	39.19	50.80	54.77	68.20	13.43	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

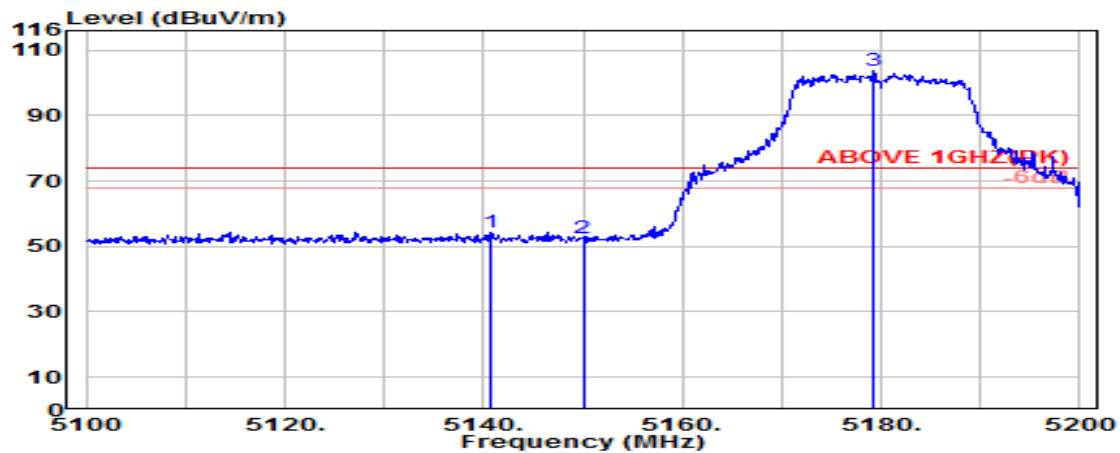

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.600	33.58	8.54	39.09	51.32	54.35	74.00	19.65	Peak
5150.000	33.60	8.54	39.09	49.51	52.56	74.00	21.44	Peak
@ 5179.300	33.60	8.56	39.09	100.58	103.65	---	---	Peak

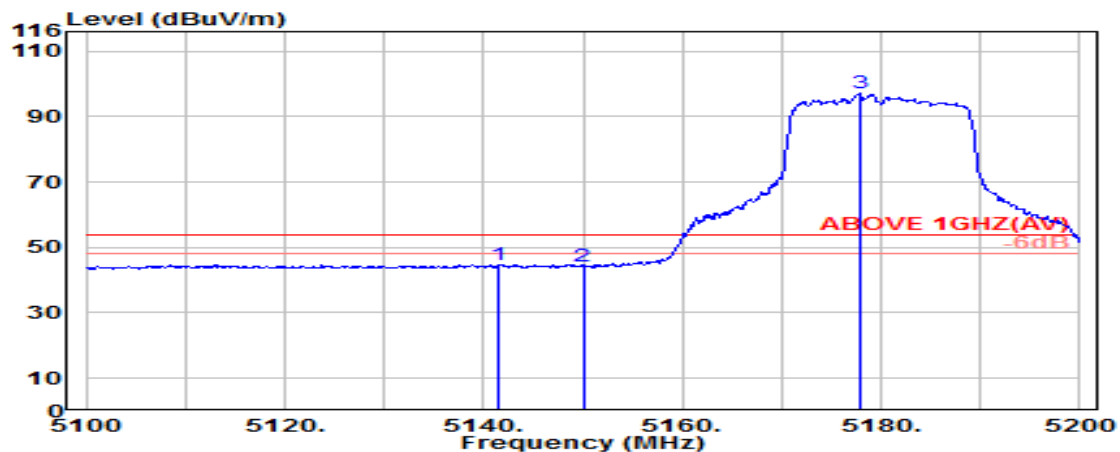

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.600	33.58	8.54	39.09	41.79	44.82	54.00	9.18	Average
5150.000	33.60	8.54	39.09	41.32	44.37	54.00	9.63	Average
@ 5177.900	33.60	8.56	39.09	94.08	97.15	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

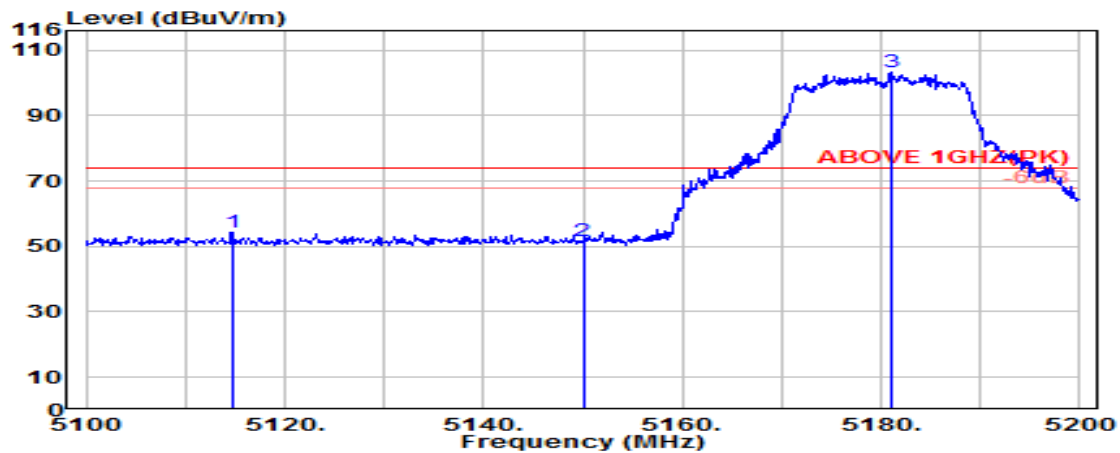

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.700	33.53	8.52	39.09	51.29	54.25	74.00	19.75	Peak
5150.000	33.60	8.54	39.09	48.78	51.83	74.00	22.17	Peak
@ 5181.100	33.60	8.56	39.09	100.37	103.45	---	---	Peak

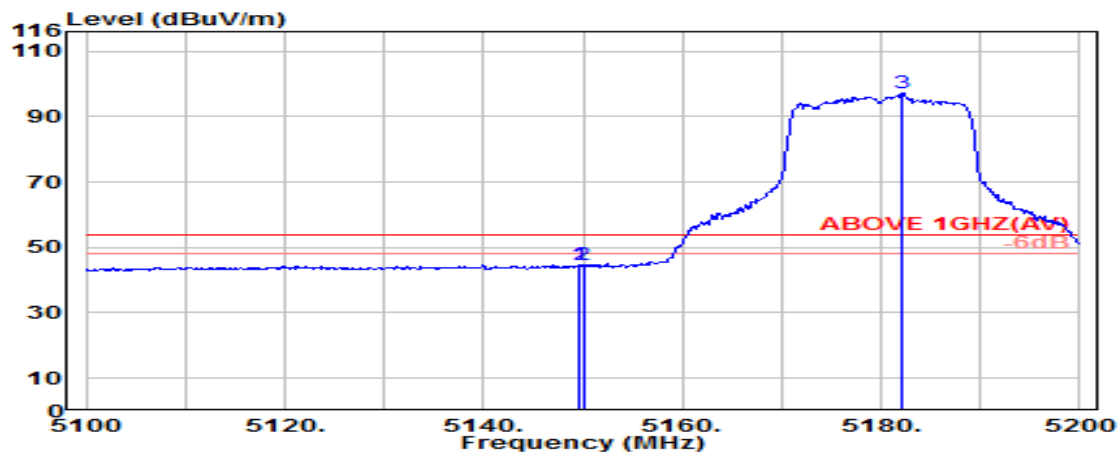

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.60	8.54	39.09	41.65	44.70	54.00	9.30	Average
5150.000	33.60	8.54	39.09	41.59	44.64	54.00	9.36	Average
@ 5182.200	33.60	8.56	39.09	94.21	97.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

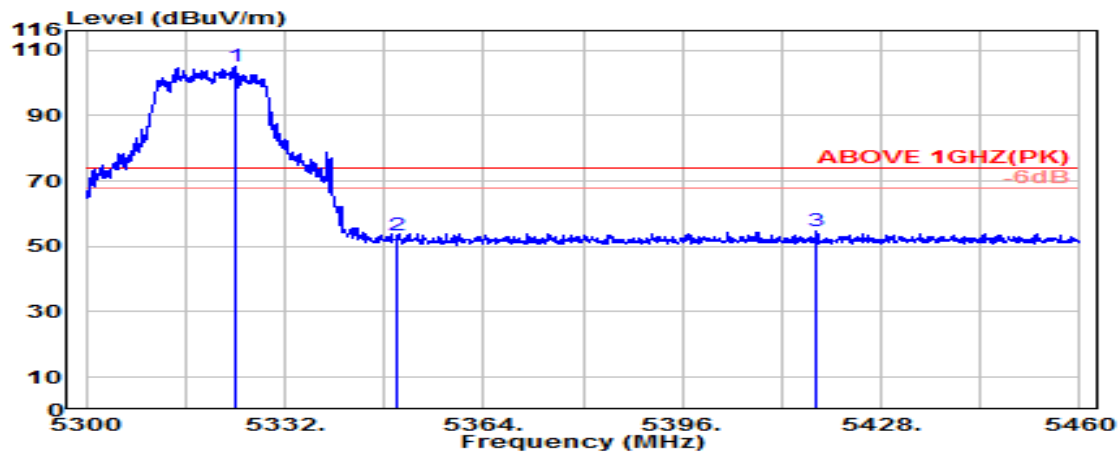

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	33.65	8.65	39.08	101.63	104.85	---	---	Peak
5350.000	33.70	8.67	39.08	50.12	53.41	74.00	20.59	Peak
5417.700	34.04	8.71	39.07	51.04	54.70	74.00	19.30	Peak

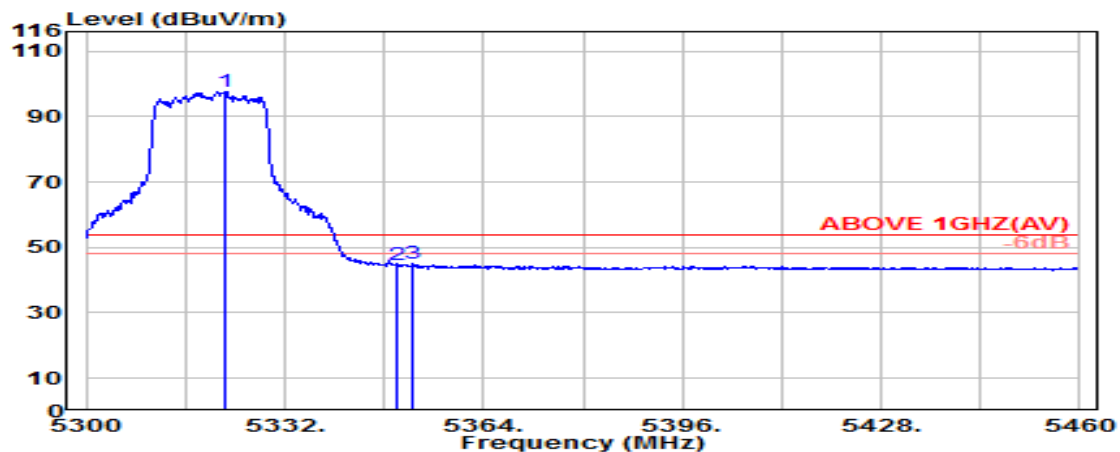

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.500	33.65	8.65	39.08	94.59	97.80	---	---	Average
5350.000	33.70	8.67	39.08	41.58	44.86	54.00	9.14	Average
5352.600	33.72	8.67	39.08	41.62	44.92	54.00	9.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

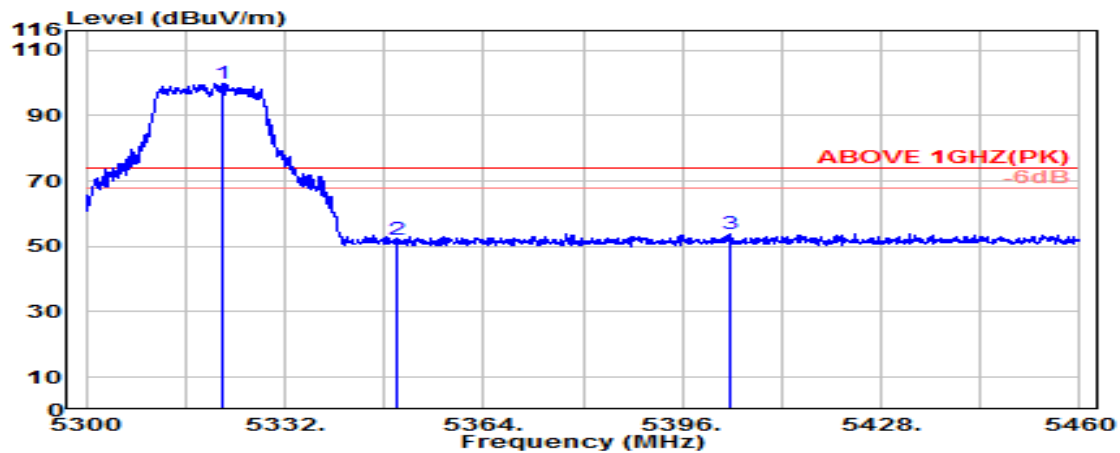

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	33.64	8.65	39.08	96.76	99.97	---	---	Peak
5350.000	33.70	8.67	39.08	48.84	52.13	74.00	21.87	Peak
5403.500	34.01	8.70	39.08	50.40	54.03	74.00	19.97	Peak

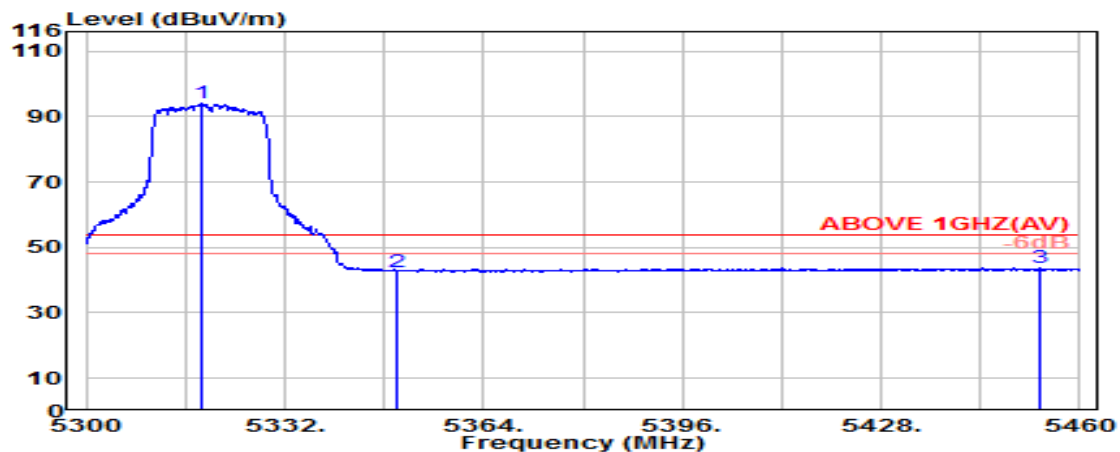

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.500	33.64	8.65	39.08	90.76	93.96	---	---	Average
5350.000	33.70	8.67	39.08	39.39	42.67	54.00	11.33	Average
5453.600	34.10	8.73	39.07	39.99	43.75	54.00	10.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

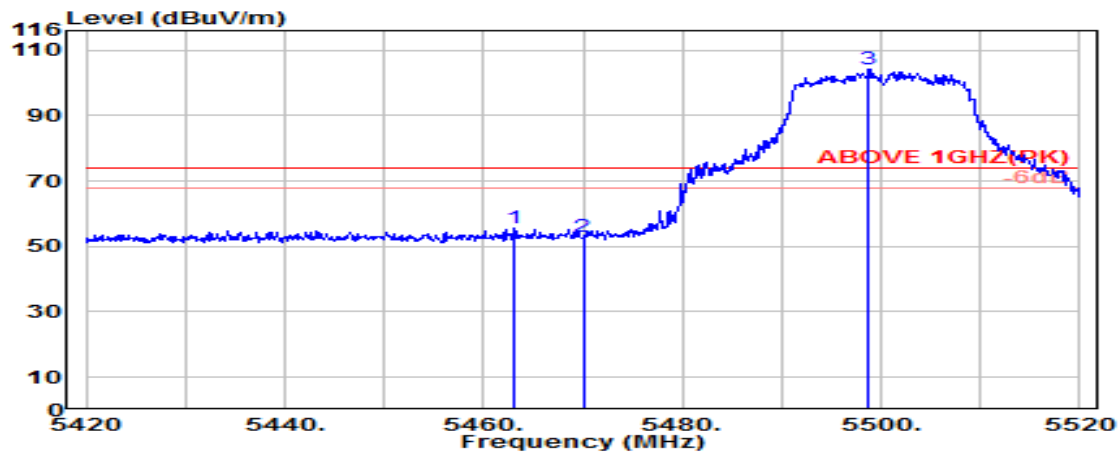

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.10	8.73	39.07	52.01	55.77	74.00	18.23	Peak
5470.000	34.10	8.74	39.07	49.33	53.09	74.00	20.91	Peak
@ 5498.800	34.10	8.75	39.07	100.59	104.38	---	---	Peak

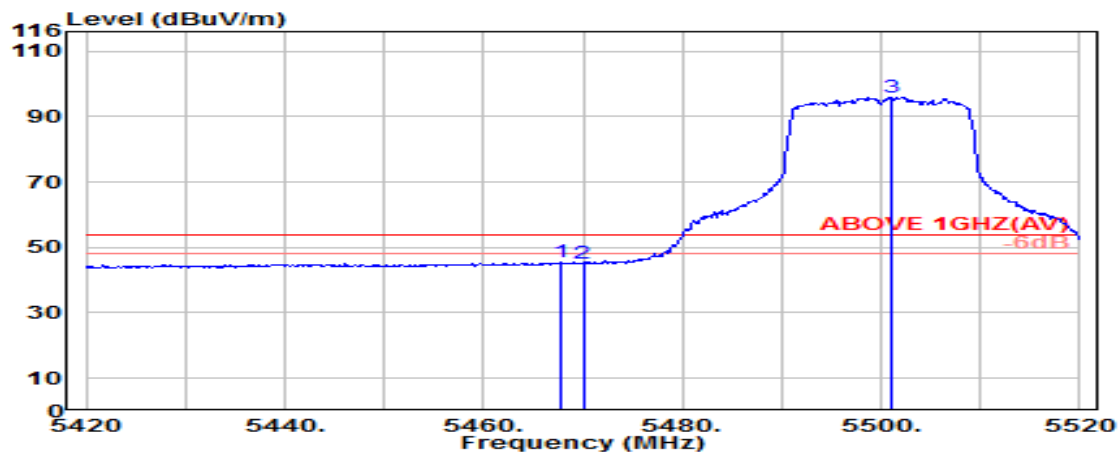

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.10	8.73	39.07	41.64	45.40	54.00	8.60	Average
5470.000	34.10	8.74	39.07	41.46	45.22	54.00	8.78	Average
@ 5501.100	34.10	8.75	39.07	92.21	95.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

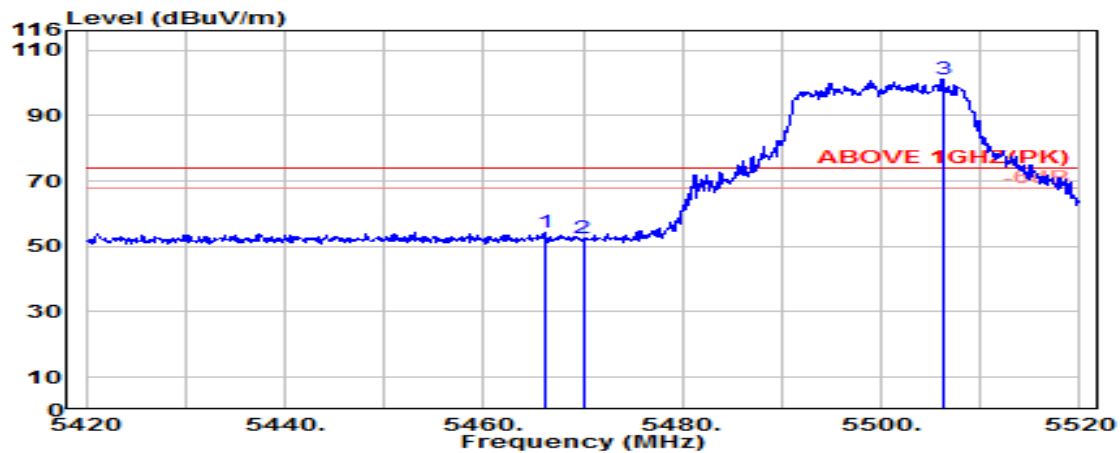

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.10	8.73	39.07	50.63	54.40	74.00	19.60	Peak
5470.000	34.10	8.74	39.07	48.93	52.70	74.00	21.30	Peak
@ 5506.200	34.09	8.76	39.07	97.28	101.05	---	---	Peak

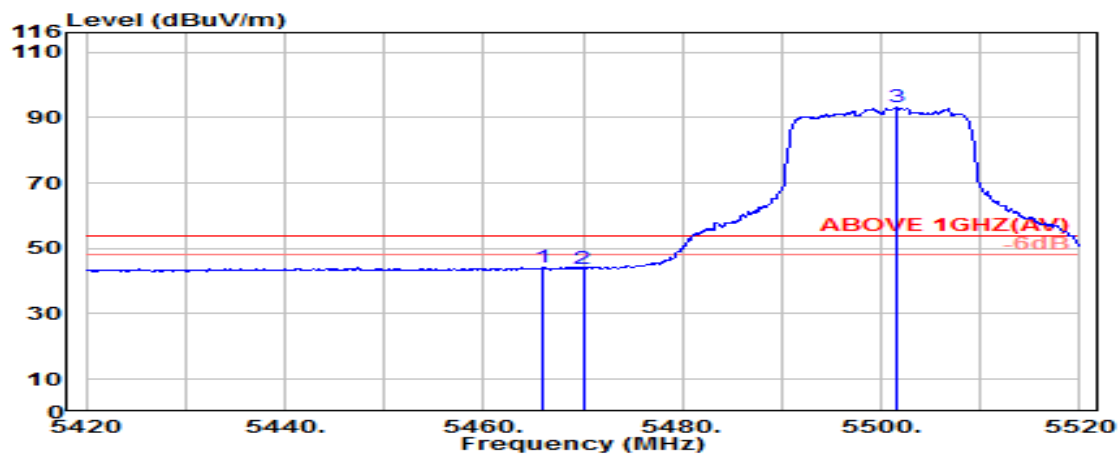

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.10	8.73	39.07	40.59	44.35	54.00	9.65	Average
5470.000	34.10	8.74	39.07	40.20	43.97	54.00	10.03	Average
@ 5501.600	34.10	8.75	39.07	89.25	93.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

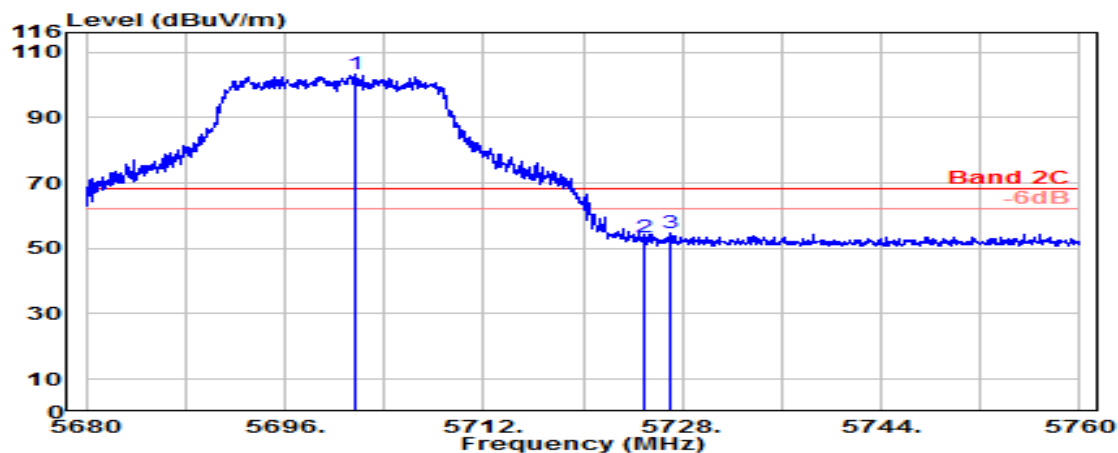

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.650	33.41	8.87	39.13	100.23	103.38	---	---	Peak
5725.000	33.60	8.88	39.14	49.97	53.31	68.20	14.89	Peak
5727.100	33.62	8.88	39.14	51.26	54.62	68.20	13.58	Peak

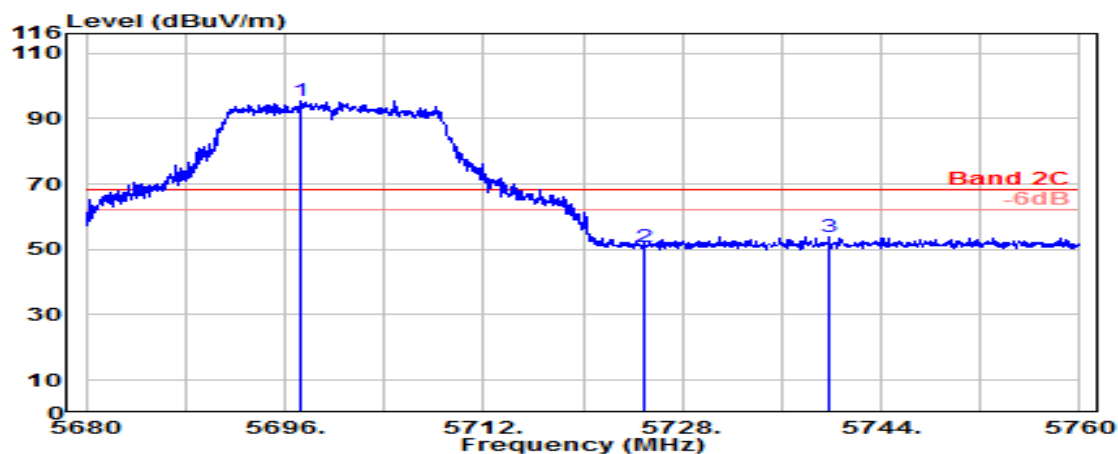

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.300	33.42	8.87	39.13	92.36	95.51	---	---	Peak
5725.000	33.60	8.88	39.14	47.50	50.84	68.20	17.36	Peak
5739.750	33.72	8.89	39.14	50.45	53.92	68.20	14.28	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

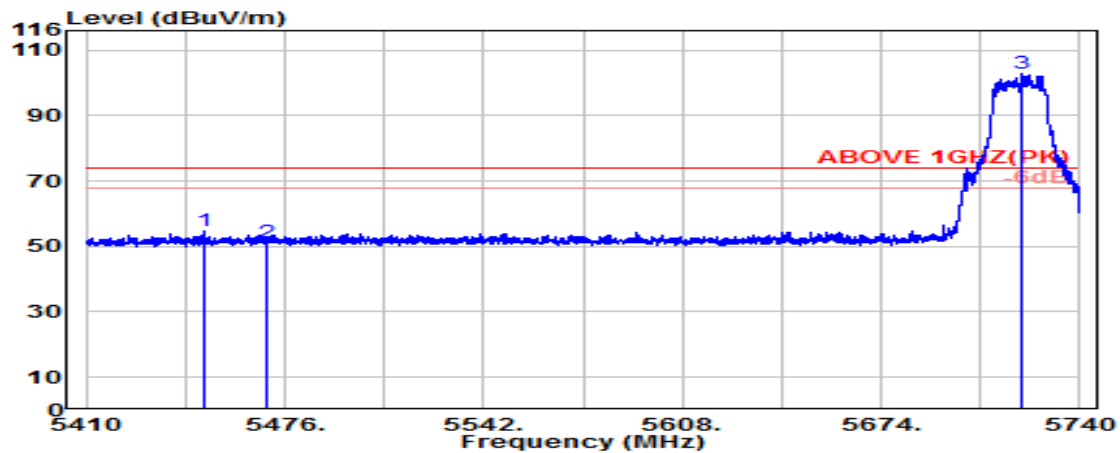

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.200	34.10	8.72	39.07	50.77	54.52	74.00	19.48	Peak
5470.000	34.10	8.74	39.07	47.42	51.19	74.00	22.81	Peak
@ 5720.900	33.57	8.88	39.14	99.45	102.75	---	---	Peak

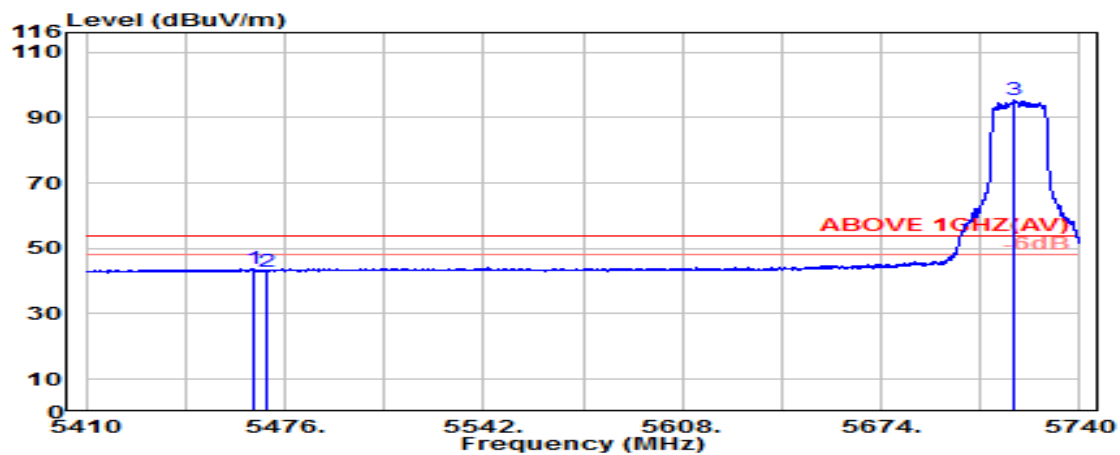

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.300	34.10	8.73	39.07	39.90	43.66	54.00	10.34	Average
5470.000	34.10	8.74	39.07	39.27	43.04	54.00	10.96	Average
@ 5718.500	33.55	8.88	39.14	92.02	95.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

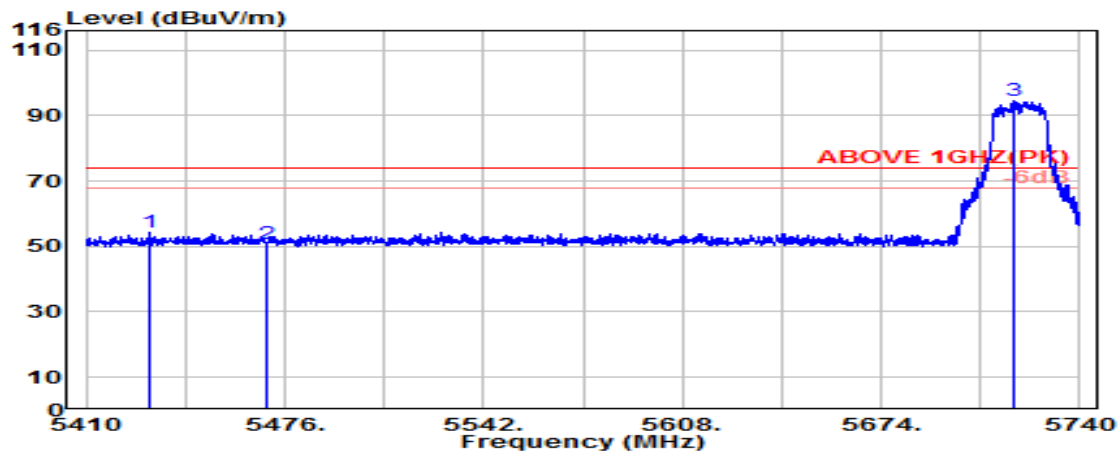

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.200	34.06	8.71	39.07	50.54	54.24	74.00	19.76	Peak
5470.000	34.10	8.74	39.07	47.11	50.87	74.00	23.13	Peak
@ 5718.300	33.55	8.88	39.14	91.29	94.58	---	---	Peak

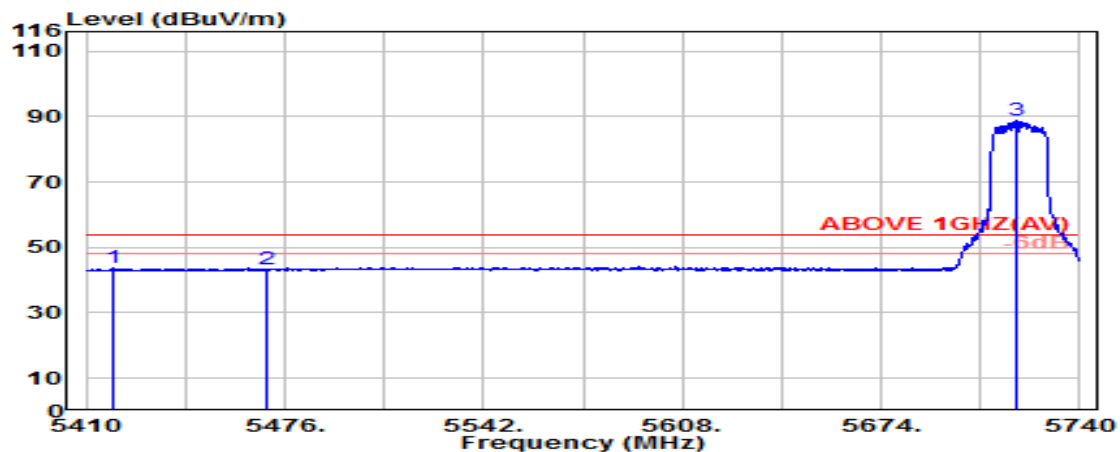

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5419.100	34.04	8.71	39.07	39.90	43.57	54.00	10.43	Average
5470.000	34.10	8.74	39.07	39.55	43.32	54.00	10.68	Average
@ 5719.000	33.55	8.88	39.14	85.40	88.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

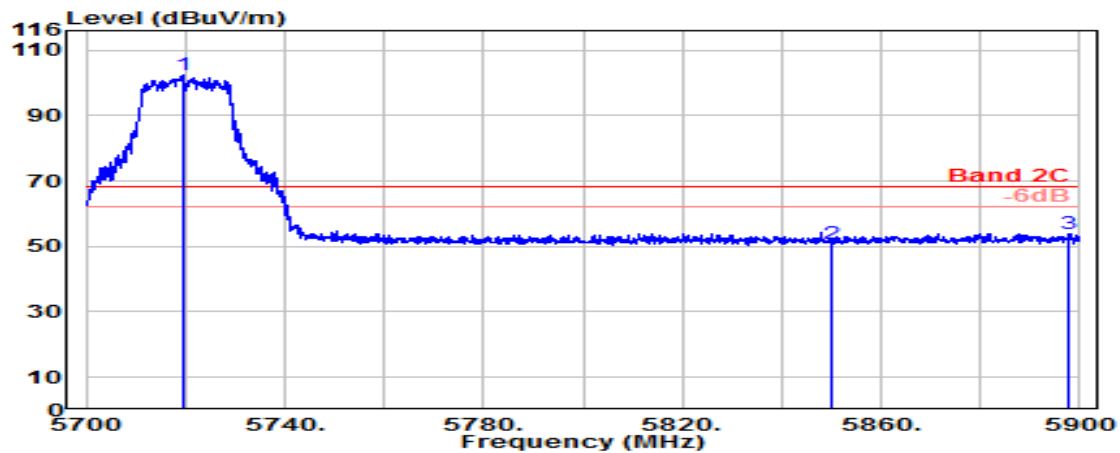

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.600	33.56	8.88	39.14	98.99	102.29	---	---	Peak
5850.000	33.90	8.95	39.18	47.25	50.92	68.20	17.28	Peak
5897.800	34.19	8.98	39.19	49.90	53.87	68.20	14.33	Peak

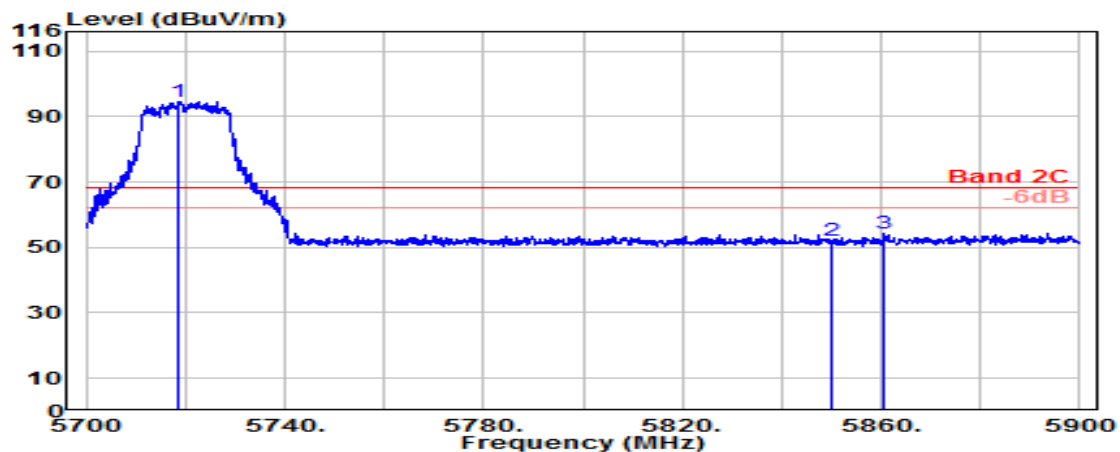

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.700	33.55	8.88	39.14	91.43	94.72	---	---	Peak
5850.000	33.90	8.95	39.18	48.46	52.13	68.20	16.07	Peak
5860.400	33.96	8.96	39.18	50.66	54.40	68.20	13.80	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

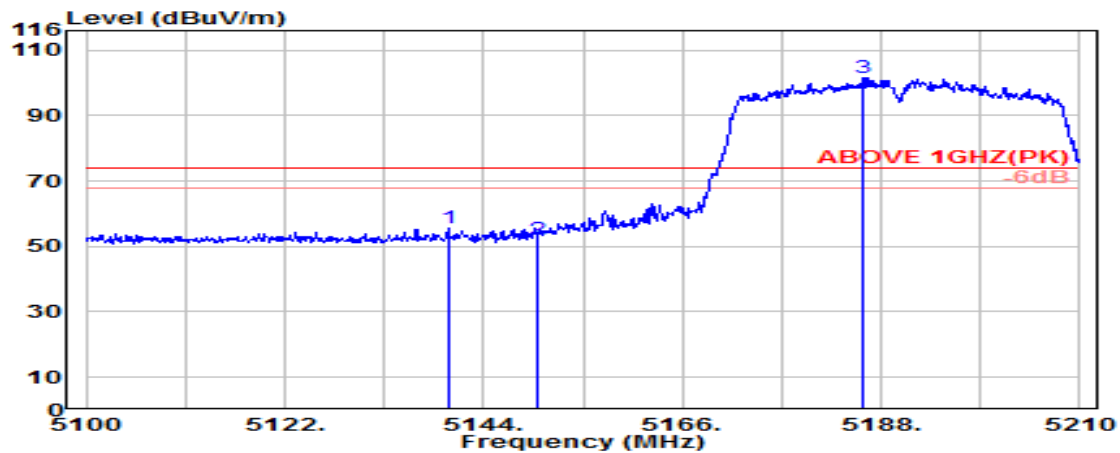

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.100	33.58	8.54	39.09	52.68	55.71	74.00	18.29	Peak
5150.000	33.60	8.54	39.09	49.02	52.08	74.00	21.92	Peak
@ 5186.100	33.60	8.57	39.09	98.41	101.49	---	---	Peak

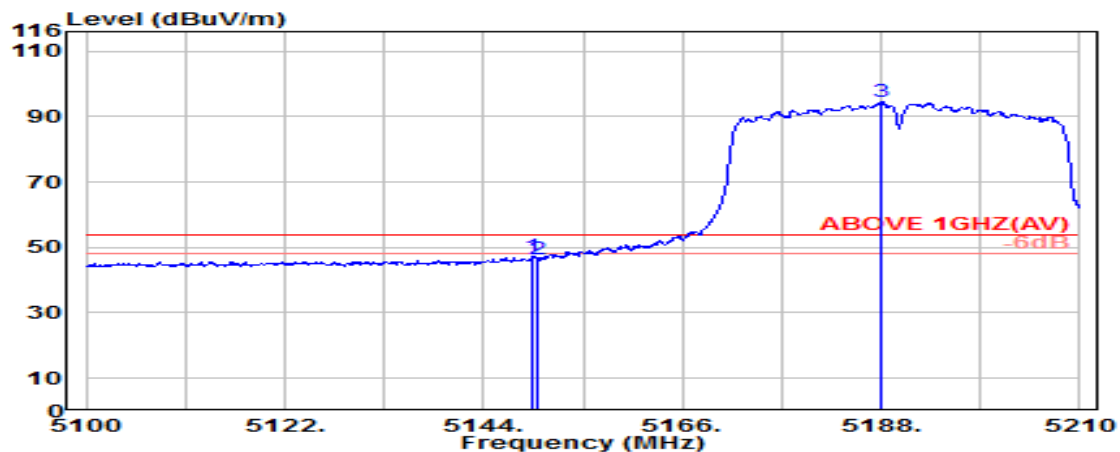

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.60	8.54	39.09	44.14	47.19	54.00	6.81	Average
5150.000	33.60	8.54	39.09	43.36	46.42	54.00	7.58	Average
@ 5188.100	33.60	8.57	39.09	91.40	94.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

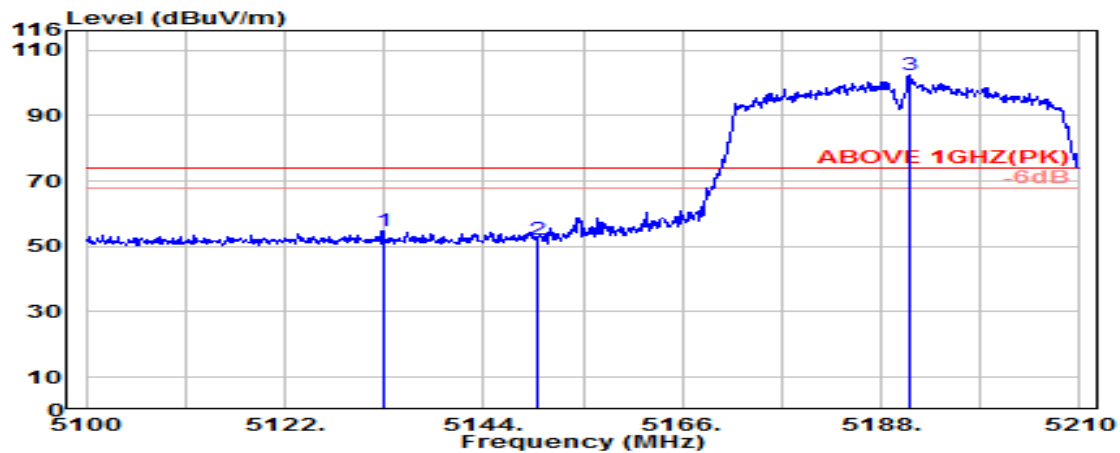

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.900	33.57	8.53	39.09	51.67	54.68	74.00	19.32	Peak
5150.000	33.60	8.54	39.09	49.24	52.29	74.00	21.71	Peak
@ 5191.300	33.60	8.57	39.09	99.35	102.43	---	---	Peak

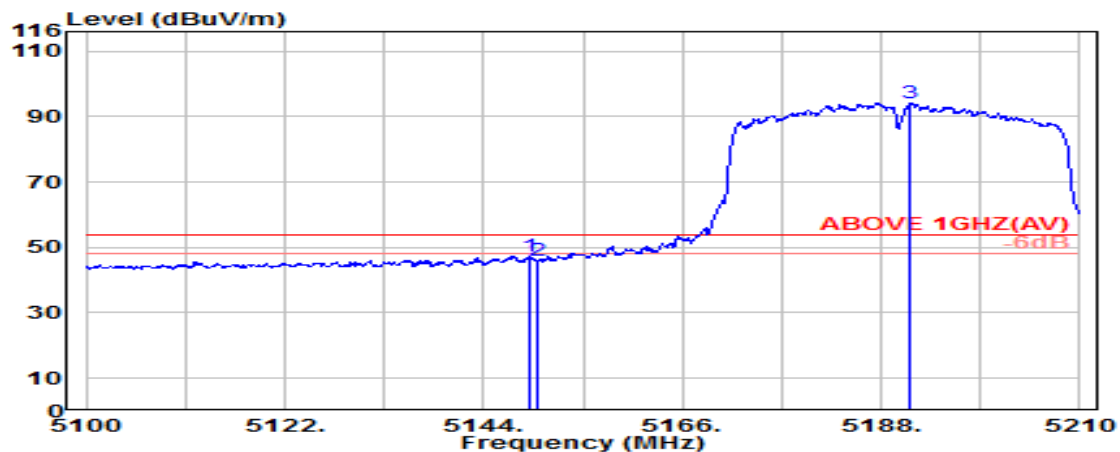

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.60	8.54	39.09	44.34	47.39	54.00	6.61	Average
5150.000	33.60	8.54	39.09	43.03	46.08	54.00	7.92	Average
@ 5191.300	33.60	8.57	39.09	91.11	94.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

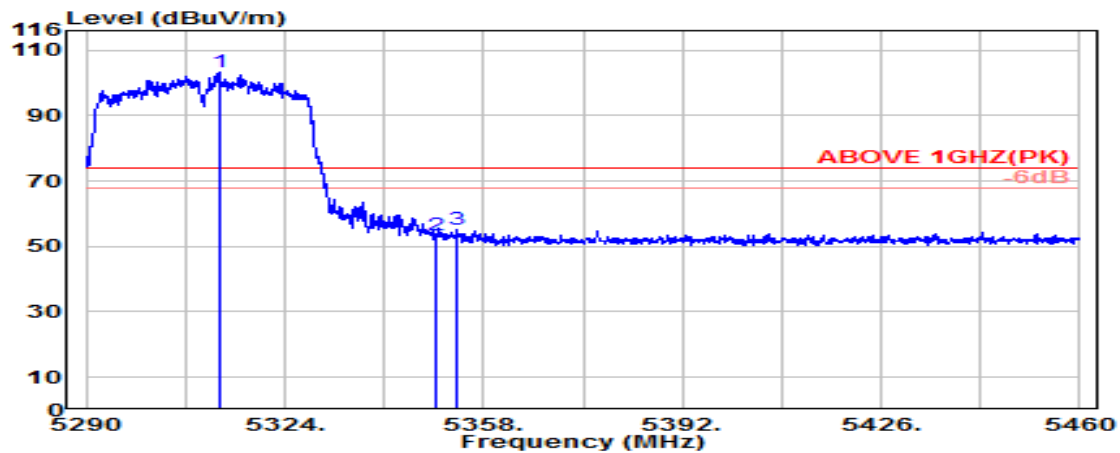

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.700	33.63	8.64	39.08	100.04	103.23	---	---	Peak
5350.000	33.70	8.67	39.08	50.10	53.39	74.00	20.61	Peak
5353.300	33.72	8.67	39.08	52.00	55.31	74.00	18.69	Peak

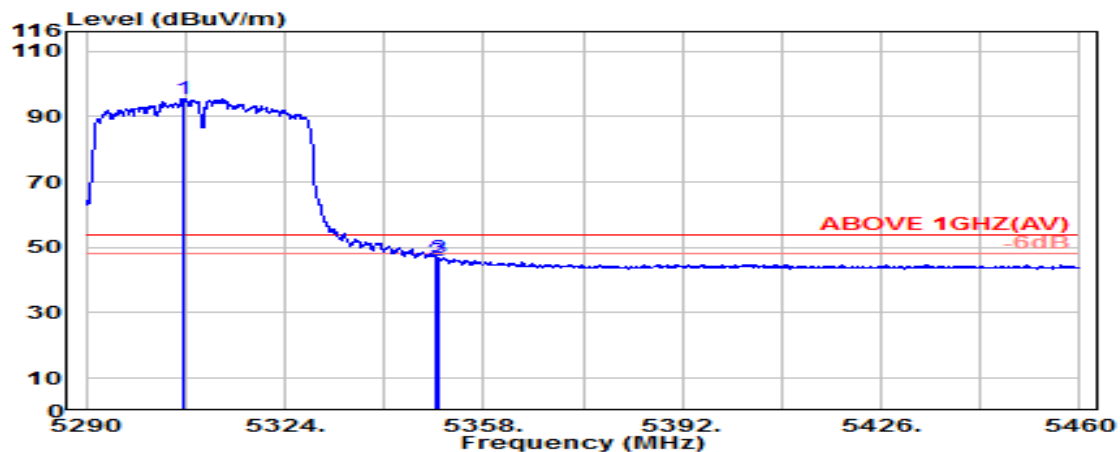

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.500	33.61	8.64	39.08	92.31	95.48	---	---	Average
5350.000	33.70	8.67	39.08	42.89	46.17	54.00	7.83	Average
5350.500	33.70	8.67	39.08	43.49	46.78	54.00	7.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

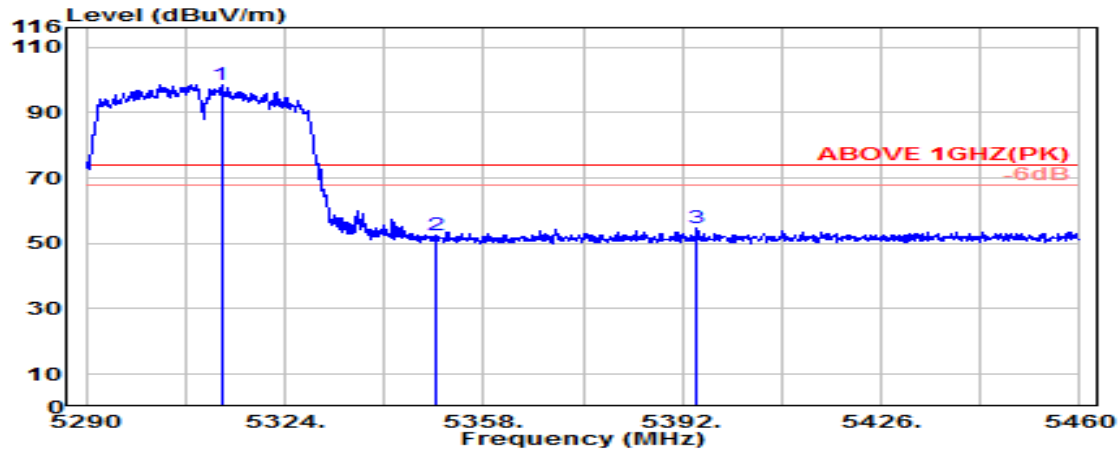

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5313.100	33.63	8.64	39.08	95.48	98.67	---	---	Peak
5350.000	33.70	8.67	39.08	49.17	52.45	74.00	21.55	Peak
5394.500	33.97	8.69	39.08	51.10	54.68	74.00	19.32	Peak

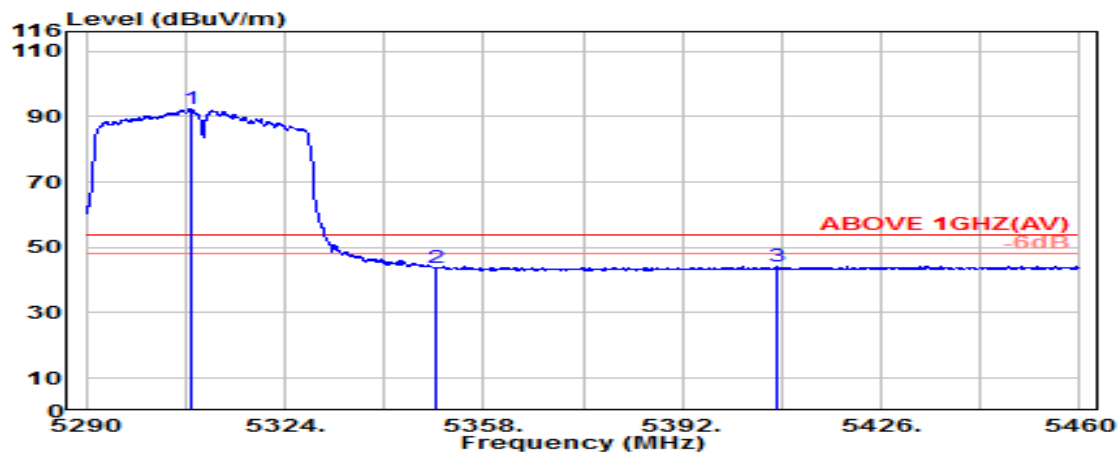

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5307.900	33.62	8.64	39.08	89.06	92.24	---	---	Average
5350.000	33.70	8.67	39.08	40.40	43.69	54.00	10.31	Average
5408.100	34.02	8.70	39.08	40.64	44.28	54.00	9.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

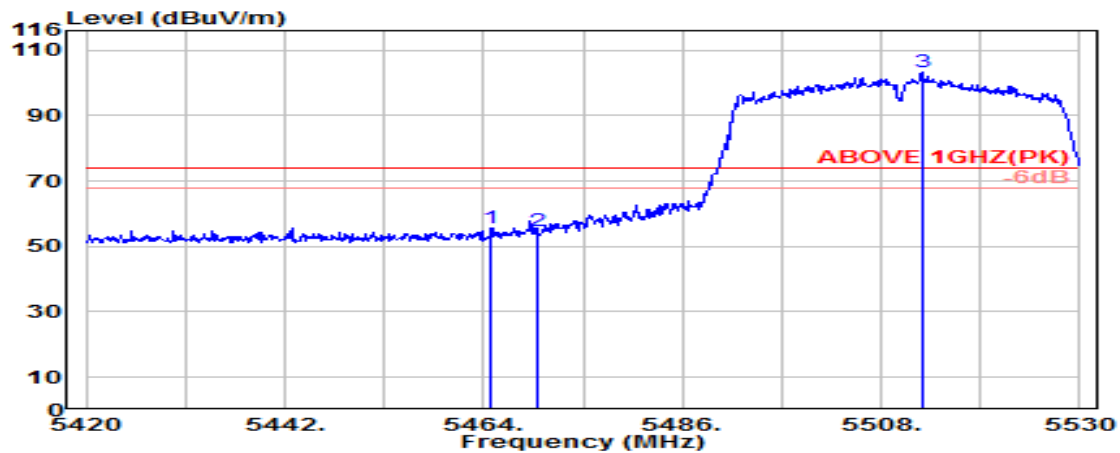

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.900	34.10	8.73	39.07	51.88	55.64	74.00	18.36	Peak
5470.000	34.10	8.74	39.07	50.86	54.62	74.00	19.38	Peak
@ 5512.500	34.07	8.76	39.07	99.68	103.44	---	---	Peak

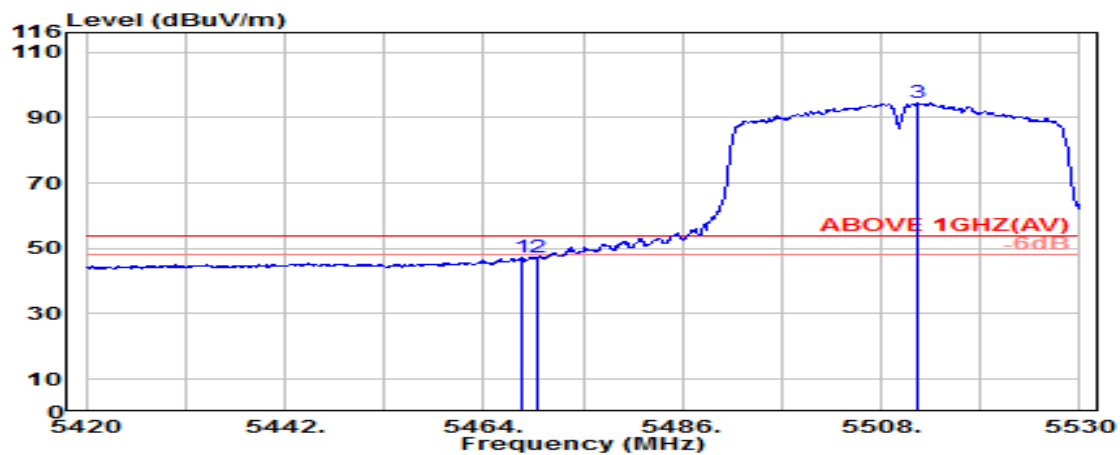

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.10	8.73	39.07	43.32	47.08	54.00	6.92	Average
5470.000	34.10	8.74	39.07	43.72	47.49	54.00	6.51	Average
@ 5511.900	34.08	8.76	39.07	90.71	94.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

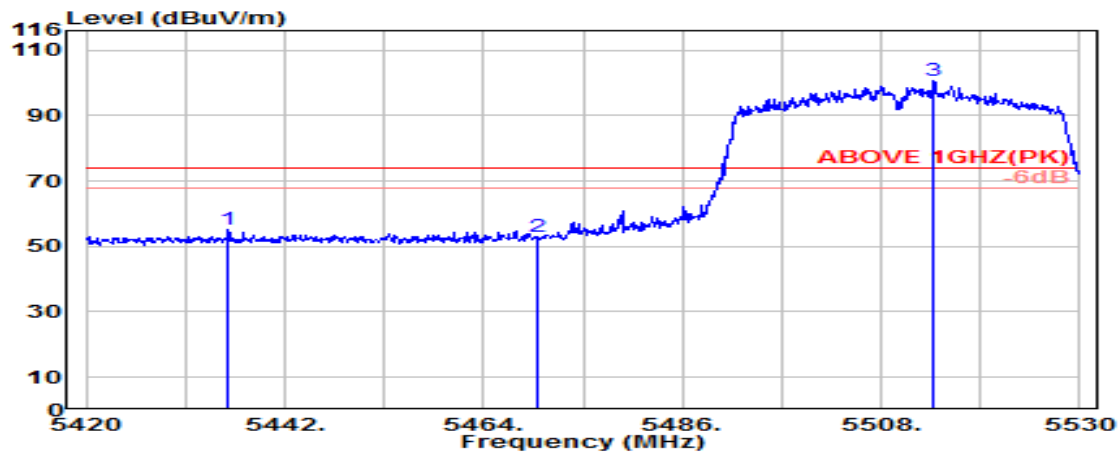

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.800	34.07	8.72	39.07	51.44	55.15	74.00	18.85	Peak
5470.000	34.10	8.74	39.07	49.40	53.17	74.00	20.83	Peak
@ 5513.900	34.07	8.76	39.07	96.83	100.59	---	---	Peak

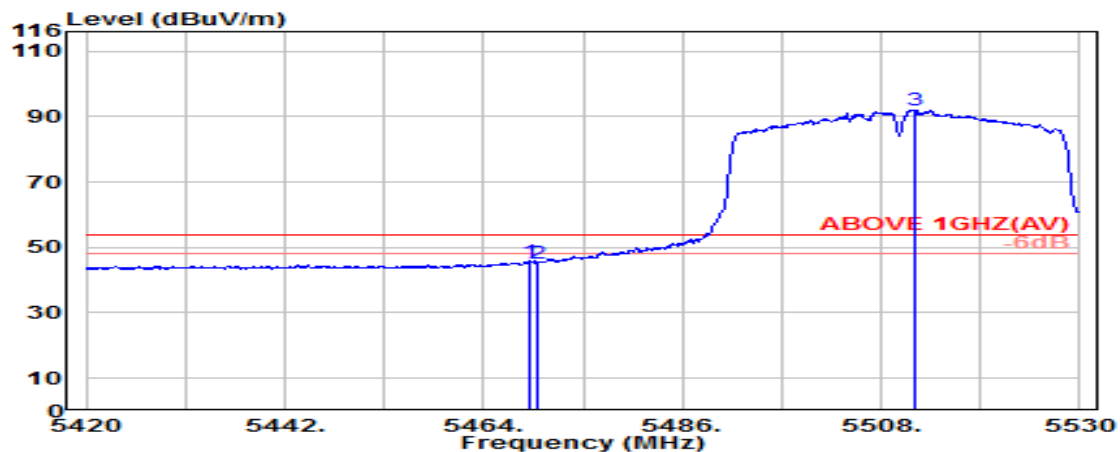

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.10	8.74	39.07	41.74	45.51	54.00	8.49	Average
5470.000	34.10	8.74	39.07	41.37	45.13	54.00	8.87	Average
@ 5511.800	34.08	8.76	39.07	88.30	92.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

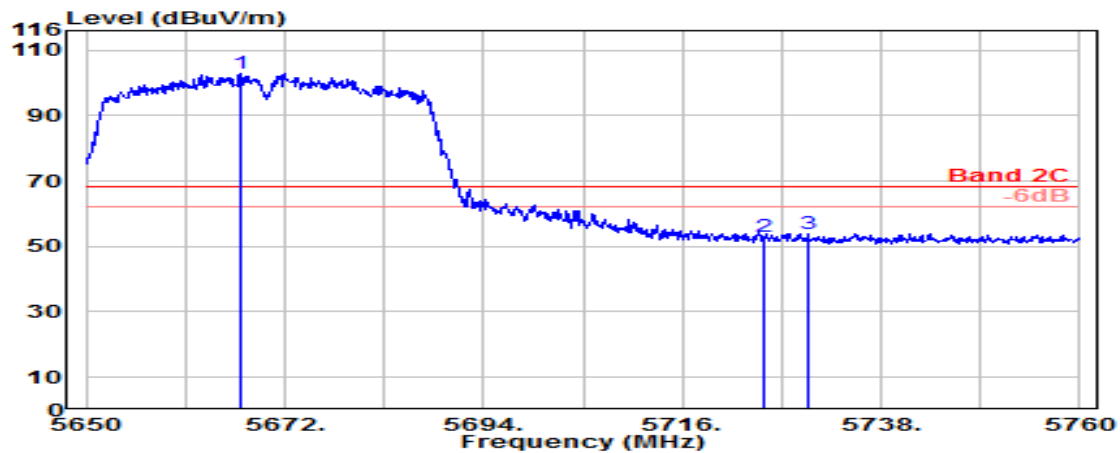

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5667.000	33.60	8.85	39.12	99.66	102.99	---	---	Peak
5725.000	33.60	8.88	39.14	49.66	53.00	68.20	15.20	Peak
5729.900	33.64	8.88	39.14	50.53	53.91	68.20	14.29	Peak

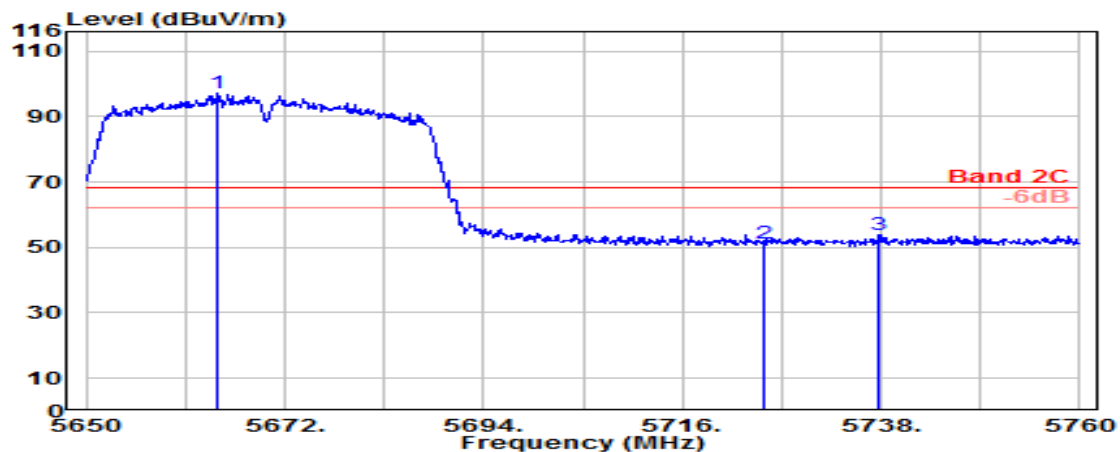


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5664.400	33.61	8.85	39.12	94.02	97.36	---	---	Peak
5725.000	33.60	8.88	39.14	48.04	51.38	68.20	16.82	Peak
5737.800	33.70	8.89	39.14	50.25	53.70	68.20	14.50	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

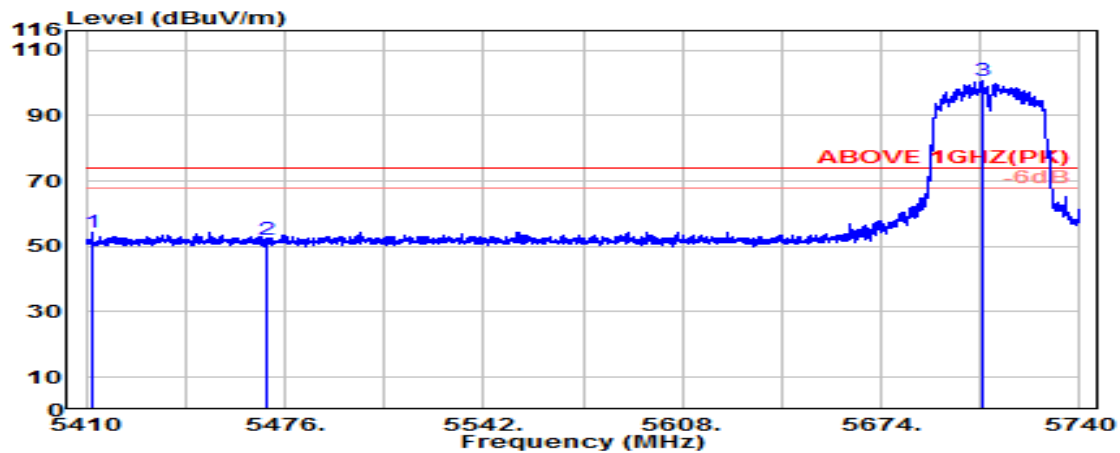

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.100	34.02	8.70	39.08	50.51	54.16	74.00	19.84	Peak
5470.000	34.10	8.74	39.07	48.52	52.29	74.00	21.71	Peak
@ 5707.800	33.46	8.87	39.13	97.45	100.65	---	---	Peak

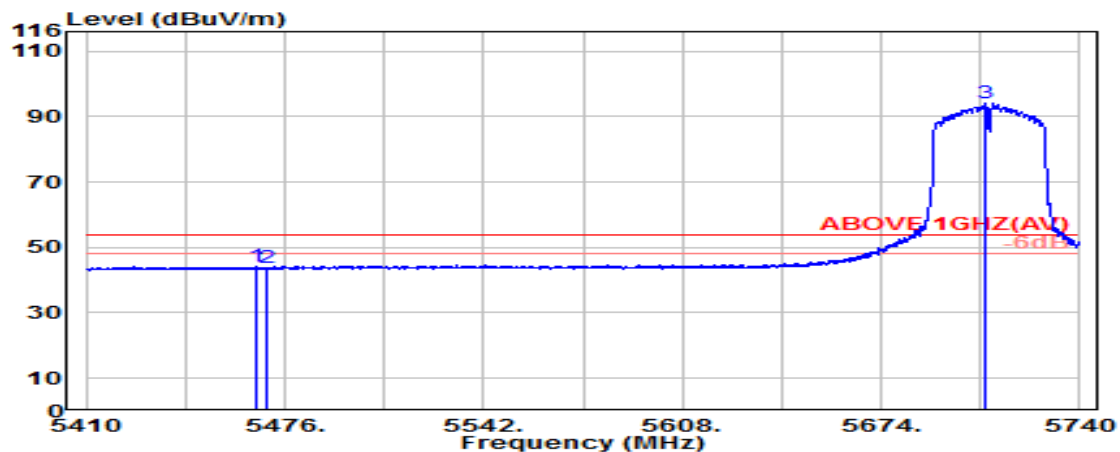

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.10	8.73	39.07	40.28	44.05	54.00	9.95	Average
5470.000	34.10	8.74	39.07	39.89	43.66	54.00	10.34	Average
@ 5708.800	33.47	8.87	39.13	90.85	94.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

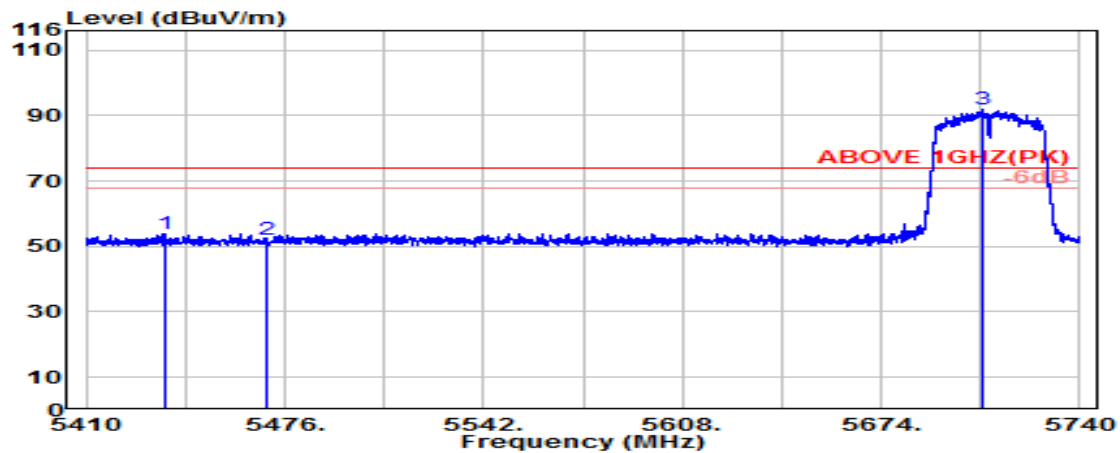

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.900	34.07	8.72	39.07	50.05	53.76	74.00	20.24	Peak
5470.000	34.10	8.74	39.07	48.13	51.89	74.00	22.11	Peak
@ 5707.700	33.46	8.87	39.13	88.82	92.02	---	---	Peak

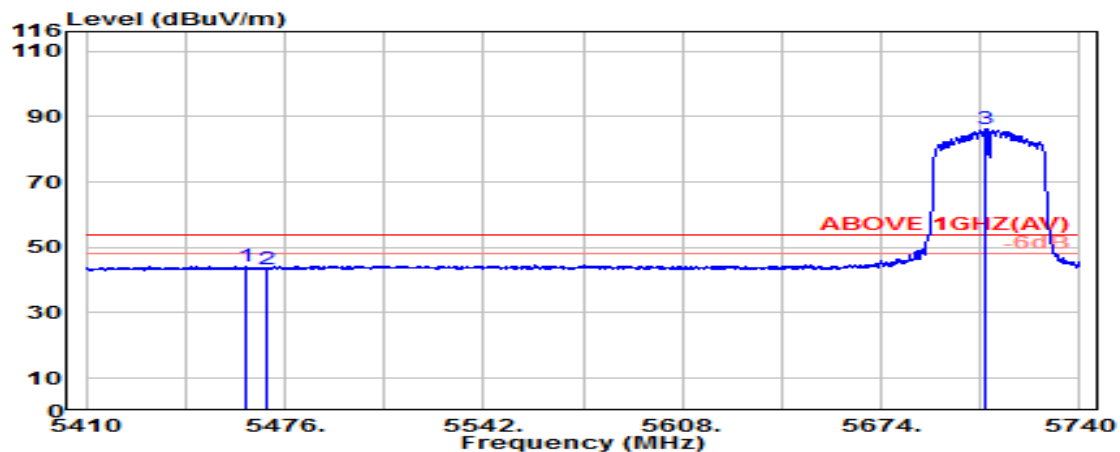

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.10	8.73	39.07	40.49	44.25	54.00	9.75	Average
5470.000	34.10	8.74	39.07	39.79	43.55	54.00	10.45	Average
@ 5708.900	33.47	8.87	39.13	83.23	86.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

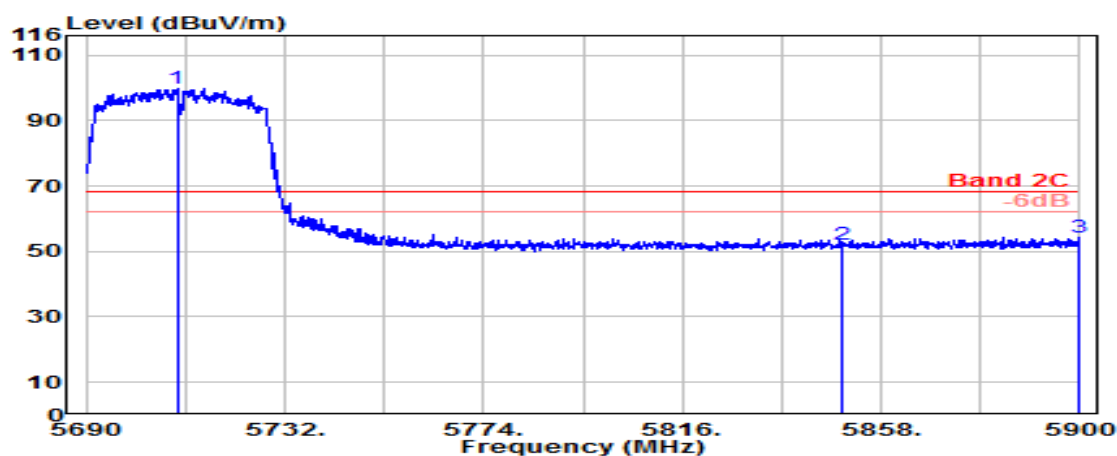

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5709.200	33.47	8.87	39.13	96.53	99.74	---	---	Peak
5850.000	33.90	8.95	39.18	48.46	52.14	68.20	16.06	Peak
5899.700	34.20	8.98	39.19	50.41	54.39	68.20	13.81	Peak

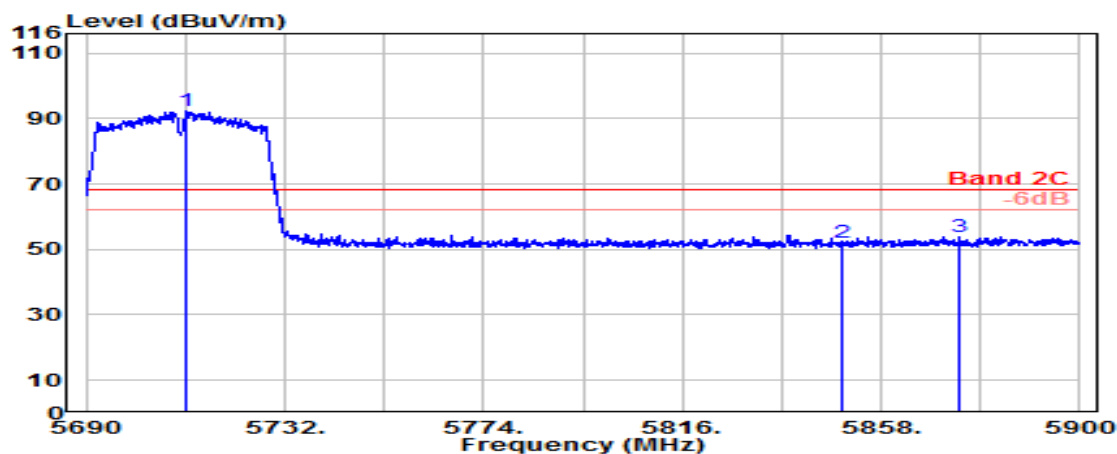


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.200	33.49	8.87	39.13	89.05	92.28	---	---	Peak
5850.000	33.90	8.95	39.18	48.62	52.29	68.20	15.91	Peak
5874.600	34.05	8.96	39.18	50.04	53.87	68.20	14.33	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

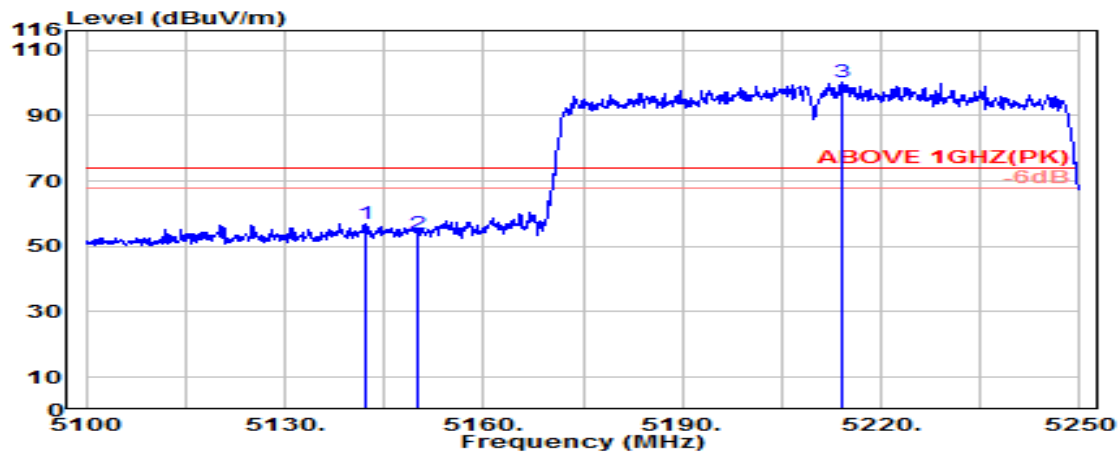

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.300	33.58	8.54	39.09	53.87	56.91	74.00	17.09	Peak
5150.000	33.60	8.54	39.09	50.89	53.94	74.00	20.06	Peak
@ 5214.200	33.63	8.58	39.09	97.11	100.23	---	---	Peak

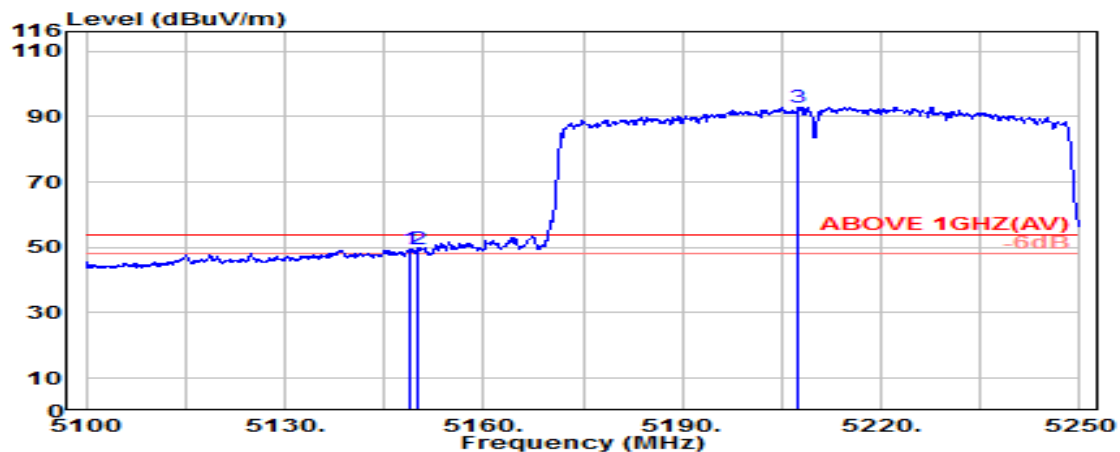

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.60	8.54	39.09	46.46	49.51	54.00	4.49	Average
5150.000	33.60	8.54	39.09	46.24	49.29	54.00	4.71	Average
@ 5207.500	33.62	8.58	39.09	89.75	92.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

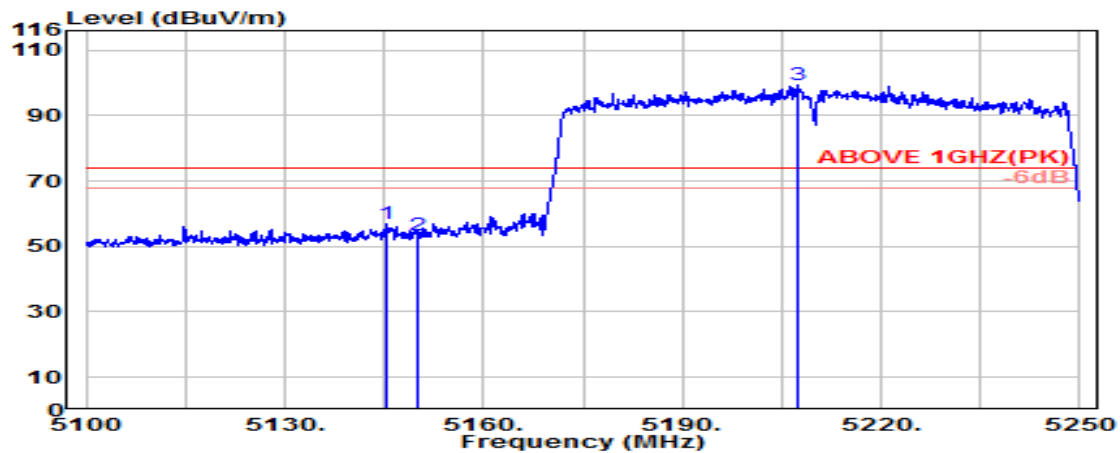

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.400	33.59	8.54	39.09	53.87	56.91	74.00	17.09	Peak
5150.000	33.60	8.54	39.09	50.44	53.49	74.00	20.51	Peak
@ 5207.500	33.62	8.58	39.09	96.19	99.30	---	---	Peak

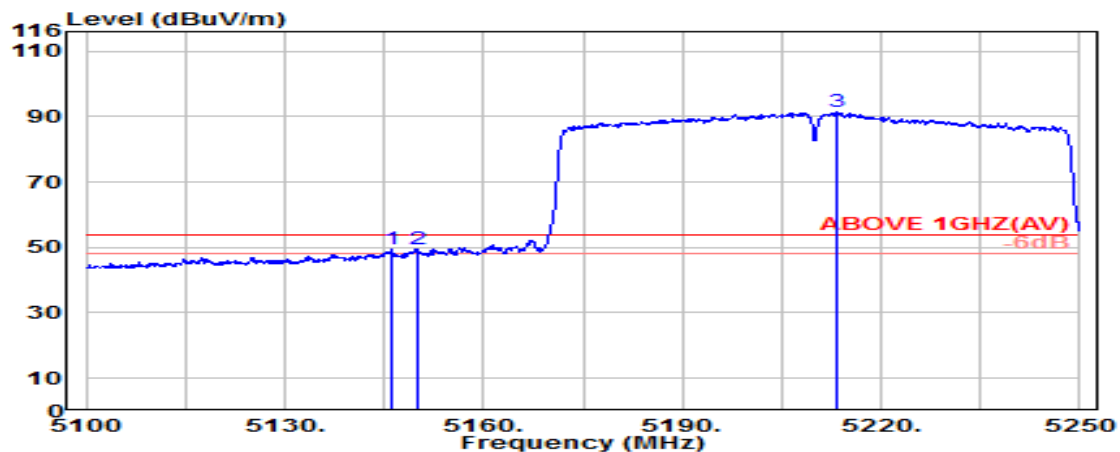

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.100	33.59	8.54	39.09	46.36	49.41	54.00	4.59	Average
5150.000	33.60	8.54	39.09	46.62	49.67	54.00	4.33	Average
@ 5213.300	33.63	8.58	39.09	88.28	91.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

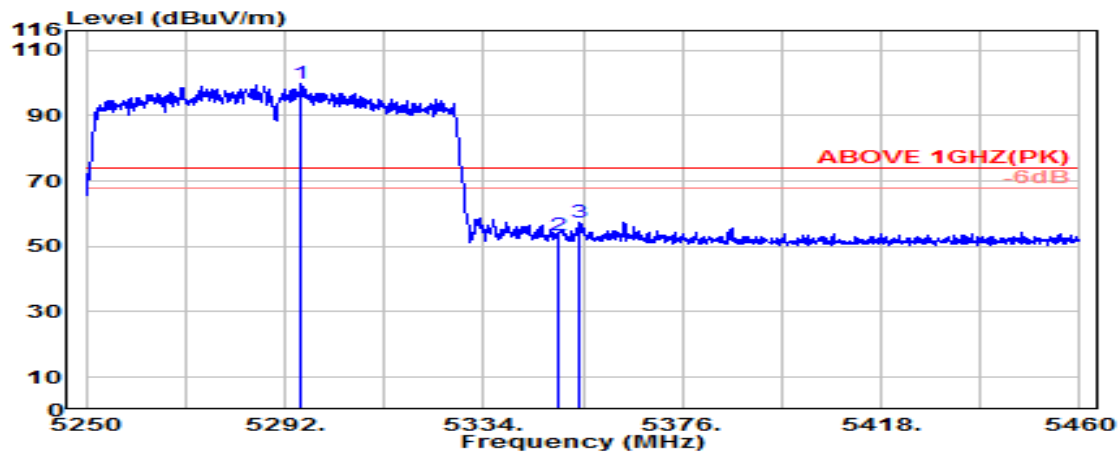

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5295.500	33.61	8.63	39.08	96.57	99.72	---	---	Peak
5350.000	33.70	8.67	39.08	50.26	53.54	74.00	20.46	Peak
5354.400	33.73	8.67	39.08	54.08	57.40	74.00	16.60	Peak

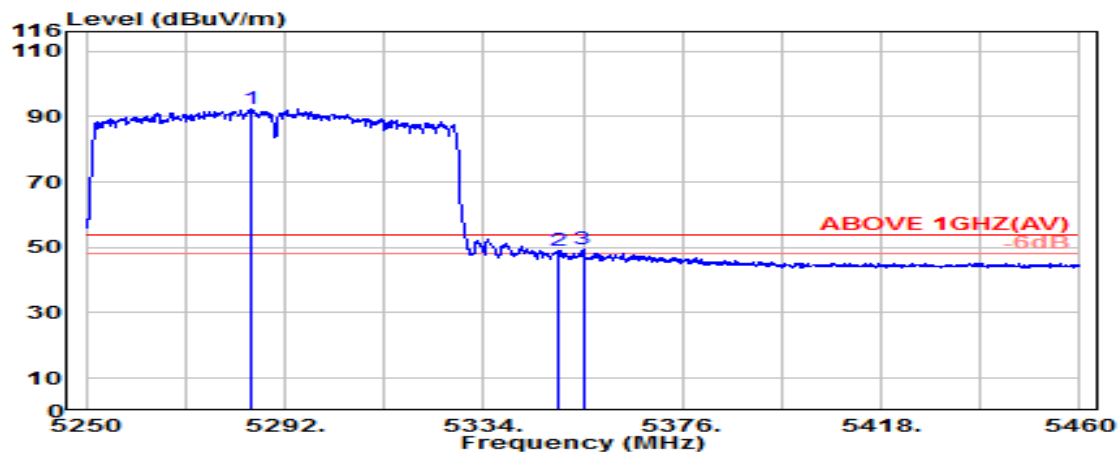

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.900	33.63	8.63	39.08	89.17	92.34	---	---	Average
5350.000	33.70	8.67	39.08	45.77	49.05	54.00	4.95	Average
5355.000	33.73	8.67	39.08	46.12	49.44	54.00	4.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

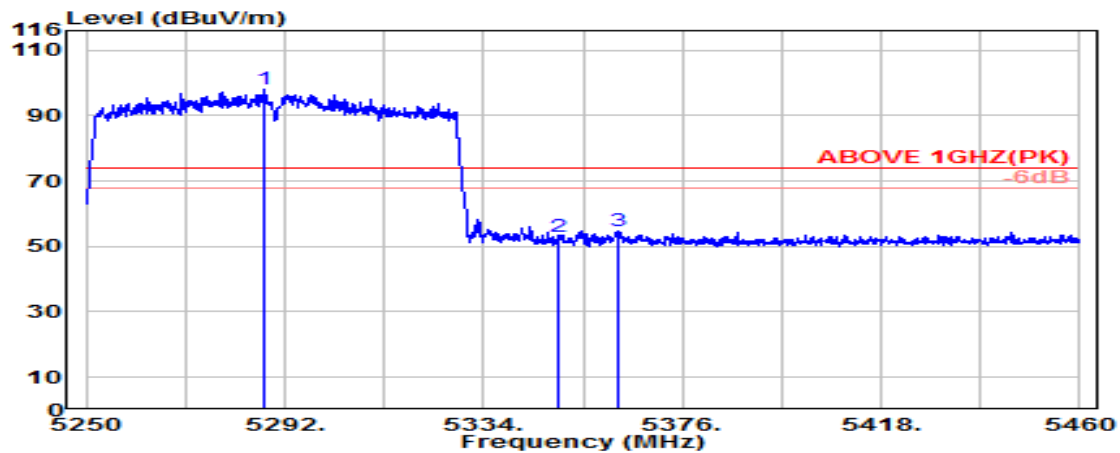

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.700	33.62	8.63	39.08	95.09	98.26	---	---	Peak
5350.000	33.70	8.67	39.08	49.74	53.03	74.00	20.97	Peak
5362.700	33.78	8.67	39.08	51.49	54.86	74.00	19.14	Peak

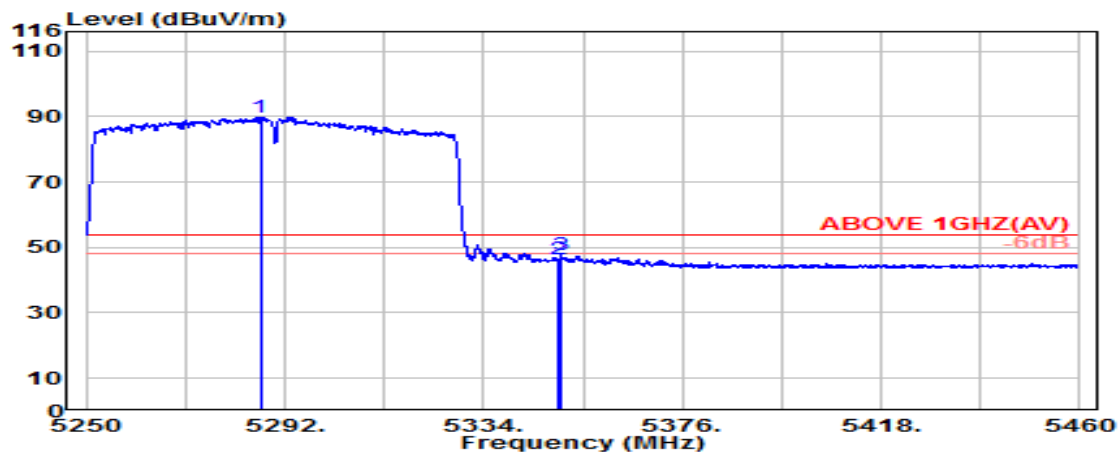

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.800	33.63	8.63	39.08	86.78	89.95	---	---	Average
5350.000	33.70	8.67	39.08	43.14	46.42	54.00	7.58	Average
5350.400	33.70	8.67	39.08	44.47	47.76	54.00	6.24	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

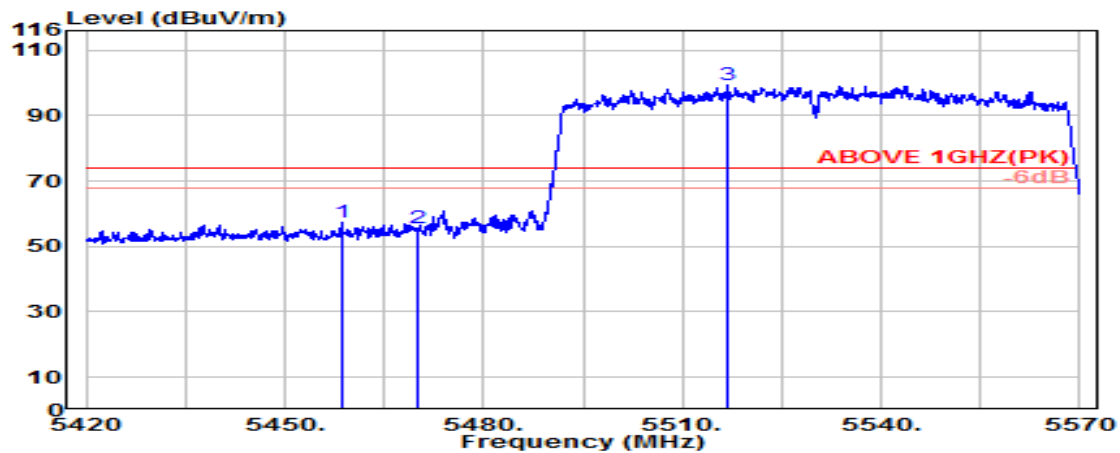

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.600	34.10	8.73	39.07	53.56	57.32	74.00	16.68	Peak
5470.000	34.10	8.74	39.07	51.79	55.56	74.00	18.44	Peak
@ 5516.800	34.07	8.76	39.08	95.77	99.53	---	---	Peak

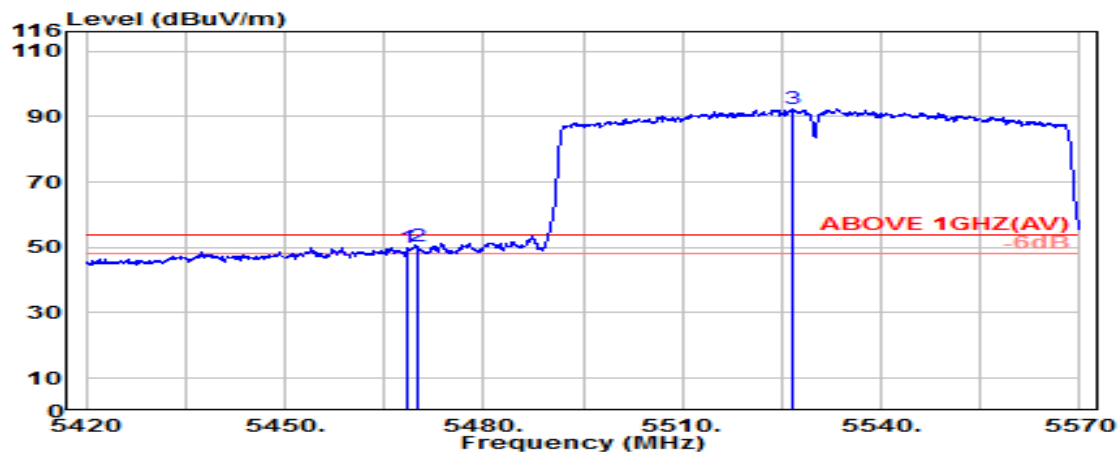

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.10	8.73	39.07	46.27	50.03	54.00	3.97	Average
5470.000	34.10	8.74	39.07	46.69	50.46	54.00	3.54	Average
@ 5526.700	34.05	8.77	39.08	88.79	92.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

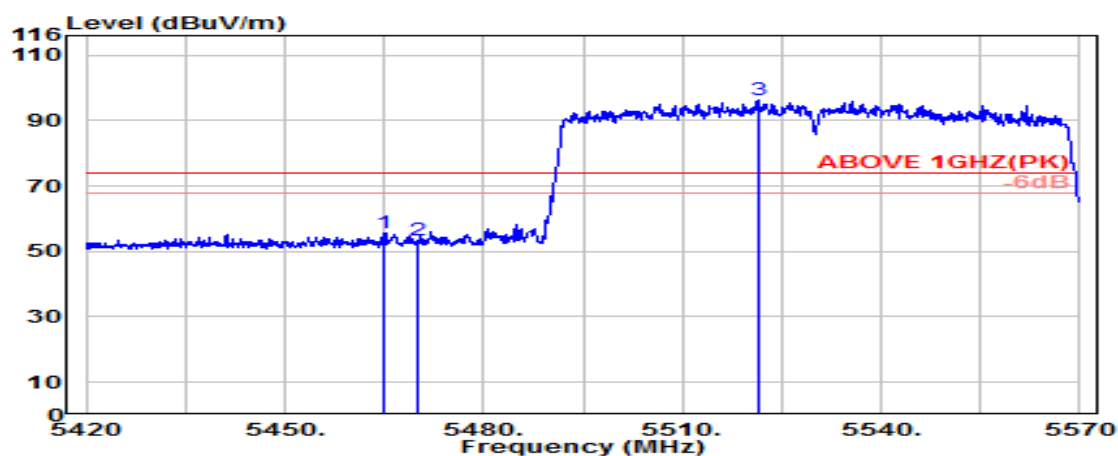

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.100	34.10	8.73	39.07	51.85	55.61	74.00	18.39	Peak
5470.000	34.10	8.74	39.07	49.71	53.48	74.00	20.52	Peak
@ 5521.400	34.06	8.77	39.08	92.38	96.13	---	---	Peak

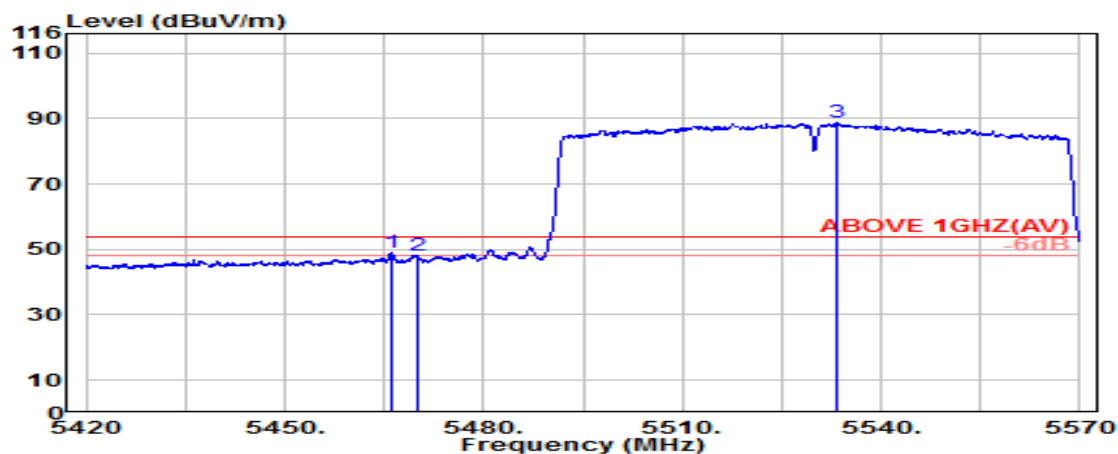

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.10	8.73	39.07	45.10	48.87	54.00	5.13	Average
5470.000	34.10	8.74	39.07	44.25	48.02	54.00	5.98	Average
@ 5533.400	34.03	8.77	39.08	85.06	88.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

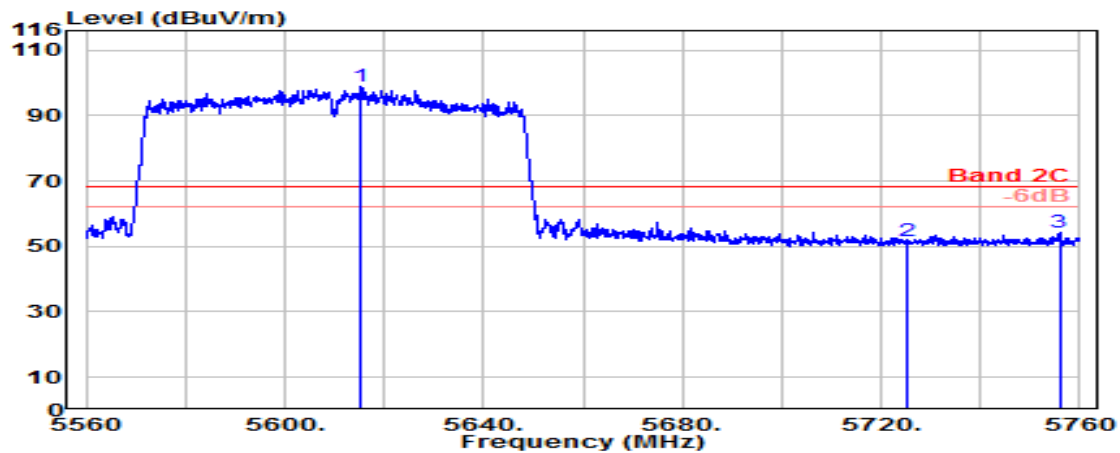

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5615.400	33.77	8.82	39.11	95.43	98.91	---	---	Peak
5725.000	33.60	8.88	39.14	48.30	51.64	68.20	16.56	Peak
5755.900	33.81	8.90	39.15	50.54	54.10	68.20	14.10	Peak

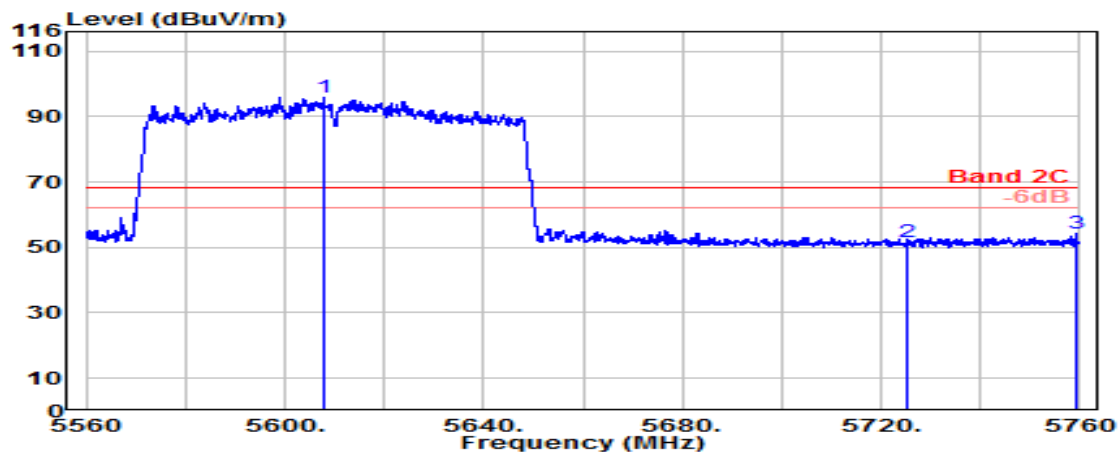

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5607.900	33.78	8.82	39.10	92.50	95.99	---	---	Peak
5725.000	33.60	8.88	39.14	48.47	51.81	68.20	16.39	Peak
5759.200	33.82	8.90	39.15	50.64	54.21	68.20	13.99	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

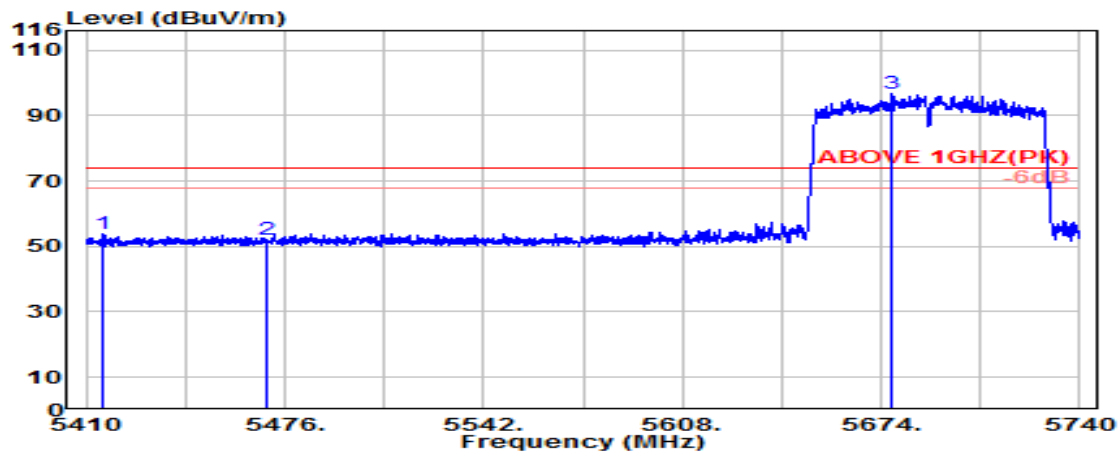

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5415.200	34.03	8.70	39.07	50.01	53.67	74.00	20.33	Peak
5470.000	34.10	8.74	39.07	48.12	51.89	74.00	22.11	Peak
@ 5677.800	33.53	8.85	39.12	93.53	96.79	---	---	Peak

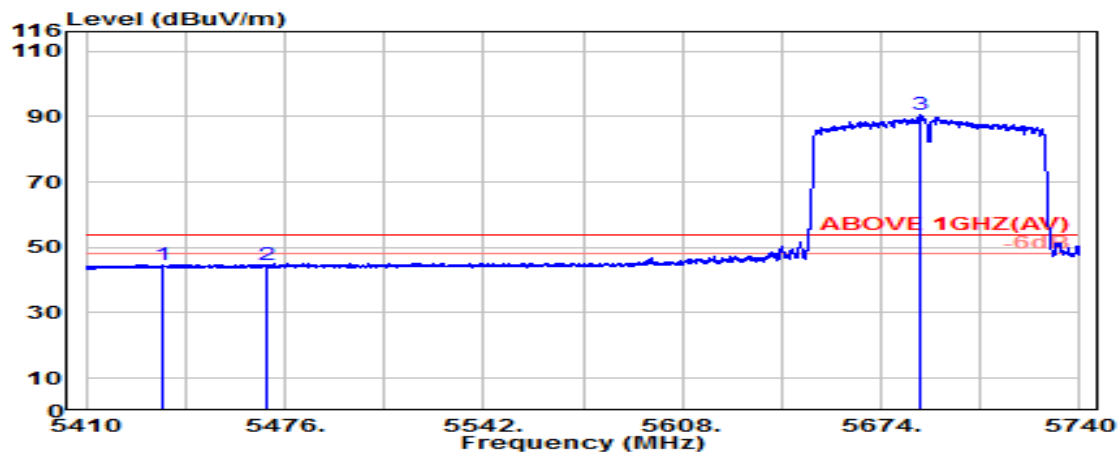

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.100	34.07	8.72	39.07	41.10	44.82	54.00	9.18	Average
5470.000	34.10	8.74	39.07	40.95	44.72	54.00	9.28	Average
@ 5687.100	33.48	8.86	39.13	87.23	90.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

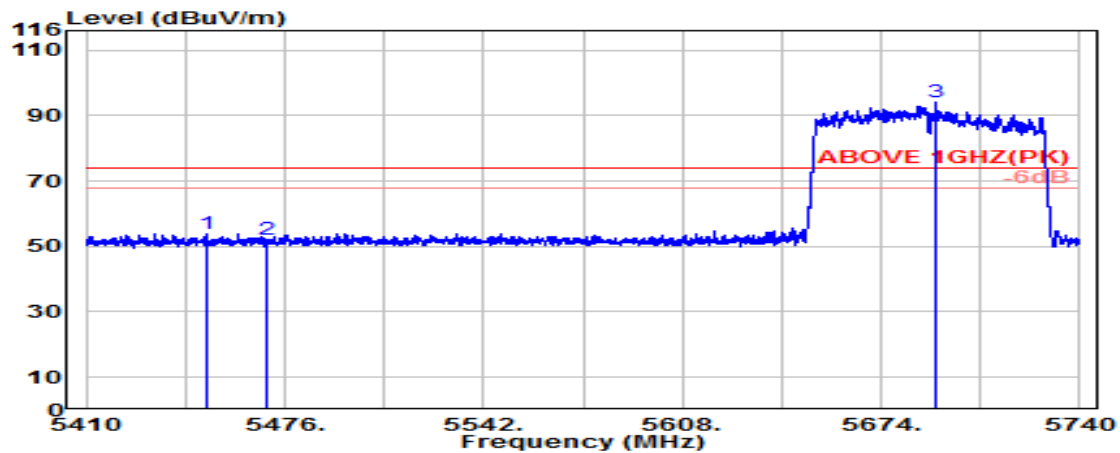

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.800	34.10	8.72	39.07	50.04	53.79	74.00	20.21	Peak
5470.000	34.10	8.74	39.07	48.21	51.97	74.00	22.03	Peak
@ 5692.300	33.45	8.86	39.13	90.78	93.96	---	---	Peak

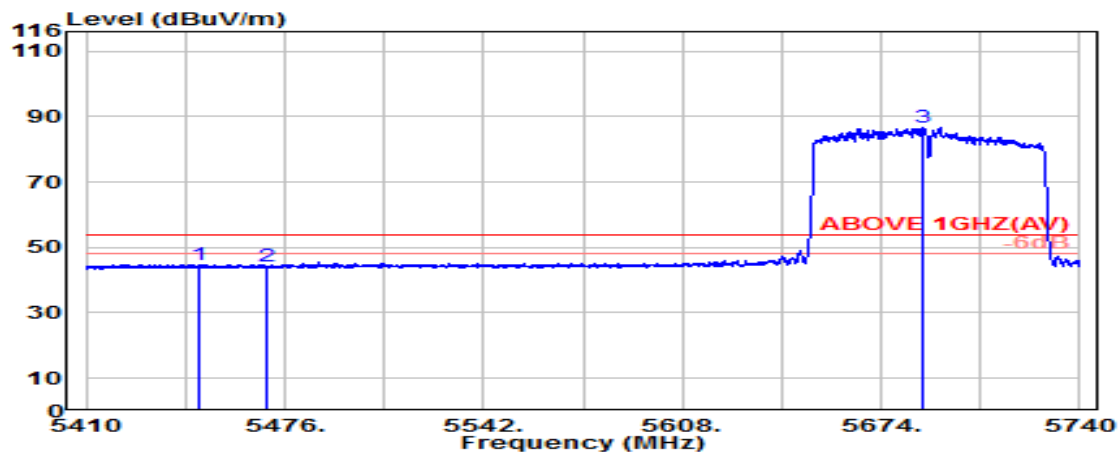

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.400	34.09	8.72	39.07	41.10	44.84	54.00	9.16	Average
5470.000	34.10	8.74	39.07	40.29	44.05	54.00	9.95	Average
@ 5687.500	33.47	8.86	39.13	83.43	86.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.