

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

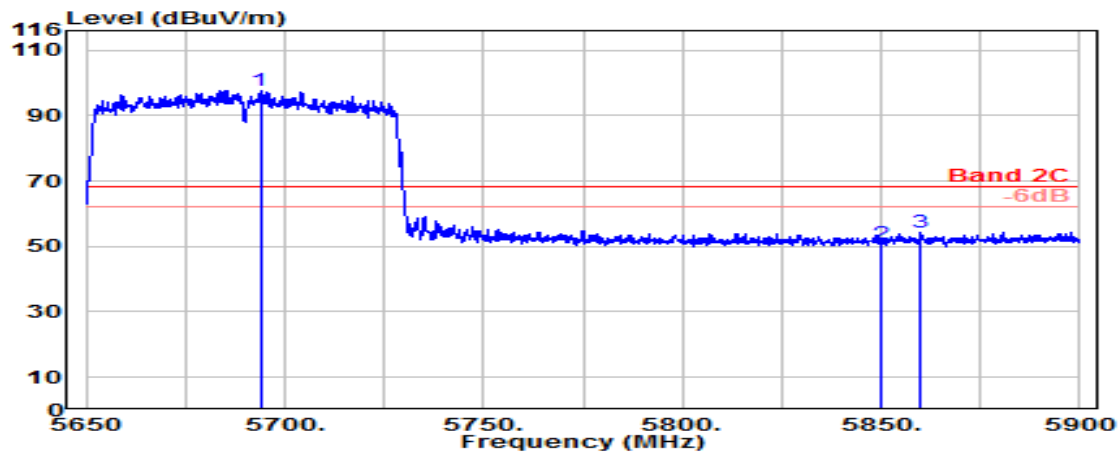

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5693.800	33.44	8.86	39.13	94.50	97.67	---	---	Peak
5850.000	33.90	8.95	39.18	47.12	50.79	68.20	17.41	Peak
5859.800	33.96	8.95	39.18	50.54	54.27	68.20	13.93	Peak

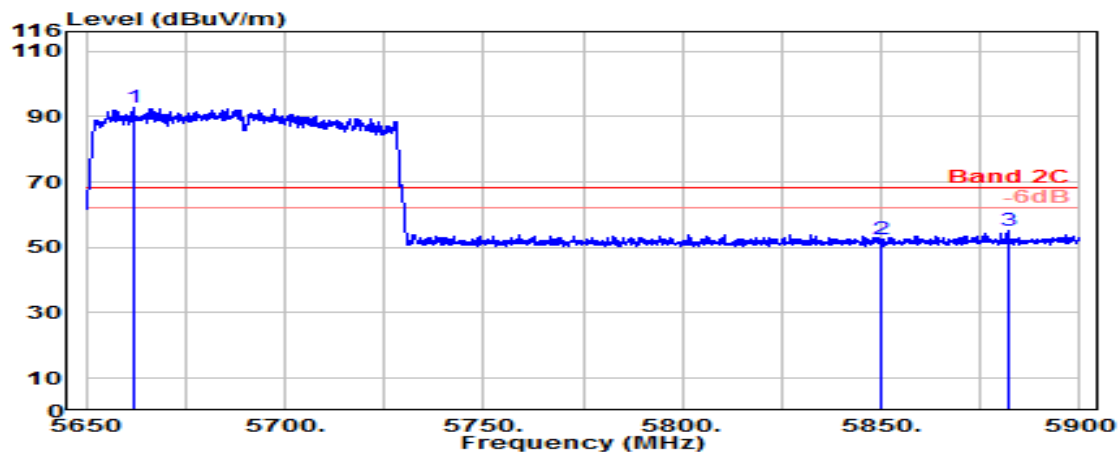

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.200	33.63	8.85	39.12	89.57	92.92	---	---	Peak
5850.000	33.90	8.95	39.18	48.81	52.48	68.20	15.72	Peak
5881.800	34.09	8.97	39.19	51.13	55.01	68.20	13.19	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

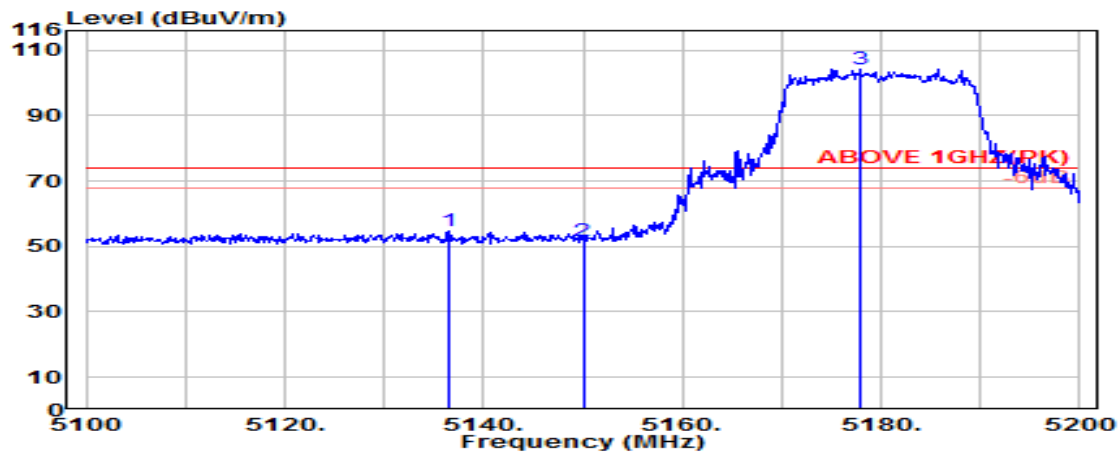

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.400	33.57	8.54	39.09	51.52	54.53	74.00	19.47	Peak
5150.000	33.60	8.54	39.09	48.69	51.74	74.00	22.26	Peak
@ 5177.900	33.60	8.56	39.09	101.01	104.08	---	---	Peak

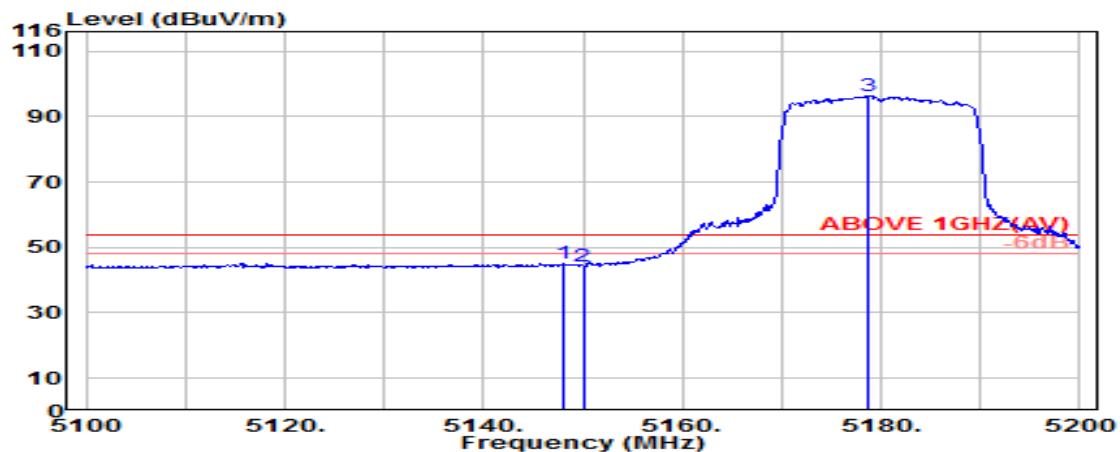

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.60	8.54	39.09	41.99	45.04	54.00	8.96	Average
5150.000	33.60	8.54	39.09	41.29	44.35	54.00	9.65	Average
@ 5178.800	33.60	8.56	39.09	93.33	96.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

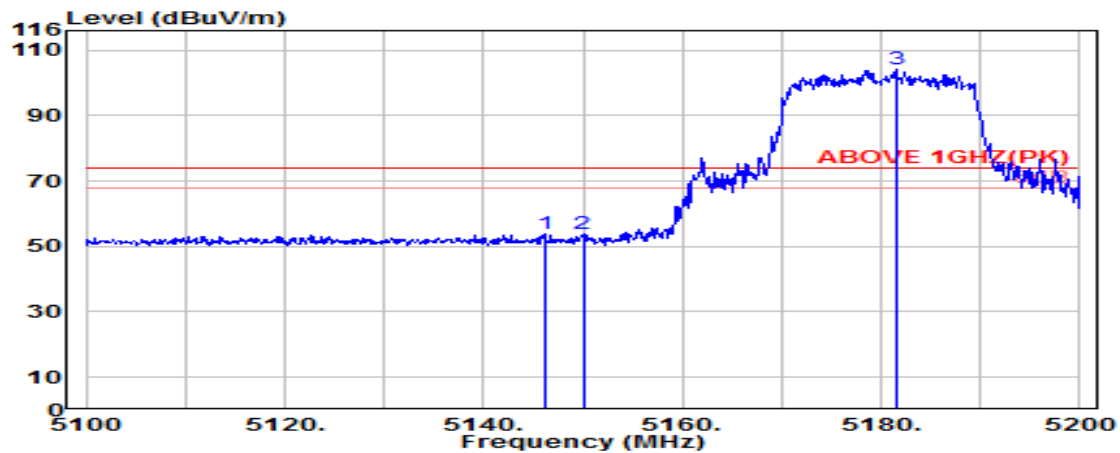

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.100	33.59	8.54	39.09	50.97	54.02	74.00	19.98	Peak
5150.000	33.60	8.54	39.09	50.99	54.05	74.00	19.95	Peak
@ 5181.500	33.60	8.56	39.09	100.96	104.03	---	---	Peak

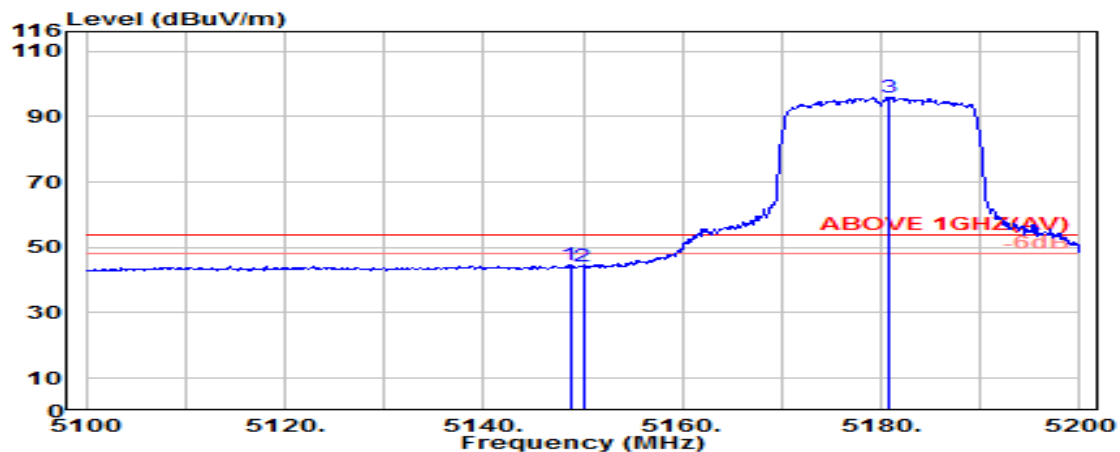

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.60	8.54	39.09	41.45	44.50	54.00	9.50	Average
5150.000	33.60	8.54	39.09	40.99	44.04	54.00	9.96	Average
@ 5180.700	33.60	8.56	39.09	92.82	95.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

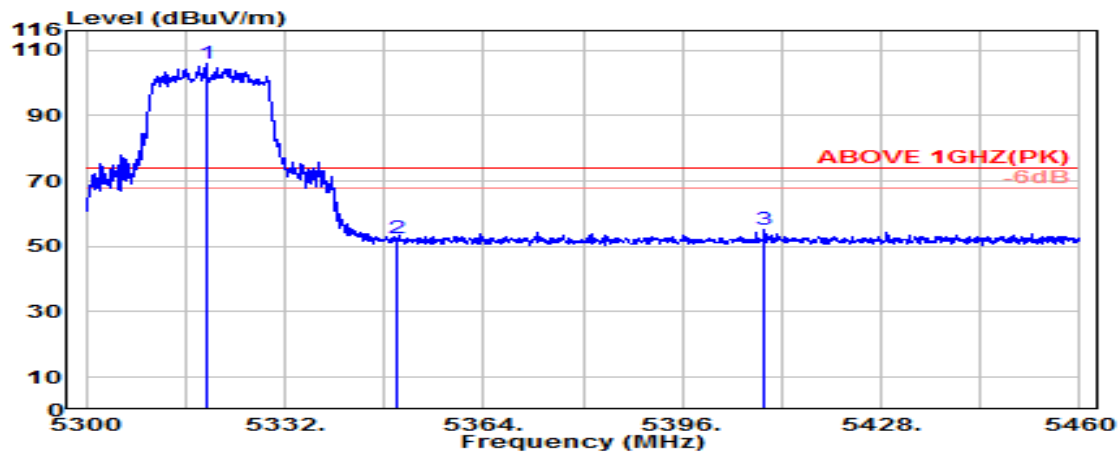

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.300	33.64	8.65	39.08	102.64	105.85	---	---	Peak
5350.000	33.70	8.67	39.08	49.23	52.52	74.00	21.48	Peak
5409.300	34.02	8.70	39.08	51.43	55.07	74.00	18.93	Peak

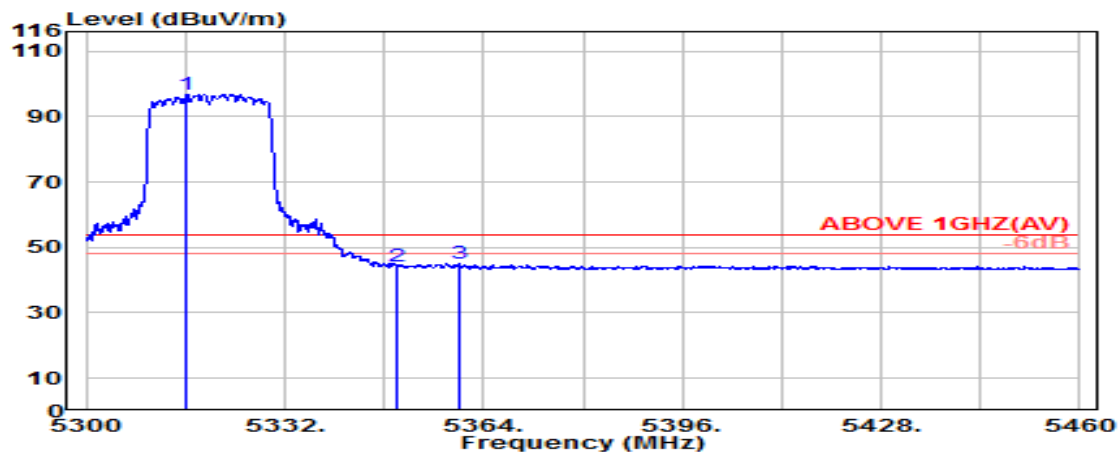

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.200	33.63	8.65	39.08	93.70	96.90	---	---	Average
5350.000	33.70	8.67	39.08	40.74	44.03	54.00	9.97	Average
5359.900	33.76	8.67	39.08	41.62	44.97	54.00	9.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

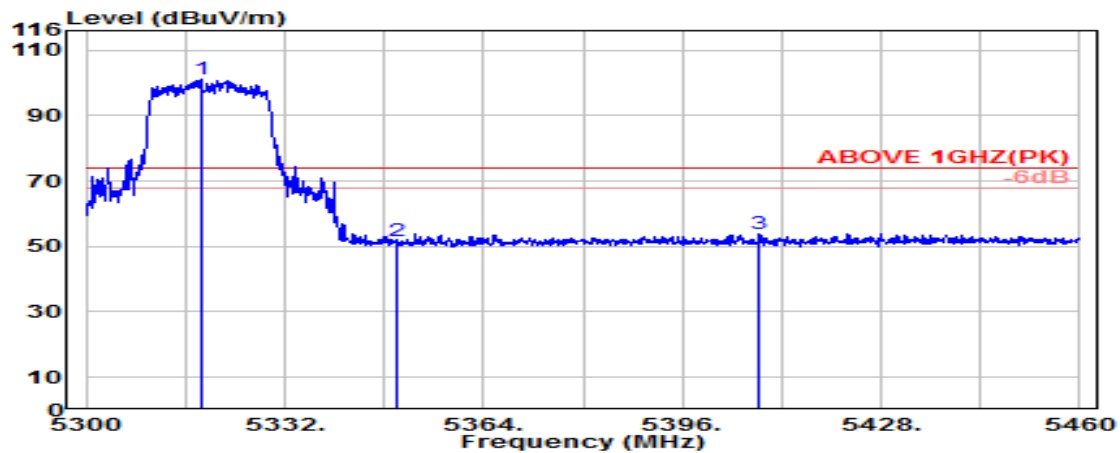

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.600	33.64	8.65	39.08	97.87	101.08	---	---	Peak
5350.000	33.70	8.67	39.08	48.20	51.48	74.00	22.52	Peak
5408.500	34.02	8.70	39.08	50.12	53.76	74.00	20.24	Peak

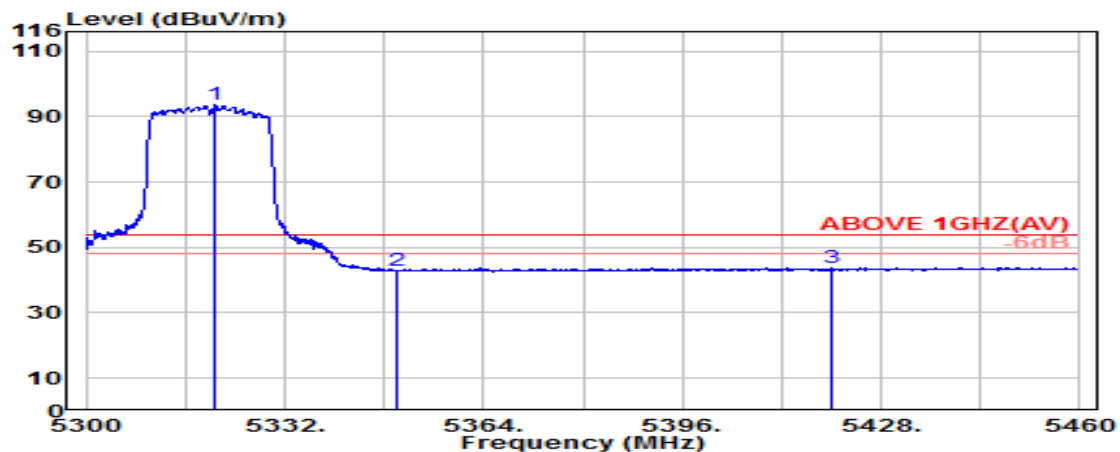


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.900	33.64	8.65	39.08	90.28	93.49	---	---	Average
5350.000	33.70	8.67	39.08	39.59	42.87	54.00	11.13	Average
5420.000	34.04	8.71	39.07	40.15	43.83	54.00	10.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

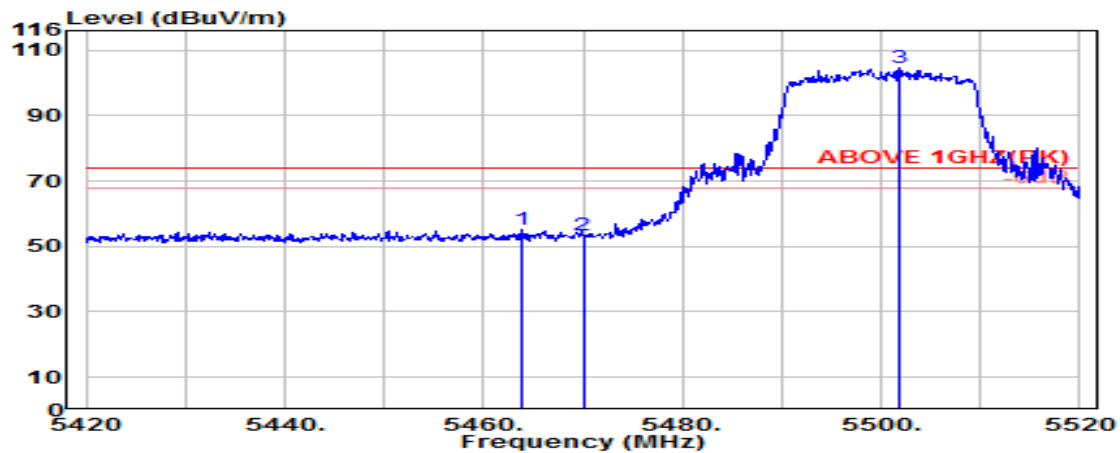

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.900	34.10	8.73	39.07	51.22	54.98	74.00	19.02	Peak
5470.000	34.10	8.74	39.07	49.80	53.57	74.00	20.43	Peak
@ 5501.900	34.10	8.75	39.07	100.80	104.58	---	---	Peak

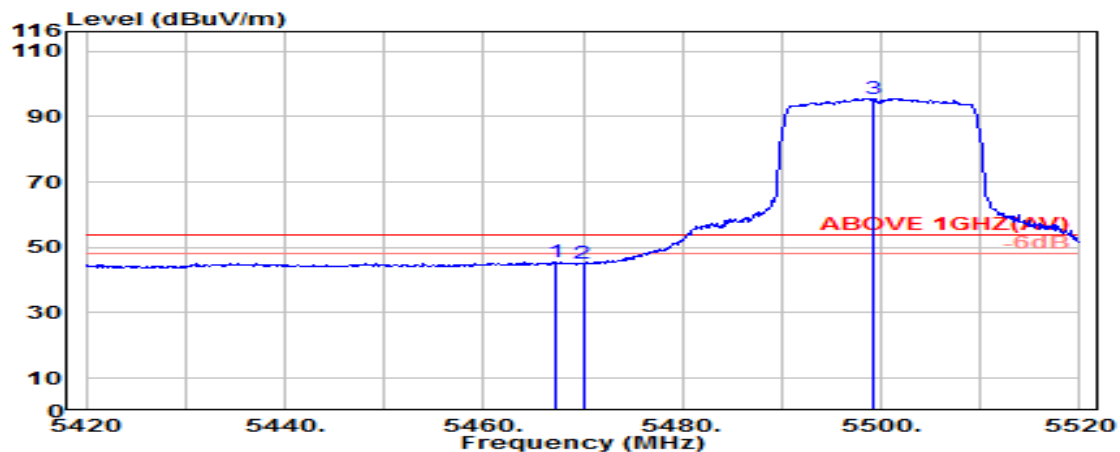

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.10	8.73	39.07	41.69	45.46	54.00	8.54	Average
5470.000	34.10	8.74	39.07	41.52	45.28	54.00	8.72	Average
@ 5499.200	34.10	8.75	39.07	91.74	95.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

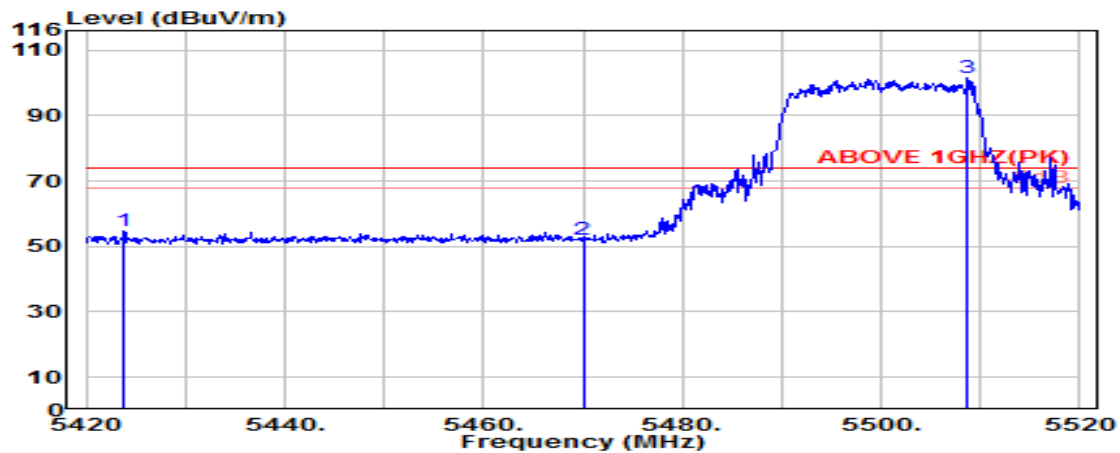

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.800	34.05	8.71	39.07	51.22	54.90	74.00	19.10	Peak
5470.000	34.10	8.74	39.07	48.43	52.19	74.00	21.81	Peak
@ 5508.700	34.08	8.76	39.07	97.59	101.36	---	---	Peak

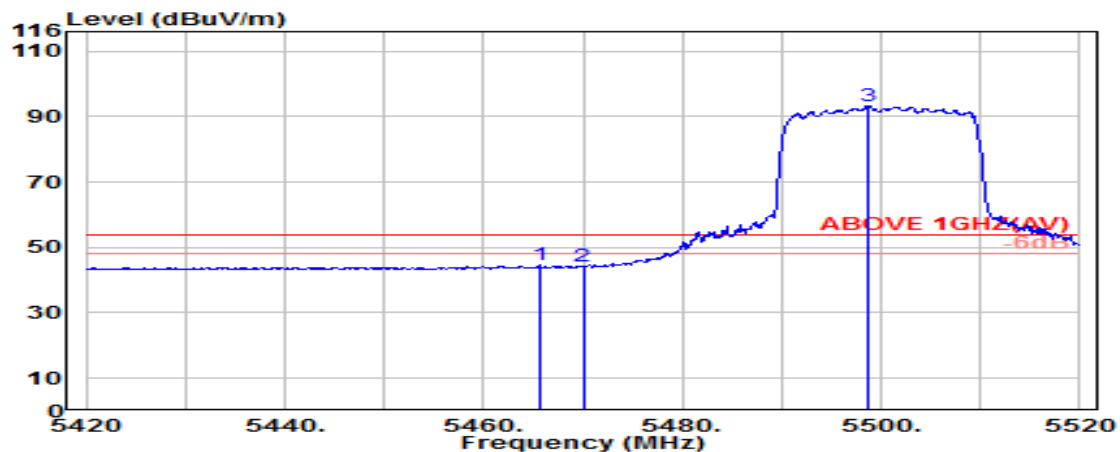

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.10	8.73	39.07	41.03	44.80	54.00	9.20	Average
5470.000	34.10	8.74	39.07	40.53	44.29	54.00	9.71	Average
@ 5498.800	34.10	8.75	39.07	89.38	93.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

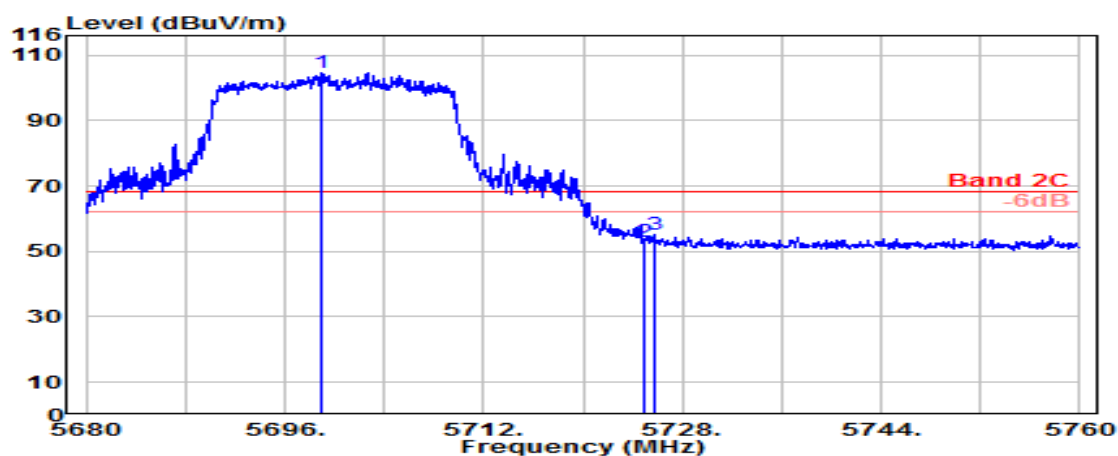

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.850	33.41	8.87	39.13	101.36	104.50	---	---	Peak
5725.000	33.60	8.88	39.14	49.69	53.04	68.20	15.16	Peak
5725.700	33.61	8.88	39.14	51.79	55.14	68.20	13.06	Peak

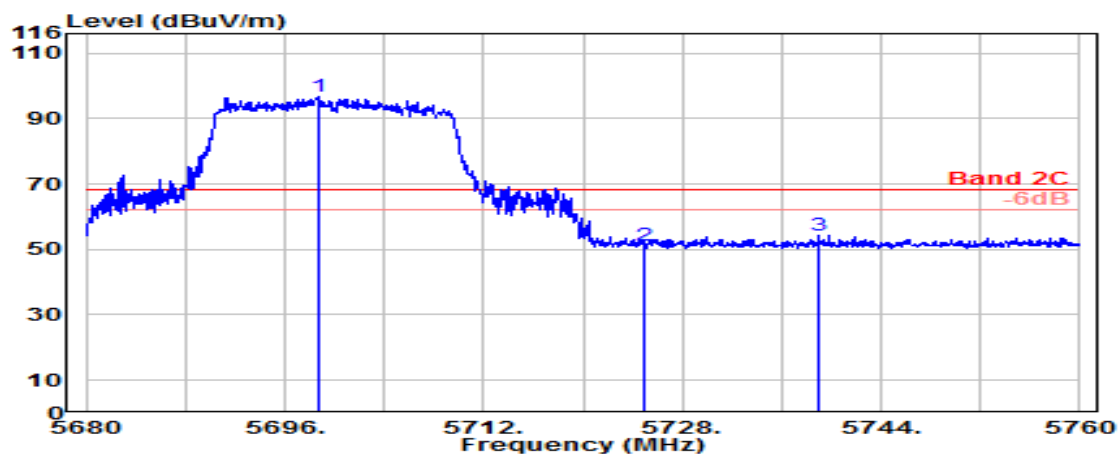

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.800	33.41	8.87	39.13	93.71	96.85	---	---	Peak
5725.000	33.60	8.88	39.14	47.87	51.21	68.20	16.99	Peak
5739.000	33.71	8.89	39.14	50.68	54.13	68.20	14.07	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

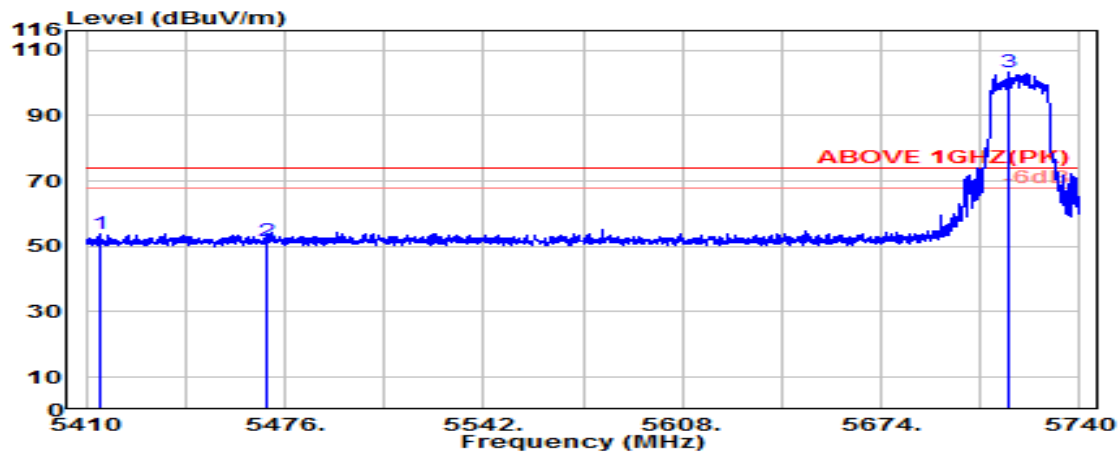

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5414.700	34.03	8.70	39.07	50.31	53.97	74.00	20.03	Peak
5470.000	34.10	8.74	39.07	48.03	51.79	74.00	22.21	Peak
@ 5716.200	33.53	8.88	39.14	100.03	103.30	---	---	Peak

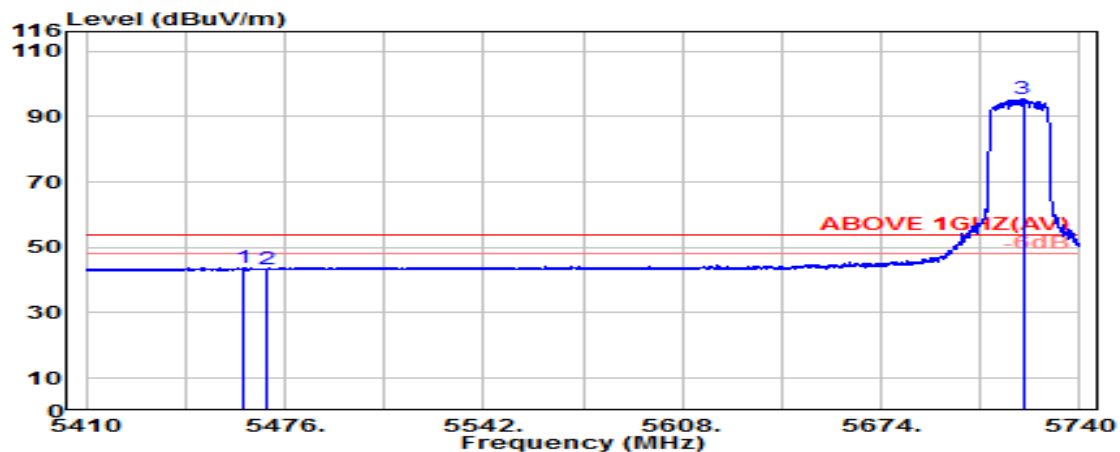

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.400	34.10	8.73	39.07	39.90	43.66	54.00	10.34	Average
5470.000	34.10	8.74	39.07	39.58	43.35	54.00	10.65	Average
@ 5721.100	33.57	8.88	39.14	92.19	95.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

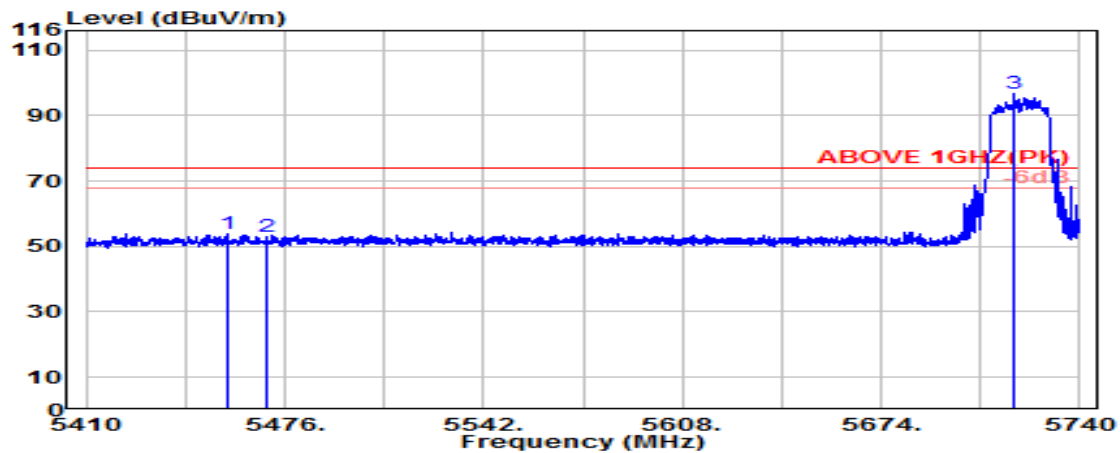

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.700	34.10	8.73	39.07	50.27	54.03	74.00	19.97	Peak
5470.000	34.10	8.74	39.07	49.02	52.78	74.00	21.22	Peak
@ 5718.000	33.54	8.88	39.14	93.32	96.61	---	---	Peak

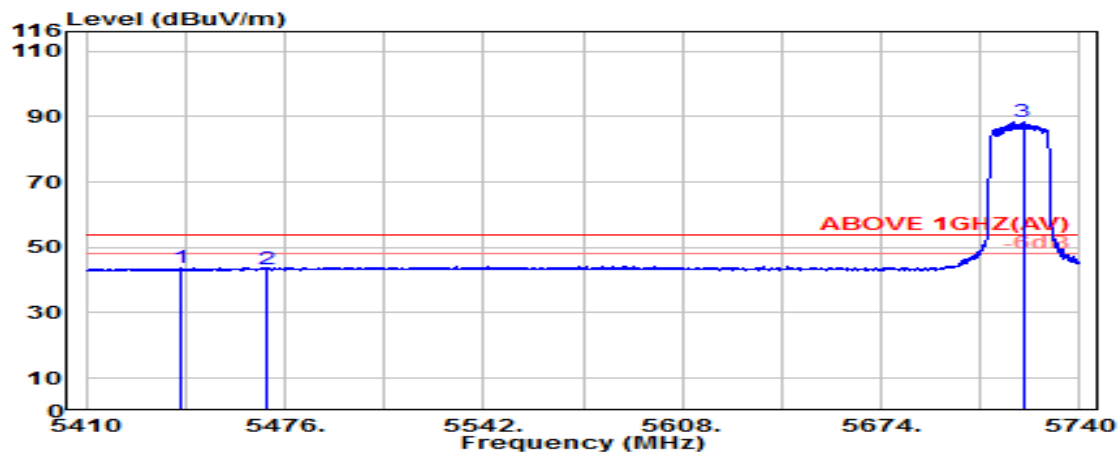

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.100	34.08	8.72	39.07	39.96	43.69	54.00	10.31	Average
5470.000	34.10	8.74	39.07	39.56	43.33	54.00	10.67	Average
@ 5721.100	33.57	8.88	39.14	84.90	88.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

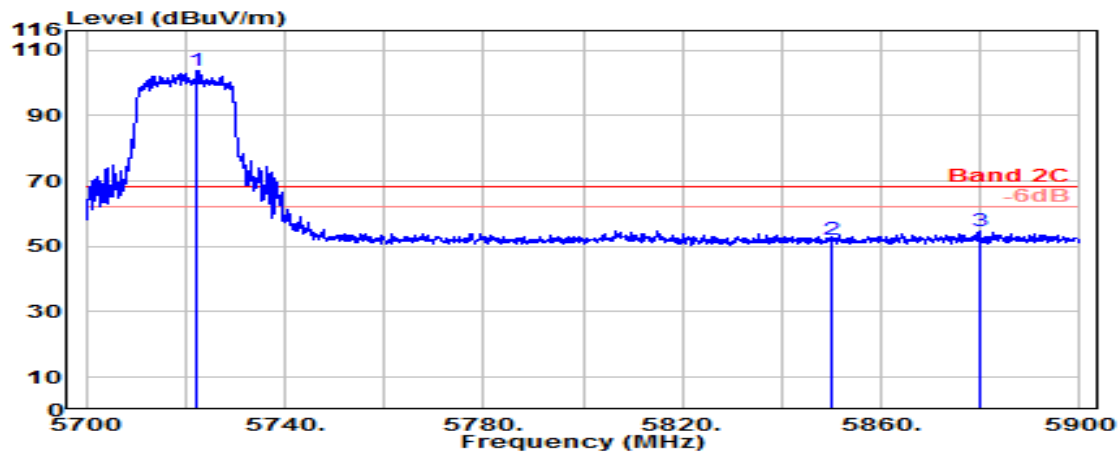

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.200	33.58	8.88	39.14	100.43	103.75	---	---	Peak
5850.000	33.90	8.95	39.18	48.20	51.87	68.20	16.33	Peak
5879.700	34.08	8.97	39.19	51.05	54.91	68.20	13.29	Peak

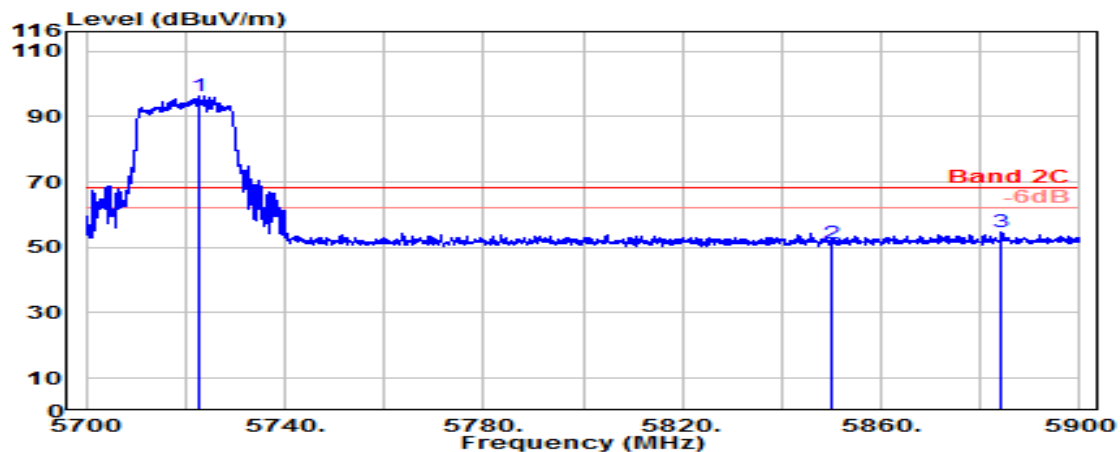

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.700	33.58	8.88	39.14	93.02	96.35	---	---	Peak
5850.000	33.90	8.95	39.18	47.37	51.04	68.20	17.16	Peak
5884.300	34.11	8.97	39.19	50.76	54.65	68.20	13.55	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

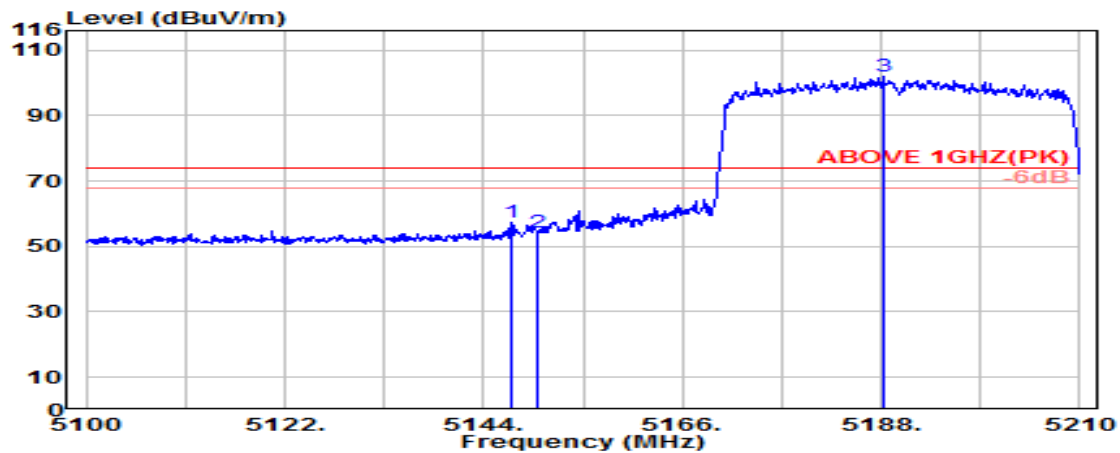

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.200	33.59	8.54	39.09	54.49	57.54	74.00	16.46	Peak
5150.000	33.60	8.54	39.09	51.06	54.11	74.00	19.89	Peak
@ 5188.300	33.60	8.57	39.09	98.90	101.98	---	---	Peak

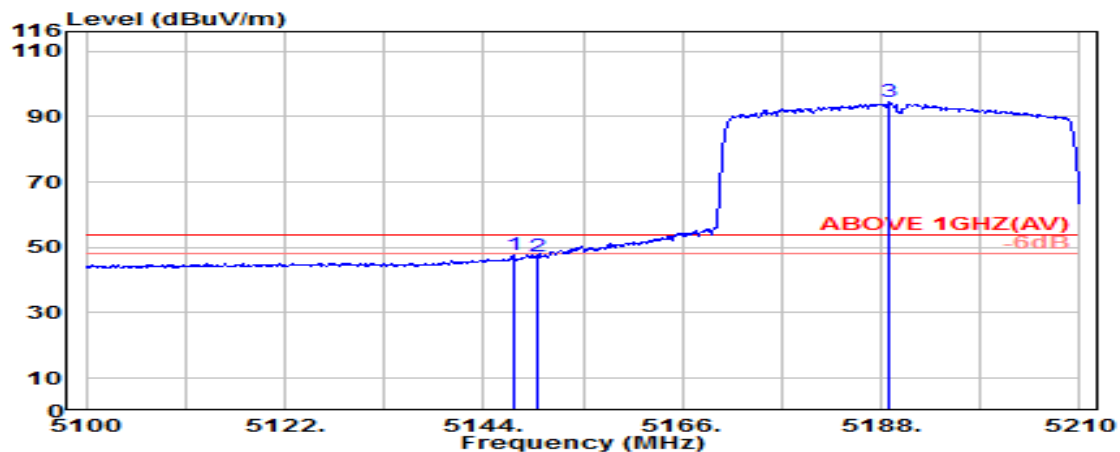

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.500	33.60	8.54	39.09	44.76	47.81	54.00	6.19	Average
5150.000	33.60	8.54	39.09	44.35	47.40	54.00	6.60	Average
@ 5189.000	33.60	8.57	39.09	91.51	94.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

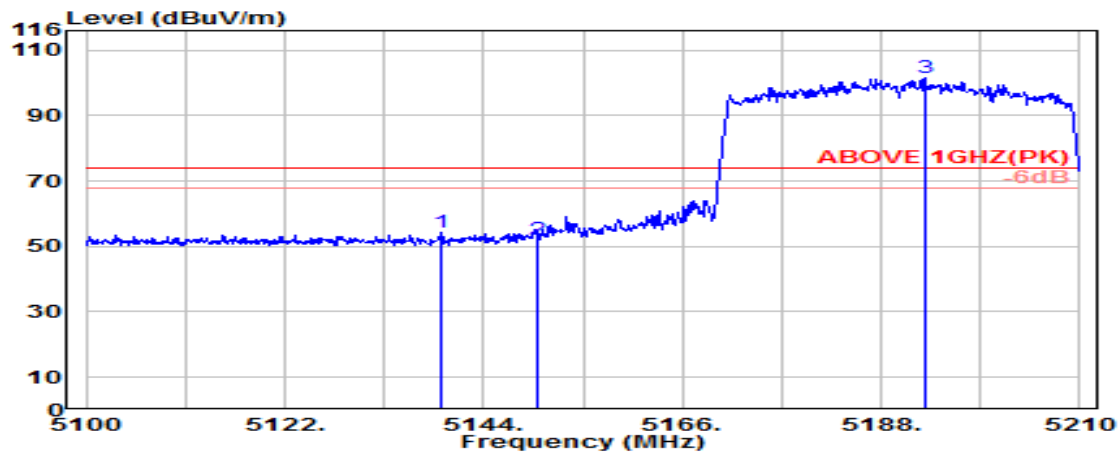

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.400	33.58	8.54	39.09	51.37	54.40	74.00	19.60	Peak
5150.000	33.60	8.54	39.09	48.96	52.01	74.00	21.99	Peak
@ 5192.900	33.60	8.57	39.09	98.48	101.56	---	---	Peak

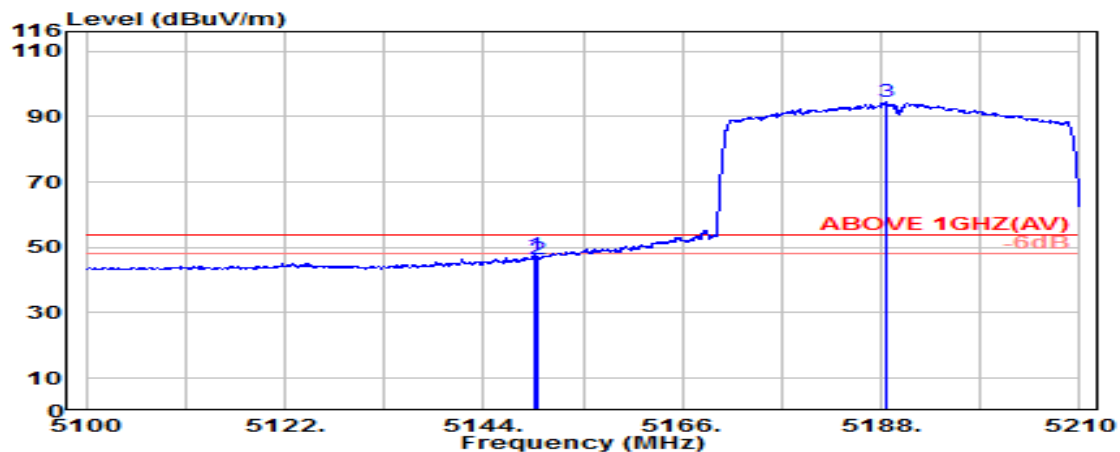

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.60	8.54	39.09	44.64	47.70	54.00	6.30	Average
5150.000	33.60	8.54	39.09	43.39	46.44	54.00	7.56	Average
@ 5188.500	33.60	8.57	39.09	91.29	94.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

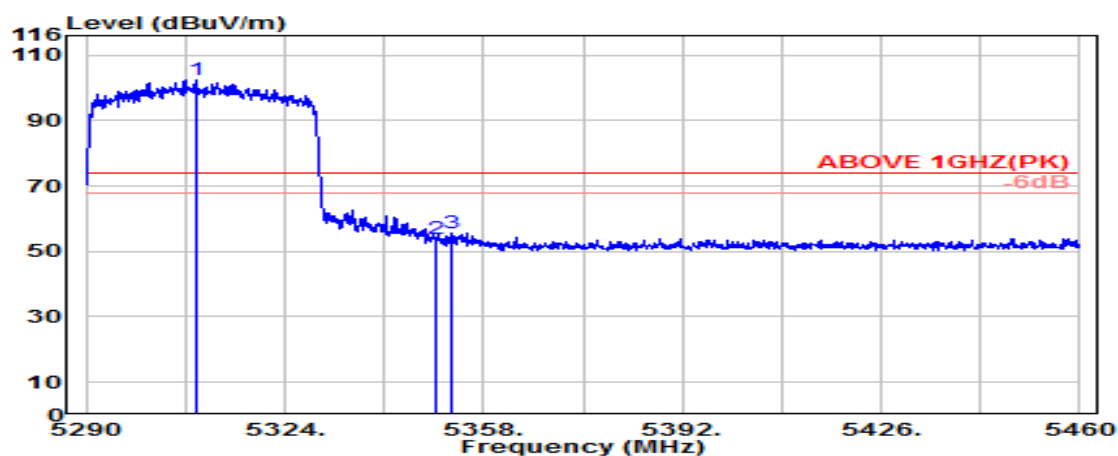

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.800	33.62	8.64	39.08	99.39	102.57	---	---	Peak
5350.000	33.70	8.67	39.08	50.55	53.84	74.00	20.16	Peak
5352.500	33.72	8.67	39.08	52.44	55.75	74.00	18.25	Peak

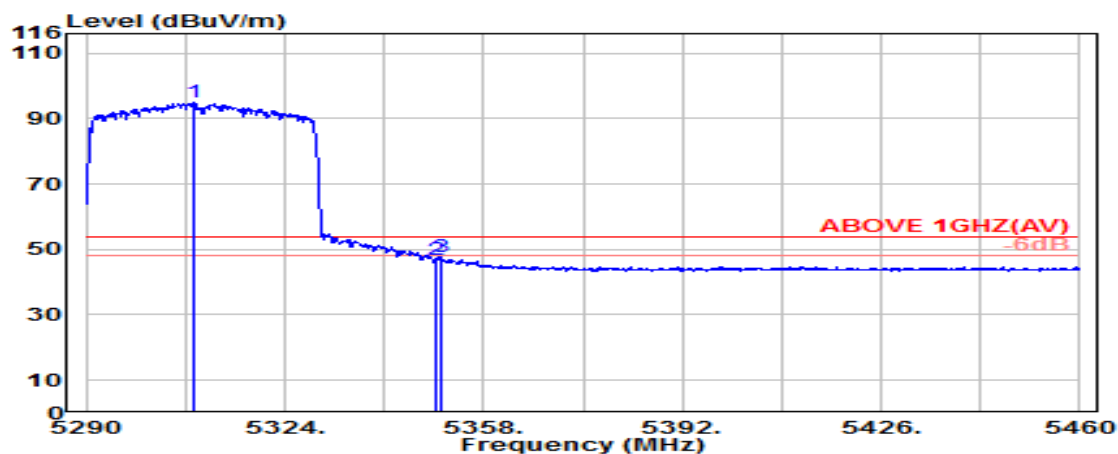

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.600	33.62	8.64	39.08	91.61	94.79	---	---	Average
5350.000	33.70	8.67	39.08	43.52	46.81	54.00	7.19	Average
5350.600	33.70	8.67	39.08	44.52	47.81	54.00	6.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

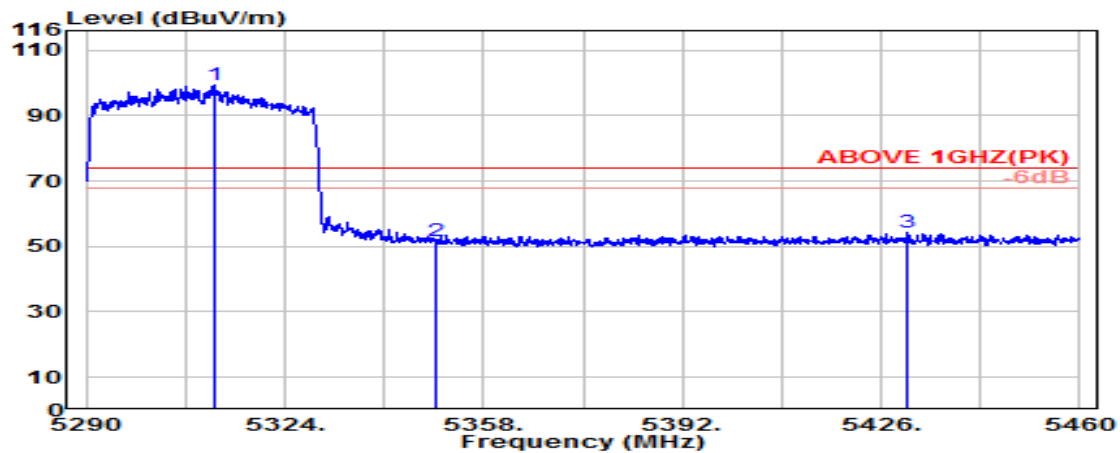

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.100	33.62	8.64	39.08	96.31	99.49	---	---	Peak
5350.000	33.70	8.67	39.08	48.50	51.79	74.00	22.21	Peak
5430.400	34.06	8.71	39.07	50.37	54.07	74.00	19.93	Peak

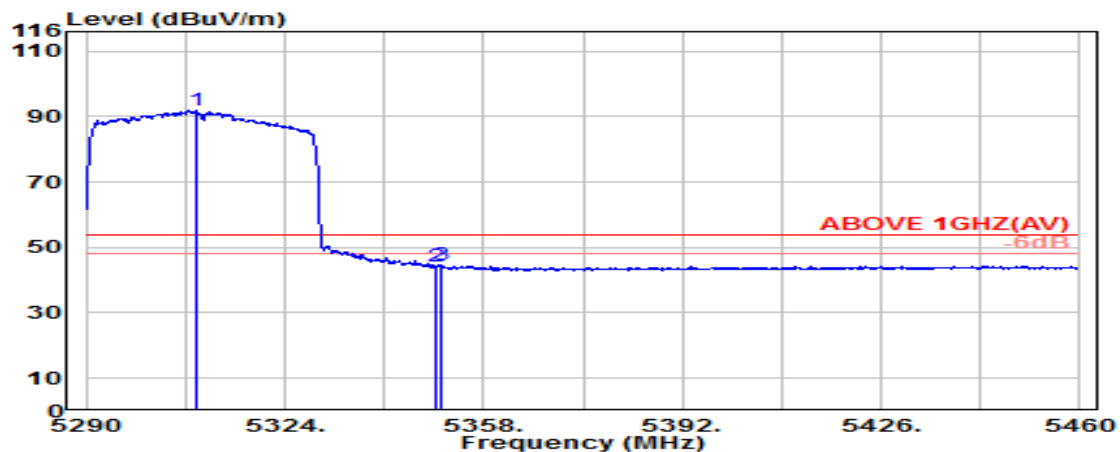

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.700	33.62	8.64	39.08	88.78	91.96	---	---	Average
5350.000	33.70	8.67	39.08	40.91	44.20	54.00	9.80	Average
5350.900	33.71	8.67	39.08	41.37	44.66	54.00	9.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

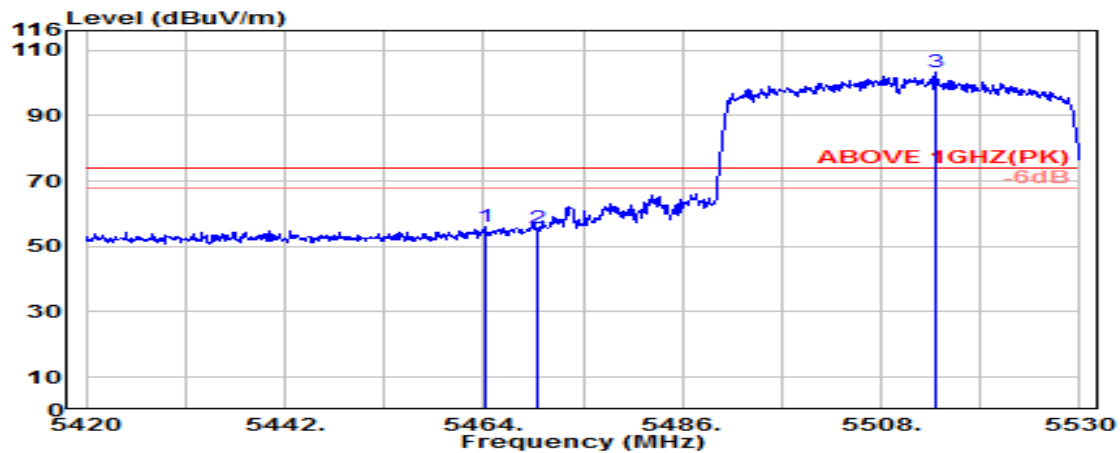

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.10	8.73	39.07	52.44	56.20	74.00	17.80	Peak
5470.000	34.10	8.74	39.07	51.88	55.64	74.00	18.36	Peak
@ 5514.000	34.07	8.76	39.07	99.48	103.24	---	---	Peak

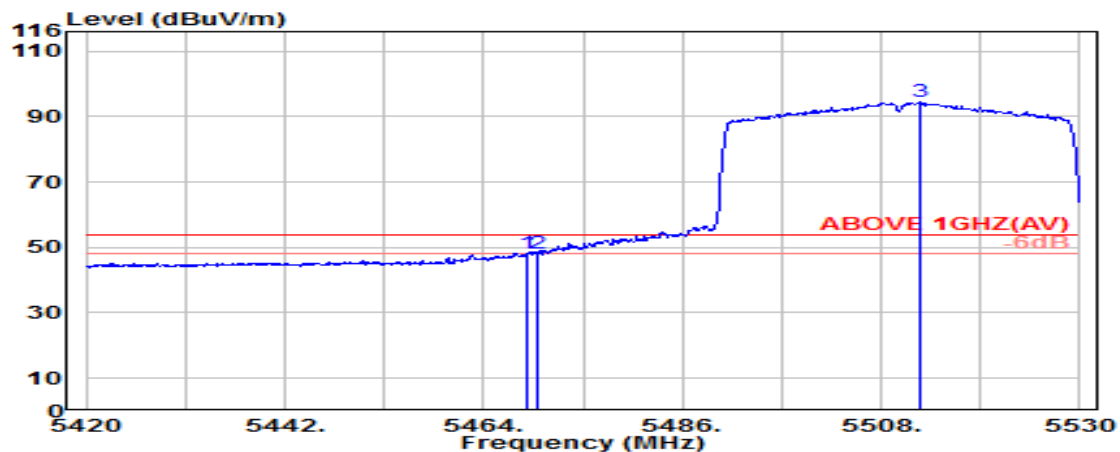

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.10	8.74	39.07	44.53	48.29	54.00	5.71	Average
5470.000	34.10	8.74	39.07	44.22	47.98	54.00	6.02	Average
@ 5512.200	34.08	8.76	39.07	90.91	94.67	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

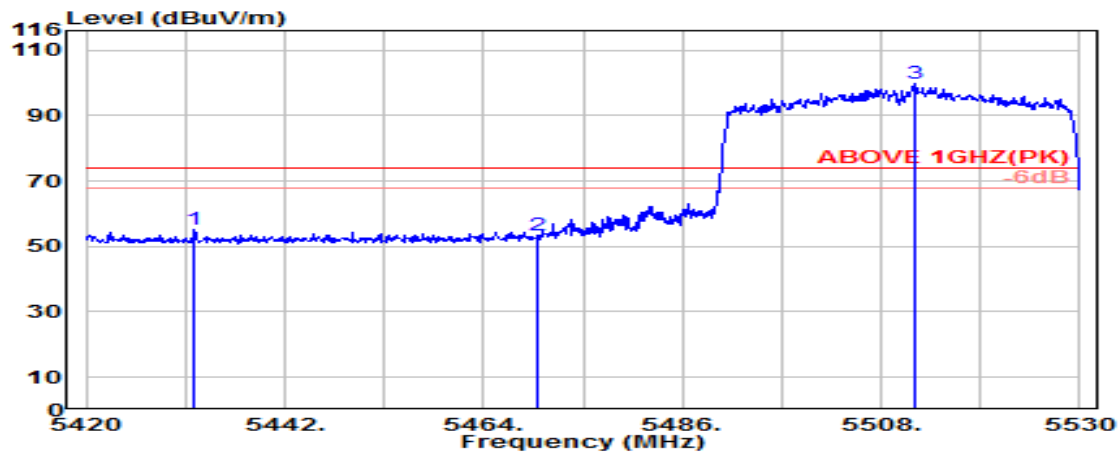

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.000	34.06	8.71	39.07	51.51	55.21	74.00	18.79	Peak
5470.000	34.10	8.74	39.07	49.64	53.40	74.00	20.60	Peak
@ 5511.700	34.08	8.76	39.07	95.84	99.61	---	---	Peak

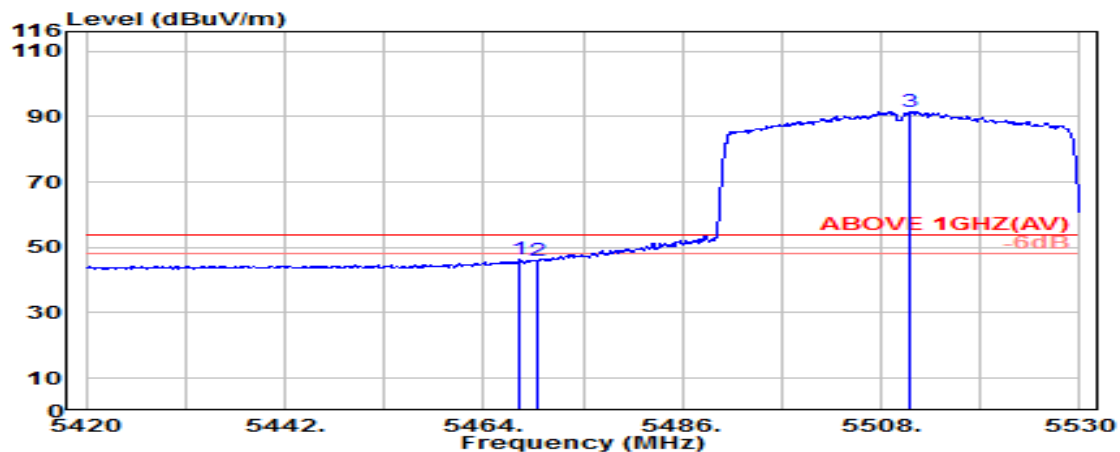

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.10	8.73	39.07	42.44	46.21	54.00	7.79	Average
5470.000	34.10	8.74	39.07	42.19	45.96	54.00	8.04	Average
@ 5511.100	34.08	8.76	39.07	87.68	91.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

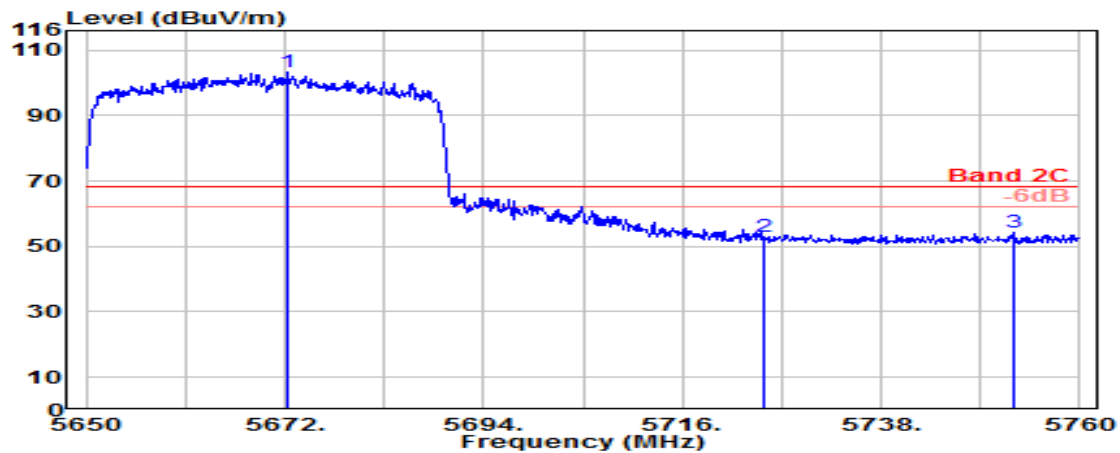

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.300	33.57	8.85	39.12	99.81	103.10	---	---	Peak
5725.000	33.60	8.88	39.14	49.55	52.89	68.20	15.31	Peak
5752.700	33.81	8.90	39.15	50.81	54.36	68.20	13.84	Peak

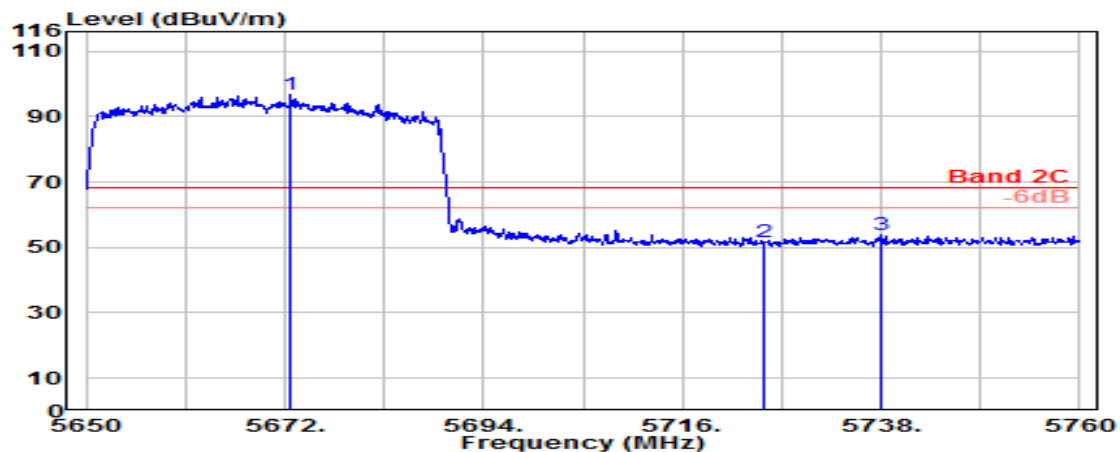

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.700	33.56	8.85	39.12	93.23	96.53	---	---	Peak
5725.000	33.60	8.88	39.14	48.17	51.51	68.20	16.69	Peak
5738.000	33.70	8.89	39.14	50.18	53.63	68.20	14.57	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

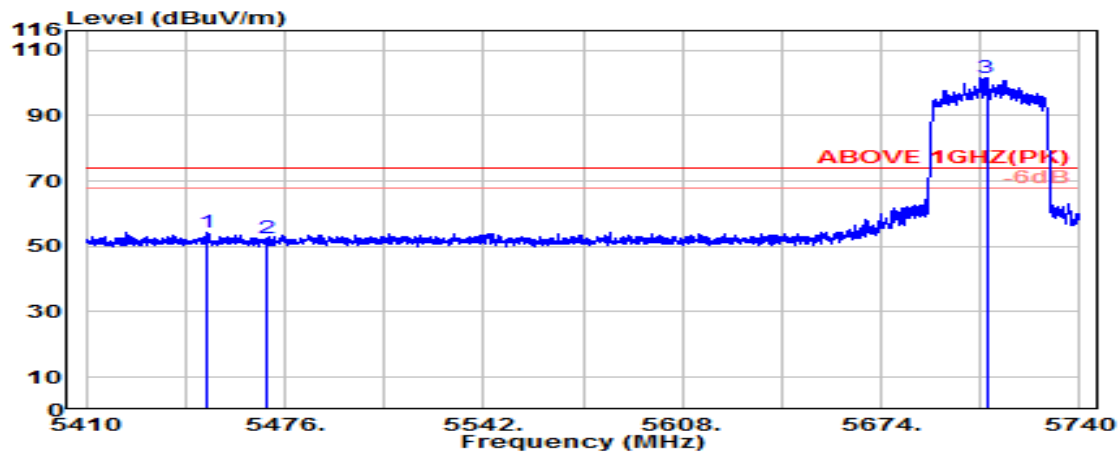

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.500	34.10	8.72	39.07	50.54	54.29	74.00	19.71	Peak
5470.000	34.10	8.74	39.07	48.70	52.47	74.00	21.53	Peak
@ 5709.000	33.47	8.87	39.13	98.46	101.67	---	---	Peak

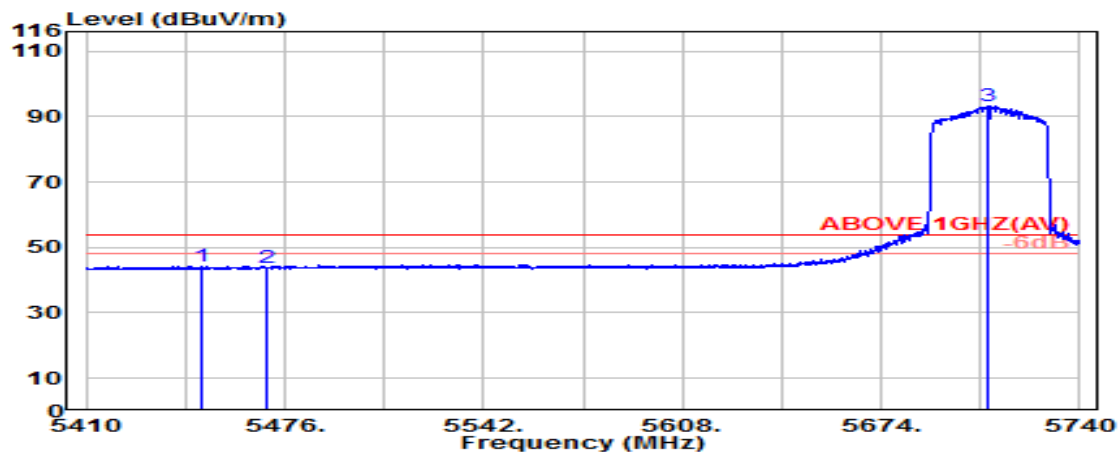

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.000	34.10	8.72	39.07	40.46	44.20	54.00	9.80	Average
5470.000	34.10	8.74	39.07	39.84	43.61	54.00	10.39	Average
@ 5709.200	33.47	8.87	39.13	89.88	93.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

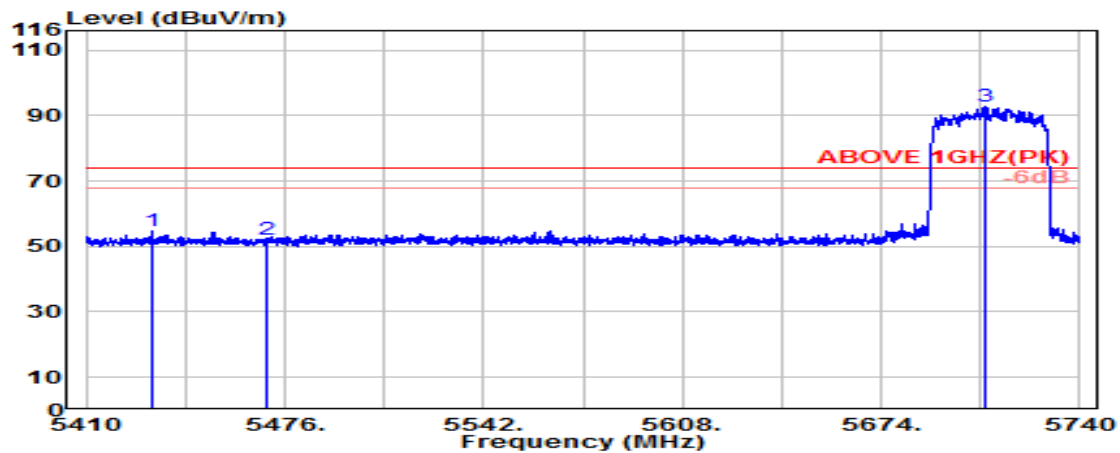

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.900	34.06	8.71	39.07	50.84	54.54	74.00	19.46	Peak
5470.000	34.10	8.74	39.07	48.16	51.92	74.00	22.08	Peak
@ 5708.200	33.47	8.87	39.13	89.63	92.83	---	---	Peak

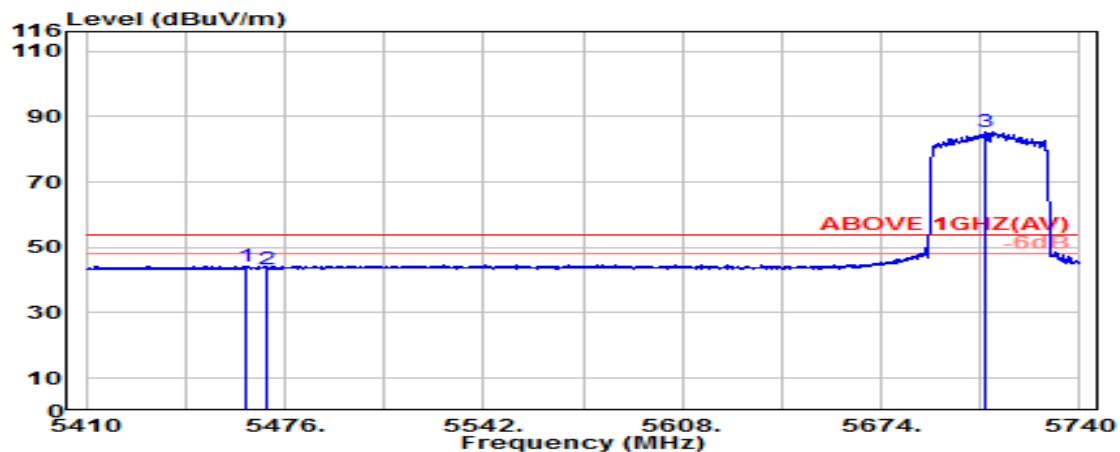

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.400	34.10	8.73	39.07	40.66	44.42	54.00	9.58	Average
5470.000	34.10	8.74	39.07	39.71	43.47	54.00	10.53	Average
@ 5708.800	33.47	8.87	39.13	82.21	85.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

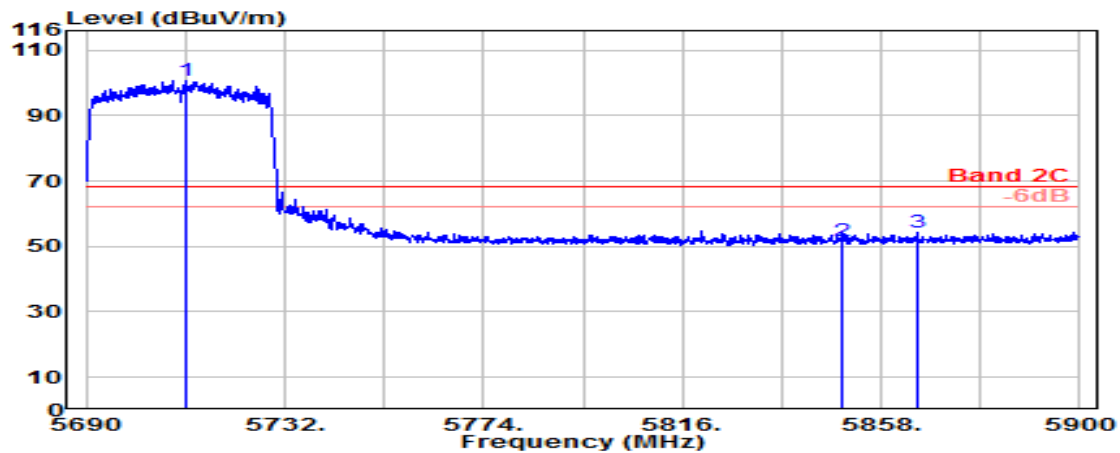

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.100	33.49	8.87	39.13	97.50	100.73	---	---	Peak
5850.000	33.90	8.95	39.18	47.87	51.55	68.20	16.65	Peak
5865.800	34.00	8.96	39.18	50.60	54.37	68.20	13.83	Peak

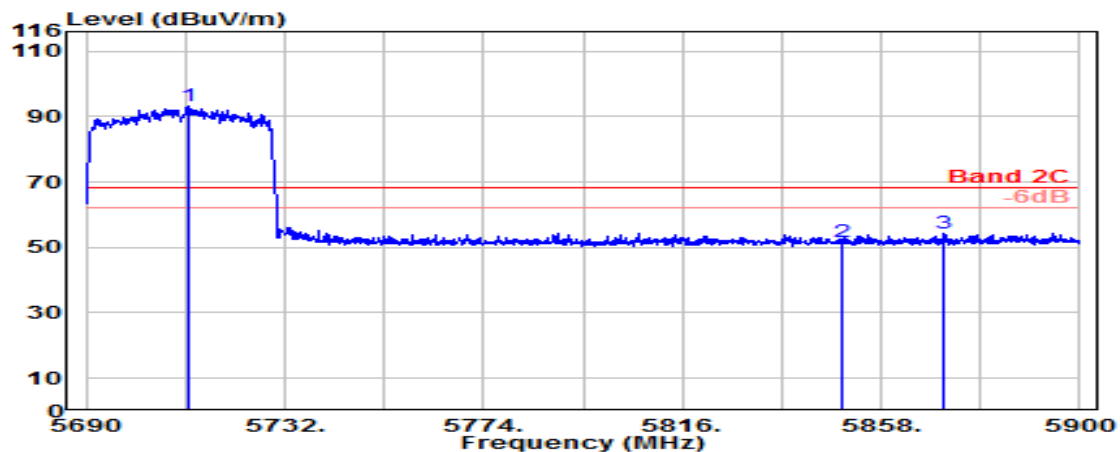

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.800	33.49	8.87	39.14	90.02	93.25	---	---	Peak
5850.000	33.90	8.95	39.18	47.91	51.58	68.20	16.62	Peak
5871.400	34.03	8.96	39.18	50.42	54.23	68.20	13.97	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

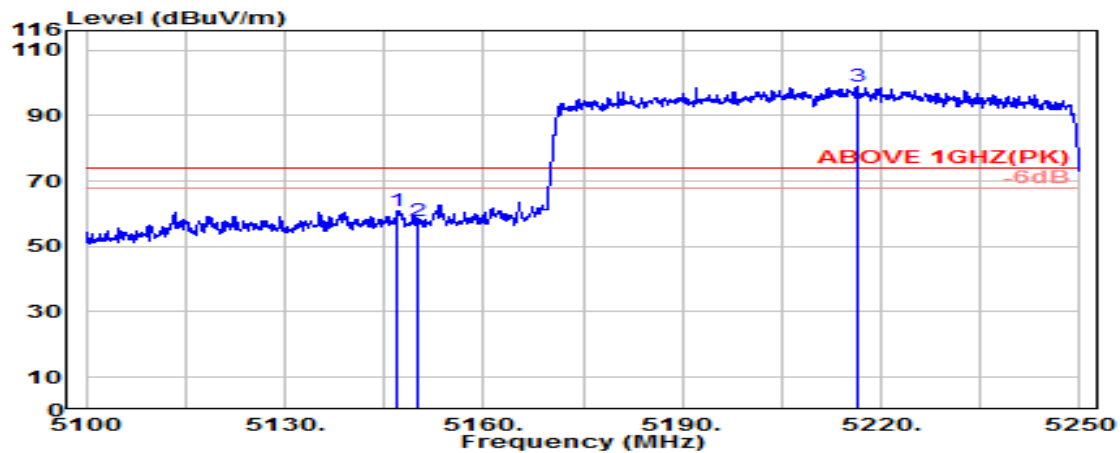

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.59	8.54	39.09	57.88	60.93	74.00	13.07	Peak
5150.000	33.60	8.54	39.09	54.59	57.65	74.00	16.35	Peak
@ 5216.300	33.63	8.58	39.09	95.70	98.83	---	---	Peak

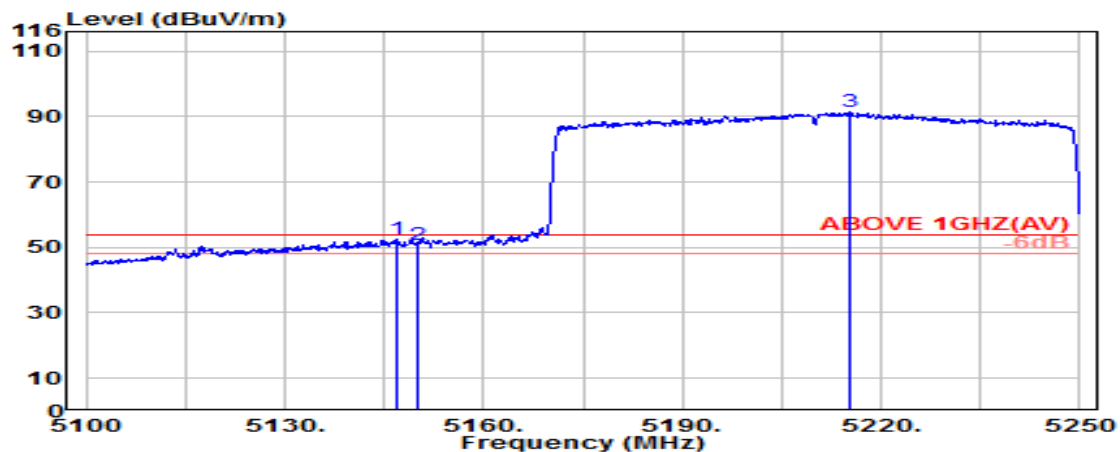

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.59	8.54	39.09	49.39	52.43	54.00	1.57	Average
5150.000	33.60	8.54	39.09	47.81	50.86	54.00	3.14	Average
@ 5215.100	33.63	8.58	39.09	88.39	91.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

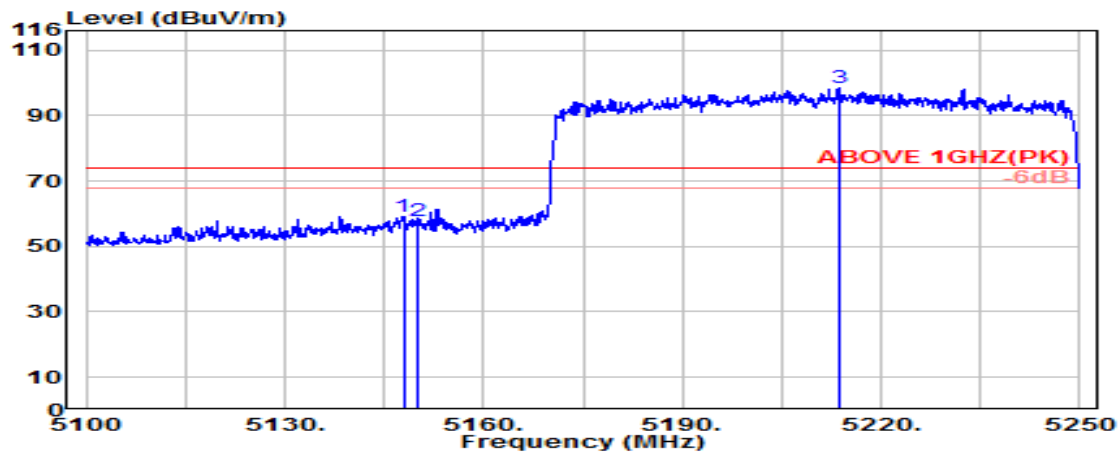

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.900	33.60	8.54	39.09	56.05	59.09	74.00	14.91	Peak
5150.000	33.60	8.54	39.09	54.88	57.94	74.00	16.06	Peak
@ 5213.600	33.63	8.58	39.09	95.46	98.58	---	---	Peak

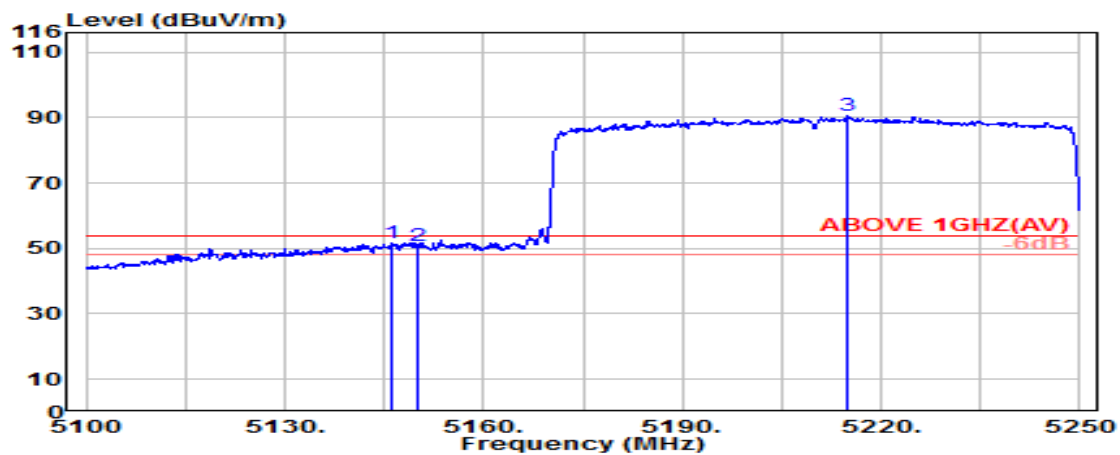

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.200	33.59	8.54	39.09	48.57	51.61	54.00	2.39	Average
5150.000	33.60	8.54	39.09	47.68	50.73	54.00	3.27	Average
@ 5214.800	33.63	8.58	39.09	87.69	90.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

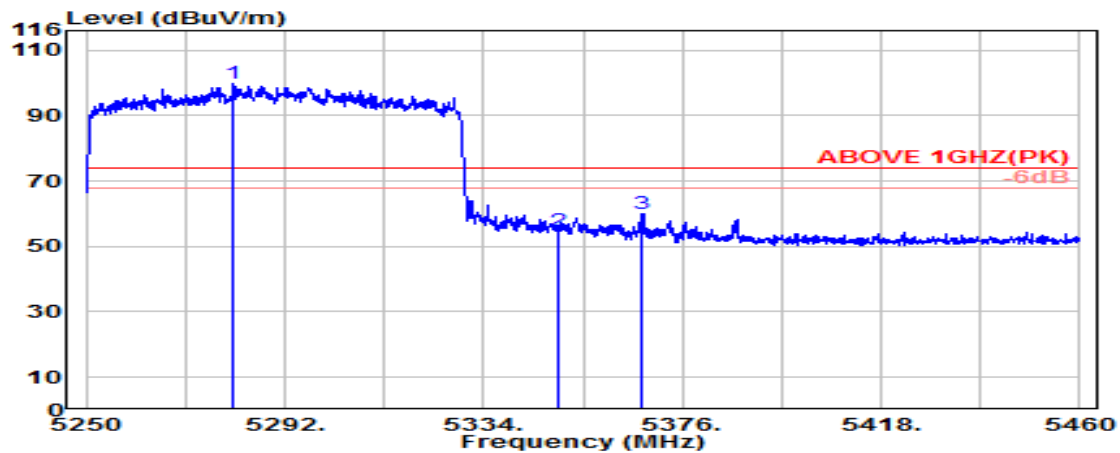

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5281.100	33.64	8.62	39.08	96.66	99.83	---	---	Peak
5350.000	33.70	8.67	39.08	51.45	54.73	74.00	19.27	Peak
5367.600	33.81	8.68	39.08	56.54	59.95	74.00	14.05	Peak

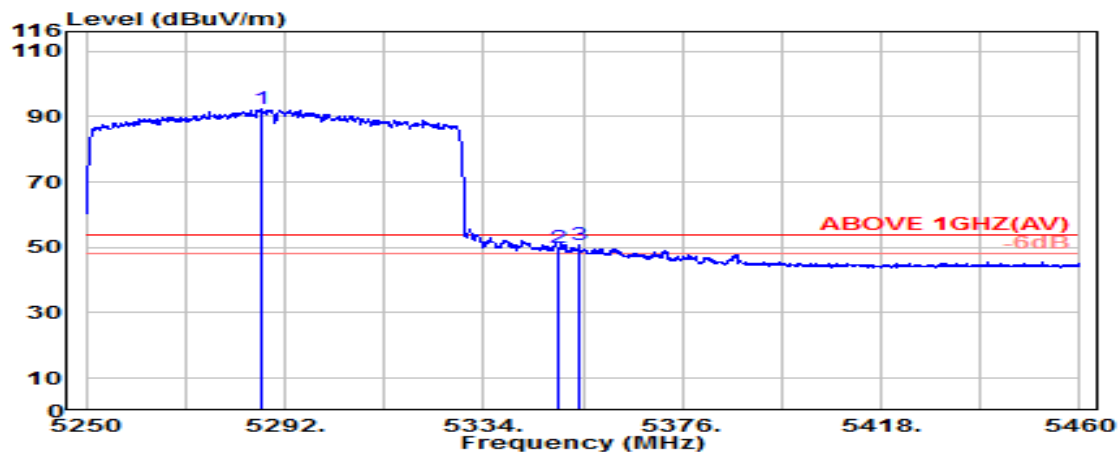

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.900	33.63	8.63	39.08	89.17	92.34	---	---	Average
5350.000	33.70	8.67	39.08	46.41	49.69	54.00	4.31	Average
5354.200	33.73	8.67	39.08	47.48	50.80	54.00	3.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

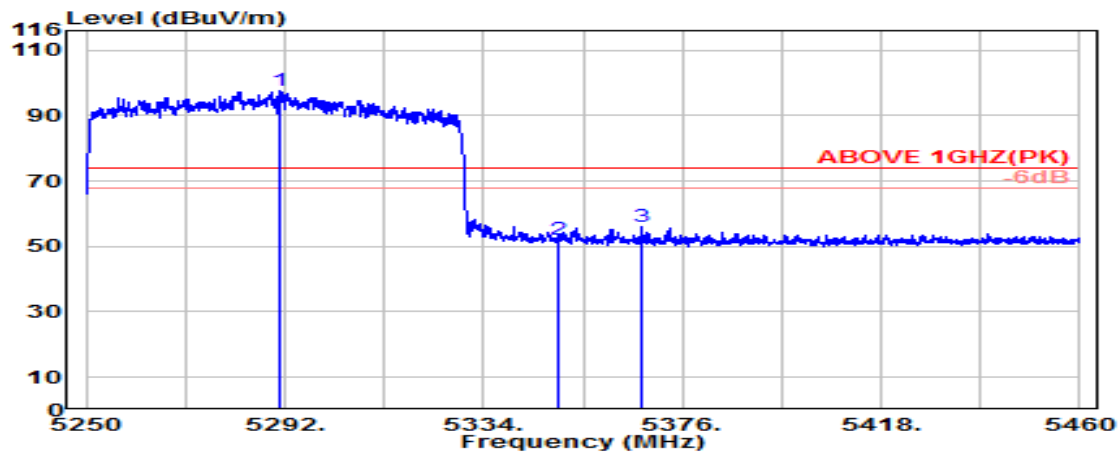

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5290.800	33.62	8.63	39.08	94.37	97.53	---	---	Peak
5350.000	33.70	8.67	39.08	48.78	52.06	74.00	21.94	Peak
5367.500	33.81	8.68	39.08	52.68	56.09	74.00	17.91	Peak

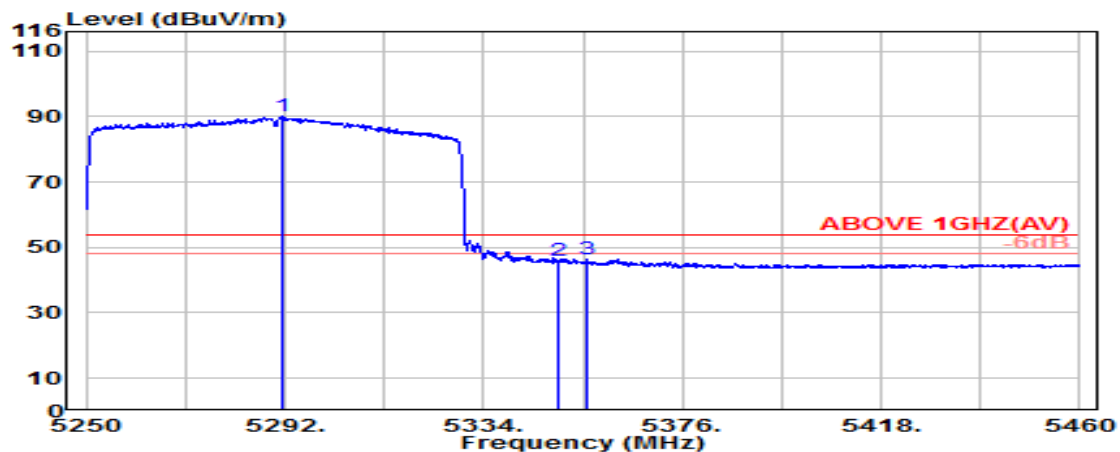

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5291.500	33.62	8.63	39.08	86.82	89.98	---	---	Average
5350.000	33.70	8.67	39.08	42.69	45.98	54.00	8.02	Average
5355.900	33.74	8.67	39.08	43.18	46.51	54.00	7.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

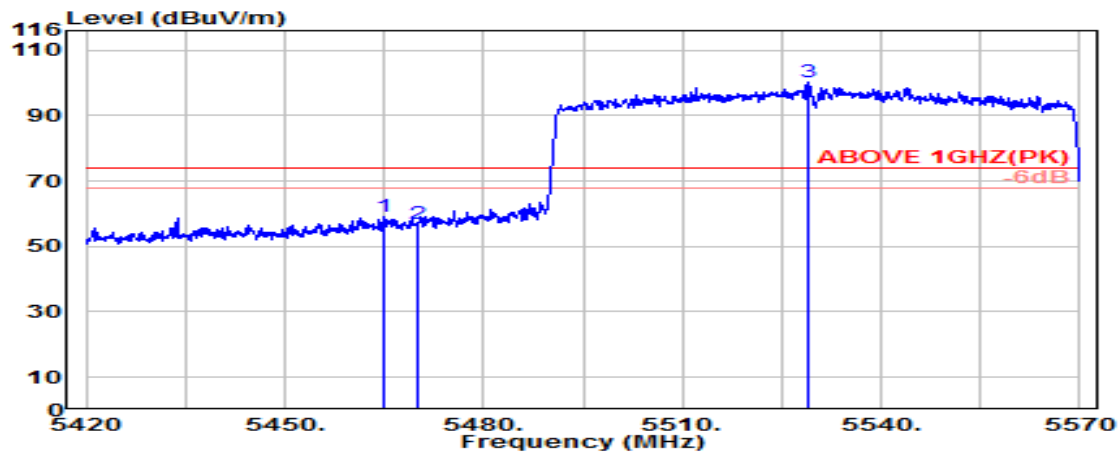

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.100	34.10	8.73	39.07	55.54	59.30	74.00	14.70	Peak
5470.000	34.10	8.74	39.07	53.29	57.05	74.00	16.95	Peak
@ 5529.000	34.04	8.77	39.08	96.40	100.13	---	---	Peak

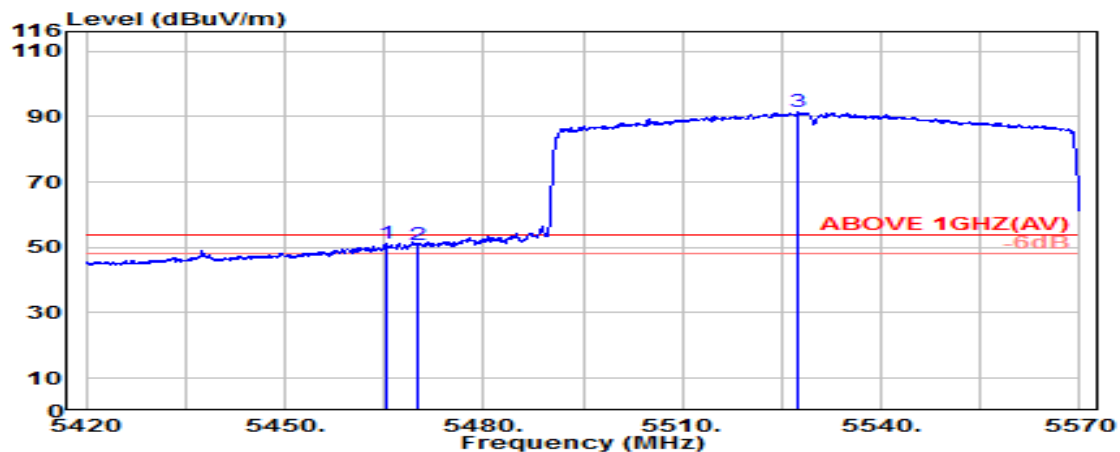

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.300	34.10	8.73	39.07	47.35	51.11	54.00	2.89	Average
5470.000	34.10	8.74	39.07	47.19	50.96	54.00	3.04	Average
@ 5527.600	34.04	8.77	39.08	87.91	91.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

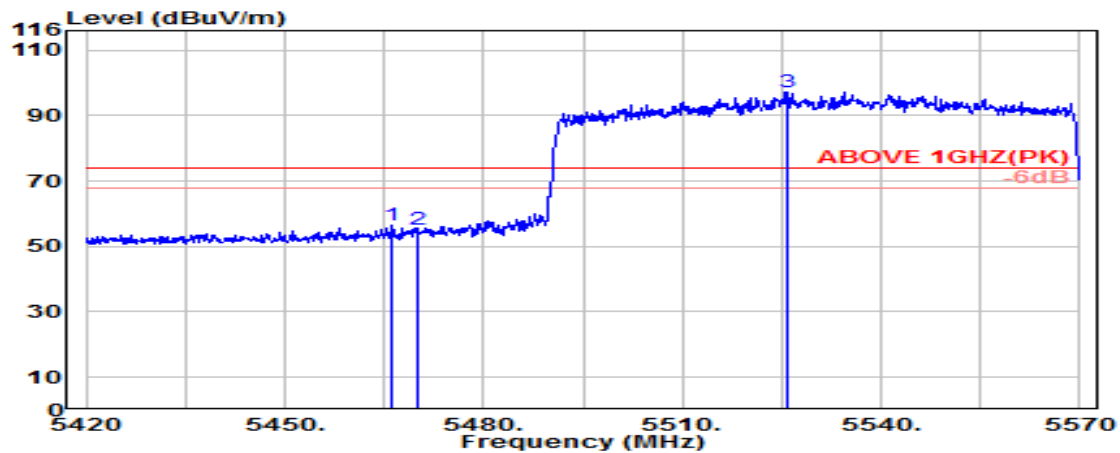

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.10	8.73	39.07	52.60	56.36	74.00	17.64	Peak
5470.000	34.10	8.74	39.07	51.61	55.37	74.00	18.63	Peak
@ 5525.700	34.05	8.77	39.08	93.51	97.25	---	---	Peak

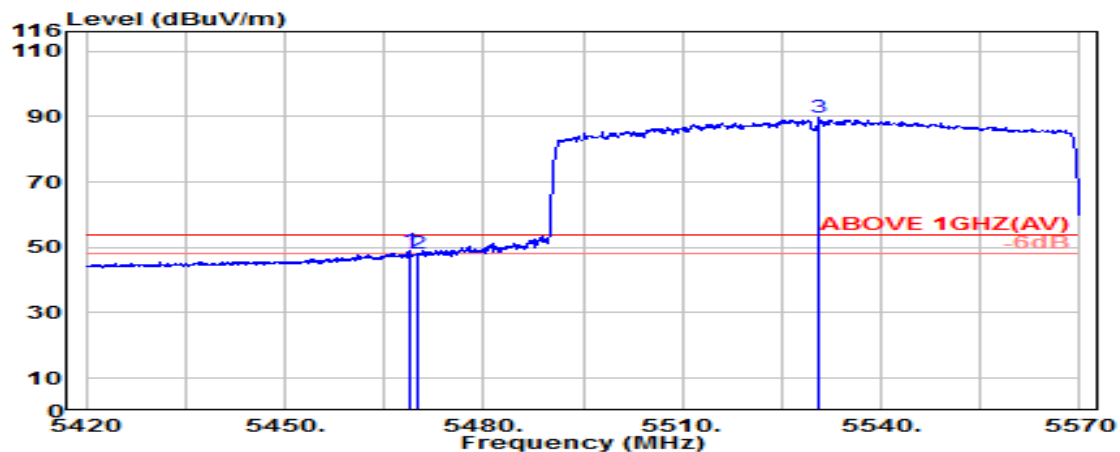

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.10	8.74	39.07	45.09	48.85	54.00	5.15	Average
5470.000	34.10	8.74	39.07	44.42	48.18	54.00	5.82	Average
@ 5530.700	34.04	8.77	39.08	85.87	89.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

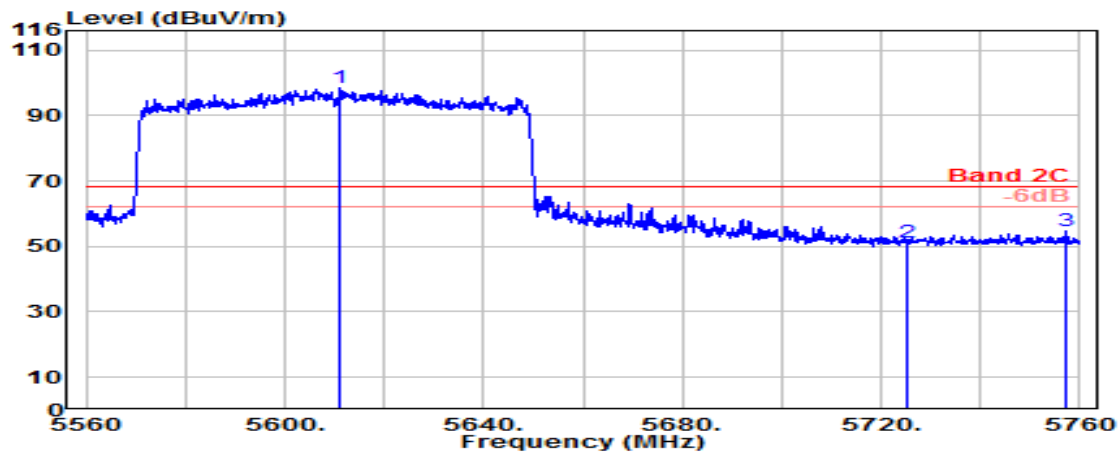

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5611.200	33.78	8.82	39.10	94.78	98.27	---	---	Peak
5725.000	33.60	8.88	39.14	47.93	51.28	68.20	16.92	Peak
5757.000	33.81	8.90	39.15	51.12	54.68	68.20	13.52	Peak

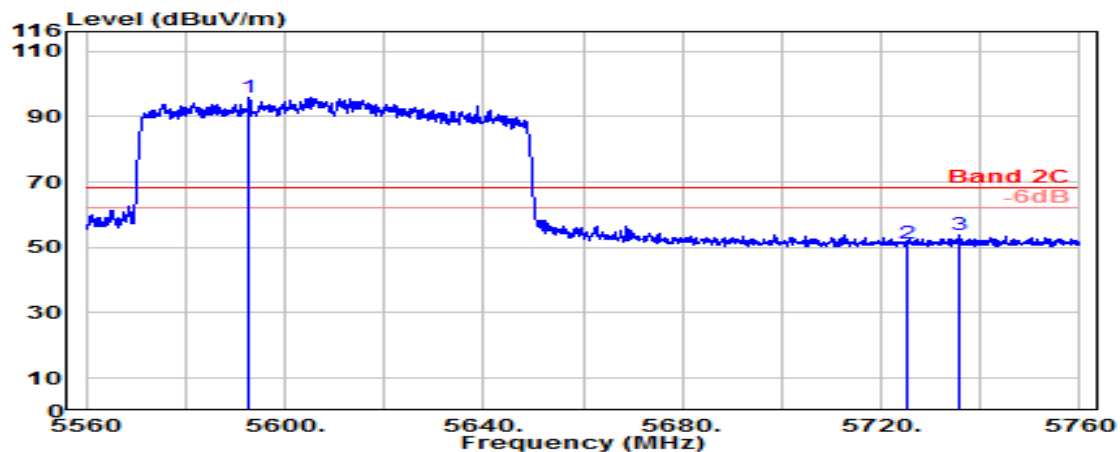

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.900	33.83	8.81	39.10	92.34	95.88	---	---	Peak
5725.000	33.60	8.88	39.14	47.73	51.08	68.20	17.12	Peak
5735.500	33.68	8.89	39.14	50.30	53.73	68.20	14.47	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

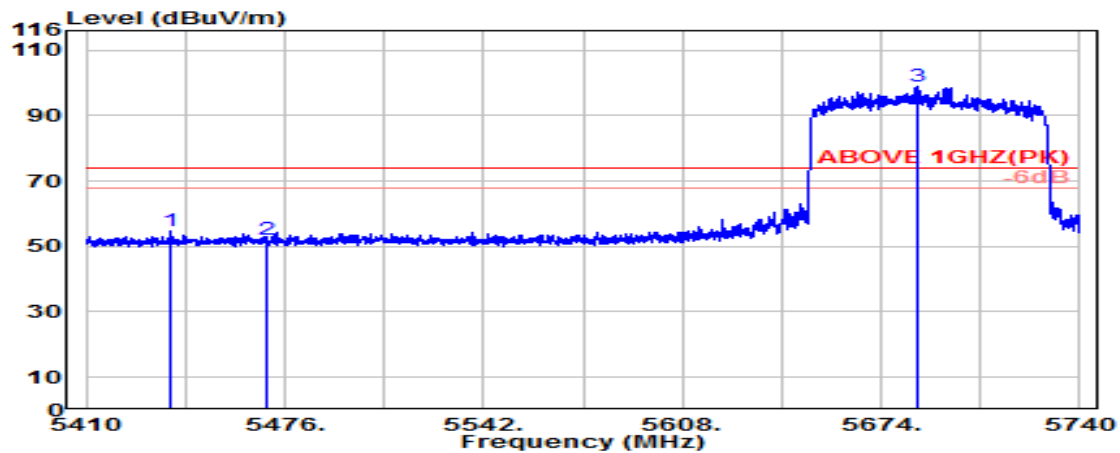

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.300	34.08	8.72	39.07	50.80	54.52	74.00	19.48	Peak
5470.000	34.10	8.74	39.07	48.49	52.25	74.00	21.75	Peak
@ 5685.700	33.49	8.86	39.13	95.54	98.76	---	---	Peak

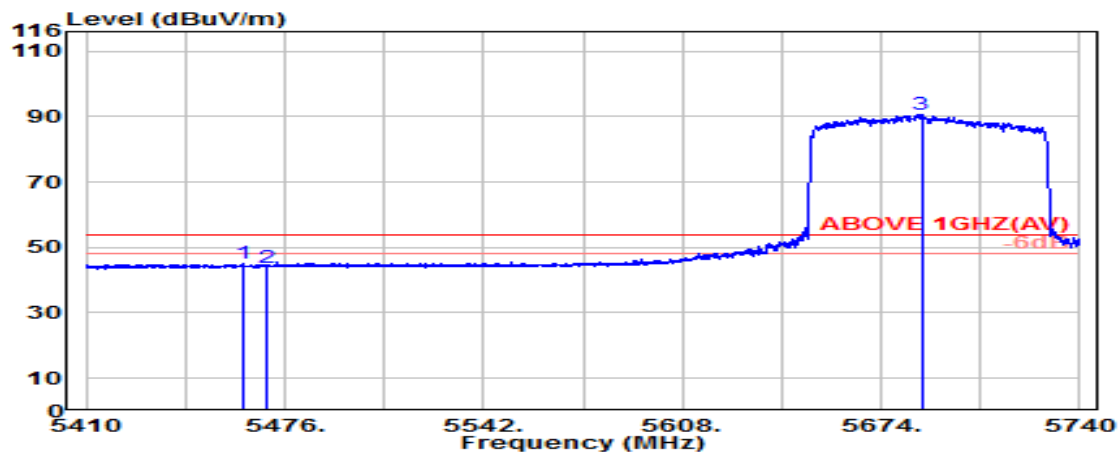

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.600	34.10	8.73	39.07	41.26	45.02	54.00	8.98	Average
5470.000	34.10	8.74	39.07	40.21	43.97	54.00	10.03	Average
@ 5687.400	33.48	8.86	39.13	87.57	90.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

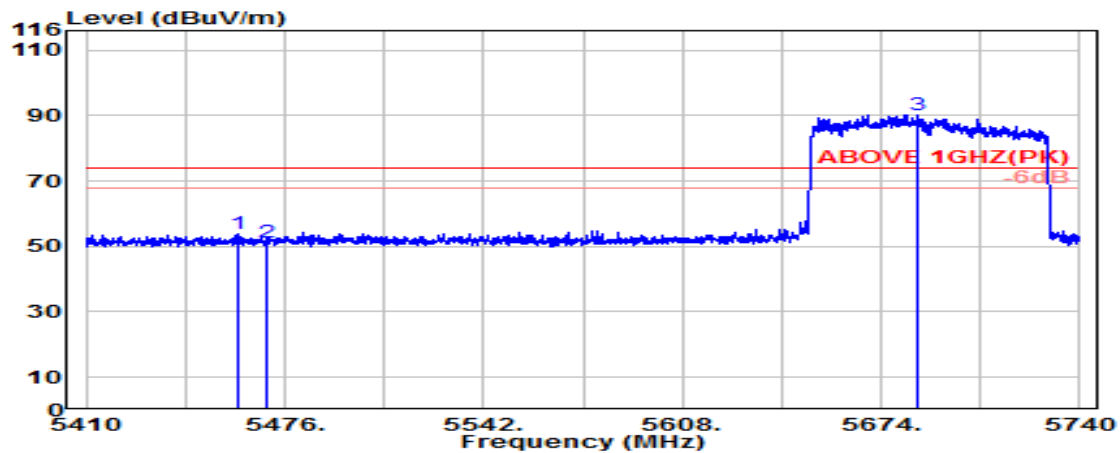

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.300	34.10	8.73	39.07	49.90	53.66	74.00	20.34	Peak
5470.000	34.10	8.74	39.07	47.29	51.05	74.00	22.95	Peak
@ 5686.100	33.48	8.86	39.13	87.08	90.29	---	---	Peak

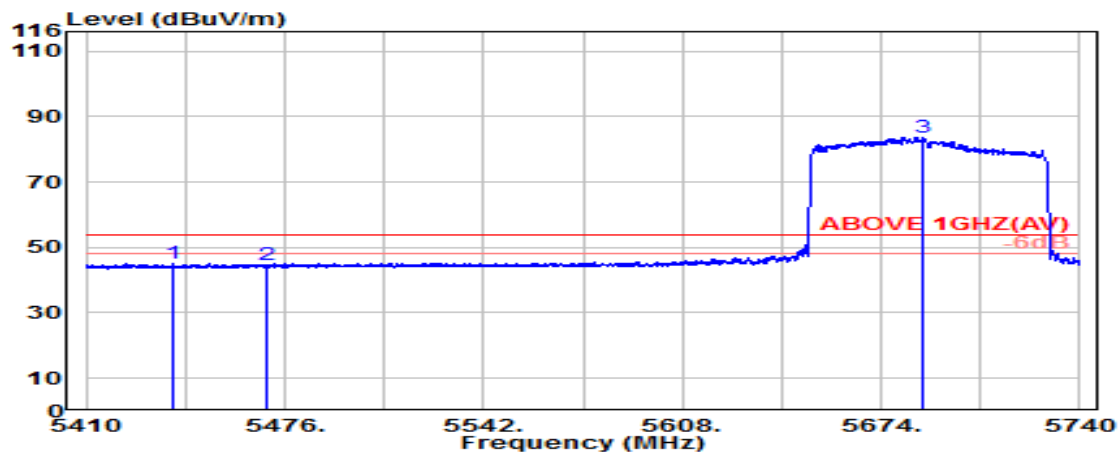

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.700	34.08	8.72	39.07	41.47	45.19	54.00	8.81	Average
5470.000	34.10	8.74	39.07	40.76	44.53	54.00	9.47	Average
@ 5687.700	33.47	8.86	39.13	80.51	83.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

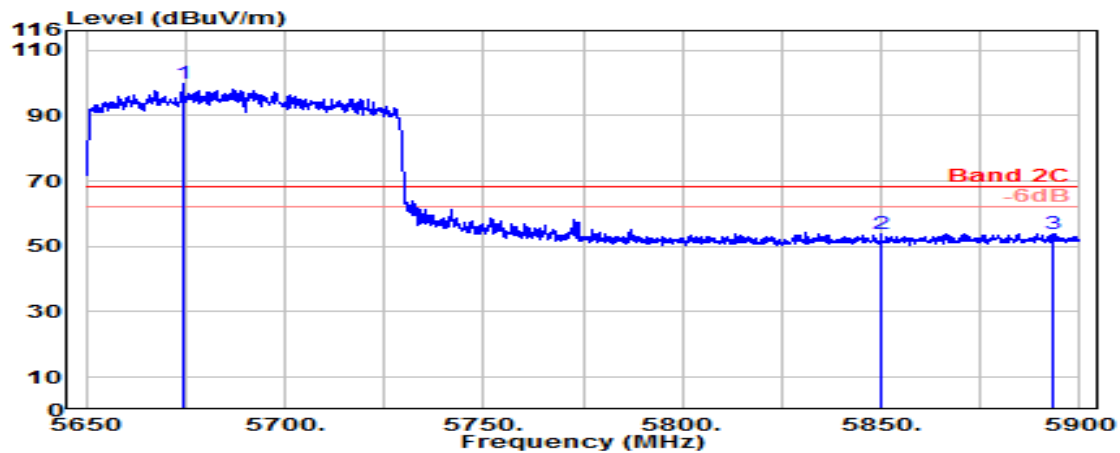

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.300	33.55	8.85	39.12	96.33	99.61	---	---	Peak
5850.000	33.90	8.95	39.18	50.36	54.03	68.20	14.17	Peak
5893.200	34.16	8.97	39.19	50.09	54.03	68.20	14.17	Peak

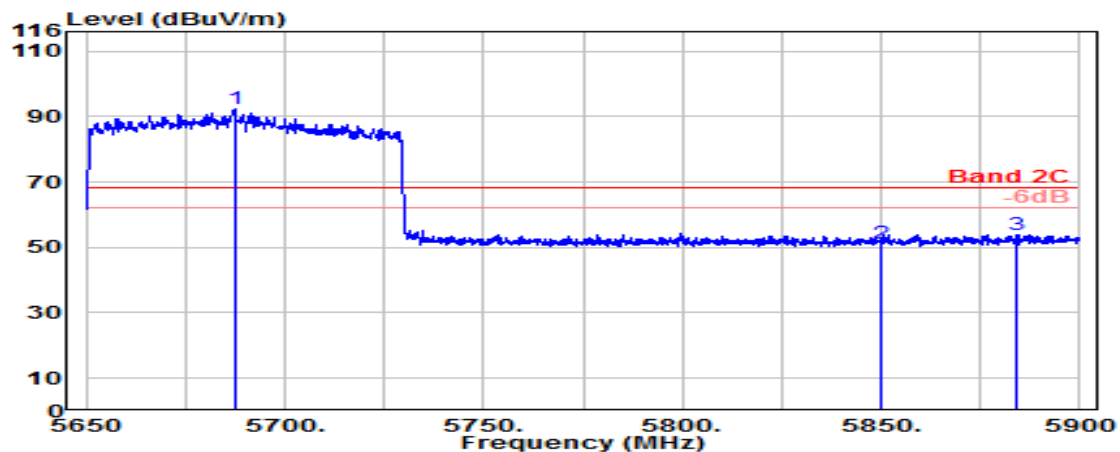

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5687.600	33.47	8.86	39.13	89.05	92.26	---	---	Peak
5850.000	33.90	8.95	39.18	47.59	51.26	68.20	16.94	Peak
5884.300	34.11	8.97	39.19	50.13	54.02	68.20	14.18	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

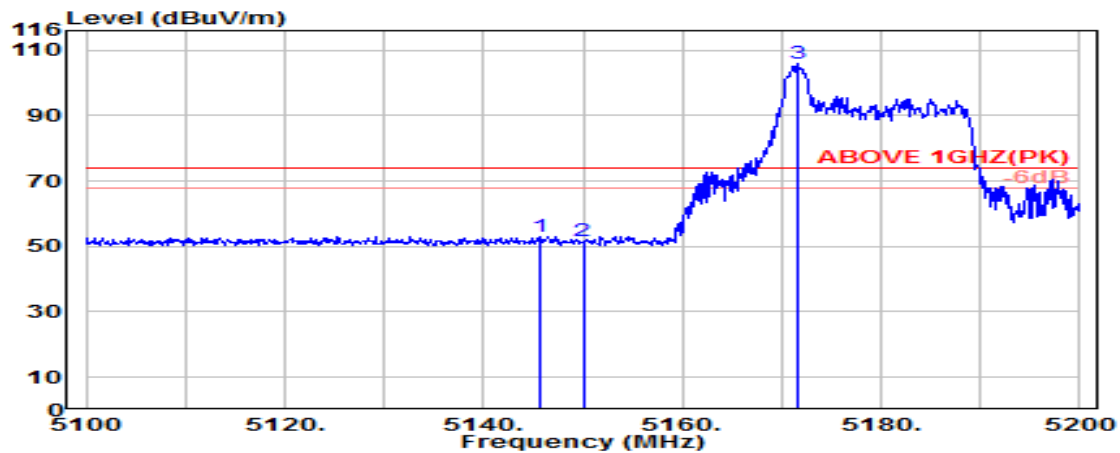

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.59	8.54	39.09	50.13	53.17	74.00	20.83	Peak
5150.000	33.60	8.54	39.09	48.73	51.78	74.00	22.22	Peak
@ 5171.500	33.60	8.56	39.09	102.81	105.88	---	---	Peak

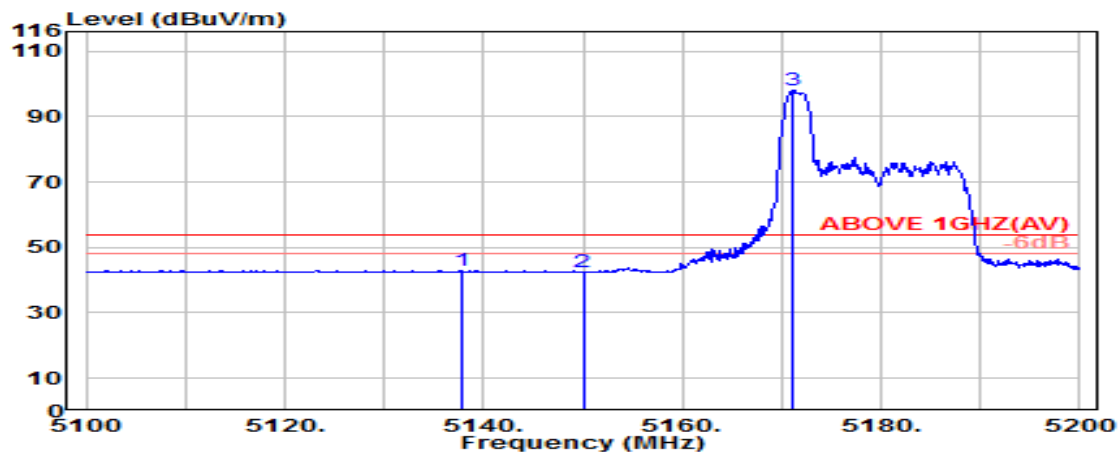

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.800	33.58	8.54	39.09	39.81	42.83	54.00	11.17	Average
5150.000	33.60	8.54	39.09	39.38	42.44	54.00	11.56	Average
@ 5171.100	33.60	8.56	39.09	94.84	97.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

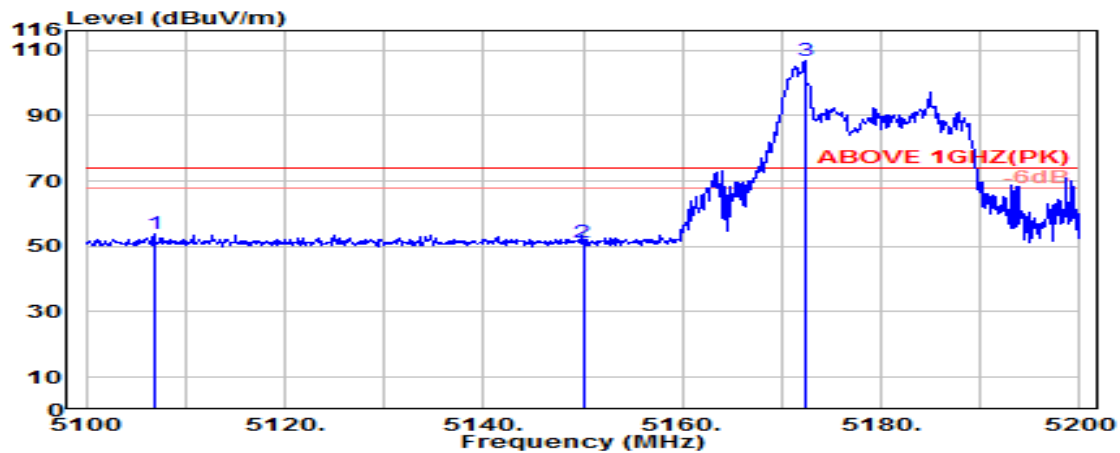

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.800	33.51	8.52	39.09	50.84	53.78	74.00	20.22	Peak
5150.000	33.60	8.54	39.09	48.29	51.34	74.00	22.66	Peak
@ 5172.300	33.60	8.56	39.09	103.62	106.68	---	---	Peak

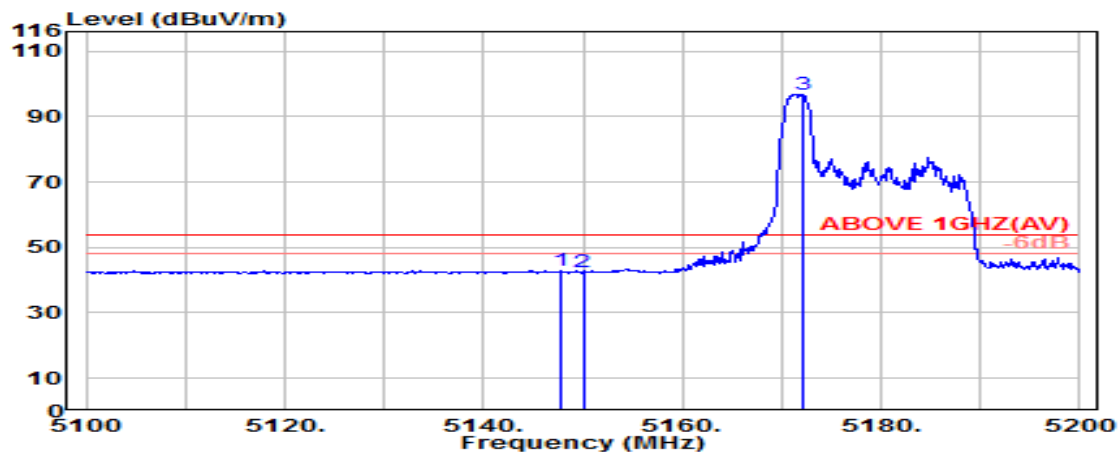

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	33.60	8.54	39.09	39.72	42.77	54.00	11.23	Average
5150.000	33.60	8.54	39.09	39.26	42.31	54.00	11.69	Average
@ 5172.100	33.60	8.56	39.09	93.82	96.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

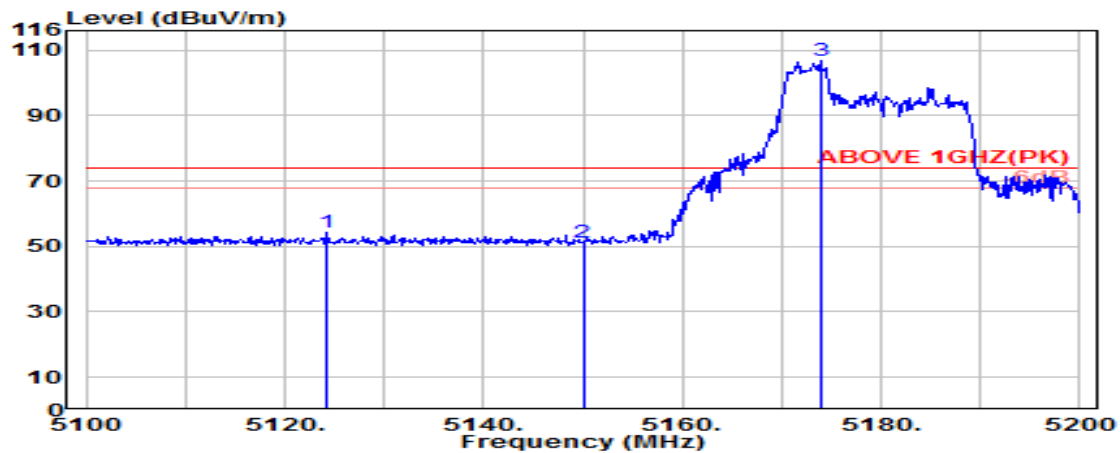

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.300	33.55	8.53	39.09	51.22	54.20	74.00	19.80	Peak
5150.000	33.60	8.54	39.09	48.32	51.37	74.00	22.63	Peak
@ 5173.900	33.60	8.56	39.09	103.78	106.85	---	---	Peak

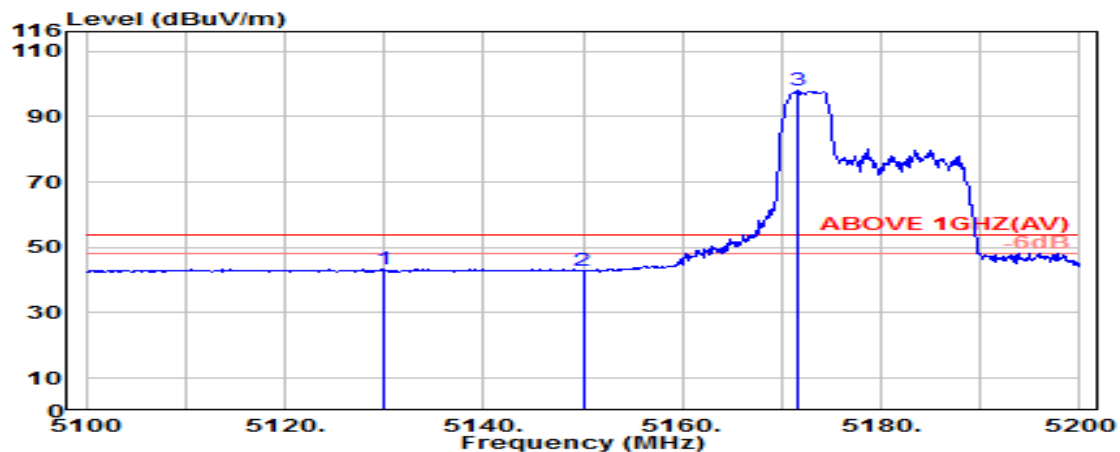

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.900	33.56	8.53	39.09	40.37	43.37	54.00	10.63	Average
5150.000	33.60	8.54	39.09	39.71	42.77	54.00	11.23	Average
@ 5171.600	33.60	8.56	39.09	94.80	97.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

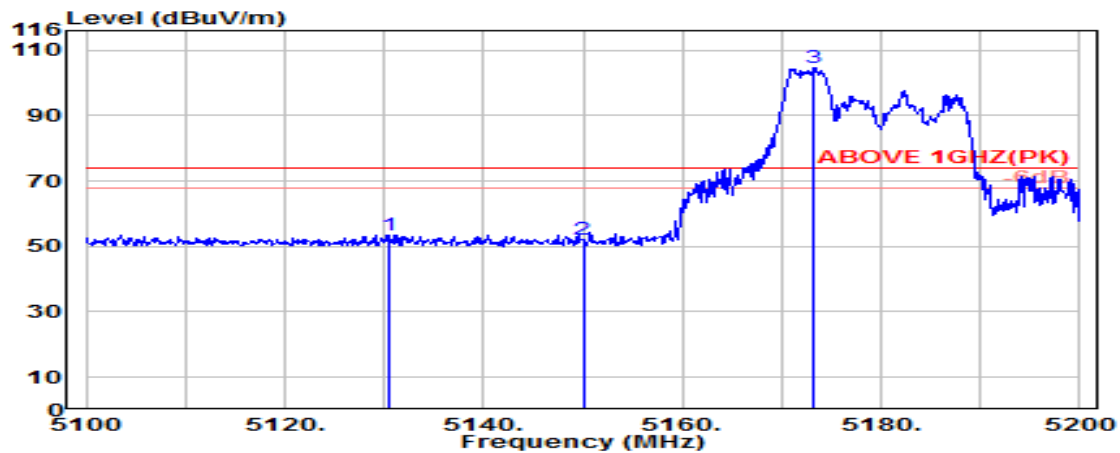

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.400	33.56	8.53	39.09	50.45	53.45	74.00	20.55	Peak
5150.000	33.60	8.54	39.09	48.94	51.99	74.00	22.01	Peak
@ 5173.300	33.60	8.56	39.09	101.59	104.66	---	---	Peak

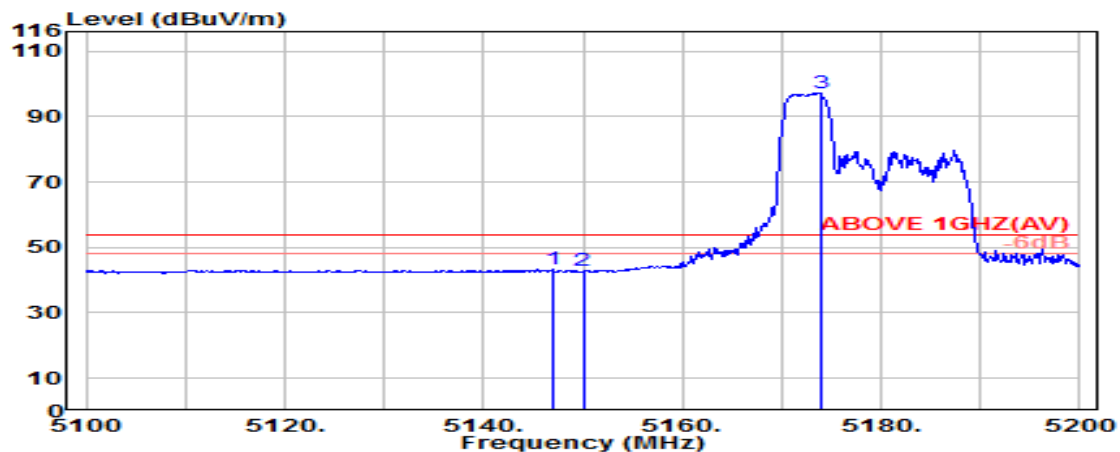

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.59	8.54	39.09	40.27	43.32	54.00	10.68	Average
5150.000	33.60	8.54	39.09	39.71	42.76	54.00	11.24	Average
@ 5173.900	33.60	8.56	39.09	94.13	97.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

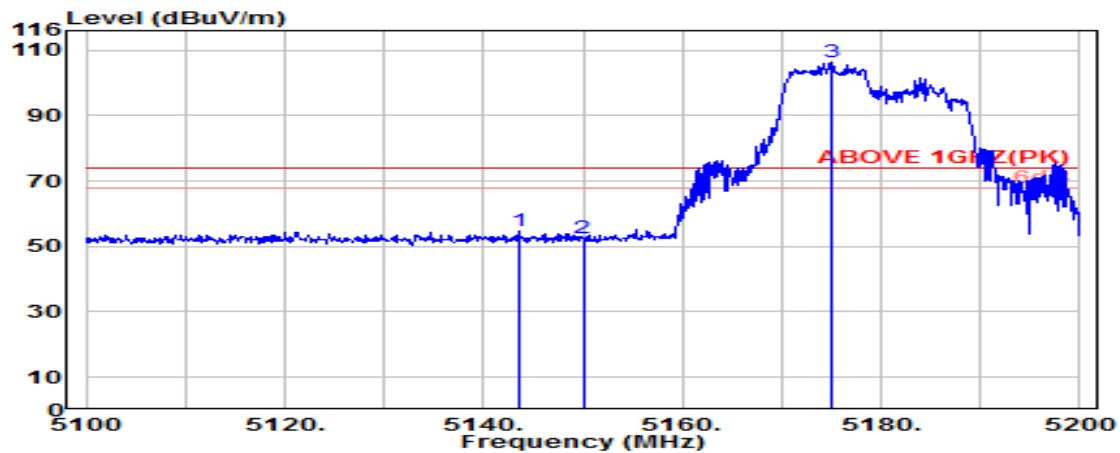

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.600	33.59	8.54	39.09	51.52	54.55	74.00	19.45	Peak
5150.000	33.60	8.54	39.09	49.46	52.51	74.00	21.49	Peak
@ 5175.100	33.60	8.56	39.09	103.20	106.27	---	---	Peak

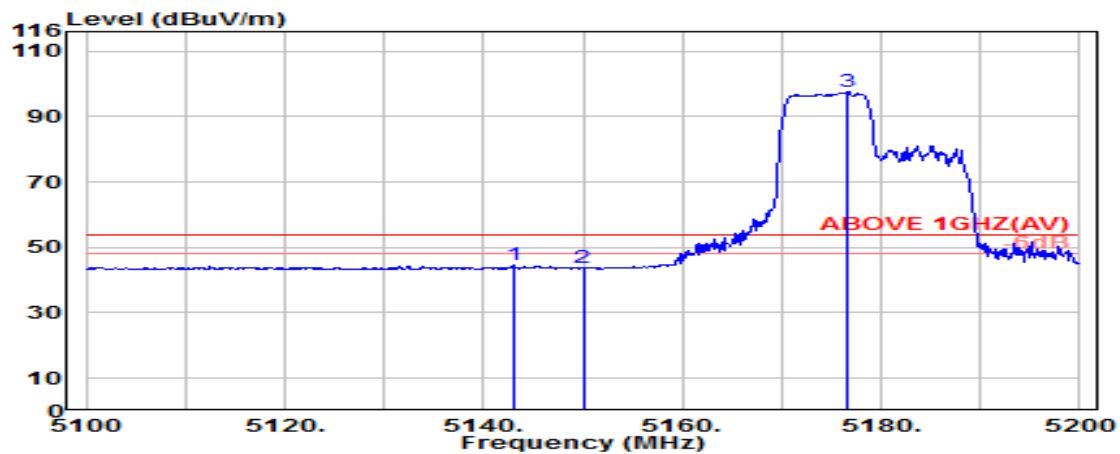

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.000	33.59	8.54	39.09	41.40	44.44	54.00	9.56	Average
5150.000	33.60	8.54	39.09	40.77	43.83	54.00	10.17	Average
@ 5176.500	33.60	8.56	39.09	94.36	97.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

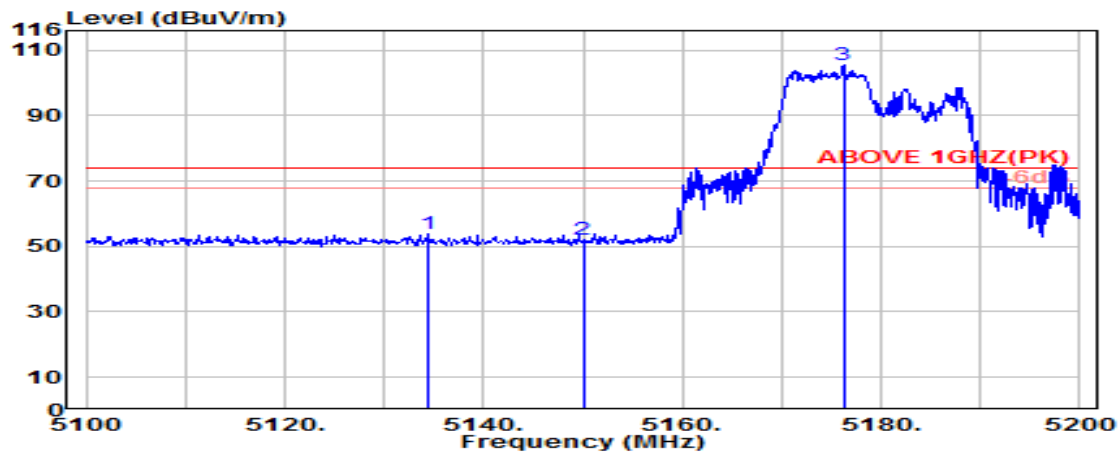

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.300	33.57	8.53	39.09	50.84	53.85	74.00	20.15	Peak
5150.000	33.60	8.54	39.09	49.07	52.12	74.00	21.88	Peak
@ 5176.200	33.60	8.56	39.09	102.25	105.32	---	---	Peak

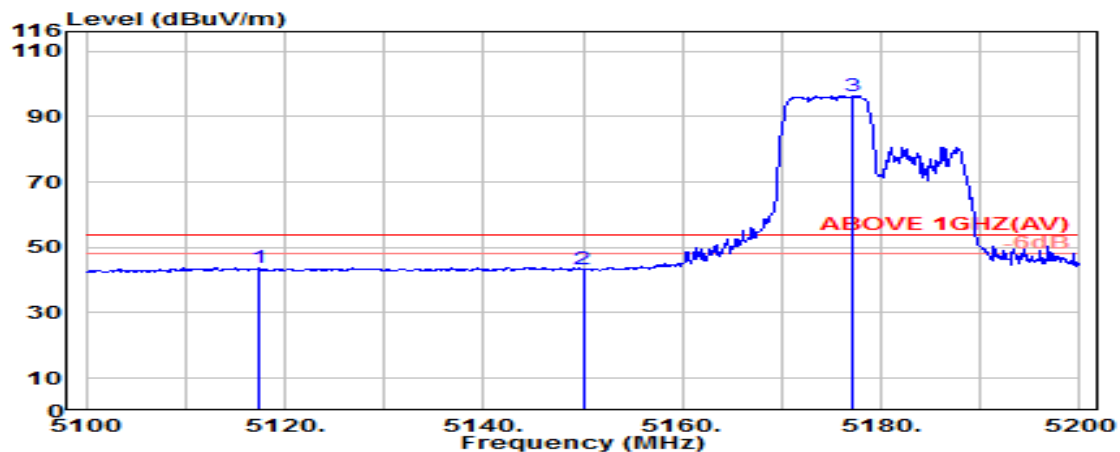

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.300	33.53	8.52	39.09	40.74	43.71	54.00	10.29	Average
5150.000	33.60	8.54	39.09	40.39	43.44	54.00	10.56	Average
@ 5177.200	33.60	8.56	39.09	93.40	96.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

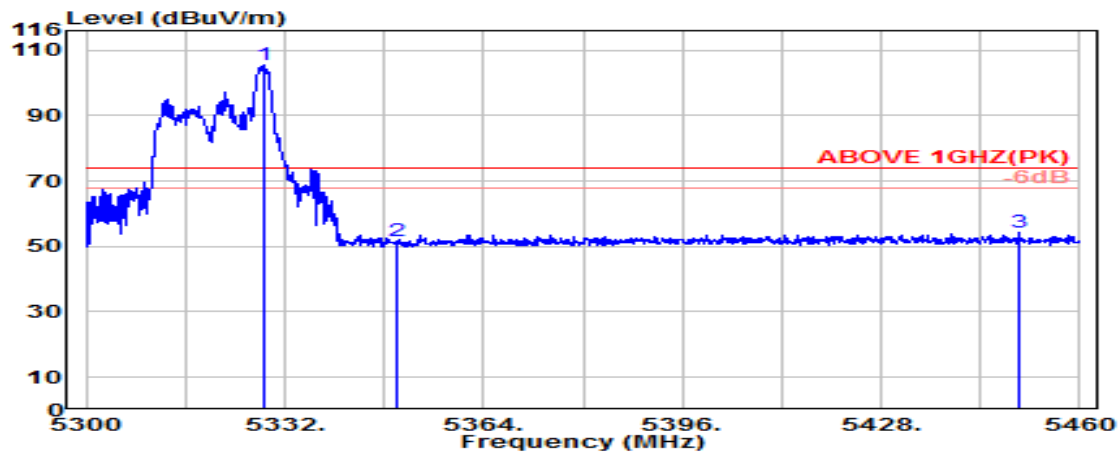

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.66	8.65	39.08	102.48	105.71	---	---	Peak
5350.000	33.70	8.67	39.08	48.37	51.66	74.00	22.34	Peak
5450.100	34.10	8.72	39.07	50.50	54.25	74.00	19.75	Peak

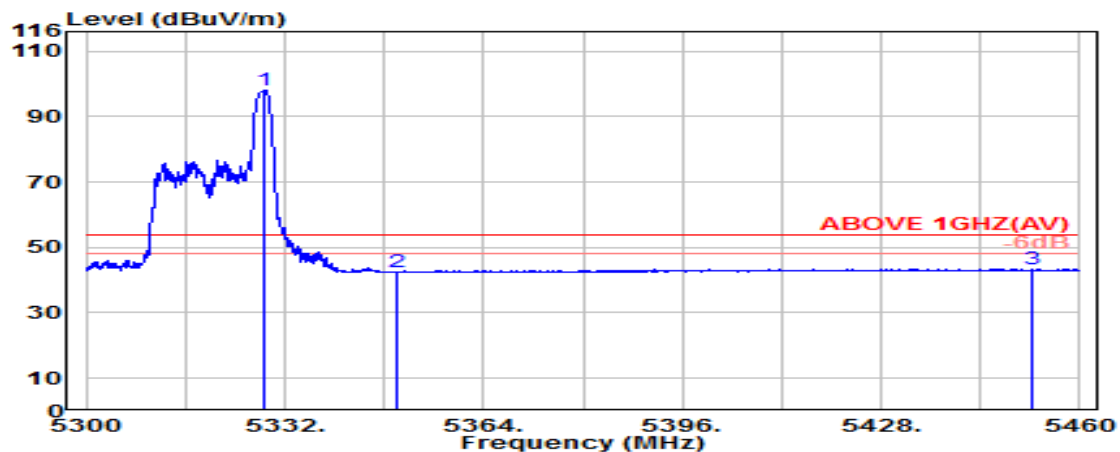

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	33.66	8.65	39.08	94.95	98.18	---	---	Average
5350.000	33.70	8.67	39.08	39.08	42.37	54.00	11.63	Average
5452.300	34.10	8.73	39.07	39.59	43.34	54.00	10.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

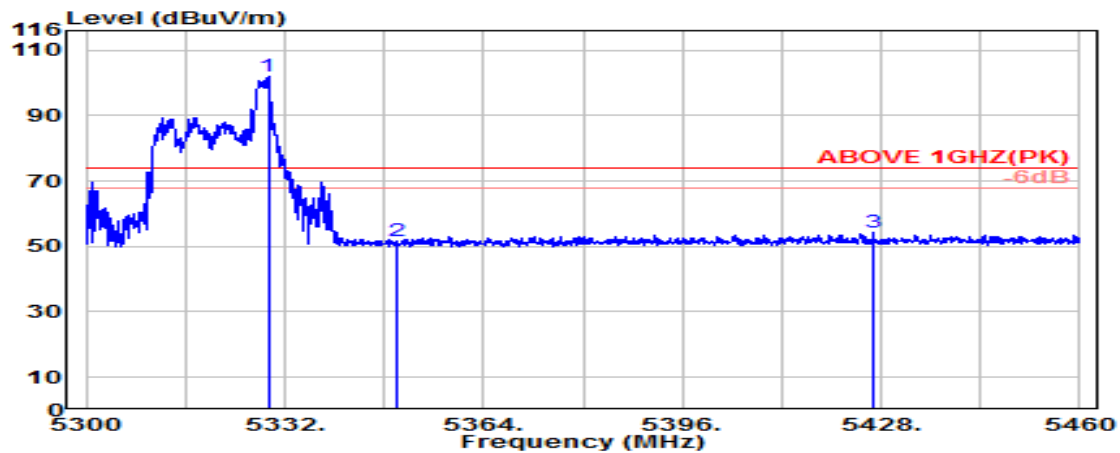

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5329.300	33.66	8.65	39.08	98.71	101.94	---	---	Peak
5350.000	33.70	8.67	39.08	48.15	51.44	74.00	22.56	Peak
5426.800	34.05	8.71	39.07	50.38	54.07	74.00	19.93	Peak

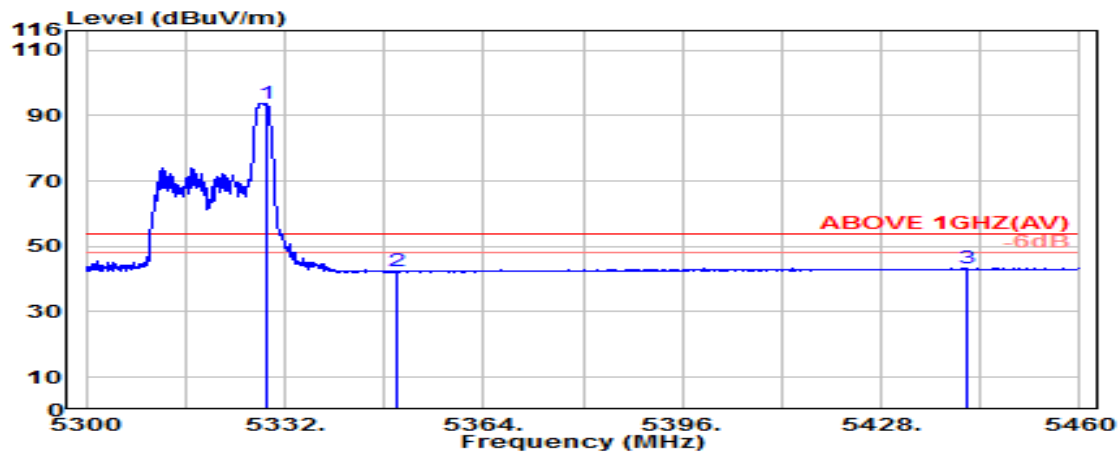

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.900	33.66	8.65	39.08	90.53	93.76	---	---	Average
5350.000	33.70	8.67	39.08	39.28	42.56	54.00	11.44	Average
5441.700	34.08	8.72	39.07	39.54	43.27	54.00	10.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

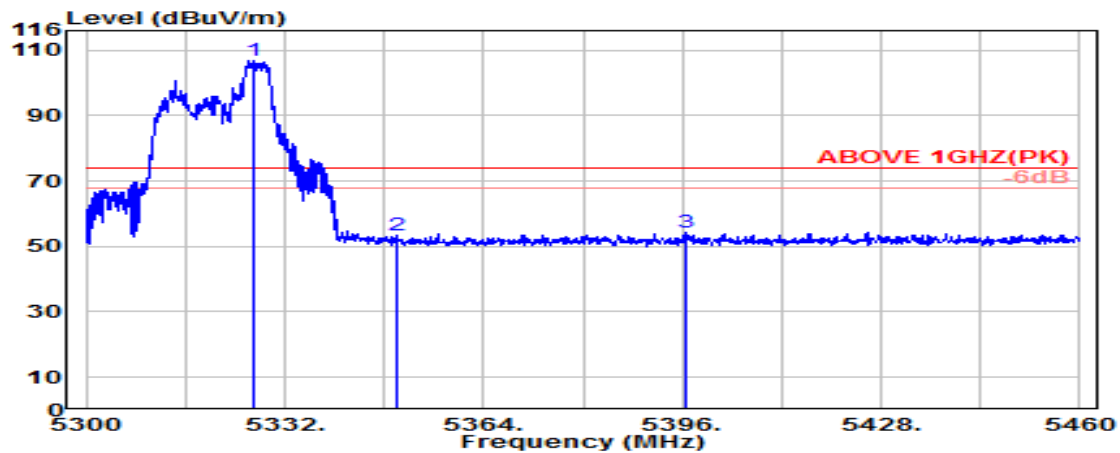

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.65	8.65	39.08	103.62	106.85	---	---	Peak
5350.000	33.70	8.67	39.08	50.00	53.28	74.00	20.72	Peak
5396.400	33.98	8.69	39.08	50.55	54.14	74.00	19.86	Peak

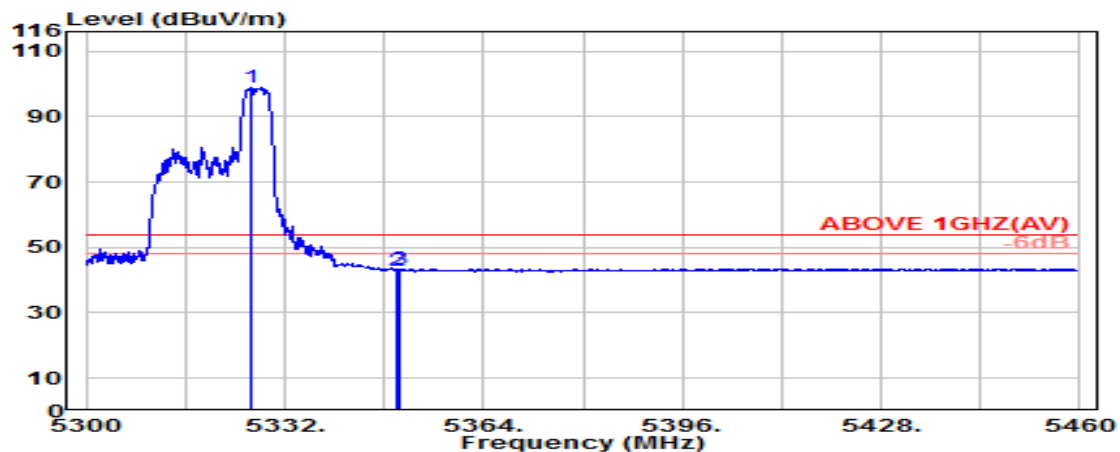

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.600	33.65	8.65	39.08	95.70	98.92	---	---	Average
5350.000	33.70	8.67	39.08	39.77	43.05	54.00	10.95	Average
5350.500	33.70	8.67	39.08	40.26	43.55	54.00	10.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

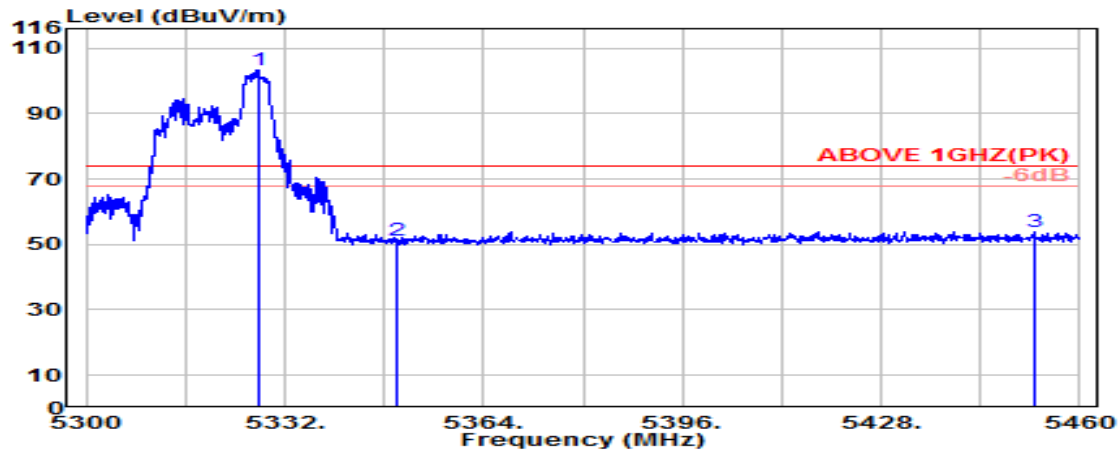

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.700	33.66	8.65	39.08	100.00	103.22	---	---	Peak
5350.000	33.70	8.67	39.08	47.75	51.03	74.00	22.97	Peak
5452.800	34.10	8.73	39.07	50.28	54.03	74.00	19.97	Peak

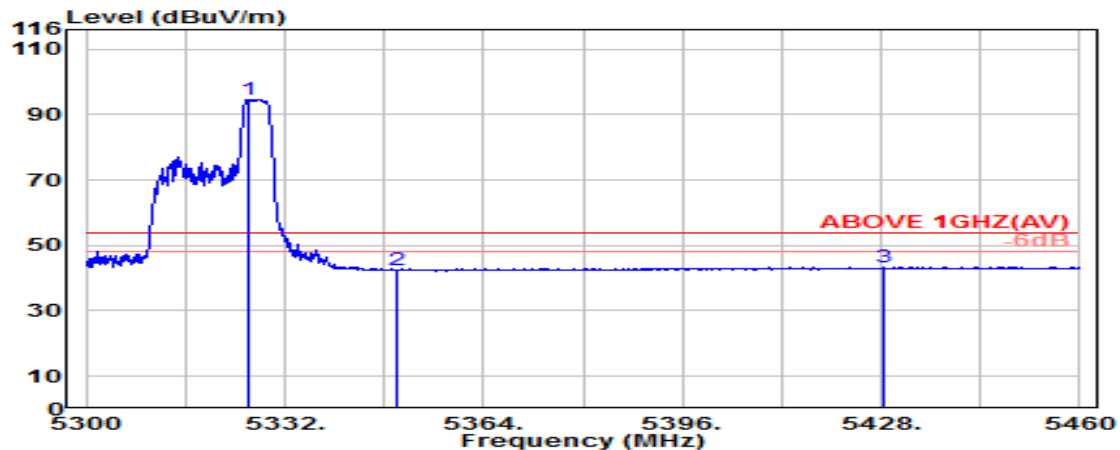

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.300	33.65	8.65	39.08	91.54	94.77	---	---	Average
5350.000	33.70	8.67	39.08	39.14	42.43	54.00	11.57	Average
5428.600	34.06	8.71	39.07	39.61	43.31	54.00	10.69	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

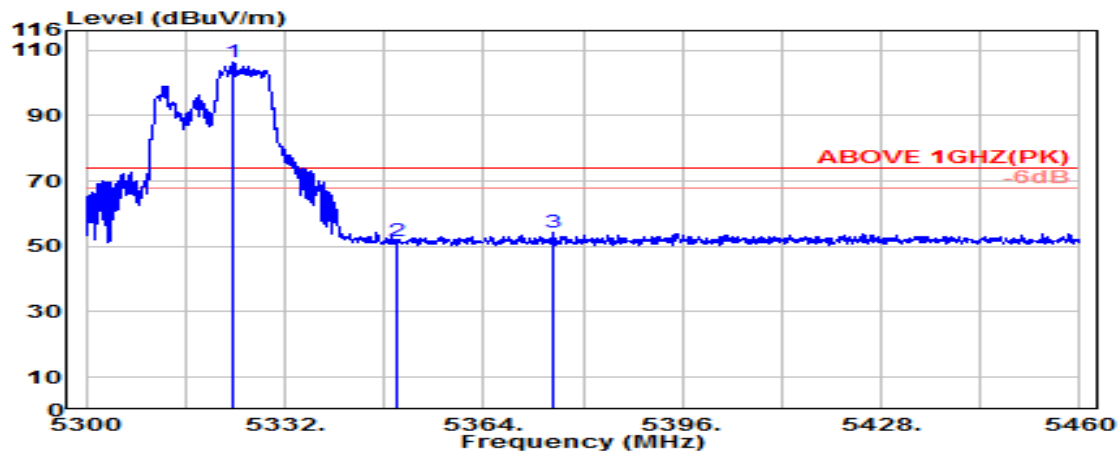

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	33.65	8.65	39.08	102.97	106.19	---	---	Peak
5350.000	33.70	8.67	39.08	48.32	51.61	74.00	22.39	Peak
5375.100	33.85	8.68	39.08	50.77	54.22	74.00	19.78	Peak

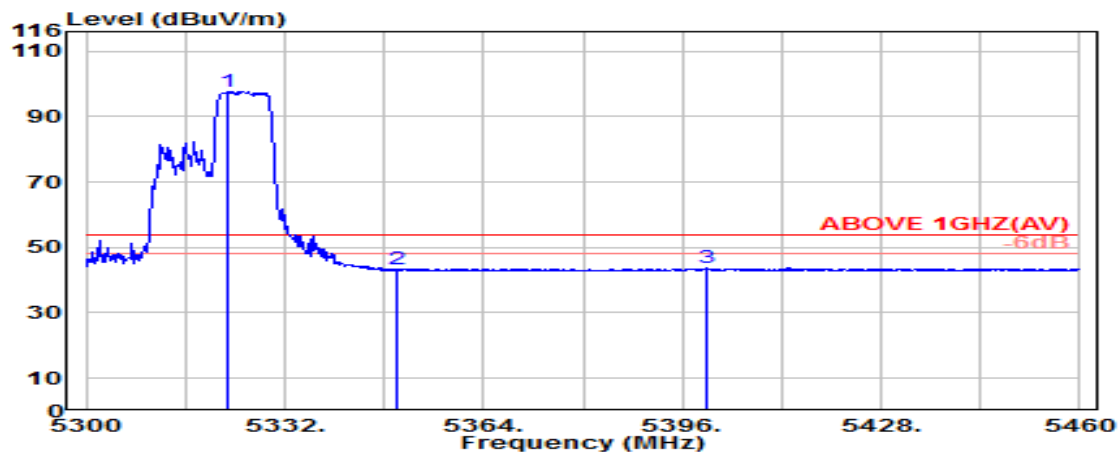

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	33.65	8.65	39.08	94.51	97.72	---	---	Average
5350.000	33.70	8.67	39.08	39.86	43.15	54.00	10.85	Average
5399.800	34.00	8.69	39.08	40.06	43.68	54.00	10.32	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

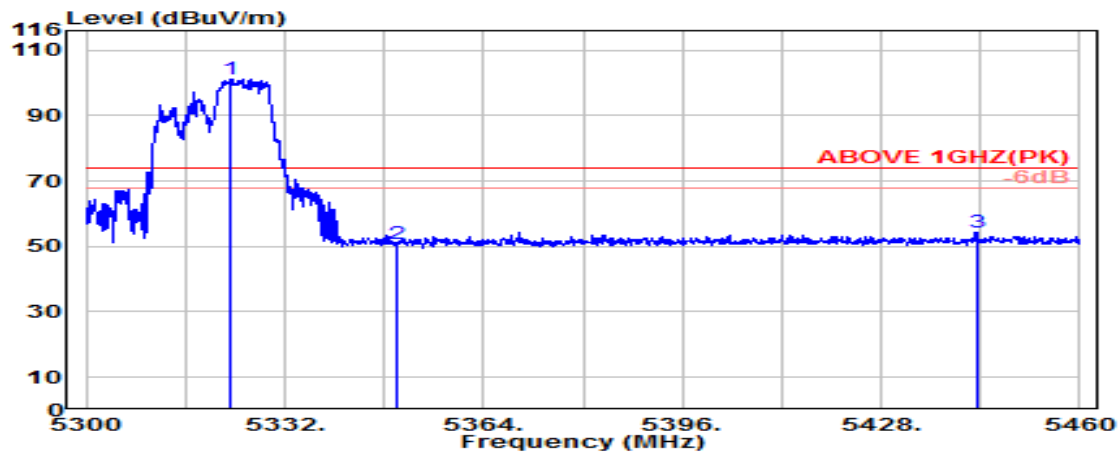

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	33.65	8.65	39.08	98.03	101.25	---	---	Peak
5350.000	33.70	8.67	39.08	47.50	50.78	74.00	23.22	Peak
5443.500	34.09	8.72	39.07	50.62	54.35	74.00	19.65	Peak

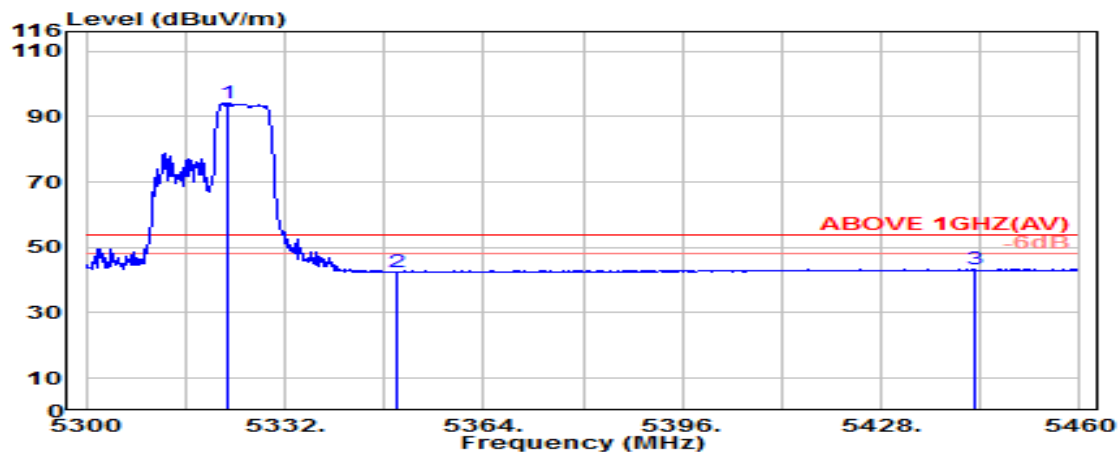

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	33.65	8.65	39.08	90.78	93.99	---	---	Average
5350.000	33.70	8.67	39.08	39.10	42.38	54.00	11.62	Average
5442.900	34.09	8.72	39.07	39.57	43.30	54.00	10.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

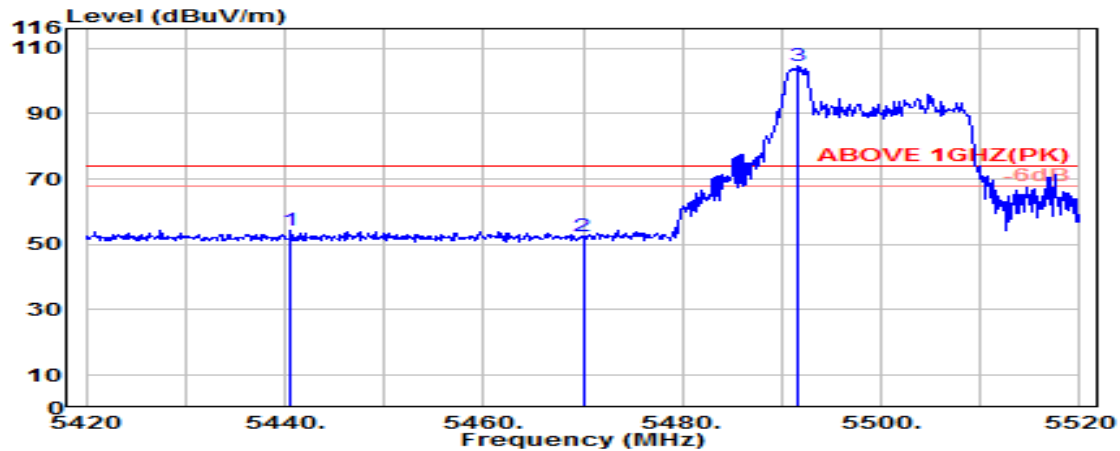

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.500	34.08	8.72	39.07	50.68	54.40	74.00	19.60	Peak
5470.000	34.10	8.74	39.07	48.87	52.63	74.00	21.37	Peak
@ 5491.700	34.10	8.75	39.07	100.81	104.58	---	---	Peak

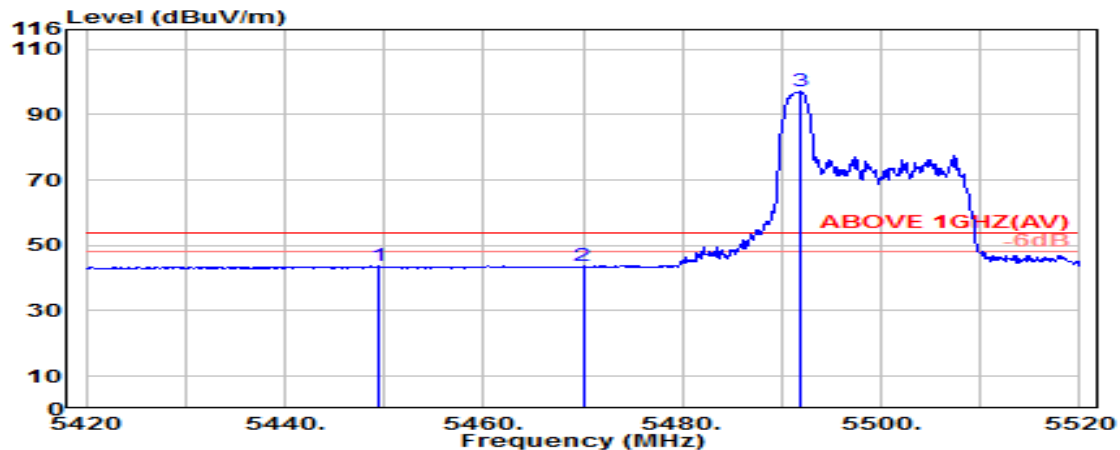

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.400	34.10	8.72	39.07	40.10	43.85	54.00	10.15	Average
5470.000	34.10	8.74	39.07	39.92	43.68	54.00	10.32	Average
@ 5491.800	34.10	8.75	39.07	93.19	96.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

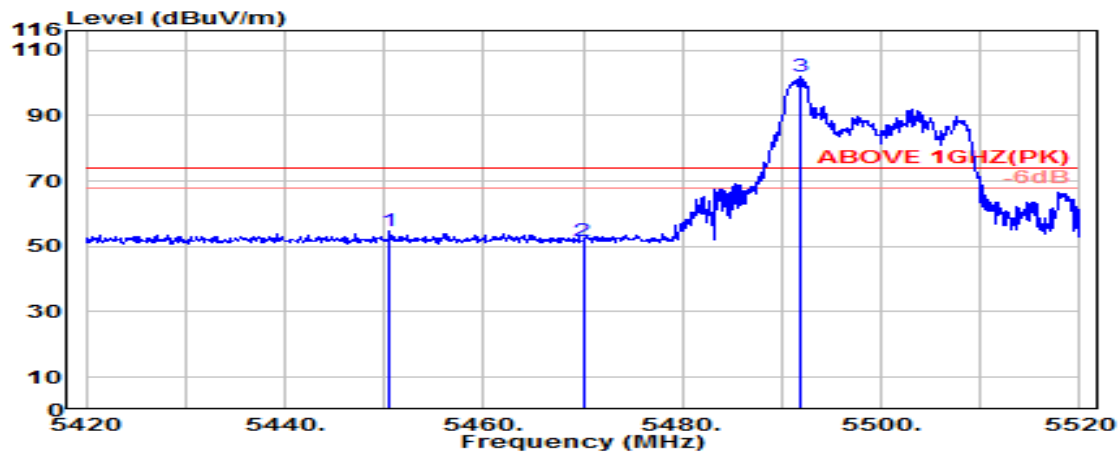

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.600	34.10	8.72	39.07	51.17	54.92	74.00	19.08	Peak
5470.000	34.10	8.74	39.07	47.91	51.68	74.00	22.32	Peak
@ 5491.800	34.10	8.75	39.07	98.29	102.07	---	---	Peak

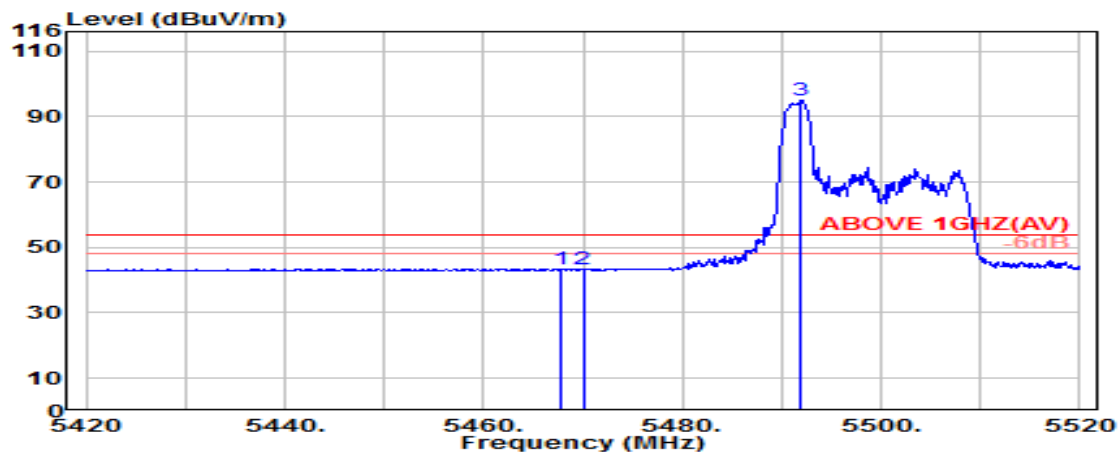

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.10	8.73	39.07	39.68	43.44	54.00	10.56	Average
5470.000	34.10	8.74	39.07	39.37	43.13	54.00	10.87	Average
@ 5492.000	34.10	8.75	39.07	91.17	94.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

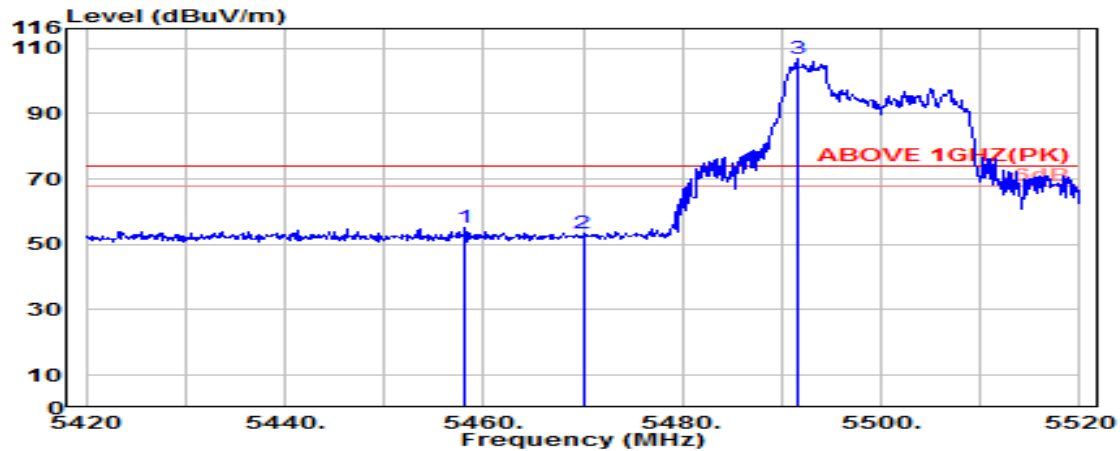

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.200	34.10	8.73	39.07	51.34	55.09	74.00	18.91	Peak
5470.000	34.10	8.74	39.07	49.48	53.24	74.00	20.76	Peak
@ 5491.600	34.10	8.75	39.07	102.90	106.67	---	---	Peak

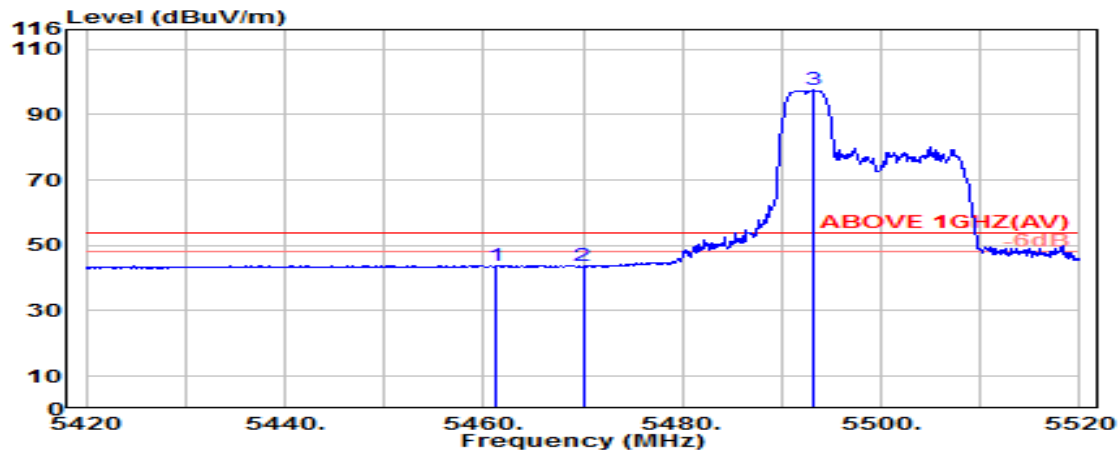

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.300	34.10	8.73	39.07	40.14	43.90	54.00	10.10	Average
5470.000	34.10	8.74	39.07	39.90	43.67	54.00	10.33	Average
@ 5493.200	34.10	8.75	39.07	93.63	97.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

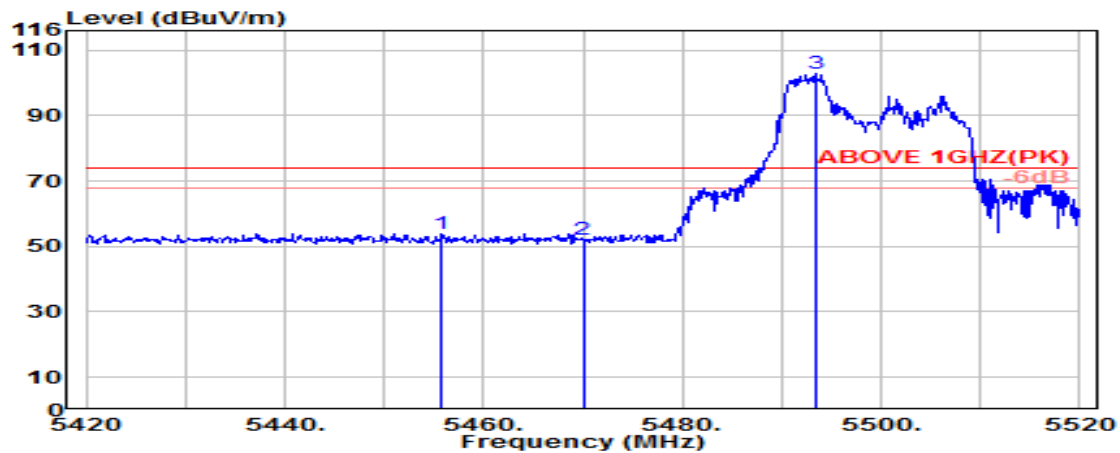

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.800	34.10	8.73	39.07	50.13	53.89	74.00	20.11	Peak
5470.000	34.10	8.74	39.07	48.11	51.88	74.00	22.12	Peak
@ 5493.400	34.10	8.75	39.07	98.92	102.70	---	---	Peak

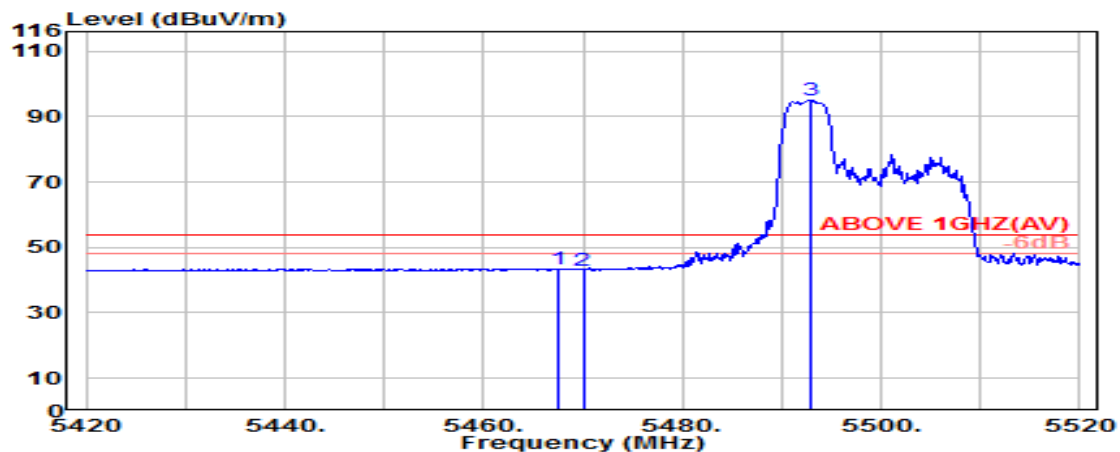

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.10	8.73	39.07	39.76	43.52	54.00	10.48	Average
5470.000	34.10	8.74	39.07	39.32	43.08	54.00	10.92	Average
@ 5493.000	34.10	8.75	39.07	91.26	95.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

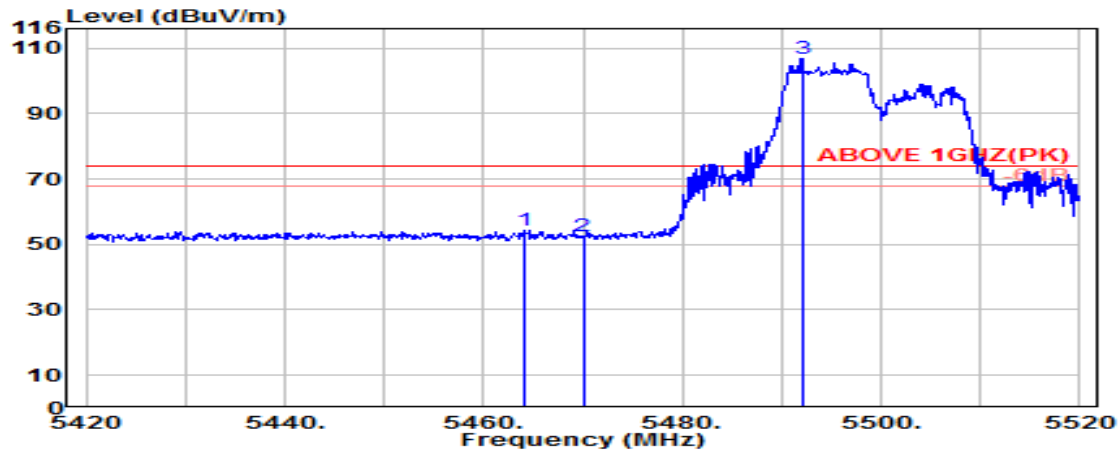

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.200	34.10	8.73	39.07	50.69	54.45	74.00	19.55	Peak
5470.000	34.10	8.74	39.07	48.76	52.52	74.00	21.48	Peak
@ 5492.100	34.10	8.75	39.07	102.95	106.73	---	---	Peak

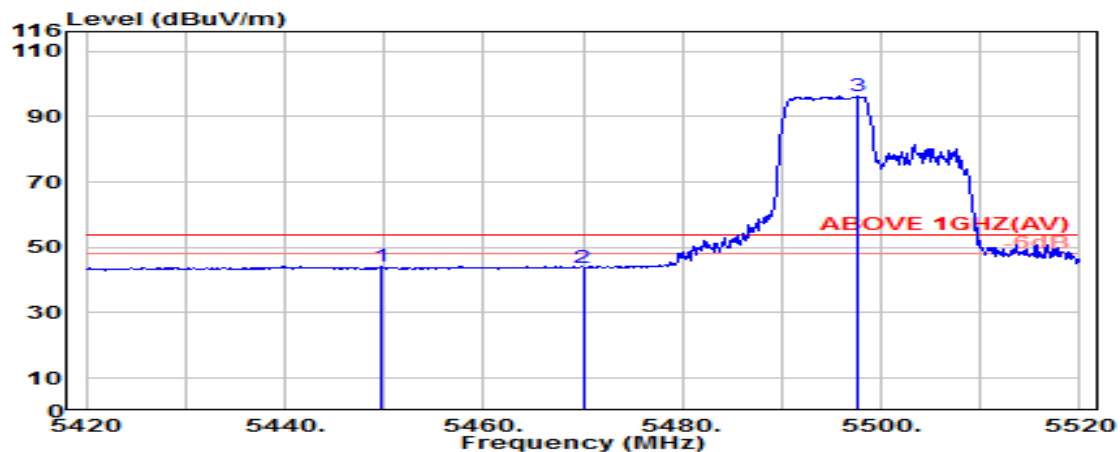

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.700	34.10	8.72	39.07	40.46	44.21	54.00	9.79	Average
5470.000	34.10	8.74	39.07	40.21	43.97	54.00	10.03	Average
@ 5497.600	34.10	8.75	39.07	92.53	96.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

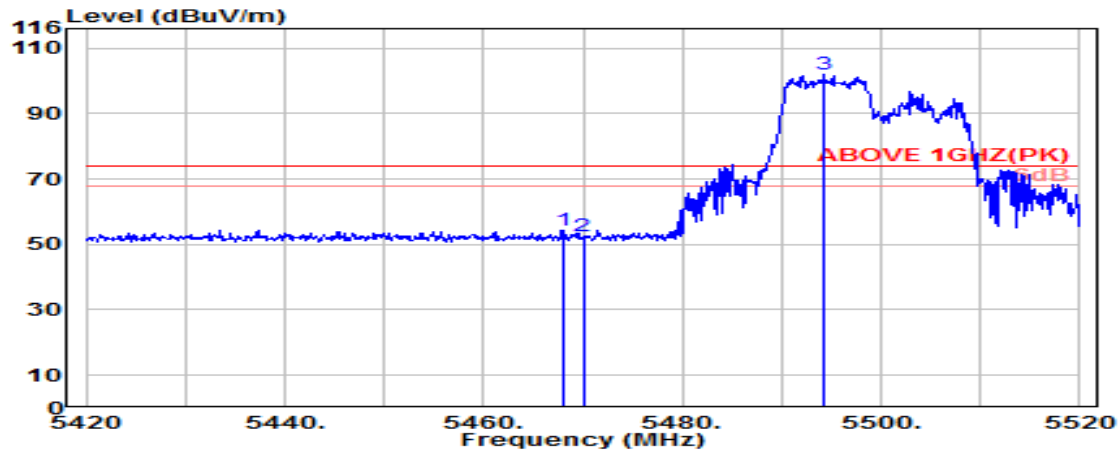

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.10	8.73	39.07	50.67	54.44	74.00	19.56	Peak
5470.000	34.10	8.74	39.07	48.98	52.74	74.00	21.26	Peak
@ 5494.300	34.10	8.75	39.07	98.16	101.94	---	---	Peak

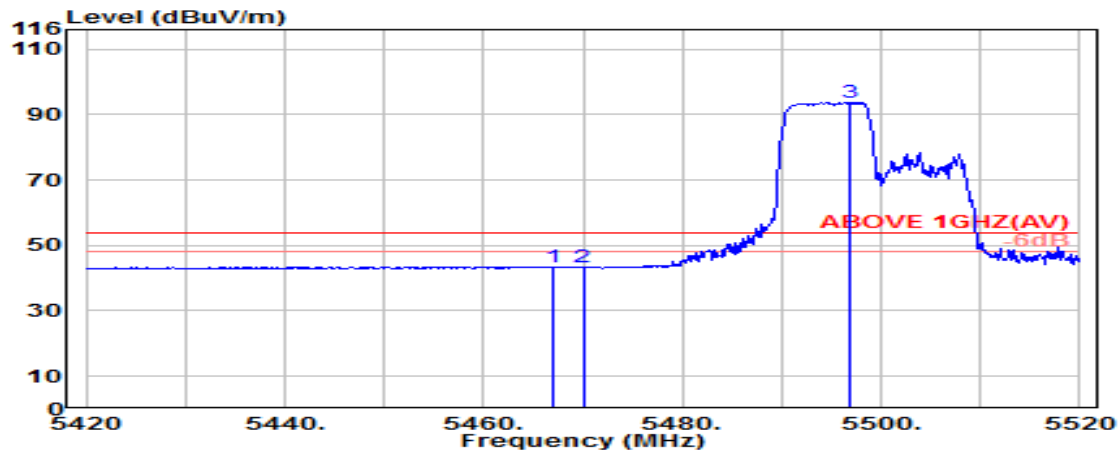

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.10	8.73	39.07	39.77	43.53	54.00	10.47	Average
5470.000	34.10	8.74	39.07	39.53	43.29	54.00	10.71	Average
@ 5496.800	34.10	8.75	39.07	89.99	93.77	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

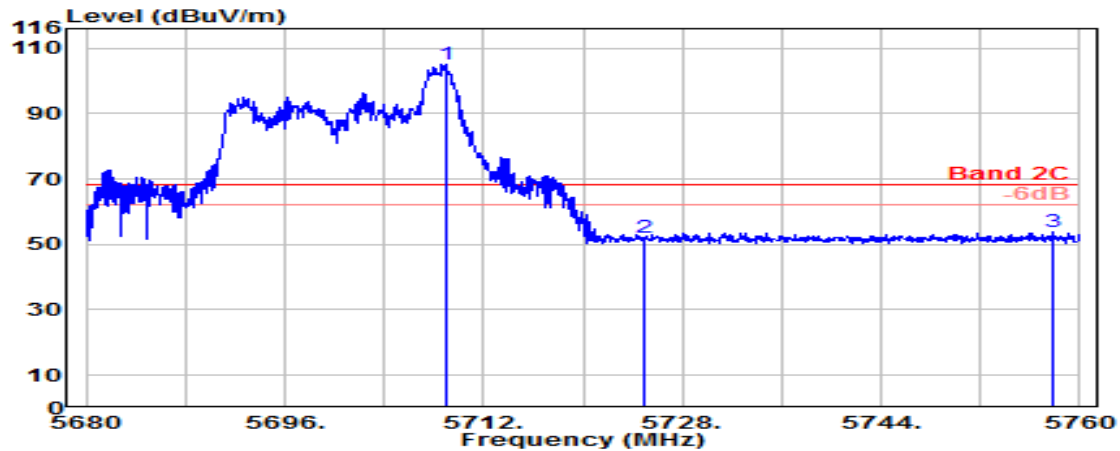

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5709.000	33.47	8.87	39.13	101.85	105.06	---	---	Peak
5725.000	33.60	8.88	39.14	48.79	52.13	68.20	16.07	Peak
5757.850	33.82	8.90	39.15	50.49	54.05	68.20	14.15	Peak

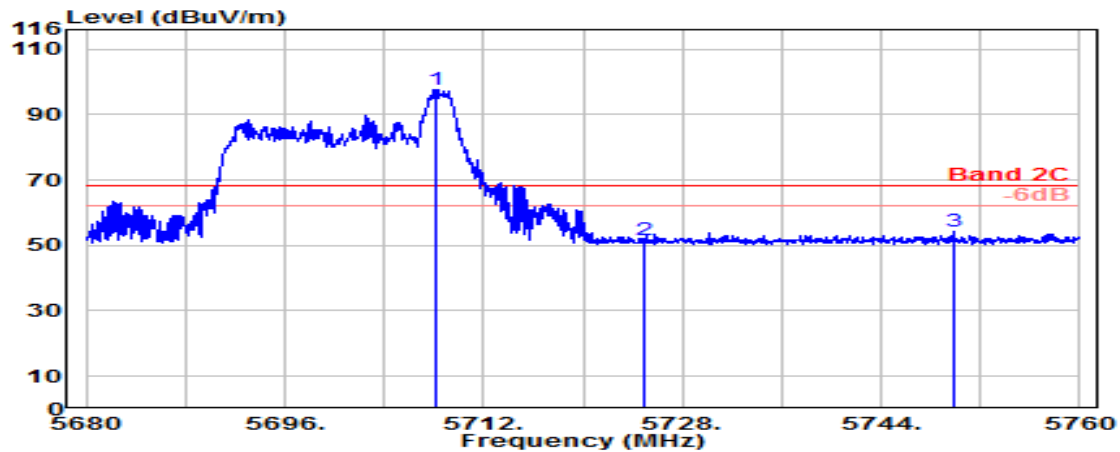

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.150	33.47	8.87	39.13	94.26	97.46	---	---	Peak
5725.000	33.60	8.88	39.14	48.41	51.75	68.20	16.45	Peak
5749.800	33.80	8.89	39.15	50.85	54.39	68.20	13.81	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

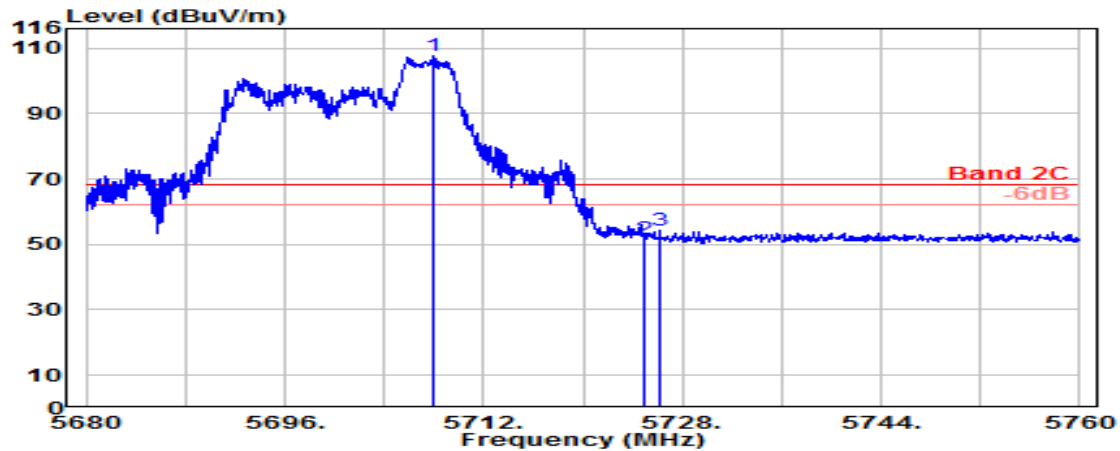

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.050	33.46	8.87	39.13	104.63	107.83	---	---	Peak
5725.000	33.60	8.88	39.14	48.44	51.78	68.20	16.42	Peak
5726.200	33.61	8.88	39.14	50.87	54.22	68.20	13.98	Peak

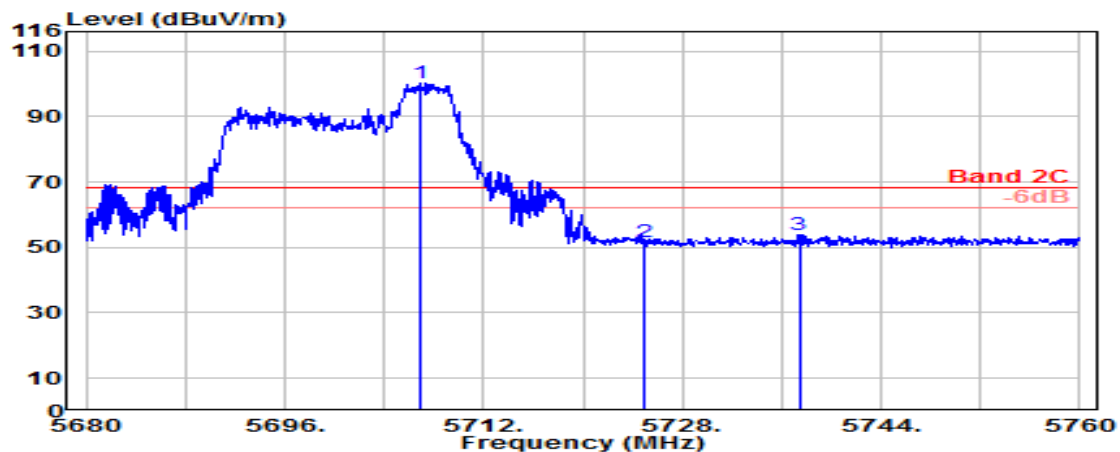

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.000	33.46	8.87	39.13	97.04	100.23	---	---	Peak
5725.000	33.60	8.88	39.14	48.11	51.45	68.20	16.75	Peak
5737.400	33.70	8.89	39.14	50.22	53.66	68.20	14.54	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

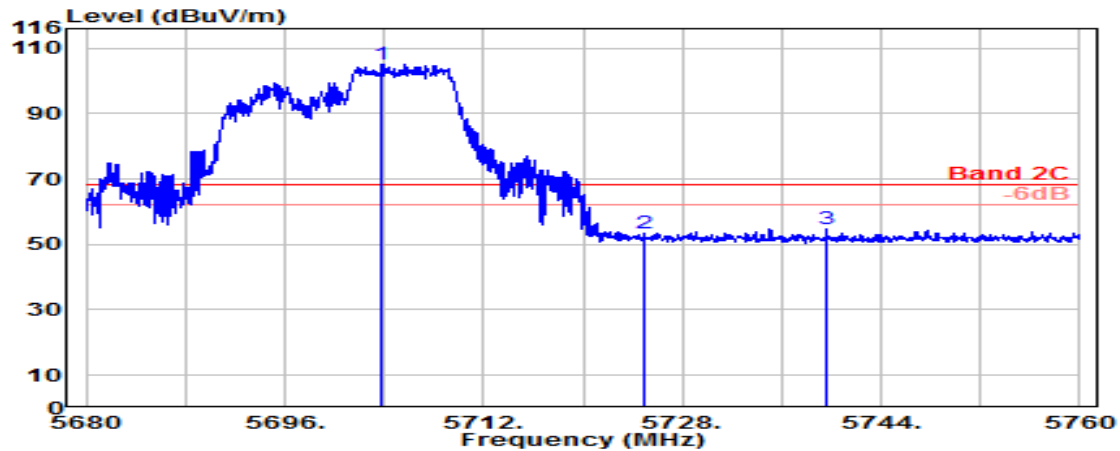

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.850	33.43	8.87	39.13	102.07	105.24	---	---	Peak
5725.000	33.60	8.88	39.14	49.92	53.26	68.20	14.94	Peak
5739.600	33.72	8.89	39.14	51.39	54.85	68.20	13.35	Peak

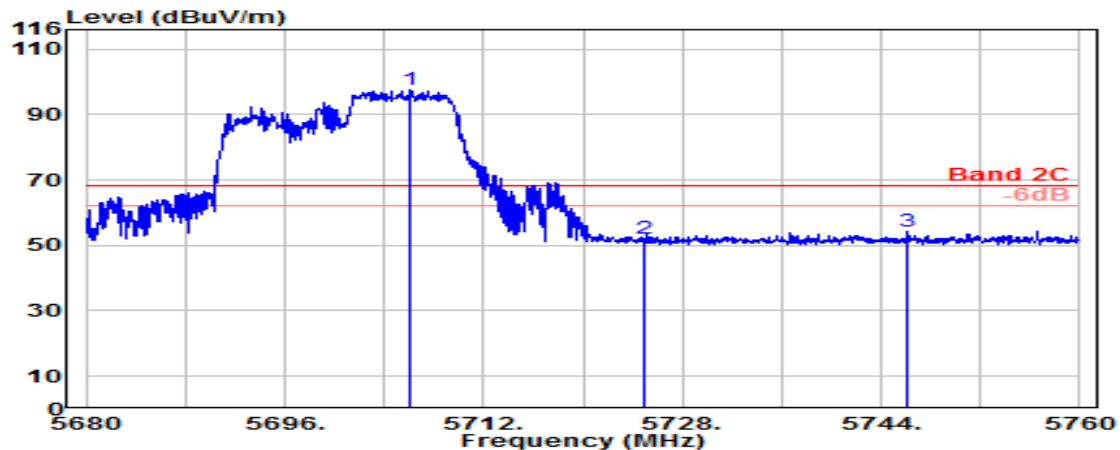

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.050	33.45	8.87	39.13	94.36	97.54	---	---	Peak
5725.000	33.60	8.88	39.14	48.75	52.09	68.20	16.11	Peak
5746.150	33.77	8.89	39.15	50.62	54.14	68.20	14.06	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

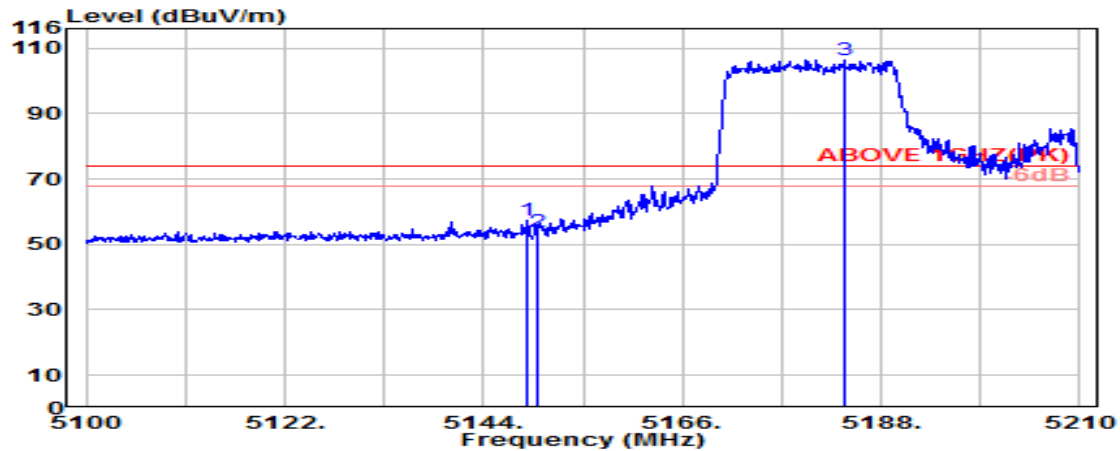

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.60	8.54	39.09	54.49	57.54	74.00	16.46	Peak
5150.000	33.60	8.54	39.09	50.75	53.81	74.00	20.19	Peak
@ 5183.900	33.60	8.56	39.09	103.51	106.58	---	---	Peak

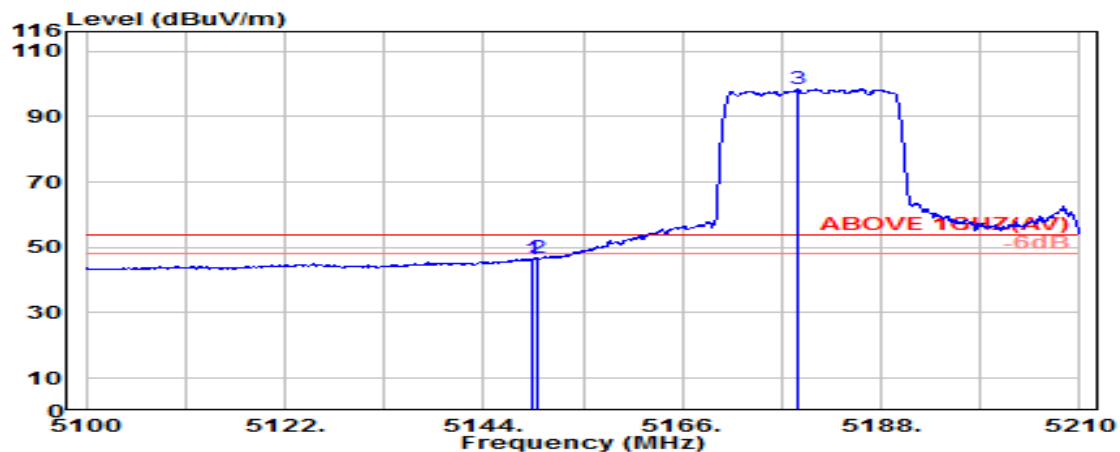

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.60	8.54	39.09	43.52	46.57	54.00	7.43	Average
5150.000	33.60	8.54	39.09	43.73	46.78	54.00	7.22	Average
@ 5178.800	33.60	8.56	39.09	95.37	98.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

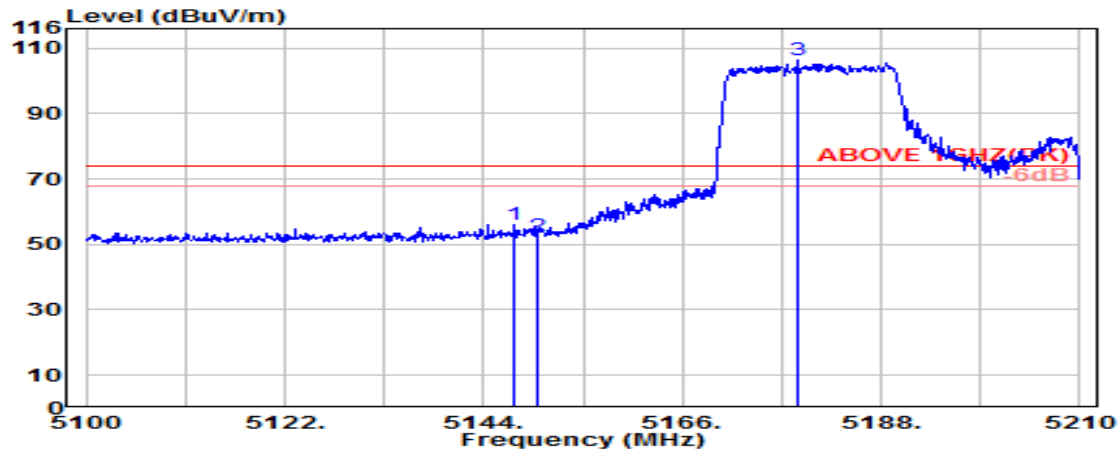

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	33.59	8.54	39.09	53.13	56.18	74.00	17.82	Peak
5150.000	33.60	8.54	39.09	49.53	52.58	74.00	21.42	Peak
@ 5178.700	33.60	8.56	39.09	103.50	106.58	---	---	Peak

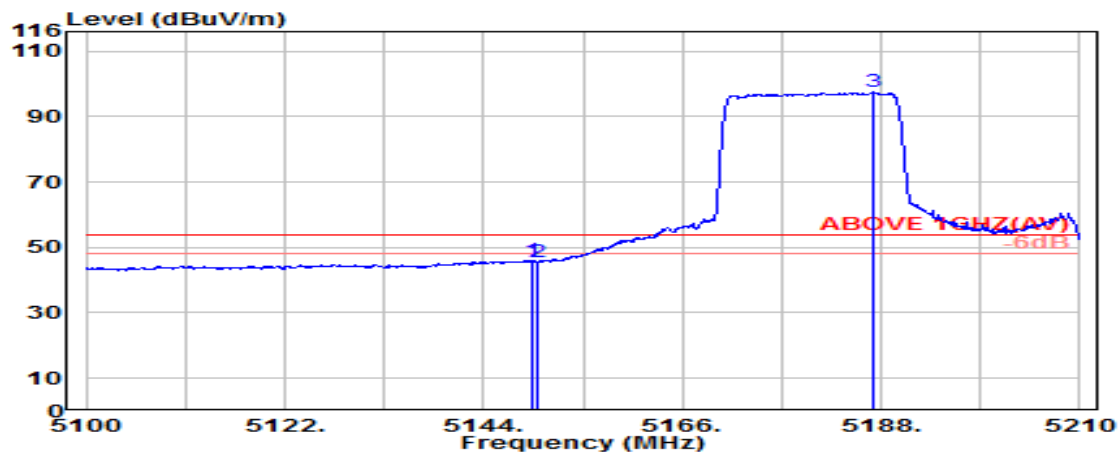

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.60	8.54	39.09	42.78	45.83	54.00	8.17	Average
5150.000	33.60	8.54	39.09	42.50	45.56	54.00	8.44	Average
@ 5187.200	33.60	8.57	39.09	94.39	97.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

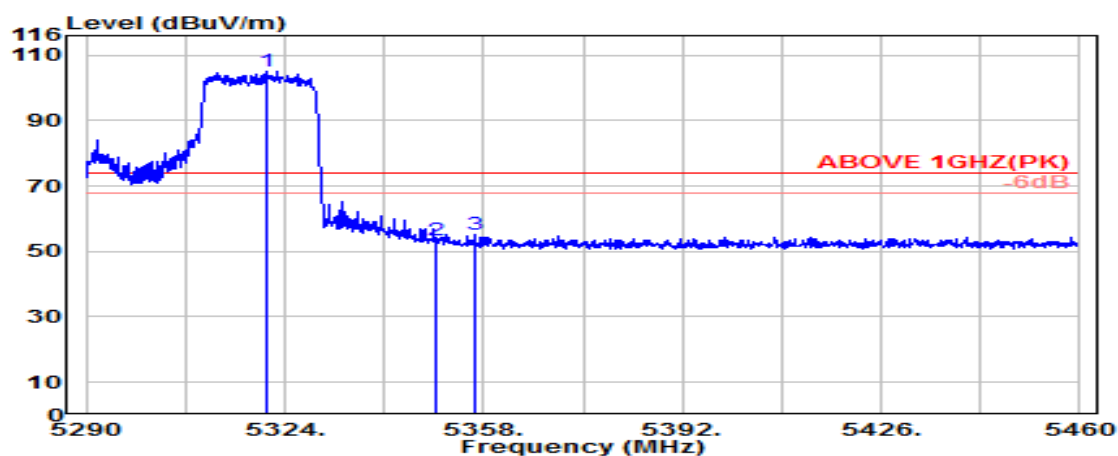

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.700	33.64	8.65	39.08	101.76	104.96	---	---	Peak
5350.000	33.70	8.67	39.08	50.23	53.51	74.00	20.49	Peak
5356.500	33.74	8.67	39.08	51.88	55.21	74.00	18.79	Peak

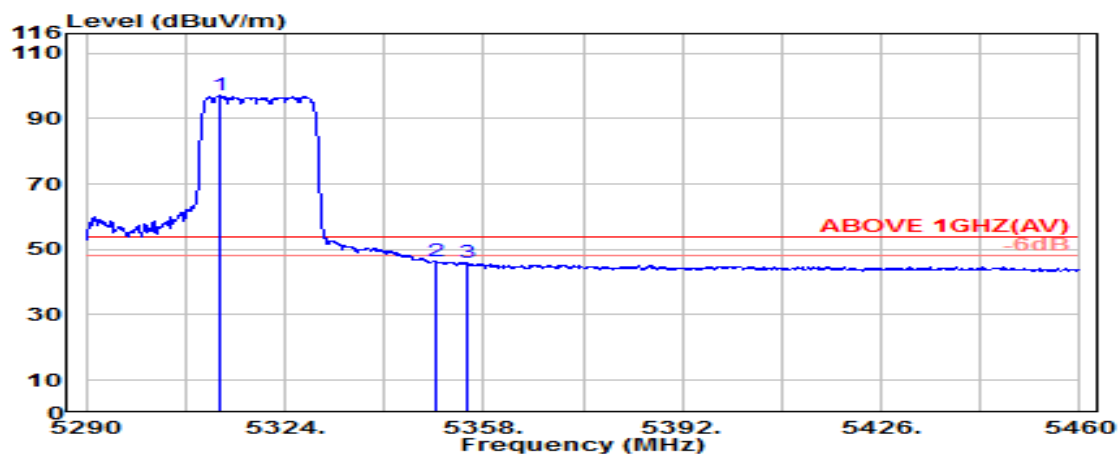

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.800	33.63	8.64	39.08	93.98	97.16	---	---	Average
5350.000	33.70	8.67	39.08	43.00	46.29	54.00	7.71	Average
5355.300	33.73	8.67	39.08	42.85	46.17	54.00	7.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

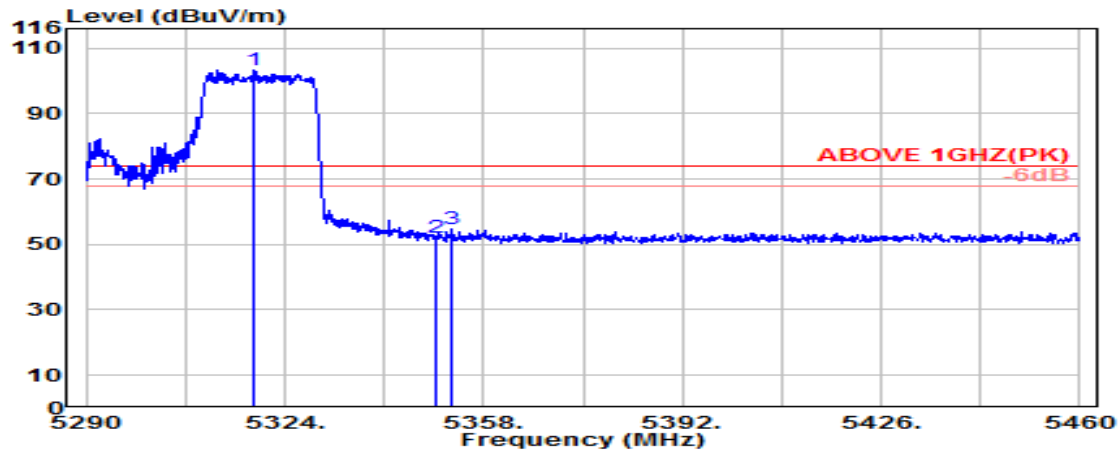

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.800	33.64	8.65	39.08	100.19	103.39	---	---	Peak
5350.000	33.70	8.67	39.08	48.80	52.08	74.00	21.92	Peak
5352.500	33.72	8.67	39.08	51.34	54.64	74.00	19.36	Peak

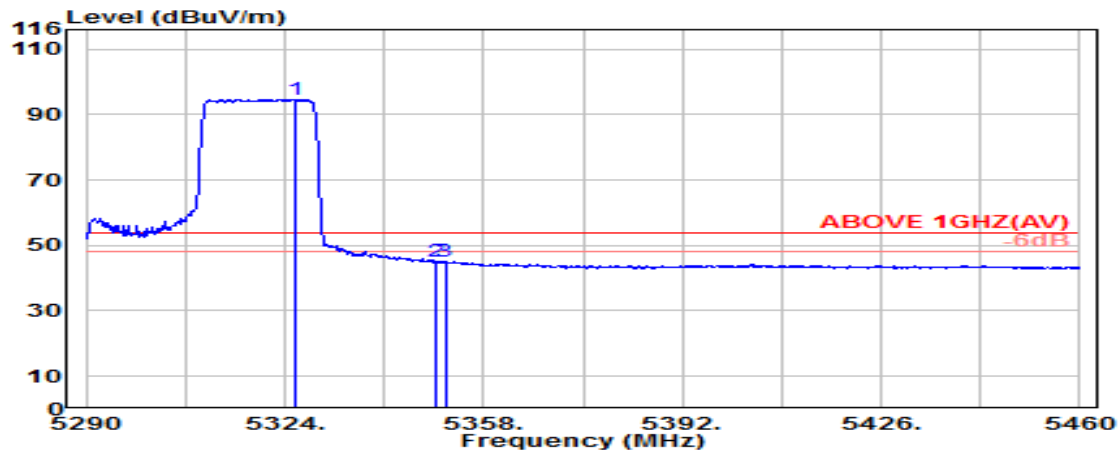

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.600	33.65	8.65	39.08	91.50	94.72	---	---	Average
5350.000	33.70	8.67	39.08	41.79	45.08	54.00	8.92	Average
5351.400	33.71	8.67	39.08	41.83	45.12	54.00	8.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

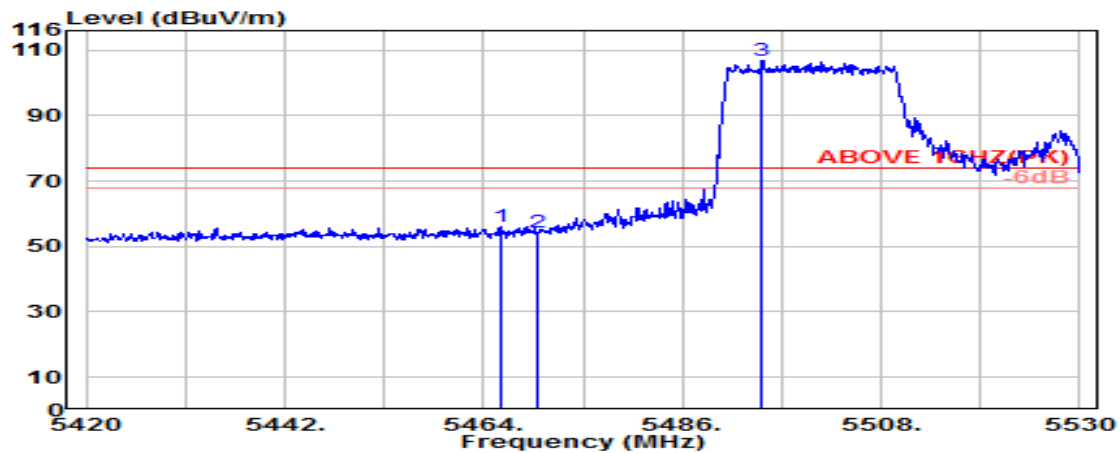

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.10	8.73	39.07	52.30	56.06	74.00	17.94	Peak
5470.000	34.10	8.74	39.07	50.71	54.47	74.00	19.53	Peak
@ 5494.800	34.10	8.75	39.07	103.08	106.86	---	---	Peak

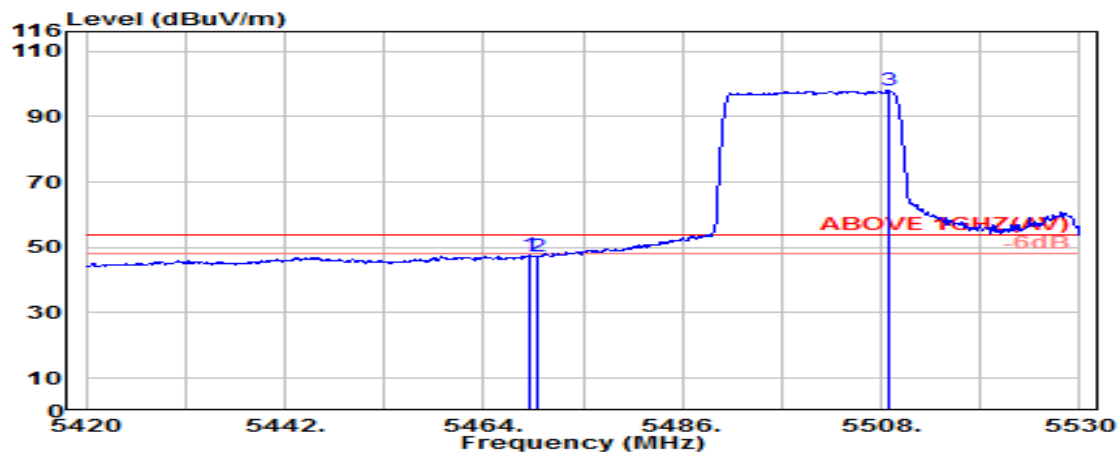

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.10	8.74	39.07	43.82	47.58	54.00	6.42	Average
5470.000	34.10	8.74	39.07	43.63	47.39	54.00	6.61	Average
@ 5508.800	34.08	8.76	39.07	94.27	98.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

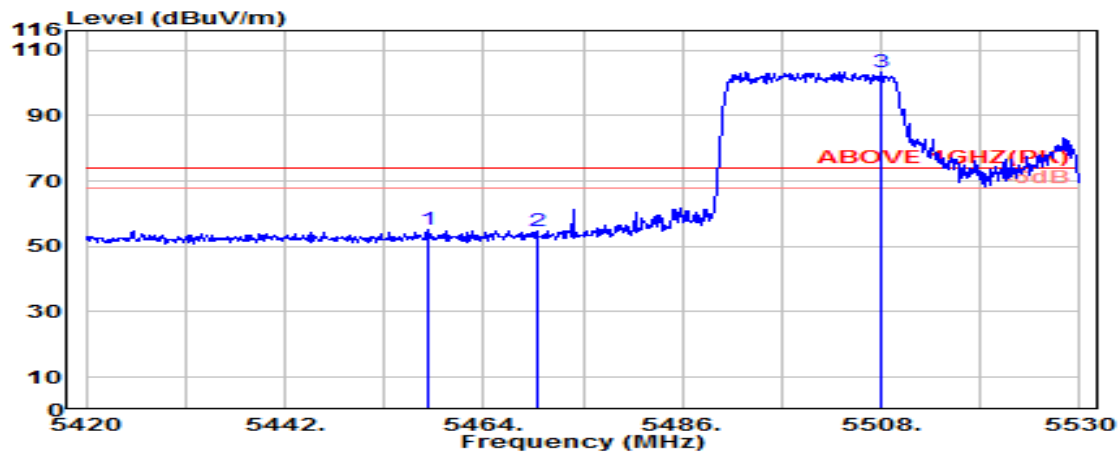

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.10	8.73	39.07	51.43	55.19	74.00	18.81	Peak
5470.000	34.10	8.74	39.07	51.04	54.80	74.00	19.20	Peak
@ 5508.000	34.08	8.76	39.07	99.66	103.43	---	---	Peak

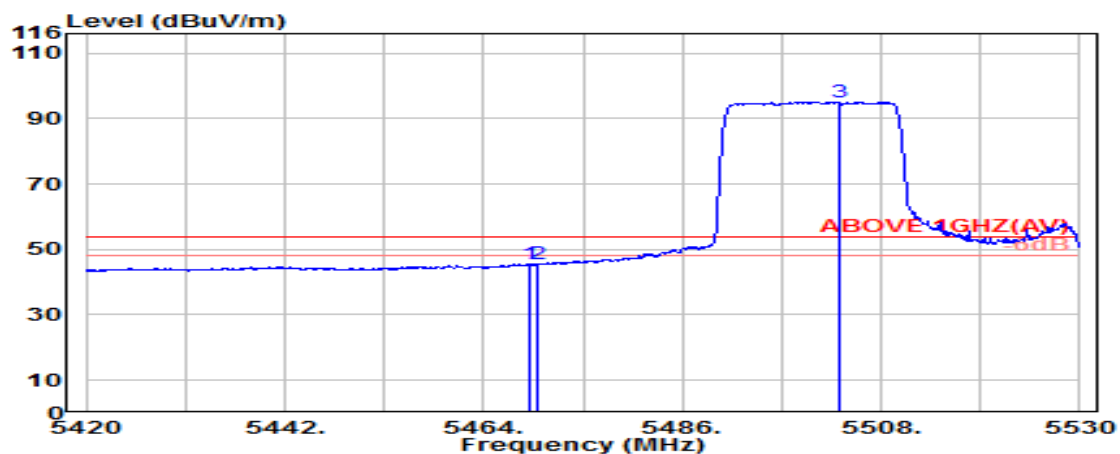

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.10	8.74	39.07	41.64	45.40	54.00	8.60	Average
5470.000	34.10	8.74	39.07	41.94	45.70	54.00	8.30	Average
@ 5503.400	34.09	8.76	39.07	91.39	95.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5710MHz

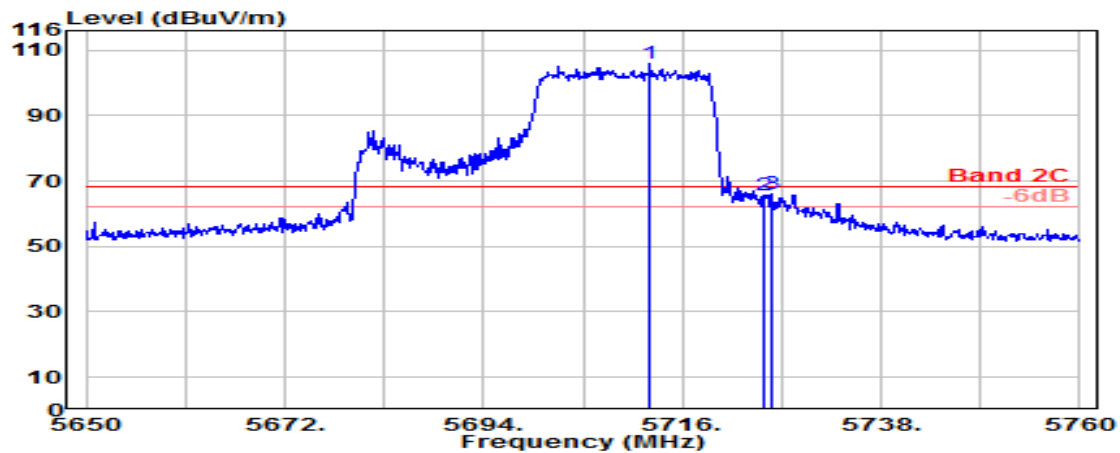

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.400	33.50	8.87	39.14	102.57	105.81	---	---	Peak
5725.000	33.60	8.88	39.14	62.43	65.78	68.20	2.42	Peak
5725.800	33.61	8.88	39.14	62.57	65.91	68.20	2.29	Peak

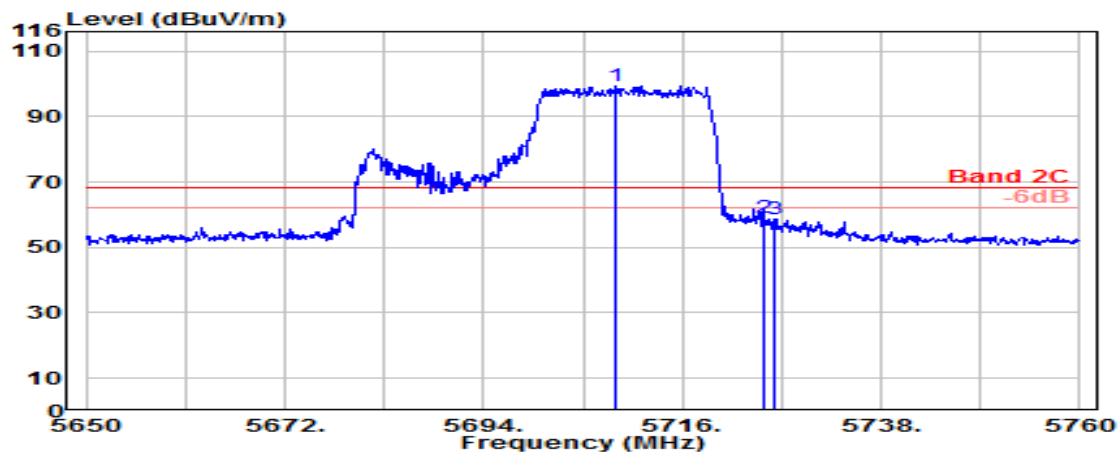

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.600	33.47	8.87	39.13	96.24	99.45	---	---	Peak
5725.000	33.60	8.88	39.14	55.74	59.08	68.20	9.12	Peak
5726.300	33.61	8.88	39.14	55.10	58.46	68.20	9.74	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

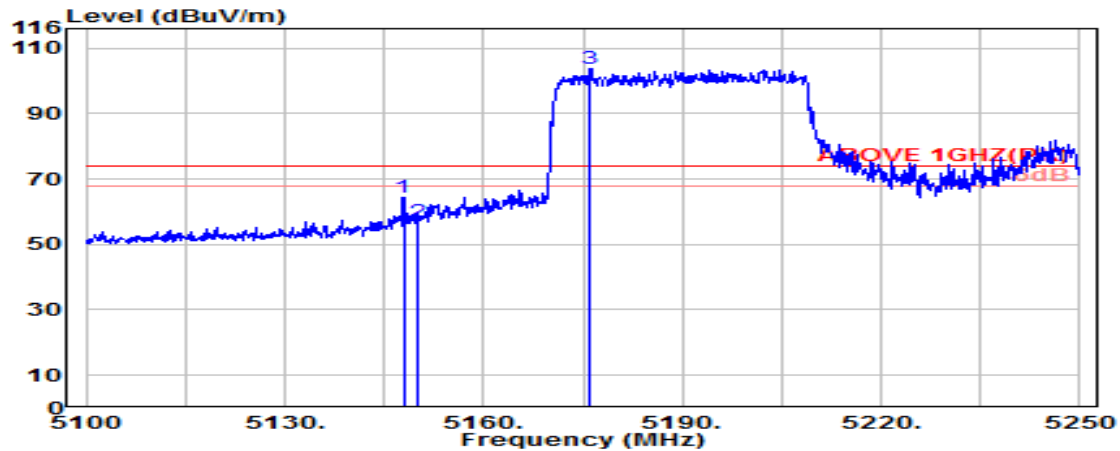

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.900	33.60	8.54	39.09	61.30	64.35	74.00	9.65	Peak
5150.000	33.60	8.54	39.09	53.82	56.87	74.00	17.13	Peak
@ 5176.100	33.60	8.56	39.09	100.61	103.68	---	---	Peak

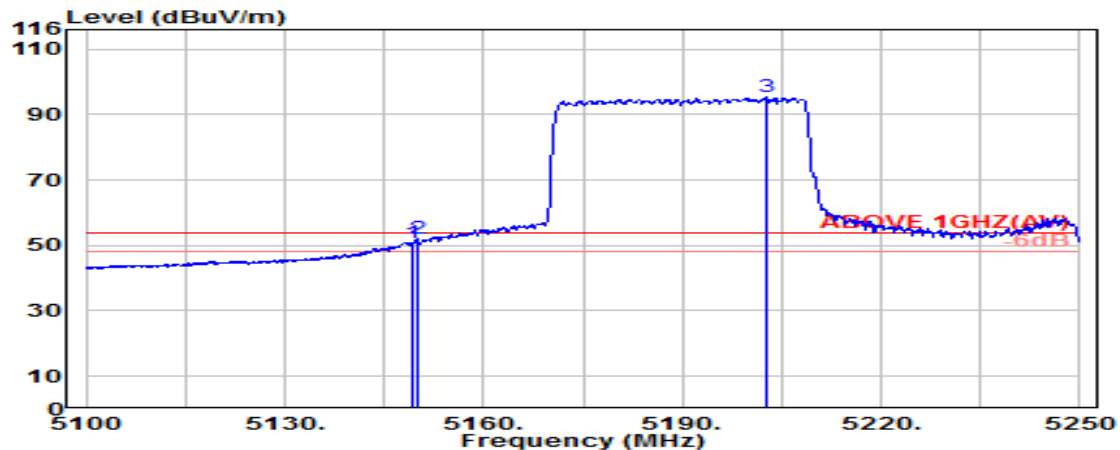

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.60	8.54	39.09	47.82	50.87	54.00	3.13	Average
5150.000	33.60	8.54	39.09	48.85	51.90	54.00	2.10	Average
@ 5202.800	33.61	8.58	39.09	92.12	95.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

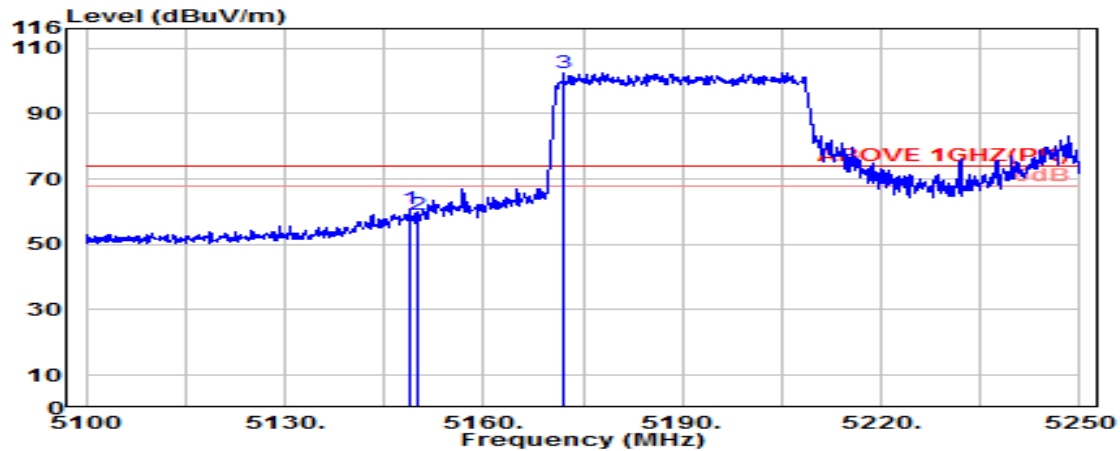

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.60	8.54	39.09	57.92	60.97	74.00	13.03	Peak
5150.000	33.60	8.54	39.09	56.24	59.29	74.00	14.71	Peak
@ 5172.100	33.60	8.56	39.09	99.39	102.46	---	---	Peak

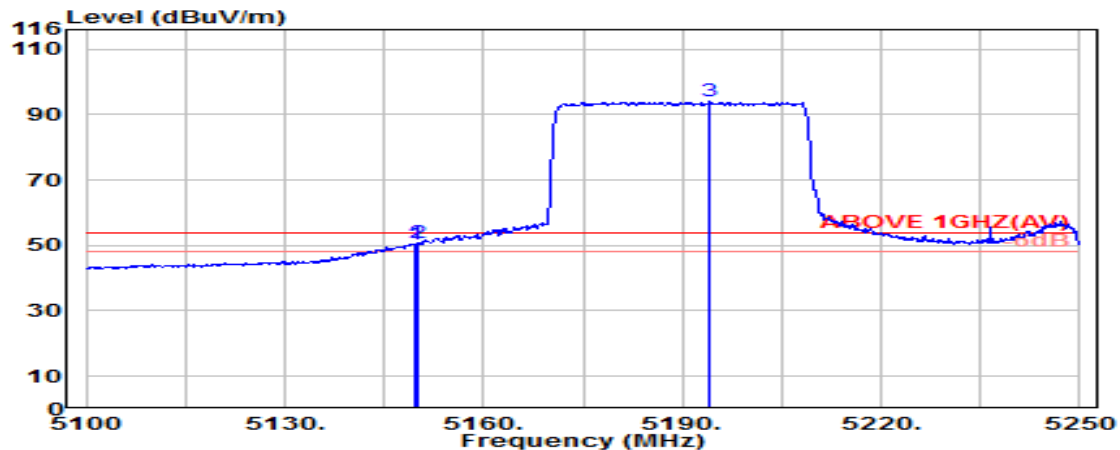

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.60	8.54	39.09	47.37	50.43	54.00	3.57	Average
5150.000	33.60	8.54	39.09	47.70	50.75	54.00	3.25	Average
@ 5194.100	33.60	8.57	39.09	90.90	93.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

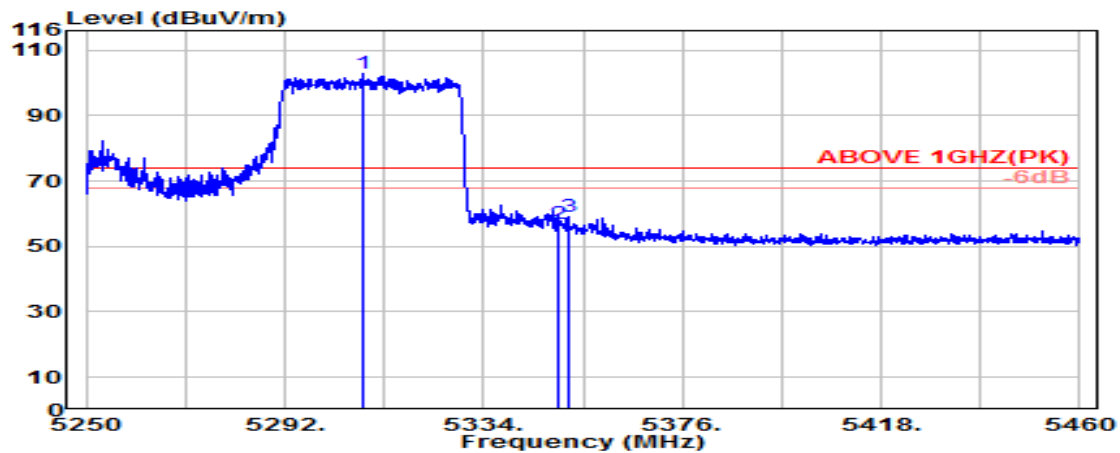

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.600	33.62	8.64	39.08	99.78	102.96	---	---	Peak
5350.000	33.70	8.67	39.08	53.48	56.77	74.00	17.23	Peak
5351.900	33.71	8.67	39.08	55.71	59.01	74.00	14.99	Peak

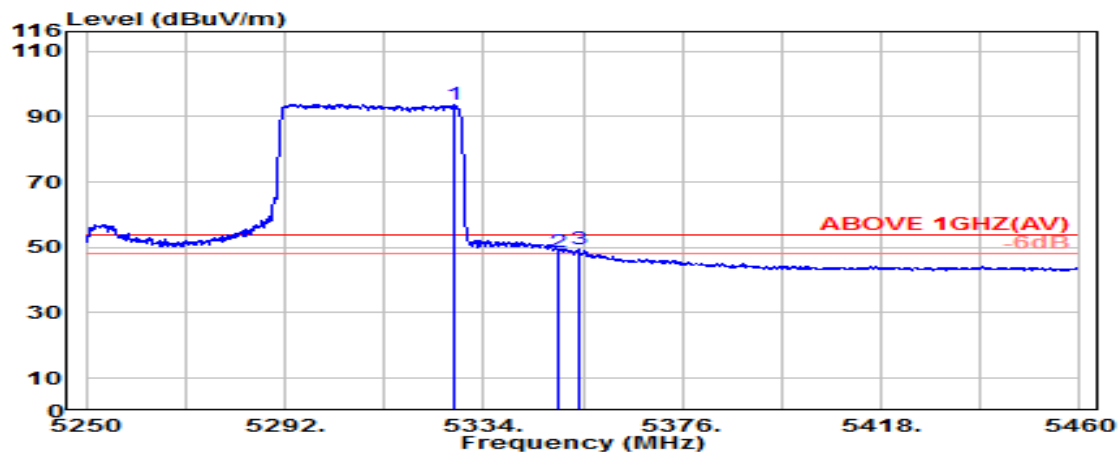

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.600	33.66	8.65	39.08	90.58	93.81	---	---	Average
5350.000	33.70	8.67	39.08	45.36	48.65	54.00	5.35	Average
5354.000	33.72	8.67	39.08	46.27	49.58	54.00	4.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

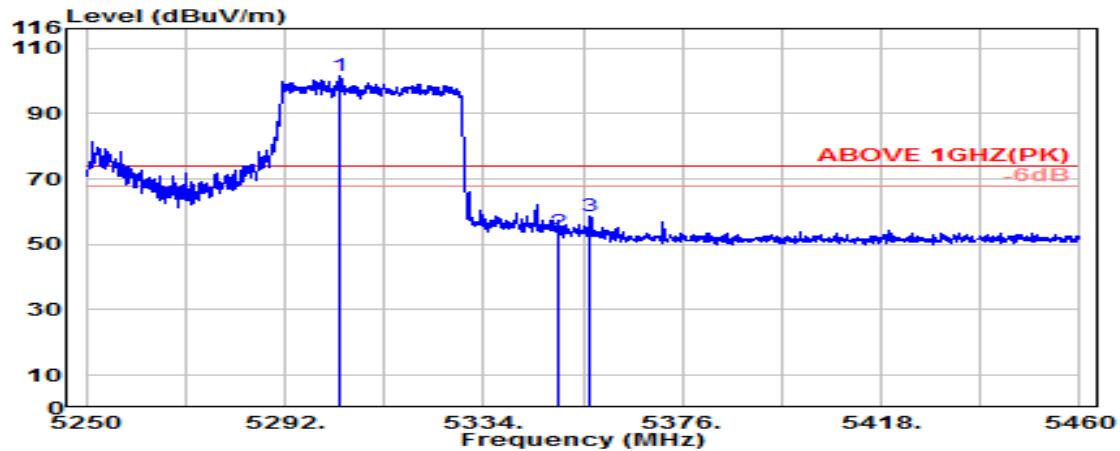

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.400	33.61	8.64	39.08	98.23	101.39	---	---	Peak
5350.000	33.70	8.67	39.08	50.45	53.74	74.00	20.26	Peak
5356.600	33.74	8.67	39.08	55.20	58.53	74.00	15.47	Peak

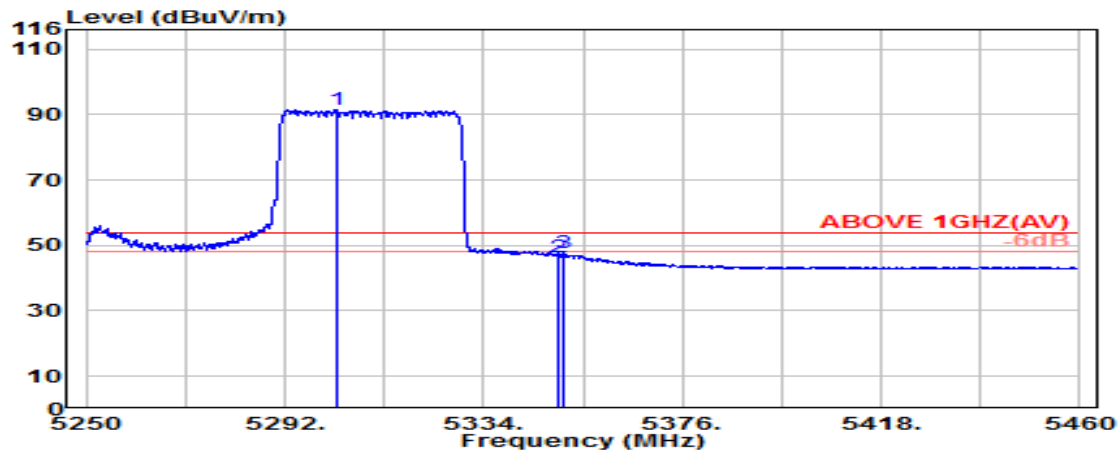

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.800	33.61	8.64	39.08	88.25	91.41	---	---	Average
5350.000	33.70	8.67	39.08	43.22	46.51	54.00	7.49	Average
5350.900	33.71	8.67	39.08	44.28	47.57	54.00	6.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

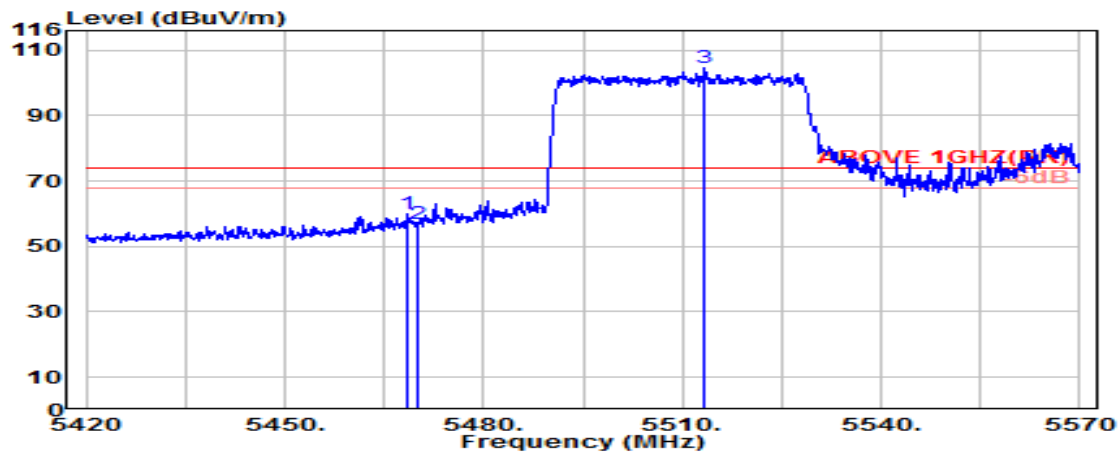

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.10	8.73	39.07	56.40	60.16	74.00	13.84	Peak
5470.000	34.10	8.74	39.07	53.27	57.04	74.00	16.96	Peak
@ 5513.300	34.07	8.76	39.07	100.81	104.57	---	---	Peak

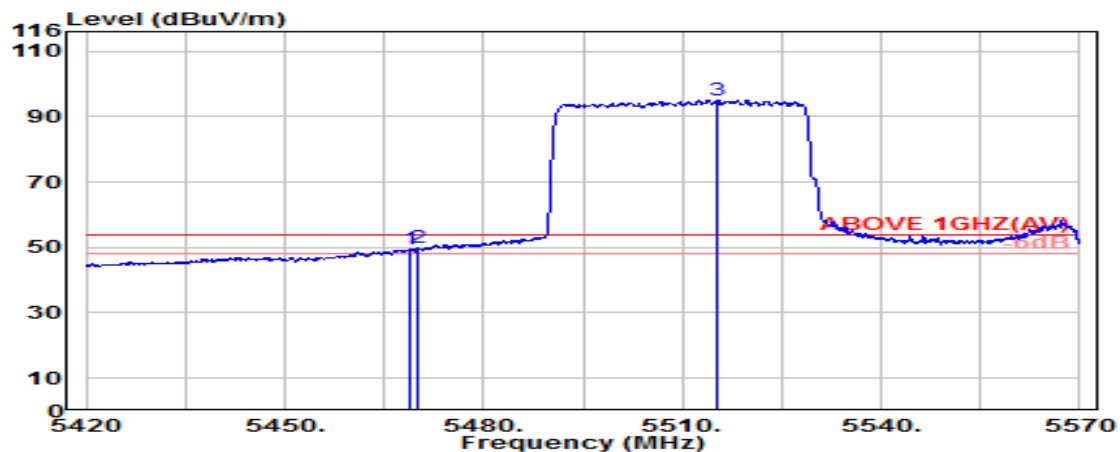

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.10	8.74	39.07	45.50	49.26	54.00	4.74	Average
5470.000	34.10	8.74	39.07	46.20	49.97	54.00	4.03	Average
@ 5515.200	34.07	8.76	39.07	91.22	94.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.