

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.92	16.08	39.15	32.36	47.21	54.00	6.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.92	16.08	39.15	32.76	47.61	54.00	6.39	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.00	16.13	39.10	32.24	47.26	54.00	6.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.00	16.13	39.10	31.73	46.76	54.00	7.24	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.04	16.15	39.08	32.50	47.62	54.00	6.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.04	16.15	39.08	32.20	47.32	54.00	6.68	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.30	16.36	38.88	31.64	47.42	54.00	6.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.30	16.36	38.88	31.97	47.75	54.00	6.25	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.30	16.50	38.91	31.11	47.00	54.00	7.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.30	16.50	38.91	31.18	47.08	54.00	6.92	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.50	16.71	38.95	31.74	48.00	54.00	6.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.50	16.71	38.95	31.50	47.76	54.00	6.24	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.54	16.75	38.96	31.10	47.43	54.00	6.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.54	16.75	38.96	31.57	47.90	54.00	6.10	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.59	16.79	38.97	30.76	47.17	54.00	6.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.59	16.79	38.97	32.15	48.57	54.00	5.43	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.67	16.86	39.01	31.30	47.82	54.00	6.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.67	16.86	39.01	33.27	49.80	54.00	4.20	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax:** +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.80	16.93	39.05	31.97	48.65	54.00	5.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.80	16.93	39.05	31.03	47.71	54.00	6.29	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	37.72	16.00	39.30	31.40	45.82	54.00	8.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	37.72	16.00	39.30	31.88	46.30	54.00	7.70	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.82	16.05	39.21	31.86	46.53	54.00	7.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.82	16.05	39.21	31.52	46.18	54.00	7.82	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.94	16.10	39.14	31.48	46.38	54.00	7.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.94	16.10	39.14	31.95	46.85	54.00	7.15	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.02	16.14	39.09	31.92	46.99	54.00	7.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.02	16.14	39.09	32.12	47.19	54.00	6.81	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	38.30	16.38	38.88	31.74	47.54	54.00	6.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	38.30	16.38	38.88	31.02	46.81	54.00	7.19	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.30	16.45	38.90	31.76	47.61	54.00	6.39	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.30	16.45	38.90	31.50	47.35	54.00	6.65	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

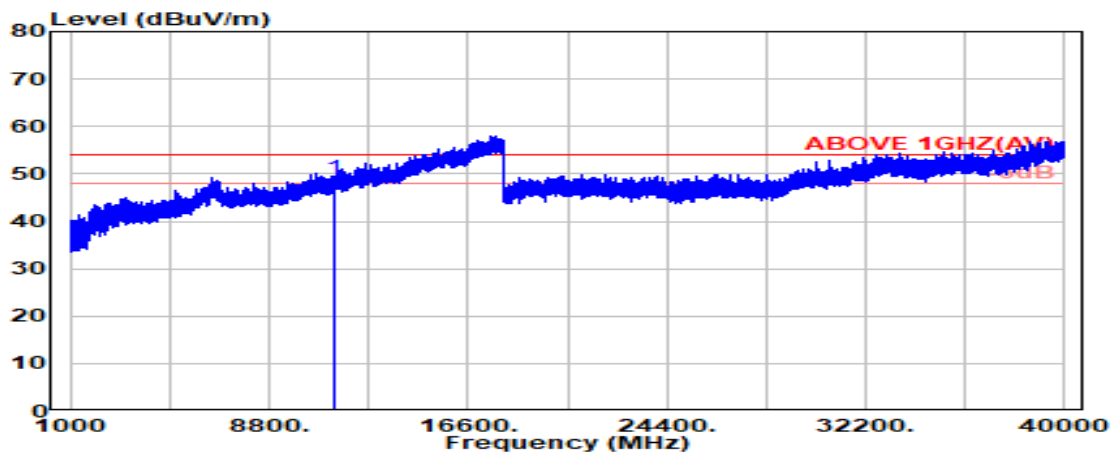

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.32	16.66	38.94	33.09	49.12	54.00	4.88	Peak

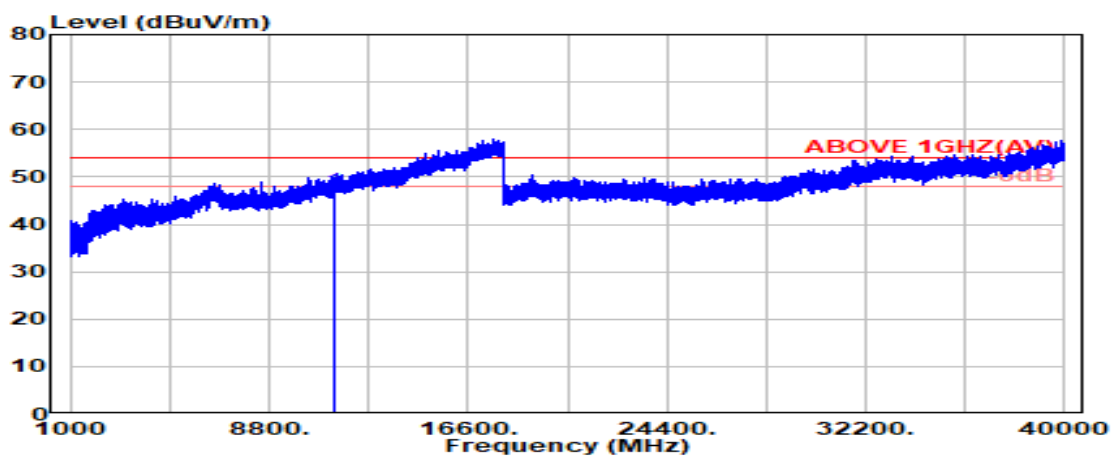

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.32	16.66	38.94	31.06	47.10	54.00	6.90	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.52	16.73	38.96	31.98	48.28	54.00	5.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.52	16.73	38.96	31.14	47.44	54.00	6.56	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.61	16.81	38.98	31.23	47.67	54.00	6.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.61	16.81	38.98	31.14	47.58	54.00	6.42	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.69	16.88	39.02	31.38	47.93	54.00	6.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.69	16.88	39.02	31.13	47.68	54.00	6.32	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.74	16.02	39.25	31.44	45.95	54.00	8.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.74	16.02	39.25	32.57	47.08	54.00	6.92	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.98	16.12	39.11	32.63	47.62	54.00	6.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.98	16.12	39.11	32.23	47.21	54.00	6.79	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.30	16.41	38.89	31.69	47.51	54.00	6.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.30	16.41	38.89	31.04	46.86	54.00	7.14	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.44	16.70	38.95	31.38	47.57	54.00	6.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.44	16.70	38.95	31.47	47.66	54.00	6.34	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.65	16.84	39.00	30.87	47.37	54.00	6.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.65	16.84	39.00	31.20	47.69	54.00	6.31	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.90	16.07	39.16	31.62	46.43	54.00	7.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.90	16.07	39.16	32.38	47.19	54.00	6.81	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	37.74	15.99	39.33	31.97	46.38	54.00	7.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	37.74	15.99	39.33	31.74	46.15	54.00	7.85	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.70	16.01	39.28	31.87	46.31	54.00	7.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.70	16.01	39.28	31.87	46.31	54.00	7.69	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.86	16.06	39.18	32.75	47.49	54.00	6.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.86	16.06	39.18	31.28	46.02	54.00	7.98	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.92	16.08	39.15	32.29	47.15	54.00	6.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.92	16.08	39.15	31.20	46.06	54.00	7.94	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.00	16.13	39.10	31.70	46.73	54.00	7.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.00	16.13	39.10	31.39	46.42	54.00	7.58	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.04	16.15	39.08	32.61	47.72	54.00	6.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.04	16.15	39.08	33.25	48.36	54.00	5.64	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.30	16.36	38.88	30.60	46.38	54.00	7.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.30	16.36	38.88	31.77	47.55	54.00	6.45	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.30	16.50	38.91	30.21	46.10	54.00	7.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.30	16.50	38.91	31.84	47.73	54.00	6.27	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.50	16.71	38.95	32.32	48.58	54.00	5.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.50	16.71	38.95	32.38	48.64	54.00	5.36	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.54	16.75	38.96	31.96	48.28	54.00	5.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.54	16.75	38.96	31.99	48.32	54.00	5.68	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.59	16.79	38.97	30.64	47.06	54.00	6.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.59	16.79	38.97	32.10	48.51	54.00	5.49	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	U-NII Band	U-NII Band 3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.67	16.86	39.01	31.90	48.43	54.00	5.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.67	16.86	39.01	31.44	47.97	54.00	6.03	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.80	16.93	39.05	30.52	47.20	54.00	6.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.80	16.93	39.05	31.57	48.25	54.00	5.75	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	37.72	16.00	39.30	32.61	47.03	54.00	6.97	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	37.72	16.00	39.30	32.37	46.79	54.00	7.21	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.82	16.05	39.21	32.40	47.07	54.00	6.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.82	16.05	39.21	32.03	46.69	54.00	7.31	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.94	16.10	39.14	31.45	46.35	54.00	7.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.94	16.10	39.14	32.29	47.19	54.00	6.81	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.02	16.14	39.09	31.31	46.38	54.00	7.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.02	16.14	39.09	31.28	46.35	54.00	7.65	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	38.30	16.38	38.88	30.78	46.57	54.00	7.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	38.30	16.38	38.88	30.86	46.66	54.00	7.34	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.30	16.45	38.90	30.65	46.50	54.00	7.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.30	16.45	38.90	31.36	47.21	54.00	6.79	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.32	16.66	38.94	30.92	46.96	54.00	7.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.32	16.66	38.94	32.20	48.24	54.00	5.76	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.52	16.73	38.96	31.09	47.39	54.00	6.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.52	16.73	38.96	31.25	47.55	54.00	6.45	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.61	16.81	38.98	30.56	47.01	54.00	6.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.61	16.81	38.98	31.26	47.70	54.00	6.30	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	U-NII Band	U-NII Band 3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.69	16.88	39.02	31.71	48.26	54.00	5.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.69	16.88	39.02	30.76	47.31	54.00	6.69	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.74	16.02	39.25	34.49	49.00	54.00	5.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.74	16.02	39.25	33.38	47.89	54.00	6.11	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.98	16.12	39.11	31.68	46.67	54.00	7.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.98	16.12	39.11	32.46	47.45	54.00	6.55	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.30	16.41	38.89	31.04	46.86	54.00	7.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.30	16.41	38.89	31.60	47.43	54.00	6.57	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.44	16.70	38.95	31.47	47.66	54.00	6.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.44	16.70	38.95	31.31	47.49	54.00	6.51	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.65	16.84	39.00	31.09	47.59	54.00	6.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.65	16.84	39.00	31.12	47.62	54.00	6.38	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.90	16.07	39.16	31.93	46.74	54.00	7.26	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.90	16.07	39.16	32.15	46.97	54.00	7.03	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9table 4 general radiated emissions limits is not required.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH

Test Date	2026/06/29 ~09/10	Temp./Hum.	21~24°C /44~53%
Cable Loss	0.80dB	Tested By	Kevin Yao
Test Voltage	DC 3.8V (Via Battery)		

A.3.1 Average Output Power and Emission/Occupied Bandwidth

Mode 802.11a	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5180	19.68	16.384	9.39	N/A	9.39	0.10	9.49	24	N/A
	5200	19.07	16.381	9.53		9.53	0.10	9.63		
	5240	19.87	16.349	9.62		9.62	0.10	9.72		
U-NII Band 2A	5260	19.23	16.375	10.22		10.22	0.10	10.32		23.84
	5300	20.56	16.406	10.38		10.38	0.10	10.48		24.13
	5320	18.49	16.392	10.47		10.47	0.10	10.57		23.67
U-NII Band 2C	5500	19.19	16.376	12.42		12.42	0.20	12.62		23.83
	5580	19.27	16.396	12.23		12.23	0.20	12.43		23.85
	5700	19.38	16.385	11.69		11.69	0.20	11.89		23.87
	5720	20.68	16.416	11.72		11.72	0.20	11.92		24.16
Mode 802.11a	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (6dB)	Occupied (99%)							
U-NII Band 3	5745	13.48	16.389	9.60	N/A	9.60	0.81	10.41	30	N/A
	5785	15.17	16.414	9.78		9.78	0.81	10.59		
	5825	16.39	16.385	10.32		10.32	0.81	11.13		

Note: 1. The results have been included cable loss.

2. Total Average Output Power (dBm) = Average output power (dBm) + Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

4. Total Average Output Power (EIRP) = Average output power (dBm) + Antenna Gain (dBi) + Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5180	20.51	17.562	9.17	N/A	9.17	0.10	9.27	24	N/A
	5200	20.03	17.561	9.39		9.39	0.10	9.49		
	5240	20.07	17.549	9.24		9.24	0.10	9.34		
U-NII Band 2A	5260	20.01	17.597	9.78		9.78	0.10	9.88		
	5300	19.99	17.536	9.95		9.95	0.10	10.05		
	5320	20.05	17.578	10.05		10.05	0.10	10.15		
U-NII Band 2C	5500	20.16	17.553	12.01		12.01	0.20	12.21		
	5580	20.48	17.577	11.92		11.92	0.20	12.12		
	5700	20.30	17.558	11.31		11.31	0.20	11.51		
	5720	20.08	17.607	11.49		11.49	0.20	11.69		
U-NII Band 3	5745	17.59	17.587	9.24	N/A	9.24	0.81	10.05	30	N/A
	5785	17.57	17.556	9.35		9.35	0.81	10.16		
	5825	17.53	17.567	9.98		9.98	0.81	10.79		

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5190	39.32	35.926	8.51	N/A	8.51	0.10	8.61	24	N/A
	5230	39.28	35.977	10.01		10.01	0.10	10.11		
U-NII Band 2A	5270	39.80	35.960	10.85		10.85	0.10	10.95		
	5310	39.58	35.989	10.81		10.81	0.10	10.91		
U-NII Band 2C	5510	39.77	35.927	12.58		12.58	0.20	12.78		
	5550	39.53	36.007	12.95		12.95	0.20	13.15		
	5670	39.37	36.007	12.61		12.61	0.20	12.81		
	5710	39.53	36.026	12.23		12.23	0.20	12.43		
U-NII Band 3	5755	35.66	35.979	10.07	N/A	10.07	0.81	10.88	30	N/A
	5795	35.68	35.982	10.34		10.34	0.81	11.15		

Note: 1. The results have been included cable loss.

2. Total Average Output Power (dBm) = Average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

4. Total Average Output Power (EIRP) = Average output power(dBm)+ Antenna Gain (dBi) + Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ac-VHT20	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5180	20.51	17.562	9.09	N/A	9.09	0.10	9.19	24	N/A
	5200	20.03	17.561	9.35		9.35	0.10	9.45		
	5240	20.07	17.549	9.17		9.17	0.10	9.27		
U-NII Band 2A	5260	20.01	17.597	9.62		9.62	0.10	9.72		
	5300	19.99	17.536	9.78		9.78	0.10	9.88		
	5320	20.05	17.578	9.92		9.92	0.10	10.02		
U-NII Band 2C	5500	20.16	17.553	11.97		11.97	0.20	12.17		
	5580	20.48	17.577	11.87		11.87	0.20	12.07		
	5700	20.30	17.558	11.25		11.25	0.20	11.45		
	5720	20.08	17.607	11.37		11.37	0.20	11.57		
U-NII Band 3	5745	17.59	17.587	9.17	N/A	9.17	0.81	9.98	30	N/A
	5785	17.57	17.556	9.26		9.26	0.81	10.07		
	5825	17.53	17.567	9.86		9.86	0.81	10.67		

Mode 802.11ac-VHT40	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5190	39.32	35.926	8.47	N/A	8.47	0.10	8.57	24	N/A
	5230	39.28	35.977	10.01		10.01	0.10	10.11		
U-NII Band 2A	5270	39.80	35.960	10.83		10.83	0.10	10.93		
	5310	39.58	35.989	10.76		10.76	0.10	10.86		
U-NII Band 2C	5510	39.77	35.927	12.49		12.49	0.20	12.69		
	5550	39.53	36.007	12.86		12.86	0.20	13.06		
	5670	39.37	36.007	12.57		12.57	0.20	12.77		
	5710	39.53	36.026	12.19		12.19	0.20	12.39		
U-NII Band 3	5755	35.66	35.979	10.02	N/A	10.02	0.81	10.83	30	N/A
	5795	35.68	35.982	10.31		10.31	0.81	11.12		

Note: 1. The results have been included cable loss.

2. Total Average Output Power (dBm) = Average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

4. Total Average Output Power (EIRP) = Average output power(dBm)+ Antenna Gain (dBi) + Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode 802.11ac-VHT80	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenn a Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5210	80.53	75.148	7.57	N/A	7.57	0.10	7.67	24	N/A
U-NII Band 2A	5290	79.93	75.102	10.30		10.30	0.10	10.40		30.03
U-NII Band 2C	5530	80.05	74.876	10.29		10.29	0.20	10.49		30.03
	5690	81.34	75.085	11.79		11.79	0.20	11.99		30.10
Mode 802.11ac-VHT80	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenn a Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (6dB)	Occupied (99%)							
U-NII Band 3	5775	40.13	75.208	10.17	N/A	10.17	0.81	10.98	30	N/A

Mode 802.11ac- VHT160	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenn a Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5250	161.90	153.520	8.40	N/A	8.40	0.10	8.50	24	N/A

Note: 1. The results have been included cable loss.

2. Total Average Output Power (dBm) = Average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

4. Total Average Output Power (EIRP) = Average output power(dBm)+ Antenna Gain (dBi) + Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax-HE20	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5180	20.59	18.897	9.21	N/A	9.21	0.10	9.31	24	N/A
	5200	21.00	18.913	9.43		9.43	0.10	9.53		
	5240	20.80	18.906	9.49		9.49	0.10	9.59		
U-NII Band 2A	5260	20.76	18.924	9.98		9.98	0.10	10.08		
	5300	20.11	18.844	10.26		10.26	0.10	10.36		
	5320	20.51	18.836	10.28		10.28	0.10	10.38		
U-NII Band 2C	5500	20.49	18.866	12.22		12.22	0.20	12.42		
	5580	20.77	18.954	12.17		12.17	0.20	12.37		
	5700	21.10	18.845	11.58		11.58	0.20	11.78		
	5720	20.40	18.906	11.66		11.66	0.20	11.86		
U-NII Band 3	5745	18.60	18.905	9.47	N/A	9.47	0.81	10.28	30	N/A
	5785	18.68	18.840	9.66		9.66	0.81	10.47		
	5825	18.46	18.897	10.21		10.21	0.81	11.02		

Mode 802.11ax-HE40	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5190	39.91	37.575	8.19	N/A	8.19	0.10	8.29	24	N/A
	5230	40.03	37.515	9.74		9.74	0.10	9.84		
U-NII Band 2A	5270	40.12	37.593	10.54		10.54	0.10	10.64		
	5310	39.63	37.648	10.52		10.52	0.10	10.62		
U-NII Band 2C	5510	39.83	37.574	12.26		12.26	0.20	12.46		
	5550	40.39	37.553	12.63		12.63	0.20	12.83		
	5670	40.02	37.547	12.35		12.35	0.20	12.55		
	5710	39.61	37.609	11.87		11.87	0.20	12.07		
U-NII Band 3	5755	30.84	37.554	9.78	N/A	9.78	0.81	10.59	30	N/A
	5795	30.09	37.638	10.02		10.02	0.81	10.83		

Note: 1. The results have been included cable loss.

2. Total Average Output Power (dBm) = Average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

4. Total Average Output Power (EIRP) = Average output power(dBm)+ Antenna Gain (dBi) + Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax-HE80	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5210	81.00	76.672	7.52	N/A	7.52	0.10	7.62	24	N/A
U-NII Band 2A	5290	80.56	76.815	10.21		10.21	0.10	10.31		30.06
U-NII Band 2C	5530	80.81	76.740	10.27		10.27	0.20	10.47		30.07
	5690	80.60	76.374	12.03		12.03	0.20	12.23		30.06
Mode 802.11ax-HE80	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (6dB)	Occupied (99%)							
U-NII Band 3	5775	25.52	76.867	10.11	N/A	10.11	0.81	10.92	30	N/A

Mode 802.11ax-HE160	Centre Frequency (MHz)	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenn a Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
		Emission (26dB)	Occupied (99%)							
U-NII Band 1	5250	164.00	154.840	8.44	N/A	8.44	0.10	8.54	24	N/A

Note: 1. The results have been included cable loss.

2. Total Average Output Power (dBm) = Average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

4. Total Average Output Power (EIRP) = Average output power(dBm)+ Antenna Gain (dBi) + Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax-HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
			Emission (26dB)	Occupied (99%)							
U-NII Band 1	5180	26/0	20.59	18.897	0.04	N/A	0.04	0.10	0.14	24	N/A
		52/37	20.59	18.897	3.11		3.11	0.10	3.21		
		106/53	20.59	18.897	5.37		5.37	0.10	5.47		
U-NII Band 2A	5320	26/8	20.51	18.836	3.02		3.02	0.10	3.12		24.12
		52/40	20.51	18.836	4.22		4.22	0.10	4.32		24.12
		106/54	20.51	18.836	6.85		6.85	0.10	6.95		24.12
U-NII Band 2C	5500	26/0	20.49	18.866	3.66		3.66	0.20	3.86		24.12
		52/37	20.49	18.866	5.83		5.83	0.20	6.03		24.12
		106/53	20.49	18.866	8.35		8.35	0.20	8.55		24.12
	5700	26/8	21.10	18.845	1.96		1.96	0.20	2.16		24.24
		52/40	21.10	18.845	5.05		5.05	0.20	5.25		24.24
		106/54	21.10	18.845	7.69		7.69	0.20	7.89		24.24
Mode 802.11ax-HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth (MHz)		Average Output Power (dBm)	Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Antenna Gain (dBi)	Total Average Output Power (EIRP) ^{Note 4}	Limit (dBm)	Limit (11dBm+10 log B) Note 3
			Emission (6dB)	Occupied (99%)							
U-NII Band 3	5745	26/0	18.88	18.905	-0.22	N/A	-0.22	0.81	0.59	30	N/A
		52/37	18.88	18.905	4.21		4.21	0.81	5.02		
		106/53	18.88	18.905	6.26		6.26	0.81	7.07		
	5825	26/8	18.86	18.897	0.58		0.58	0.81	1.39		N/A
		52/40	18.86	18.897	4.73		4.73	0.81	5.54		
		106/54	18.86	18.897	6.13		6.13	0.81	6.94		

Note: 1. The results have been included cable loss.

2. Total Average Output Power (dBm) = Average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.


4. Total Average Output Power (EIRP) = Average output power(dBm)+ Antenna Gain (dBi) + Duty Cycle Factor (dB) when duty cycle is less than 98%.


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots

● Bandwidth

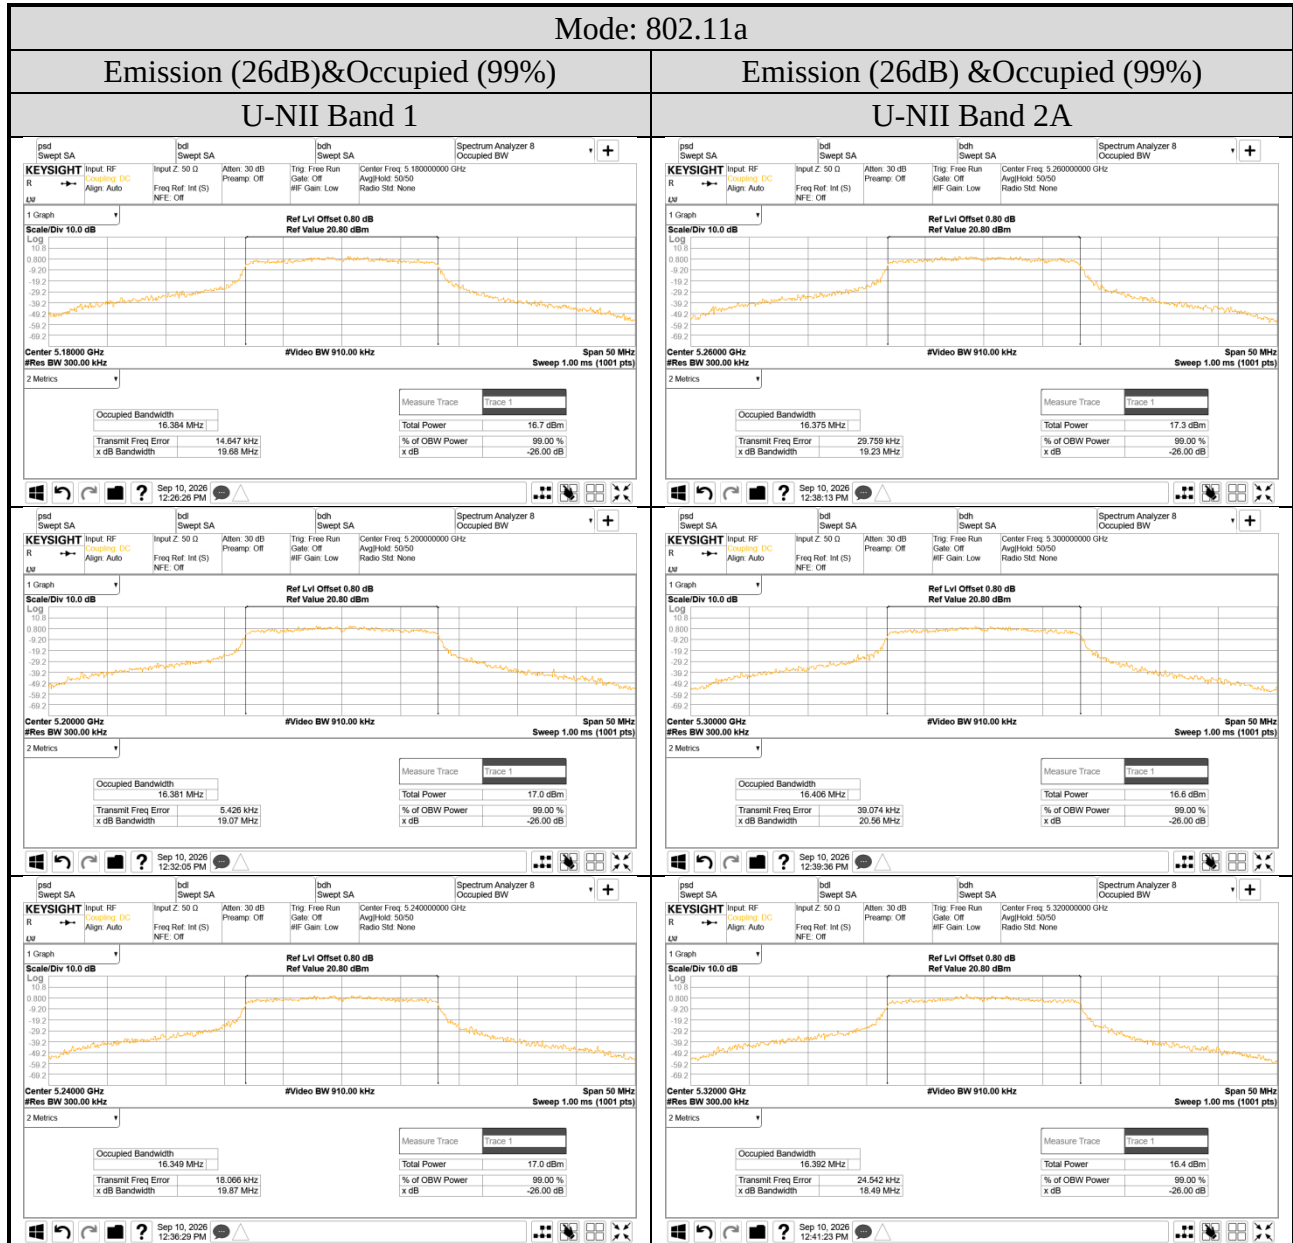


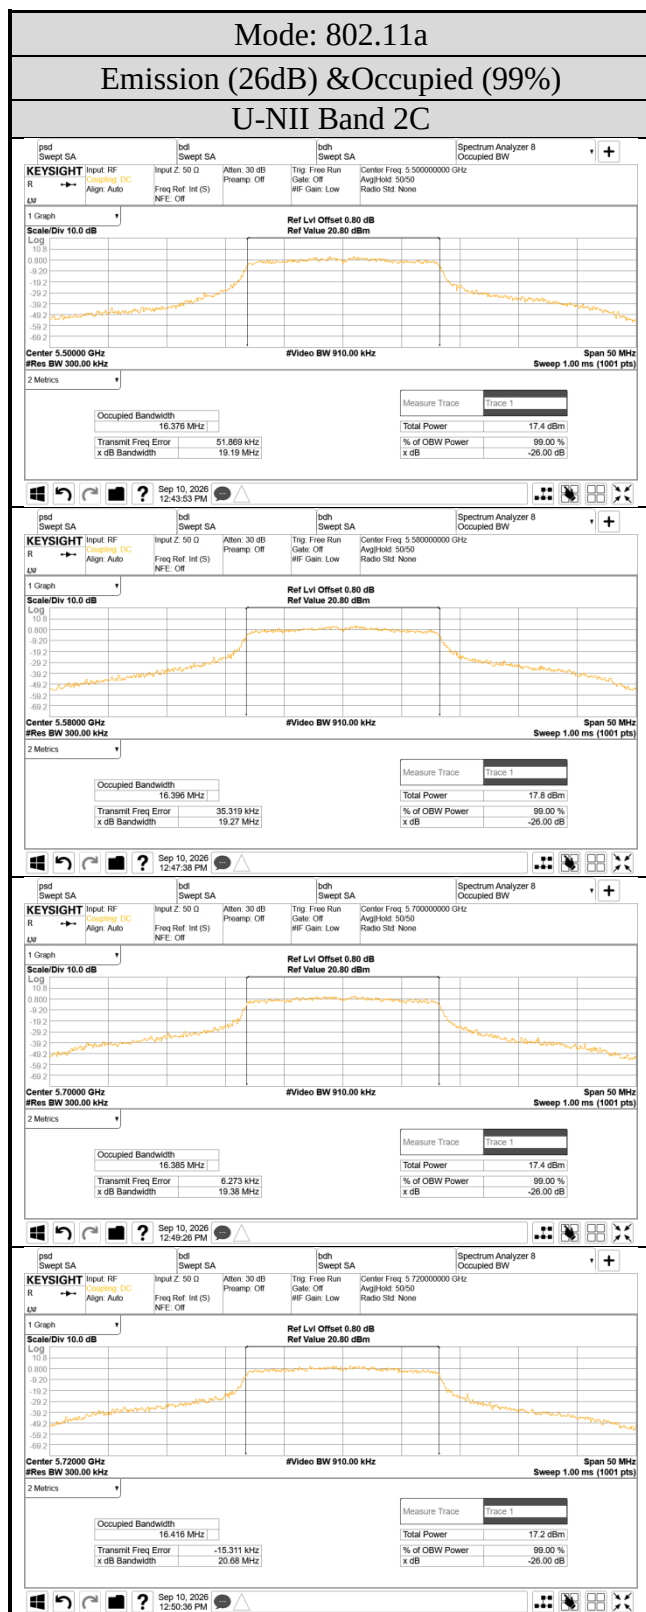

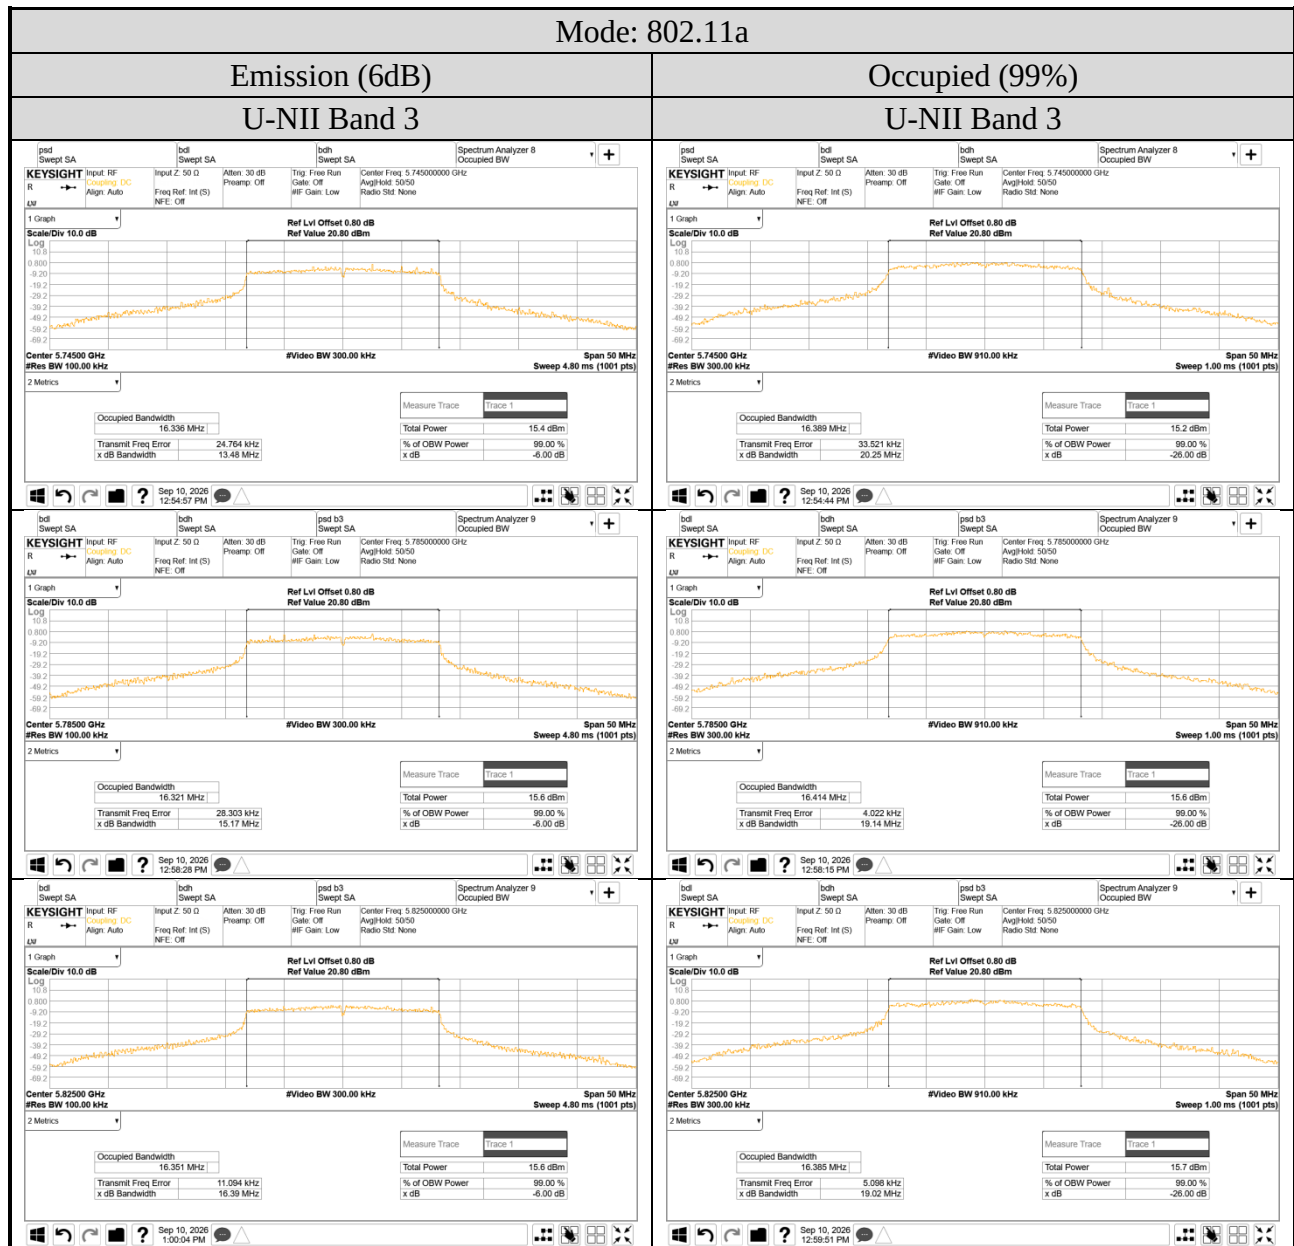


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

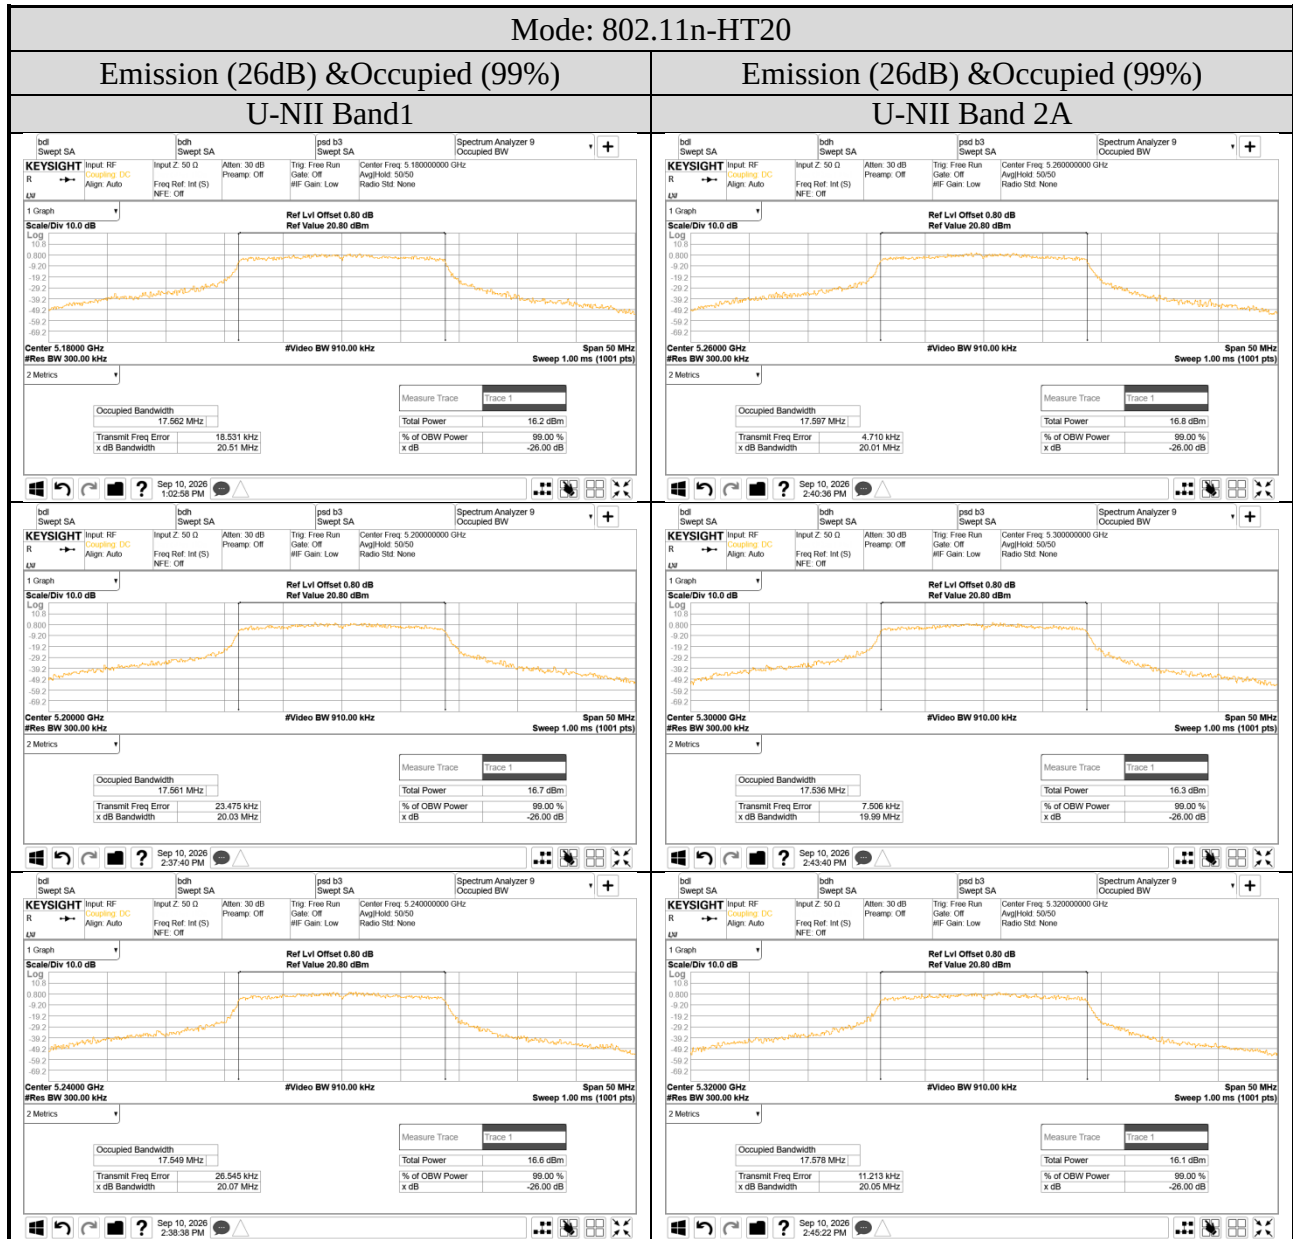

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

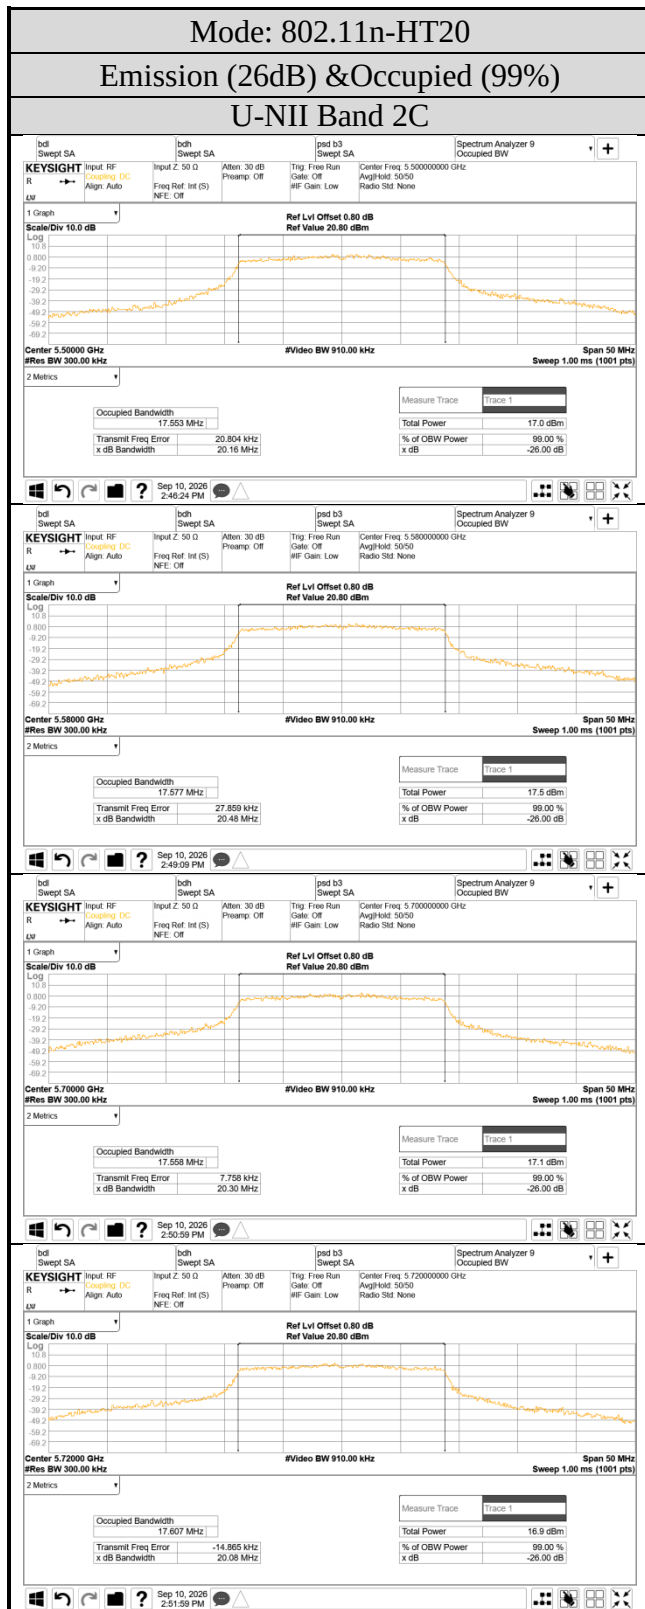

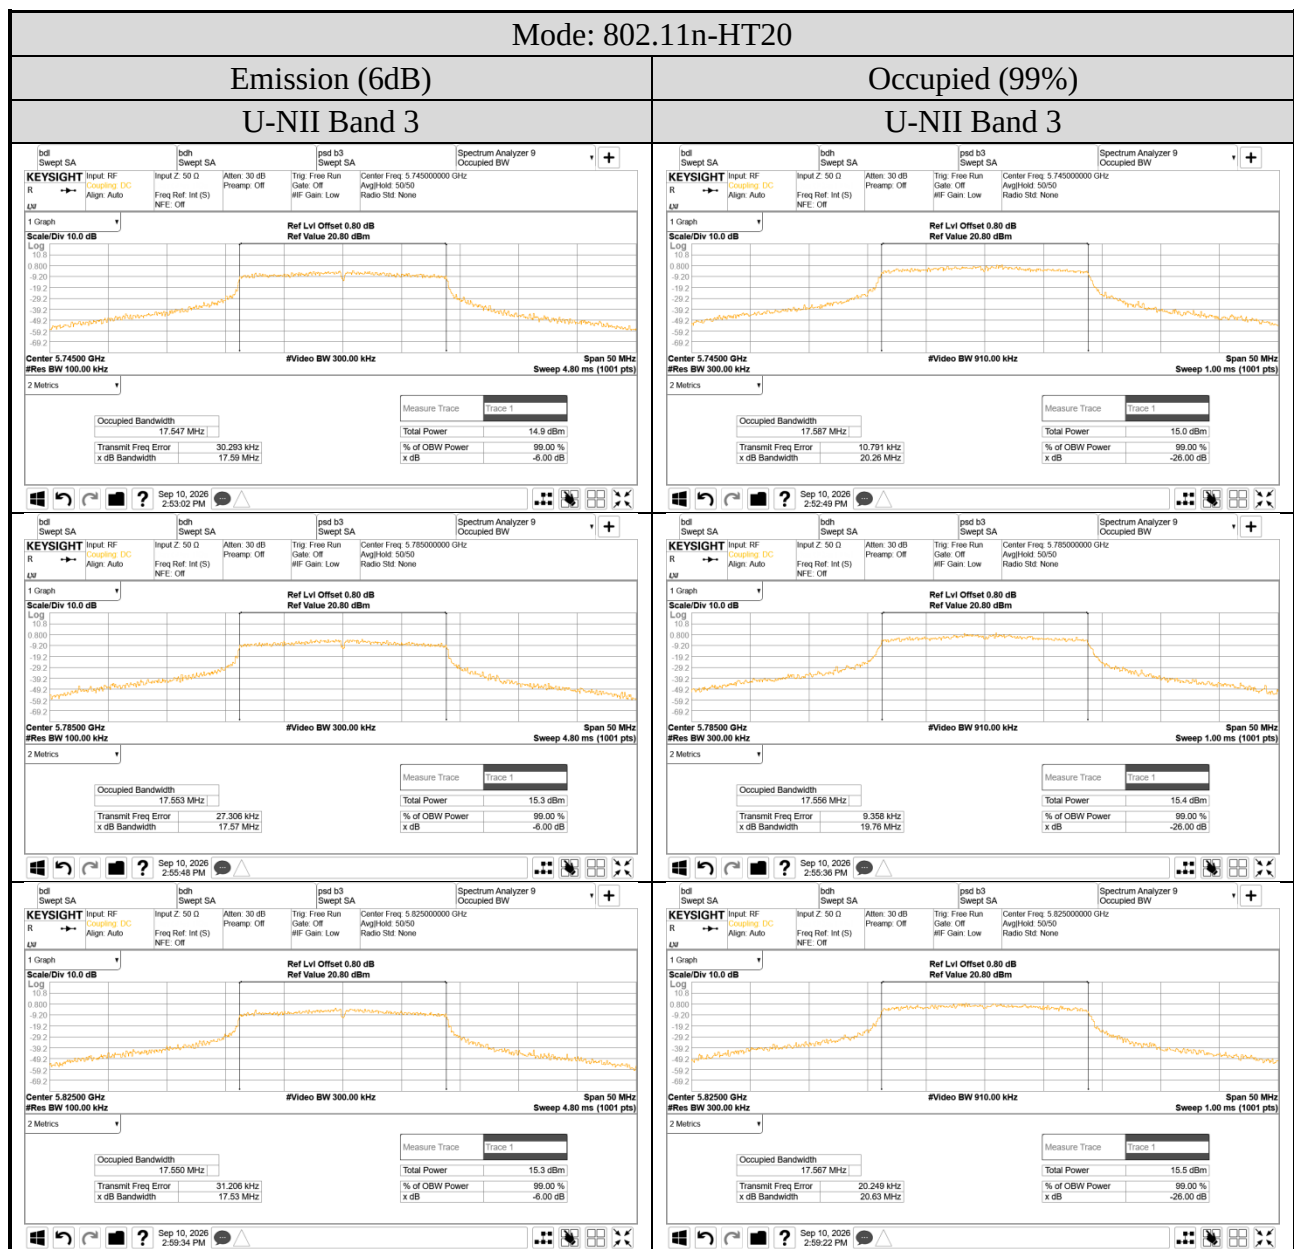


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

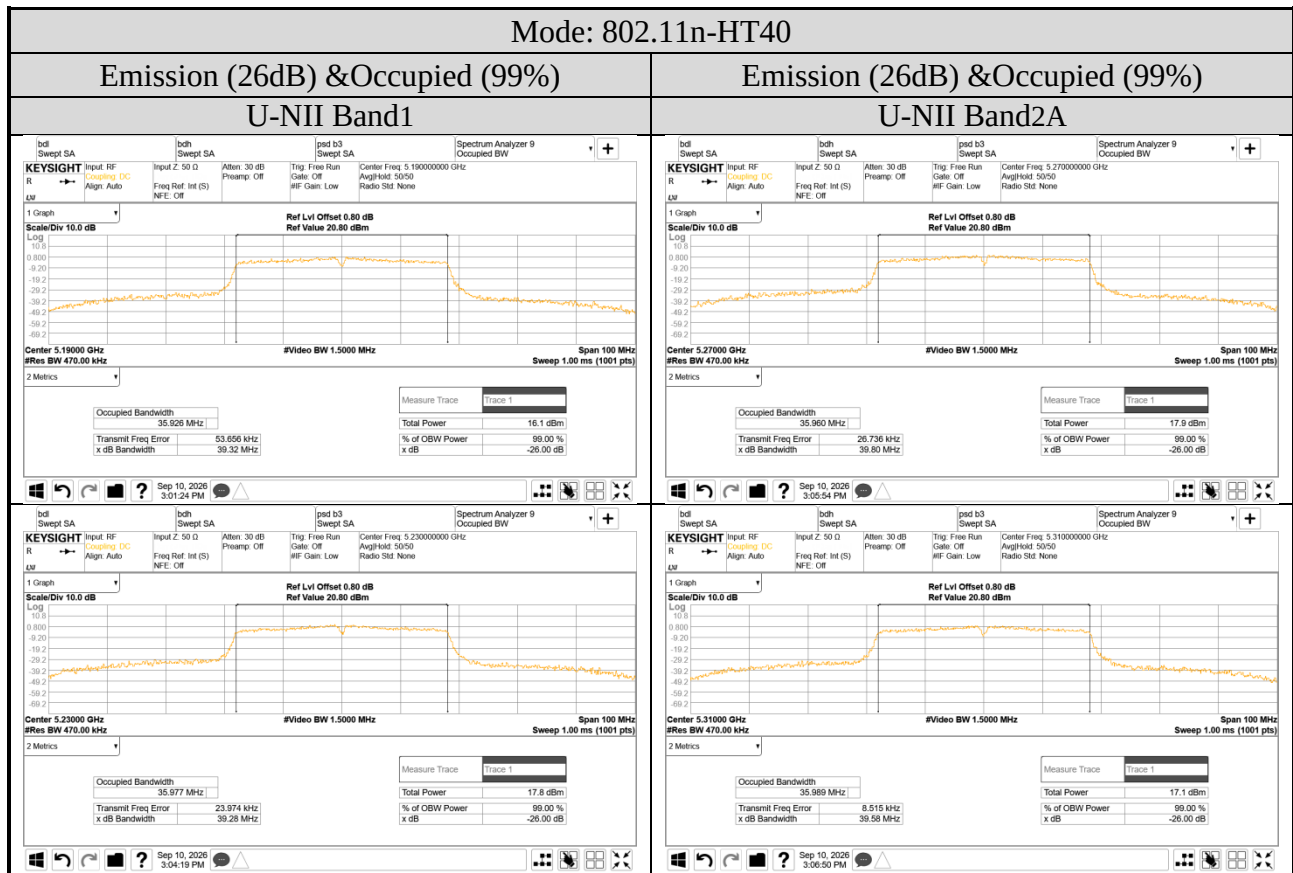


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

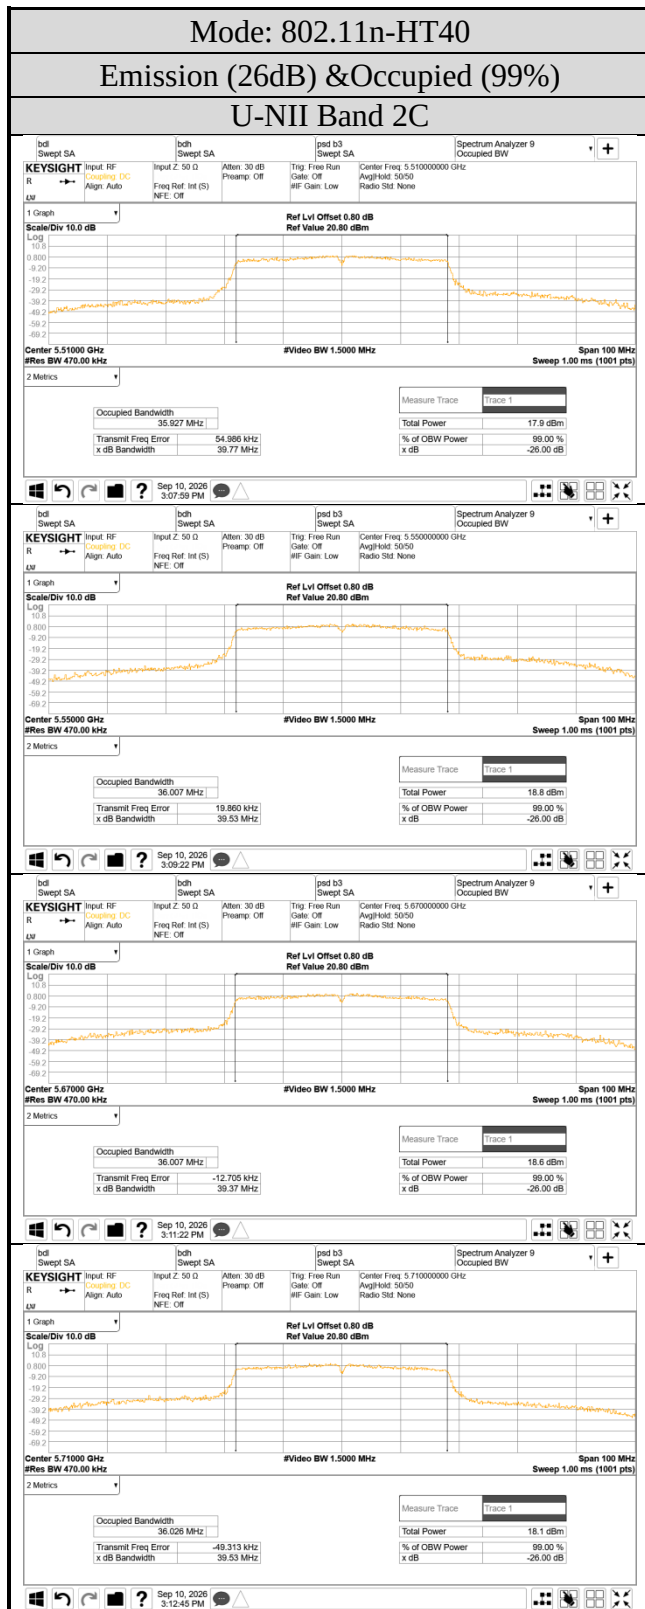


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

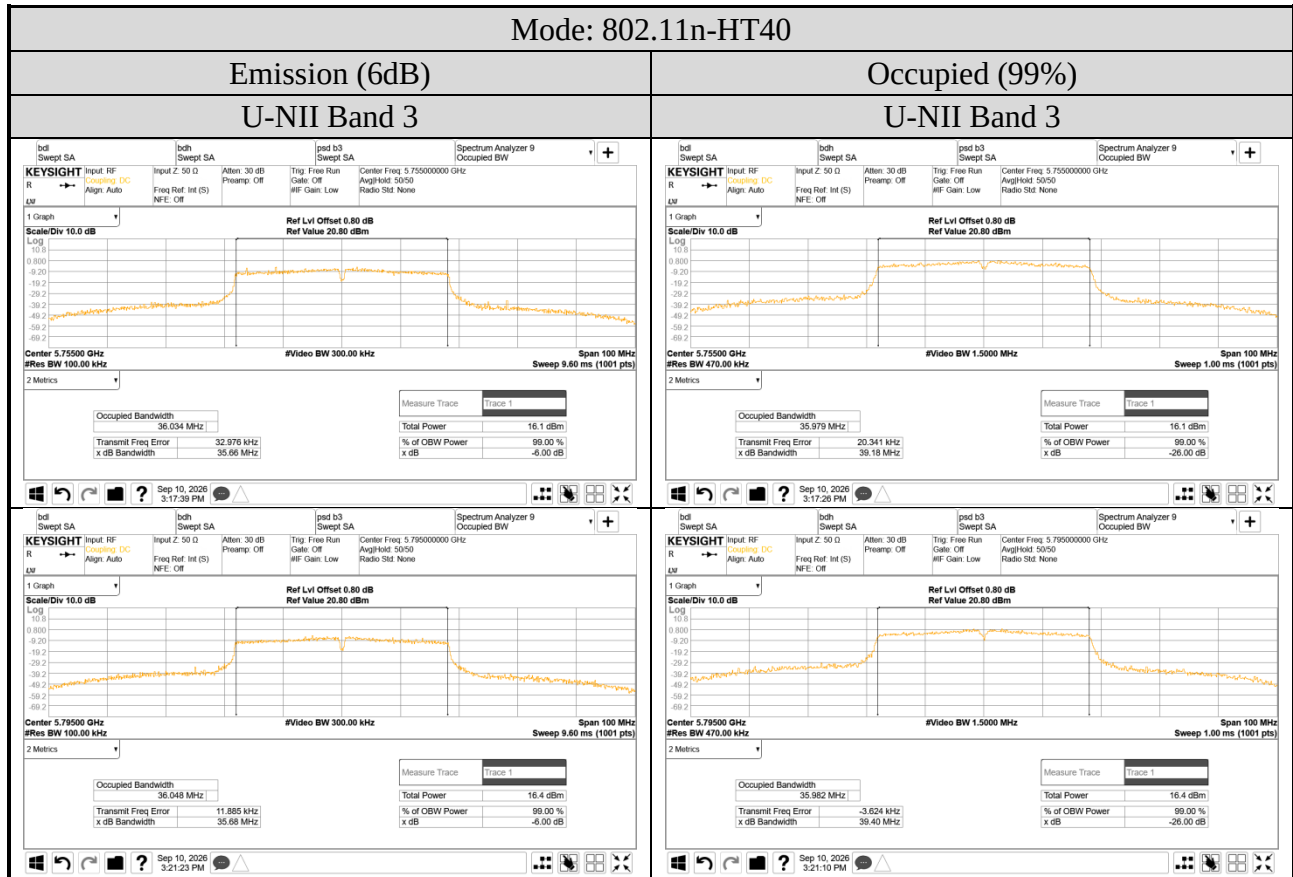



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

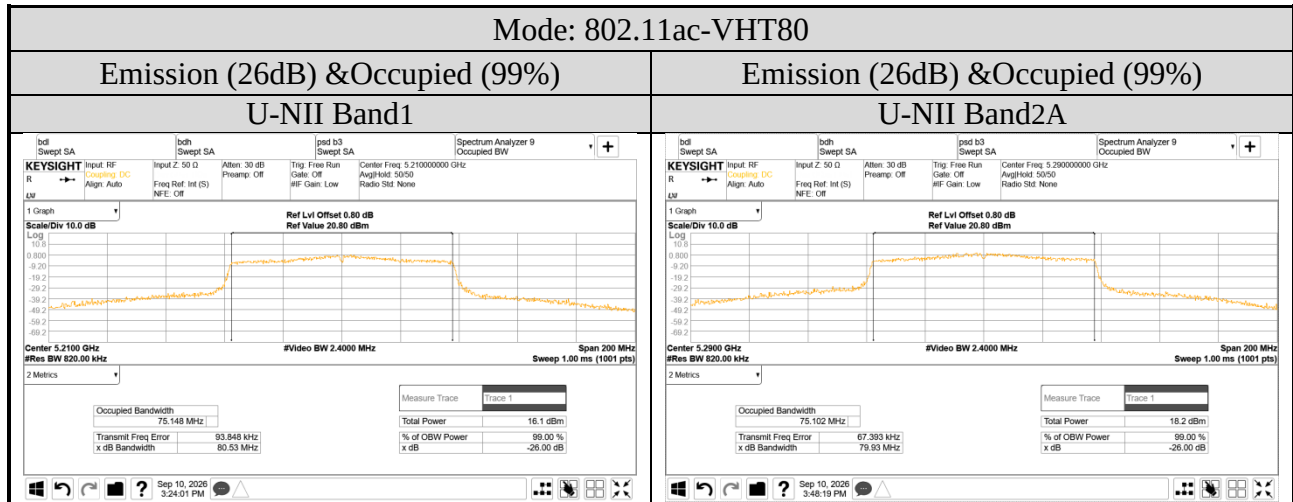

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

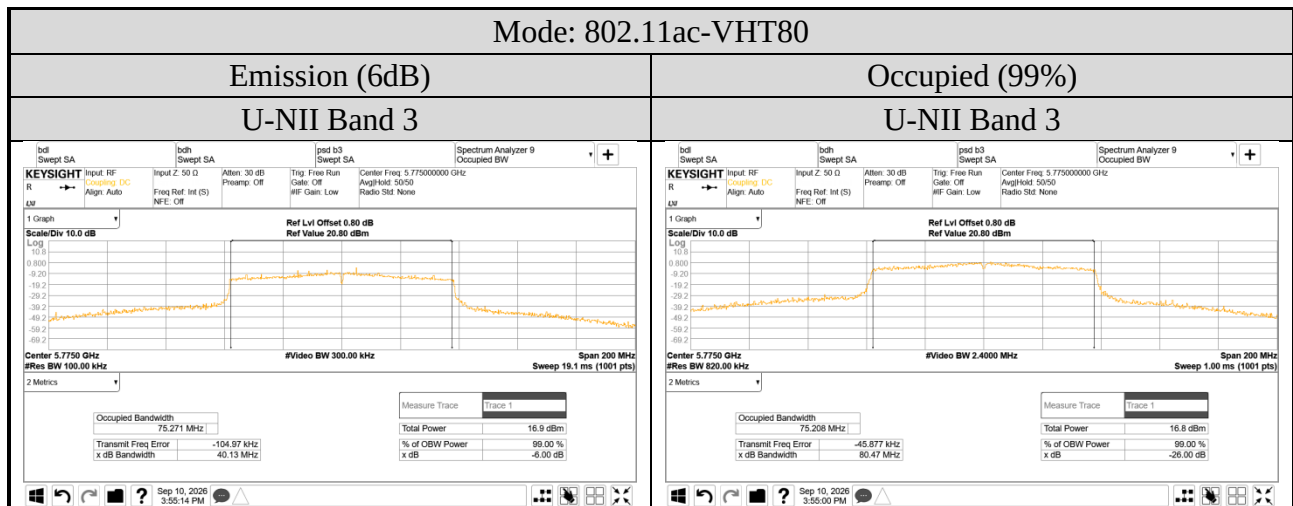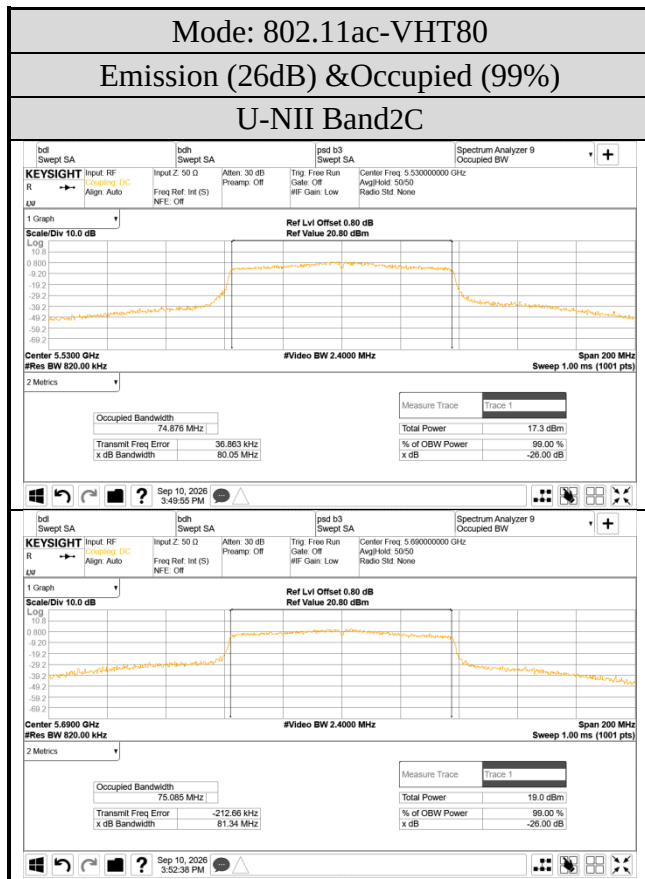

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

