

RADIO TEST REPORT

Test Report No. 16046376S-G-R1

Customer	Sony Group Corporation
Description of EUT	Wireless Noise Canceling Stereo Headset
Model Number of EUT	YY2998
FCC ID	AK8YY2998
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	December 23, 2025
Remarks	Bluetooth Low Energy part(s)

Representative Test EngineerMasahide Ozaki
Engineer**Approved By**Toyokazu Imamura
Engineer

CERTIFICATE 1266.03

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 25.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For any test report referred in this report, the latest version (including any revisions) is always referred to.
- If the latest version is a revision, it replaces the previous version. See the table below for revisions and versions.

REVISION HISTORY

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	16046376S-G	December 1, 2025	-
1	16046376S-G-R1	December 23, 2025	P.9 Added the following note: *1) The mode was tested as a representative because it had the highest power in the antenna terminal test. P.10 Added the title "Radiated Spurious Emission test and Conducted Emission". P.11 Added a new configuration diagram for the Antenna Terminal Conducted Test. P.23 Added additional descriptions for the test modes. P.33 - 34 Updated to the correct mode name. P.44 - 46 Removed the description for Ant0.

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	IEC	International Electrotechnical Commission
AC	Alternating Current	IEEE	Institute of Electrical and Electronics Engineers
AFH	Adaptive Frequency Hopping	IF	Intermediate Frequency
AM	Amplitude Modulation	ILAC	International Laboratory Accreditation Conference
Amp, AMP	Amplifier	ISED	Innovation, Science and Economic Development Canada
ANSI	American National Standards Institute	ISO	International Organization for Standardization
Ant, ANT	Antenna	JAB	Japan Accreditation Board
AP	Access Point	LAN	Local Area Network
ASK	Amplitude Shift Keying	LIMS	Laboratory Information Management System
Atten., ATT	Attenuator	MCS	Modulation and Coding Scheme
AV	Average	MRA	Mutual Recognition Arrangement
BPSK	Binary Phase-Shift Keying	N/A	Not Applicable
BR	Bluetooth Basic Rate	NIST	National Institute of Standards and Technology
BT	Bluetooth	NS	No signal detect.
BT LE	Bluetooth Low Energy	NSA	Normalized Site Attenuation
BW	BandWidth	NVLAP	National Voluntary Laboratory Accreditation Program
Cal Int	Calibration Interval	OBW	Occupied Band Width
CCK	Complementary Code Keying	OFDM	Orthogonal Frequency Division Multiplexing
Ch., CH	Channel	OFDMA	Orthogonal Frequency Division Multiple Access
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PP	Preamble Puncturing
DSSS	Direct Sequence Spread Spectrum	PRBS	Pseudo-Random Bit Sequence
EDR	Enhanced Data Rate	PSD	Power Spectral Density
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QAM	Quadrature Amplitude Modulation
EMC	ElectroMagnetic Compatibility	QP	Quasi-Peak
EMI	ElectroMagnetic Interference	QPSK	Quadri-Phase Shift Keying
EN	European Norm	RBW	Resolution Band Width
ERP, e.r.p.	Effective Radiated Power	RDS	Radio Data System
EU	European Union	RE	Radio Equipment
EUT	Equipment Under Test	RF	Radio Frequency
Fac.	Factor	RMS	Root Mean Square
FCC	Federal Communications Commission	RSS	Radio Standards Specifications
FHSS	Frequency Hopping Spread Spectrum	Rx	Receiving
FM	Frequency Modulation	SA, S/A	Spectrum Analyzer
Freq.	Frequency	SG	Signal Generator
FSK	Frequency Shift Keying	SVSWR	Site-Voltage Standing Wave Ratio
GFSK	Gaussian Frequency-Shift Keying	TR	Test Receiver
GNSS	Global Navigation Satellite System	Tx	Transmitting
GPS	Global Positioning System	VBW	Video BandWidth
Hori.	Horizontal	Vert.	Vertical
ICES	Interference-Causing Equipment Standard	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Summary	6
SECTION 4: Operation of EUT during testing	9
SECTION 5: Conducted Emission.....	12
SECTION 6: Radiated Spurious Emission.....	13
SECTION 7: Antenna Terminal Conducted Tests	15
APPENDIX 1: Test Data	16
Conducted Emission	16
99 % Occupied Bandwidth and 6 dB Bandwidth.....	17
Maximum Peak Output Power	21
Radiated Spurious Emission.....	27
Conducted Spurious Emission.....	38
Power Density.....	44
APPENDIX 2: Test Instruments	47
APPENDIX 3: Photographs of Test Setup	49
Conducted Emission	49
Radiated Spurious Emission.....	50
Pre-check of Worst Case Position	51
Antenna Terminal Conducted Tests	52

SECTION 1: Customer Information

Company Name	Sony Group Corporation
Address	1-7-1 Konan Minato-ku, Tokyo, 108-0075 Japan
Contact Person	Kouhei Nagamine

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Wireless Noise Canceling Stereo Headset
Model Number	YY2998
Serial Number	Refer to SECTION 4.2
Condition	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	October 14, 2025
Test Date	October 15 to October 27, 2025

2.2 Product Description

General Specification

Rating	DC 3.85 V (The EUT is supplied with the power from the internal battery) DC 5 V (The EUT is supplied with the power from the USB port)
Operating temperature	0 deg. C to 40 deg. C

Radio Specification

This report contains data provided by the customer which can impact the validity of results. UL Japan, Inc. is only responsible for the validity of results after the integration of the data provided by the customer. The data provided by the customer is marked "a)" in the table below.

Bluetooth (BR / EDR / Low Energy)

Equipment Type	Transceiver
Frequency of Operation	1M-PHY: 2402 MHz to 2480 MHz 2M-PHY: 2404 MHz to 2478 MHz
Type of Modulation	BT: FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK) BTLE: GFSK
Antenna Gain ^{a)}	4.16 dBi

SECTION 3: Test Summary

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

*The customer has declared that the EUT has complies with FCC Part 15 Subpart B as SDoC.

3.2 Reference Standards

ANSI/USEMCSC C63.2-2023
ANSI C63.4-2014/C63.4a-2017
ANSI C63.5-2017
ANSI C63.10-2020
ANSI/USEMCSC C63.10/Cor 1-2023
ANSI/USEMCSC C63.10a-2024 (incl. Errata) for ISED
ANSI C63.25.1-2018
KDB 558074 D01 v05r02
KDB 662911 D01 v02r01 for FCC MIMO device

3.3 Summary of Test Results

Item	Specification	Results	Remarks
Conducted Emission	FCC: Section 15.207 ISED: RSS-Gen 8.8	Complied	-
6 dB Bandwidth	FCC: Section 15.247(a)(2) ISED: RSS-247 5.2(a)	Complied	Conducted
Maximum Peak Output Power	FCC: Section 15.247(b)(3) ISED: RSS-247 5.4(d)	Complied	Conducted
Power Density	FCC: Section 15.247(e) ISED: RSS-247 5.2(b)	Complied	Conducted
Spurious Emission Restricted Band Edges	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	Complied	Conducted (below 30 MHz) / Radiated (above 30 MHz) *1)

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

*1) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.

FCC Part 15.31 (e)

This EUT provides the stable voltage constantly to RF part regardless of input voltage.
Therefore, this EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.
Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.4 Addition to Standard

Item	Specification	Results	Remarks
99% Occupied Bandwidth	ISED: -	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.5 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Item	Frequency range	Uncertainty (+/-)
Conducted Emission (AC Mains) LISN	150 kHz to 30 MHz	3.0 dB
Radiated Emission (Measurement distance: 3 m)	9 kHz to 30 MHz	3.3 dB
	30 MHz to 200 MHz	4.8 dB
	200 MHz to 1 GHz	6.1 dB
	1 GHz to 6 GHz	4.7 dB
	6 GHz to 18 GHz	5.3 dB
	18 GHz to 40 GHz	5.5 dB
Radiated Emission (Measurement distance: 1 m)	1 GHz to 18 GHz	5.6 dB
	18 GHz to 40 GHz	5.8 dB

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)	1.3 dB
Power Measurement above 1 GHz (Peak Detector)	1.5 dB
Spurious Emission (Conducted) below 1 GHz	0.93 dB
Conducted Emissions Power Density Measurement 1 GHz to 3 GHz	0.93 dB
Conducted Emissions Power Density Measurement 3 GHz to 18 GHz	3.0 dB
Spurious Emission (Conducted) 18 GHz to 26.5 GHz	2.8 dB
Spurious Emission (Conducted) 26.5 GHz to 40 GHz	2.3 dB
Bandwidth Measurement	0.012 %
Duty Cycle and Time Measurement	0.27 %
Temperature	2.2 deg.C.
Humidity	3.4 %
Voltage	0.92 %

3.6 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 Japan

Telephone: +81-463-50-6400

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test room	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber (SAC1)	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber (SAC2)	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber (SAC3)	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber (SAC4)	8.1 x 5.1 x 3.55	8.1 x 5.1	-
Wireless anechoic chamber 1 (WAC1)	9.5 x 6.0 x 5.4	9.5 x 6.0	3 m
Wireless anechoic chamber 2 (WAC2)	9.5 x 6.0 x 5.4	9.5 x 6.0	3 m
No.1 Shielded room (SR1)	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room (SR2)	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room (SR3)	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room (SR4)	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room (SR5)	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room (SR6)	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room (SR8)	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room (MR1)	2.55 x 4.1 x 2.5	-	-
No.2 Measurement room (MR2)	4.5 x 3.5 x 2.5	-	-
Wireless shielded room 1 (WSR1)	3.0 x 4.5 x 2.7	3.0 x 4.5	-
Wireless shielded room 2 (WSR2)	3.0 x 4.5 x 2.7	3.0 x 4.5	-

3.7 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)


Mode	Remarks*
Bluetooth Low Energy (BT LE) Uncoded 1M-PHY (1M)	Maximum Packet Size, PRBS9
Bluetooth Low Energy (BT LE) Uncoded 2M-PHY (2M)	Maximum Packet Size, PRBS9
*Power of the EUT was set by the software as follows; Power Setting: 51 (This setting values are a unitless value (not dBm).) Software: Headset_BT_Test Ver: v002 (Date: 2025.10 14, Storage location: Driven by connected PC) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*The Details of Operating Mode(s)

Test Item	Operating Mode	Tested Frequency
Conducted Emission, Radiated Spurious Emission (Below 1 GHz)	Tx BT LE 2M-PHY, 2478 MHz (AC 120 V/ 60 Hz) *1)	2478 MHz
Radiated Spurious Emission (Above 1 GHz), Maximum Peak Output Power, Power Density, 6 dB Bandwidth, 99% Occupied Bandwidth, Conducted Spurious Emission	BT LE 1M-PHY BT LE 2M-PHY	BT LE 1M-PHY: 2402 MHz 2440 MHz 2480 MHz BT LE 2M-PHY: 2404 MHz 2440 MHz 2478 MHz
*1) The mode was tested as a representative, because it had the highest power at antenna terminal test.		

4.2 Configuration and Peripherals

[Radiated Spurious Emission test and Conducted Emission test]

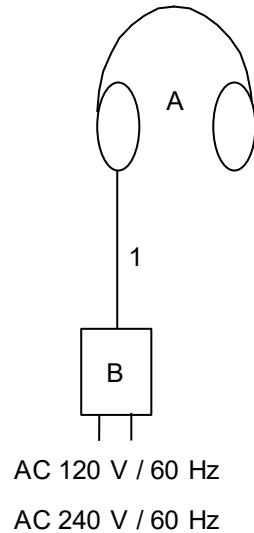

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

*As a result of comparing AC 120 V and AC 240 V at pre-check, conducted emission test was performed with AC 120 V of the worst voltage as representative.


Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Wireless Noise Canceling Stereo Headset	YY2998	1100474	Sony Group Corporation	EUT
B	AC Adaptor	AC-UUD12	19121AQ2017944	Sony Group Corporation	-

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB	1.0	Shielded	Shielded	-

[Antenna Terminal Conducted test]

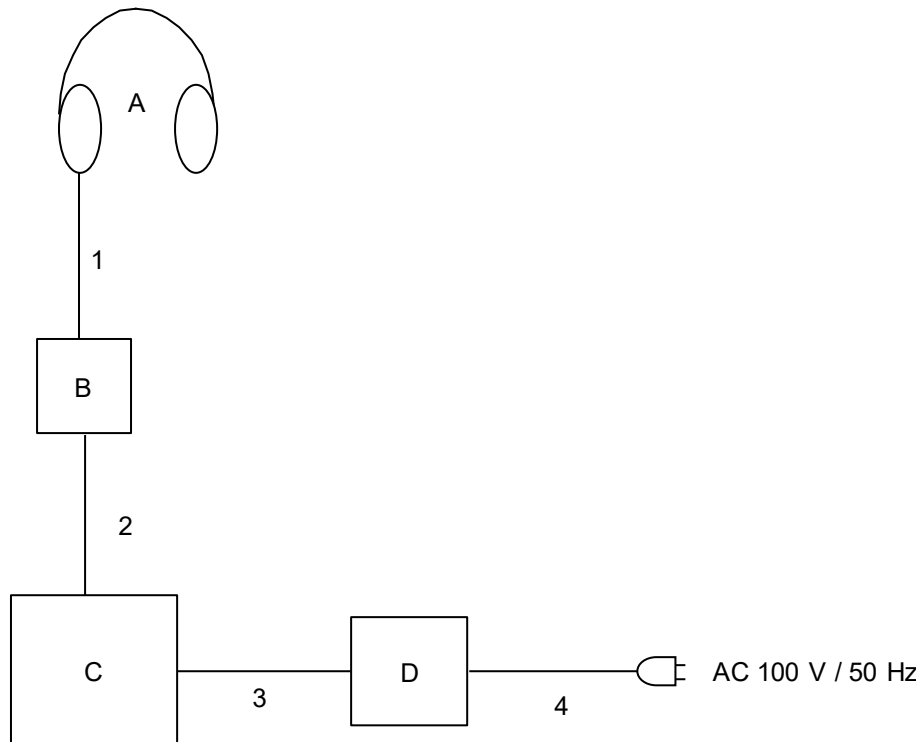

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Wireless Noise Canceling Stereo Headset	YY2998	1100414	Sony Group Corporation	EUT
B	Jig	-	-	Sony	-
C	Laptop Computer	ThinkPad L580	PF-1PLZHX	LENOVO	-
D	AC Adapter	ADLX45YLC2A	8SSA10E75844C1SG94BG7T0	LENOVO	-

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB	1.5	Shielded	Shielded	-
2	USB	0.2	Shielded	Shielded	
3	DC	1.8	Unshielded	Unshielded	
4	AC	0.9	Unshielded	Unshielded	

SECTION 5: Conducted Emission

Test Procedure and Conditions

EUT was placed on the platform of nominal size, 0.8 m by 1.6 m, raised 0.8 m above the conducting ground plane.

The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN).

For the tests on EUT with other peripherals (as a whole system)

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Shielded Room.


The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Test results are rounded off and limit are rounded down, so some differences might be observed.

Detector	: QP and CISPR AV
Measurement Range	: 0.15 MHz to 30 MHz
Test Data	: APPENDIX
Test Result	: Pass

Figure 1: Test Setup

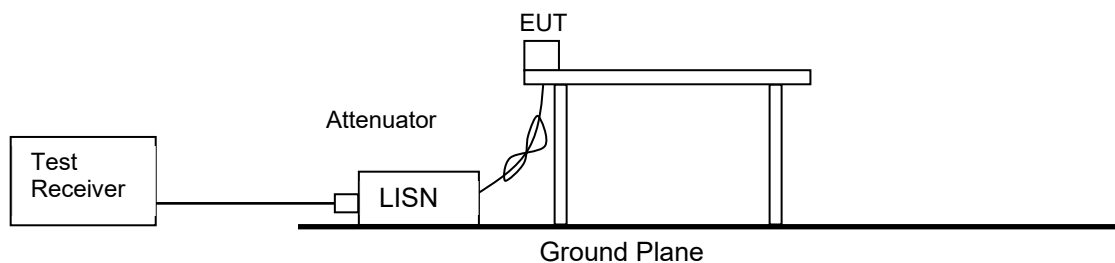

SECTION 6: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on the platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on the platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn




In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

It was measured with the settings below based on ANSI C63.10.

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument Used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	11.12.2.5.2 RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (Linear voltage) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

Figure 2: Test Setup

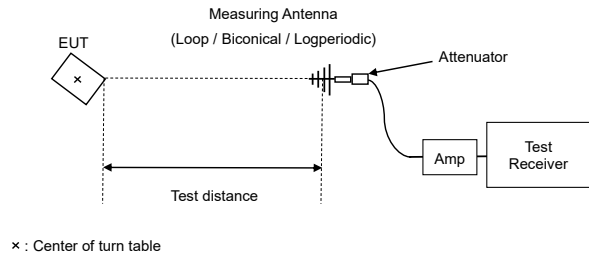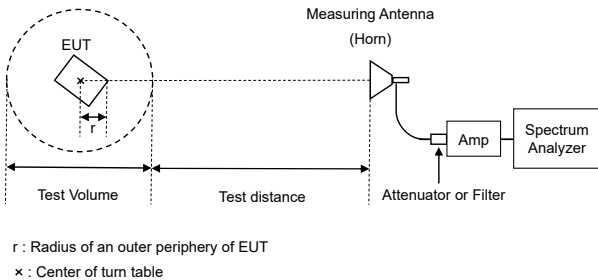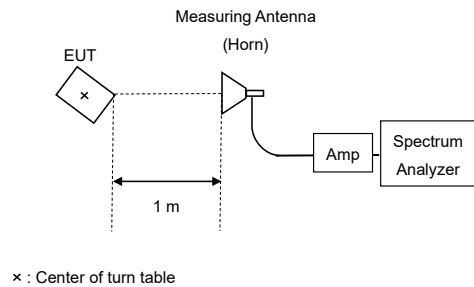Below 1 GHz	
 × : Center of turn table	Test Distance: 3 m
1 GHz to 10 GHz	
 r : Radius of an outer periphery of EUT × : Center of turn table	Distance Factor: $20 \times \log (3.91 \text{ m}^* / 3.0 \text{ m}) = 2.29 \text{ dB}$ $*(\text{Test Distance} + \text{SVSWR Volume} / 2) - r = 3.91 \text{ m}$ Test Distance: 3 m SVSWR Volume: 2 m (SVSWR Volume has been calibrated based on CISPR 16-1-4.) r: 0.095 m
10 GHz to 26.5 GHz	
 × : Center of turn table	Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$ *Test Distance: 1 m

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test results are rounded off and limit are rounded down, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
6 dB Bandwidth	Enough width to display emission skirts	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Peak Power Density	1.5 times the 6 dB Bandwidth	3 kHz	9.1 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2020".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.
Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.
(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)

*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to 45.5 - 51.5 = -6.0 dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

Test results are rounded off and limit are rounded down, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.


Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test Data

Conducted Emission

Mode	Tx BT LE 2M-PHY, 2478 MHz (AC 120 V/ 60 Hz)			
Date	Test site	Temperature	Humidity	Engineer
October 27, 2025	SR8	24 deg. C	54 % RH	Masahide Ozaki

Limit : FCC_Part 15 subpart C(15.207)

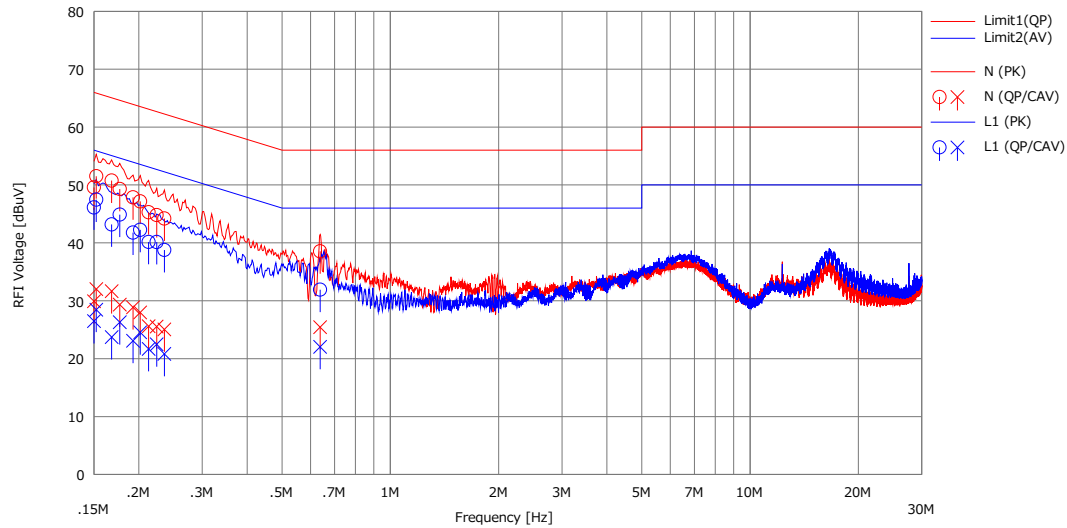

No.	Freq. [MHz]	Reading		C.Fac	Results		Limit		Margin		Phase	Comment
		<QP> [dBuV]	<CAV> [dBuV]		<QP> [dBuV]	<CAV> [dBuV]	<QP> [dBuV]	<AV> [dBuV]	<QP> [dB]	<AV> [dB]		
1	0.15000	34.43	14.77	15.15	49.58	29.92	66.00	56.00	16.4	26.0	N	
2	0.15230	36.36	16.86	15.15	51.51	32.01	65.87	55.87	14.3	23.8	N	
3	0.16810	35.59	16.47	15.17	50.76	31.64	65.05	55.05	14.2	23.4	N	
4	0.17700	34.14	14.17	15.17	49.31	29.34	64.63	54.63	15.3	25.2	N	
5	0.19270	32.71	13.72	15.15	47.86	28.87	63.92	53.92	16.0	25.0	N	
6	0.20170	32.00	12.83	15.15	47.15	27.98	63.54	53.54	16.3	25.5	N	
7	0.21300	30.12	10.42	15.16	45.28	25.58	63.09	53.09	17.8	27.5	N	
8	0.22420	29.63	10.38	15.16	44.79	25.54	62.66	52.66	17.8	27.1	N	
9	0.23550	29.04	9.89	15.16	44.20	25.05	62.25	52.25	18.0	27.2	N	
10	0.63820	23.34	10.25	15.18	38.52	25.43	56.00	46.00	17.4	20.5	N	
11	0.15000	30.98	11.36	15.14	46.12	26.50	66.00	56.00	19.8	29.5	L1	
12	0.15230	32.32	13.31	15.14	47.46	28.45	65.87	55.87	18.4	27.4	L1	
13	0.16810	28.02	8.58	15.15	43.17	23.73	65.05	55.05	21.8	31.3	L1	
14	0.17700	29.72	11.16	15.15	44.87	26.31	64.63	54.63	19.7	28.3	L1	
15	0.19270	26.61	7.93	15.16	41.77	23.09	63.92	53.92	22.1	30.8	L1	
16	0.20170	27.08	9.41	15.16	42.24	24.57	63.54	53.54	21.3	28.9	L1	
17	0.21300	24.99	6.52	15.16	40.15	21.68	63.09	53.09	22.9	31.4	L1	
18	0.22420	24.97	7.32	15.16	40.13	22.48	62.66	52.66	22.5	30.1	L1	
19	0.23550	23.62	5.66	15.15	38.77	20.81	62.25	52.25	23.4	31.4	L1	
20	0.63820	16.74	6.87	15.17	31.91	22.04	56.00	46.00	24.0	23.9	L1	

Calculation: Result[dBuV]=Reading[dBuV]+C.Fac(LISN(AMN)+Cable+ATT)[dB]
LISN(AMN): LIMS ID 145539

99 % Occupied Bandwidth and 6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Place	Temperature	Humidity	Engineer
October 16, 2025	SR5	27 deg.C	52 %RH	Masahide Ozaki

BT LE 1M-PHY

Tested Frequency [MHz]	99 % Occupied Bandwidth [kHz]	6 dB Bandwidth [MHz]	Limit for 6 dB Bandwidth [MHz]
2402	1046.2	0.700	> 0.5000
2440	1046.6	0.702	> 0.5000
2480	1046.3	0.702	> 0.5000

99 % Occupied Bandwidth and 6 dB Bandwidth

Mode	Tx			
------	----	--	--	--


Date	Test Place	Temperature	Humidity	Engineer
October 25, 2025	SR5	24 deg.C	42 %RH	Masahide Ozaki

BT LE 2M-PHY

Tested Frequency [MHz]	99 % Occupied Bandwidth [kHz]	6 dB Bandwidth [MHz]	Limit for 6 dB Bandwidth [MHz]
2404	2063.0	1.208	> 0.5000
2440	2062.4	1.230	> 0.5000
2478	2062.5	1.230	> 0.5000


99 % Occupied Bandwidth and 6 dB Bandwidth

BT LE 1M-PHY

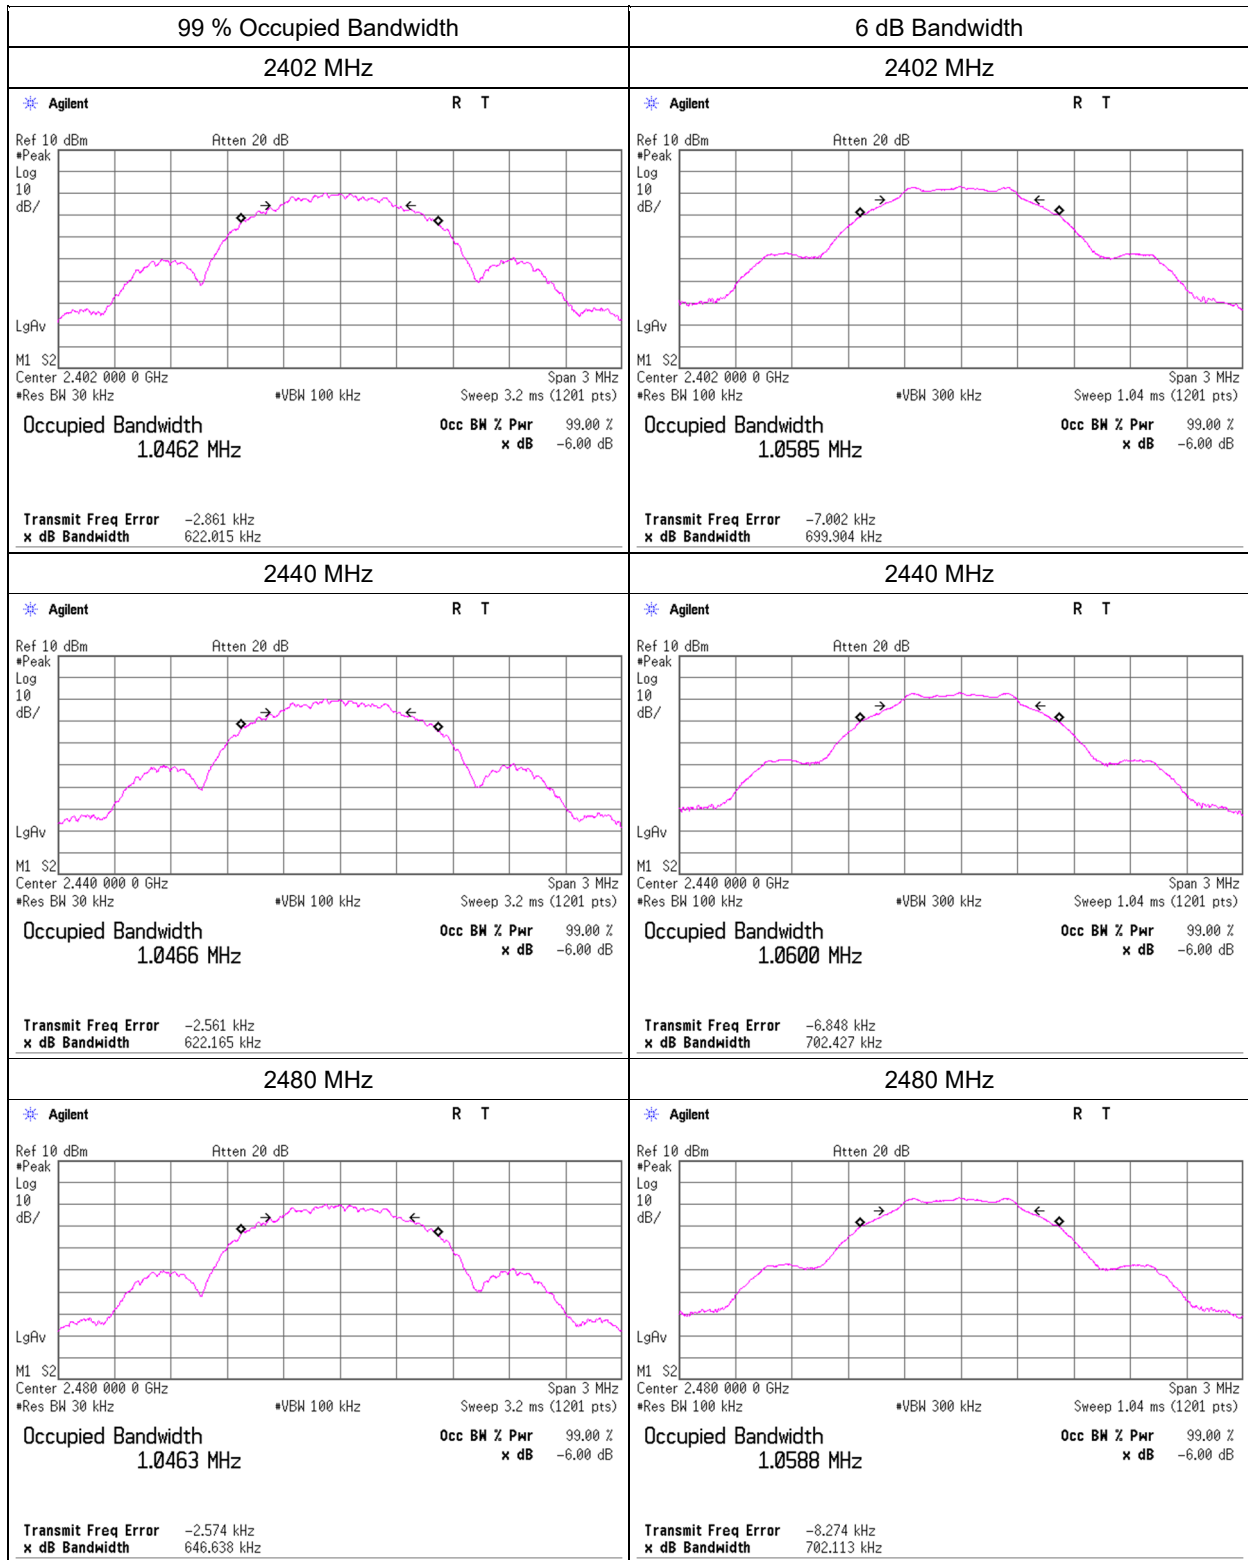

99 % Occupied Bandwidth and 6 dB Bandwidth

BT LE 2M-PHY

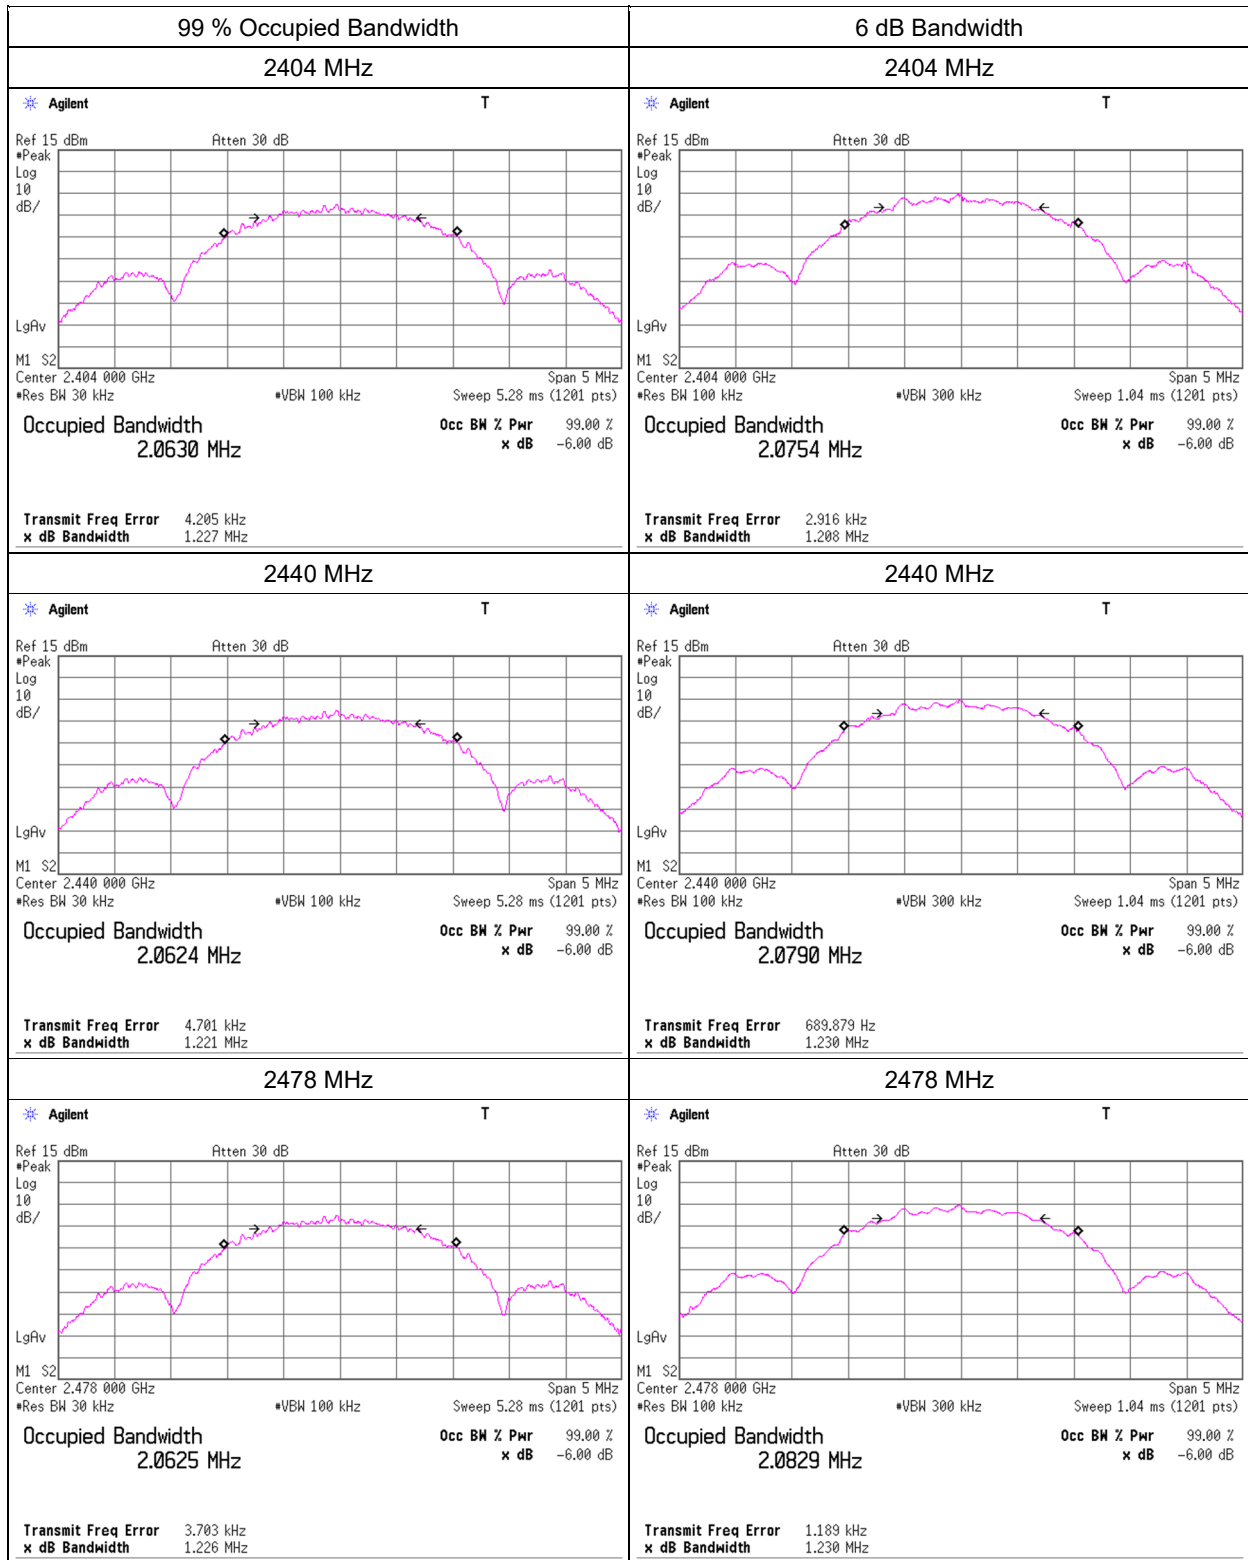

Maximum Peak Output Power

Mode	Tx BT LE 1M-PHY
------	-----------------

Date	Test Place	Temperature	Humidity	Engineer
October 16, 2025	SR5	27 deg.C	52 %RH	Masahide Ozaki

BT LE 1M-PHY

Tested Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					Antenna Gain [dBi]	e.i.r.p. for RSS-247				
				Result [dBm]	[mW]	Limit [dBm]	[mW]	Margin [dB]		Result [dBm]	[mW]	Limit [dBm]	[mW]	Margin [dB]
2402	-6.30	1.19	9.95	4.84	3.05	30.00	1000.00	25.16	4.16	9.00	7.95	36.02	4000.00	27.02
2440	-6.35	1.19	9.95	4.80	3.02	30.00	1000.00	25.20	4.16	8.96	7.88	36.02	4000.00	27.06
2480	-6.32	1.20	9.95	4.84	3.05	30.00	1000.00	25.16	4.16	9.00	7.95	36.02	4000.00	27.02

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Maximum Peak Output Power

Mode	Tx BT LE 2M-PHY
------	-----------------

Date	Test Place	Temperature	Humidity	Engineer
October 16, 2025	SR5	27 deg.C	52 %RH	Masahide Ozaki
October 19, 2025	SR5	24 deg.C	61 %RH	Takayuki Kobayashi

BT LE 2M-PHY

Tested Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					Antenna Gain [dBi]	e.i.r.p. for RSS-247				
				Result		Limit		Margin		Result		Limit		Margin
				[dBm]	[mW]	[dBm]	[mW]	[dB]		[dBm]	[mW]	[dBm]	[mW]	[dB]
2404	-6.31	1.19	9.95	4.83	3.05	30.00	1000.00	25.17	4.16	8.99	7.93	36.02	4000.00	27.03
2440	-6.34	1.19	9.95	4.81	3.03	30.00	1000.00	25.19	4.16	8.97	7.89	36.02	4000.00	27.05
2478	-6.30	1.20	9.95	4.86	3.07	30.00	1000.00	25.14	4.16	9.02	7.98	36.02	4000.00	27.00

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Average Output Power

Mode	Tx BT LE 1M-PHY			
------	-----------------	--	--	--

Date	Test Place	Temperature	Humidity	Engineer
October 16, 2025	SR5	27 deg.C	52 %RH	Masahide Ozaki

BT LE 1M-PHY

Tested Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty Factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-7.27	1.19	9.95	3.87	2.44	0.72	4.59	2.88
2440	-7.31	1.19	9.95	3.84	2.43	0.72	4.56	2.86
2480	-7.27	1.20	9.95	3.89	2.45	0.72	4.61	2.90

Sample Calculation:

Result (Time average)= Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

Result (Burst power average) = Time average + Duty Factor

Average Output Power

Mode	Tx BT LE 2M-PHY
------	-----------------

Date	Test Place	Temperature	Humidity	Engineer
October 16, 2025	SR5	27 deg.C	52 %RH	Masahide Ozaki
October 19, 2025	SR5	24 deg.C	61 %RH	Takayuki Kobayashi

BT LE 2M-PHY

Tested Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty Factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2404	-9.02	1.19	9.95	2.12	1.63	2.47	4.59	2.88
2440	-9.06	1.19	9.95	2.09	1.62	2.47	4.56	2.86
2478	-9.01	1.20	9.95	2.15	1.65	2.47	4.62	2.90

Sample Calculation:


Result (Time average)= Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

Result (Burst power average) = Time average + Duty Factor

Burst rate confirmation

Mode	Tx BT LE 1M-PHY			
------	-----------------	--	--	--


Date	Test Place	Temperature	Humidity	Engineer
October 16, 2025	SR5	27 deg.C	52 %RH	Masahide Ozaki

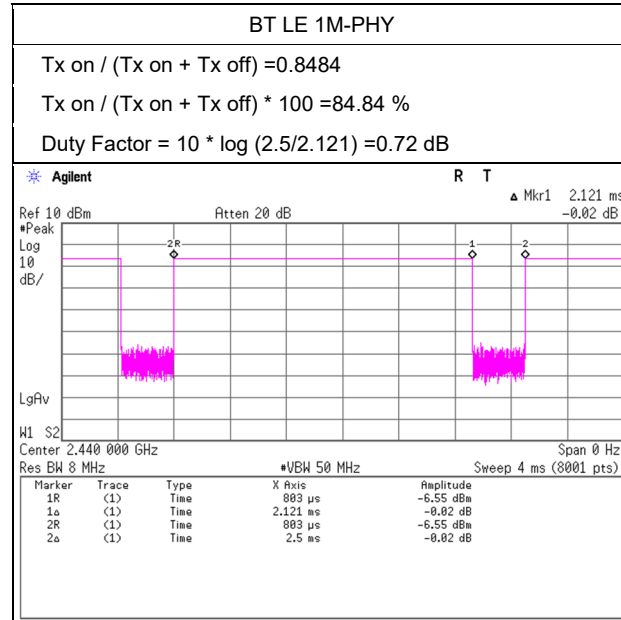

Burst rate confirmation

Mode	Tx BT LE 2M-PHY			
------	-----------------	--	--	--

Date	Test Place	Temperature	Humidity	Engineer
October 16, 2025	SR5	27 deg.C	52 %RH	Masahide Ozaki

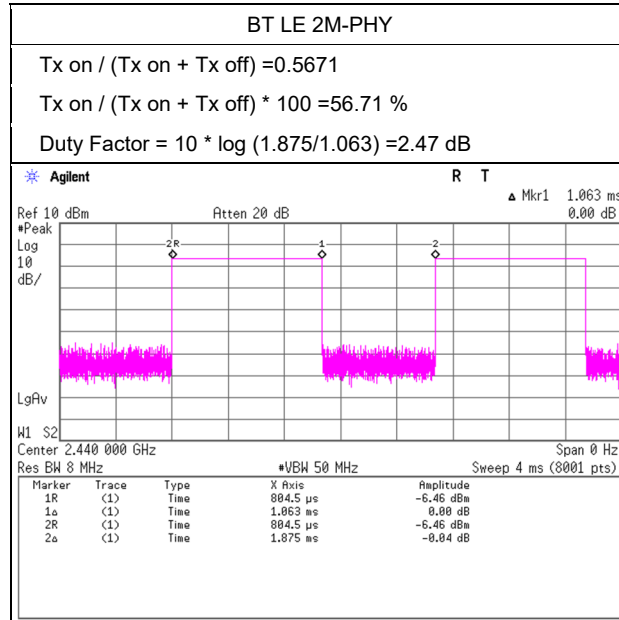

Radiated Spurious Emission

Mode	Tx BT LE 1M-PHY 2402 MHz
------	--------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 15, 2025	WAC2	25 deg. C	60 % RH	Yuta Shiba	1 GHz to 10 GHz
October 16, 2025	WAC2	23 deg. C	61 % RH	Yuta Shiba	10 GHz to 26.5 GHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	2390.000	PK	47.19	27.71	-28.27	-	2.29	48.92	73.9	24.9	219	119	-
Hori.	4804.000	PK	46.61	31.83	-35.97	-	2.29	44.76	73.9	29.1	150	0	Floor Noise
Hori.	7206.000	PK	46.55	36.28	-34.41	-	2.29	50.71	73.9	23.1	150	0	Floor Noise
Hori.	9608.000	PK	45.62	38.04	-31.33	-	2.29	54.62	73.9	19.2	150	0	Floor Noise
Hori.	4804.000	AV	35.18	31.83	-35.97	-	2.29	33.33	53.9	20.5	150	0	Floor Noise
Hori.	7206.000	AV	35.09	36.28	-34.41	-	2.29	39.25	53.9	14.6	150	0	Floor Noise
Hori.	9608.000	AV	34.88	38.04	-31.33	-	2.29	43.88	53.9	10.0	150	0	Floor Noise
Vert.	2390.000	PK	46.76	27.71	-28.27	-	2.29	48.49	73.9	25.4	324	122	-
Vert.	4804.000	PK	46.43	31.83	-35.97	-	2.29	44.58	73.9	29.3	150	0	Floor Noise
Vert.	7206.000	PK	46.49	36.28	-34.41	-	2.29	50.65	73.9	23.2	150	0	Floor Noise
Vert.	9608.000	PK	46.28	38.04	-31.33	-	2.29	55.28	73.9	18.6	150	0	Floor Noise
Vert.	4804.000	AV	35.35	31.83	-35.97	-	2.29	33.50	53.9	20.4	150	0	Floor Noise
Vert.	7206.000	AV	35.44	36.28	-34.41	-	2.29	39.60	53.9	14.3	150	0	Floor Noise
Vert.	9608.000	AV	34.63	38.04	-31.33	-	2.29	43.63	53.9	10.2	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91 [m] / 3.0 [m]) = 2.29 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Average measurement value with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	35.19	27.71	-28.27	-	0.72	2.29	37.64	53.9	16.2	*1)
Vert.	2390.000	AV	35.23	27.71	-28.27	-	0.72	2.29	37.68	53.9	16.2	*1)

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91 [m] / 3.0 [m]) = 2.29 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet

(RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	100.79	27.74	-28.26	-	2.29	102.56	-	-	Carrier
Hori.	2400.000	PK	41.65	27.73	-28.26	-	2.29	43.41	82.5	39.0	-
Vert.	2402.000	PK	99.77	27.74	-28.26	-	2.29	101.54	-	-	Carrier
Vert.	2400.000	PK	41.81	27.73	-28.26	-	2.29	43.57	81.5	37.9	-



Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91 [m] / 3.0 [m]) = 2.29 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx BT LE 1M-PHY 2402 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 15, 2025	WAC2	25 deg. C	60 % RH	Yuta Shiba	1 GHz to 10 GHz

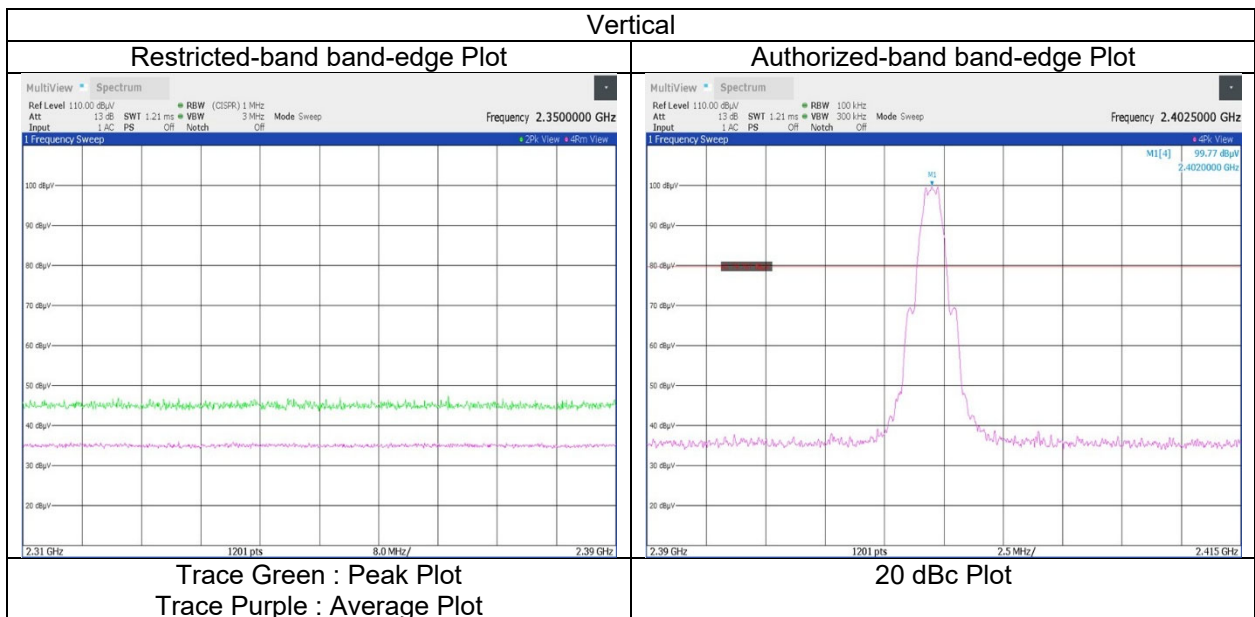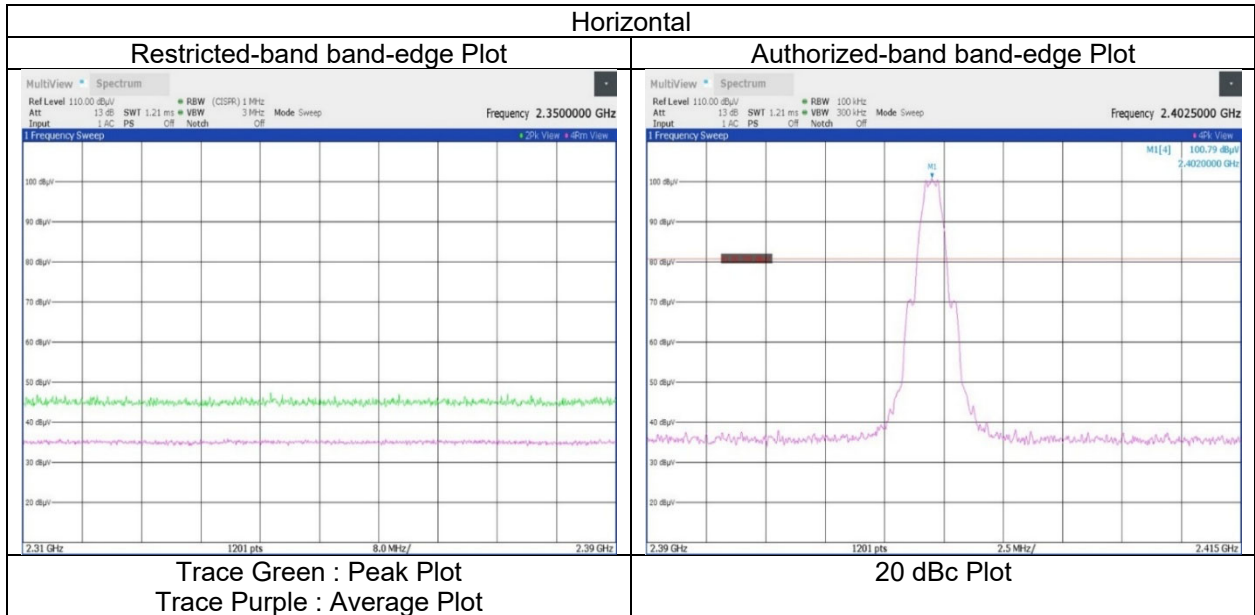

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Mode	Tx BT LE 1M-PHY 2440 MHz
------	--------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 15, 2025	WAC2	25 deg. C	60 % RH	Yuta Shiba	1 GHz to 10 GHz
October 16, 2025	WAC2	23 deg. C	61 % RH	Yuta Shiba	10 GHz to 26.5 GHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	4880.000	PK	46.66	32.27	-35.95	-	2.29	45.27	73.9	28.6	150	0	Floor Noise
Hori.	7320.000	PK	46.52	36.66	-34.20	-	2.29	51.27	73.9	22.6	150	0	Floor Noise
Hori.	9760.000	PK	45.70	38.09	-31.13	-	2.29	54.95	73.9	18.9	150	0	Floor Noise
Hori.	4880.000	AV	34.94	32.27	-35.95	-	2.29	33.55	53.9	20.3	150	0	Floor Noise
Hori.	7320.000	AV	35.31	36.66	-34.20	-	2.29	40.06	53.9	13.8	150	0	Floor Noise
Hori.	9760.000	AV	34.23	38.09	-31.13	-	2.29	43.48	53.9	10.4	150	0	Floor Noise
Vert.	4880.000	PK	47.00	32.27	-35.95	-	2.29	45.61	73.9	28.2	150	0	Floor Noise
Vert.	7320.000	PK	46.21	36.66	-34.20	-	2.29	50.96	73.9	22.9	150	0	Floor Noise
Vert.	9760.000	PK	45.08	38.09	-31.13	-	2.29	54.33	73.9	19.5	150	0	Floor Noise
Vert.	4880.000	AV	34.98	32.27	-35.95	-	2.29	33.59	53.9	20.3	150	0	Floor Noise
Vert.	7320.000	AV	35.40	36.66	-34.20	-	2.29	40.15	53.9	13.7	150	0	Floor Noise
Vert.	9760.000	AV	34.54	38.09	-31.13	-	2.29	43.79	53.9	10.1	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91[m] / 3.0[m]) = 2.29 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx BT LE 1M-PHY 2480 MHz
------	--------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 15, 2025	WAC2	25 deg. C	60 % RH	Yuta Shiba	1 GHz to 10 GHz
October 16, 2025	WAC2	23 deg. C	61 % RH	Yuta Shiba	10 GHz to 26.5 GHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	2483.500	PK	47.54	27.77	-28.21	-	2.29	49.39	73.9	24.5	178	95	-
Hori.	4960.000	PK	47.55	32.58	-35.92	-	2.29	46.50	73.9	27.4	150	0	Floor Noise
Hori.	7440.000	PK	46.26	36.79	-33.97	-	2.29	51.37	73.9	22.5	150	0	Floor Noise
Hori.	9920.000	PK	45.58	38.15	-30.92	-	2.29	55.10	73.9	18.8	150	0	Floor Noise
Hori.	4960.000	AV	35.51	32.58	-35.92	-	2.29	34.46	53.9	19.4	150	0	Floor Noise
Hori.	7440.000	AV	35.31	36.79	-33.97	-	2.29	40.42	53.9	13.4	150	0	Floor Noise
Hori.	9920.000	AV	34.90	38.15	-30.92	-	2.29	44.42	53.9	9.4	150	0	Floor Noise
Vert.	2483.500	PK	46.91	27.77	-28.21	-	2.29	48.76	73.9	25.1	109	100	-
Vert.	4960.000	PK	47.26	32.58	-35.92	-	2.29	46.21	73.9	27.6	150	0	Floor Noise
Vert.	7440.000	PK	46.13	36.79	-33.97	-	2.29	51.24	73.9	22.6	150	0	Floor Noise
Vert.	9920.000	PK	45.59	38.15	-30.92	-	2.29	55.11	73.9	18.7	150	0	Floor Noise
Vert.	4960.000	AV	35.49	32.58	-35.92	-	2.29	34.44	53.9	19.4	150	0	Floor Noise
Vert.	7440.000	AV	35.33	36.79	-33.97	-	2.29	40.44	53.9	13.4	150	0	Floor Noise
Vert.	9920.000	AV	34.54	38.15	-30.92	-	2.29	44.06	53.9	9.8	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91 [m] / 3.0 [m]) = 2.29 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Average measurement value with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	35.46	27.77	-28.21	-	0.72	2.29	38.03	53.9	15.8	*1)
Vert.	2483.500	AV	35.34	27.77	-28.21	-	0.72	2.29	37.91	53.9	15.9	*1)

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91 [m] / 3.0 [m]) = 2.29 [dB]$



10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

Radiated Spurious Emission

Mode	Tx BT LE 1M-PHY 2480 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 15, 2025	WAC2	25 deg. C	60 % RH	Yuta Shiba	1 GHz to 10 GHz

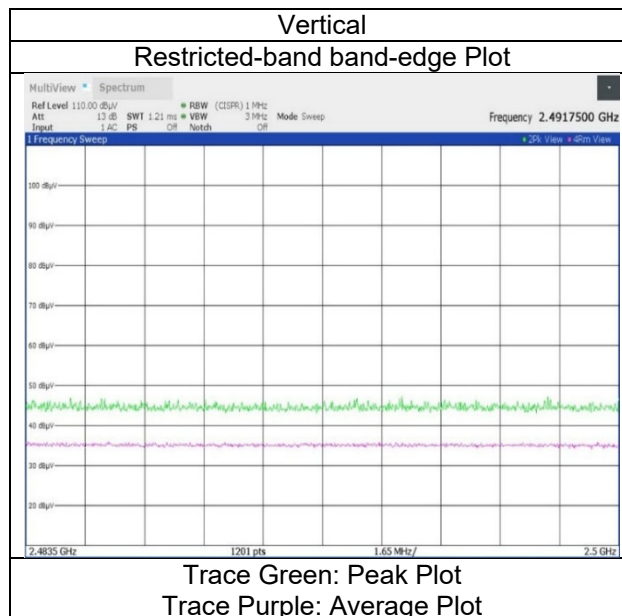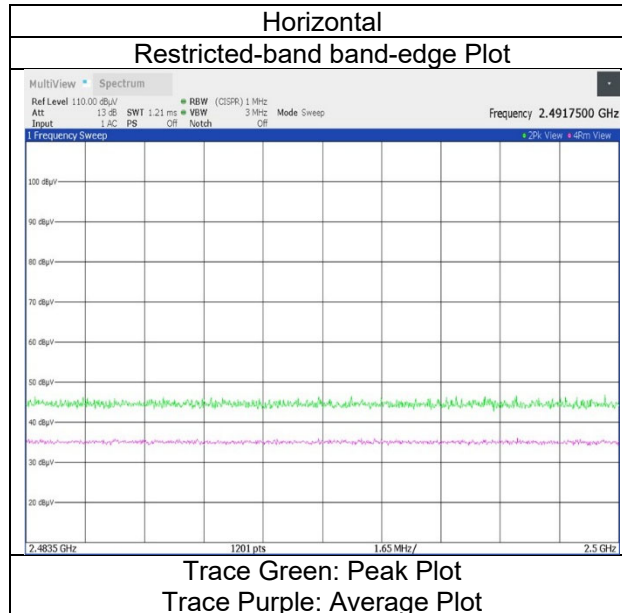

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx BT LE 2M-PHY 2404 MHz											
------	--------------------------	--	--	--	--	--	--	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 17, 2025	WAC2	23 deg. C	67 % RH	Hiromasa Sato	1 GHz to 26.5 GHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Distance	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[deg.]	
Hori.	2390.000	PK	46.70	27.71	-28.27	-	2.29	48.43	73.9	25.4	131	115	-
Hori.	4808.000	PK	46.50	31.86	-35.97	-	2.29	44.68	73.9	29.2	150	0	Floor Noise
Hori.	7212.000	PK	45.86	36.31	-34.40	-	2.29	50.06	73.9	23.8	150	0	Floor Noise
Hori.	9616.000	PK	45.82	38.05	-31.32	-	2.29	54.84	73.9	19.0	150	0	Floor Noise
Hori.	4808.000	AV	35.08	31.86	-35.97	-	2.29	33.26	53.9	20.6	150	0	Floor Noise
Hori.	7212.000	AV	35.11	36.31	-34.40	-	2.29	39.31	53.9	14.5	150	0	Floor Noise
Hori.	9616.000	AV	34.73	38.05	-31.32	-	2.29	43.75	53.9	10.1	150	0	Floor Noise
Vert.	2390.000	PK	46.80	27.71	-28.27	-	2.29	48.53	73.9	25.3	197	91	-
Vert.	4808.000	PK	46.88	31.86	-35.97	-	2.29	45.06	73.9	28.8	150	41	Floor Noise
Vert.	7212.000	PK	46.16	36.31	-34.40	-	2.29	50.36	73.9	23.5	150	207	Floor Noise
Vert.	9616.000	PK	45.66	38.05	-31.32	-	2.29	54.68	73.9	19.2	150	168	Floor Noise
Vert.	4808.000	AV	35.20	31.86	-35.97	-	2.29	33.38	53.9	20.5	150	41	Floor Noise
Vert.	7212.000	AV	35.09	36.31	-34.40	-	2.29	39.29	53.9	14.6	150	207	Floor Noise
Vert.	9616.000	AV	34.75	38.05	-31.32	-	2.29	43.77	53.9	10.1	150	168	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91 [m] / 3.0 [m]) = 2.29 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Average measurement value with Duty Factor

Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Duty	Distance	Result	Limit	Margin	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2390.000	AV	35.16	27.71	-28.27	-	2.47	2.29	39.36	53.9	14.5	*1)
Vert.	2390.000	AV	35.30	27.71	-28.27	-	2.47	2.29	39.50	53.9	14.4	*1)

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91 [m] / 3.0 [m]) = 2.29 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet

(RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Distance	Result	Limit	Margin	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2404.000	PK	102.63	27.75	-28.26	-	2.29	104.41	-	-	Carrier
Hori.	2400.000	PK	39.93	27.73	-28.26	-	2.29	41.69	84.4	42.7	-
Vert.	2404.000	PK	99.81	27.75	-28.26	-	2.29	101.59	-	-	Carrier
Vert.	2400.000	PK	39.71	27.73	-28.26	-	2.29	41.47	81.5	40.0	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.



Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91 [m] / 3.0 [m]) = 2.29 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx BT LE 2M-PHY 2404 MHz				
------	--------------------------	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 17, 2025	WAC2	23 deg. C	67 % RH	Hiromasa Sato	1 GHz to 10 GHz

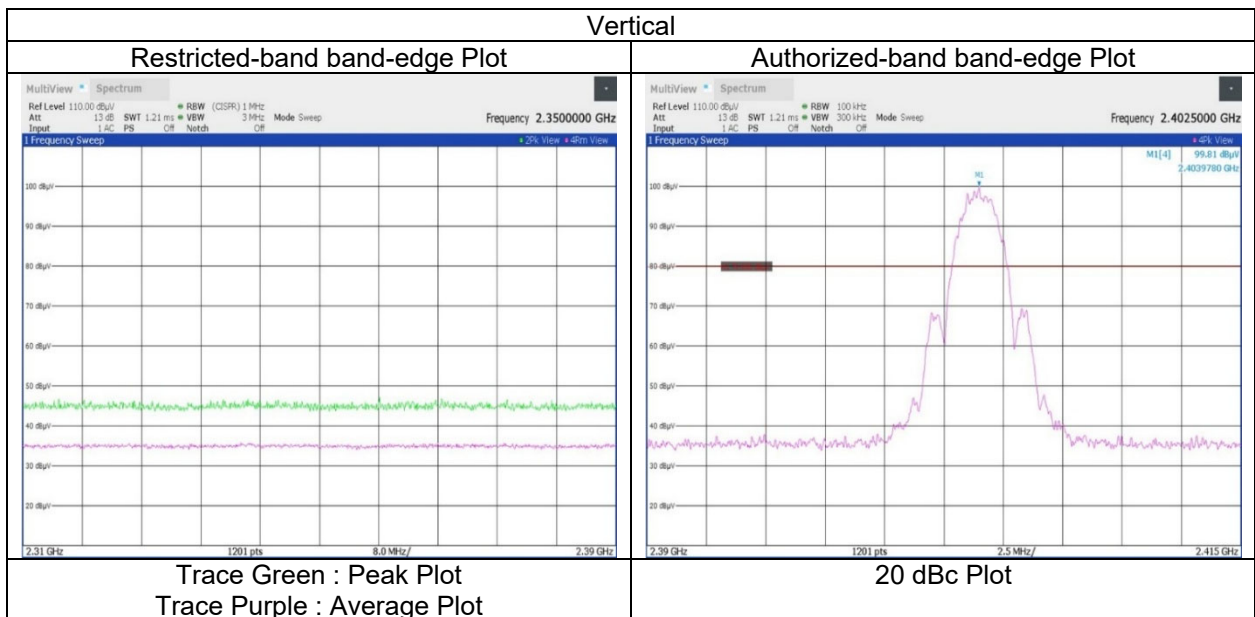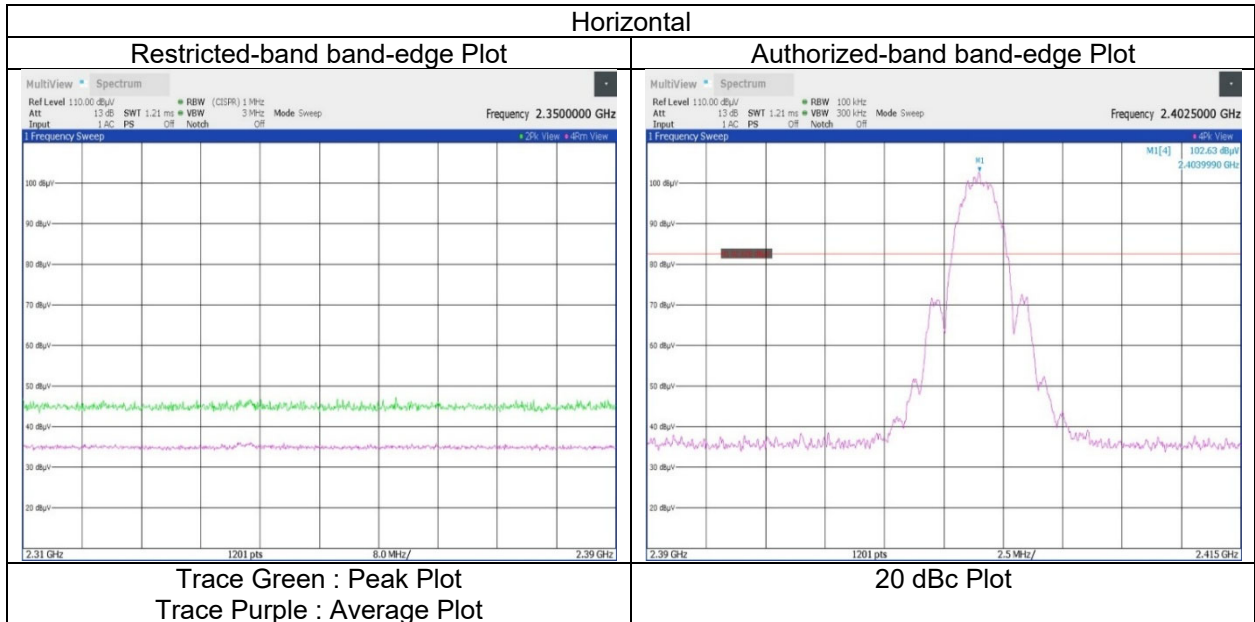

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Mode	Tx BT LE 2M-PHY 2440 MHz
------	--------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 16, 2025	WAC2	22 deg. C	66 % RH	Takayuki Kobayashi	1 GHz to 10 GHz
October 16, 2025	WAC2	23 deg. C	61 % RH	Yuta Shiba	10 GHz to 26.5 GHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	4880.000	PK	46.61	32.27	-35.95	-	2.29	45.22	73.9	28.6	150	0	Floor Noise
Hori.	7320.000	PK	46.65	36.66	-34.20	-	2.29	51.40	73.9	22.5	150	0	Floor Noise
Hori.	9760.000	PK	45.80	38.09	-31.13	-	2.29	55.05	73.9	18.8	150	0	Floor Noise
Hori.	4880.000	AV	35.20	32.27	-35.95	-	2.29	33.81	53.9	20.0	150	0	Floor Noise
Hori.	7320.000	AV	35.62	36.66	-34.20	-	2.29	40.37	53.9	13.5	150	0	Floor Noise
Hori.	9760.000	AV	34.51	38.09	-31.13	-	2.29	43.76	53.9	10.1	150	0	Floor Noise
Vert.	4880.000	PK	46.27	32.27	-35.95	-	2.29	44.88	73.9	29.0	150	0	Floor Noise
Vert.	7320.000	PK	46.39	36.66	-34.20	-	2.29	51.14	73.9	22.7	150	0	Floor Noise
Vert.	9760.000	PK	45.55	38.09	-31.13	-	2.29	54.80	73.9	19.1	150	0	Floor Noise
Vert.	4880.000	AV	35.11	32.27	-35.95	-	2.29	33.72	53.9	20.1	150	0	Floor Noise
Vert.	7320.000	AV	35.70	36.66	-34.20	-	2.29	40.45	53.9	13.4	150	0	Floor Noise
Vert.	9760.000	AV	34.60	38.09	-31.13	-	2.29	43.85	53.9	10.0	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91[m] / 3.0[m]) = 2.29 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx BT LE 2M-PHY 2478 MHz
------	--------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 17, 2025	WAC2	23 deg. C	61 % RH	Hiromasa Sato	1 GHz to 26.5 GHz
October 18, 2025	WAC2	23 deg. C	52 % RH	Masahide Ozaki	Below 1 GHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	129.022	QP	38.50	11.20	6.92	33.21	0.00	23.41	43.5	20.0	248	327	-
Hori.	931.903	QP	20.50	22.02	9.14	30.23	0.00	21.43	46.0	24.5	100	0	-
Hori.	2483.500	PK	46.67	27.77	-28.21	-	2.29	48.52	73.9	25.3	109	108	-
Hori.	4956.000	PK	46.87	32.58	-35.93	-	2.29	45.81	73.9	28.0	150	0	Floor Noise
Hori.	7434.000	PK	46.58	36.77	-33.97	-	2.29	51.67	73.9	22.2	150	0	Floor Noise
Hori.	9912.000	PK	45.61	38.14	-30.92	-	2.29	55.12	73.9	18.7	150	0	Floor Noise
Hori.	4956.000	AV	35.45	32.58	-35.93	-	2.29	34.39	53.9	19.5	150	0	Floor Noise
Hori.	7434.000	AV	35.05	36.77	-33.97	-	2.29	40.14	53.9	13.7	150	0	Floor Noise
Hori.	9912.000	AV	34.56	38.14	-30.92	-	2.29	44.07	53.9	9.8	150	0	Floor Noise
Vert.	30.723	QP	36.00	13.57	6.33	32.70	0.00	23.20	40.0	16.8	100	15	-
Vert.	32.254	QP	32.90	13.16	6.35	32.75	0.00	19.66	40.0	20.3	100	354	-
Vert.	36.862	QP	41.70	12.14	6.42	32.87	0.00	27.39	40.0	12.6	100	45	-
Vert.	43.006	QP	43.80	11.03	6.52	32.99	0.00	28.36	40.0	11.6	100	56	-
Vert.	44.541	QP	34.00	10.81	6.55	33.01	0.00	18.35	40.0	21.6	100	66	-
Vert.	46.079	QP	38.40	10.61	6.56	33.03	0.00	22.54	40.0	17.4	100	96	-
Vert.	55.301	QP	45.10	9.77	6.51	33.12	0.00	28.26	40.0	11.7	100	162	-
Vert.	58.369	QP	41.10	9.64	6.38	33.15	0.00	23.97	40.0	16.0	100	167	-
Vert.	61.441	QP	45.00	9.54	6.29	33.17	0.00	27.66	40.0	12.3	100	178	-
Vert.	64.513	QP	41.70	9.45	6.23	33.18	0.00	24.20	40.0	15.8	100	158	-
Vert.	2483.500	PK	46.93	27.77	-28.21	-	2.29	48.78	73.9	25.1	228	101	-
Vert.	4956.000	PK	46.82	32.58	-35.93	-	2.29	45.76	73.9	28.1	150	0	Floor Noise
Vert.	7434.000	PK	45.94	36.77	-33.97	-	2.29	51.03	73.9	22.8	150	0	Floor Noise
Vert.	9912.000	PK	45.19	38.14	-30.92	-	2.29	54.70	73.9	19.2	150	0	Floor Noise
Vert.	4956.000	AV	35.39	32.58	-35.93	-	2.29	34.33	53.9	19.5	150	0	Floor Noise
Vert.	7434.000	AV	35.22	36.77	-33.97	-	2.29	40.31	53.9	13.5	150	0	Floor Noise
Vert.	9912.000	AV	34.53	38.14	-30.92	-	2.29	44.04	53.9	9.8	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91[m] / 3.0[m]) = 2.29 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

Average measurement value with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	35.23	27.77	-28.21	-	2.47	2.29	39.55	53.9	14.3	*1)
Vert.	2483.500	AV	35.08	27.77	-28.21	-	2.47	2.29	39.40	53.9	14.5	*1)

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.91[m] / 3.0[m]) = 2.29 [dB]$



10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

Radiated Spurious Emission


Mode	Tx BT LE 2M-PHY 2478 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 17, 2025	WAC2	23 deg. C	61 % RH	Hiromasa Sato	1 GHz to 10 GHz

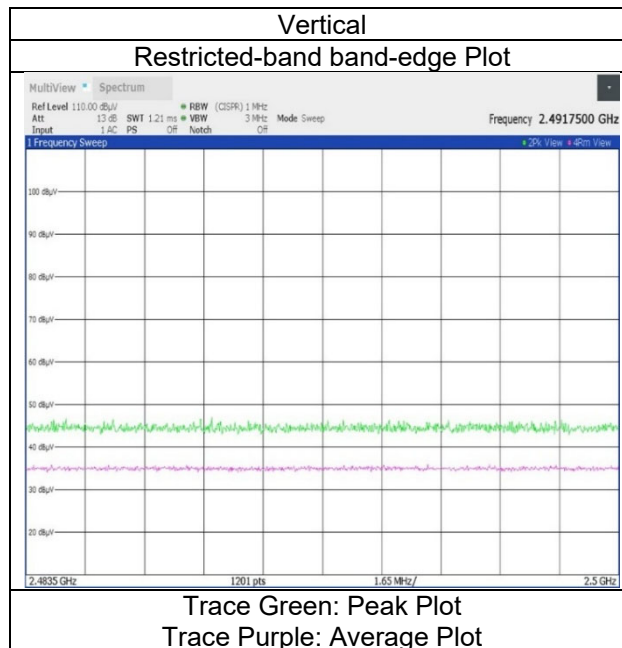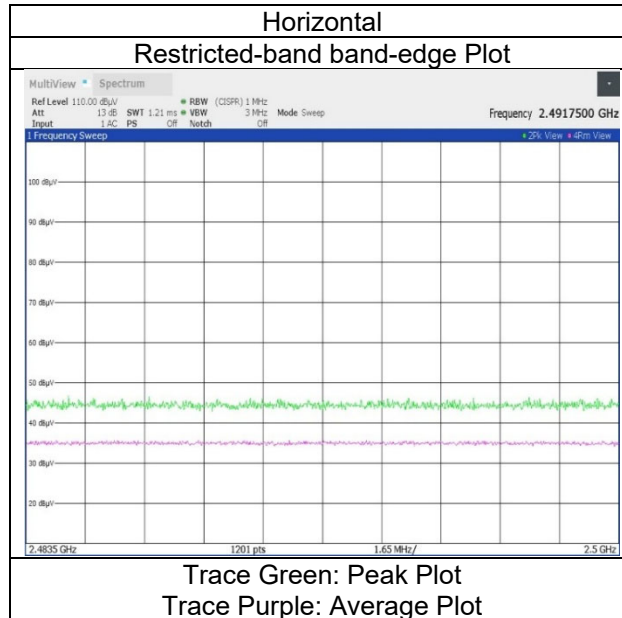

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (Plot data, Worst case mode for Maximum Conducted Output Power)

Mode	Tx BT LE 2M-PHY 2478 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
October 17, 2025	WAC2	23 deg. C	61 % RH	Hiromasa Sato	1 GHz to 26.5 GHz
October 18, 2025	WAC2	23 deg. C	52 % RH	Masahide Ozaki	Below 1 GHz

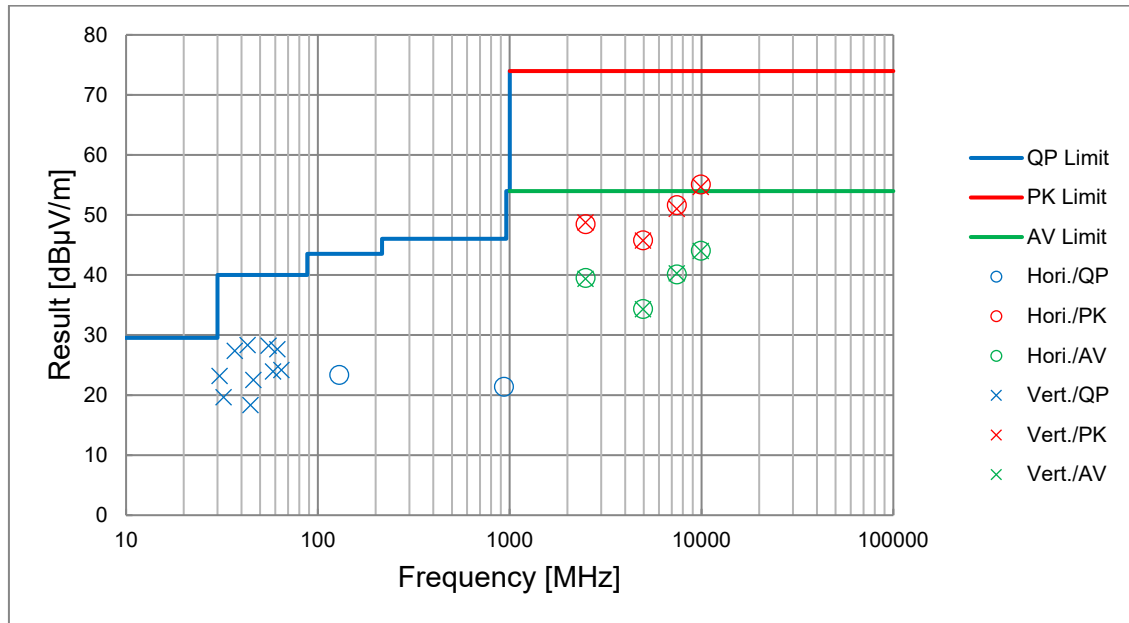


*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Mode	Tx BT LE 1M-PHY			
------	-----------------	--	--	--

Date	Test Place	Temperature	Humidity	Engineer
October 25, 2025	SR5	24 deg.C	42 %RH	Masahide Ozaki

BT LE 1M-PHY, 2402 MHz

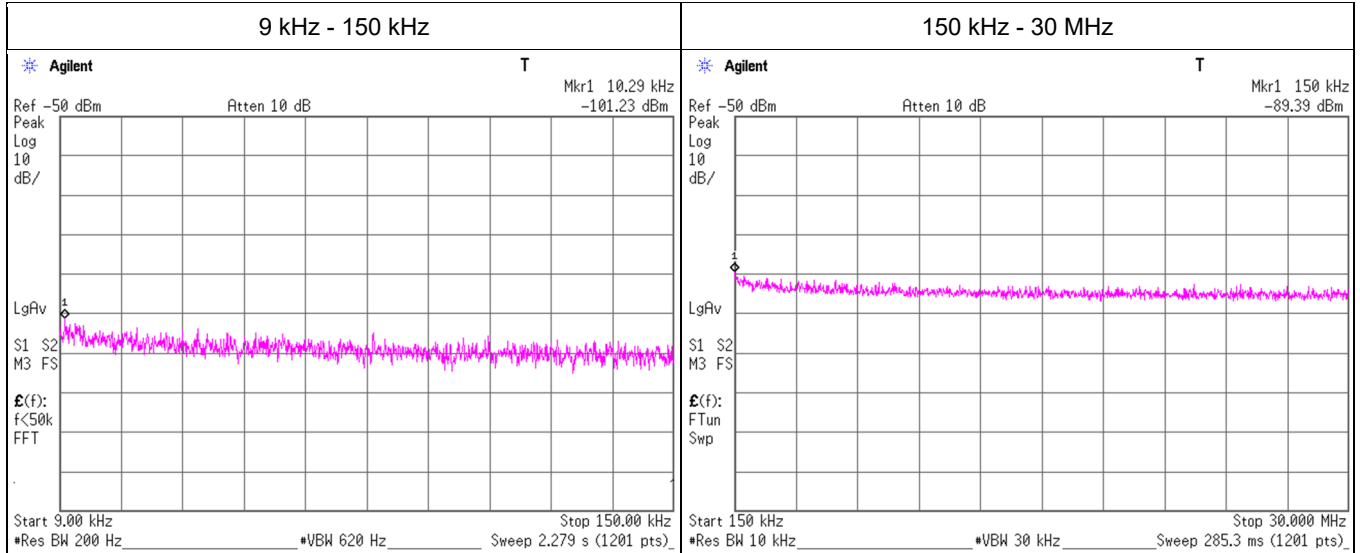

Freq.	Reading	Cable	Atten.	Antenna	N	EIRP	Distance	Ground	E	Limit	Margin	Remark
[MHz]	[dBm]	Loss	Loss	Gain	(Number of Output)	[dBm]	[m]	bounce	(field strength) [dBuV/m]	[dBuV/m]	[dB]	
0.010	-101.23	0.51	9.89	4.16	1.00	-86.7	300	6.0	-25.4	107.3	132.7	-
0.150	-89.39	0.51	9.89	4.16	1.00	-74.8	300	6.0	-13.6	84.0	97.6	-

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$


N: Number of output

Conducted Spurious Emission

Mode	Tx BT LE 1M-PHY
------	-----------------

Date	Test Place	Temperature	Humidity	Engineer
October 25, 2025	SR5	24 deg.C	42 %RH	Masahide Ozaki

BT LE 1M-PHY, 2440 MHz

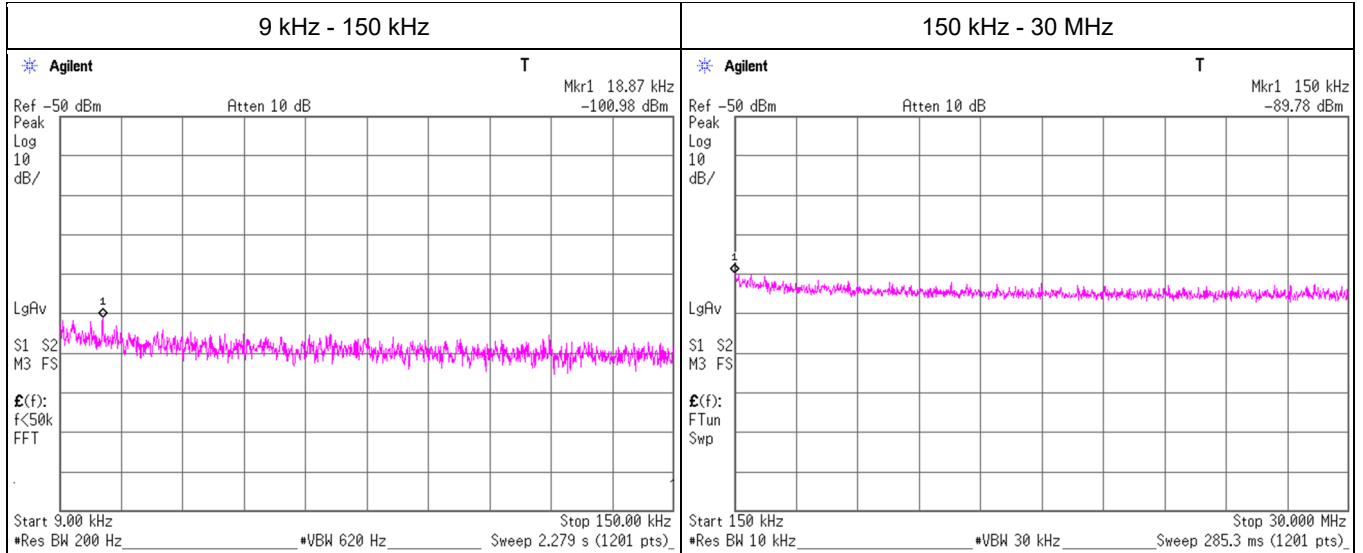

Freq.	Reading	Cable	Atten.	Antenna	N	EIRP	Distance	Ground	E	Limit	Margin	Remark
[MHz]	[dBm]	Loss	Loss	Gain	(Number of Output)	[dBm]	[m]	bounce	(field strength) [dBuV/m]	[dBuV/m]	[dB]	
0.019	-100.98	0.51	9.89	4.16	1.00	-86.4	300	6.0	-25.2	102.0	127.2	-
0.150	-89.78	0.51	9.89	4.16	1.00	-75.2	300	6.0	-14.0	84.0	98.0	-

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$


N: Number of output

Conducted Spurious Emission

Mode	Tx BT LE 1M-PHY			
------	-----------------	--	--	--

Date	Test Place	Temperature	Humidity	Engineer
October 25, 2025	SR5	24 deg.C	42 %RH	Masahide Ozaki

BT LE 1M-PHY, 2480 MHz

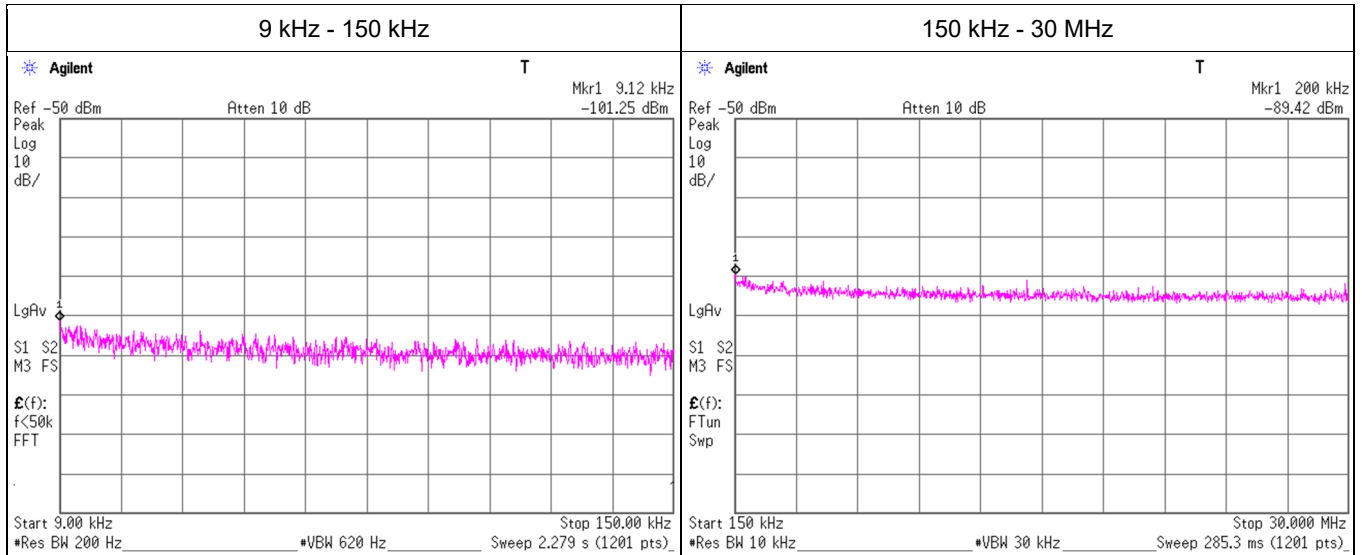

Freq.	Reading	Cable Loss	Atten. Loss	Antenna Gain	N (Number of Output)	EIRP	Distance	Ground bounce	E (field strength)	Limit	Margin	Remark
[MHz]	[dBm]	[dB]	[dB]	[dBi]		[dBm]	[m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
0.009	-101.25	0.51	9.89	4.16	1.00	-86.7	300	6.0	-25.4	108.4	133.8	-
0.200	-89.42	0.51	9.89	4.16	1.00	-74.9	300	6.0	-13.6	81.5	95.1	-

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$


$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$

N: Number of output

Conducted Spurious Emission

Mode	Tx BT LE 2M-PHY			
Date	Test Place	Temperature	Humidity	Engineer
October 25, 2025	SR5	24 deg.C	42 %RH	Masahide Ozaki

BT LE 2M-PHY, 2404 MHz

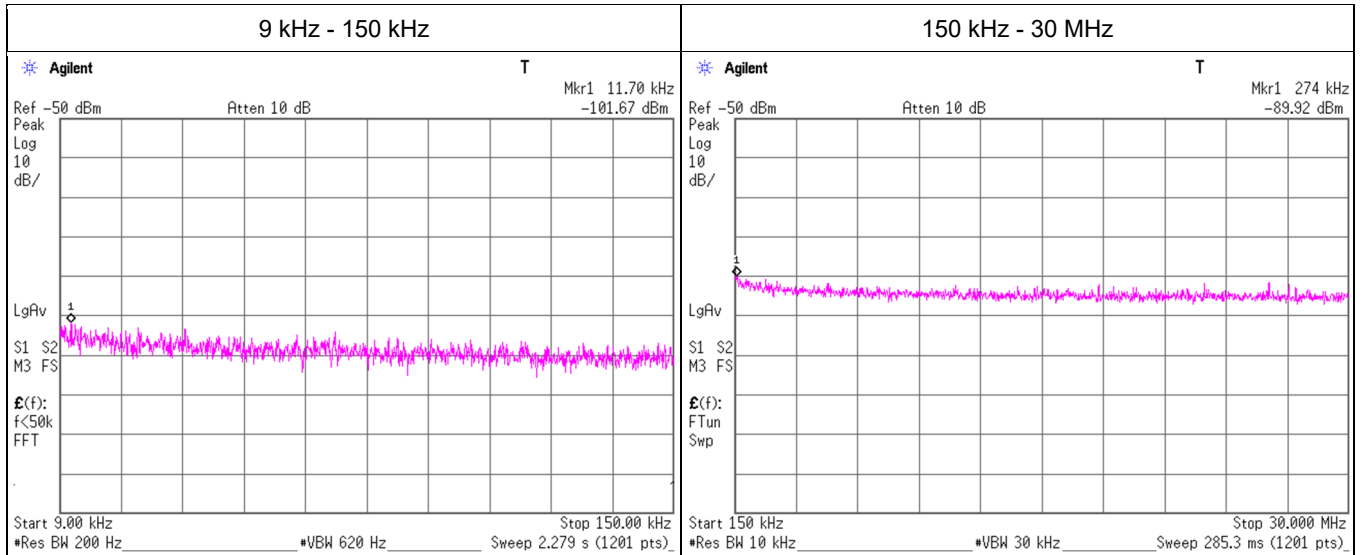

Freq.	Reading	Cable Loss	Atten. Loss	Antenna Gain	N (Number of Output)	EIRP	Distance	Ground bounce	E (field strength)	Limit	Margin	Remark
[MHz]	[dBm]	[dB]	[dB]	[dBi]		[dBm]	[m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
0.012	-101.67	0.51	9.89	4.16	1.00	-87.1	300	6.0	-25.9	106.2	132.1	-
0.274	-89.92	0.51	9.89	4.16	1.00	-75.4	300	6.0	-14.1	78.8	92.9	-

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$


N: Number of output

Conducted Spurious Emission

Mode	Tx BT LE 2M-PHY			
------	-----------------	--	--	--

Date	Test Place	Temperature	Humidity	Engineer
October 25, 2025	SR5	24 deg.C	42 %RH	Masahide Ozaki

BT LE 2M-PHY, 2440 MHz

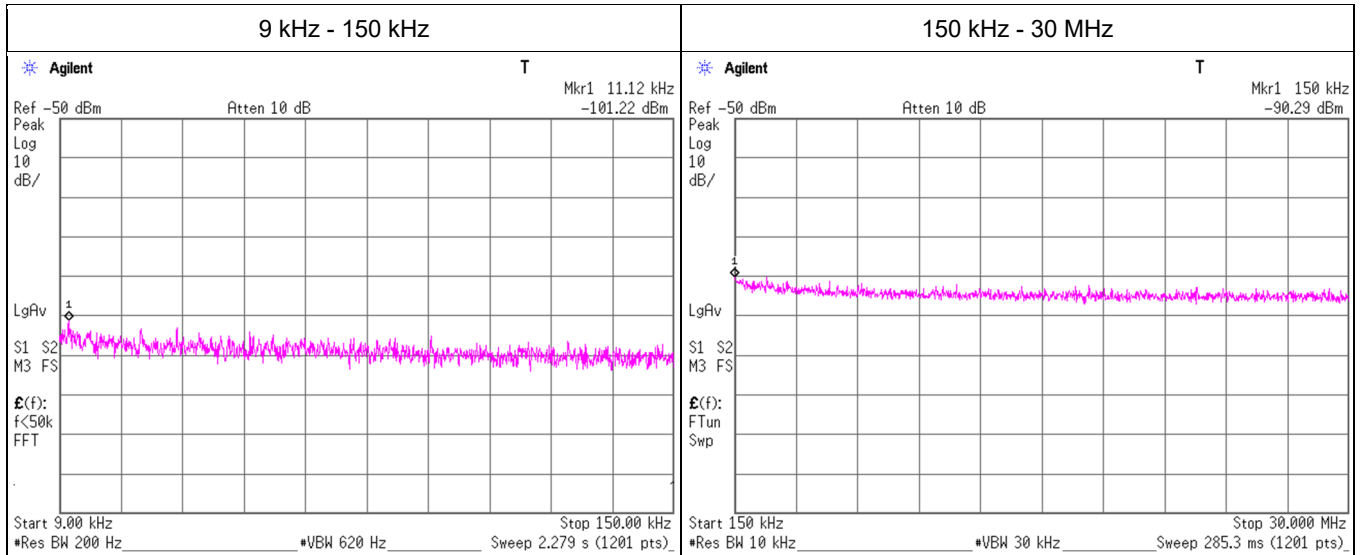

Freq.	Reading	Cable Loss	Atten. Loss	Antenna Gain	N (Number of Output)	EIRP	Distance	Ground bounce	E (field strength)	Limit	Margin	Remark
[MHz]	[dBm]	[dB]	[dB]	[dBi]		[dBm]	[m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
0.011	-101.22	0.51	9.89	4.16	1.00	-86.7	300	6.0	-25.4	106.6	132.0	-
0.150	-90.29	0.51	9.89	4.16	1.00	-75.7	300	6.0	-14.5	84.0	98.5	-

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$


N: Number of output

Conducted Spurious Emission

Mode	Tx BT LE 2M-PHY			
------	-----------------	--	--	--

Date	Test Place	Temperature	Humidity	Engineer
October 25, 2025	SR5	24 deg.C	42 %RH	Masahide Ozaki

BT LE 2M-PHY, 2478 MHz

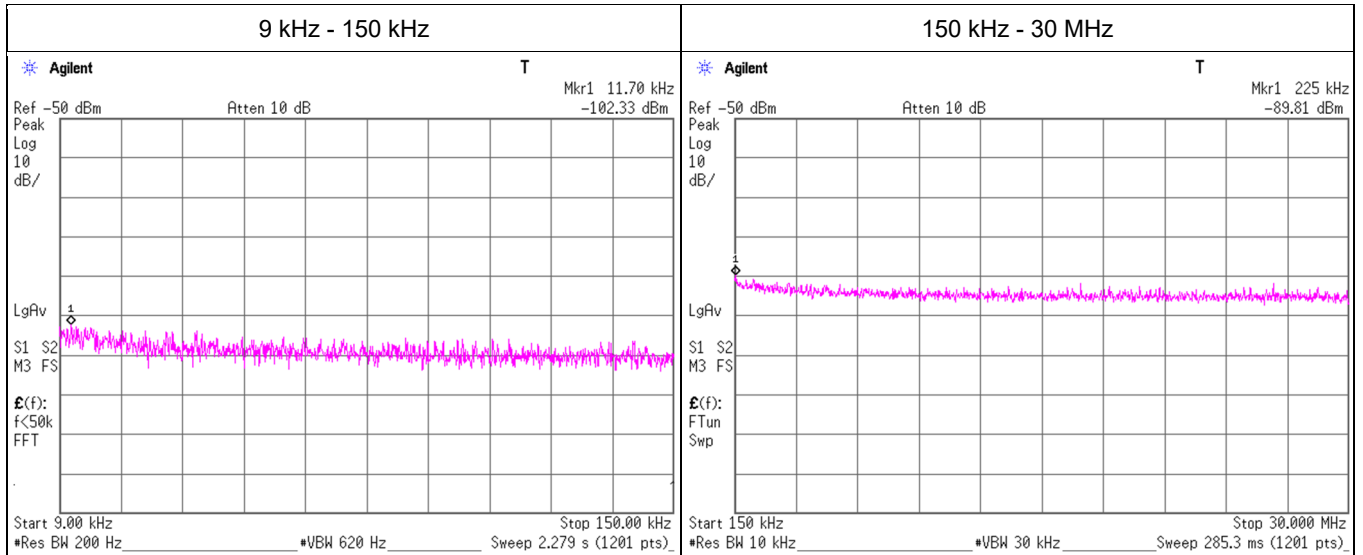

Freq.	Reading	Cable Loss	Atten. Loss	Antenna Gain	N (Number of Output)	EIRP	Distance	Ground bounce	E (field strength)	Limit	Margin	Remark
[MHz]	[dBm]	[dB]	[dB]	[dBi]		[dBm]	[m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
0.012	-102.33	0.51	9.89	4.16	1.00	-87.8	300	6.0	-26.5	106.2	132.7	-
0.225	-89.81	0.51	9.89	4.16	1.00	-75.3	300	6.0	-14.0	80.5	94.5	-

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$

N: Number of output

Power Density

Mode	Tx BT LE 1M-PHY			
------	-----------------	--	--	--

Date	Test Place	Temperature	Humidity	Engineer
October 25, 2025	SR5	24 deg.C	42 %RH	Masahide Ozaki

BT LE 1M-PHY

Tested Freq. [MHz]	PSD Reading [dBm / 3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm / 3 kHz]	Limit [dBm / 3 kHz]	Margin [dB]
2402	-19.36	1.19	9.95	-8.23	8.00	16.23
2440	-19.40	1.19	9.95	-8.26	8.00	16.26
2480	-19.36	1.20	9.95	-8.22	8.00	16.22

Sample Calculation:

PSD: Power Spectral Density

PSD Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

Power Density

Mode	Tx BT LE 2M-PHY
------	-----------------

Date	Test Place	Temperature	Humidity	Engineer
October 25, 2025	SR5	24 deg.C	42 %RH	Masahide Ozaki

BT LE 2M-PHY

Tested Freq. [MHz]	PSD Reading [dBm / 3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm / 3 kHz]	Limit [dBm / 3 kHz]	Margin [dB]
2404	-19.33	1.19	9.95	-8.20	8.00	16.20
2440	-19.33	1.19	9.95	-8.19	8.00	16.19
2478	-19.32	1.20	9.95	-8.17	8.00	16.17

Sample Calculation:


PSD: Power Spectral Density

PSD Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

Power Density

BT LE 1M-PHY

BT LE 2M-PHY

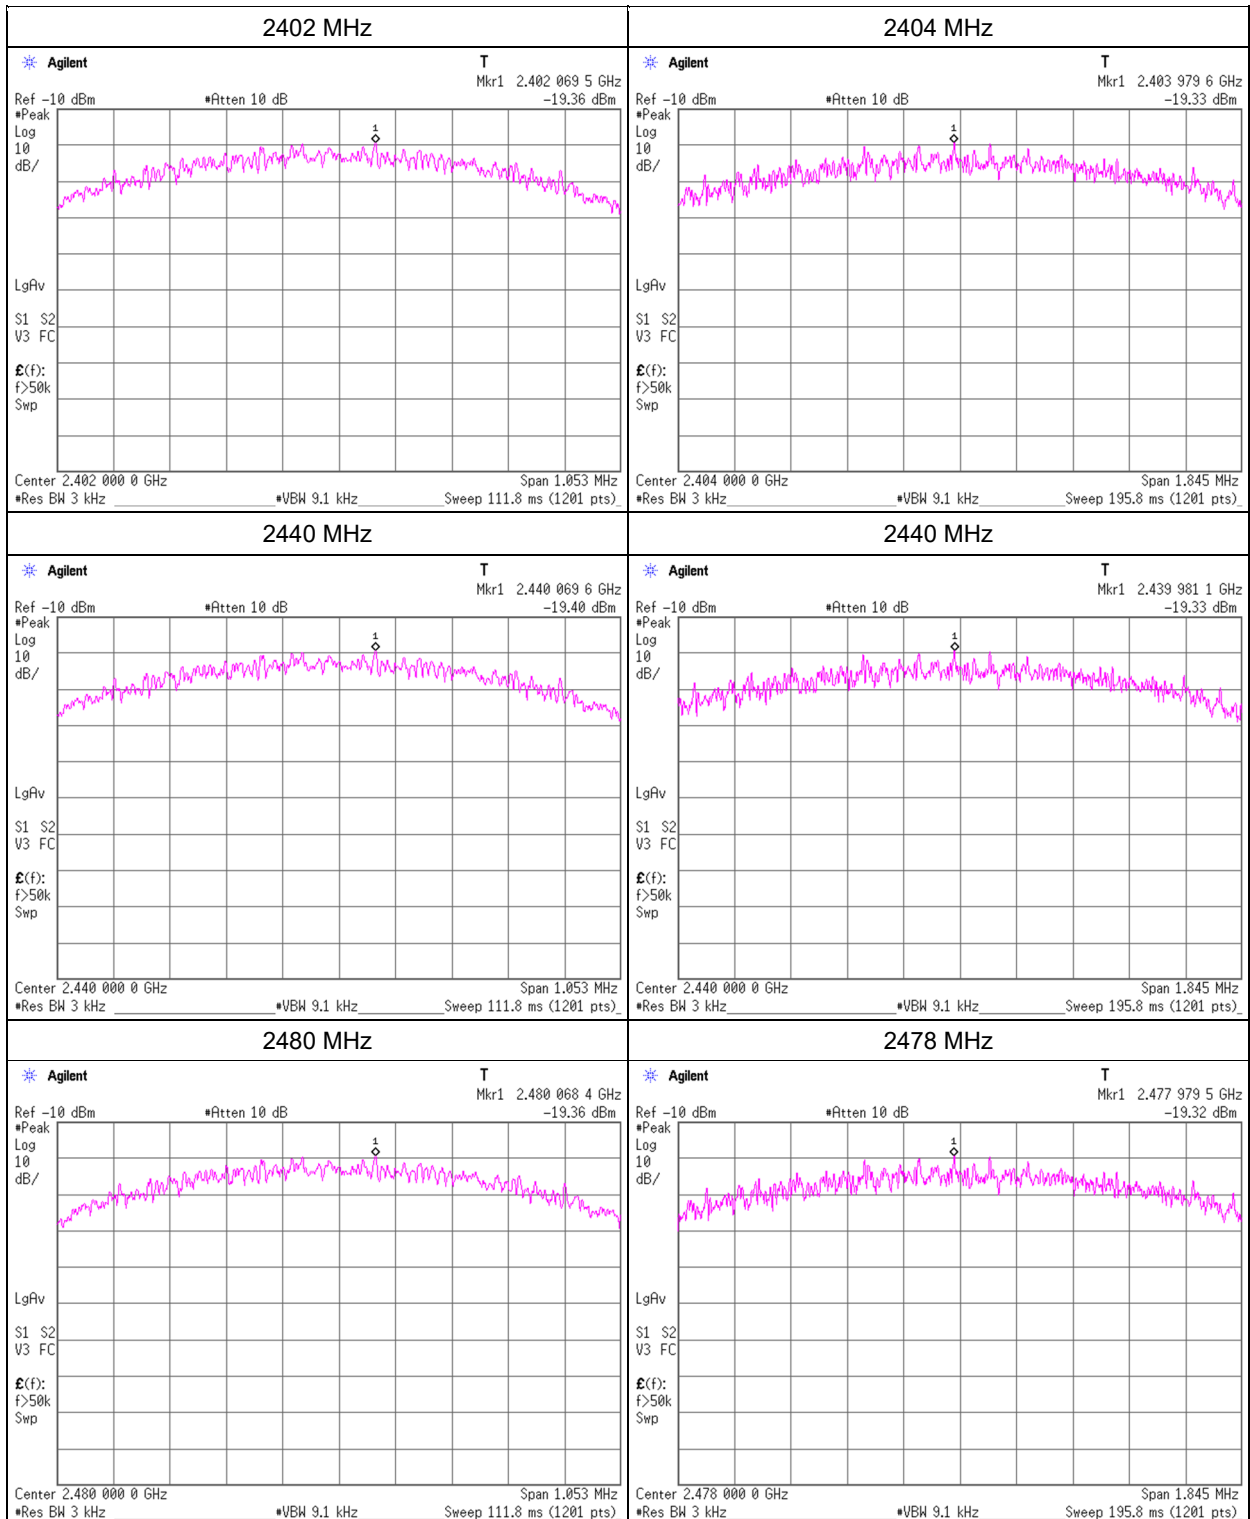

APPENDIX 2: Test Instruments

Test Equipment (1/2)

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	204925	Attenuator	Weinschel Corp.	54A-10	109970	2025/02/18	12
AT	179106	Coaxial Cable	Junkosha	MWX241-01000KMSKMS/B	1901Q061-R	2025/04/15	12
AT	146212	Digital Hitester	HIOKI E. E. CORPORATION	3805-50	80997828	2025/09/10	12
AT	146247	Power Meter	Keysight Technologies Inc	8990B	MY51000272	2025/05/20	12
AT	146310	Power sensor	Keysight Technologies Inc	N1923A	MY5326009	2025/05/20	12
AT	145800	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250106	2025/03/31	12
AT	150461	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186392	2025/08/07	12
AT	259713	Thermo-Hygrometer	CUSTOM. Inc	CTH-230	-	2025/04/11	12
CE	248304	Attenuator	JFW	50HFFA-006-2/18N	-	2025/05/14	12
CE	145035	Coaxial Cable	Suhner	RG223U	-	2025/04/05	12
CE	145113	Digital Multimeter	Agilent Technologies	U1251A	TW46350095	2025/09/11	12
CE	145539	LISN	Rohde & Schwarz	ENV216	100512	2025/02/01	12
CE	235715	Tape Measure	ASKUL	-	-	-	-
CE	146317	Thermo-Hygrometer	A&D Company	AD-5681	4063325	2025/08/15	12
CE,RE	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	Ver 3.1.0612	-	-
CE,RE	235268	Test Receiver	Rohde & Schwarz	ESW44	103212	2024/12/18	12
RE	199783	Attenuator	JFW	50HF-006N	-	2025/06/04	12
RE	239787	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHBB 9124+BBA9106	01908	2025/08/14	12
RE	236709	Coaxial Cable	Hayashi-Repic co., Ltd.	NMS079B-GL310C-SMS117B-2m	47256-02-04	2025/05/28	12
RE	236711	Coaxial Cable	Hayashi-Repic co., Ltd.	KMS020B-GL140sE-KMS020B-7.0m	47256-03-02	2025/05/27	12
RE	236720	Coaxial Cable	Huber+Suhner	SF106/SF106/SF106	2001167/2001168/2001161	2025/05/28	12
RE	236724	Coaxial Cable	Hayashi-Repic co., Ltd.	SF106(HUBER+SUHNER)/LMR400UF/GL310C/GL310C	2000430/47753-2/47256-01-04/47256-01-02	2025/05/12	12
RE	236756	Coaxial Cable	Huber+Suhner	SF106/11N/11N/6000	2001167	2025/05/28	12
RE	239644	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	2306S022	2025/08/27	12
RE	243210	Coaxial Cable	Hayashi-Repic co., Ltd.	SMS13-13A26-NFS13-1.0m	49190-01-02	2024/12/05	12
RE	264042	Coaxial Cable	Hayashi-Repic co., Ltd.	SMS13-13A26-SFS13-0.5m	53292-01-02	2025/06/20	12
RE	235640	DIGITAL MULTIMETER	HIOKI E. E. CORPORATION	DT4261	230313157	2025/05/22	12
RE	146351	Horn Antenna	EMCO	3160-09	1278	2025/05/26	12
RE	236584	Horn Antenna	AINFO Inc.	LB-8180-NF	2030013000112	2025/04/25	12
RE	236687	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	788	2025/04/25	12
RE	145528	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	195	2025/03/18	12
RE	145008	Pre Amplifier	Toyo Corporation	HAP18-26W	18	2025/09/26	12
RE	236967	Pre Amplifier	TSJ (Techno Science Japan)	MLA-9K01-L01	23050010	2025/06/04	12

Test Equipment (2/2)

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	237786	RF RELAY MATRIX with preamplifier	TSJ (Techno Science Japan)	RFM-E221261R	07796	2024/11/12	12
RE	236615	Semi-Anechoic Chamber	TDK	SWAC-02(NSA)	2	2025/05/12	12
RE	236617	Semi-Anechoic Chamber	TDK	SWAC-02(SVSWR)	2	2025/06/13	12
RE	207281	Tape Measure	ASKUL	-	-	-	-
RE	235738	Thermo-Hygrometer	CUSTOM. Inc	CTH-230	-	2025/04/16	12

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

AT: Antenna Terminal Conducted test

CE: Conducted Emission

RE: Radiated Emission