

● Test Mode: BT(GFSK)

Date: 3/12/2026

Test Laboratory: Audix_SAR Lab

P1 GFSK CH39 2441MHz Right Cheek**DUT: YY3006**

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.758$ S/m; $\epsilon_r = 39.931$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(6.56, 7.07, 7.4) @ 2441 MHz; Calibrated: 9/25/2025
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1305; Calibrated: 4/22/2025
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1709
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (7x7x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.0307 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.788 V/m; Power Drift = -0.26 dB


Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 98.4%

Maximum value of SAR (measured) = 0.0292 W/kg

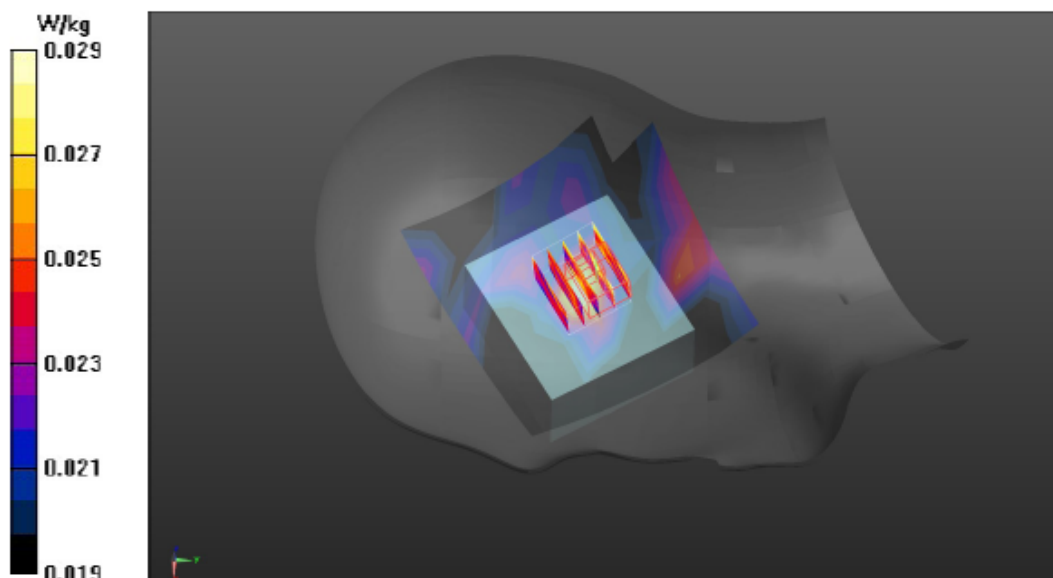

Date: 3/12/2026

Test Laboratory: Audix_SAR Lab

P4 GFSK CH39 2441MHz Left Cheek**DUT: YY3006**

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.758$ S/m; $\epsilon_r = 39.931$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(6.56, 7.07, 7.4) @ 2441 MHz; Calibrated: 9/25/2025
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1305; Calibrated: 4/22/2025
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1709
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (7x7x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.0604 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.048 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 102.9%

Maximum value of SAR (measured) = 0.0772 W/kg

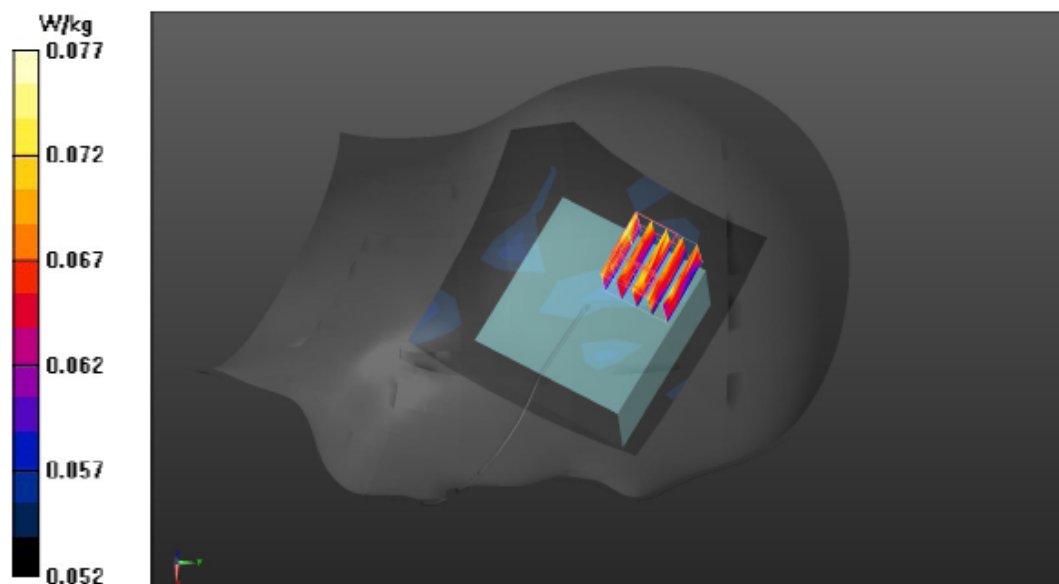

Test Laboratory: Audix_SAR Lab

P7 GFSK CH39 2441MHz Flat

DUT: YY3006

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.758$ S/m; $\epsilon_r = 39.931$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(6.56, 7.07, 7.4) @ 2441 MHz; Calibrated: 9/25/2025
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1305; Calibrated: 4/22/2025
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1709
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (7x7x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.0742 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.048 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.6%

Maximum value of SAR (measured) = 0.0853 W/kg

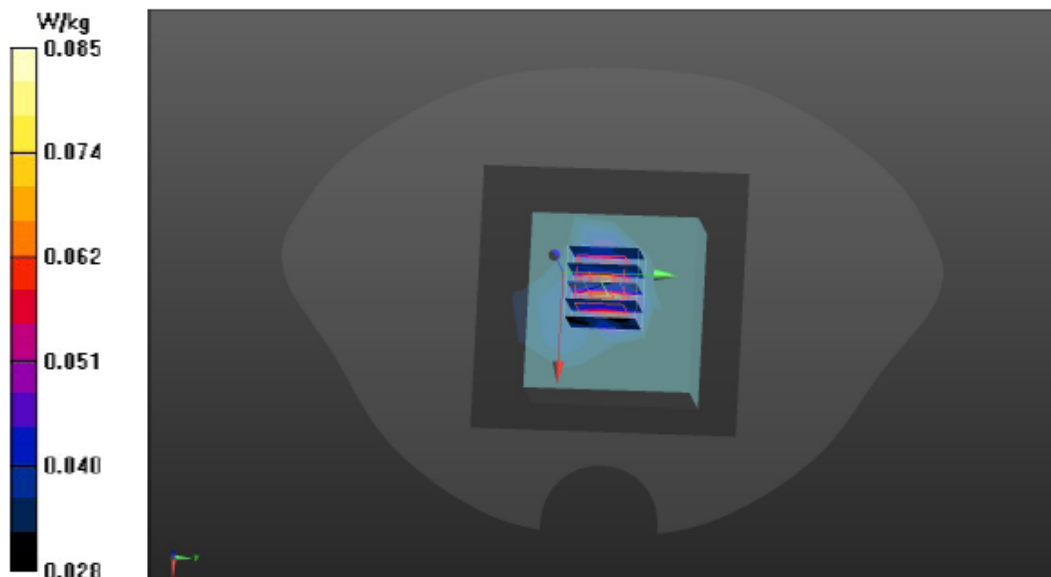

● **Test Mode: BLE(1Mbps)**

Date: 3/12/2026

Test Laboratory: Audix_SAR Lab

P3 BLE1M CH39 2480MHz Right Cheek**DUT: YY3006**

Communication System: UID 0, BT (0); Frequency: 2480 MHz; Duty Cycle: 1:1.64

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.789$ S/m; $\epsilon_r = 39.899$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(6.56, 7.07, 7.4) @ 2480 MHz; Calibrated: 9/25/2025
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1305; Calibrated: 4/22/2025
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1709
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (7x7x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.0277 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.784 V/m; Power Drift = -0.27 dB


Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 84.3%

Maximum value of SAR (measured) = 0.0308 W/kg

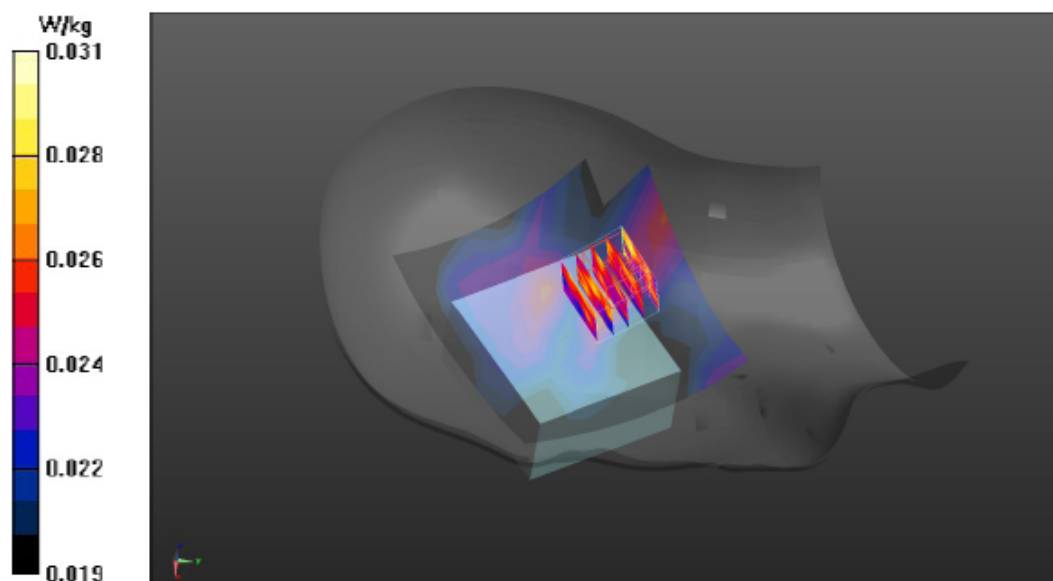

Date: 3/12/2026

Test Laboratory: Audix_SAR Lab

P6 BLE1M CH39 2480MHz Left Cheek**DUT: YY3006**

Communication System: UID 0, BT (0); Frequency: 2480 MHz; Duty Cycle: 1:1.64

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.789$ S/m; $\epsilon_r = 39.899$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(6.56, 7.07, 7.4) @ 2480 MHz; Calibrated: 9/25/2025
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1305; Calibrated: 4/22/2025
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1709
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (7x7x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.0653 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.039 V/m; Power Drift = 0.29 dB


Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.076 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 99.7%

Maximum value of SAR (measured) = 0.142 W/kg

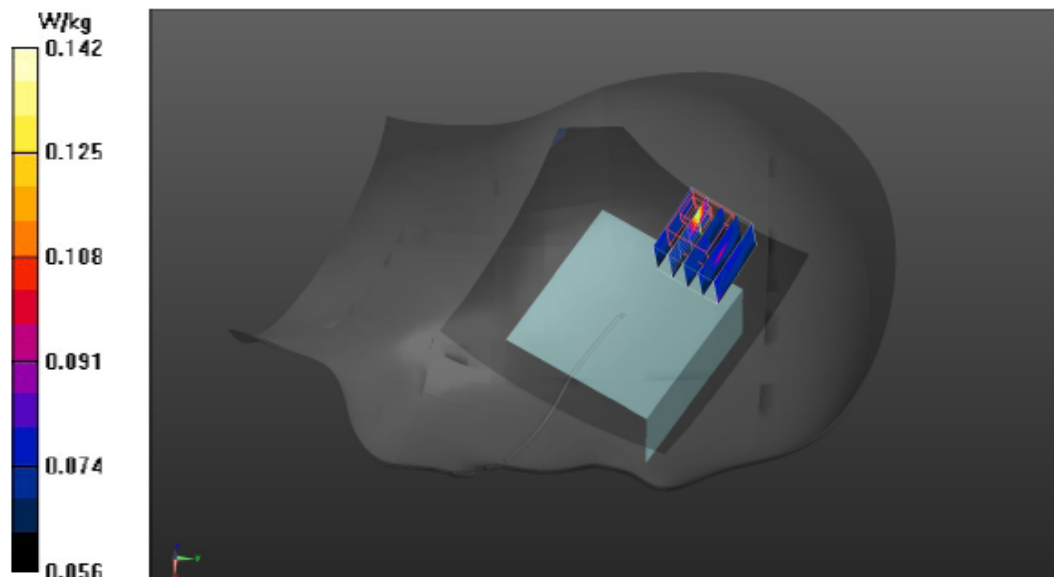

Date: 3/12/2026

Test Laboratory: Audix_SAR Lab

P9 BLE1M CH39 2480MHz Flat**DUT: YY3006**

Communication System: UID 0, BT (0); Frequency: 2480 MHz; Duty Cycle: 1:3.24

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.789$ S/m; $\epsilon_r = 39.899$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(6.56, 7.07, 7.4) @ 2480 MHz; Calibrated: 9/25/2025
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1305; Calibrated: 4/22/2025
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1709
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (7x7x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.0926 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.449 V/m; Power Drift = 0.30 dB


Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 62.6%

Maximum value of SAR (measured) = 0.0999 W/kg

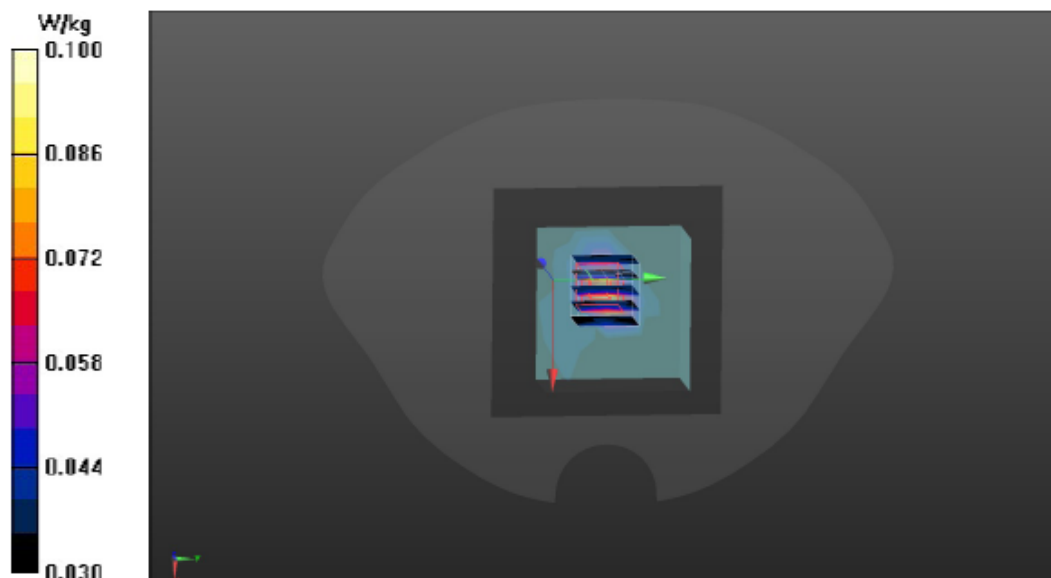

● **Test Mode: BLE(2Mbps)**

Date: 3/12/2026

Test Laboratory: Audix_SAR Lab

P2 BLE2M CH38 2478MHz Right Cheek**DUT: YY3006**

Communication System: UID 0, BT (0); Frequency: 2478 MHz; Duty Cycle: 1:3.24
Medium parameters used: $f = 2478$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.902$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(6.56, 7.07, 7.4) @ 2478 MHz; Calibrated: 9/25/2025
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1305; Calibrated: 4/22/2025
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1709
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (8x7x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.0259 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.631 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 81.3%

Maximum value of SAR (measured) = 0.0296 W/kg

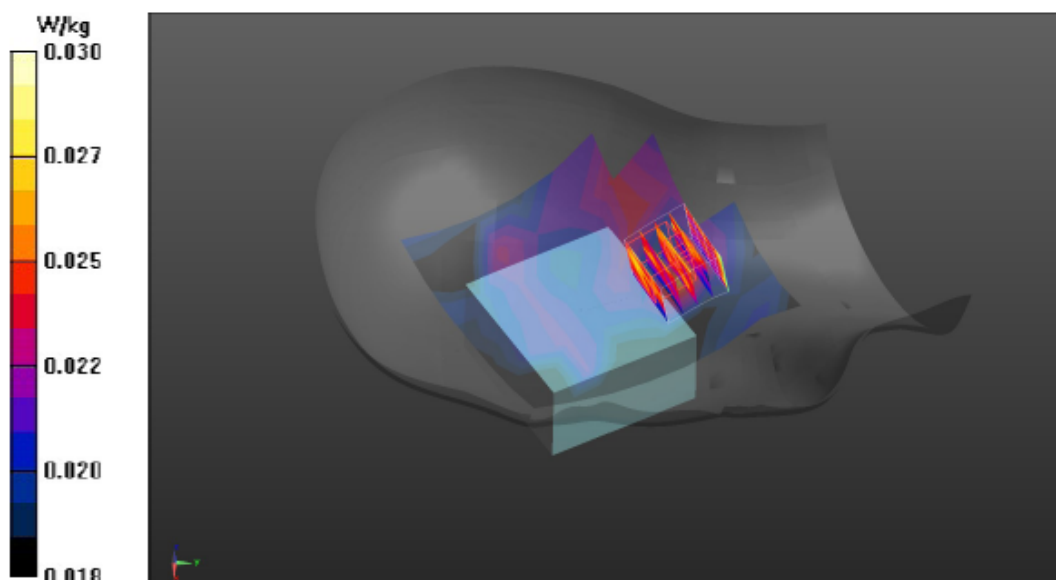

Date: 3/12/2026

Test Laboratory: Audix_SAR Lab

P5 BLE2M CH38 2478MHz Left Cheek**DUT: YY3006**


Communication System: UID 0, BT (0); Frequency: 2478 MHz; Duty Cycle: 1:3.24
Medium parameters used: $f = 2478$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.902$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(6.56, 7.07, 7.4) @ 2478 MHz; Calibrated: 9/25/2025
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1305; Calibrated: 4/22/2025
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1709
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (7x7x1): Measurement grid: $dx=20$ mm, $dy=20$ mm
Maximum value of SAR (measured) = 0.0606 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 5.801 V/m; Power Drift = 0.39 dB
Peak SAR (extrapolated) = 0.0800 W/kg
SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.067 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 90.4%
Maximum value of SAR (measured) = 0.0797 W/kg

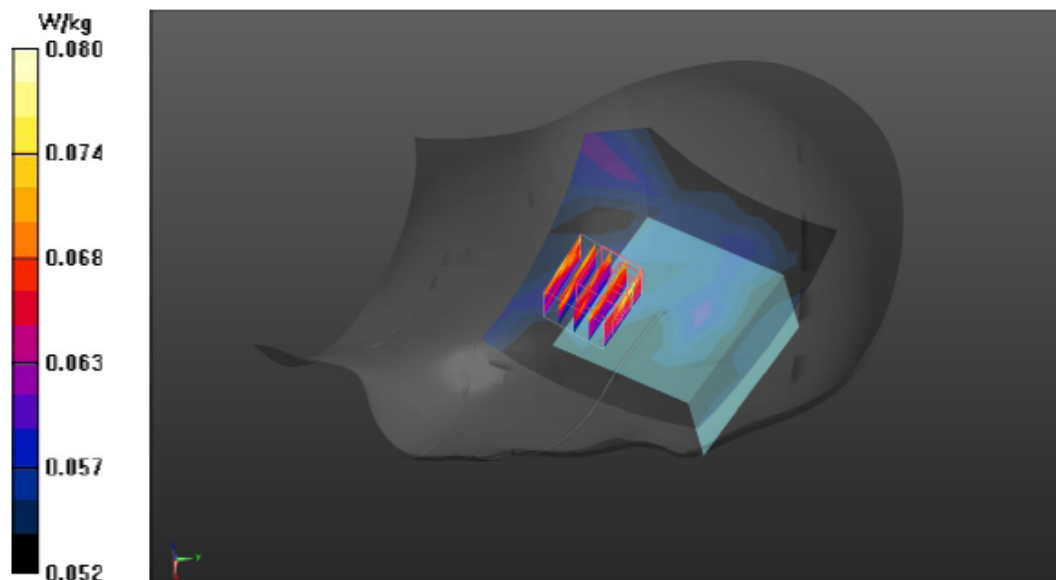

Date: 3/12/2026

Test Laboratory: Audix_SAR Lab

P8 BLE2M CH38 2478MHz Flat**DUT: YY3006**

Communication System: UID 0, BT (0); Frequency: 2478 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2478$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.902$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(6.56, 7.07, 7.4) @ 2478 MHz; Calibrated: 9/25/2025
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1305; Calibrated: 4/22/2025
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1709
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (7x7x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.0544 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.798 V/m; Power Drift = 0.51 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.041 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 70.2%

Maximum value of SAR (measured) = 0.0621 W/kg

