



MRT Technology (Taiwan) Co., Ltd
Phone: +886-3-3288388
Fax: +886-3-3288918
Web: www.mrt-cert.com

Report No.: 2511TW0116-U3
Report Version: 1.0
Issue Date: 2026-01-29

MEASUREMENT REPORT

FCC ID : AL8-PWPTF620P

APPLICANT : HP Inc.

Application Type : Certification

Product : Wireless Charge Stand

Model No. : PWPTF620P

Brand Name : HP

FCC Classification : DCD-Part 15 Low Power Transmitter Below 1705 kHz

FCC Rule Part(s) : Part 15.209

Test Procedure(s) : ANSI C63.10-2020+Cor 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Received Date : November 27, 2025

Test Date : December 19, 2025~ January 28, 2026

Tested By : *Kaunaz Lee*
(Kaunaz Lee)

Reviewed By : *Paddy Chen*
(Paddy Chen)

Approved By : *Chenz Ker*
(Chenz Ker)



The test results only relate to the tested sample.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2511TW0116-U3	1.0	Original Report	2026-01-29	

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Test Mode	8
2.3. Test Software	9
2.4. Test Configuration	9
2.5. Test System Details	15
2.6. EMI Suppression Device(s)/Modifications	16
2.7. Labeling Requirements	16
3. DESCRIPTION of TEST	17
3.1. Evaluation Procedure	17
3.2. AC Line Conducted Emissions	17
3.3. Radiated Emissions	18
4. ANTENNA REQUIREMENTS	19
5. TEST EQUIPMENT CALIBRATION DATE	20
6. MEASUREMENT UNCERTAINTY	21
7. TEST RESULT	22
7.1. Summary	22
7.2. Radiated Spurious Emissions and Field Strength of Fundamental Emissions	
Measurement	23
7.2.1. Test Limit	23
7.2.2. Test Procedure Used	23
7.2.3. Test Setup	25
7.2.4. Test Result	26
7.3. 20dB Bandwidth Measurement	62
7.3.1. Test Limit	62
7.3.2. Test Procedure Used	62
7.3.3. Test Setting	62
7.3.4. Test Setup	62
7.3.5. Test Result	63
7.4. AC Conducted Emissions Measurement	65

7.4.1.	Test Limit	65
7.4.2.	Test Setup	65
7.4.3.	Test Result.....	66
8.	CONCLUSION	78
	Appendix A : Test Photograph	79
	Appendix B : EUT Photograph.....	79
	Appendix C : Internal Photograph	79

General Information

Applicant	HP Inc.
Applicant Address	1501 Page Mill Road, Palo Alto, CA 94304 USA
Manufacturer	HP Inc.
Manufacturer Address	1501 Page Mill Road, Palo Alto, CA 94304 USA
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
Test Device Serial No.	#1-1 ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

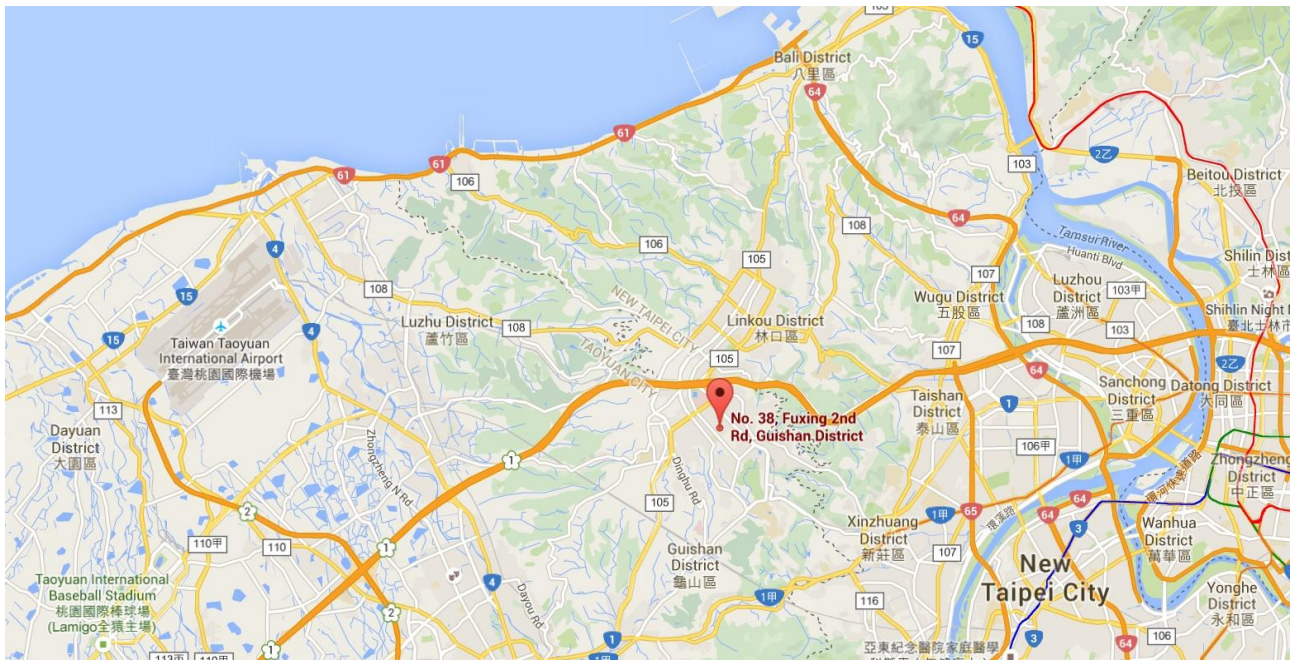

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Wireless Charge Stand
Model No.	PWPTF620P
Brand Name	HP
Frequency Range	BPP & PPDE Mode: 115kHz ~ 147kHz 、 WLC Mode: 122kHz ~ 145kHz 、 AFC Mode: 127.7kHz 、 MPP Mode: 360kHz
Modulation	FSK
Antenna Type	Loop Antenna
Specification	WPC: WLC Mode: 3Watt max BPP Mode: 5Watt max AFC Mode: 7.5Watt max PPDE Mode: 8Watt max MPP Mode: 15Watt max
Accessory	
Adapter	Brand: HP Model No: A1082-200150C-9P1 Input: AC 100-240V~50/60Hz 0.8A Output: 5.0V=3.0A 15.0W/ 9.0V= 3.0A 27.0W/12.0V= 2.5A.30.0W/ 15.0V= 2.0A.30.0W/20.0V= 1.5A 30.0W

2.2. Test Mode

Test Mode	Mode 1: WPC_WLC-3W Mode 2: WPC_WLC-3W + BPP-5W Mode 3: WPC_WLC-3W + AFC-7.5W Mode 4: WPC_WLC-3W + PPDE-8W Mode 5: WPC_WLC-3W + MPP-15W Mode 6: Standby Mode
-----------	--


2.3. Test Software

N/A.

2.4. Test Configuration


The **Wireless Charge Stand** , ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

Connection Diagram (Mode 1)

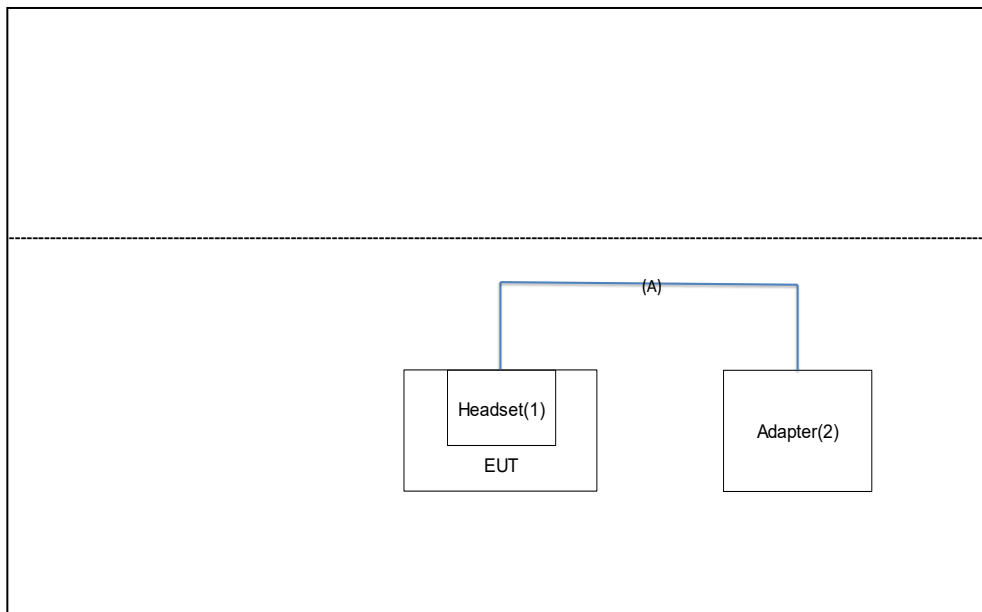


Signal Cable Type		Signal Cable Description
A	USB C to C Cable	Shielded, 1.5m

Connection Diagram (Mode 2)

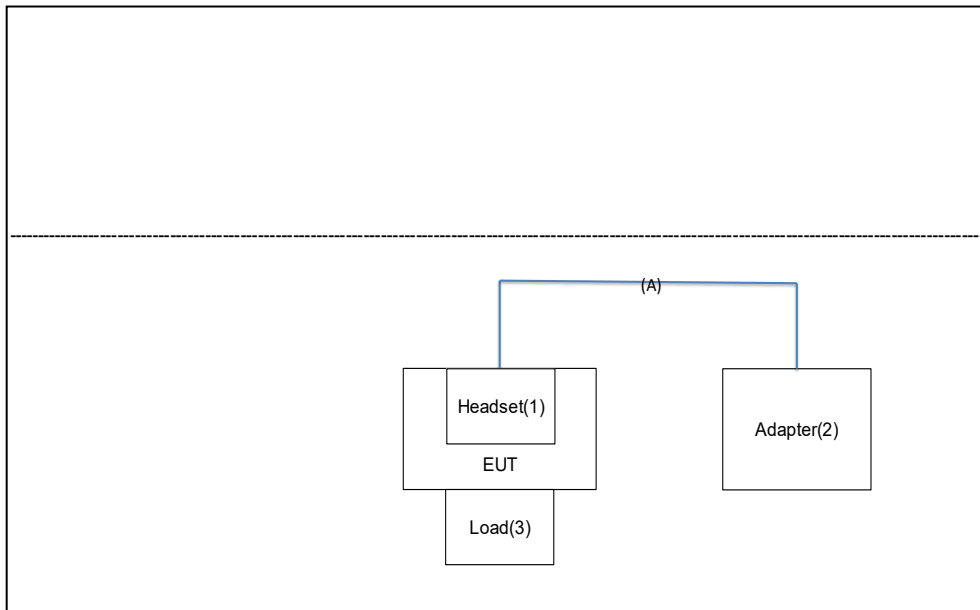


Signal Cable Type		Signal Cable Description
A	USB C to C Cable	Shielded, 1.5m

Connection Diagram (Mode 3)

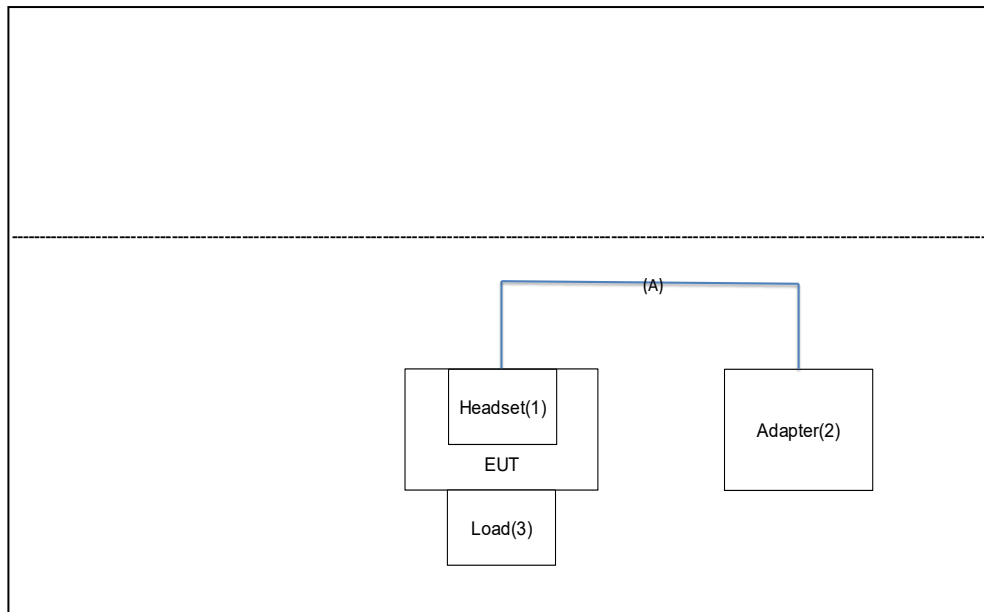


Signal Cable Type		Signal Cable Description
A	USB C to C Cable	Shielded, 1.5m

Connection Diagram (Mode 4)

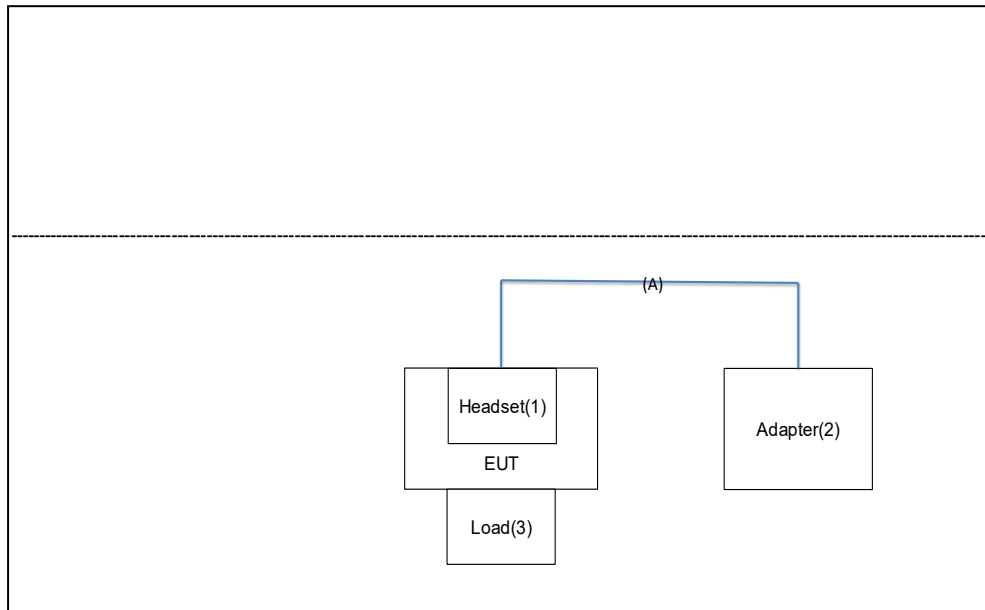


Signal Cable Type		Signal Cable Description
A	USB C to C Cable	Shielded, 1.5m

Connection Diagram (Mode 5)

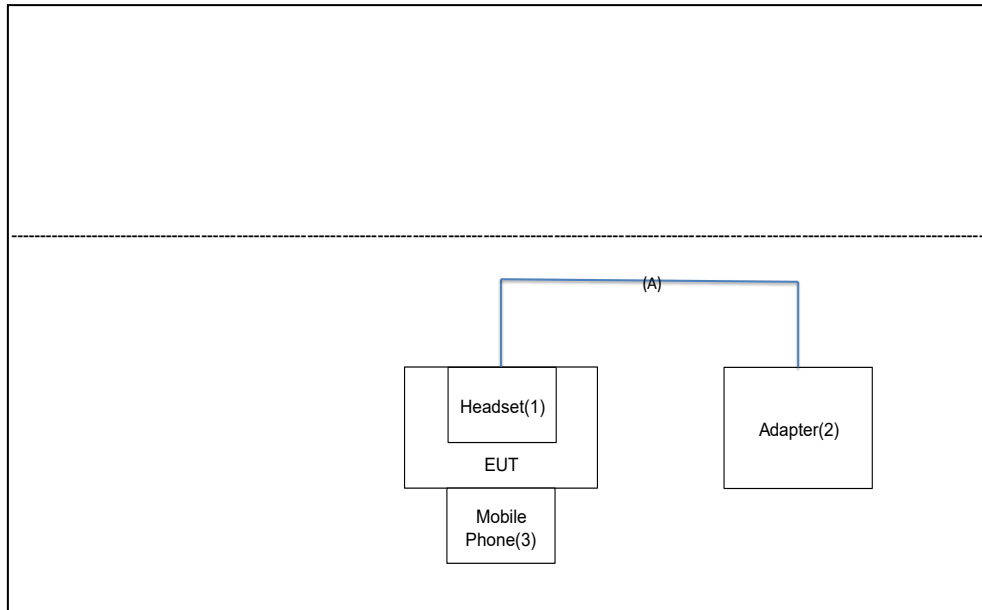

Signal Cable Type		Signal Cable Description
A	USB C to C Cable	Shielded, 1.5m

Connection Diagram (Mode 6)

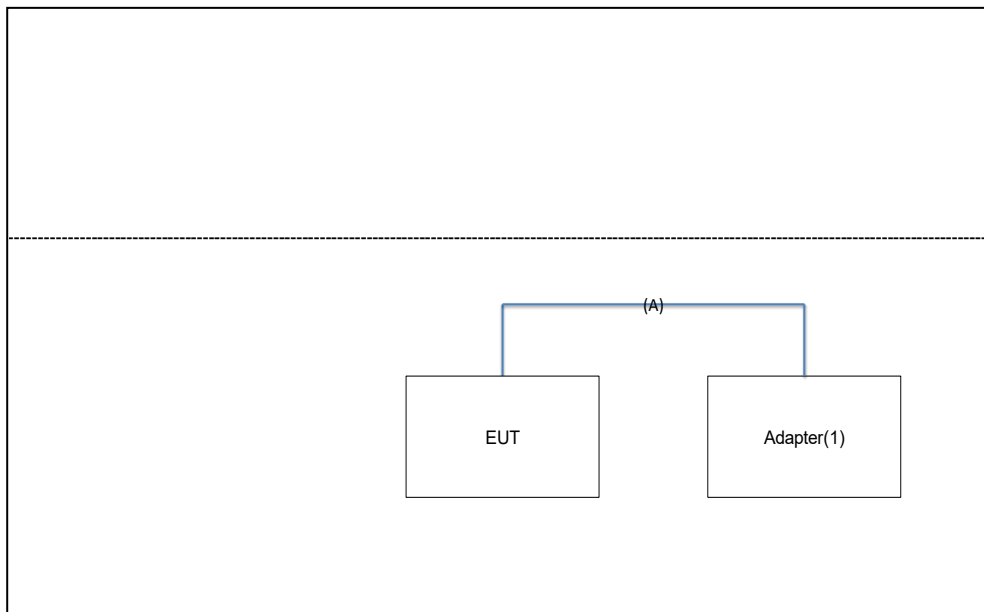

Signal Cable Type		Signal Cable Description
A	USB C to C Cable	Shielded, 1.5m

2.5. Test System Details

The types for all equipment, and descriptions of all cables used in the tested system (including inserted cards) are:

Mode 1:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Headset	HP	PBF620	N/A	N/A
2	Adapter	HP	A1082-200150C-9P1	N/A	N/A

Mode 2:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Headset	HP	PBF620	N/A	N/A
2	Adapter	HP	A1082-200150C-9P1	N/A	N/A
3	Load	NU1619 +5Ω Resistor	5W	N/A	N/A

Mode 3:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Headset	HP	PBF620	N/A	N/A
2	Adapter	HP	A1082-200150C-9P1	N/A	N/A
3	Load	NU1619 +9Ω Resistor	8W	N/A	N/A

Mode 4:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Headset	HP	PBF620	N/A	N/A
2	Adapter	HP	A1082-200150C-9P1	N/A	N/A
3	Load	NU1619 +7.5Ω Resistor	7.5W	N/A	N/A

Mode 5:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Headset	HP	PBF620	N/A	N/A
2	Adapter	HP	A1082-200150C-9P1	N/A	N/A
3	Mobile Phone	APPLE	iPhone17	N/A	N/A

Mode 6:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Adapter	HP	A1082-200150C-9P1	N/A	N/A

2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.7. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2020) were used in the measurement of the **Wireless Charge Stand**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2020.

Line conducted emissions test results are shown in Section 7.4.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated Emissions test results are shown in Section 7.2.

4. ANTENNA REQUIREMENTS

§15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of **Wireless Charge Stand** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Wireless Charge Stand** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2026/3/5
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2026/4/14
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2026/5/13

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2026/4/16
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00086	1 year	2026/11/13
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00106	1 year	2026/3/3
Broadband Preamplifier	EMC Instruments corporation	EMC118A45SEE	MRTTWA00107	1 year	2026/3/3
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2026/3/27
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2026/3/20
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2026/3/4
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2026/5/20

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2026/10/20
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2026/7/14
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2026/3/11

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
Conducted Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 1.3\text{dB}$
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$

7. TEST RESULT

7.1. Summary

Product Name: Wireless Charge Stand

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.209	Radiated Spurious Emissions and Field Strength of Fundamental Emissions	FCC 15.209 limits	Radiated	Pass	Section 7.2
2.1049	20dB Bandwidth	N/A		Pass	Section 7.3
15.207	AC Conducted Emissions 150kHz - 30MHz	FCC 15.207 limits	Line Conducted	Pass	Section 7.4

Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) and Antenna polarization (H,V) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 4) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. Radiated Spurious Emissions and Field Strength of Fundamental Emissions Measurement

7.2.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.209 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note : The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

7.2.2. Test Procedure Used

ANSI C63.10-2020 - Section 11.12.2.3 (quasi-peak measurements)

ANSI C63.10-2020 - Section 11.12.2.4 (peak power measurements)

ANSI C63.10-2020 - Section 11.12.2.5 (average power measurements)

Test Setting

Peak Power Measurement


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = $3 \times \text{RBW}$
4. Detector = peak
5. Sweep time = auto couple

Table 1 - RBW as a function of frequency


Frequency	RBW
9 kHz ~ 150 kHz	200 Hz ~ 300 Hz
0.15 MHz ~ 30 MHz	9 kHz ~ 10 kHz
30 MHz ~ 1000 MHz	100 kHz ~ 120 kHz
> 1000 MHz	1 MHz

7.2.3. Test Setup

9kHz ~ 30MHz Test Setup:

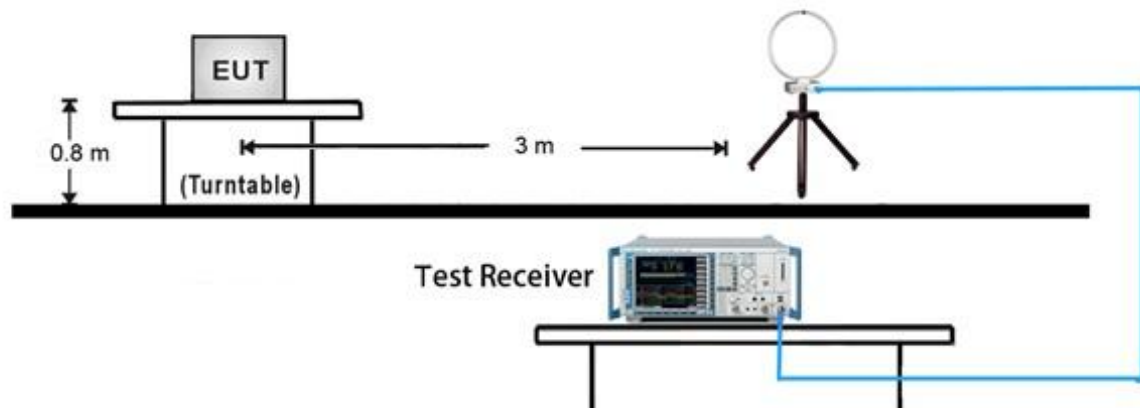


30MHz ~ 1GHz Test Setup:

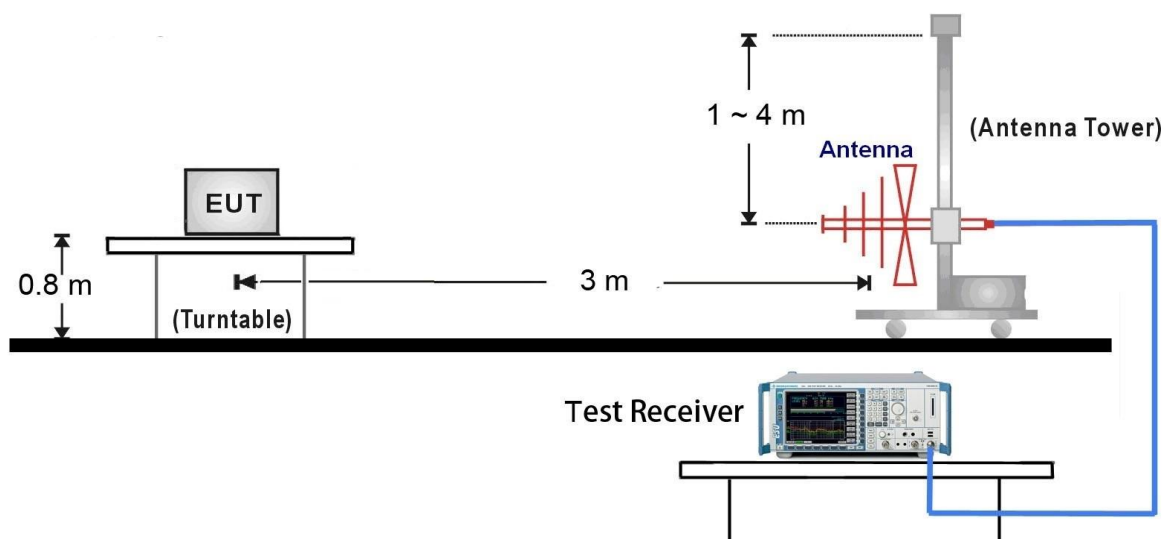

7.2.4. Test Result

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face On	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W	Test Voltage	AC 120V/60Hz

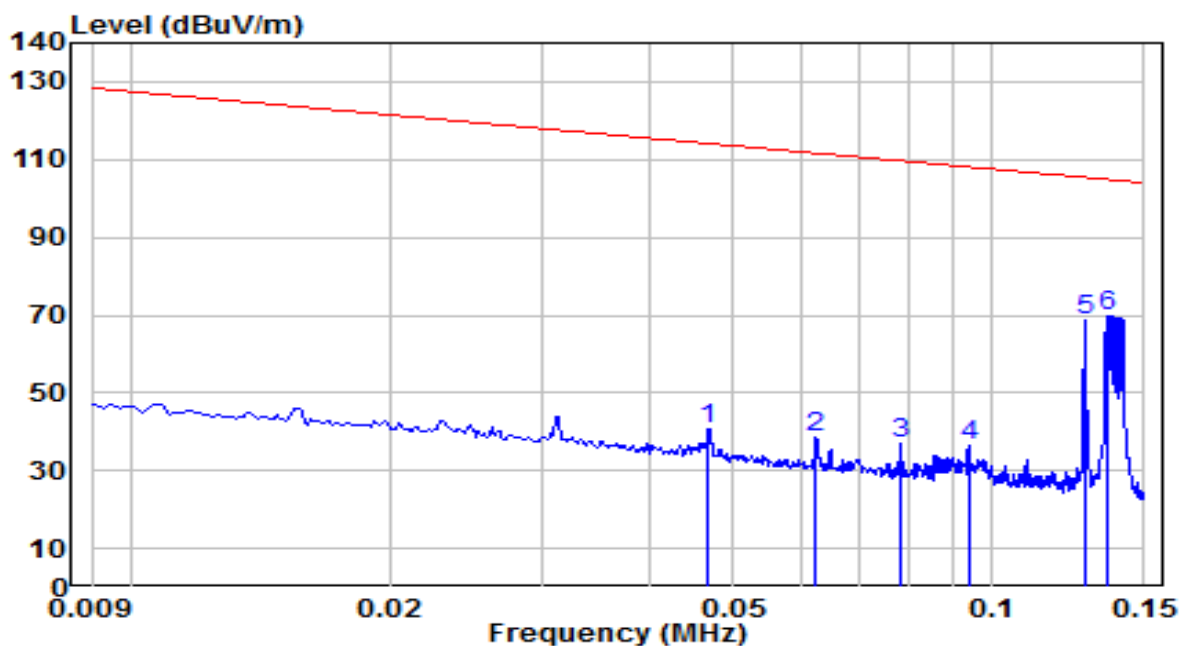


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.047	21.68	19.14	40.81	-73.38	114.19	100	212	Peak
2	0.062	19.77	18.79	38.56	-73.12	111.69	100	297	Peak
3	0.078	18.41	18.48	36.89	-72.86	109.75	100	293	Peak
4	0.094	18.39	18.17	36.55	-71.61	108.16	100	134	Peak
5	0.128	50.30	18.12	68.42	-37.05	105.47	100	288	Peak
6	* 0.135	51.82	18.14	69.96	-35.00	104.96	100	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face On	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W	Test Voltage	AC 120V/60Hz

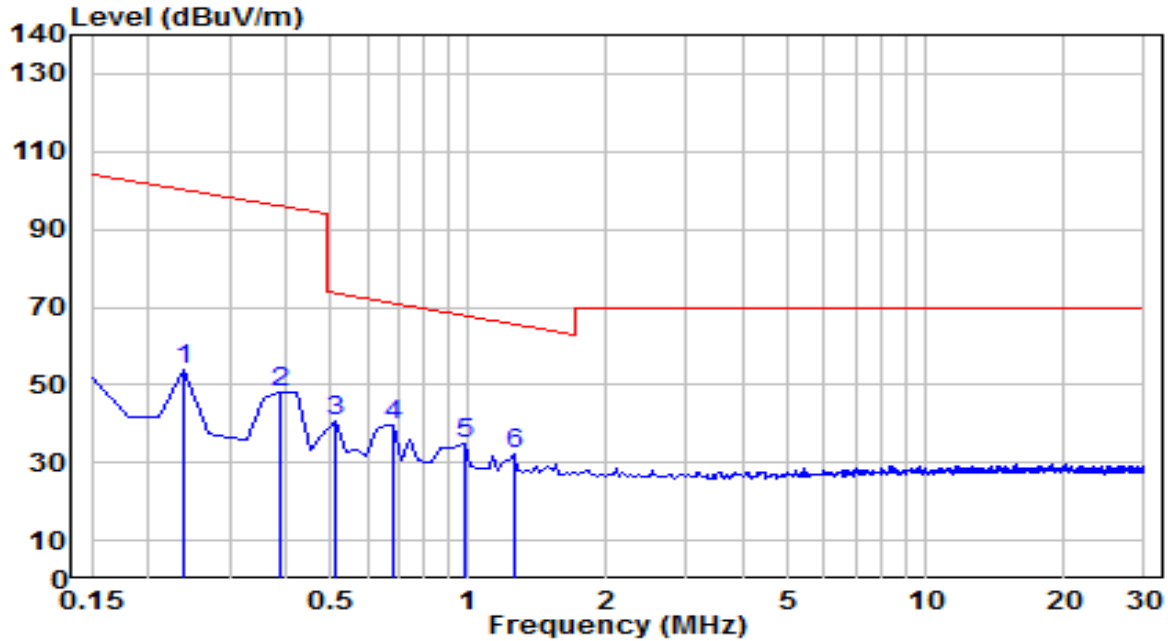


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.240	35.59	18.41	54.00	-46.02	100.01	100	274	Peak
2	0.389	29.69	18.61	48.30	-47.50	95.81	100	37	Peak
3	0.508	22.02	18.68	40.70	-32.79	73.48	100	285	Peak
4	* 0.687	21.23	18.65	39.88	-30.99	70.87	100	47	Peak
5	0.986	16.04	18.60	34.64	-33.10	67.75	100	91	Peak
6	1.254	13.87	18.61	32.48	-33.18	65.66	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face Off	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W	Test Voltage	AC 120V/60Hz

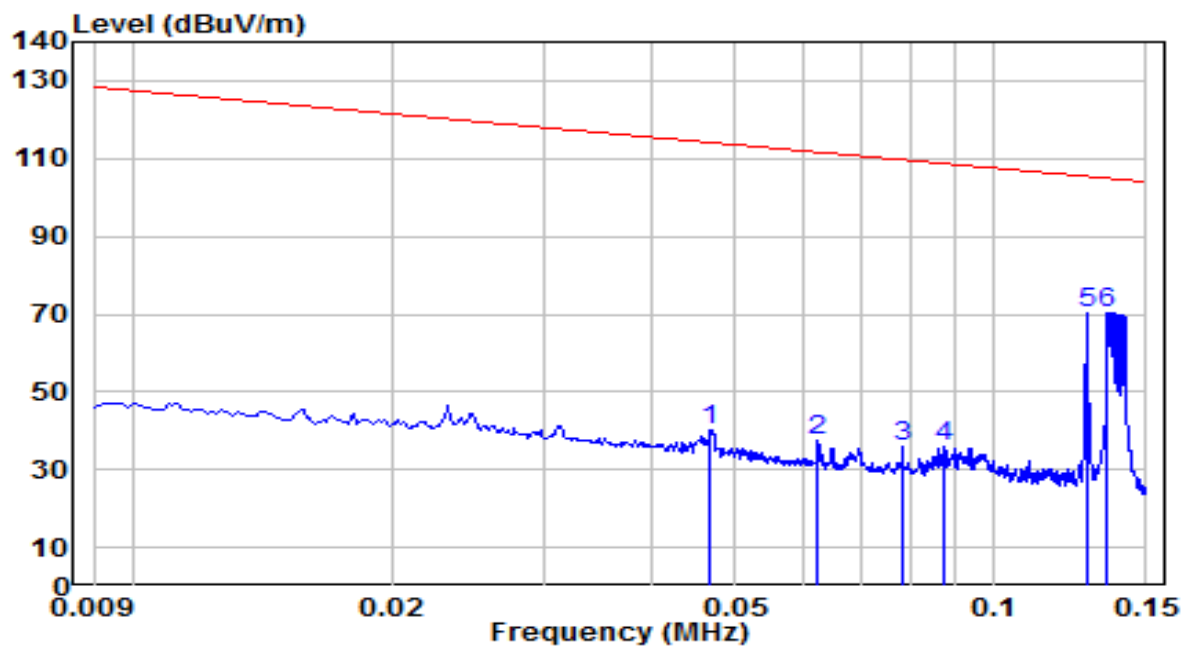


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.047	21.12	19.14	40.26	-73.93	114.19	100	333	Peak
2	0.062	18.54	18.79	37.33	-74.36	111.69	100	273	Peak
3	0.078	17.55	18.48	36.02	-73.72	109.75	100	228	Peak
4	0.087	17.44	18.29	35.74	-73.03	108.77	100	66	Peak
5	0.128	52.02	18.12	70.14	-35.33	105.47	100	250	Peak
6	* 0.135	52.35	18.14	70.48	-34.49	104.97	100	349	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face Off	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W	Test Voltage	AC 120V/60Hz

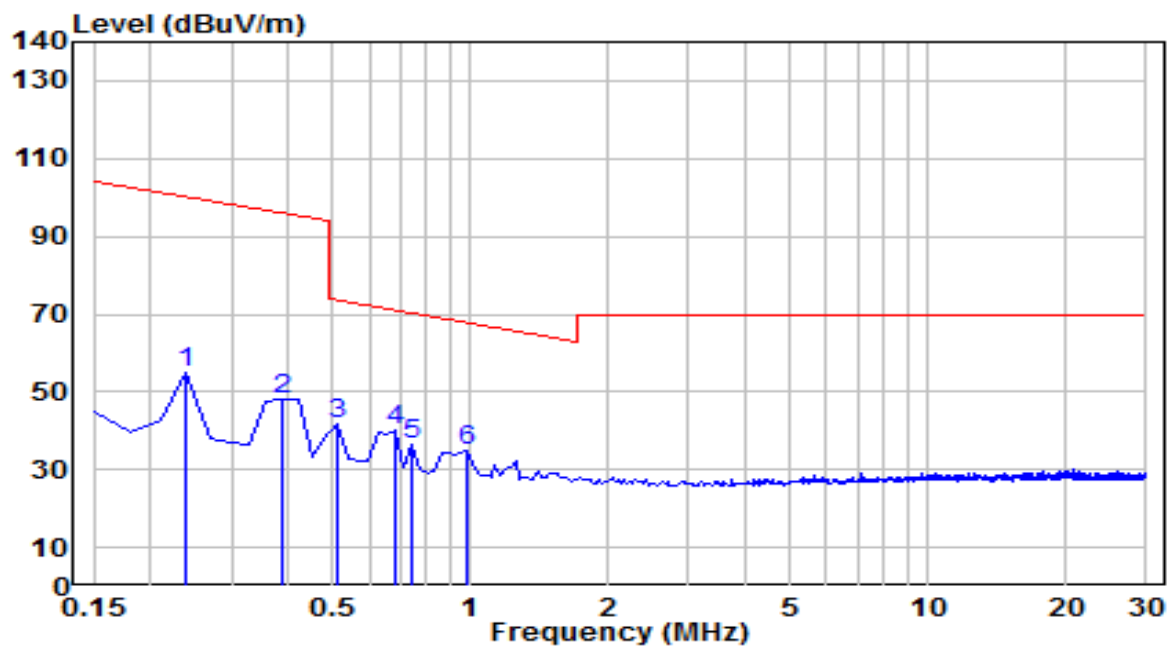


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.240	36.54	18.41	54.95	-45.07	100.01	100	224	Peak
2	0.389	29.64	18.61	48.25	-47.55	95.81	100	44	Peak
3	0.508	23.23	18.68	41.91	-31.57	73.48	100	74	Peak
4	* 0.687	21.49	18.65	40.14	-30.73	70.87	100	351	Peak
5	0.747	17.79	18.64	36.43	-33.72	70.15	100	288	Peak
6	0.986	16.09	18.60	34.69	-33.05	67.75	100	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face On	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + BPP-5W	Test Voltage	AC 120V/60Hz

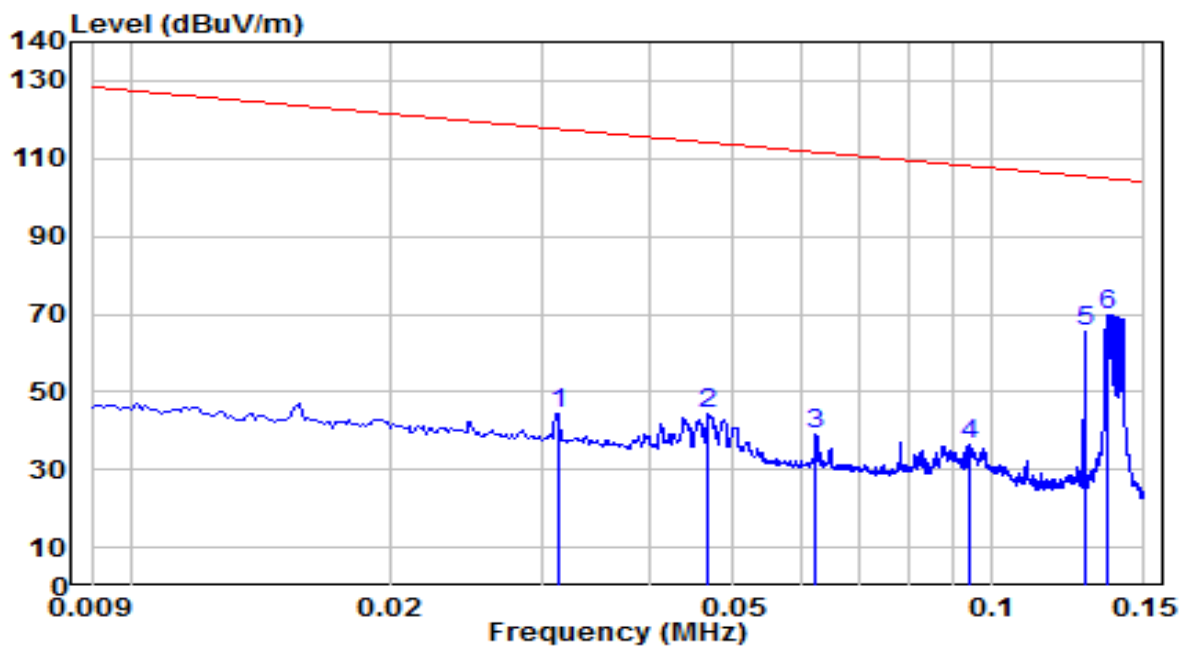


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.031	24.68	19.60	44.28	-73.41	117.69	100	89	Peak
2	0.047	25.47	19.14	44.61	-69.58	114.19	100	199	Peak
3	0.062	20.33	18.79	39.12	-72.57	111.69	100	328	Peak
4	0.094	18.45	18.17	36.62	-71.54	108.16	100	108	Peak
5	0.128	47.53	18.12	65.65	-39.82	105.47	100	164	Peak
6	* 0.135	51.75	18.14	69.89	-35.08	104.96	100	54	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face On	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + BPP-5W	Test Voltage	AC 120V/60Hz

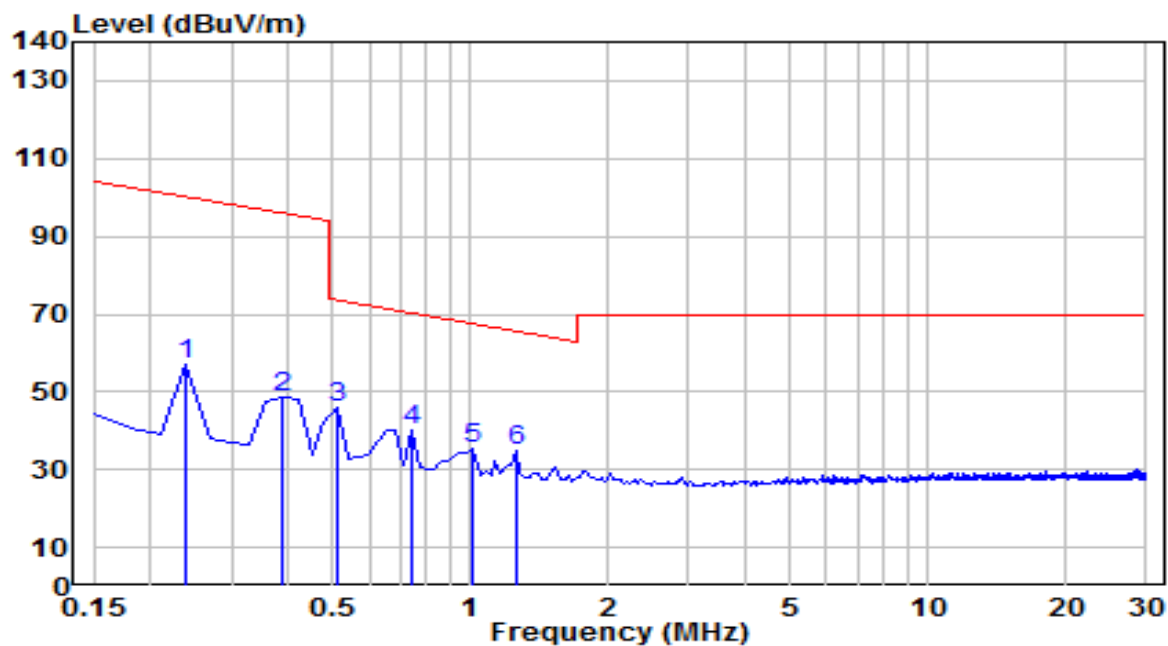


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.240	38.66	18.41	57.07	-42.95	100.01	100	188	Peak
2	0.389	29.84	18.61	48.45	-47.36	95.81	100	360	Peak
3	* 0.508	27.14	18.68	45.82	-27.66	73.48	100	192	Peak
4	0.747	21.57	18.64	40.21	-29.93	70.15	100	174	Peak
5	1.016	16.87	18.60	35.47	-32.02	67.49	100	200	Peak
6	1.254	16.04	18.61	34.65	-31.01	65.66	100	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face Off	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + BPP-5W	Test Voltage	AC 120V/60Hz

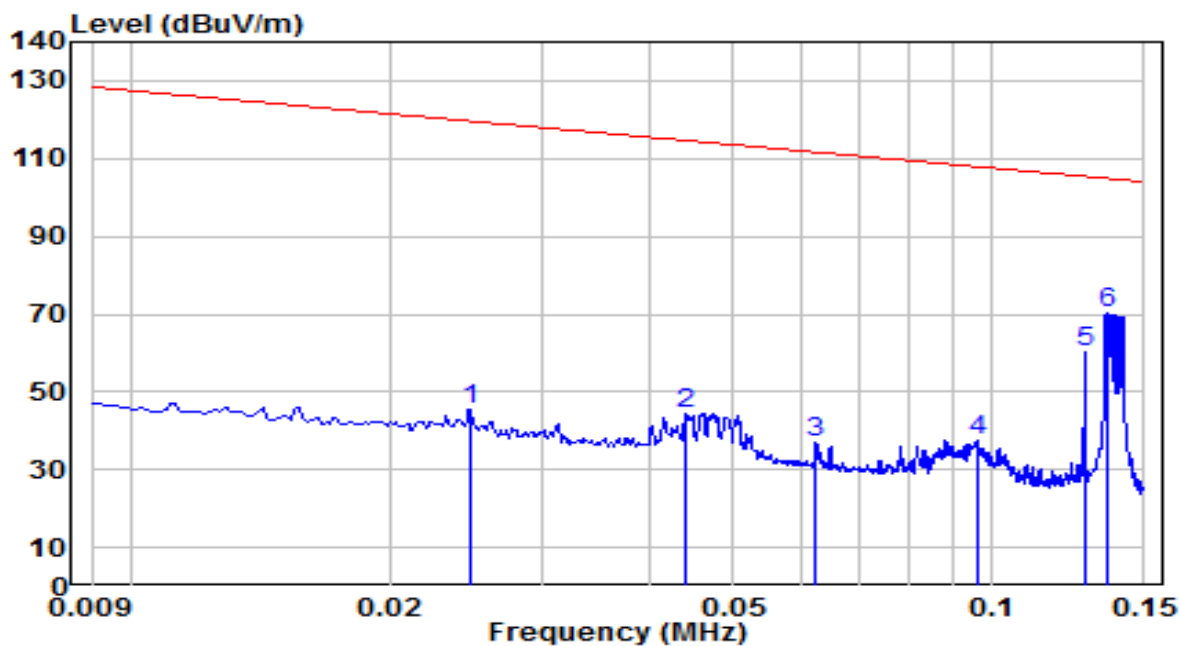


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.025	26.00	19.35	45.34	-74.36	119.70	100	190	Peak
2	0.044	25.29	19.22	44.51	-70.20	114.70	100	236	Peak
3	0.062	18.10	18.79	36.89	-74.80	111.69	100	266	Peak
4	0.096	19.64	18.12	37.77	-70.20	107.97	100	232	Peak
5	0.128	42.00	18.12	60.11	-45.36	105.47	100	153	Peak
6	* 0.135	51.98	18.14	70.11	-34.85	104.96	100	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face Off	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + BPP-5W	Test Voltage	AC 120V/60Hz

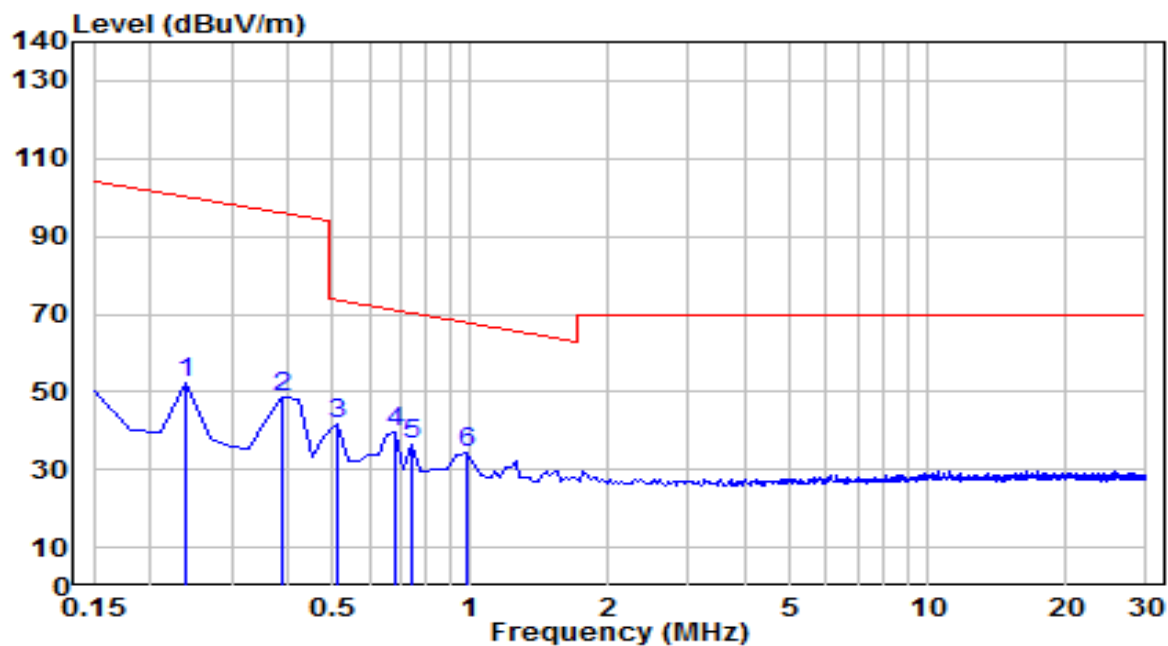


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.240	33.81	18.41	52.21	-47.80	100.01	100	180	Peak
2	0.389	29.79	18.61	48.41	-47.40	95.81	100	51	Peak
3	0.508	23.31	18.68	41.99	-31.49	73.48	100	196	Peak
4	* 0.687	20.81	18.65	39.46	-31.41	70.87	100	71	Peak
5	0.747	17.92	18.64	36.56	-33.59	70.15	100	231	Peak
6	0.986	15.89	18.60	34.50	-33.25	67.75	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face On	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + AFC-7.5W	Test Voltage	AC 120V/60Hz

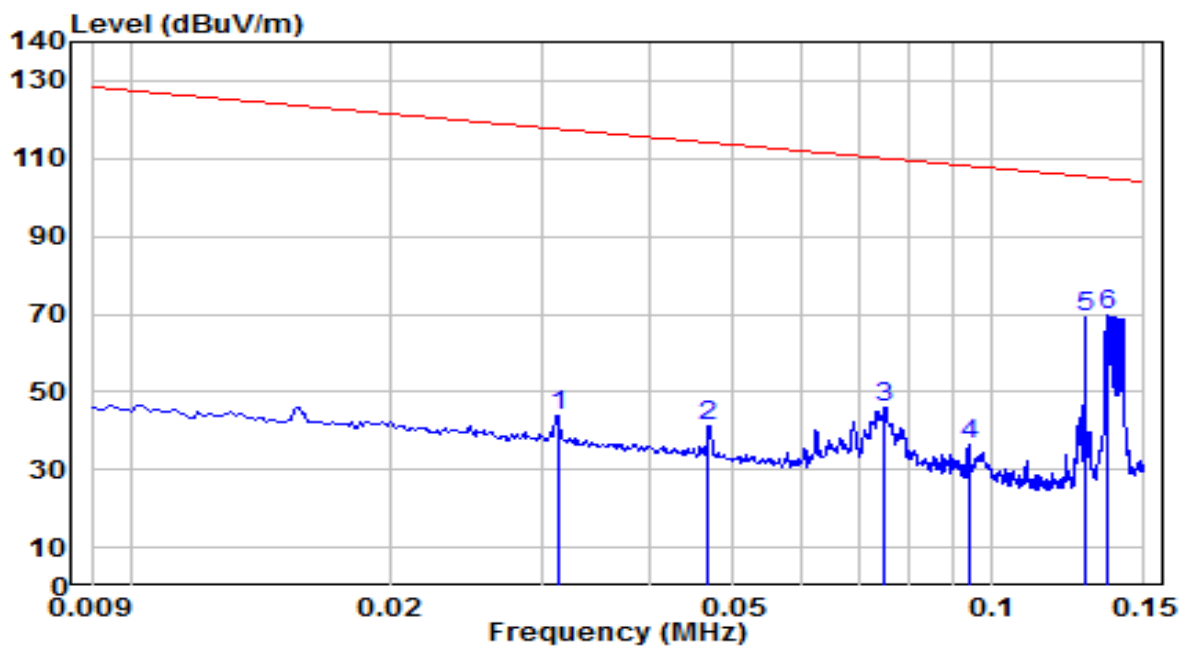


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.031	24.32	19.60	43.91	-73.77	117.69	100	269	Peak
2	0.047	22.25	19.14	41.38	-72.81	114.19	100	203	Peak
3	0.075	27.21	18.54	45.75	-64.35	110.10	100	201	Peak
4	0.094	18.03	18.17	36.20	-71.96	108.16	100	108	Peak
5	0.128	50.89	18.12	69.00	-36.46	105.47	100	159	Peak
6	* 0.135	51.48	18.14	69.61	-35.35	104.96	100	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face On	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + AFC-7.5W	Test Voltage	AC 120V/60Hz

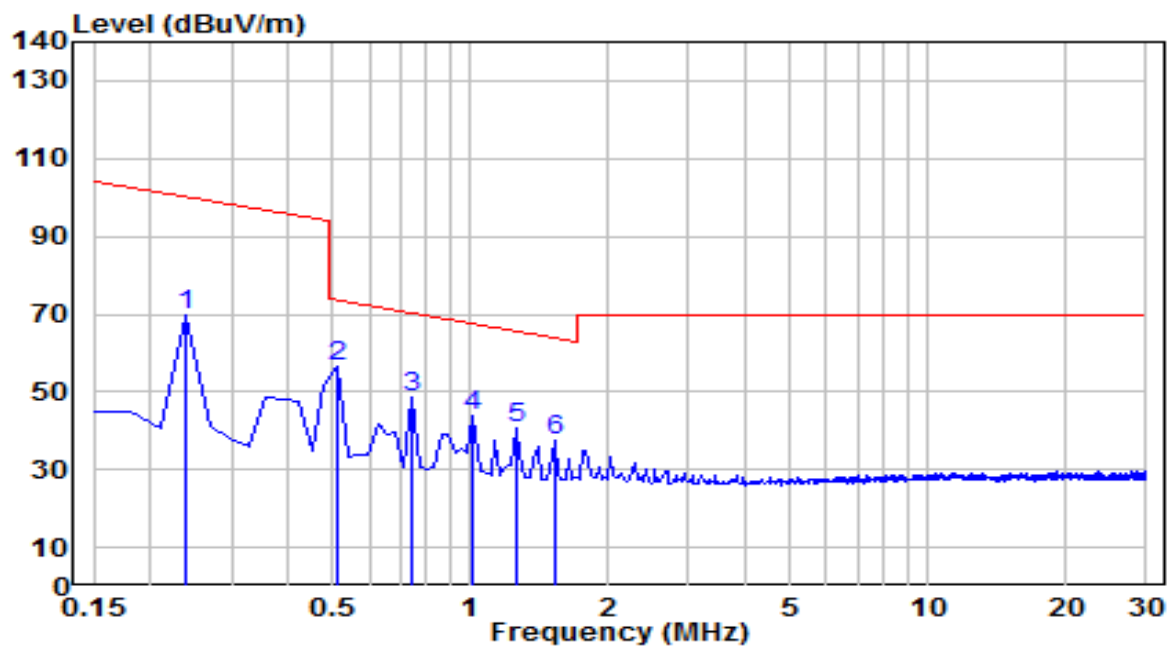


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.240	51.47	18.41	69.88	-30.14	100.01	100	199	Peak
2	* 0.508	37.70	18.68	56.38	-17.10	73.48	100	204	Peak
3	0.747	29.97	18.64	48.61	-21.54	70.15	100	204	Peak
4	1.016	25.35	18.60	43.95	-23.53	67.49	100	207	Peak
5	1.254	21.91	18.61	40.52	-25.14	65.66	100	191	Peak
6	1.523	18.72	18.63	37.34	-26.64	63.98	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face Off	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + AFC-7.5W	Test Voltage	AC 120V/60Hz

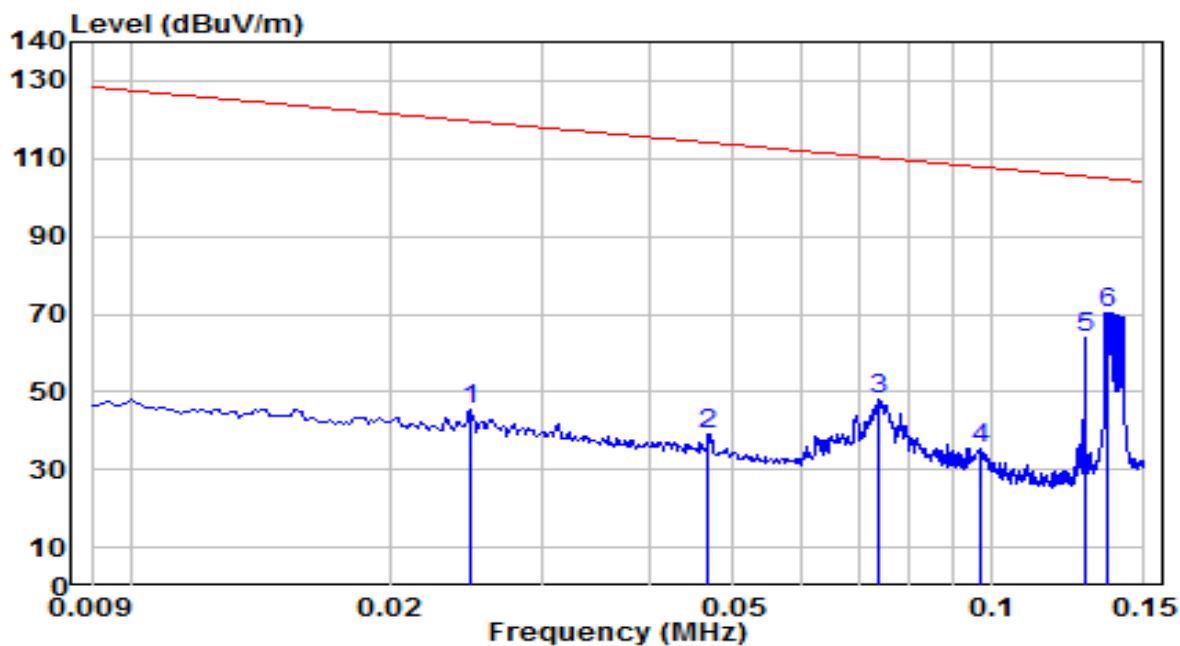


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.025	25.95	19.35	45.30	-74.41	119.70	100	355	Peak
2	0.047	19.93	19.14	39.06	-75.13	114.19	100	42	Peak
3	0.074	29.41	18.57	47.98	-62.27	110.25	100	235	Peak
4	0.097	17.42	18.11	35.52	-72.37	107.89	100	106	Peak
5	0.128	45.75	18.12	63.86	-41.60	105.47	100	167	Peak
6	* 0.135	52.28	18.14	70.42	-34.54	104.96	100	354	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face Off	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + AFC-7.5W	Test Voltage	AC 120V/60Hz

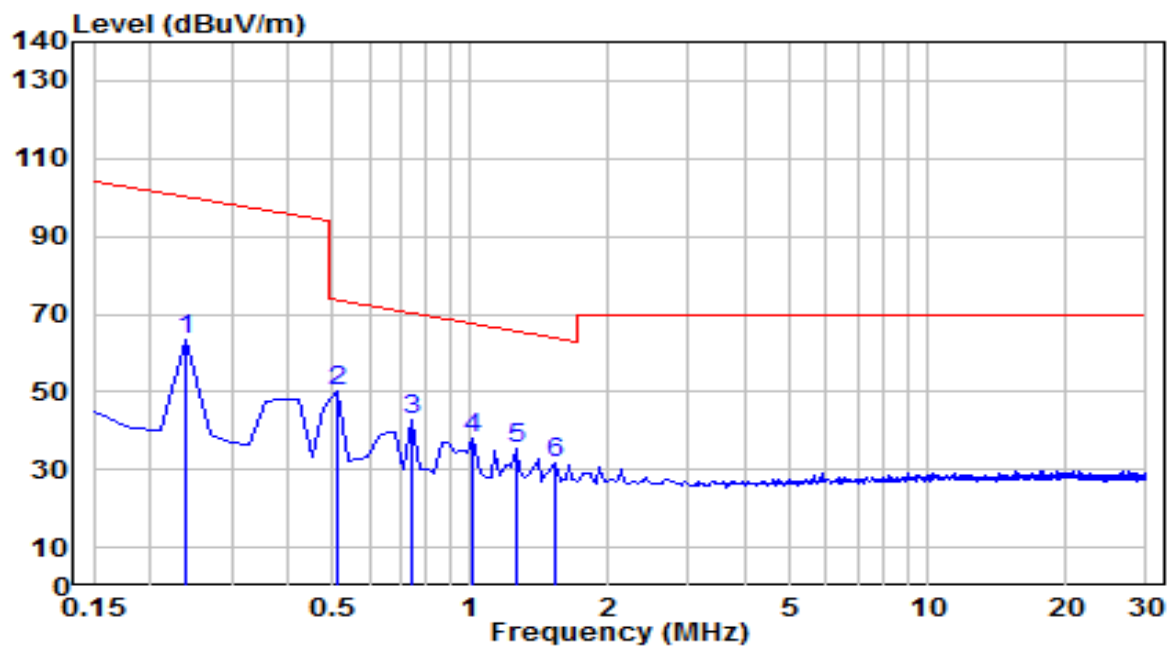


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.240	45.25	18.41	63.65	-36.36	100.01	100	190	Peak
2	* 0.508	31.76	18.68	50.43	-23.05	73.48	100	197	Peak
3	0.747	24.41	18.64	43.05	-27.10	70.15	100	199	Peak
4	1.016	19.40	18.60	38.00	-29.49	67.49	100	202	Peak
5	1.254	16.93	18.61	35.55	-30.11	65.66	100	204	Peak
6	1.523	13.12	18.63	31.75	-32.23	63.98	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face On	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + PPDE-8W	Test Voltage	AC 120V/60Hz

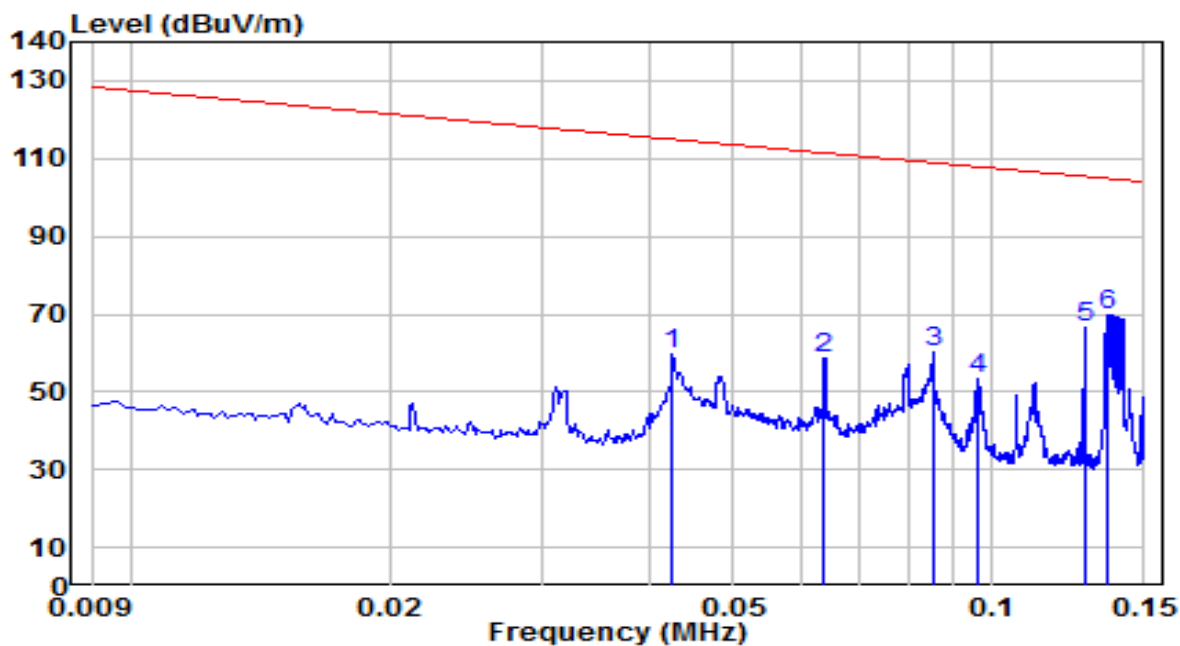


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.043	40.63	19.26	59.89	-55.12	115.01	100	156	Peak
2	0.064	40.11	18.76	58.87	-52.62	111.49	100	172	Peak
3	0.085	41.66	18.33	60.00	-48.98	108.98	100	165	Peak
4	0.096	35.40	18.12	53.53	-54.44	107.97	100	353	Peak
5	0.128	48.22	18.12	66.33	-39.13	105.47	100	144	Peak
6	* 0.135	51.73	18.14	69.87	-35.10	104.96	100	48	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face On	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + PPDE-8W	Test Voltage	AC 120V/60Hz

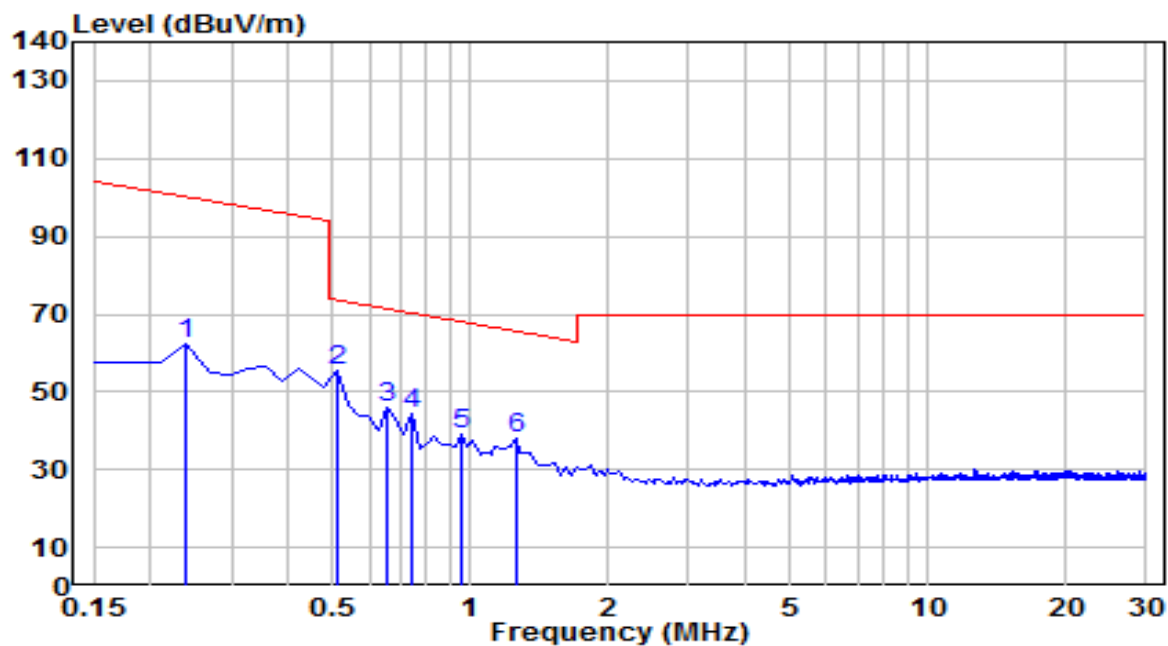


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.240	43.89	18.41	62.30	-37.71	100.01	100	174	Peak
2	* 0.508	36.72	18.68	55.40	-18.08	73.48	100	179	Peak
3	0.657	27.05	18.65	45.70	-25.55	71.25	100	358	Peak
4	0.747	25.95	18.64	44.59	-25.56	70.15	100	179	Peak
5	0.956	20.53	18.61	39.13	-28.88	68.01	100	191	Peak
6	1.254	19.62	18.61	38.23	-27.42	65.66	100	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face Off	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + PPDE-8W	Test Voltage	AC 120V/60Hz

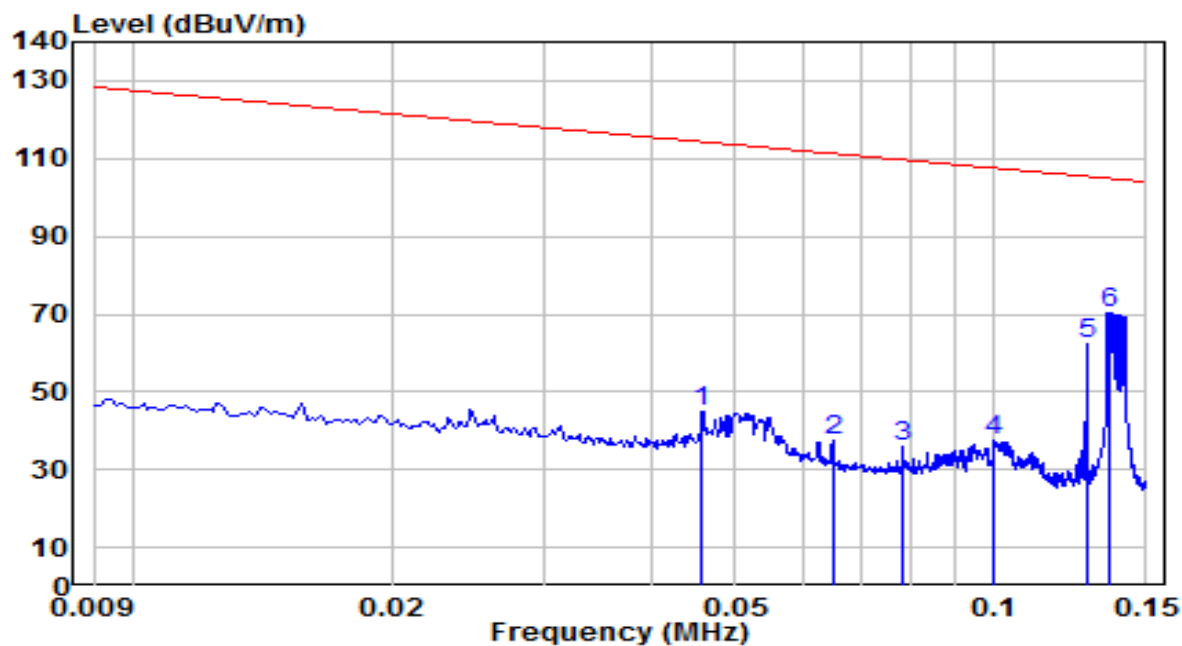


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.046	26.00	19.16	45.16	-69.22	114.38	100	256	Peak
2	0.065	18.77	18.74	37.51	-73.85	111.36	100	266	Peak
3	0.078	17.19	18.48	35.66	-74.08	109.75	100	15	Peak
4	0.100	19.35	18.04	37.40	-70.21	107.60	100	265	Peak
5	0.128	44.49	18.12	62.60	-42.86	105.47	100	148	Peak
6	* 0.135	52.23	18.14	70.37	-34.60	104.96	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-20
Factor	FMZB 1519B	Temp. / Humidity	23°C /62%
Polarity	Face Off	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + PPDE-8W	Test Voltage	AC 120V/60Hz

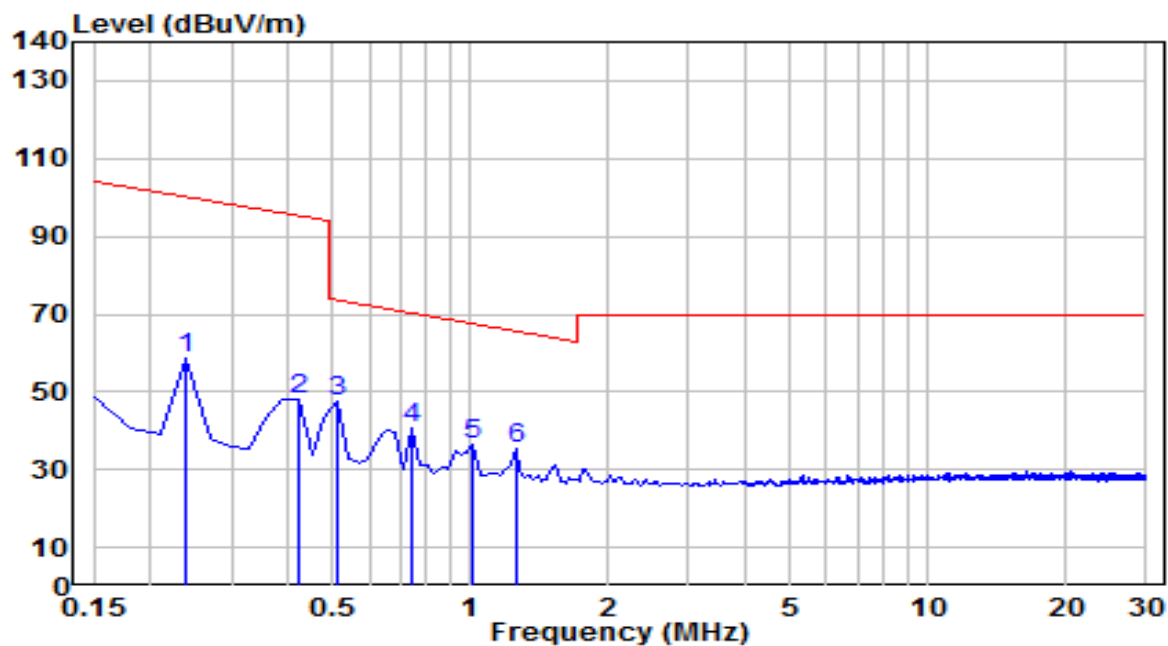


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.240	40.19	18.41	58.59	-41.42	100.01	100	188	Peak
2	0.419	29.54	18.63	48.17	-46.99	95.17	100	358	Peak
3	* 0.508	28.78	18.68	47.46	-26.03	73.48	100	205	Peak
4	0.747	21.91	18.64	40.56	-29.59	70.15	100	187	Peak
5	1.016	17.87	18.60	36.47	-31.02	67.49	100	205	Peak
6	1.254	16.63	18.61	35.24	-30.42	65.66	100	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-13
Factor	FMZB 1519B	Temp. / Humidity	23°C /49%
Polarity	Face On	Site / Test Engineer	AC1 / Kaunaz
Test Mode	WPC_WLC-3W + MPP-15W	Test Voltage	AC 120V/60Hz

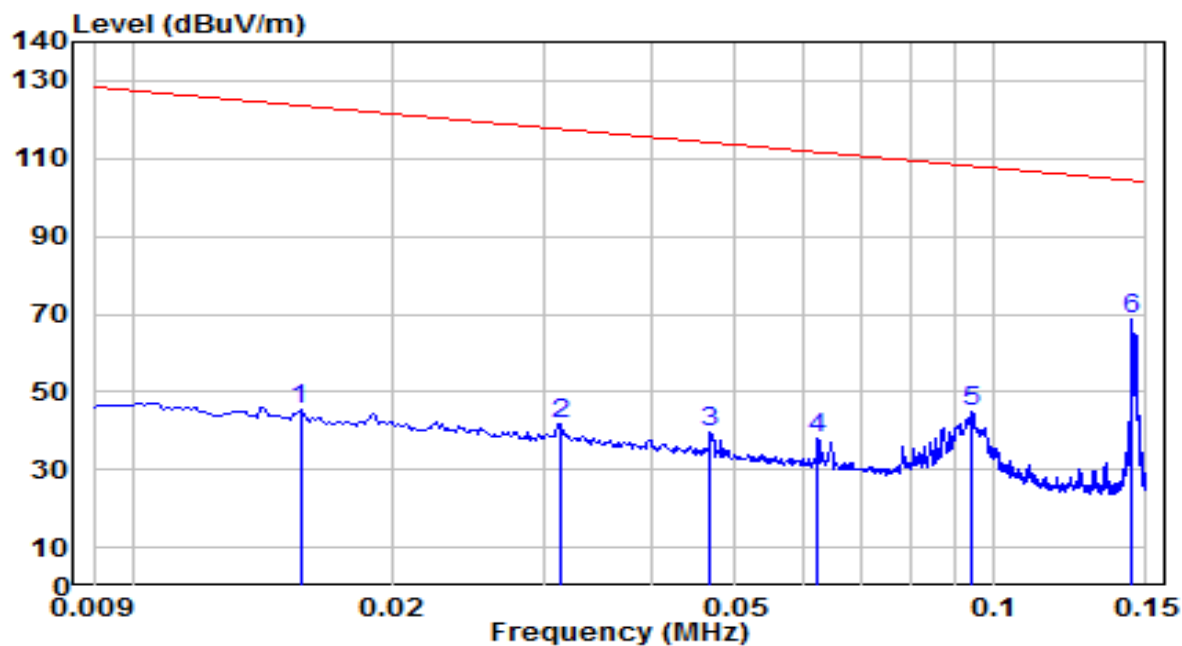


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.016	26.61	18.84	45.46	-78.26	123.71	100	359	Peak
2	0.031	22.39	19.60	41.98	-75.70	117.69	100	166	Peak
3	0.047	20.22	19.14	39.36	-74.83	114.19	100	200	Peak
4	0.062	19.05	18.79	37.84	-73.84	111.69	100	290	Peak
5	0.094	26.76	18.15	44.92	-63.19	108.11	100	320	Peak
6	* 0.145	50.27	18.16	68.43	-35.97	104.40	100	51	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-13
Factor	FMZB 1519B	Temp. / Humidity	23°C /49%
Polarity	Face On	Site / Test Engineer	AC1 / Kaunaz
Test Mode	WPC_WLC-3W + MPP-15W	Test Voltage	AC 120V/60Hz

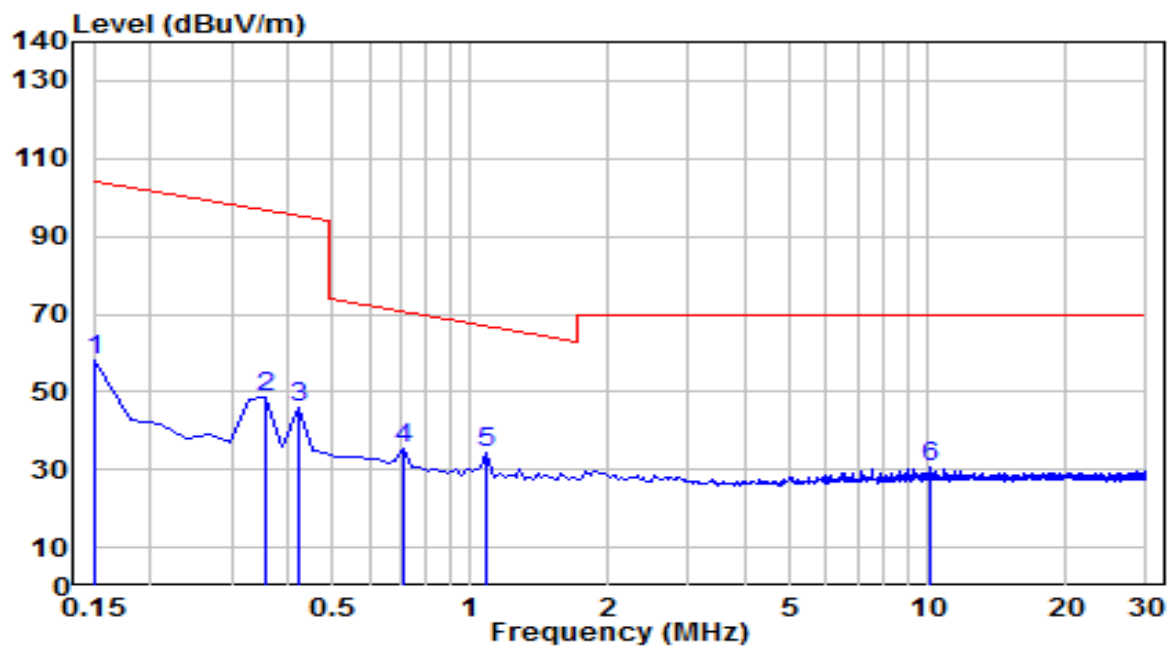


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.150	39.72	18.18	57.89	-46.19	104.08	100	34	Peak
2	0.359	29.95	18.60	48.54	-47.96	96.50	100	160	Peak
3	0.419	27.44	18.63	46.08	-49.09	95.17	100	49	Peak
4	0.717	16.87	18.65	35.51	-34.99	70.50	100	48	Peak
5	* 1.075	15.77	18.60	34.38	-32.62	66.99	100	150	Peak
6	10.060	9.60	20.94	30.54	-38.96	69.50	100	41	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-13
Factor	FMZB 1519B	Temp. / Humidity	23°C /49%
Polarity	Face Off	Site / Test Engineer	AC1 / Kaunaz
Test Mode	WPC_WLC-3W + MPP-15W	Test Voltage	AC 120V/60Hz

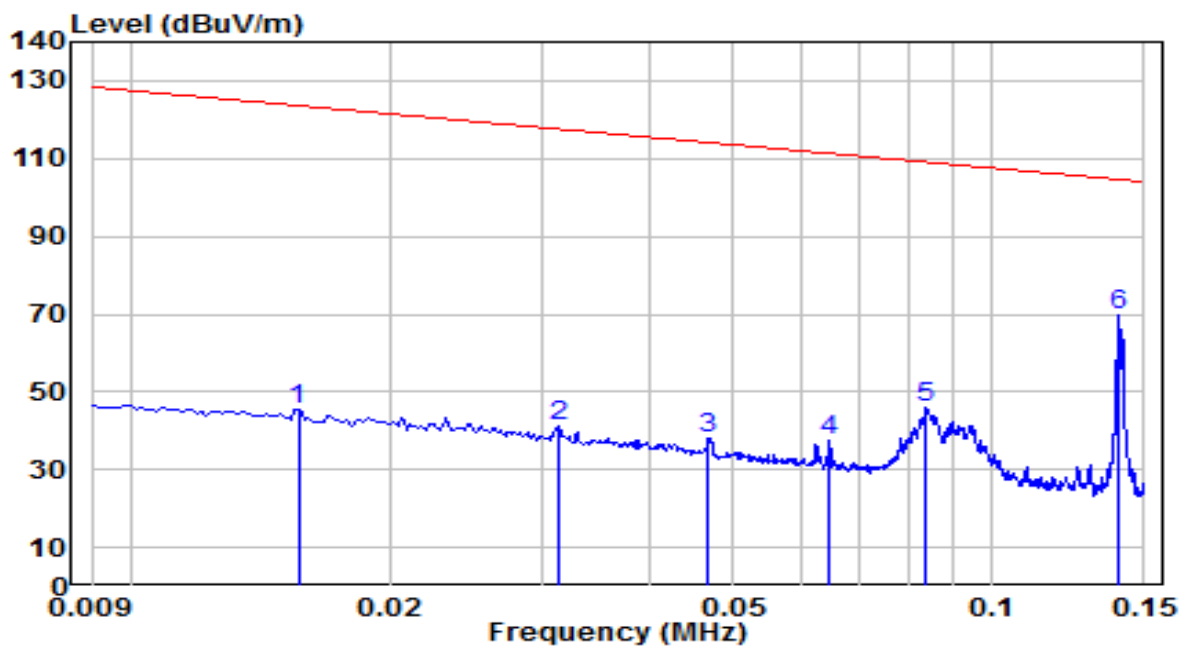


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.016	26.67	18.84	45.51	-78.20	123.71	100	319	Peak
2	0.031	21.70	19.59	41.29	-76.35	117.65	100	0	Peak
3	0.047	19.15	19.14	38.28	-75.91	114.19	100	248	Peak
4	0.065	18.51	18.75	37.26	-74.14	111.40	100	13	Peak
5	0.084	27.42	18.36	45.78	-63.34	109.13	100	289	Peak
6	* 0.140	51.77	18.15	69.91	-34.78	104.70	100	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-13
Factor	FMZB 1519B	Temp. / Humidity	23°C /49%
Polarity	Face Off	Site / Test Engineer	AC1 / Kaunaz
Test Mode	WPC_WLC-3W + MPP-15W	Test Voltage	AC 120V/60Hz

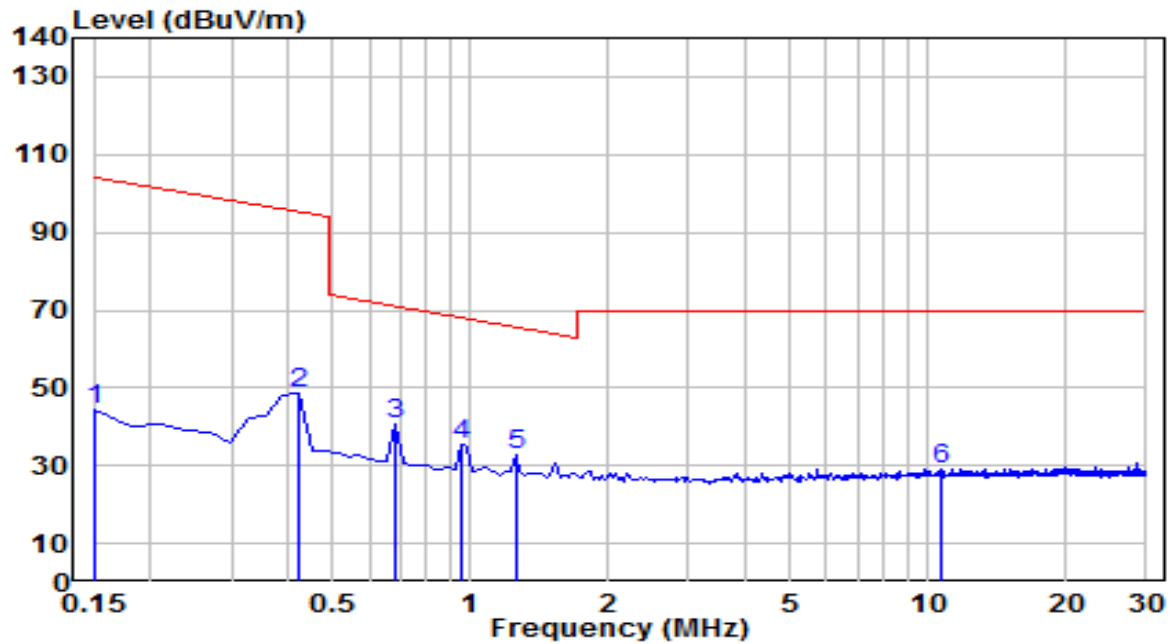


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.150	26.27	18.18	44.45	-59.63	104.08	100	282	Peak
2	0.419	30.05	18.63	48.68	-46.48	95.17	100	15	Peak
3	* 0.687	21.81	18.65	40.46	-30.41	70.87	100	10	Peak
4	0.956	16.94	18.61	35.55	-32.46	68.01	100	26	Peak
5	1.254	14.05	18.61	32.66	-33.00	65.66	100	360	Peak
6	10.717	8.05	21.04	29.09	-40.41	69.50	100	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-27
Factor	FMZB 1519B	Temp. / Humidity	22°C /62%
Polarity	Face On	Site / Test Engineer	AC1 / James
Test Mode	Standby Mode	Test Voltage	AC 120V/60Hz

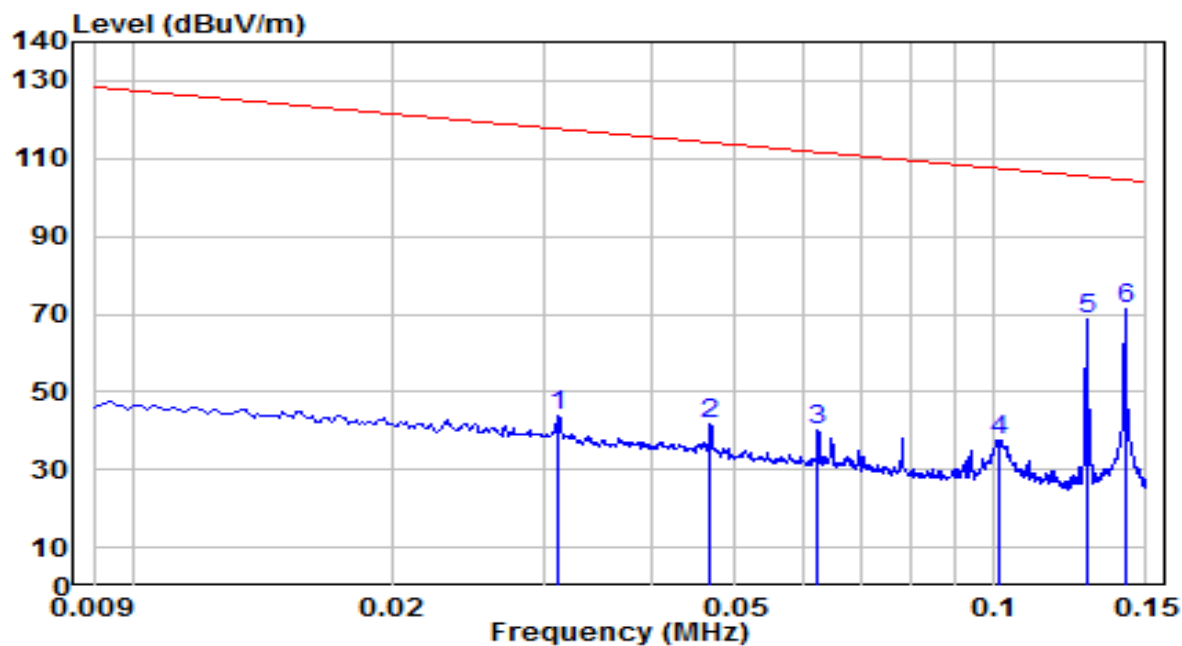


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.031	24.02	19.58	43.60	-74.13	117.73	100	134	Peak
2	0.047	22.50	19.11	41.61	-72.58	114.19	100	353	Peak
3	0.062	21.37	18.77	40.14	-71.54	111.69	100	66	Peak
4	0.101	19.40	18.03	37.43	-70.09	107.52	100	91	Peak
5	0.128	50.53	18.10	68.63	-36.84	105.47	100	59	Peak
6	* 0.142	53.01	18.14	71.15	-33.41	104.56	100	69	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-27
Factor	FMZB 1519B	Temp. / Humidity	22°C /62%
Polarity	Face On	Site / Test Engineer	AC1 / James
Test Mode	Standby Mode	Test Voltage	AC 120V/60Hz

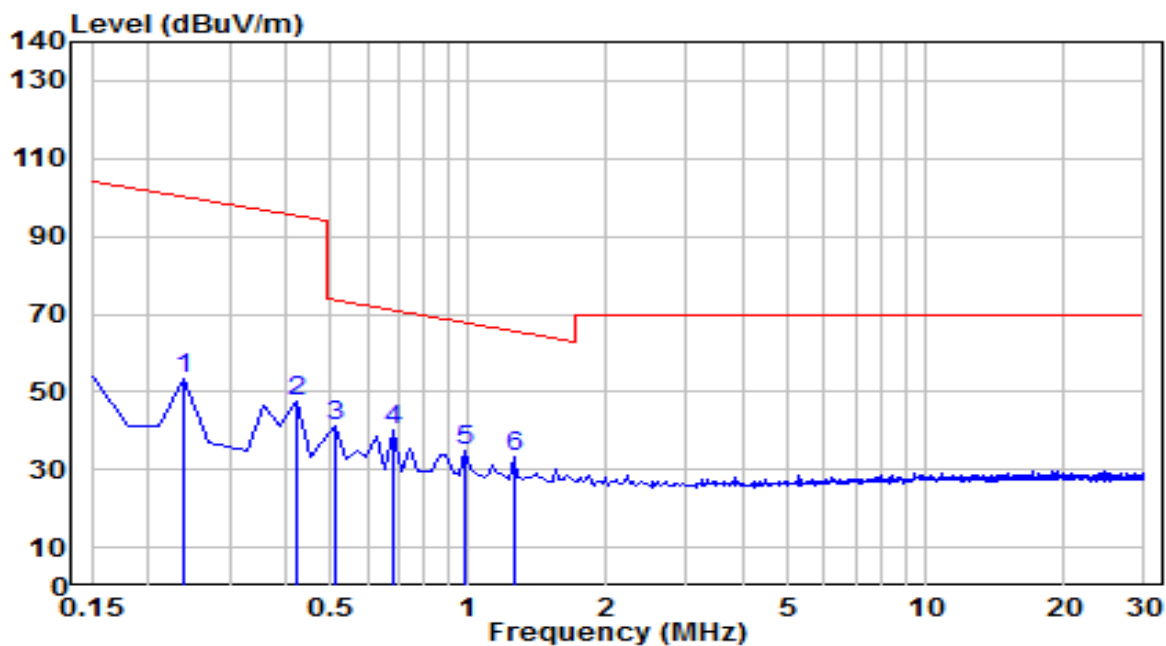


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.240	34.97	18.40	53.36	-46.65	100.01	100	66	Peak
2	0.419	29.13	18.62	47.75	-47.42	95.17	100	59	Peak
3	0.508	22.31	18.66	40.97	-32.52	73.48	100	97	Peak
4	* 0.687	21.29	18.63	39.92	-30.95	70.87	100	46	Peak
5	0.986	16.29	18.58	34.87	-32.88	67.75	100	146	Peak
6	1.254	14.75	18.59	33.34	-32.32	65.66	100	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-27
Factor	FMZB 1519B	Temp. / Humidity	22°C /62%
Polarity	Face Off	Site / Test Engineer	AC1 / James
Test Mode	Standby Mode	Test Voltage	AC 120V/60Hz

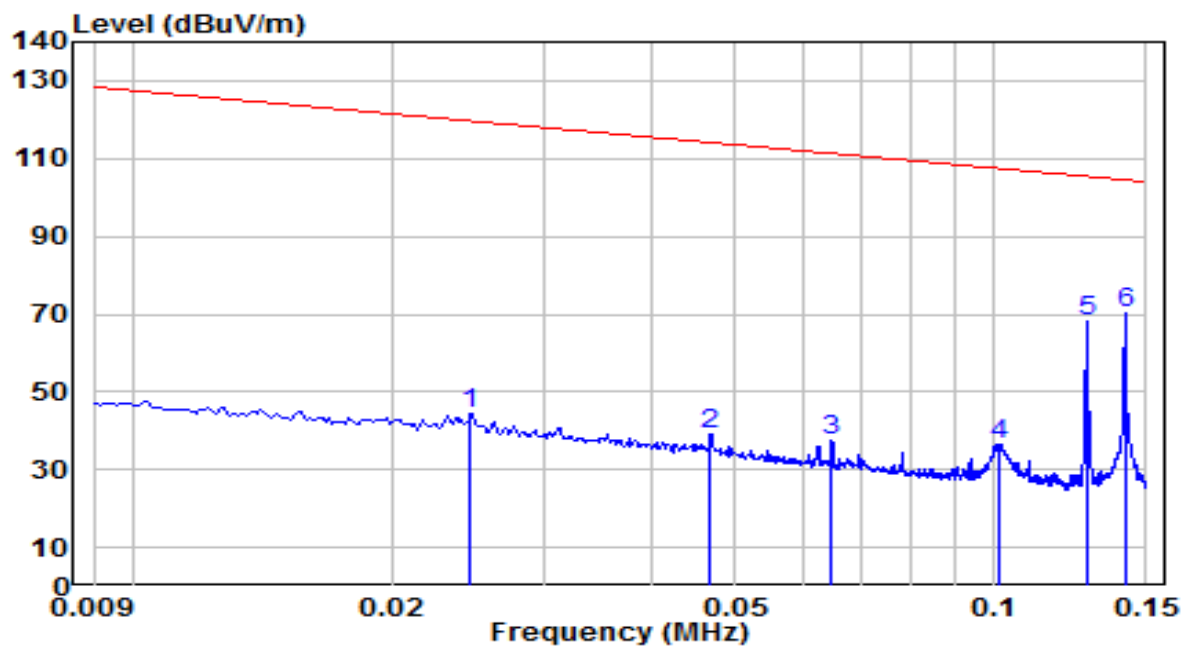


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.025	25.28	19.31	44.60	-75.16	119.75	100	348	Peak
2	0.047	19.99	19.11	39.10	-75.09	114.19	100	256	Peak
3	0.065	18.86	18.73	37.58	-73.80	111.38	100	327	Peak
4	0.101	18.56	18.03	36.60	-70.88	107.47	100	122	Peak
5	0.128	50.19	18.10	68.29	-37.17	105.47	100	108	Peak
6	* 0.142	51.99	18.14	70.12	-34.43	104.56	100	47	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-27
Factor	FMZB 1519B	Temp. / Humidity	22°C /62%
Polarity	Face Off	Site / Test Engineer	AC1 / James
Test Mode	Standby Mode	Test Voltage	AC 120V/60Hz

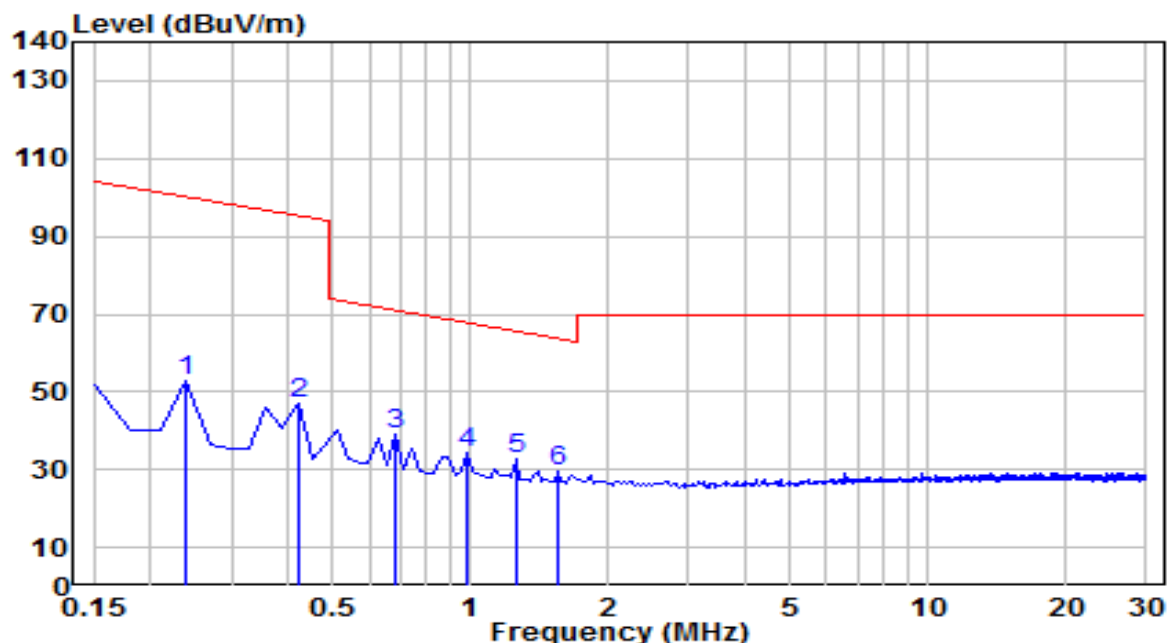


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.240	34.63	18.40	53.03	-46.99	100.01	100	101	Peak
2	0.419	28.15	18.62	46.77	-48.40	95.17	100	47	Peak
3	* 0.687	20.55	18.63	39.19	-31.68	70.87	100	345	Peak
4	0.986	15.81	18.58	34.40	-33.35	67.75	100	360	Peak
5	1.254	13.99	18.59	32.57	-33.08	65.66	100	47	Peak
6	1.553	11.09	18.60	29.68	-34.13	63.81	100	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-19
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W	Test Voltage	AC 120V/60Hz

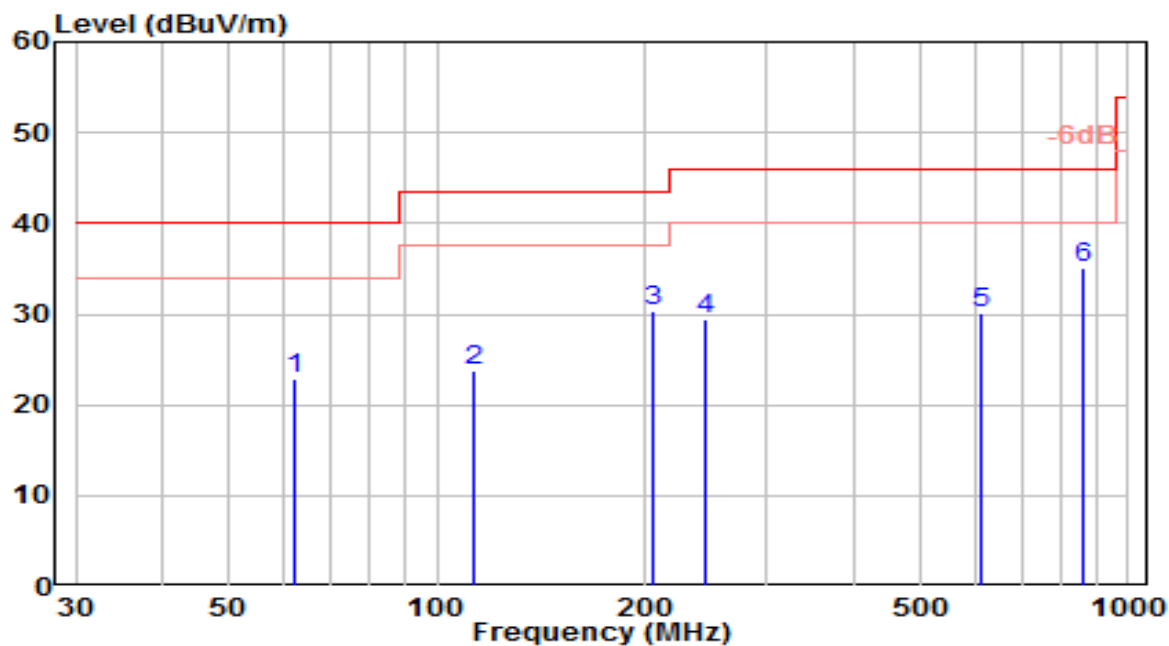


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	62.010	4.13	18.83	22.96	-17.04	40.00	150	240	QP
2	113.420	5.91	17.87	23.78	-19.72	43.50	150	80	QP
3	204.600	12.27	18.04	30.31	-13.19	43.50	150	280	QP
4	244.370	9.65	19.80	29.44	-16.56	46.00	100	275	QP
5	614.910	2.79	27.29	30.08	-15.92	46.00	150	310	QP
6	* 864.200	3.97	31.13	35.09	-10.91	46.00	150	340	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-19
Factor	VULB 9162	Temp. / Humidity	23°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W	Test Voltage	AC 120V/60Hz

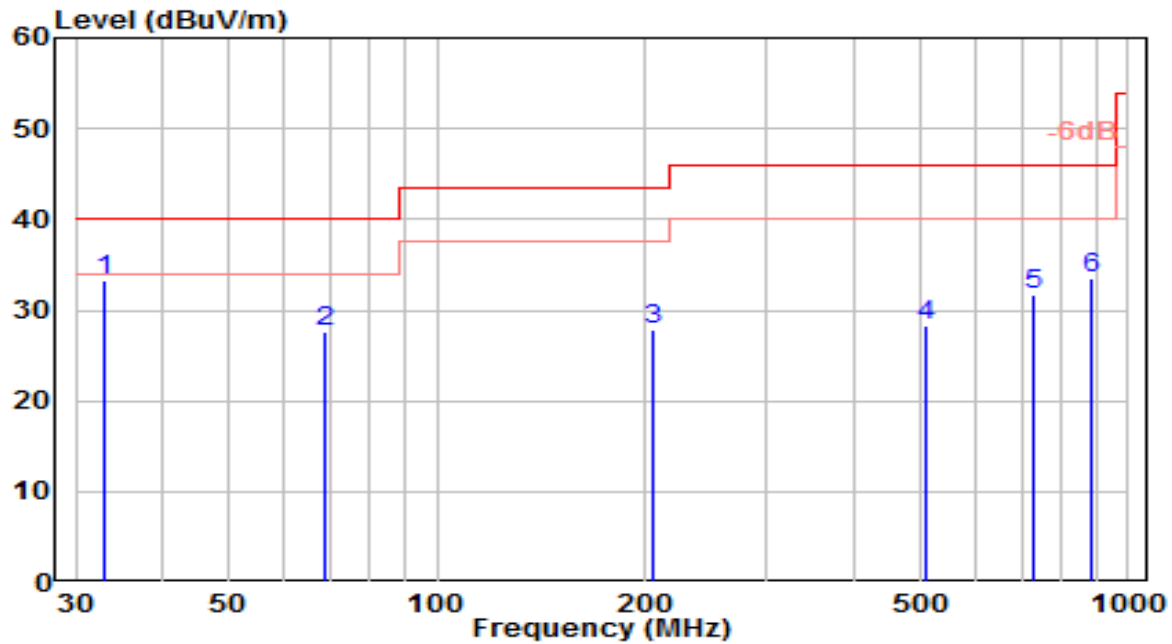


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	32.910	16.14	17.26	33.40	-6.60	40.00	100	310	QP
2		68.800	11.43	16.21	27.64	-12.36	40.00	100	0	QP
3		204.600	9.79	18.04	27.83	-15.67	43.50	100	20	QP
4		508.210	3.00	25.31	28.31	-17.69	46.00	100	170	QP
5		730.340	2.84	28.94	31.79	-14.21	46.00	100	170	QP
6		884.570	2.39	31.20	33.59	-12.41	46.00	150	230	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-19
Factor	VULB 9162	Temp. / Humidity	23°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + BPP-5W	Test Voltage	AC 120V/60Hz

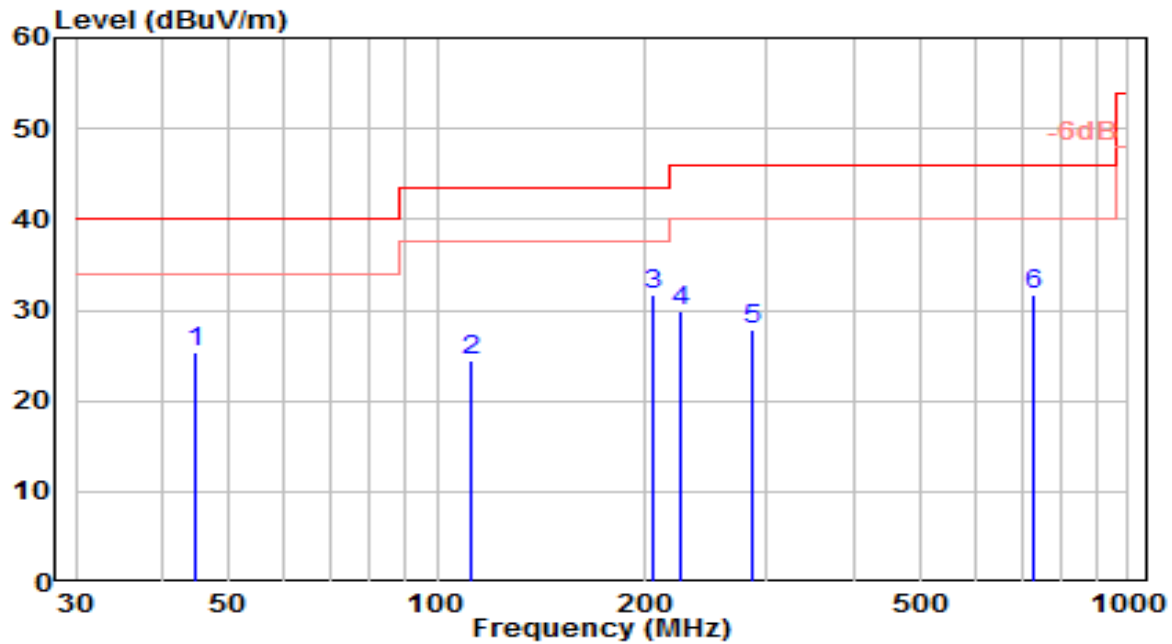


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	44.550	4.98	20.32	25.30	-14.70	40.00	150	270	QP
2	112.450	6.48	18.03	24.51	-18.99	43.50	150	85	QP
3	* 204.600	13.70	18.04	31.74	-11.76	43.50	150	295	QP
4	224.970	11.17	18.79	29.96	-16.04	46.00	100	280	QP
5	287.050	7.22	20.53	27.75	-18.25	46.00	100	30	QP
6	730.340	2.74	28.94	31.68	-14.32	46.00	100	355	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-19
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + BPP-5W	Test Voltage	AC 120V/60Hz

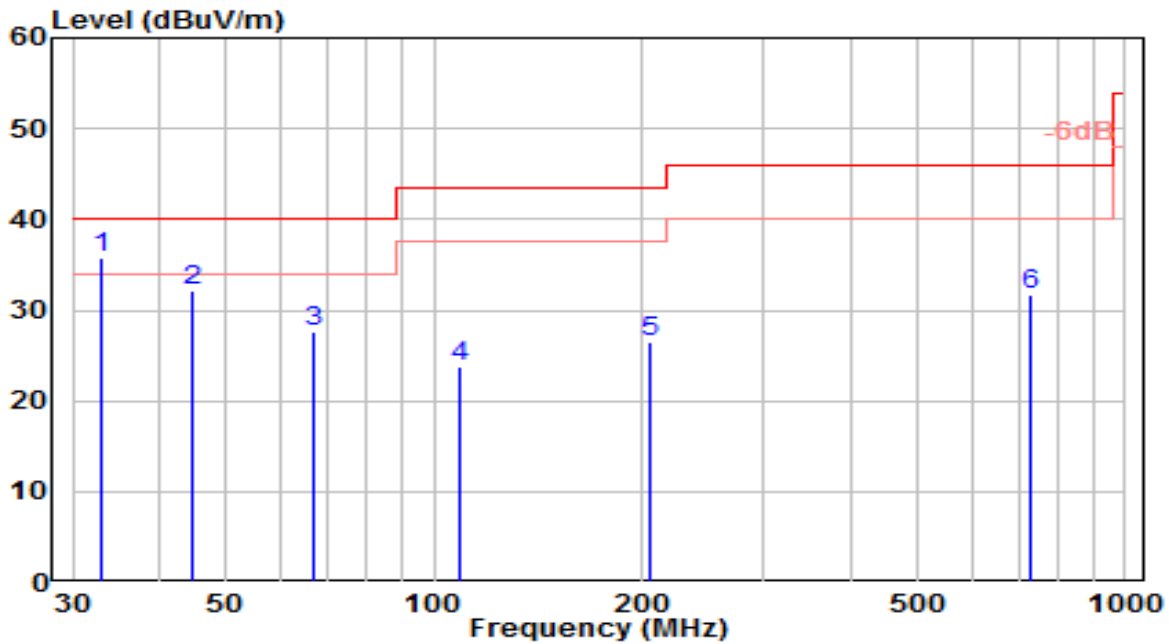


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	32.910	18.52	17.26	35.78	-4.22	40.00	100	255	QP
2		44.550	11.75	20.32	32.07	-7.93	40.00	100	330	QP
3		66.860	10.66	16.96	27.63	-12.37	40.00	100	0	QP
4		108.570	5.41	18.46	23.87	-19.63	43.50	100	175	QP
5		204.600	8.49	18.04	26.53	-16.97	43.50	100	5	QP
6		731.310	2.64	28.96	31.61	-14.39	46.00	150	30	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-19
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + AFC-7.5W	Test Voltage	AC 120V/60Hz

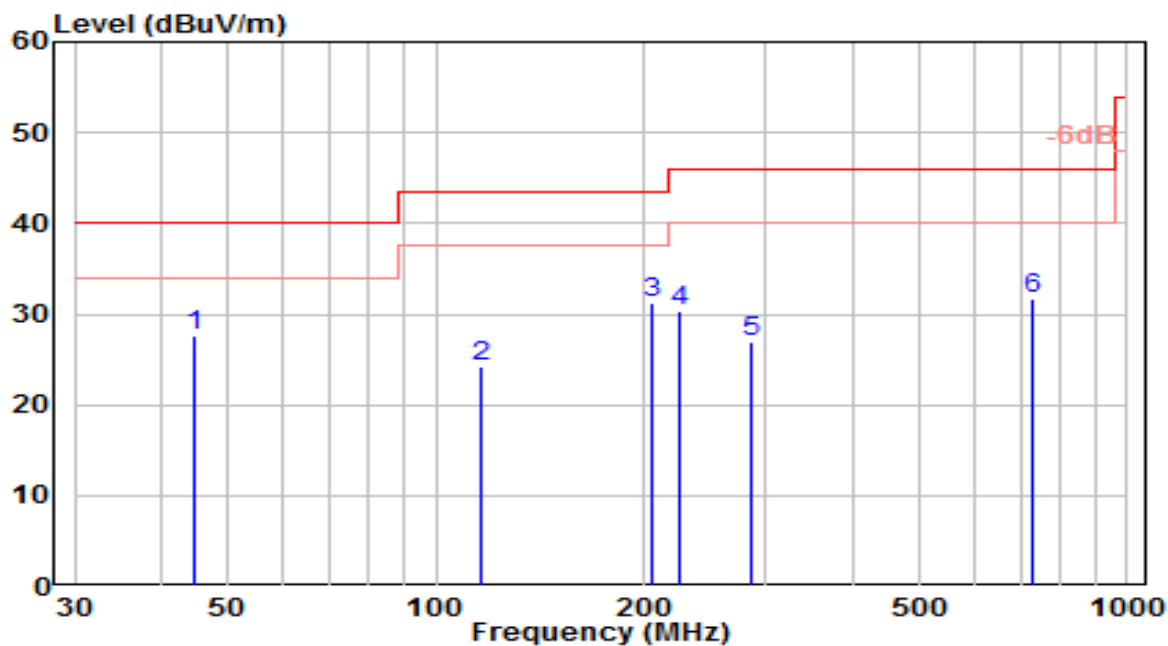


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	44.550	7.33	20.32	27.65	-12.35	40.00	150	250	QP
2	116.330	6.89	17.39	24.27	-19.23	43.50	150	80	QP
3	* 204.600	13.19	18.04	31.23	-12.27	43.50	150	285	QP
4	224.970	11.62	18.79	30.41	-15.59	46.00	100	295	QP
5	287.050	6.51	20.53	27.04	-18.96	46.00	100	30	QP
6	729.370	2.84	28.93	31.76	-14.24	46.00	150	205	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-19
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + AFC-7.5W	Test Voltage	AC 120V/60Hz

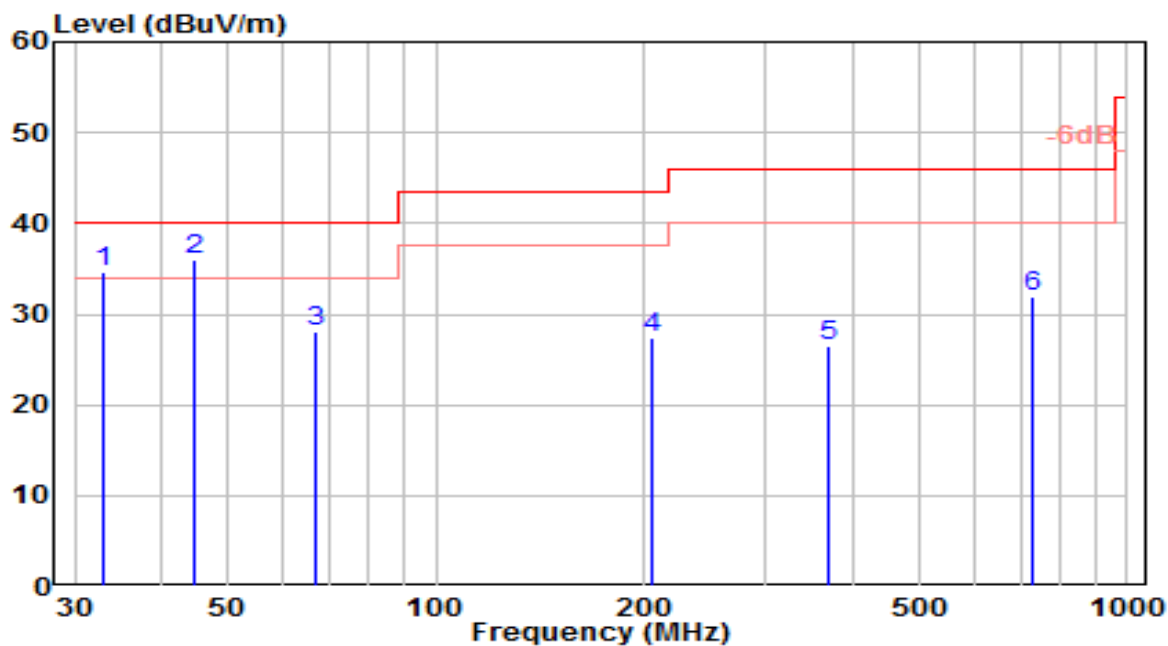


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	32.910	17.36	17.26	34.61	-5.39	40.00	100	320	QP
2	* 44.550	15.63	20.32	35.95	-4.05	40.00	100	345	QP
3	66.860	11.15	16.96	28.11	-11.89	40.00	100	0	QP
4	204.600	9.45	18.04	27.48	-16.02	43.50	100	260	QP
5	369.500	3.52	22.90	26.42	-19.58	46.00	150	240	QP
6	732.280	3.04	28.98	32.02	-13.98	46.00	150	295	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-19
Factor	VULB 9162	Temp. / Humidity	23°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + PPDE-8W	Test Voltage	AC 120V/60Hz

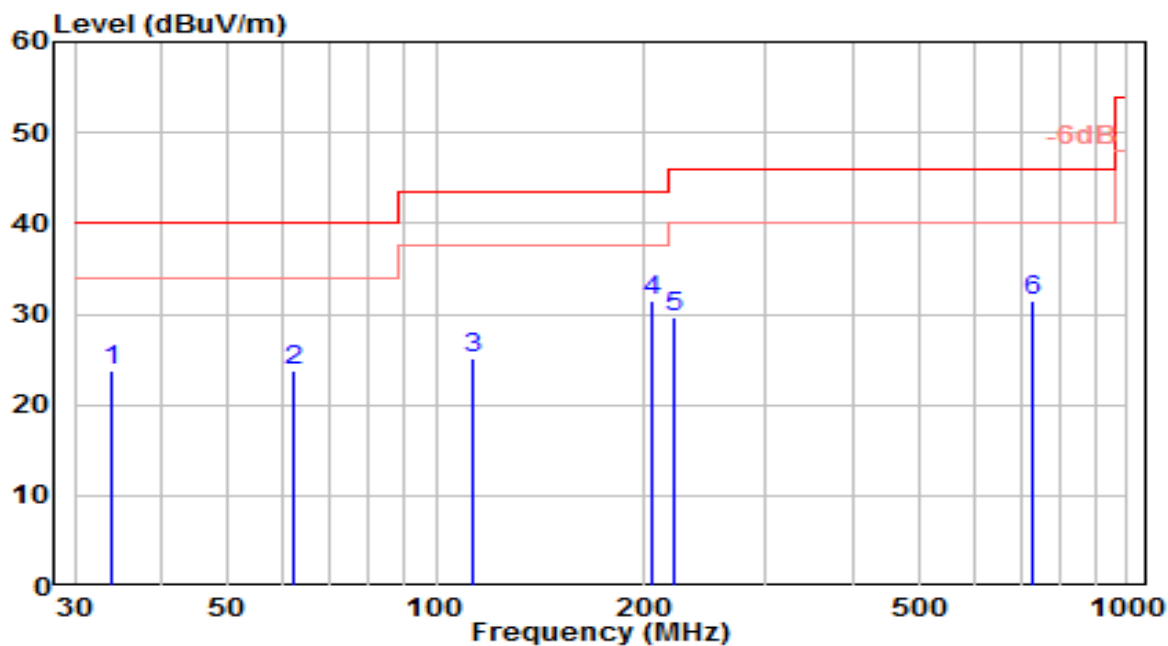


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	33.880	6.38	17.49	23.87	-16.13	40.00	150	230	QP
2	62.010	4.91	18.83	23.74	-16.26	40.00	150	360	QP
3	113.420	7.21	17.87	25.08	-18.42	43.50	150	65	QP
4	* 204.600	13.33	18.04	31.36	-12.14	43.50	150	285	QP
5	221.090	11.16	18.51	29.67	-16.33	46.00	100	295	QP
6	731.310	2.49	28.96	31.45	-14.55	46.00	150	5	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2025-12-19
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + PPDE-8W	Test Voltage	AC 120V/60Hz

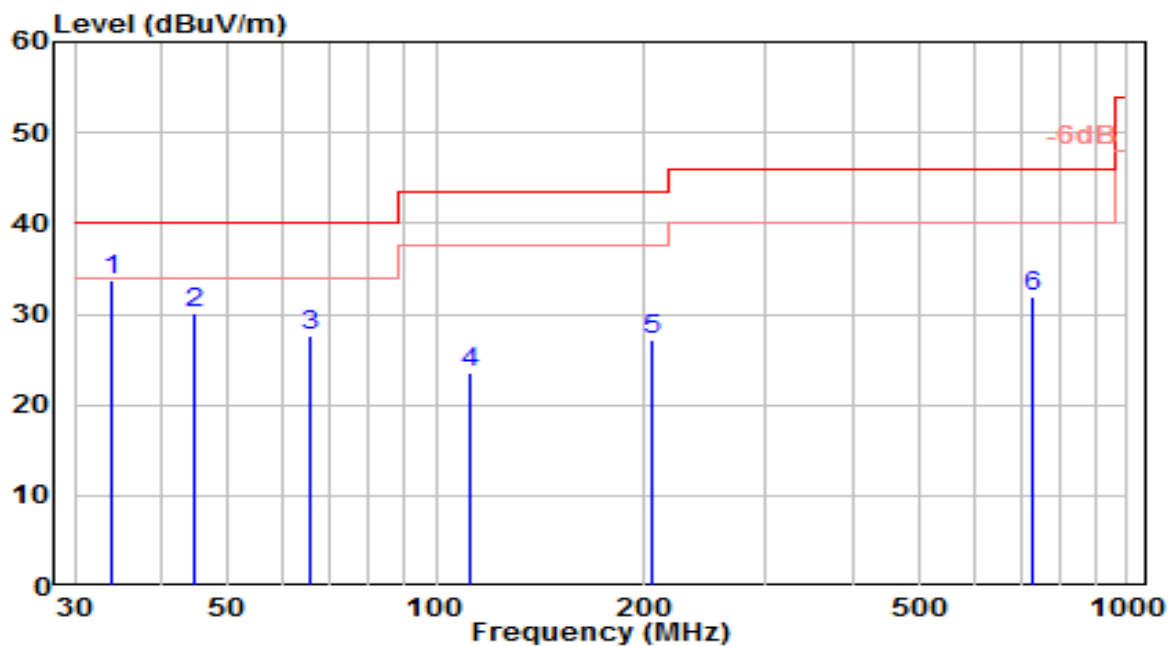


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	33.880	16.30	17.49	33.79	-6.21	40.00	100	285	QP
2		44.550	9.71	20.32	30.03	-9.97	40.00	100	325	QP
3		65.890	10.31	17.34	27.64	-12.36	40.00	100	10	QP
4		112.450	5.59	18.03	23.62	-19.88	43.50	100	210	QP
5		204.600	9.19	18.04	27.23	-16.27	43.50	150	255	QP
6		730.340	2.88	28.94	31.83	-14.17	46.00	100	260	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-13
Factor	VULB 9162	Temp. / Humidity	22°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + MPP-15W	Test Voltage	AC 120V/60Hz

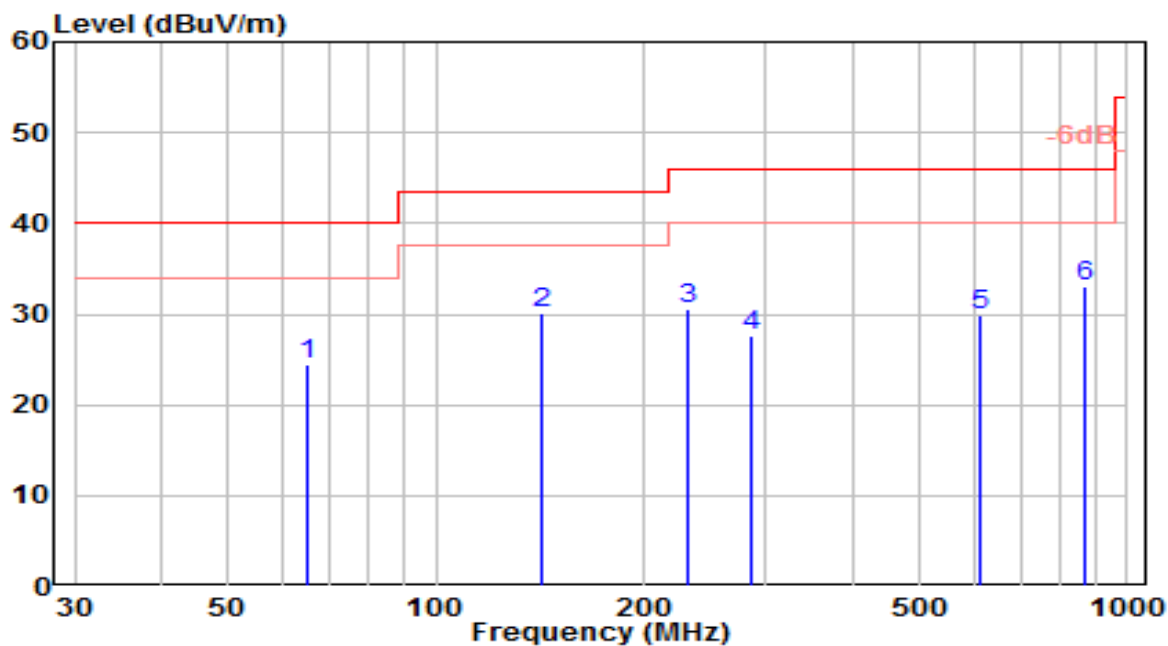


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	64.920	6.81	17.71	24.52	-15.48	40.00	150	235	QP
2	142.520	15.18	14.94	30.11	-13.39	43.50	150	110	QP
3	231.760	11.26	19.26	30.51	-15.49	46.00	100	280	QP
4	287.050	7.08	20.53	27.61	-18.39	46.00	100	35	QP
5	612.000	2.53	27.27	29.80	-16.20	46.00	100	125	QP
6	* 870.020	1.85	31.15	32.99	-13.01	46.00	100	80	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-13
Factor	VULB 9162	Temp. / Humidity	22°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / James
Test Mode	WPC_WLC-3W + MPP-15W	Test Voltage	AC 120V/60Hz

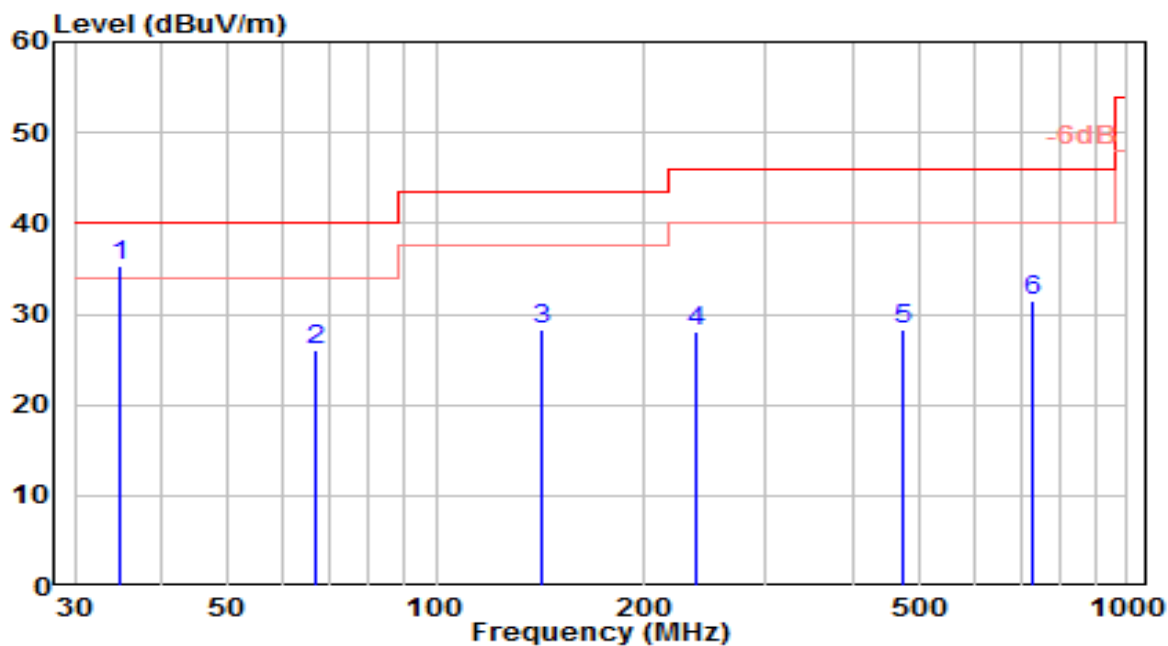


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	34.850	17.63	17.73	35.36	-4.64	40.00	100	235	QP
2		66.860	9.03	16.96	25.99	-14.01	40.00	100	235	QP
3		142.520	13.46	14.94	28.40	-15.10	43.50	100	355	QP
4		237.580	8.40	19.57	27.97	-18.03	46.00	150	230	QP
5		473.290	3.75	24.50	28.25	-17.75	46.00	100	170	QP
6		729.370	2.49	28.93	31.42	-14.58	46.00	100	340	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-27
Factor	VULB 9162	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / James
Test Mode	Standby Mode	Test Voltage	AC 120V/60Hz

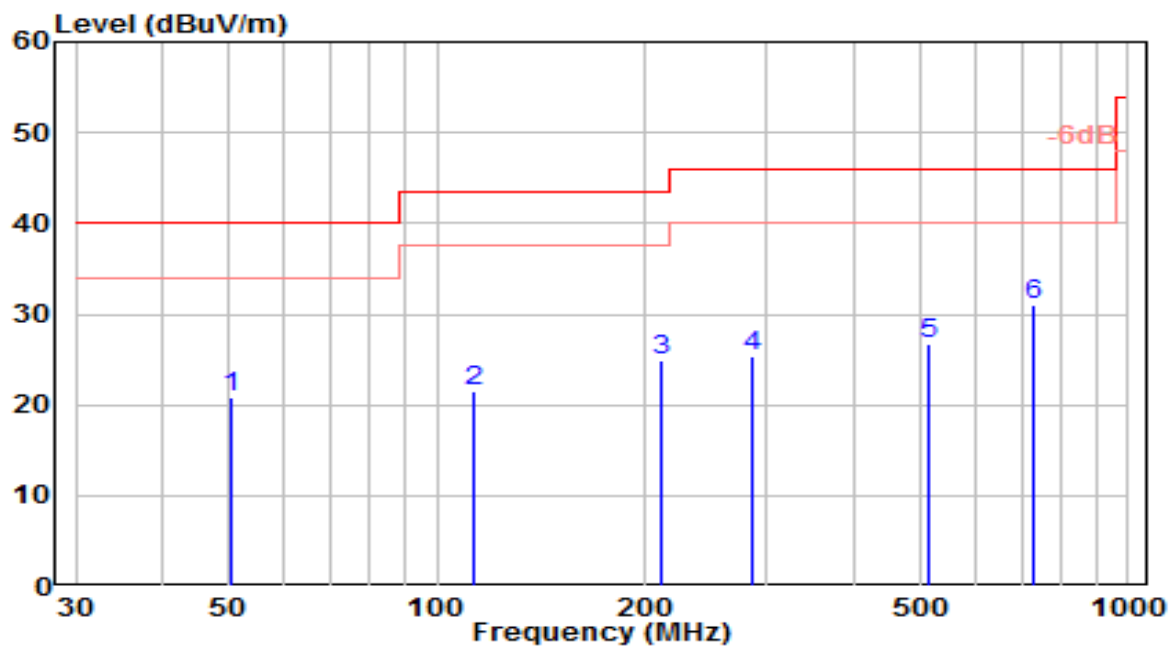


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	50.370	0.21	20.60	20.80	-19.20	40.00	150	100	QP
2	113.420	3.71	17.73	21.44	-22.06	43.50	150	85	QP
3	211.390	7.04	17.77	24.82	-18.68	43.50	150	95	QP
4	287.050	5.01	20.31	25.31	-20.69	46.00	100	45	QP
5	513.060	1.70	25.10	26.81	-19.20	46.00	150	200	QP
6	* 732.280	2.35	28.60	30.96	-15.04	46.00	150	320	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wireless Charge Stand	Date of Test	2026-01-27
Factor	VULB 9162	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / James
Test Mode	Standby Mode	Test Voltage	AC 120V/60Hz

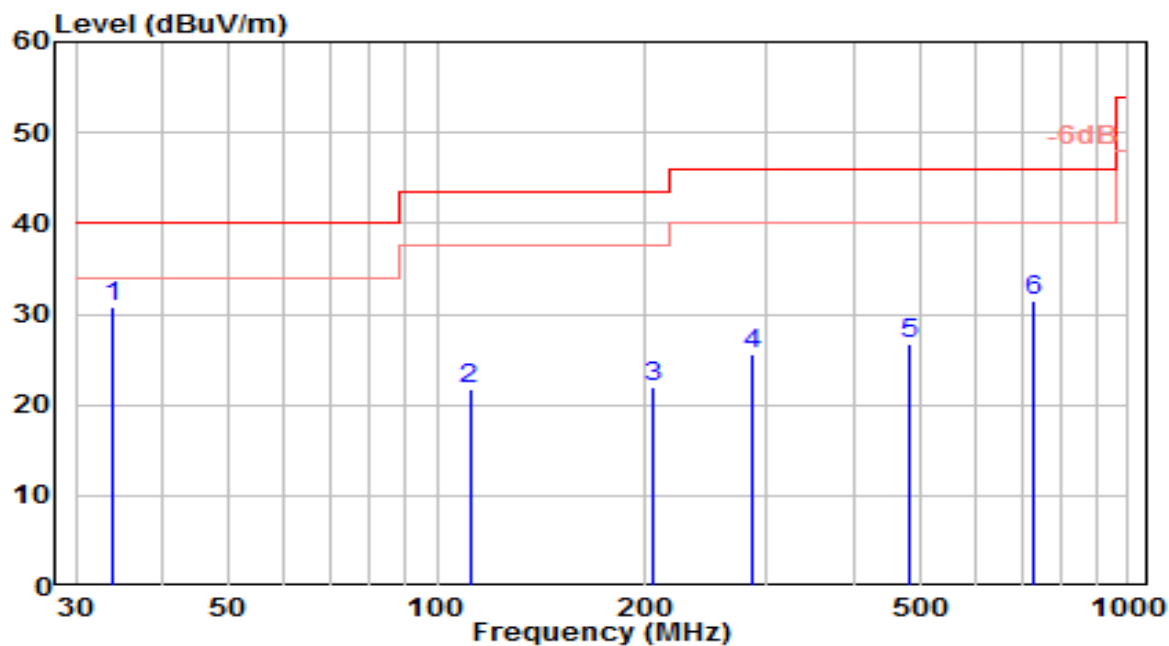

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	33.880	13.38	17.38	30.76	-9.24	40.00	100	300	QP
2		111.480	3.79	18.05	21.84	-21.66	43.50	100	145	QP
3		204.600	4.17	17.85	22.02	-21.48	43.50	100	90	QP
4		287.050	5.24	20.31	25.55	-20.45	46.00	150	160	QP
5		482.990	2.21	24.49	26.70	-19.30	46.00	100	295	QP
6		730.340	2.87	28.57	31.45	-14.55	46.00	150	275	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.3. 20dB Bandwidth Measurement

7.3.1. Test Limit

N/A


7.3.2. Test Procedure Used

KDB 789033 D02v01r01 – Section C.1

7.3.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.3.4. Test Setup

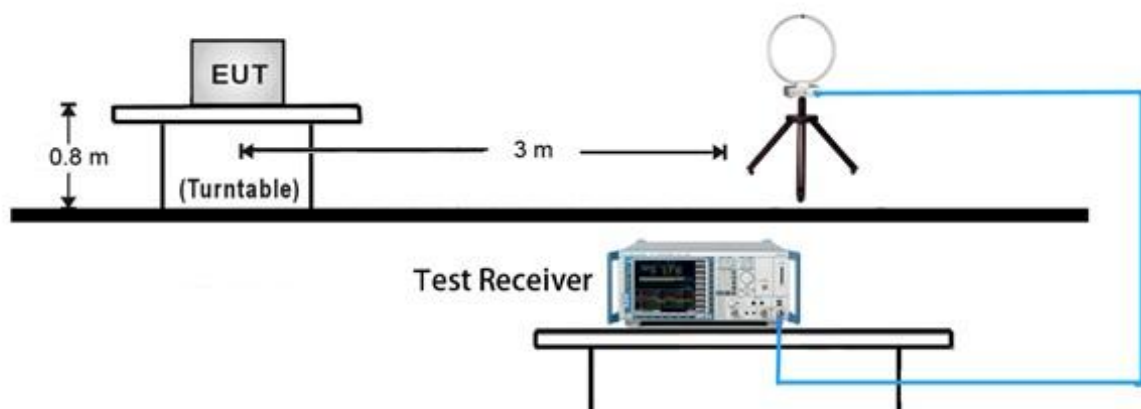

7.3.5. Test Result

Product	Wireless Charge Stand	Temperature	25°C
Test Engineer	James	Relative Humidity	54%
Test Site	AC1	Test Date	2025/12/22~2026/1/13

Test Mode	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
WPC_WLC-3W	8.437	7.852
WPC_BPP-5W	0.251	0.213
WPC_AFC-7.5W	0.249	0.211
WPC_PPDE-8W	0.247	0.209
WPC_MPP-15W	0.245	0.208





7.4. AC Conducted Emissions Measurement


7.4.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.4.2. Test Setup

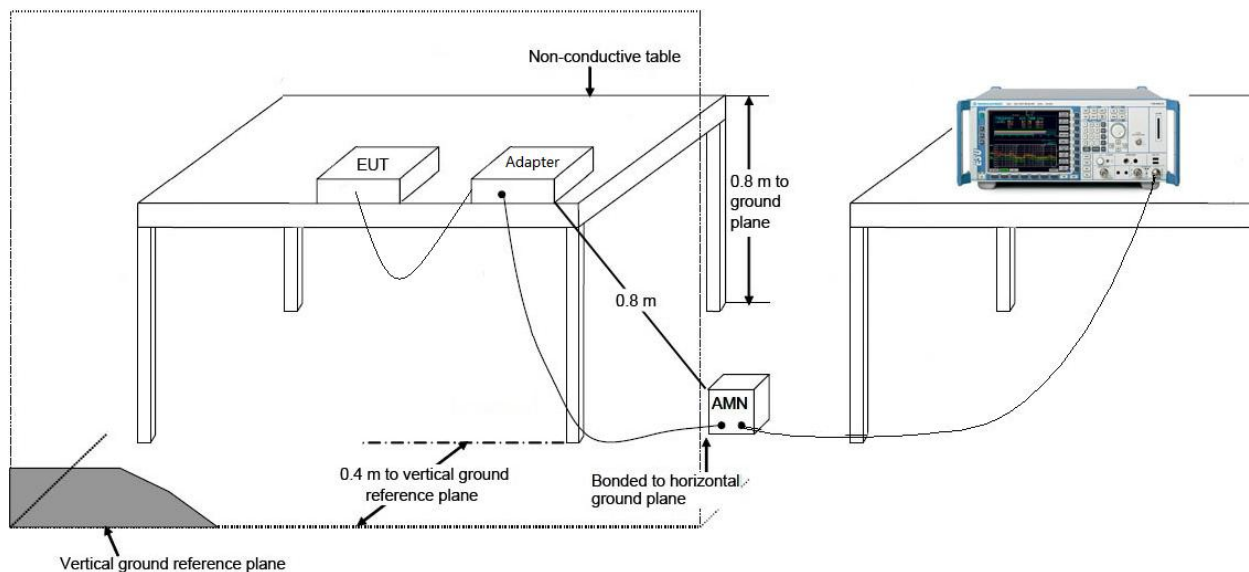

7.4.3. Test Result

EUT	Wireless Charge Stand	Date of Test	2025-12-23
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	WPC_WLC-3W	Test Voltage	AC 120V/60Hz

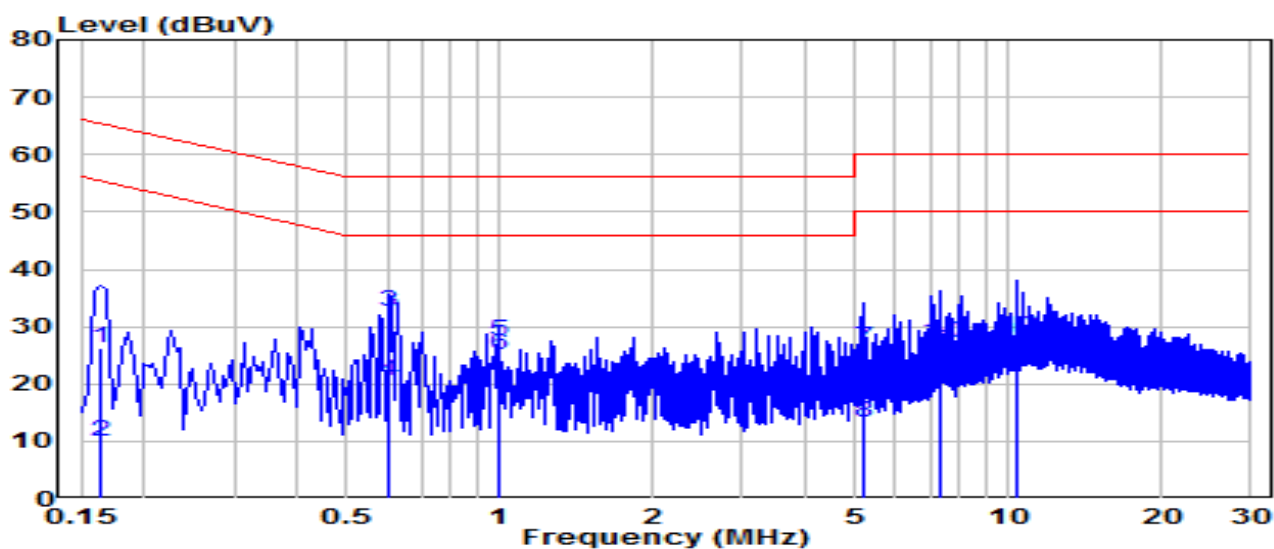


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.163	16.75	9.63	26.38	-38.90	65.28	QP
2		0.163	0.21	9.63	9.84	-45.44	55.28	Average
3		0.604	22.97	9.65	32.62	-23.38	56.00	QP
4		0.604	10.80	9.65	20.45	-25.55	46.00	Average
5	*	0.991	17.82	9.67	27.49	-28.51	56.00	QP
6	*	0.991	15.52	9.67	25.19	-20.81	46.00	Average
7		5.185	16.56	9.75	26.31	-33.69	60.00	QP
8		5.185	3.43	9.75	13.18	-36.82	50.00	Average
9		7.367	15.74	9.81	25.54	-34.46	60.00	QP
10		7.367	17.36	9.81	27.16	-22.84	50.00	Average
11		10.355	17.05	9.87	26.92	-33.08	60.00	QP
12		10.355	18.27	9.87	28.15	-21.85	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2025-12-23
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	WPC_WLC-3W	Test Voltage	AC 120V/60Hz

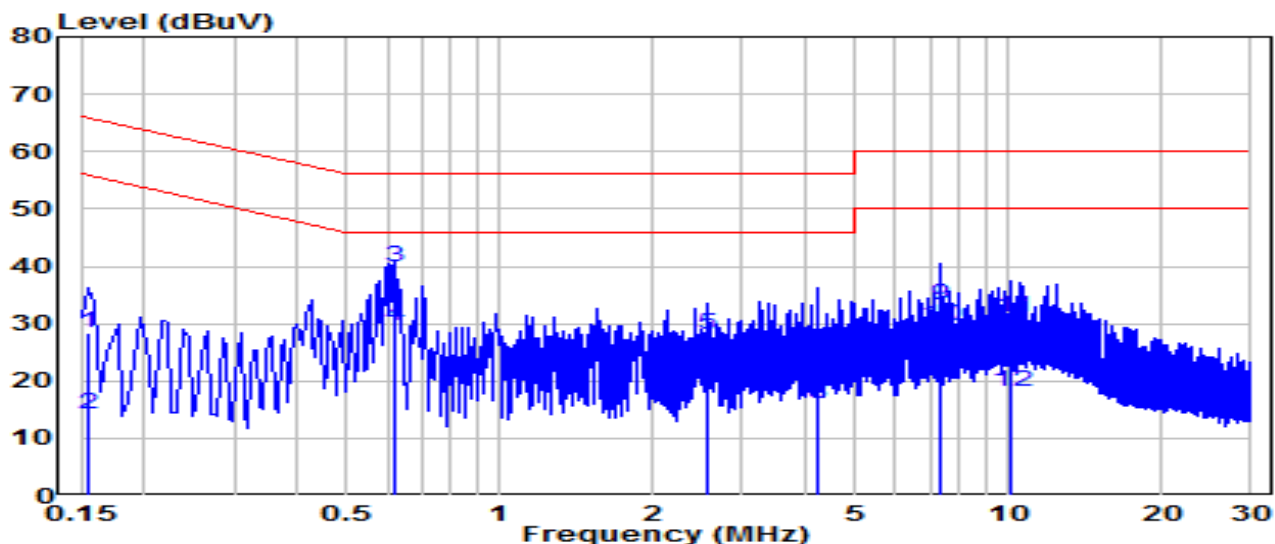


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.154	18.79	9.63	28.42	-37.34	65.75	QP
2		0.154	4.63	9.63	14.26	-41.49	55.75	Average
3	*	0.622	30.21	9.65	39.86	-16.14	56.00	QP
4	*	0.622	19.94	9.65	29.58	-16.42	46.00	Average
5		2.566	18.51	9.71	28.22	-27.78	56.00	QP
6		2.566	13.68	9.71	23.39	-22.61	46.00	Average
7		4.204	15.09	9.73	24.82	-31.18	56.00	QP
8		4.204	6.17	9.73	15.90	-30.10	46.00	Average
9		7.367	23.48	9.81	33.29	-26.71	60.00	QP
10		7.367	19.89	9.81	29.70	-20.30	50.00	Average
11		10.170	21.21	9.87	31.08	-28.92	60.00	QP
12		10.170	8.14	9.87	18.01	-31.99	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2025-12-23
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	WPC_WLC-3W + BPP-5W	Test Voltage	AC 120V/60Hz

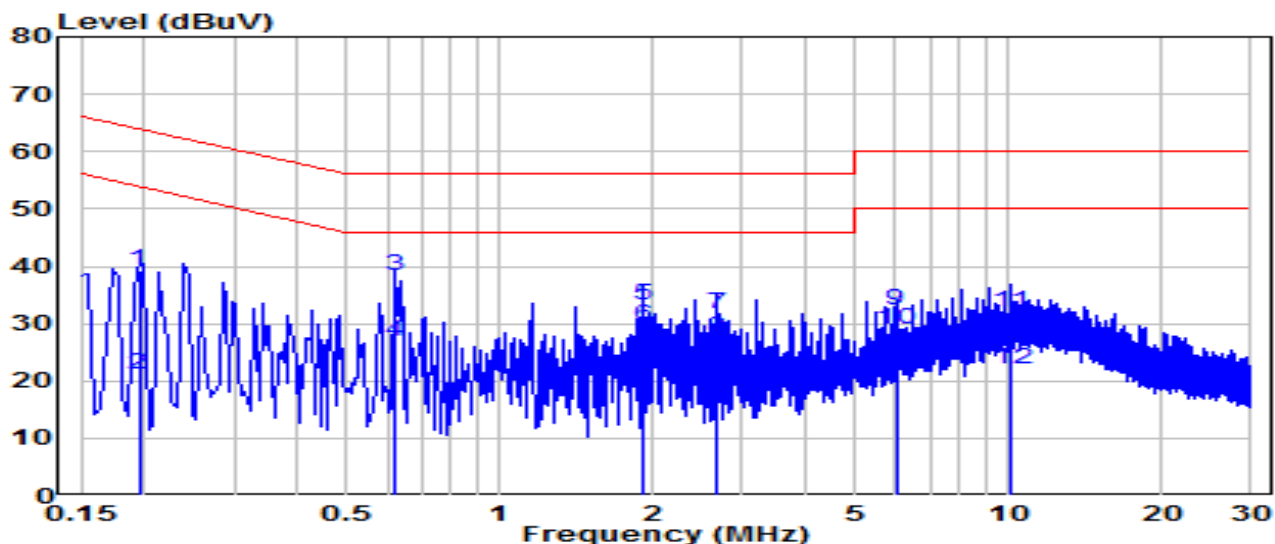


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.195	29.76	9.62	39.38	-24.44	63.82	QP
2		0.195	11.42	9.62	21.04	-32.78	53.82	Average
3		0.622	28.78	9.65	38.43	-17.57	56.00	QP
4		0.622	17.35	9.65	27.00	-19.00	46.00	Average
5	*	1.918	23.64	9.70	33.34	-22.66	56.00	QP
6	*	1.918	19.77	9.70	29.47	-16.53	46.00	Average
7		2.683	21.96	9.71	31.67	-24.33	56.00	QP
8		2.683	17.73	9.71	27.44	-18.56	46.00	Average
9		6.008	22.68	9.77	32.45	-27.55	60.00	QP
10		6.008	19.28	9.77	29.05	-20.95	50.00	Average
11		10.067	21.99	9.87	31.86	-28.14	60.00	QP
12		10.067	12.09	9.87	21.96	-28.04	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2025-12-23
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	WPC_WLC-3W + BPP-5W	Test Voltage	AC 120V/60Hz

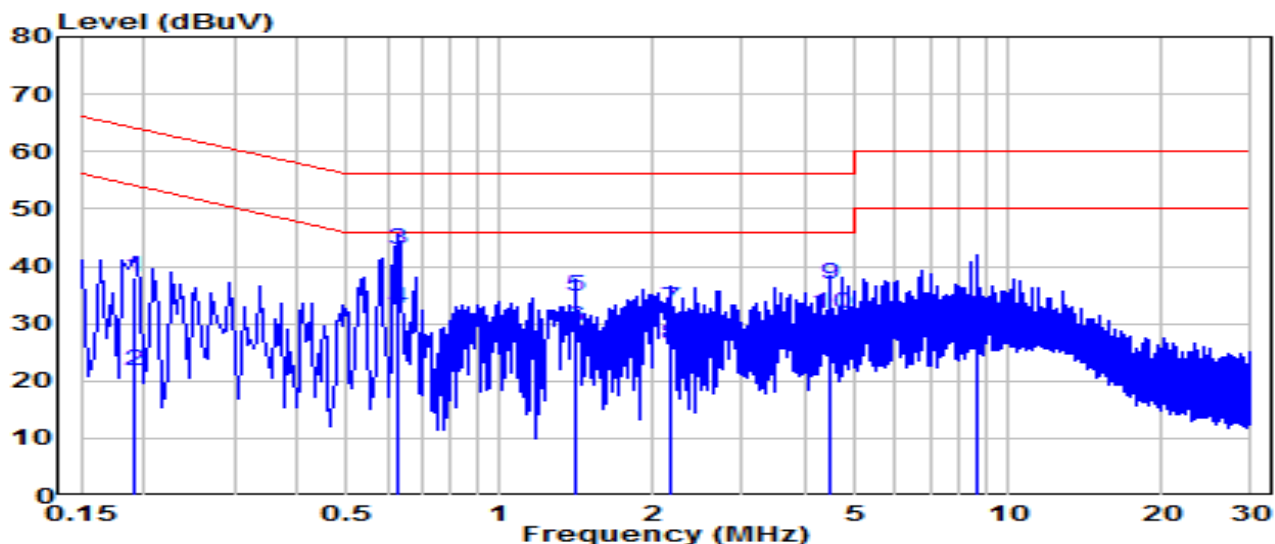


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.190	28.47	9.62	38.10	-25.92	64.01	QP
2		0.190	12.02	9.62	21.65	-32.37	54.01	Average
3	*	0.627	33.10	9.65	42.75	-13.25	56.00	QP
4	*	0.627	23.10	9.65	32.74	-13.26	46.00	Average
5		1.405	24.91	9.68	34.60	-21.40	56.00	QP
6		1.405	19.66	9.68	29.34	-16.66	46.00	Average
7		2.175	22.95	9.70	32.65	-23.35	56.00	QP
8		2.175	16.65	9.70	26.35	-19.65	46.00	Average
9		4.474	27.17	9.74	36.90	-19.10	56.00	QP
10		4.474	21.98	9.74	31.72	-14.28	46.00	Average
11		8.708	21.22	9.84	31.05	-28.95	60.00	QP
12		8.708	20.72	9.84	30.56	-19.44	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2025-12-23
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	WPC_WLC-3W + AFC-7.5W	Test Voltage	AC 120V/60Hz

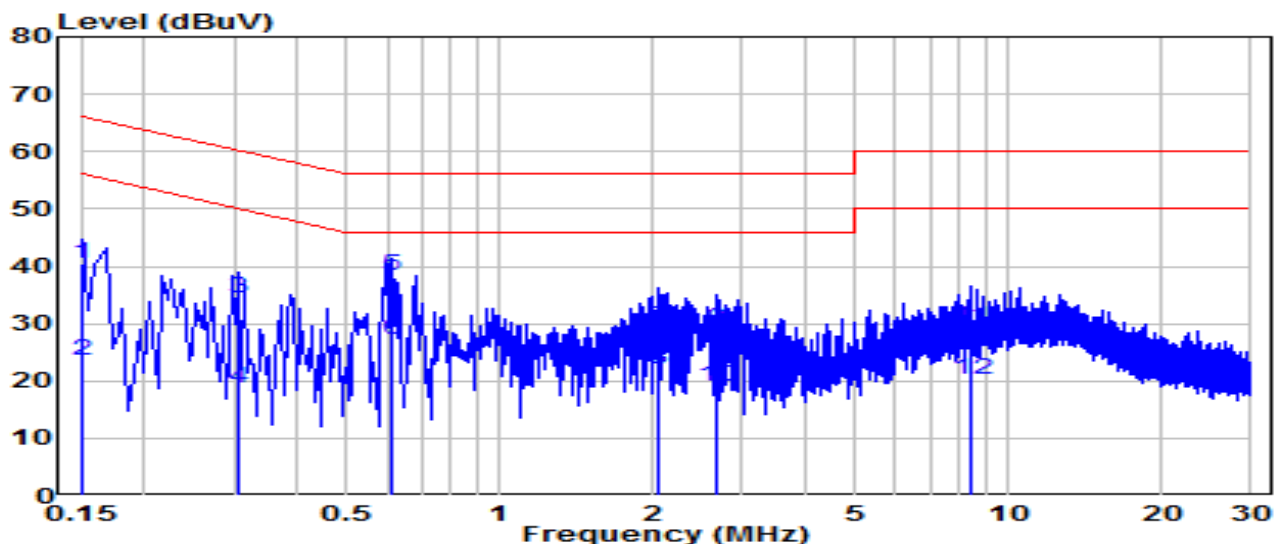


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.150	30.75	9.63	40.38	-25.62	66.00	QP
2		0.150	13.85	9.63	23.48	-32.52	56.00	Average
3		0.307	24.83	9.63	34.46	-25.57	60.04	QP
4	*	0.307	9.22	9.63	18.85	-31.19	50.04	Average
5	*	0.609	28.66	9.65	38.30	-17.70	56.00	QP
6		0.609	17.43	9.65	27.08	-18.92	46.00	Average
7		2.044	19.53	9.70	29.23	-26.77	56.00	QP
8		2.044	12.42	9.70	22.12	-23.88	46.00	Average
9		2.674	19.20	9.71	28.91	-27.09	56.00	QP
10		2.674	9.46	9.71	19.17	-26.83	46.00	Average
11		8.398	19.33	9.83	29.16	-30.84	60.00	QP
12		8.398	10.48	9.83	20.31	-29.69	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2025-12-23
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	WPC_WLC-3W + AFC-7.5W	Test Voltage	AC 120V/60Hz

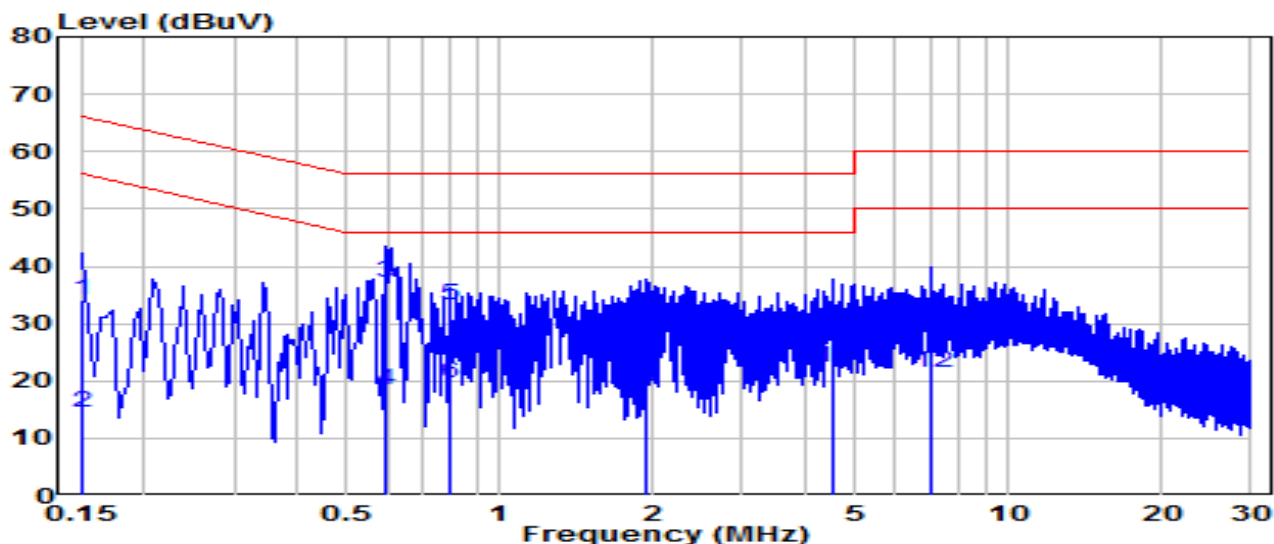


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.150	24.42	9.63	34.05	-31.95	66.00	QP
2		0.150	4.96	9.63	14.59	-41.41	56.00	Average
3	*	0.595	27.48	9.65	37.12	-18.88	56.00	QP
4	*	0.595	8.88	9.65	18.53	-27.47	46.00	Average
5		0.798	23.53	9.66	33.19	-22.81	56.00	QP
6		0.798	10.03	9.66	19.68	-26.32	46.00	Average
7		1.932	22.14	9.70	31.84	-24.16	56.00	QP
8		1.932	9.02	9.70	18.72	-27.28	46.00	Average
9		4.506	18.39	9.74	28.13	-27.87	56.00	QP
10		4.506	12.74	9.74	22.48	-23.52	46.00	Average
11		7.070	20.63	9.80	30.43	-29.57	60.00	QP
12		7.070	11.59	9.80	21.39	-28.61	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2025-12-23
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	WPC_WLC-3W + PPDE-8W	Test Voltage	AC 120V/60Hz

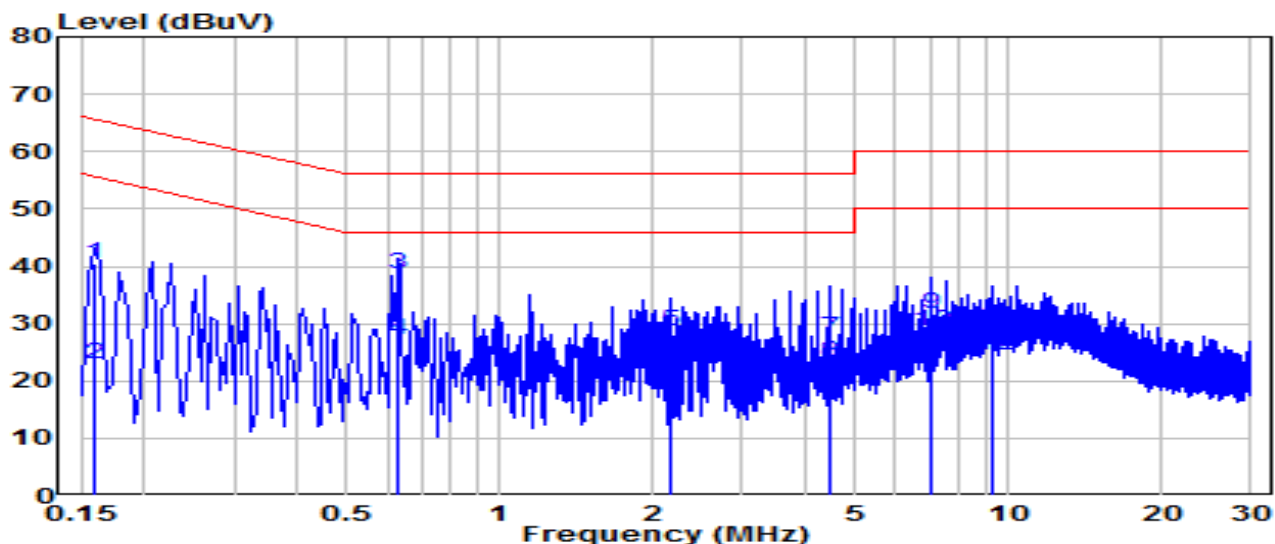


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	30.68	9.63	40.31	-25.20	65.52	QP
2	0.159	13.33	9.63	22.96	-32.56	55.52	Average
3	* 0.631	28.99	9.65	38.64	-17.36	56.00	QP
4	* 0.631	17.45	9.65	27.10	-18.90	46.00	Average
5	2.175	19.04	9.70	28.75	-27.25	56.00	QP
6	2.175	12.15	9.70	21.86	-24.14	46.00	Average
7	4.474	17.63	9.74	27.37	-28.63	56.00	QP
8	4.474	13.58	9.74	23.31	-22.69	46.00	Average
9	7.075	21.96	9.80	31.76	-28.24	60.00	QP
10	7.075	18.78	9.80	28.57	-21.43	50.00	Average
11	9.334	19.43	9.85	29.28	-30.72	60.00	QP
12	9.334	14.65	9.85	24.50	-25.50	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2025-12-23
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	WPC_WLC-3W + PPDE-8W	Test Voltage	AC 120V/60Hz

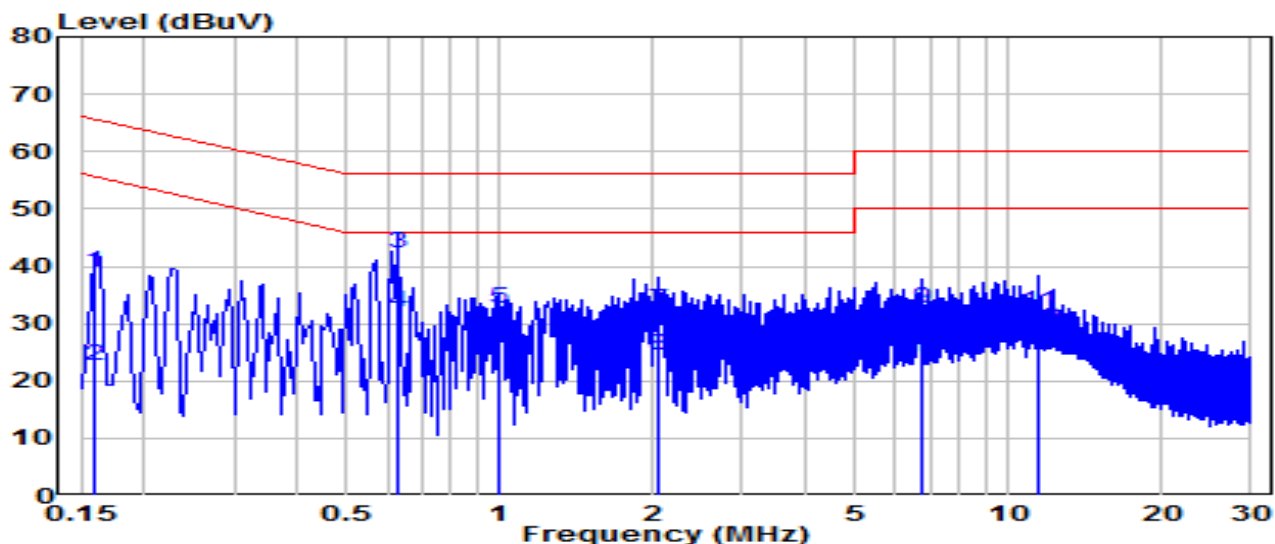


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.159	29.44	9.63	39.07	-26.44	65.52	QP
2		0.159	13.13	9.63	22.76	-32.76	55.52	Average
3	*	0.627	32.77	9.65	42.41	-13.59	56.00	QP
4	*	0.627	22.38	9.65	32.03	-13.97	46.00	Average
5		0.991	22.80	9.67	32.47	-23.53	56.00	QP
6		0.991	17.77	9.67	27.44	-18.56	46.00	Average
7		2.049	22.63	9.70	32.33	-23.67	56.00	QP
8		2.049	14.86	9.70	24.56	-21.44	46.00	Average
9		6.800	22.79	9.79	32.58	-27.42	60.00	QP
10		6.800	14.35	9.79	24.14	-25.86	50.00	Average
11		11.430	22.08	9.88	31.97	-28.03	60.00	QP
12		11.430	19.14	9.88	29.03	-20.97	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2025-12-30
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	WPC_WLC-3W + MPP-15W	Test Voltage	AC 120V/60Hz

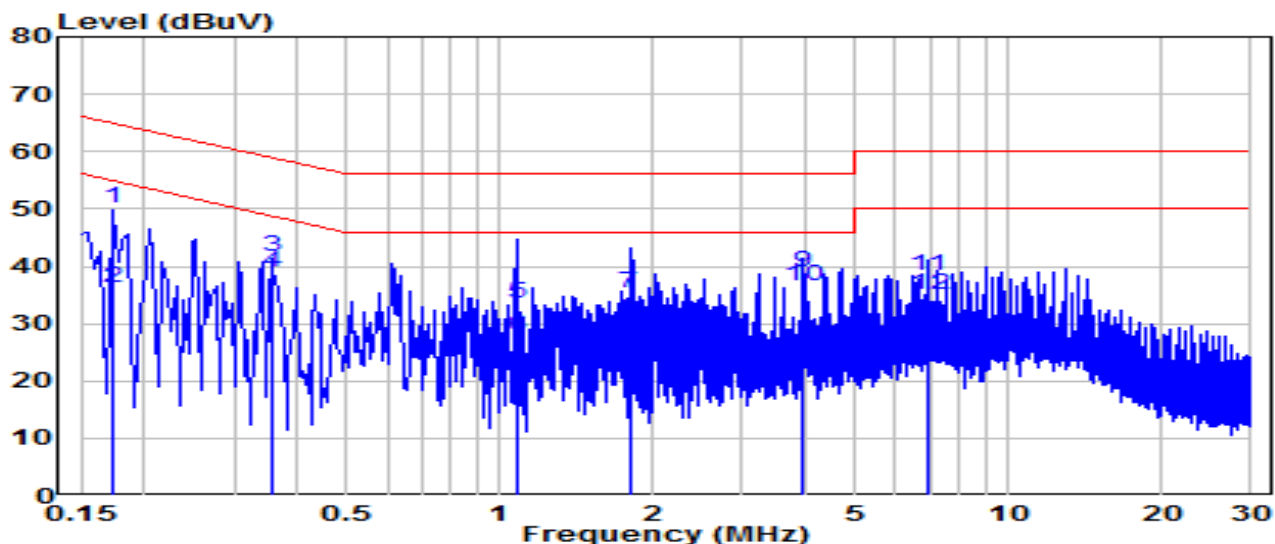


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.172	40.50	9.63	50.13	-14.71	64.84	QP
2		0.172	26.56	9.63	36.18	-18.66	54.84	Average
3		0.357	32.14	9.63	41.77	-17.02	58.80	QP
4		0.357	29.24	9.63	38.87	-9.93	48.80	Average
5		1.077	23.88	9.67	33.55	-22.45	56.00	QP
6		1.077	18.23	9.67	27.90	-18.10	46.00	Average
7		1.797	25.70	9.69	35.40	-20.60	56.00	QP
8		1.797	20.90	9.69	30.60	-15.40	46.00	Average
9	*	3.961	29.33	9.73	39.06	-16.94	56.00	QP
10	*	3.961	26.82	9.73	36.55	-9.45	46.00	Average
11		6.935	28.67	9.79	38.46	-21.54	60.00	QP
12		6.935	25.30	9.79	35.10	-14.90	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2025-12-30
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	WPC_WLC-3W + MPP-15W	Test Voltage	AC 120V/60Hz

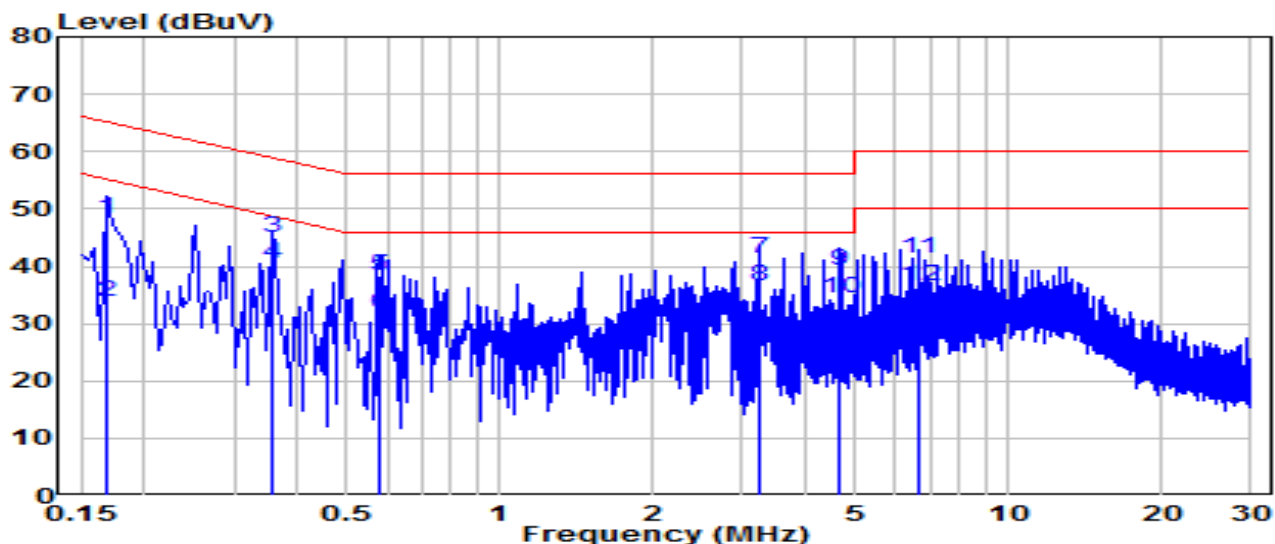


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.168	38.61	9.63	48.23	-16.82	65.06	QP
2		0.168	24.15	9.63	33.78	-21.28	55.06	Average
3	*	0.357	35.44	9.63	45.07	-13.73	58.80	QP
4	*	0.357	30.76	9.63	40.39	-8.41	48.80	Average
5		0.582	28.76	9.65	38.40	-17.60	56.00	QP
6		0.582	22.07	9.65	31.71	-14.29	46.00	Average
7		3.241	31.56	9.72	41.27	-14.73	56.00	QP
8		3.241	26.86	9.72	36.57	-9.43	46.00	Average
9		4.677	29.64	9.74	39.39	-16.61	56.00	QP
10		4.677	24.74	9.74	34.48	-11.52	46.00	Average
11		6.647	31.70	9.79	41.49	-18.51	60.00	QP
12		6.647	26.84	9.79	36.62	-13.38	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2026-01-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	Standby Mode	Test Voltage	AC 120V/60Hz

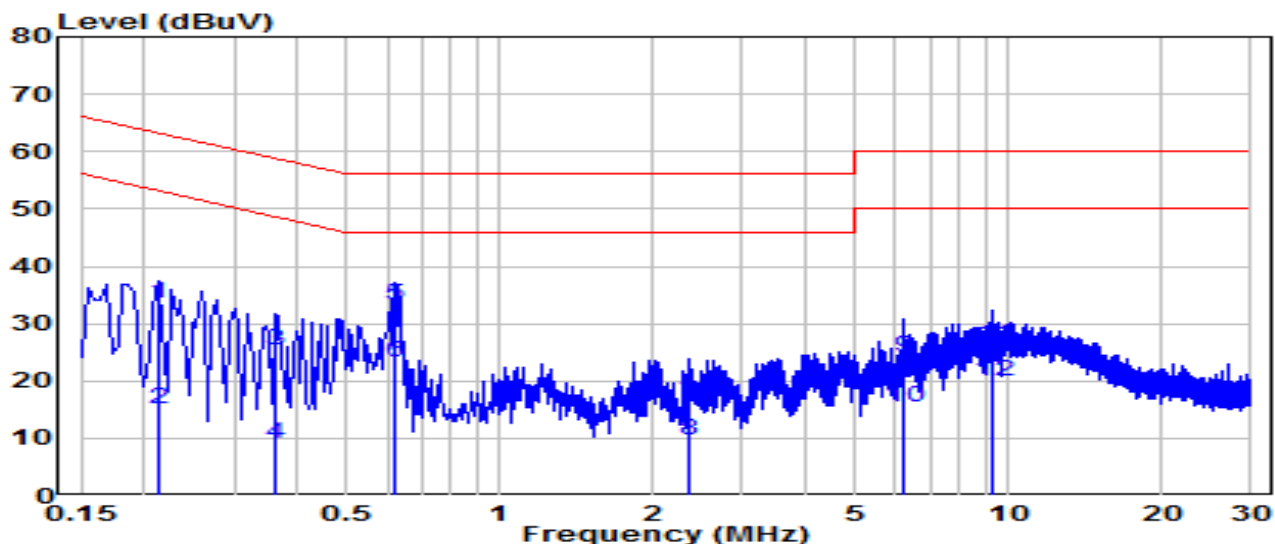


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.213	23.90	9.64	33.54	-29.55	63.09	QP
2		0.213	5.43	9.64	15.07	-38.02	53.09	Average
3		0.361	15.71	9.65	25.36	-33.34	58.69	QP
4		0.361	-0.71	9.65	8.94	-39.76	48.69	Average
5	*	0.622	23.68	9.66	33.34	-22.66	56.00	QP
6	*	0.622	13.71	9.66	23.38	-22.62	46.00	Average
7		2.350	6.39	9.72	16.11	-39.89	56.00	QP
8		2.350	-0.10	9.72	9.62	-36.38	46.00	Average
9		6.238	14.30	9.81	24.11	-35.89	60.00	QP
10		6.238	5.49	9.81	15.30	-34.70	50.00	Average
11		9.356	16.38	9.86	26.25	-33.75	60.00	QP
12		9.356	10.17	9.86	20.03	-29.97	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Wireless Charge Stand	Date of Test	2026-01-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	Standby Mode	Test Voltage	AC 120V/60Hz

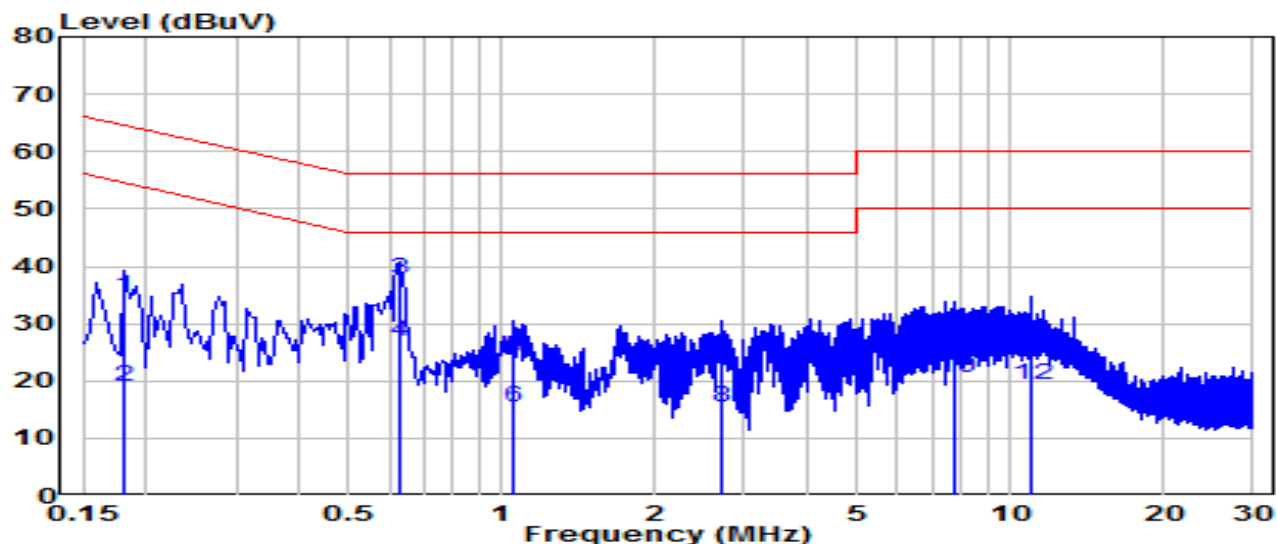

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.181	24.99	9.64	34.63	-29.79	64.42	QP
2		0.181	9.32	9.64	18.96	-35.46	54.42	Average
3	*	0.627	28.06	9.66	37.72	-18.28	56.00	QP
4	*	0.627	17.15	9.66	26.81	-19.19	46.00	Average
5		1.050	14.38	9.68	24.06	-31.94	56.00	QP
6		1.050	5.83	9.68	15.51	-30.49	46.00	Average
7		2.688	13.00	9.73	22.73	-33.27	56.00	QP
8		2.688	5.58	9.73	15.31	-30.69	46.00	Average
9		7.795	18.06	9.83	27.89	-32.11	60.00	QP
10		7.795	10.68	9.83	20.52	-29.48	50.00	Average
11		11.052	15.47	9.89	25.36	-34.64	60.00	QP
12		11.052	9.50	9.89	19.39	-30.61	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Wireless Charge Stand** is in compliance with Part 15.209 of the FCC Rules.

Appendix A : Test Photograph

Refer to “2511TW0116-UT” file.

Appendix B : EUT Photograph

Refer to “2511TW0116-UE” file.

Appendix C : Internal Photograph

Refer to “2511TW0116-UI” file.

_____ The End _____