

EMC Test Report**Application for FCC Grant of Equipment Authorization
Canada Certification****Innovation, Science and Economic Development Canada
RSS-Gen Issue 4 / RSS 247 Issue 2
FCC Part 15 Subpart C****Model: WH500-XD1**

IC CERTIFICATION #: 457A-WH500XD1
FCC ID: AL8-WH500XD1

APPLICANT: Plantronics Inc.
P.O. Box 635
Santa Cruz, CA 95061-0635

TEST SITE(S): National Technical Systems - Silicon Valley
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-4

REPORT DATE: September 13, 2017

REISSUE DATE: December 5, 2017

FINAL TEST DATES: August 1, 4, 9, 10 and 16, 2017

TOTAL NUMBER OF PAGES: 50



National Technical Systems - Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

VALIDATING SIGNATORIES

PROGRAM MGR



Deniz Demirci
Senior Wireless / EMC Engineer

TECHNICAL REVIEWER:



Deniz Demirci
Senior Wireless / EMC Engineer

FINAL REPORT PREPARER:



David Guidotti
Senior Technical Writer

QUALITY ASSURANCE DELEGATE



Breanne Siska
Technical Writer

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	September 13, 2017	First release	
1	September 15, 2017	Typos corrected.	Deniz Demirci
2	September 27, 2017	Dates and version numbers added to undated reference standards. Revised to clarify below 30 MHz measurements. Clarified the EUT height above 1 GHz radiated emission measurements.	Deniz Demirci
3	December 5, 2017	Revised to update model name	David Guidotti

TABLE OF CONTENTS

VALIDATING SIGNATORIES	2
REVISION HISTORY	3
TABLE OF CONTENTS	4
SCOPE.....	5
OBJECTIVE	5
STATEMENT OF COMPLIANCE	6
DEVIATIONS FROM THE STANDARDS.....	6
TEST RESULTS SUMMARY	7
DIGITAL TRANSMISSION SYSTEMS (902 – 928 MHZ)	7
MEASUREMENT UNCERTAINTIES	8
EQUIPMENT UNDER TEST (EUT) DETAILS.....	9
GENERAL.....	9
OTHER EUT DETAILS	9
ANTENNA SYSTEM	9
ENCLOSURE.....	9
MODIFICATIONS.....	9
SUPPORT EQUIPMENT	9
EUT INTERFACE PORTS	9
EUT OPERATION	9
TEST SITE.....	10
GENERAL INFORMATION	10
CONDUCTED EMISSIONS CONSIDERATIONS	10
RADIATED EMISSIONS CONSIDERATIONS	10
MEASUREMENT INSTRUMENTATION	11
RECEIVER SYSTEM	11
INSTRUMENT CONTROL COMPUTER	11
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	11
FILTERS/ATTENUATORS	12
ANTENNAS.....	12
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	12
INSTRUMENT CALIBRATION.....	12
TEST PROCEDURES	13
EUT AND CABLE PLACEMENT	13
CONDUCTED EMISSIONS.....	13
RADIATED EMISSIONS.....	14
CONDUCTED EMISSIONS FROM ANTENNA PORT	16
BANDWIDTH MEASUREMENTS	16
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	17
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN	17
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	18
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS	18
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	18
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	19
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	19
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	20
APPENDIX B TEST DATA	22
END OF REPORT	50

SCOPE

An electromagnetic emissions test has been performed on the Plantronics Inc. model WH500-XD1, pursuant to the following rules:

RSS Gen Issue 4 “General Requirements for Compliance of Radio Apparatus”

RSS 247 Issue 2 “Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices”

FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in National Technical Systems - Silicon Valley test procedures:

ANSI C63.10-2013

FCC DTS Measurement Guidance KDB558074 D01 v04 (April 5, 2017)

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer’s declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body’s review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Plantronics Inc. model WH500-XD1 complied with the requirements of the following regulations:

RSS-Gen Issue 4 “General Requirements for Compliance of Radio Apparatus”
RSS 247 Issue 2 “Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices”
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Plantronics Inc. model WH500-XD1 and therefore apply only to the tested sample. The sample was selected and prepared by Bill Jones of Plantronics Inc..

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY

DIGITAL TRANSMISSION SYSTEMS (902 – 928 MHz)

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 247 5.2	Digital Modulation	Systems uses DSSS techniques	System must utilize a digital transmission technology	Complies
15.247 (a) (2)	RSS 247 5.2 (1)	6 dB Bandwidth	0.920 MHz	> 500 kHz	Complies
15.247 (b) (3)	RSS 247 5.4 (4)	Output Power, 902 – 928 MHz	17.7 dBm (0.055 Watts) EIRP = 0.091 W Note 1	1 Watt, EIRP limited to 4 Watts.	Complies
15.247(e)	RSS 210 5.2 (2)	Power Spectral Density	3.6 dBm/3 kHz	8 dBm/3 kHz	Complies
15.247(d)	RSS 247 5.5	Antenna Port Spurious Emissions 890 MHz – 940 MHz	-27.0 dBc	< -20 dBc	Complies
15.247(d) / 15.209	RSS 247 5.5	Radiated Spurious Emissions 9 kHz – 10 GHz	53.3 dBμV/m @ 3936.0 MHz (-20.7 dB)	Refer to the limits section (p18) for restricted bands, all others < -20 dBc	Complies

Note 1: EIRP calculated using antenna gain of 2.2 dBi for the highest EIRP system.

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Internal	Unique or integral antenna required	Complies
15.407 (b) (6)	RSS-Gen Table 3	AC Conducted Emissions	33.5 dBμV @ 2.233 MHz (-22.5 dB)	Refer to page 17	Complies
15.247 (i) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to SAR exclusion calculation and RSS 102 declaration	Refer to OET 65, FCC Part 1 and RSS 102	Complies
-	RSS-Gen 8.3	User Manual	Integral antenna	Statement for products with detachable antenna	Complies
-	RSS-Gen 8.4	User Manual	Refer to user manual	Statement for all products	Complies
-	RSP-100 RSS-Gen 6.6	Occupied Bandwidth	1.231 MHz	Information only	N/A

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.5 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Plantronics Inc. model WH500-XD1 is a phone headset for Plantronics Base units. The sample was received on August 1, 2017 and tested on August 1, 4, 9, 10 and 16, 2017. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Plantronics	WH500-XD1	Phone Headset	Hermit #3	AL8-WH500XD1

OTHER EUT DETAILS

The EUT has TDD air interface protocol with maximum of 7 % source based duty cycle.

ANTENNA SYSTEM

Integral antenna.

ENCLOSURE

The EUT enclosure measures approximately 10 x 2 x 2 cm. It is primarily constructed of plastic.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at NTS Silicon Valley.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

AC powerline spurious emissions:

Company	Model	Description	Serial Number	FCC ID
Plantronics	-	Call indication	-	-
Lucent	-	Phone	0821	-
Plantronics	C052-XD	Base unit	MBZ	-

Radiated emissions:

Company	Model	Description	Serial Number	FCC ID
Plantronics	C052-XD	Base unit (Remote)	MBZ	-

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

AC powerline spurious emissions:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Charging port	Base unit	Direct connection	N/A	N/A

EUT OPERATION

During testing, the EUT was transmitting with full power for each test case detailed in the test report.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Designation / Registration Numbers		Location
	FCC	Canada	
Chamber 4	US0027	2845B-4	41039 Boyce Road Fremont, CA 94538-2435

ANSI C63.4-2014 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4-2014.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.10-2013. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4-2014 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4-2014.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20 Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000 MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

Software is used to view and convert receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers. The software used for radiated and conducted emissions measurements is NTS EMI Test Software (rev 2.10)

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a 50 μ H Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 μ H CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.10-2013 specifies that the test height above ground for table mounted devices shall be 0.8 m for below 1 GHz measurements and 1.5 m for above 1 GHz measurements. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor as specified in ANSI C63.4-2014. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.10-2013, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

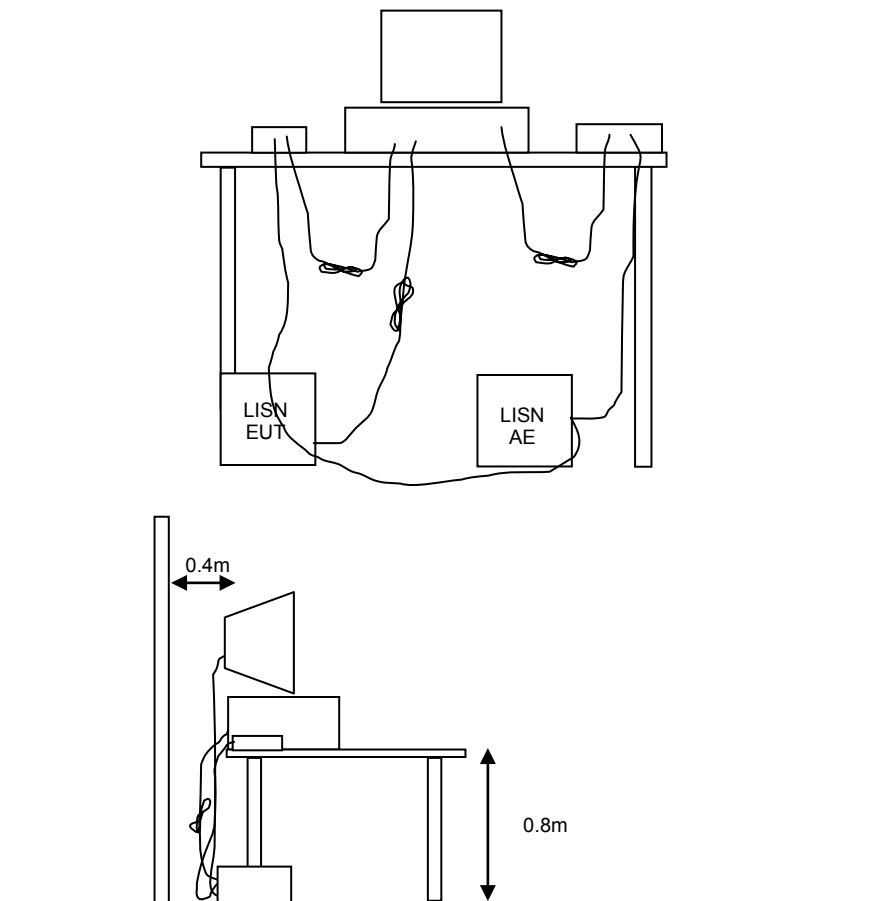



Figure 1 Typical Conducted Emissions Test Configuration

RADIATED EMISSIONS


A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1 m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

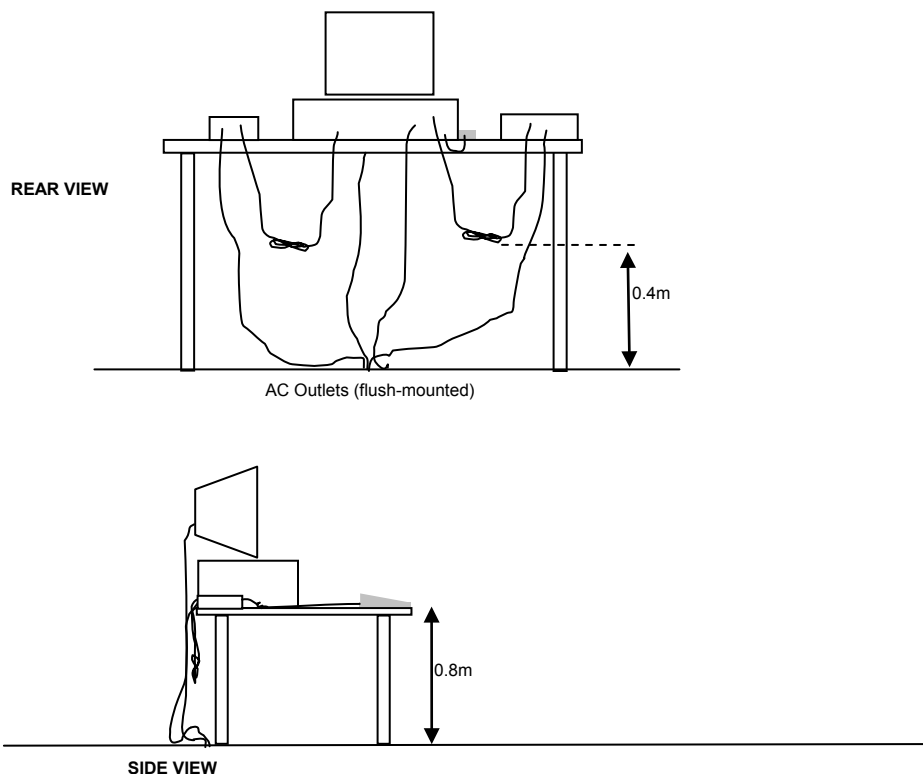


Typical Test Configuration for Radiated Field Strength Measurements

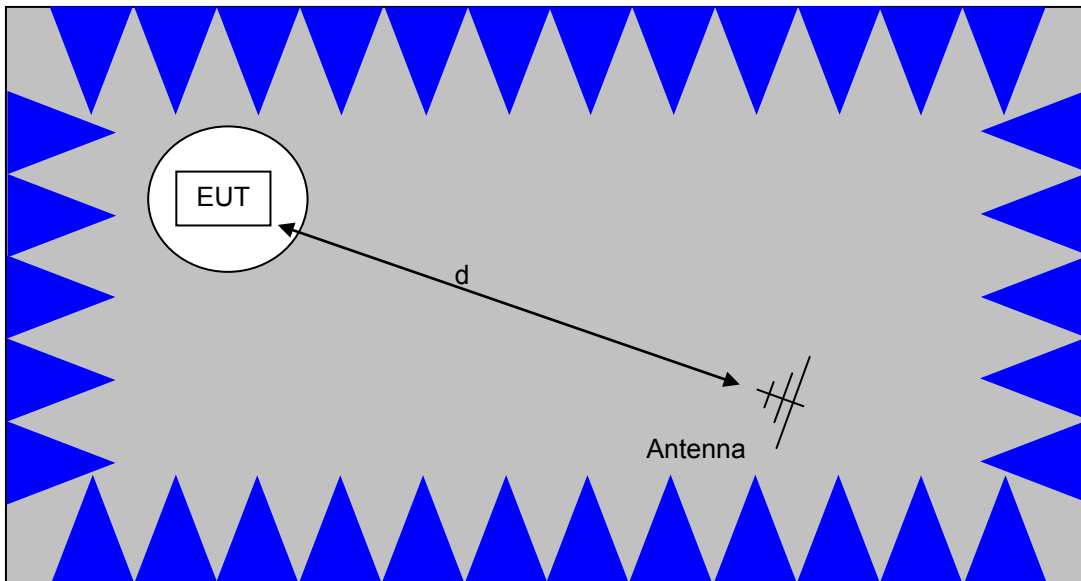

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

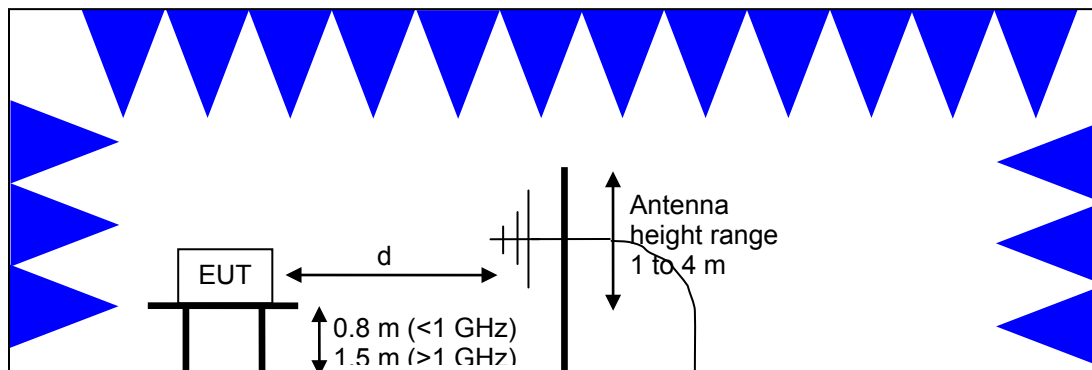

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

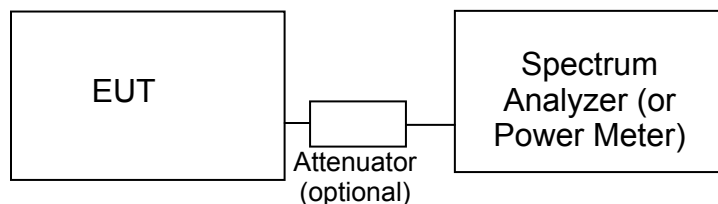Test Configuration for Antenna Port Measurements

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and NTS Silicon Valley's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6 dB, 20 dB, 26 dB and/or 99% signal bandwidth are measured using the bandwidths recommended by ANSI C63.10-2013 and RSS GEN Issue 4.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dB μ V). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dB μ V/m). The results are then converted to the linear forms of μ V and μ V/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dB μ V)	Quasi Peak Limit (dB μ V)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹.

Frequency Range (MHz)	Limit (μV/m)	Limit (dBμV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
902 – 928	1 Watt (30 dBm)	8 dBm/3 kHz
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3 kHz
5725 – 5850	1 Watt (30 dBm)	8 dBm/3 kHz

The maximum permitted output power is reduced by 1 dB for every dB the antenna gain exceeds 6 dBi.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20 dB below the level of the highest in-band signal level (30 dB if the power is measured using the sample detector/power averaging method).

¹ The restricted bands are detailed in FCC 15.205 and RSS-Gen Table 6

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dB μ V

S = Specification Limit in dB μ V

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

R_r = Receiver Reading in dB μ V/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dB μ V/m

L_s = Specification Limit in dB μ V/m

M = Margin in dB Relative to Spec.

Appendix A Test Equipment Calibration Data

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Radiated Emissions, 30 - 10,000 MHz, 01-Aug-17					
National Technical Systems	NTS EMI Software (rev 2.10)	N/A	0		N/A
National Technical Systems	NTS Capture Analyzer Software (rev 3.8)	N/A	0		N/A
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	10/5/2016	10/5/2017
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	9/29/2016	9/29/2018
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/31/2016	11/1/2017
Hewlett Packard	High Pass filter, 1.5 GHz (Blu System)	P/N 84300-80037 (84125C)	1389	9/9/2016	9/9/2017
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1548	10/12/2016	10/12/2018
Com-Power	Preamplifier, 30-1000 MHz	PA-103	1632	3/8/2017	3/8/2018
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB 7	1756	7/8/2017	7/8/2018
EMCO	Magnetic Loop Antenna, 9 kHz-30 MHz	AL-130	3003	8/9/2016	8/9/2018
Radiated Emissions, 1,000 - 10,000 MHz, 04-Aug-17					
National Technical Systems	NTS EMI Software (rev 2.10)	N/A	0		N/A
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	10/5/2016	10/5/2017
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/21/2015	12/21/2017
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/31/2016	11/1/2017
Hewlett Packard	High Pass filter, 1.5 GHz (Blu System)	P/N 84300-80037 (84125C)	1389	9/9/2016	9/9/2017
Radiated Emissions, 30 - 10,000 MHz, 09-Aug-17					
National Technical Systems	NTS EMI Software (rev 2.10)	N/A	0		N/A
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	10/5/2016	10/5/2017
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/21/2015	12/21/2017
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/31/2016	11/1/2017
Hewlett Packard	High Pass filter, 1.5 GHz (Blu System)	P/N 84300-80037 (84125C)	1389	9/9/2016	9/9/2017
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1548	10/12/2016	10/12/2018
Com-Power	Preamplifier, 30-1000 MHz	PA-103	1632	3/8/2017	3/8/2018
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB 7	1756	7/8/2017	7/8/2018
Radiated Emissions, 1,000 - 6,000 MHz, 10-Aug-17					
National Technical Systems	NTS EMI Software (rev 2.10)	N/A	0		N/A
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	10/5/2016	10/5/2017
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/21/2015	12/21/2017
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/31/2016	11/1/2017



<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz (SA40-Blu)	3115	1386	10/13/2016	10/13/2018
Antenna port measurements, 16-Aug-17					
National Technical Systems	NTS Capture Analyzer Software (rev 3.8)	N/A	0		N/A
Rohde & Schwarz	Power Meter, Single Channel	NRVS	1422	3/10/2017	3/10/2018
Rohde & Schwarz	Peak Power Sensor 100 uW - 2 Watts (w/ 20 dB pad, SN BJ5155)	NRV-Z32	1536	4/19/2017	4/21/2018
Agilent Technologies	USB Average Power Sensor	U2001A	2442	1/5/2017	1/5/2018
Agilent Technologies	3Hz -44GHz PSA Spectrum Analyzer	E4446A	2796	5/22/2017	5/22/2018
AC Power Line Conducted Emissions, 10-Aug-17					
National Technical Systems	NTS EMI Software (rev 2.10)	N/A	0		N/A
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1401	2/3/2017	2/3/2018
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB 7	1756	7/8/2017	7/8/2018
Fischer Custom Comm	LISN, 25A, 150kHz to 30MHz, 25 Amp,	FCC-LISN-50-25-2-09	2000	9/26/2016	9/26/2017

Appendix B Test Data

T105585 Pages 23 – 27

T105586 Pages 28 – 49



EMC Test Data

Client:	Plantronics Inc.	Job Number:	JD105563
Product	C052-XD1 and C054-XD1, 900 MHz Cordless Base	T-Log Number:	T105585
System Configuration:		Project Manager:	Christine Krebill
Contact:	Bill Jones	Project Coordinator:	
Emissions Standard(s):	FCC 15.247 / RSS-247	Class:	B
Immunity Standard(s):		Environment:	

EMC Test Data

For The

Plantronics Inc.

Product

C052-XD1 and C054-XD1, 900 MHz Cordless Base Units

Date of Last Test: 9/15/2017

Client:	Plantronics Inc.	Job Number:	JD105563
Model:	C052-XD1 and C054-XD1, 900 MHz Cordless Base Units	T-Log Number:	T105585
Contact:	Bill Jones	Project Manager:	Christine Krebill
Standard:	FCC 15.247 / RSS-247	Project Coordinator:	-
		Class:	B

Conducted Emissions

(NTS Silicon Valley, Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 8/10/2017
 Test Engineer: Deniz Demirci
 Test Location: Fremont Chamber #4

Config. Used: 1
 Config Change: None
 EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT and support equipment were located on a table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80 cm from the LISN.

Ambient Conditions:
 Temperature: 20-22 °C
 Rel. Humidity: 38-40 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120 V/60 Hz	Class B	Pass	33.5 dBμV @ 2.233 MHz (-22.5 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard



No deviations were made from the requirements of the standard.

Client: Plantronics Inc.	Job Number: JD105563
Model: C052-XD1 and C054-XD1, 900 MHz Cordless Base Units	T-Log Number: T105585
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30 MHz, 120 V/60 Hz

EUT and Test Configuration Details:

Hermit headset and Base set to transmit at center channel. Headset is charging. Call indicator attached and active. Phone line is connected.

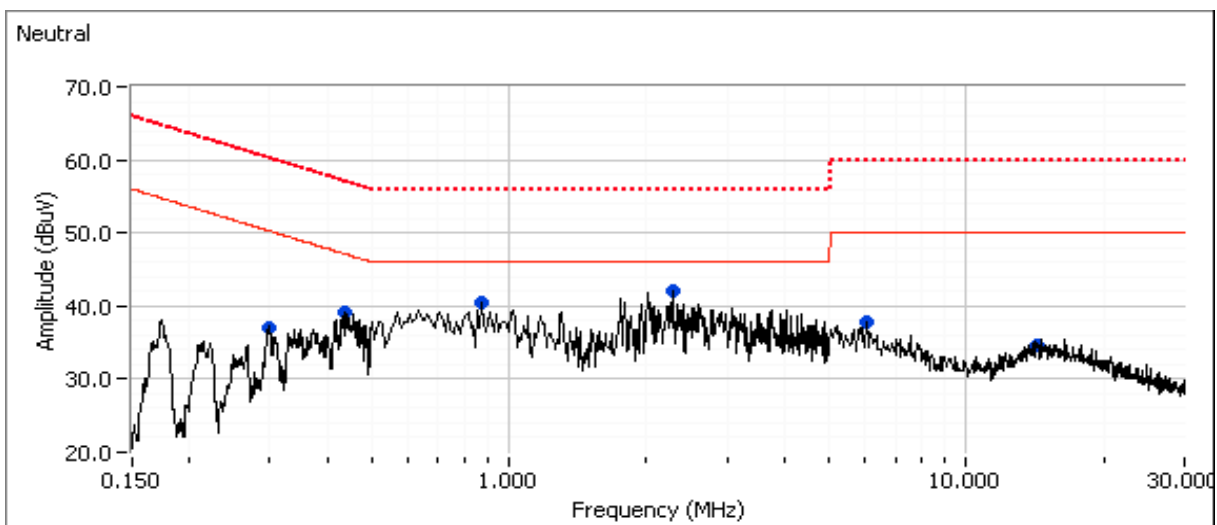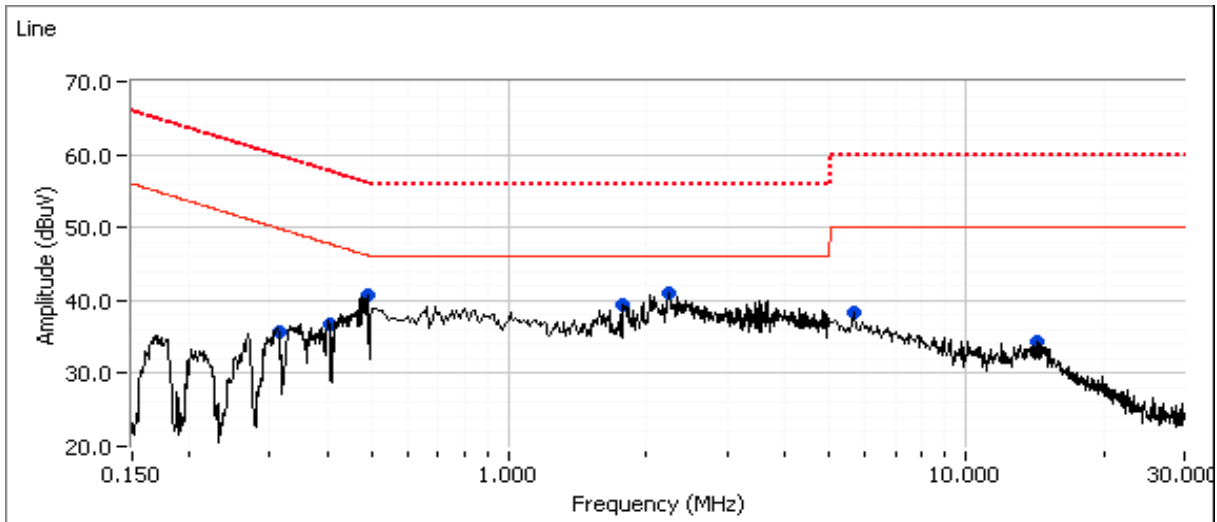

EMC Test Data

Client:	Plantronics Inc.	Job Number:	JD105563
Model:	C052-XD1 and C054-XD1, 900 MHz Cordless Base Units	T-Log Number:	T105585
Contact:	Bill Jones	Project Manager:	Christine Krebill
Standard:	FCC 15.247 / RSS-247	Project Coordinator:	-
		Class:	B

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dBμV	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.313	35.6	Line 1	49.9	-14.3	Peak	
0.405	36.8	Line 1	47.8	-11.0	Peak	
0.490	40.8	Line 1	46.2	-5.4	Peak	
1.781	39.4	Line 1	46.0	-6.6	Peak	
2.231	41.1	Line 1	46.0	-4.9	Peak	
5.701	38.4	Line 1	50.0	-11.6	Peak	
14.269	34.4	Line 1	50.0	-15.6	Peak	
0.298	37.1	Neutral	50.3	-13.2	Peak	
0.440	39.2	Neutral	47.1	-7.9	Peak	
0.870	40.4	Neutral	46.0	-5.6	Peak	
2.277	42.0	Neutral	46.0	-4.0	Peak	
6.052	37.7	Neutral	50.0	-12.3	Peak	
14.218	34.7	Neutral	50.0	-15.3	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dBμV	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
2.233	33.5	Line 1	56.0	-22.5	QP	QP (1.00s)
0.868	33.3	Neutral	56.0	-22.7	QP	QP (1.00s)
1.792	32.6	Line 1	56.0	-23.4	QP	QP (1.00s)
2.286	32.2	Neutral	56.0	-23.8	QP	QP (1.00s)
0.489	32.0	Line 1	56.2	-24.2	QP	QP (1.00s)
0.441	32.4	Neutral	57.0	-24.6	QP	QP (1.00s)
2.233	20.2	Line 1	46.0	-25.8	AVG	AVG (0.10s)
2.286	20.1	Neutral	46.0	-25.9	AVG	AVG (0.10s)
1.792	18.9	Line 1	46.0	-27.1	AVG	AVG (0.10s)
14.241	22.7	Neutral	50.0	-27.3	AVG	AVG (0.10s)
0.868	18.3	Neutral	46.0	-27.7	AVG	AVG (0.10s)
14.217	20.8	Line 1	50.0	-29.2	AVG	AVG (0.10s)
0.441	17.5	Neutral	47.0	-29.5	AVG	AVG (0.10s)
5.607	30.1	Line 1	60.0	-29.9	QP	QP (1.00s)
0.489	16.2	Line 1	46.2	-30.0	AVG	AVG (0.10s)
5.607	20.0	Line 1	50.0	-30.0	AVG	AVG (0.10s)
0.298	30.2	Neutral	60.3	-30.1	QP	QP (1.00s)
0.313	29.1	Line 1	59.9	-30.8	QP	QP (1.00s)

Client:	Plantronics Inc.	Job Number:	JD105563
Model:	C052-XD1 and C054-XD1, 900 MHz Cordless Base Units	T-Log Number:	T105585
Contact:	Bill Jones	Project Manager:	Christine Krebill
Standard:	FCC 15.247 / RSS-247	Project Coordinator:	-
		Class:	B

Cont - Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
14.241	29.2	Neutral	60.0	-30.8	QP	QP (1.00s)
5.996	18.9	Neutral	50.0	-31.1	AVG	AVG (0.10s)
5.996	28.2	Neutral	60.0	-31.8	QP	QP (1.00s)
0.298	18.2	Neutral	50.3	-32.1	AVG	AVG (0.10s)
14.217	27.5	Line 1	60.0	-32.5	QP	QP (1.00s)
0.404	25.1	Line 1	57.8	-32.7	QP	QP (1.00s)
0.404	13.6	Line 1	47.8	-34.2	AVG	AVG (0.10s)
0.313	13.9	Line 1	49.9	-36.0	AVG	AVG (0.10s)



EMC Test Data

Client:	Plantronics Inc.	Job Number:	JD105563
Product	Hermit (900 MHz Convertible Headset)	T-Log Number:	T105586
System Configuration:		Project Manager:	Christine Krebill
Contact:	Bill Jones	Project Coordinator:	
Emissions Standard(s):	FCC 15.247 / RSS-247	Class:	B
Immunity Standard(s):		Environment:	

EMC Test Data

For The

Plantronics Inc.

Product

Hermit (900 MHz Convertible Headset)

Date of Last Test: 8/16/2017

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

RSS-247 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 8/16/2017
 Test Engineer: Deniz Demirci
 Test Location: Fremont EMC Lab #4A

Config. Used: 1
 Config Change: None
 EUT Voltage: 4 Vdc

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 20-22 °C
 Rel. Humidity: 38-40 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	Max		Output Power	15.247(b)	Pass	17.7 dBm
2	Max		Power spectral Density (PSD)	15.247(d)	Pass	3.6 dBm/3 kHz
3	Max		Minimum 6 dB Bandwidth	15.247(a)	Pass	0.920 MHz
3	Max		99% Bandwidth	RSS GEN	-	1.231 MHz
4	Max		Spurious emissions	15.247(b)	Pass	-27.0 dBc

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes


Sample S/N: HMT 2
 Driver: -

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
Tx	-	0.07	Yes	0.675	-	-	-

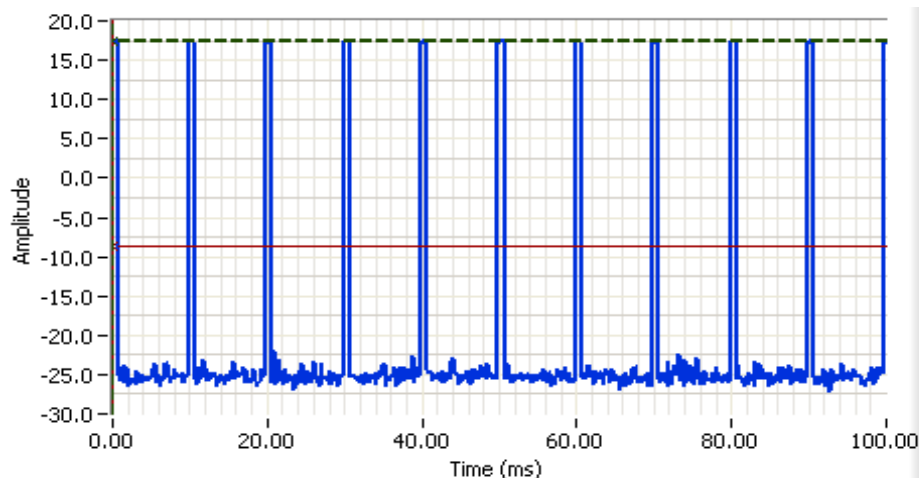

Analyzer Settings


Agilent Technologies, E4446A
 CF: 915.000 MHz
 SPAN: 0.000 MHz
 RB: 8.000 MHz
 VB: 8.000 MHz
 Detector: POS
 Attn: 40 DB
 RL Offset: 10.0 DB
 Sweep Time: 100.0ms
 Ref Lvl: 33.0 DBM

Comments

Hermit
 100 ms

Cursor 1	0.0000	17.4		Delta Time (ms)	0.00
Cursor 2	0.0000	-8.6		Delta Amplitude	26.0

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

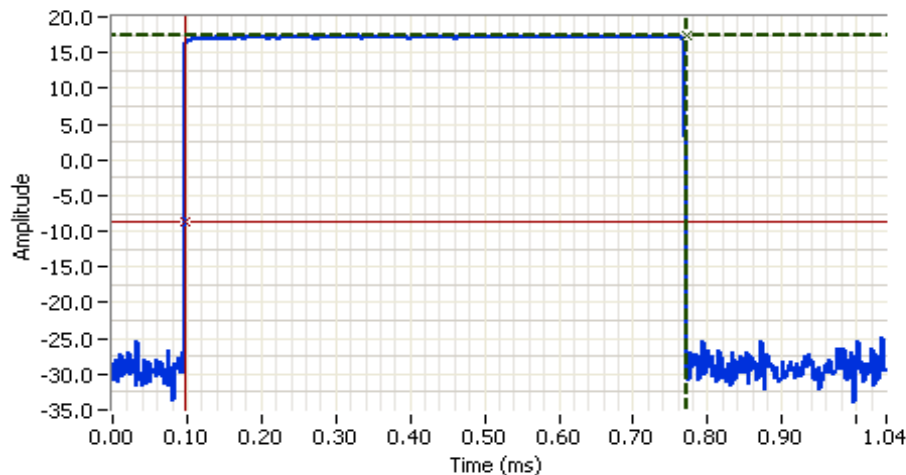


Analyzer Settings

Agilent Technologies, E4446A
 CF: 915.000 MHz
 SPAN: 0.000 MHz
 RB: 8.000 MHz
 VB: 8.000 MHz
 Detector: POS
 Attn: 40 DB
 RL Offset: 10.0 DB
 Sweep Time: 1.0ms
 Ref Lvl: 33.0 DBM

Comments

Hermit
 On time: 675 ms

Cursor 1	0.7719	17.3		Delta Time (ms)	0.675
Cursor 2	0.0971	-8.7		Delta Amplitude	26.0

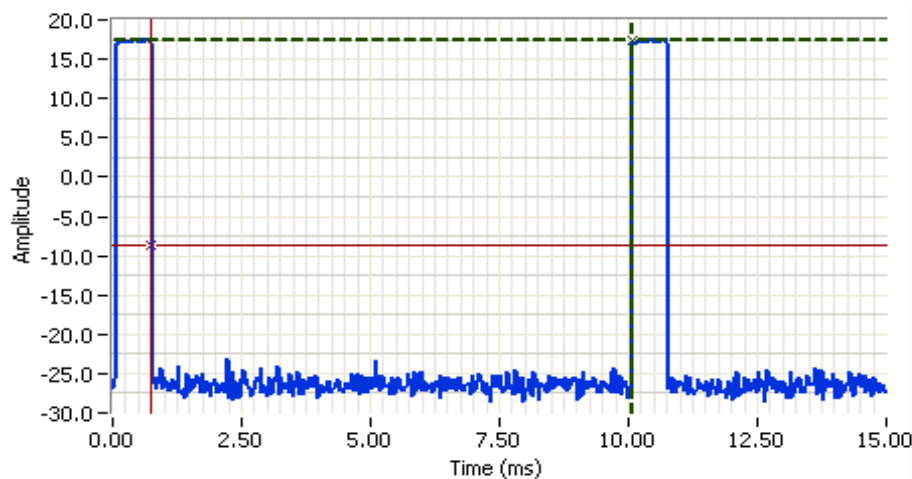

Analyzer Settings

Agilent Technologies, E4446A
 CF: 915.000 MHz
 SPAN: 0.000 MHz
 RB: 8.000 MHz
 VB: 8.000 MHz
 Detector: POS
 Attn: 40 DB
 RL Offset: 10.0 DB
 Sweep Time: 15.0ms
 Ref Lvl: 33.0 DBM

Comments

Hermit
 Off time: 9.336 ms

Cursor 1	10.0781	17.4		Delta Time (ms)	9.336
Cursor 2	0.7422	-8.6		Delta Amplitude	26.0



Client:	Plantronics Inc.	Job Number:	JD105563
Model:	Hermit (900 MHz Convertible Headset)	T-Log Number:	T105586
Contact:	Bill Jones	Project Manager:	Christine Krebill
Standard:	FCC 15.247 / RSS-247	Project Coordinator:	-
		Class:	N/A

Run #1: Output Power

Peak power

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
Max	902.850	16.2	41.7	2.2	Pass	18.4	0.069		
Max	915.000	17.4	55.0	2.2	Pass	19.6	0.091		
Max	927.125	16.1	40.7	2.2	Pass	18.3	0.068		

Note 1: Output power measured using a peak power meter, spurious limit is -20 dBc.

Average power (On time) - For information only

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
Max	902.850	15.3	33.88	2.2	Pass	17.5	0.056		
Max	915.000	16.5	44.67	2.2	Pass	18.7	0.074		
Max	927.125	15.1	32.36	2.2	Pass	17.3	0.054		

Note 1: Output power measured using a gated average power meter.


Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

Run #2: Power spectral Density

Mode: Tx

Power Setting	Frequency (MHz)	PSD (dBm/3 kHz) ^{Note 1}	Limit dBm/3 kHz	Result
Max	902.850	2.1	8.0	Pass
Max	915.000	3.6	8.0	Pass
Max	927.125	2.9	8.0	Pass

Note 1: Test performed per method PKSPD, in KDB 558074. Power spectral density measured using: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$, $\text{VBW}=3*\text{RBW}$, peak detector, span = $1.5*\text{EBW}$, auto sweep time, max hold.

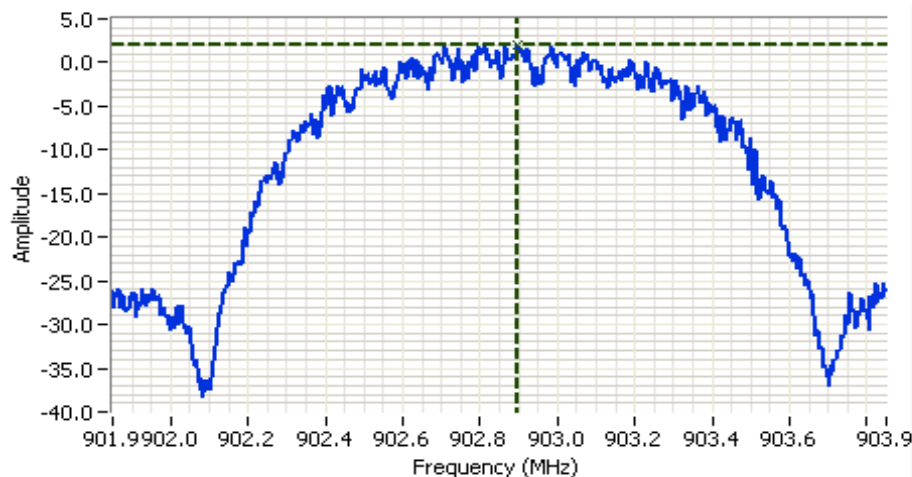


Analyzer Settings


Agilent Technologies, E4446A
 CF: 902.850 MHz
 SPAN: 2.000 MHz
 RB: 3.00 kHz
 VB: 10.0 kHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 10.0 DB
 Sweep Time: 210.9ms
 Ref Lvl: 30.0 DBM

Comments

PSD: 2.1 dBm/3 kHz
 Hermit



Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A


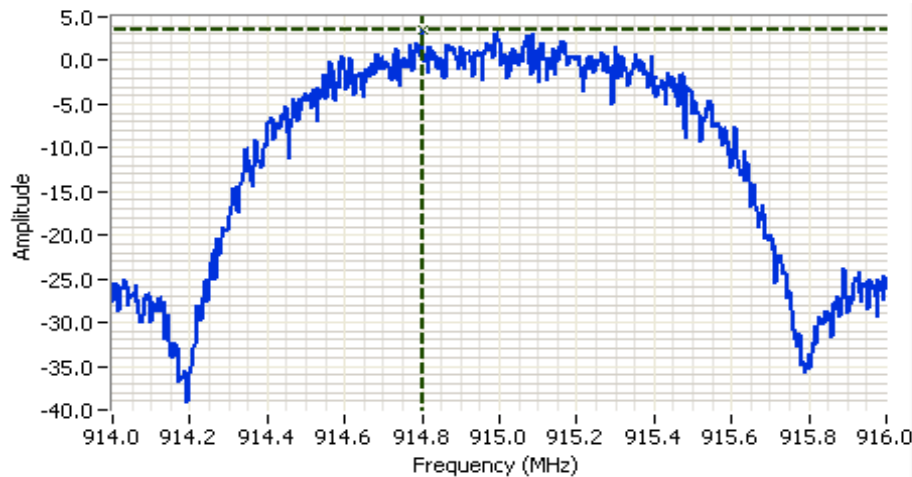


Analyzer Settings

Agilent Technologies, E4446A
 CF: 915.000 MHz
 SPAN: 2.000 MHz
 RB: 3.00 kHz
 VB: 10.0 kHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 10.0 DB
 Sweep Time: 210.9ms
 Ref Lvl: 30.0 DBM

Comments

PSD: 3.6 dBm/3 kHz
 Hermit

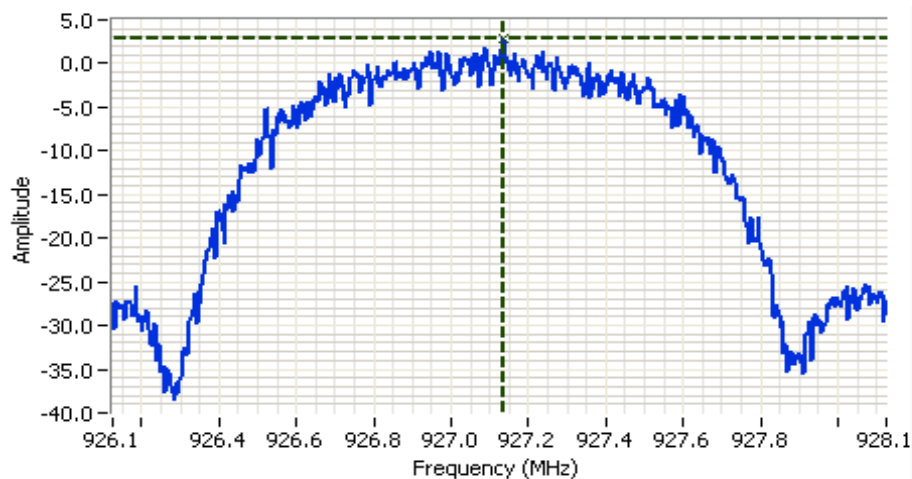


Analyzer Settings

Agilent Technologies, E4446A
 CF: 927.125 MHz
 SPAN: 2.000 MHz
 RB: 3.00 kHz
 VB: 10.0 kHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 10.0 DB
 Sweep Time: 210.9ms
 Ref Lvl: 30.0 DBM

Comments

PSD: 2.9 dBm/3 kHz
 Hermit




Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

Run #3: Signal Bandwidth

Mode: TX

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (kHz)	
		6dB	99%	6dB	99%
Max	902.850	0.930	1.231	100	51
Max	915.000	0.920	1.231	100	51
Max	927.125	0.935	1.231	100	51

Note 1: DTS BW: RBW=100 kHz, VBW $\geq 3 \times$ RBW, peak detector, max hold, auto sweep time, Span 2-5 times measured BW.
 99% BW: RBW=1-5% of 99%BW, VBW $\geq 3 \times$ RBW, peak detector, max hold, auto sweep time. Span 1.5-5 times OBW.

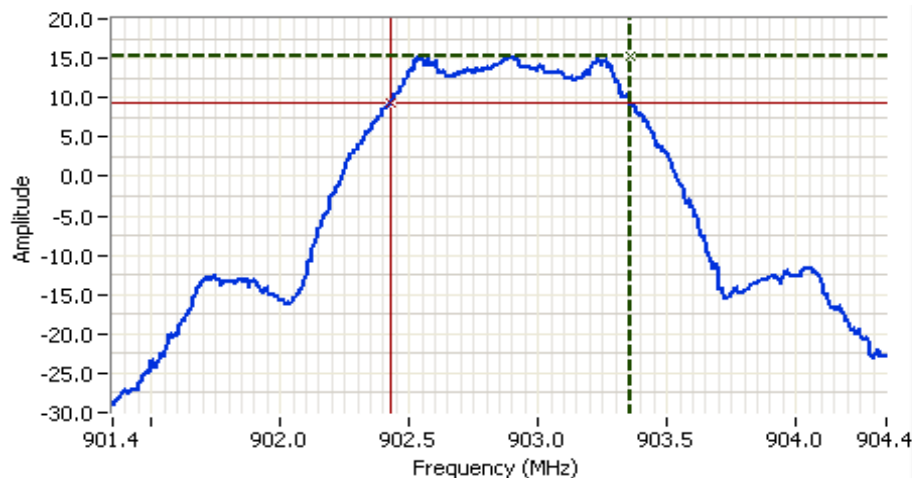


Analyzer Settings

Agilent Technologies, E4446A
 CF: 902.850 MHz
 SPAN: 3.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 10.0 DB
 Sweep Time: 1.0ms
 Ref Lvl: 30.0 DBM

Comments

6dB BW: 930 kHz
 Hermit

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

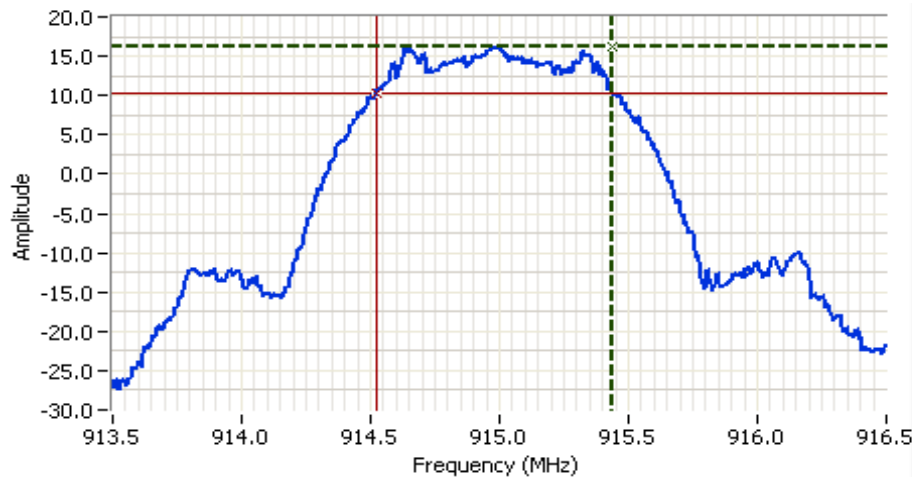

Analyzer Settings

Agilent Technologies, E4446A
 CF: 915.000 MHz
 SPAN: 3.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 40 DB
 RL Offset: 10.0 DB
 Sweep Time: 1.0ms
 Ref Lvl: 33.0 DBM


Comments

6dB BW: 920 kHz
 Hermit

Cursor 1	915.4400	16.3			
Cursor 2	914.5200	10.3			

Delta Freq. 920 kHz

Delta Amplitude 6.0

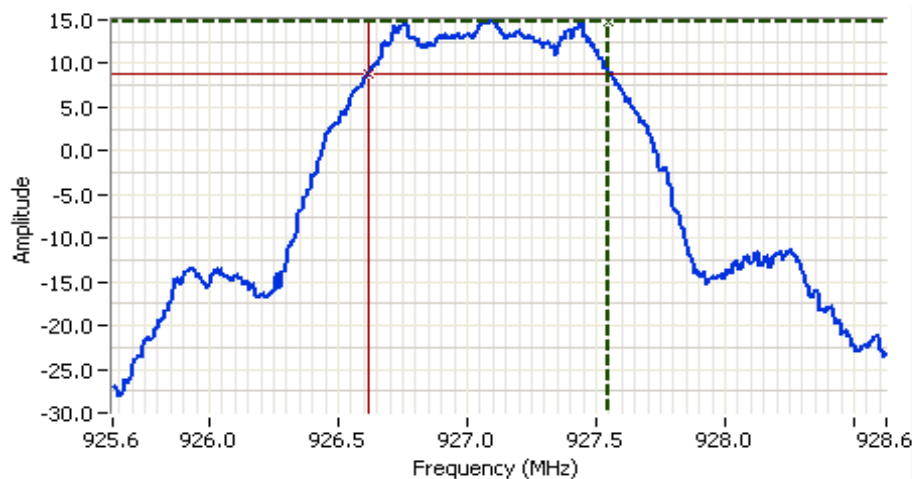

Analyzer Settings

Agilent Technologies, E4446A
 CF: 927.125 MHz
 SPAN: 3.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 10.0 DB
 Sweep Time: 1.0ms
 Ref Lvl: 30.0 DBM

Comments

6dB BW: 935 kHz
 Hermit


Cursor 1	927.5500	14.8			
Cursor 2	926.6150	8.8			

Delta Freq. 935 kHz

Delta Amplitude 6.0



Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

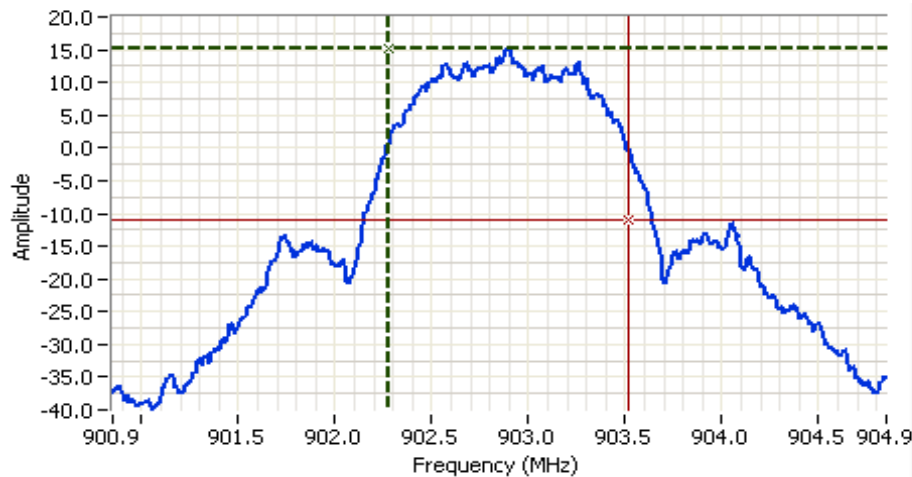

Analyzer Settings

Agilent Technologies, E4446A
 CF: 902.850 MHz
 SPAN: 4.000 MHz
 RB: 51.0 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 10.0 DB
 Sweep Time: 1.4ms
 Ref Lvl: 30.0 DBM


Comments

99% power BW: 1.231 MHz
 Hermit

Cursor 1 902.2809 15.1
 Cursor 2 903.5122 -10.9

Delta Freq. 1.231

Delta Amplitude 26.0

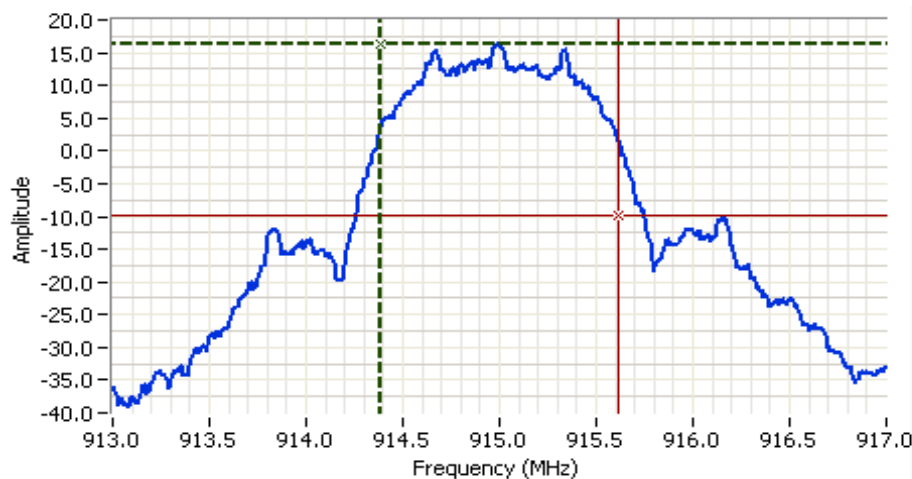

Analyzer Settings

Agilent Technologies, E4446A
 CF: 915.000 MHz
 SPAN: 4.000 MHz
 RB: 51.0 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 40 DB
 RL Offset: 10.0 DB
 Sweep Time: 1.4ms
 Ref Lvl: 33.0 DBM

Comments

99% power BW: 1.231 MHz
 Hermit


Cursor 1 914.3844 16.2
 Cursor 2 915.6156 -9.8

Delta Freq. 1.231

Delta Amplitude 26.0



Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

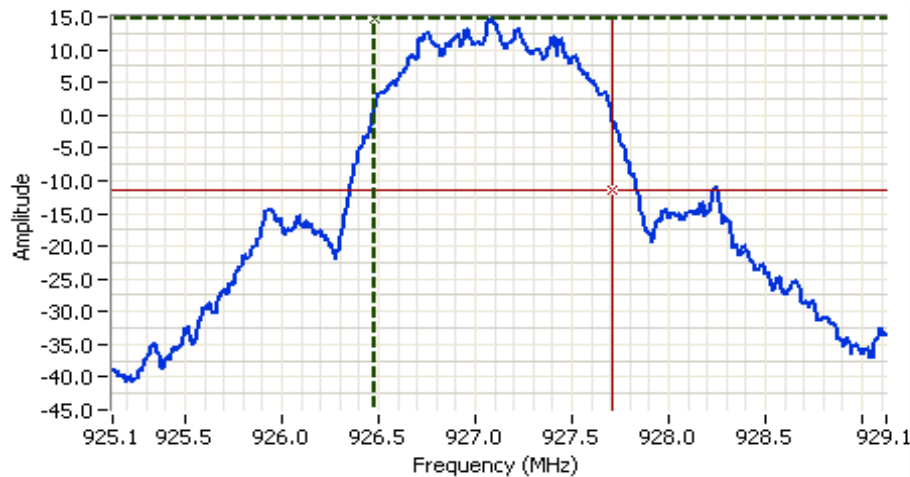

Analyzer Settings

Agilent Technologies, E4446A
 CF: 927.125 MHz
 SPAN: 4.000 MHz
 RB: 51.0 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 10.0 DB
 Sweep Time: 1.4ms
 Ref Lvl: 30.0 DBM

Comments

99% power BW: 1.231 MHz
 Hermit

Cursor 1	926.4761	14.6			
Cursor 2	927.7074	-11.4			

Delta Freq. 1.231

Delta Amplitude 26.0

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A


Run #4a: Out of Band Spurious Emissions

Frequency (MHz)	Power Setting	Mode	Limit	Result
902.850	Max	Tx	-20 dBc	Pass -28.3 dBc
927.125	Max	Tx	-20 dBc	Pass -27.0 dBc

RBW = 100 kHz and VBW = 300 kHz for all plots.


Plots showing compliance with -20 dBc limit for 902 and 928 MHz band edges

Plot for low channel

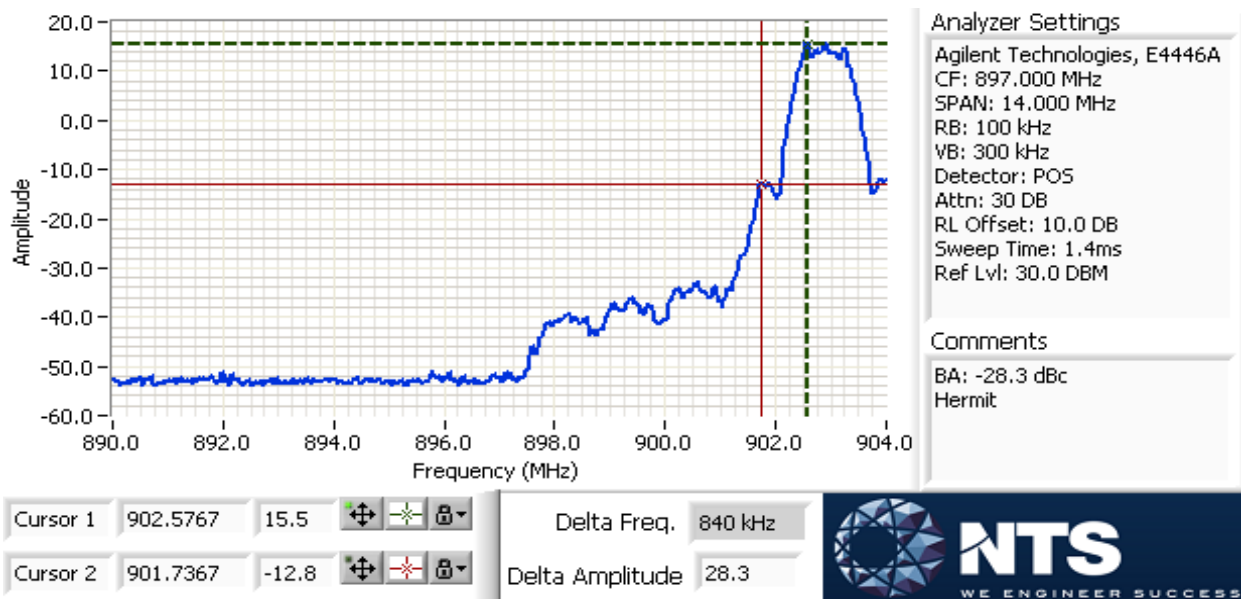

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

Plot for high channel

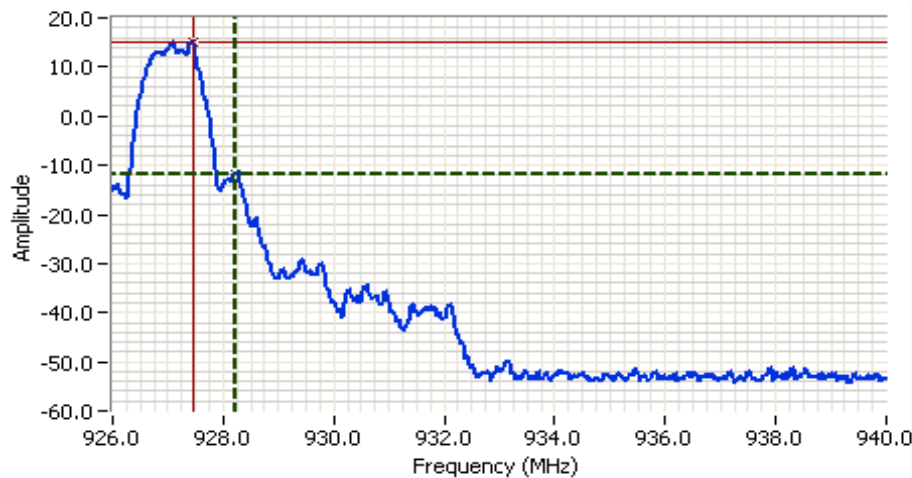

Analyzer Settings

Agilent Technologies, E4446A
 CF: 933.000 MHz
 SPAN: 14.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 10.0 DB
 Sweep Time: 1.4ms
 Ref Lvl: 30.0 DBM

Comments

BA: -27.0 dBc
 Hermit

Cursor 1	928.2167	-11.8	
Cursor 2	927.4467	15.2	

Delta Freq. 770 kHz
 Delta Amplitude 27.0

Client:	Plantronics Inc.	Job Number:	JD105563
Model:	Hermit (900 MHz Convertible Headset)	T-Log Number:	T105586
Contact:	Bill Jones	Project Manager:	Christine Krebill
Standard:	FCC 15.247 / RSS-247	Project Coordinator:	-
		Class:	N/A

RSS-247 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 22-24 °C
Rel. Humidity: 35-40 %

Summary of Results - Device Operating in the 902 - 928 MHz Band

Run #	Mode	Channel	Target Power	Power Setting	Test Performed	Limit	Result / Margin
1	Tx	902.850 MHz	-	Max	Radiated Emissions, 9 kHz - 10 GHz	FCC Part 15.209 / 15.247(c)	50.5 dBµV/m @ 3925.3 MHz (-23.5 dB)
	Tx	915.000 MHz	-	Max	Radiated Emissions, 9 kHz - 10 GHz	FCC Part 15.209 / 15.247(c)	53.3 dBµV/m @ 3936.0 MHz (-20.7 dB)
	Tx	927.125 MHz	-	Max	Radiated Emissions, 9 kHz - 10 GHz	FCC Part 15.209 / 15.247(c)	52.6 dBµV/m @ 3938.4 MHz (-21.4 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes


Sample S/N: Hermit #3

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074, ANSI C63.10 and ANSI C63.4

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor	Lin Volt Cor	Min VBW for FS (Hz)
-	-	0.07	Yes	0.677	-	-	-

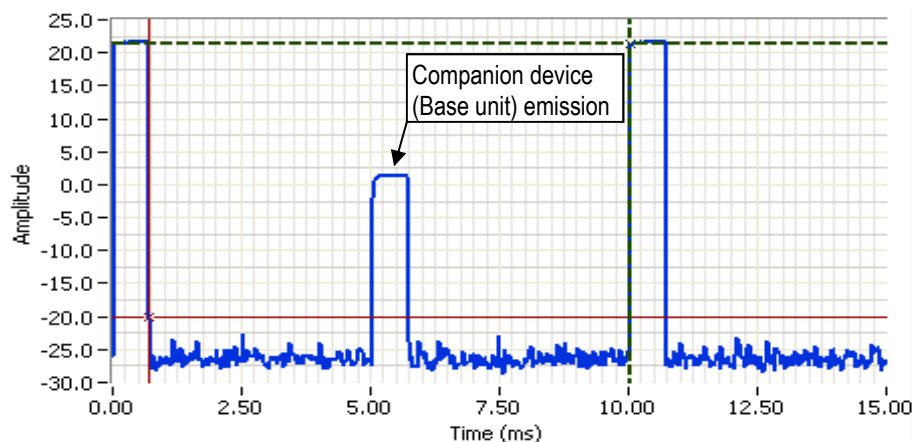


Analyzer Settings

Rohde&Schwarz,ESI
 CF: 902.850 MHz
 SPAN: 0.000 MHz
 RB: 10.000 MHz
 VB: 10.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 40.2 DB
 Sweep Time: 15.0ms
 Ref Lvl: 30.0 DBM

Comments

Hermit
 Off time: 9.319 ms

Cursor 1	10.0401	21.29		Delta Time (ms)	9.319
Cursor 2	0.7214	-20.14		Delta Amplitude	41.43

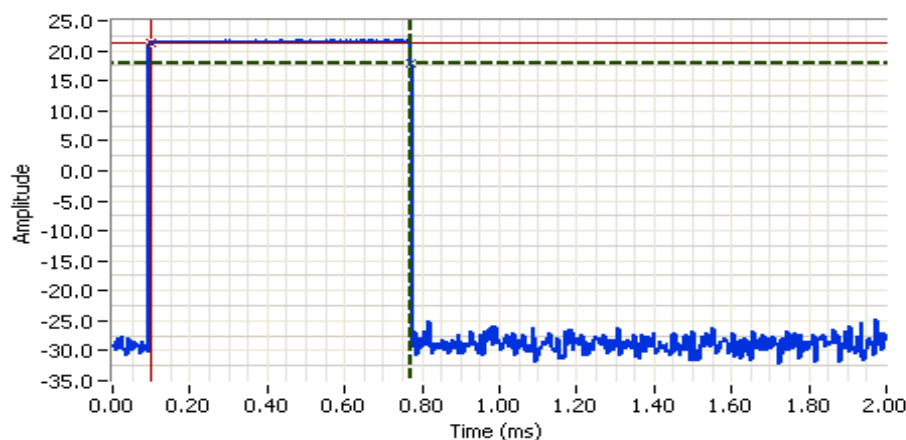

Analyzer Settings

Rohde&Schwarz,ESI
 CF: 902.850 MHz
 SPAN: 0.000 MHz
 RB: 10.000 MHz
 VB: 10.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 40.2 DB
 Sweep Time: 2.0ms
 Ref Lvl: 30.0 DBM

Comments

Hermit
 On time: 0.669 ms

Cursor 1	0.7695	17.75		Delta Time (ms)	0.669
Cursor 2	0.1002	21.29		Delta Amplitude	3.54





EMC Test Data

Client:	Plantronics Inc.	Job Number:	JD105563
Model:	Hermit (900 MHz Convertible Headset)	T-Log Number:	T105586
Contact:	Bill Jones	Project Manager:	Christine Krebill
Standard:	FCC 15.247 / RSS-247	Project Coordinator:	-
		Class:	N/A

Run #1: Radiated Spurious Emissions, 30 MHz - 10 GHz.

Date of Test: 8/1/2017, 8/4/2017

Test Engineer: Deniz Demirci

Test Location: FT Ch #4

Config. Used: 1

Config Change: None

EUT Voltage: Battery powered

Run #1a: Low Channel

Channel: 902.850 MHz Mode: -

Tx Chain: - Data Rate: -



Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
902.856	107.3	H	-	-	PK	57	3.0	Fundamental RB 100 kHz;VB 300 kHz
924.188	49.7	H	87.3	-37.6	PK	110	1.5	RB 100 kHz;VB 300 kHz;Peak
1064.840	50.0	H	74.0	-24.0	PK	306	2.0	RB 1 MHz;VB 3 MHz;Peak
1064.840	30.0	H	54.0	-24.0	AVG	306	2.0	Note 2
1805.600	58.6	H	87.3	-28.7	PK	271	1.8	RB 100 kHz;VB 300 kHz;Peak
1886.510	54.0	H	87.3	-33.3	PK	139	2.5	RB 100 kHz;VB 300 kHz;Peak
1968.600	59.8	H	87.3	-27.5	PK	289	1.4	RB 100 kHz;VB 300 kHz;Peak
3925.250	50.5	H	74.0	-23.5	PK	45	2.0	RB 1 MHz;VB 3 MHz;Peak
3925.250	30.5	H	54.0	-23.5	AVG	45	2.0	Note 2
5897.380	56.7	H	87.3	-30.6	PK	268	1.4	RB 100 kHz;VB 300 kHz;Peak
7872.630	54.3	H	87.3	-33.0	PK	302	1.1	RB 100 kHz;VB 300 kHz;Peak

Note: The preliminary measurements were performed with the EUT positioned in three orientations (Upright, Side and Flat). The side orientation of the EUT has the worst case fundamental power and spurious emission results. The side orientation results were presented as final measurements.

Note 2: Duty cycle correction factor of -20 dB ($20 \cdot \log(0.68/10.00)$) was used to calculate average value from peak measurement per the rule part FCC 15.35(c) and RSS-Gen 6.10

Note 3: Pre-scan measurements were performed between 9 kHz and 30 MHz with the fixed measurement antenna height of 1 m. There were no significant emissions observed in this frequency range.

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

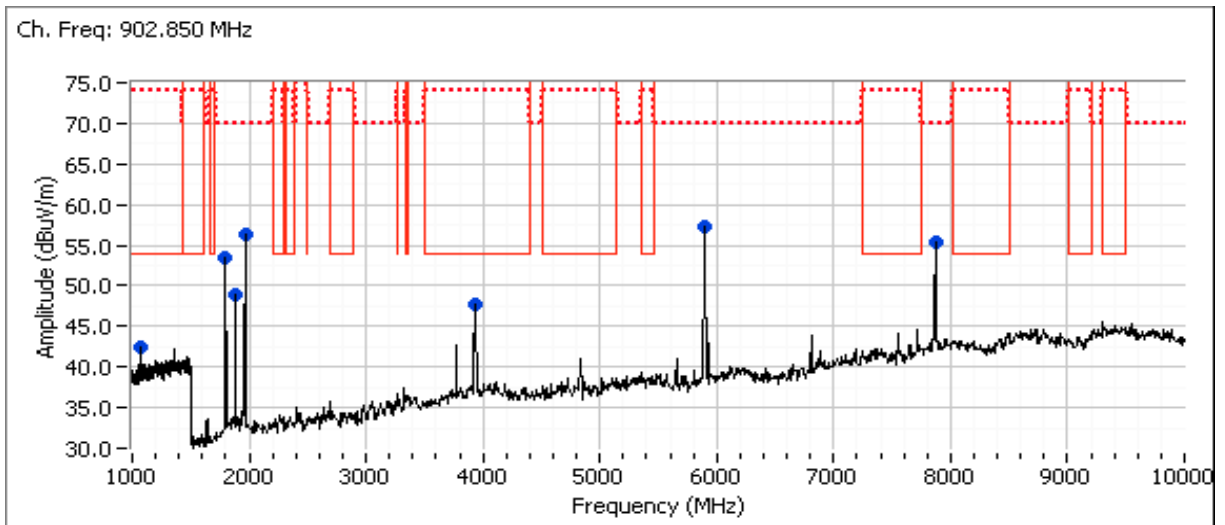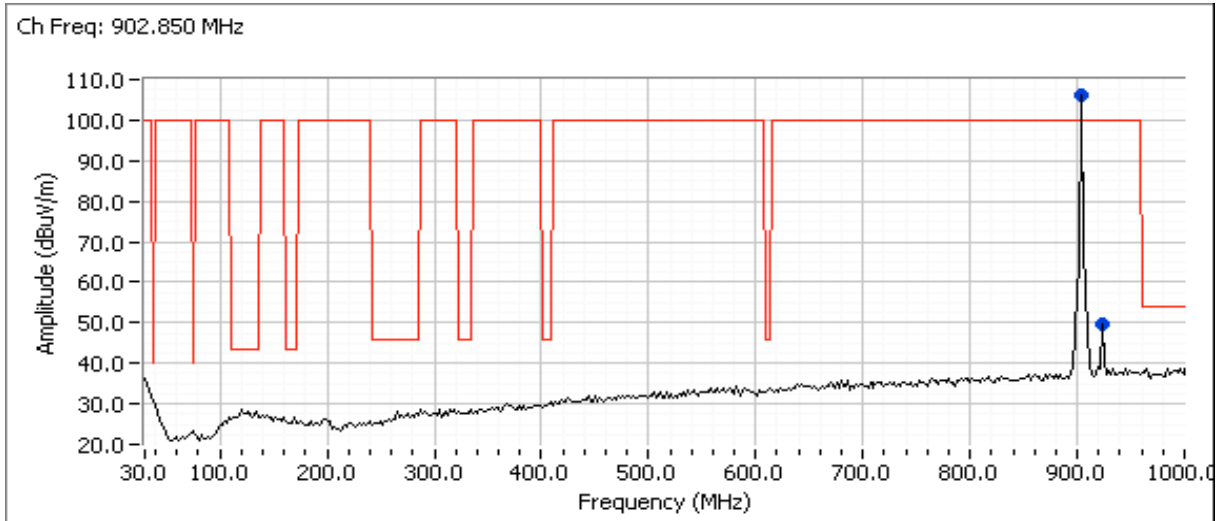



EMC Test Data

Client:	Plantronics Inc.	Job Number:	JD105563
Model:	Hermit (900 MHz Convertible Headset)	T-Log Number:	T105586
Contact:	Bill Jones	Project Manager:	Christine Krebill
Standard:	FCC 15.247 / RSS-247	Project Coordinator:	-
		Class:	N/A



Run #1b: Center Channel

Channel: 915.000 MHz Mode: -
Tx Chain: - Data Rate: -

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
895.030	49.4	H	87.6	-38.2	PK	84	3.0	RB 100 kHz;VB 300 kHz;Peak
915.000	107.6	H	-	-	PK	277	1.0	Fundamental RB 100 kHz;VB 300 kHz;Peak
935.852	44.8	H	87.6	-42.8	PK	297	1.5	RB 100 kHz;VB 300 kHz;Peak
1829.370	58.9	H	87.6	-28.7	PK	282	2.1	RB 100 kHz;VB 300 kHz;Peak
1897.950	45.3	H	87.6	-42.3	PK	224	1.2	RB 100 kHz;VB 300 kHz;Peak
1968.090	57.6	H	87.6	-30.0	PK	282	1.4	RB 100 kHz;VB 300 kHz;Peak
3797.710	49.4	H	74.0	-24.6	PK	30	1.0	RB 1 MHz;VB 3 MHz;Peak
3797.710	29.4	H	54.0	-24.6	AVG	30	1.0	Note 2
3936.010	53.3	H	74.0	-20.7	PK	299	1.0	RB 1 MHz;VB 3 MHz;Peak
3936.010	33.3	H	54.0	-20.7	AVG	299	1.0	Note 2
5894.640	45.5	H	87.6	-42.1	PK	335	1.3	RB 100 kHz;VB 300 kHz;Peak
7872.490	55.1	V	87.6	-32.5	PK	26	1.3	RB 100 kHz;VB 300 kHz;Peak

Note:	The preliminary measurements were performed with the EUT positioned in three orientations (Upright, Side and Flat). The side orientation of the EUT has the worst case fundamental power and spurious emission results. The side orientation results were presented as final measurements.
Note 2:	Duty cycle correction factor of -20 dB ($20 \cdot \log(0.68/10.00)$) was used to calculate average value from peak measurement per the rule part FCC 15.35(c) and RSS-Gen 6.10
Note 3:	Pre-scan measurements were performed between 9 kHz and 30 MHz with the fixed measurement antenna height of 1 m. There were no significant emissions observed in this frequency range.

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

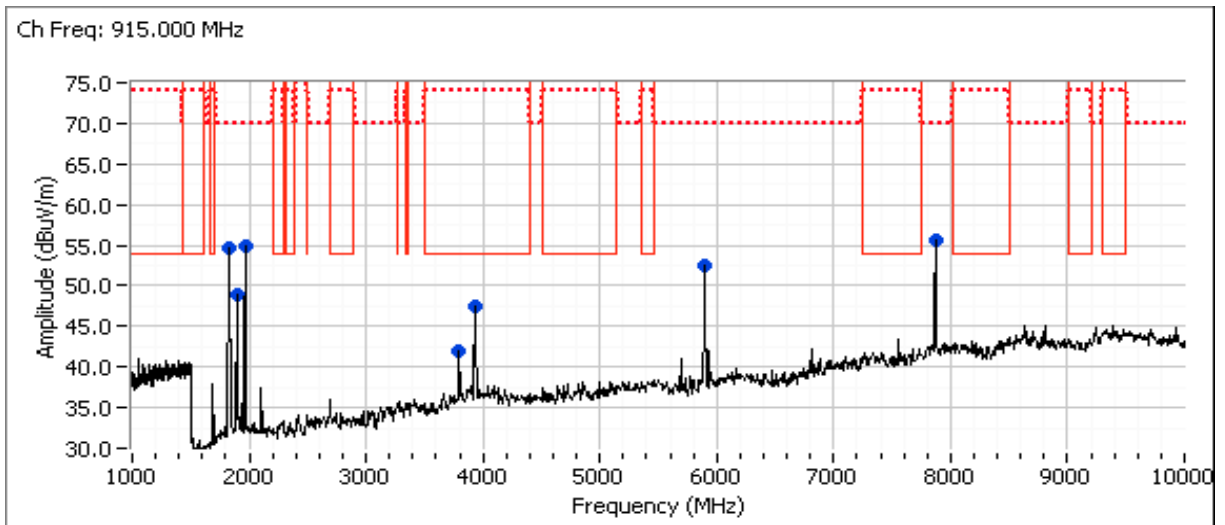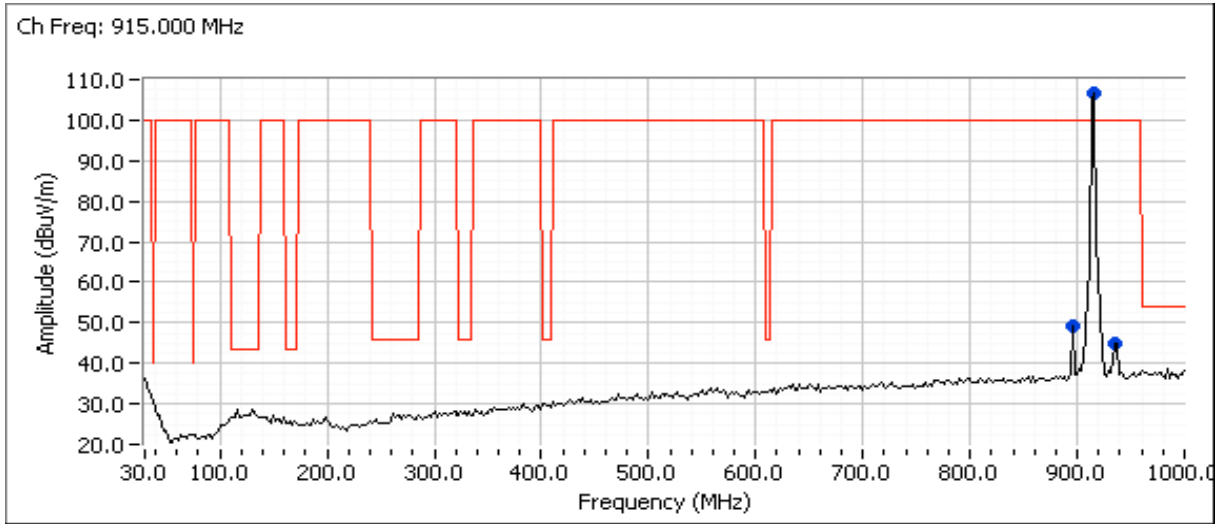



EMC Test Data

Client:	Plantronics Inc.	Job Number:	JD105563
Model:	Hermit (900 MHz Convertible Headset)	T-Log Number:	T105586
Contact:	Bill Jones	Project Manager:	Christine Krebill
Standard:	FCC 15.247 / RSS-247	Project Coordinator:	-
		Class:	N/A



Run #1c: High Channel

Channel: 927.125 MHz Mode: -
Tx Chain: - Data Rate: -


Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
906.693	48.2	H	87.8	-39.6	PK	64	1.5	RB 100 kHz;VB 300 kHz;Peak
927.125	107.8	H	-	-	PK	122	1.0	Fundamental RB 100 kHz;VB 300 kHz;Peak
962.687	38.3	H	74.0	-35.7	PK	70	1.0	Restricted band edge noise floor.
962.687	18.3	H	54.0	-35.7	PK	70	1.0	Restricted band edge noise floor.
1853.570	58.7	H	87.8	-29.1	PK	291	1.5	RB 100 kHz;VB 300 kHz;Peak
1911.120	50.7	H	87.8	-37.1	PK	122	1.0	RB 100 kHz;VB 300 kHz;Peak
1968.090	58.9	H	87.8	-28.9	PK	292	1.4	RB 100 kHz;VB 300 kHz;Peak
3822.870	48.8	V	74.0	-25.2	PK	74	1.8	RB 1 MHz;VB 3 MHz;Peak
3822.870	28.8	V	54.0	-25.2	AVG	74	1.8	Note 2
3938.430	52.6	H	74.0	-21.4	PK	138	1.0	RB 1 MHz;VB 3 MHz;Peak
3938.430	32.6	H	54.0	-21.4	AVG	138	1.0	Note 2
5904.380	54.4	V	87.8	-33.4	PK	257	1.7	RB 100 kHz;VB 300 kHz;Peak
7872.450	56.6	H	87.8	-31.2	PK	316	1.1	RB 100 kHz;VB 300 kHz;Peak

Note:	The preliminary measurements were performed with the EUT positioned in three orientations (Upright, Side and Flat). The side orientation of the EUT has the worst case fundamental power and spurious emission results. The side orientation results were presented as final measurements.
Note 2:	Duty cycle correction factor of -20 dB ($20 \cdot \log(0.68/10.00)$) was used to calculate average value from peak measurement per the rule part FCC 15.35(c) and RSS-Gen 6.10
Note 3:	Pre-scan measurements were performed between 9 kHz and 30 MHz with the fixed measurement antenna height of 1 m. There were no significant emissions observed in this frequency range.

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

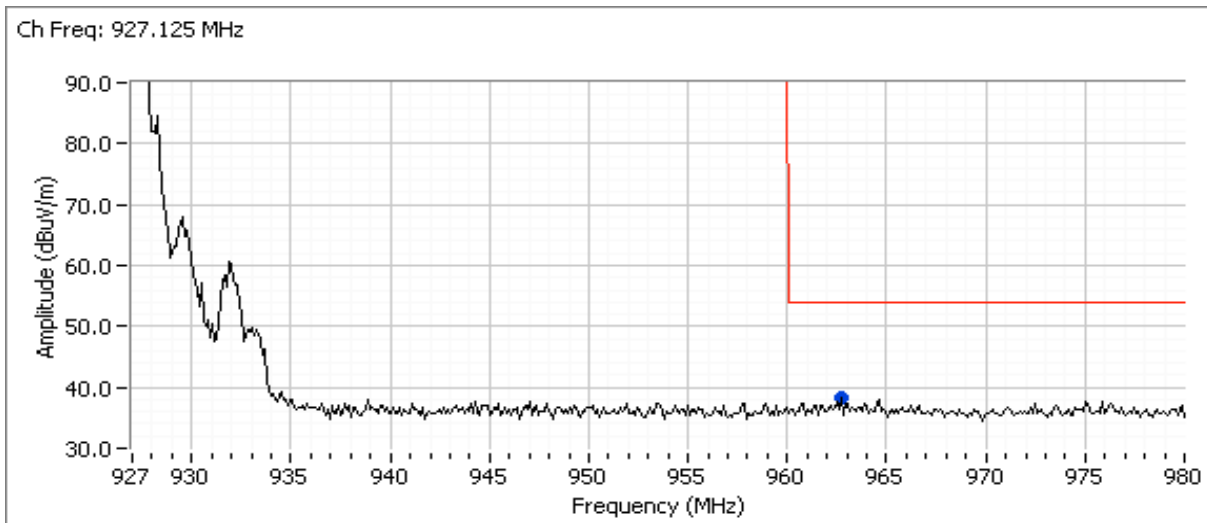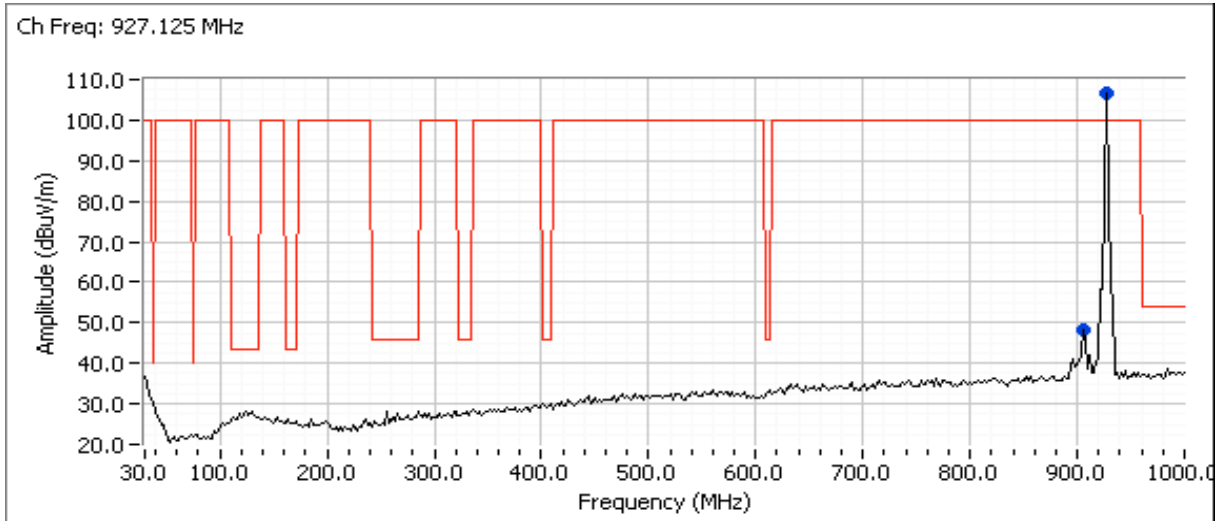

Client: Plantronics Inc.	Job Number: JD105563
Model: Hermit (900 MHz Convertible Headset)	T-Log Number: T105586
Contact: Bill Jones	Project Manager: Christine Krebill
Standard: FCC 15.247 / RSS-247	Project Coordinator: -
	Class: N/A

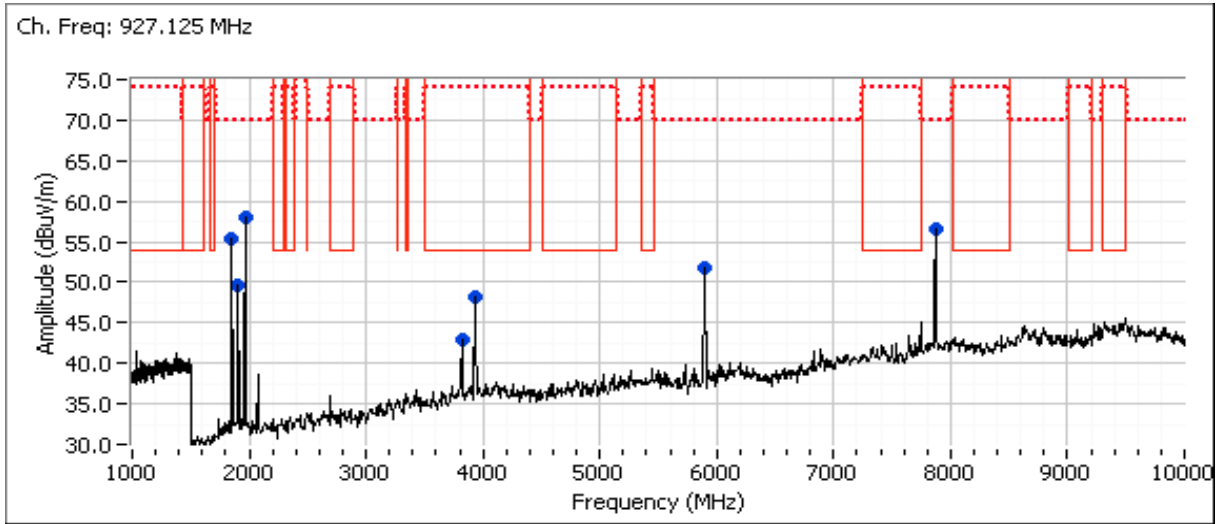

End of Report

This page is intentionally blank and marks the last page of this test report.