

# **Intentional Radiator Test Report**

**Test Standards:**  
**FCC Part 15 (Subpart C – Intentional Radiators)**  
**Industry Canada RSS-210**

**Prepared For:**

**Plantronics, Inc.**  
**345 Encinal Street**  
**Santa Cruz, CA 95060**

**Equipment Under Test:**  
**Bluetooth Dongle**

**Model:**  
**BLUEMAX**  
**M/N: BUA-100**

**Prepared by:**



**44366 S. Grimmer Blvd.**  
**Fremont, CA 94538**  
**USA**

## TABLE OF CONTENTS

|                                      |    |
|--------------------------------------|----|
| 1. CUSTOMER INFORMATION              | 3  |
| 2. EUT AND ACCESSORY INFORMATION     | 4  |
| 3. SUMMARY OF TEST RESULTS           | 5  |
| 4. STANDARDS AND MEASUREMENT METHODS | 6  |
| 5. TEST SETUPS                       | 7  |
| 6. TEST RESULTS                      | 9  |
| 7. TEST EQUIPMENT                    | 47 |

## 1.0 CUSTOMER INFORMATION

|                                |                                                                                                                                                     |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Laboratory:</b>        | EMCE Engineering<br>44366 S. Grimmer Blvd.<br>Fremont, CA 94538<br>USA<br><br>Tel: 510-490-4307<br>Fax: 510-490-3441<br>bob@universalcompliance.com |
| <b>FCC registration number</b> | 0007198120                                                                                                                                          |
| <b>Customer:</b>               | Plantronics, Inc.<br>345 Encinal Street<br>Santa Cruz, CA<br><br>Tel: 831-426-5858<br>Fax: 831-426-6098                                             |
| <b>Contact Person:</b>         | Myhassan Bakrim                                                                                                                                     |
| <b>Receipt of EUT:</b>         | 3/5/06                                                                                                                                              |
| <b>Test plan reference:</b>    | FCC Part 2, 15 (15.247) / IC RSS-210                                                                                                                |
| <b>FCC ID:</b>                 | AL8BUA-100                                                                                                                                          |
| <b>IC#:</b>                    | 457A-BUA-100                                                                                                                                        |
| <b>Date of testing:</b>        | 3/5/06 – 3/27/06                                                                                                                                    |
| <b>Date of Report:</b>         | 3/27/06                                                                                                                                             |

***The tests listed in this report have been completed to demonstrate compliance to the CFR 47 Section 15.247, as well as Industry Canada Radio Standard RSS-210, Issue 5.***

Contents approved:

|                                                                                     |
|-------------------------------------------------------------------------------------|
|  |
| Name: Bob Cole<br>Title: President                                                  |

## 2.0 EUT AND ACCESSORY INFORMATION

### EUT description

The EUT is a Plantronics, Inc. **BLUEMAX Bluetooth Dongle, M/N: BUA-100**

### EUT and accessories

The table below lists all EUTs and accessories used in the tests. Later in this report, only numbers in the last column are used to refer to the devices in each test.

### Software

The computers were equipped with test software provided by the customer. The software was used to control the EUT in the tests.

|                    | Name               | Type                         | S/N      | Number |
|--------------------|--------------------|------------------------------|----------|--------|
| <b>EUT</b>         | <b>BLUEMAX</b>     | <b>BUA-100 USB Dongle</b>    | N/A      | E0001  |
| <b>Accessories</b> | Laptop Computer    | Compaq Presario<br>M/N: 1694 | 3882A744 | S0001  |
| <b>Software</b>    | CSR Bluesuite 1.20 | Bluetest, BlueChat           | N/A      | N/A    |

### EUT Information

| Product Specification                      | Description                                        |
|--------------------------------------------|----------------------------------------------------|
| Model Name                                 | BLUEMAX                                            |
| Model Number                               | BUA-100                                            |
| Type of Modulation                         | Frequency Hopping Spread Spectrum (FHSS)           |
| Number of Hopping Channels                 | 79                                                 |
| Operating Frequency Range                  | 2480 – 2483.5 MHz                                  |
| Type of Equipment                          | Combined, Battery Powered                          |
| Extreme Operating Temperature Range        | -20 C – 55 C                                       |
| Extreme Operating Voltage Range            | Fully Charged Battery                              |
| Type of Antenna                            | Integral                                           |
| Antenna Gain (dBi)                         | 0.0 dB [nominal]                                   |
| Transmitter Method of Frequency Generation | Synthesized                                        |
| Transmitter Aggregate Data Rate            | >250kbps                                           |
| Transmitter Duty Type                      | Intermittant                                       |
| Transmitter Duty Cycle                     | Tx ON: .326 ms, Tx OFF: .924 ms: Duty Cycle = .261 |
| Continuous Operation for Testing Purposes? | Yes                                                |
| Transmit Emissions Designator              | 1M00 Q1D                                           |

### 3.0 SUMMARY OF TEST RESULTS

| Section in CFR 47 | Section in RSS-210 | Description                                  | Results              |
|-------------------|--------------------|----------------------------------------------|----------------------|
| 15.245 (b)(1)     | 6.2.2(o) (a2)      | Peak output power (Radiated Emissions)       | <b><i>PASSED</i></b> |
| 15.247 (a)(1)     | 6.2.2(o) (a3)      | CF Separation                                | <b><i>PASSED</i></b> |
| 15.247 (a)(1)(ii) | 6.2.2(o) (a3)      | Number of Hopping Frequencies                | <b><i>PASSED</i></b> |
| 15.247 (a)(1)(ii) | 6.2.2(o) (a3)      | Dwell Time                                   | <b><i>PASSED</i></b> |
| 15.247 (a)(1)(ii) | 6.2.2(o) (a3)      | 20 dB Bandwidth                              | <b><i>PASSED</i></b> |
| 15.247, c         | 6.2.2(o) (e1)      | Band-edge compliance of RF Radiated emission | <b><i>PASSED</i></b> |
| 15.247, c         | 6.2.2(o) (e1)      | Restricted Band (Radiated Emissions)         | <b><i>PASSED</i></b> |
| 15.247(d)         | 6.2.2(o) (e1)      | Spurious radiated emissions                  | <b><i>PASSED</i></b> |
| 15.247(d)         | 6.2.2(o) (e1)      | Spurious Antenna Conducted emissions         | <b><i>PASSED</i></b> |

PASS            The EUT passed that particular test.  
FAIL            The EUT failed that particular test.

## **4.0 STANDARDS AND MEASUREMENT METHODS**

The tests were performed in guidance of CFR 47 section 15.247, FCC Public Notice DA 00-705 (March 30, 2000), FCC Report & Order 97-114 (April 10, 1997), and ANSI C63.4 (2003). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method". For the test equipment, see device list in the end of this test.

### **4.1 Selection of operation mode for tests**

Before tests, several operation modes, and modulation patterns were tried. The worst case was selected for each test and those results reported.

## 5.0 TEST SETUPS

To fulfill all requirements for the radio parameter testing, total of two different test setups were used. One EUT was used, unmodified for radiated tests.

SMA connector added in place of internal antenna for Antenna Conducted measurements.


### Setup A (Antenna Conducted measurements)

#### Operational description

#### ANTENNA CONDUCTED EMISSIONS MEASUREMENTS

The EUT was connected to the Laptop Computer through the serial port (COM1), the antenna bypassed and the SMA Cable connected to the Spectrum Analyzer. This setup was used for the **PEAK POWER OUTPUT, CF SEPARATION, NUMBER OF HOPPING FREQUENCIES, 20 dB BW, BAND-EDGE, and RESTRICTED BAND** measurements.

#### Block Diagram

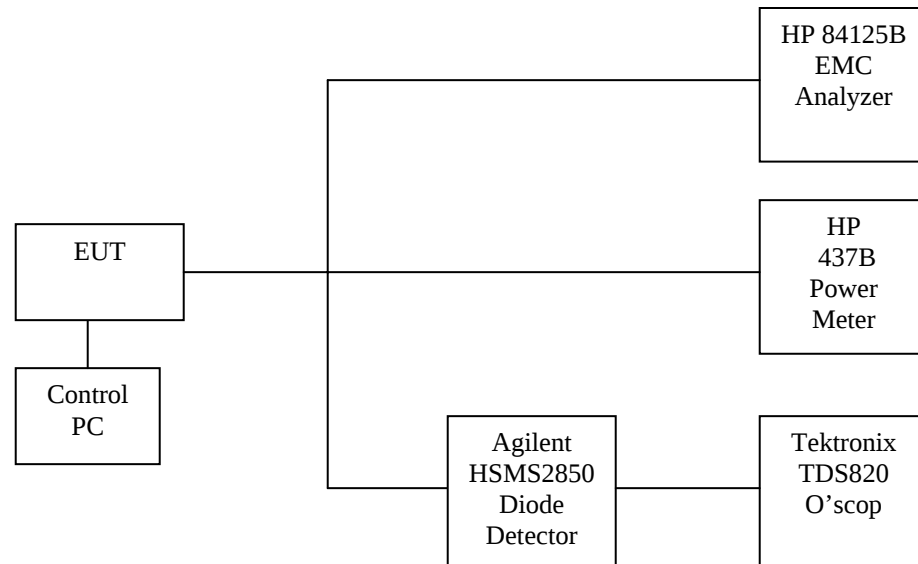

The solid lines are coaxial cables and the dashed lines are either EUT insertion to the test board or control cables between test setup devices. The measurement results were adjusted with the attenuation of the coaxial cable.

## Setup B (Radiated measurements)

### Operational description

#### **RADIATED EMISSIONS MEASUREMENTS**


This setup was used in radiated emissions measurements with hopping enabled.

The EUT was tested in 3 orthogonal orientations.

Worst case data is presented.

THIS SETUP USED FOR ***RADIATED SPURIOUS EMISSIONS***

### ***Block diagram***



Note: The high –pass filter is used for the Radiated Spurious emissions above 2.4835 GHz. A pass-thru connector is used for Radiated Spurious emissions measurements from 30 MHz – 2.4 GHz.

The solid lines are coaxial cables and the dashed lines are either EUT insertion to the test board or control cables between test setup devices.

## 6.0 TEST RESULTS

The measurement results were adjusted for the attenuation of the cable between the EUT connector and receiver.

### PEAK OUTPUT POWER

**Peak Output Power [CFR 47, 15.247(b)(1) and RSS-210 6.2.2(o)]**

|                                     |                                  |
|-------------------------------------|----------------------------------|
| <b>EUT</b>                          | <b>BLUEMAX</b>                   |
| <b>Test setup</b>                   | A (conducted – hopping DISABLED) |
| <b>Temp, Humidity, Air Pressure</b> | 64° F, 30.45                     |
| <b>Date of Measurement</b>          | 3/12/06                          |
| <b>Measured by</b>                  | Bob Cole                         |
| <b>Result</b>                       | PASSED                           |


**Limits and results**

### PEAK OUTPUT POWER


| <b>EUT Channel</b> | <b>Limit (dBm)</b> | <b>Test results (dBm)</b> |
|--------------------|--------------------|---------------------------|
| 2                  | 30.0               | -2.15                     |
| 40                 | 30.0               | 2.91                      |
| 80                 | 30.0               | 2.57                      |

## Screen shots


### Plot 1: Peak output power 2402 MHz

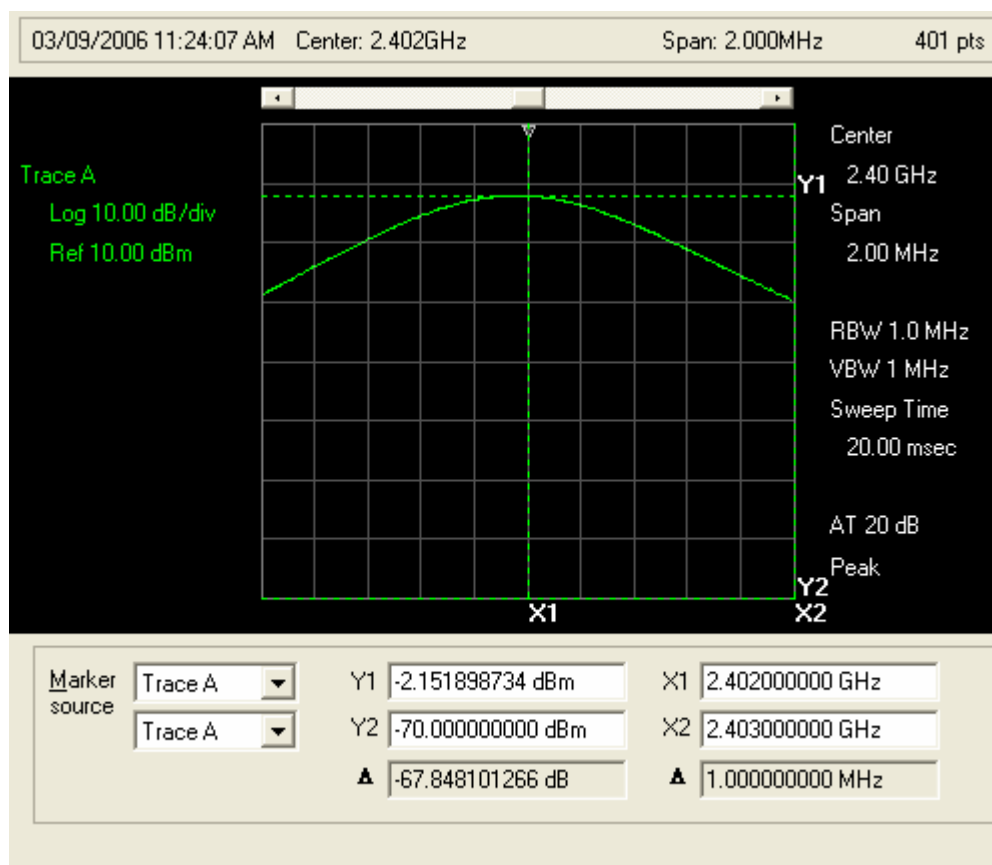

## Plot 2: Peak output power 2441 MHz

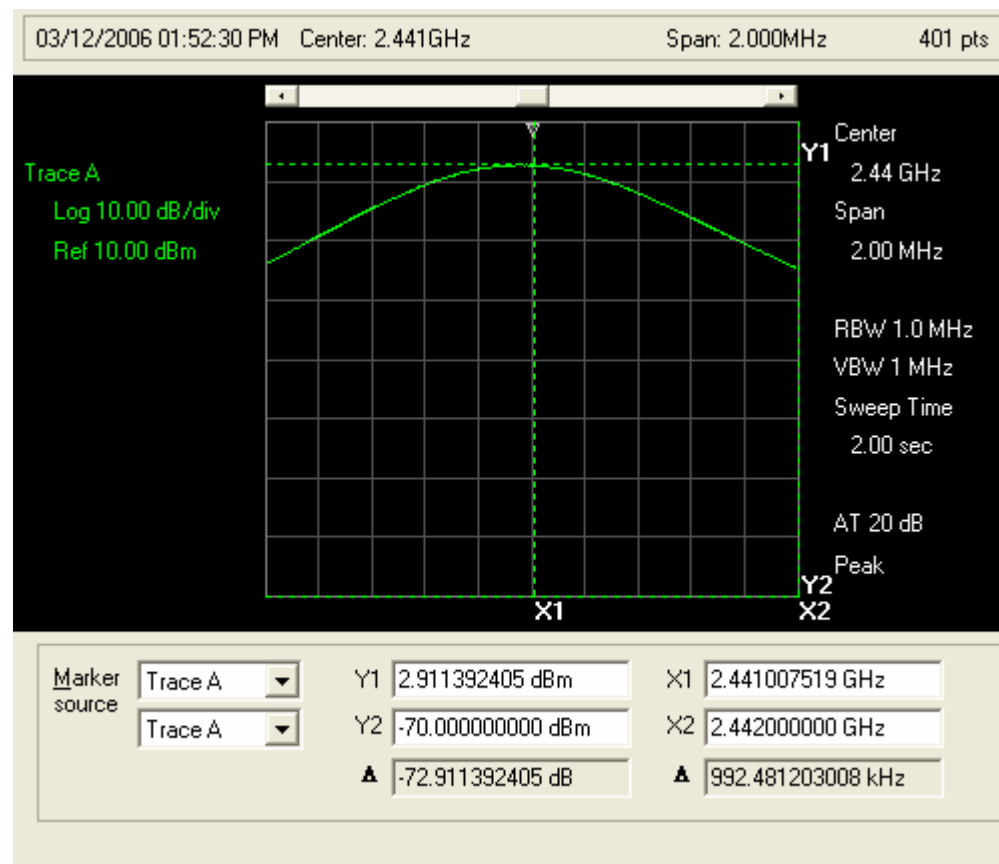

### Plot 3: Peak output power 2480 MHz

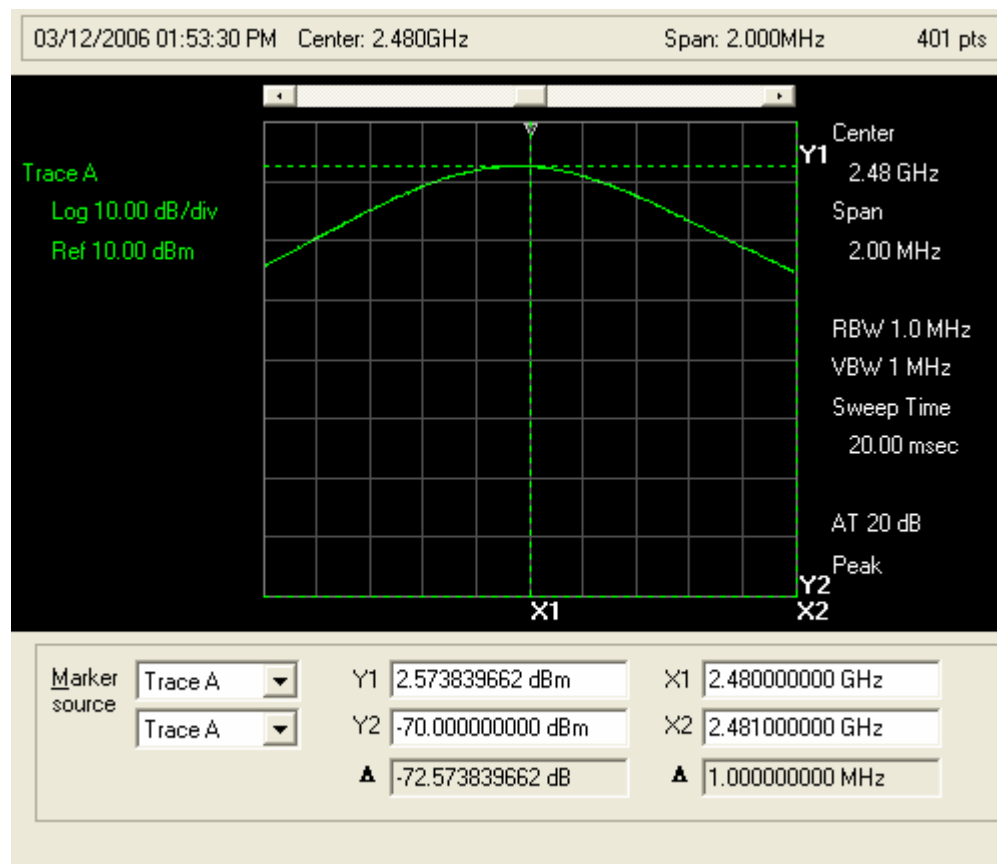

## CENTER FREQUENCY SEPARATION

CF Separation [CFR 47, 15.247 (a)(1) and RSS-210 6.2.2(o)]

|                              |                                 |
|------------------------------|---------------------------------|
| EUT                          | BLUEMAX                         |
| Test setup                   | A (conducted – hopping enabled) |
| Temp, Humidity, Air Pressure | 64° F, 30.45                    |
| Date of Measurement          | 3/12/06                         |
| Measured by                  | Bob Cole                        |
| Result                       | PASSED                          |


### Limits and results

#### CENTER FREQUENCY SEPARATION

| EUT Channel | Limit (MHz) | Test results (MHz) |
|-------------|-------------|--------------------|
| 41-42       | $\leq 1.0$  | 1.000              |

Screen Shot:

Plot 4: CF separation

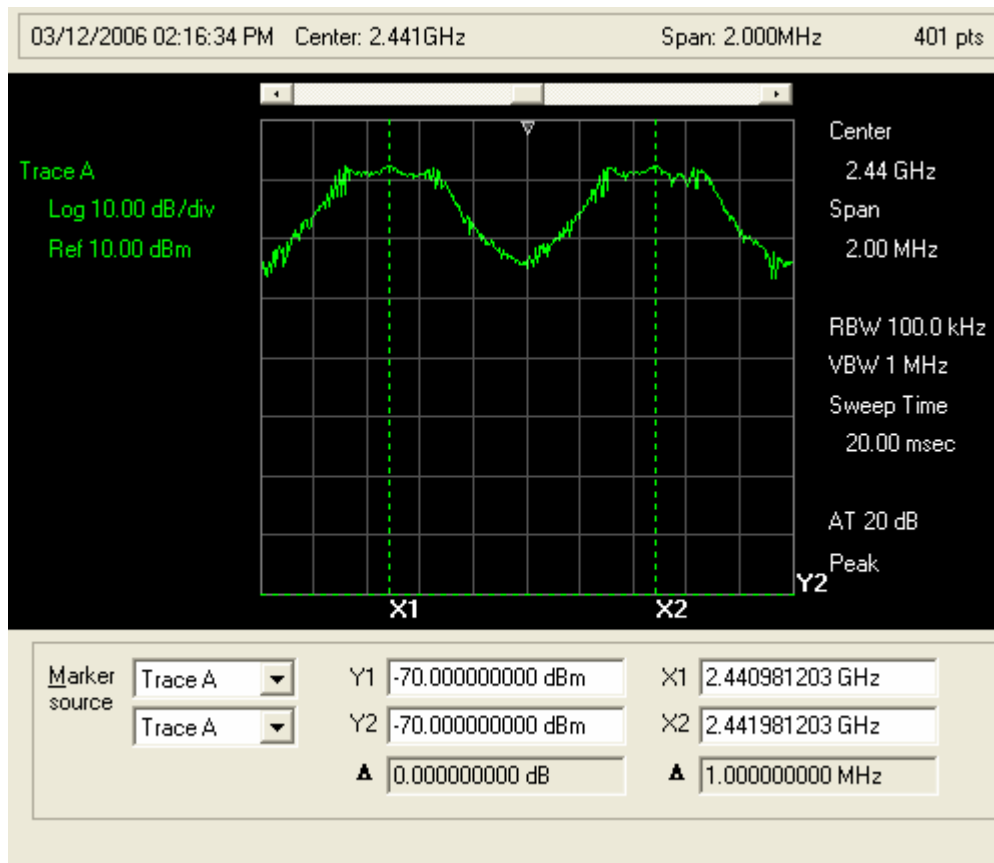

## NUMBER OF HOPPING FREQUENCIES

**Number of Hopping Frequencies [CFR 47, 15.247 (a)(1)(ii) and RSS-210 6.2.2(o)]**

|                                     |                                 |
|-------------------------------------|---------------------------------|
| <b>EUT</b>                          | <b>BLUEMAX</b>                  |
| <b>Test setup</b>                   | A (conducted – hopping enabled) |
| <b>Temp, Humidity, Air Pressure</b> | 64° F, 30.45                    |
| <b>Date of Measurement</b>          | 3/12/06                         |
| <b>Measured by</b>                  | Bob Cole                        |
| <b>Result</b>                       | PASSED                          |


### Limits and results

#### NUMBER OF HOPPING FREQUENCIES

| <b>EUT Channel</b> | <b>Limit (MHz)</b> | <b>Test results (MHz)</b> |
|--------------------|--------------------|---------------------------|
| 2-80               | <= 75              | 79                        |

### Screen Shot:

**Plot 5: Number of Hopping Frequencies**

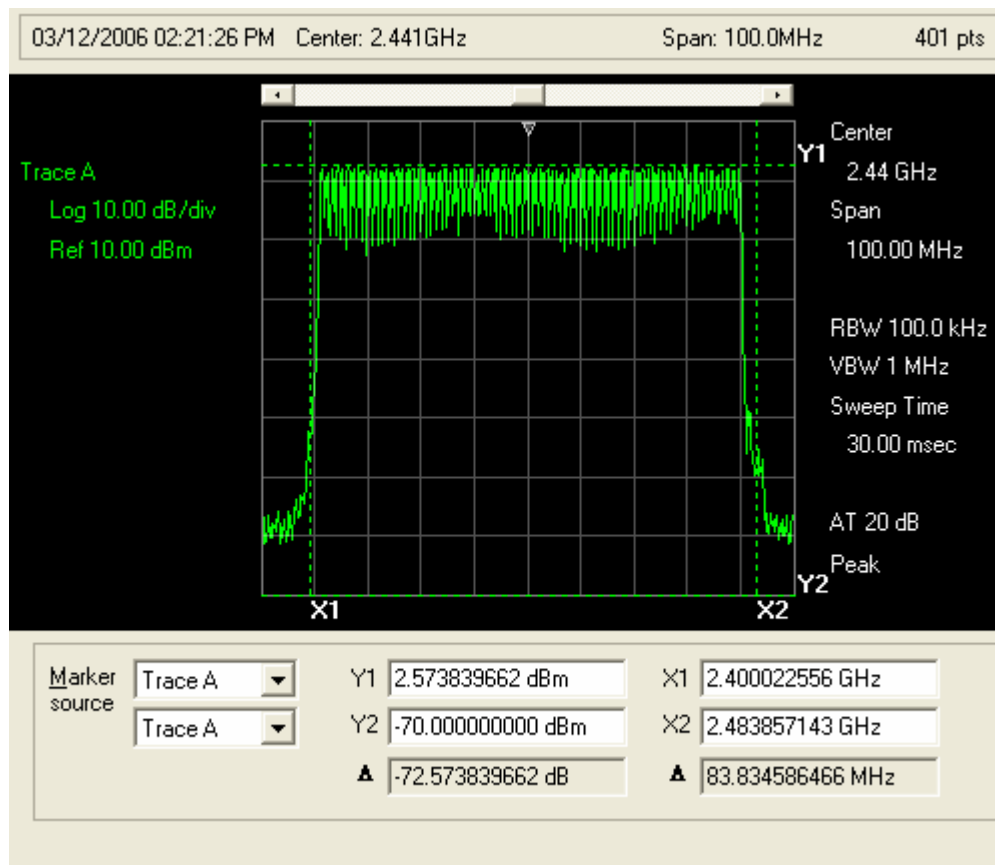

## DWELL TIME

### Dwell Time

|                                     |                                            |
|-------------------------------------|--------------------------------------------|
| <b>EUT</b>                          | <b>BLUEMAX</b>                             |
| <b>Test setup</b>                   | N/A                                        |
| <b>Temp, Humidity, Air Pressure</b> | N/A                                        |
| <b>Date of Measurement</b>          | N/A                                        |
| <b>Measured by</b>                  | Bob Cole                                   |
| <b>Result</b>                       | PASSED – see Bluetooth Specification below |

### Limits and results

#### DWELL TIME

| <b>EUT Channel</b> | <b>Limit</b>                      | <b>Test results</b>                           |
|--------------------|-----------------------------------|-----------------------------------------------|
| 2                  | 400 ms per 30 second of operation | PASSED<br><i>See description that follows</i> |

There are five hopping sequences (section 11, Bluetooth Spec. 1.1):

- 1) A **page hopping sequence** with 32 unique wake-up frequencies distributed equally over the 79 MHz, with a period length of 32; The basic slot time can be 312.5 uS or 625 uS. Min. hop repeat rate =  $32 \times 312.5\text{mS} = 10\text{mS}$ .
- 2) A **page response sequence (page scan)** covering 32 unique response frequencies that all are in a one-to-one correspondence to the current page hopping sequence. The master and slave use different rules to obtain the same sequence. The basic slot time can be 312.5 uS or 625 uS and the period is 1.28s.
- 3) An **inquiry sequence** with 32 unique wake-up frequencies distributed equally over the 79 MHz, with a period length of 32; The basic slot time can be 312.5 uS or 625 uS. Min. hop repeat rate =  $32 \times 312.5\text{mS} = 10\text{mS}$ .
- 4) An **inquiry response sequence (inquiry scan)** covering 32 unique response frequencies that all are in a one-to-one correspondence to the current inquiry hopping sequence. The basic slot time can be 312.5 uS or 625 uS and the period is 1.28s.
- 5) A **channel hopping sequence** which has a very long period length, which does not show repetitive patterns over a short time interval, but which distributes the hop frequencies equally over the 79 MHz during a short time interval; The basic slot time is 625 uS.

Worst case dwell times (largest dwell value) would be found with #5, the Channel Hopping (or data) sequence. The other hopping sequences may short shorter time sequences; however they are not repeated as often and hence have a lower overall dwell or duty cycle.

In normal transactions one may see occasional short periods between a chosen frequency due to inquiry and page scans possibly be interleaved during data transactions. It's my understanding that this would not create a dwell cycle result worse than the Channel hopping or data sequence.

### Channel Hopping Sequence (Data sequence) Dwell Calculation

Cycle time for complete hopping sequence of a 79 hop cycle (data transmission mode) =

$$(1.1) \text{ Time slot period} * 79 \text{ slots} = 625\mu\text{S} * 79 = 49.375 \text{ mS}$$

See page below from Bluetooth spec. Rev 1.1, section 2, for a depiction of the hopping sequence versus packet size. Figure 2.1 shows a DH1 cycle. Figure 2.2 shows a DH1, DH3 and DH5 sequence (resp.).

Every time slot has a frequency assignment, and the frequency used for a packet remains the same as the slot it started in, if the packet is longer than one time slot.

For a DH1 packet this does not have an impact. The channel selector steps thru the entire list of 79 pseudo-random channels and then start over from the beginning.

For a DH5 (5 Slot packet), the starting frequency will be used for all 5 time slots ( $f(k)$  in this example), and 4 following frequencies will not be used during that hopping cycle. Therefore instead of stepping sequential thru the 79 frequency channel list, only every 5<sup>th</sup> channel is used. Each time the 79 frequency channel list is started, is it a new randomized list of 79 channels. The probability that it will use the same frequency channel in the next list is 1/5.

Therefore even though the DH5 is at one frequency for 5 times longer than a DH1 packet, it repeats itself 1/5 as often, with the effective dwell time (averaged over a long period over a long period of time – for instance the 30 sec FCC dwell test) being the same.

For the “duty cycle correction factor”, my “read” of the FCC doc says that one should take the “worst” 100mS period found, in contrast to the average 30 sec dwell time just mentioned. As a result the DH1 and DH5 numbers for the 100 mS dwell case will be different. For a worst case DH5 packet sequence, the same frequency channel could appear in two successive 79 channel sequences.

**DH1 calculation: DH1 uses 1 time slot of 0.625 mS per hopping cycle.**

Dwell time per 100mS – since one 79 hop sequence is approx 50mS, there will be approx. two hop sequences in 100 mS (more accurately  $100/49.375$ ).

$$(1.2) \text{ DH1 dwell time} = 0.625 \text{ mS} * (100\text{ms}/49.375\text{mS}) = 1.26 \text{ mS (per 100 mS)}$$

**DH5 calculation: DH5 uses 5 time slots of 0.625 mS per hopping cycle.**

Dwell time per 100mS – since one 79 hop sequence is approx 50mS and there could be two appearances of a frequency channel in 100 mS (more accurately  $100\text{mms}/49.375\text{ms}$ ).

$$(1.3) \text{ DH5 dwell time} = 5 * 0.625 \text{ mS} * (100\text{ms}/49.375\text{mS}) = 6.3 \text{ mS (per 100 mS)}$$

**Using the FCC duty cycle correction factor:**

$$(1.4) \text{ DH1 Dwell correction} = 20 \log (\text{DH1 dwell time}/100\text{mS}) = 20 \log (0.0126) = -38 \text{ dB}$$

$$(1.5) \text{ DH5 Dwell correction} = 20 \log (\text{DH5 dwell time}/100\text{mS}) = 20 \log (0.0633) = -24 \text{ dB}$$

Therefore the worst case duty cycle adjustment condition will be for the DH5 packet.

The calculation shows us that we can subtract 24 dB from our 2<sup>nd</sup> harmonic measurement to compensate for this duty cycle adjustment.

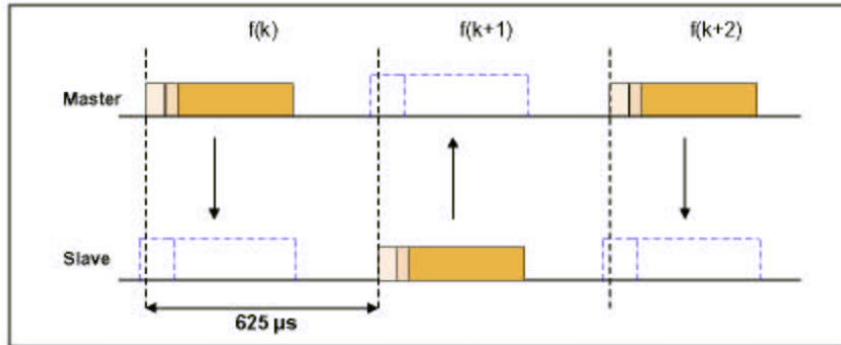


Figure 2.1: TDD and timing

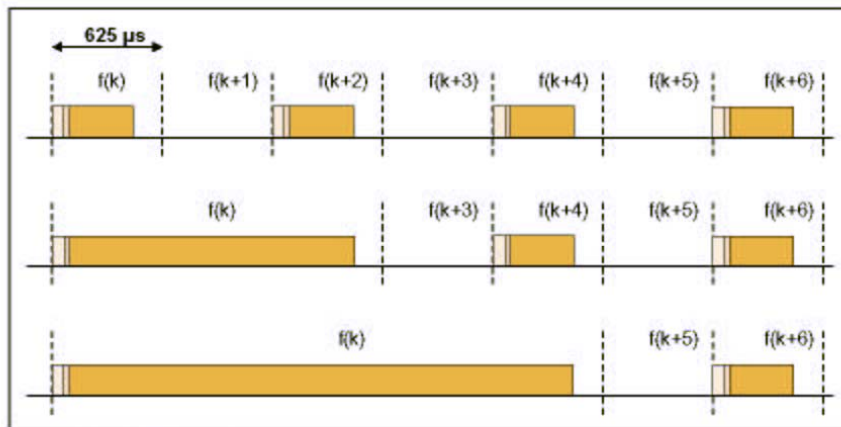


Figure 2.2: Multi-slot packets

## 20 dB Bandwidth

20 dB Bandwidth [CFR 47 15.247 (a)(1)(ii) and RSS-210 6.2.2(o)]

|                              |                                 |
|------------------------------|---------------------------------|
| EUT                          | BLUEMAX                         |
| Test setup                   | A (conducted – hopping ENABLED) |
| Temp, Humidity, Air Pressure | 64° F, 30.45                    |
| Date of Measurement          | 3/12/06                         |
| Measured by                  | Bob Cole                        |
| Result                       | PASSED                          |


### Limits and Results

#### 20 dB BANDWIDTH


| EUT Channel | Limit (MHz) | Test results (MHz) |
|-------------|-------------|--------------------|
| 2           | $\leq 1.0$  | 0.872              |
| 40          | $\leq 1.0$  | 0.879              |
| 80          | $\leq 1.0$  | 0.954              |

### Screen Shots


Plot 6: 20 dB BW 2402 MHz

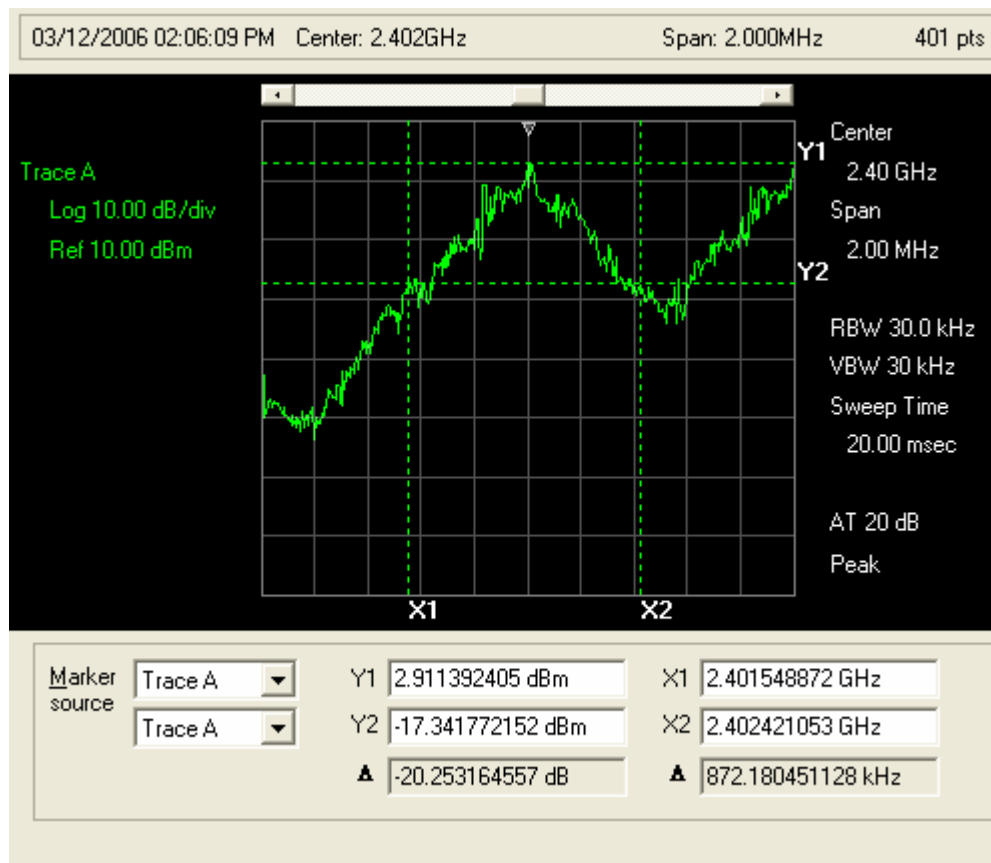

### Plot 7: 20 dB BW 2441 MHz

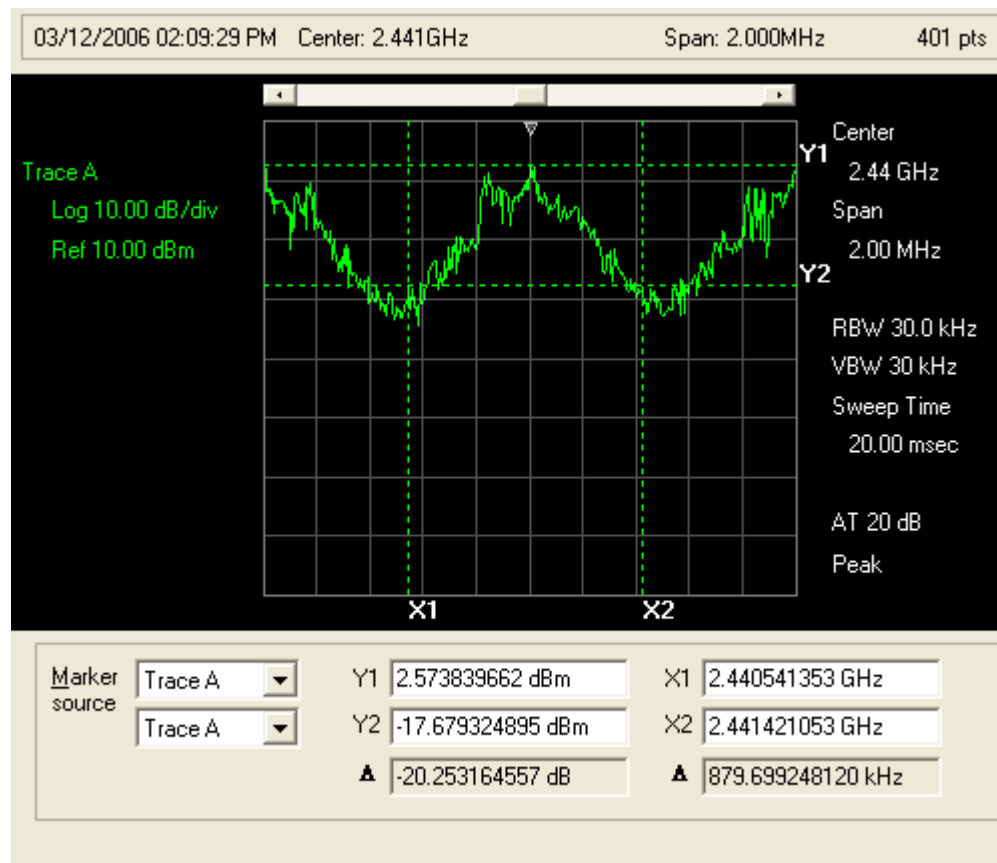

**Plot 8: 20 dB BW 2480 MHz**

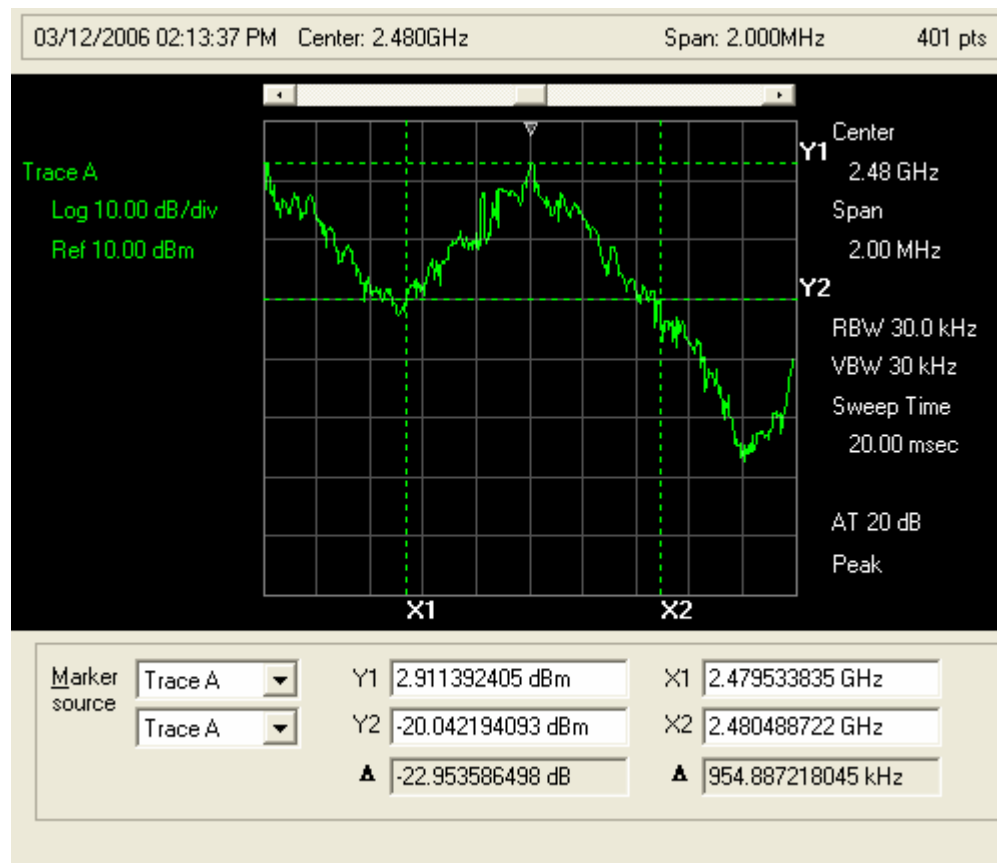

## **BAND-EDGE COMPLIANCE**

**Band-edge compliance of RF Radiated emissions [CFR 47, 15.247c(1) and RSS-210 6.2.2(o)]**

|                                     |                                            |
|-------------------------------------|--------------------------------------------|
| <b>EUT</b>                          | <b>BLUEMAX</b>                             |
| <b>Test setup</b>                   | A (conducted – hopping enabled & Disabled) |
| <b>Temp, Humidity, Air Pressure</b> | 64° F, 30.45                               |
| <b>Date of Measurement</b>          | 3/12/06                                    |
| <b>Measured by</b>                  | Bob Cole                                   |
| <b>Result</b>                       | PASSED                                     |

### **EUT operation mode**

|                           |                            |
|---------------------------|----------------------------|
| <b>EUT operation mode</b> | Hopping Enabled / Disabled |
| <b>EUT channel</b>        | 2, 80                      |
| <b>EUT TX power level</b> | Maximum                    |


### **Limits and results**

#### **BAND-EDGE COMPLIANCE**


| <b>Channel</b> | <b>Limit (dBuV)</b> | <b>Results (dBuV)</b> |
|----------------|---------------------|-----------------------|
| 2              | -6.0                | -54.13                |
|                |                     |                       |
| 80             | -6.0                | -53.12                |

Screen shots:


**Plot 9: Band-edge Compliance, Lower Band-edge (Hopping Disabled)**

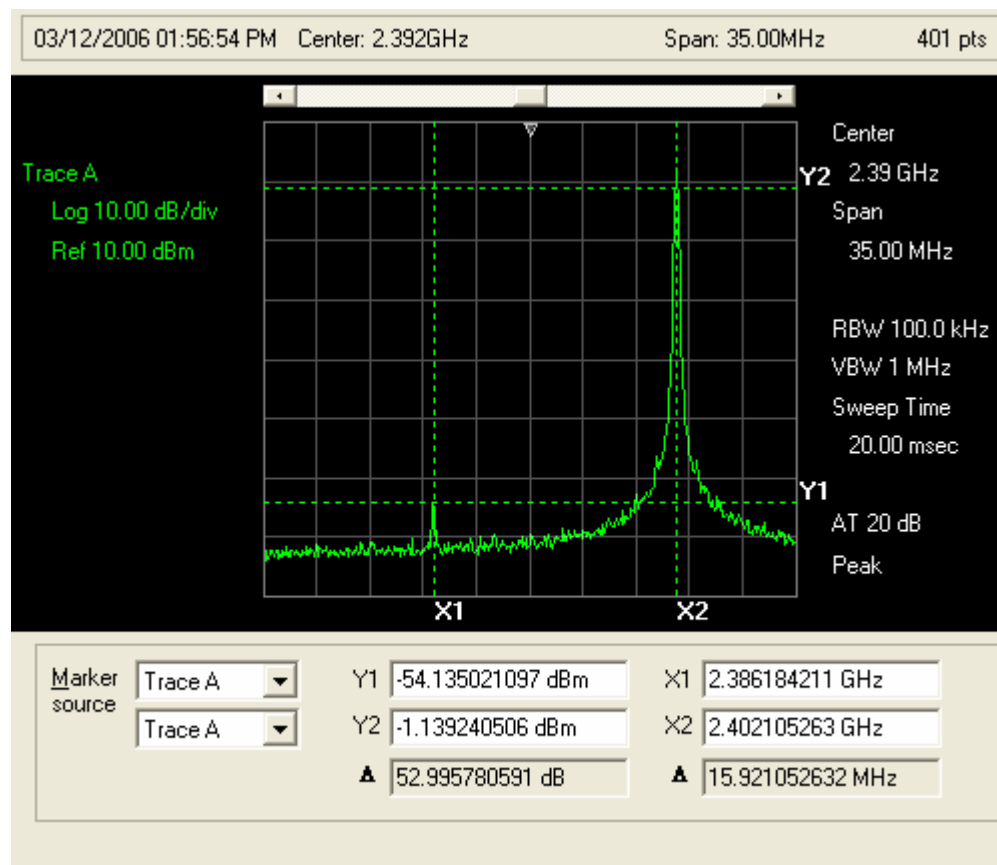


**Plot 10: Band-edge Compliance, Lower Band-edge (Hopping Enabled)**

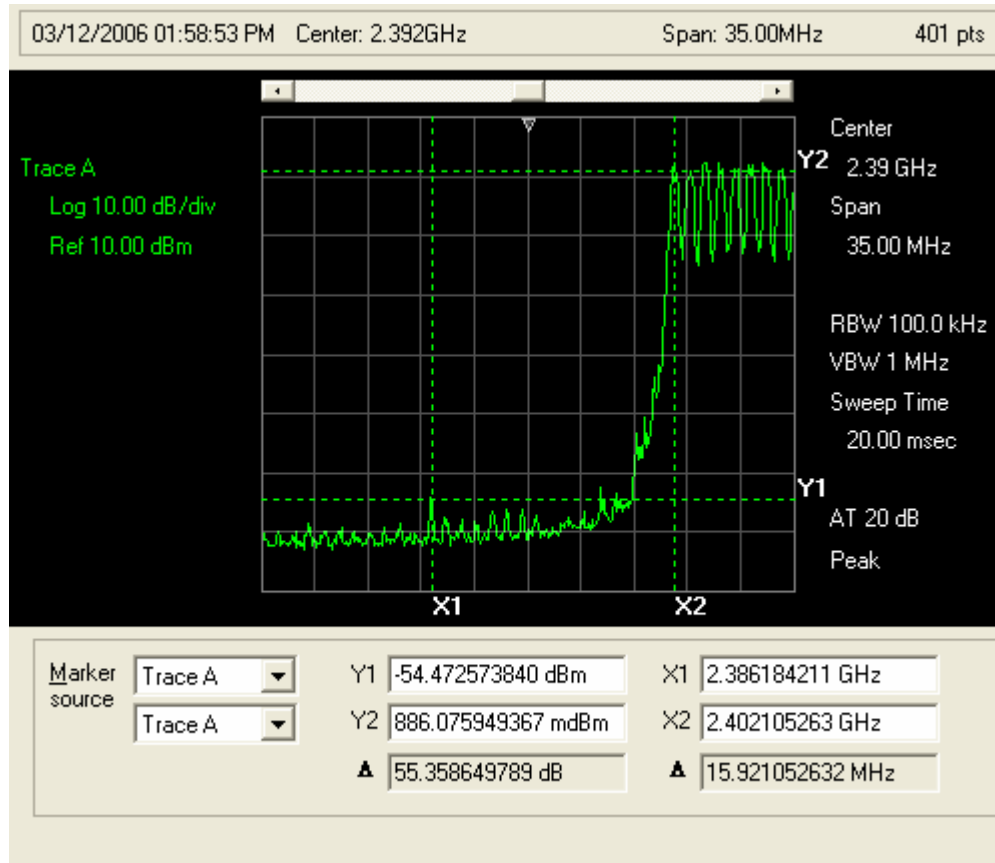

### Plot 11: Band-edge compliance, Upper Band-edge (Hopping Disabled)

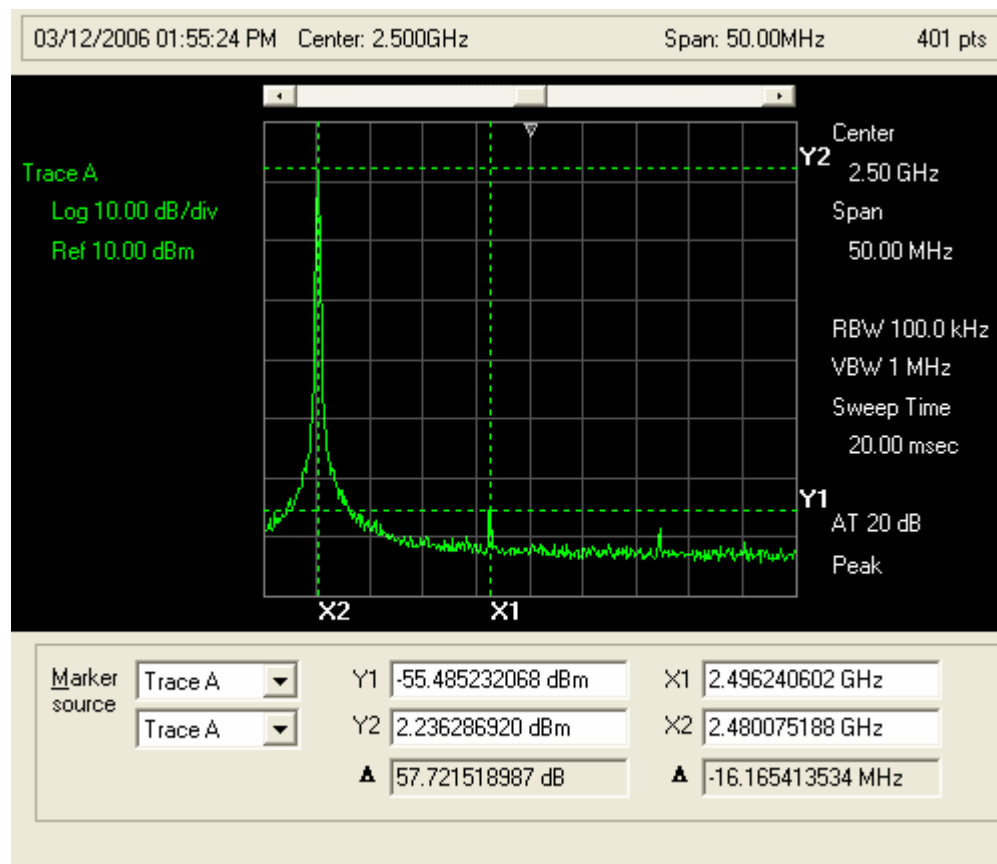

### Plot 12: Band-edge Compliance, Upper Band-edge (Hopping Enabled)

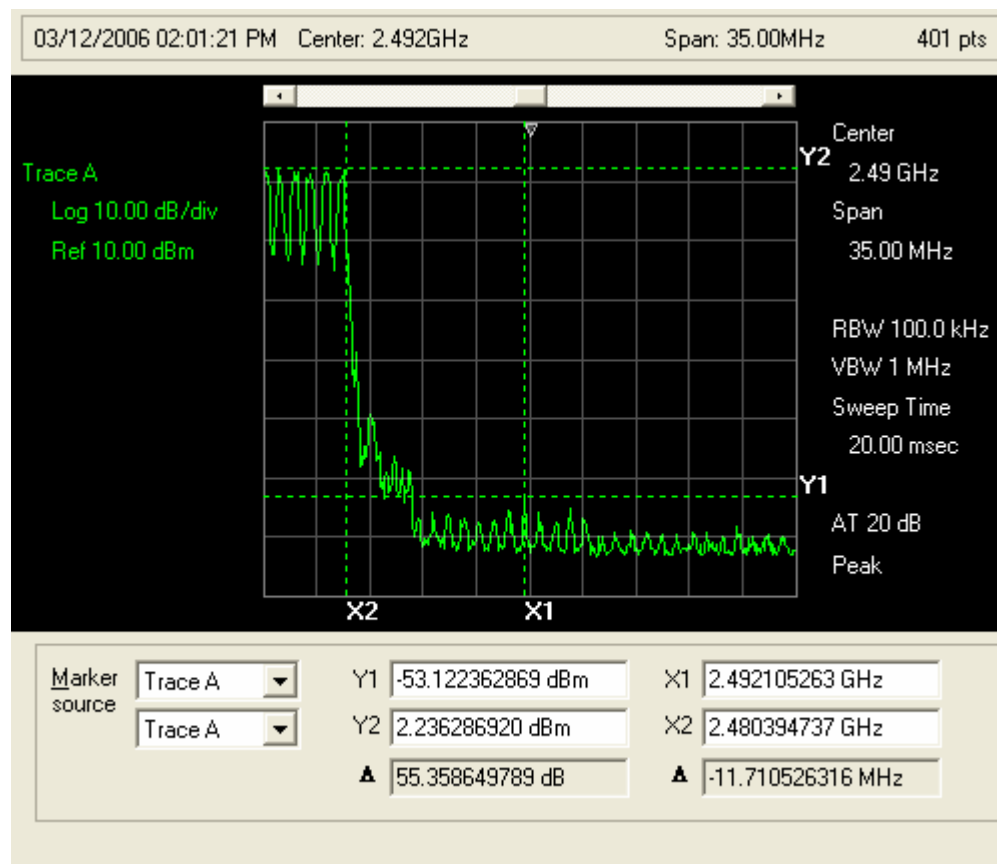

## RESTRICTED BAND MEASUREMENTS

### Restricted Band Measurements [CFR 47, 15.247(c) and RSS-210 6.2.2(o)]

|                                     |                                |
|-------------------------------------|--------------------------------|
| <b>EUT</b>                          | <b>BLUEMAX</b>                 |
| <b>Test setup</b>                   | B (Radiated – hopping enabled) |
| <b>Temp, Humidity, Air Pressure</b> | 58° F, 30.92                   |
| <b>Date of Measurement</b>          | 3/16/06                        |
| <b>Measured by</b>                  | Bob Cole                       |
| <b>Result</b>                       | PASSED                         |

### Limits and results


#### RESTRICTED BANDS

| Frequency (MHz) | Limit (dBuV) | Results (dBuV) |
|-----------------|--------------|----------------|
| 2310 - 2390     | 101          | 37.00          |
| 2483.5-2500     | 101          | 37.00          |


**NOTE: 0 dBm = 107 dBuV**

*Note: All restricted Bands from 30 MHz to 18 GHz were examined.*

### Plot 13: 2310 - 2390 MHz Restricted Band

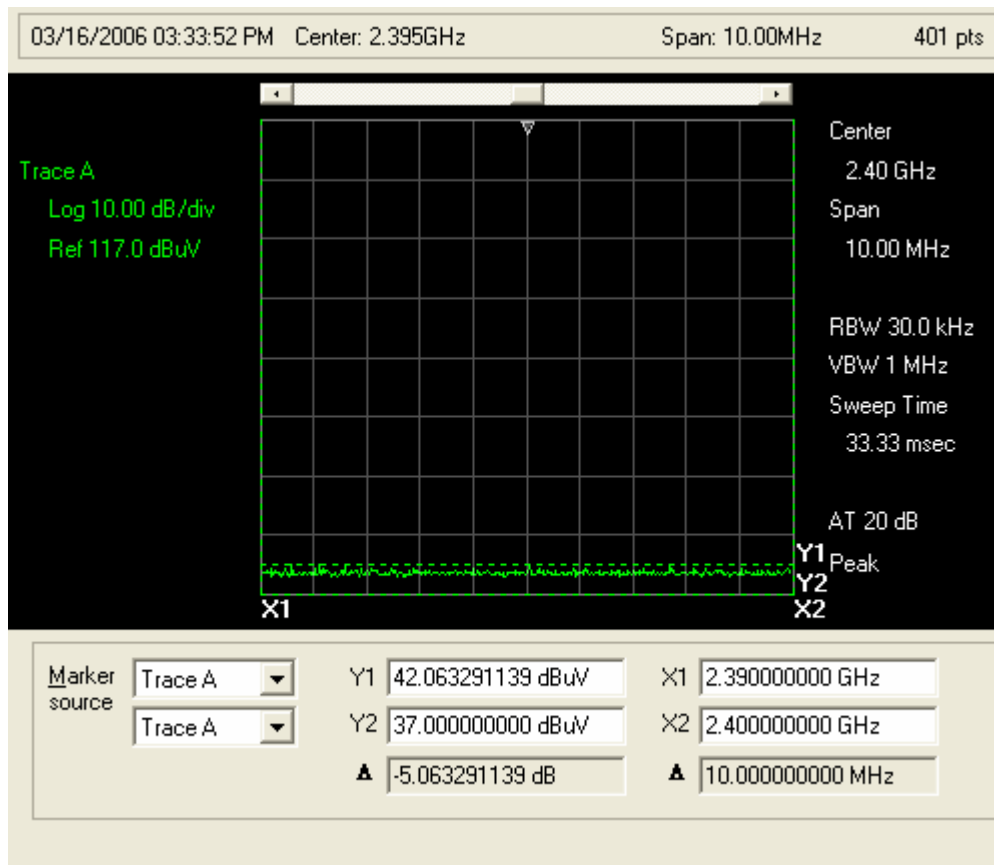

### Plot 14: 2483.5 – 2500 MHz Restricted Band

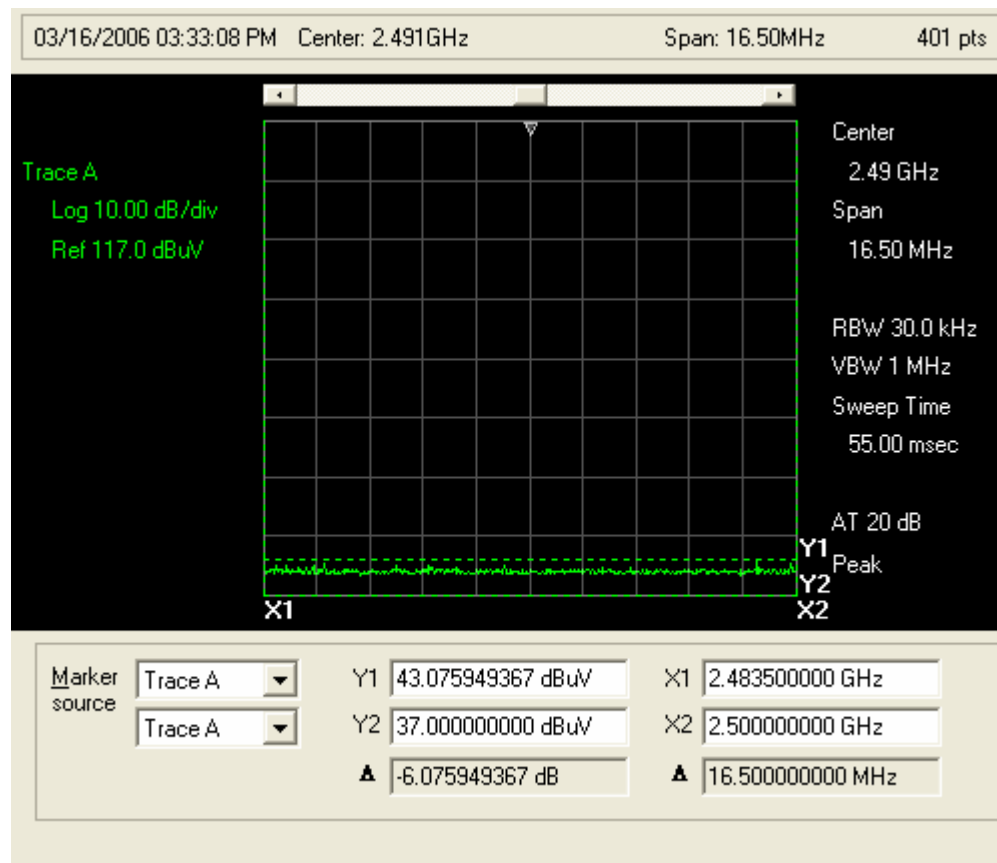

## SPURIOUS RF RADIATED EMISSIONS

### Spurious RF Radiated Emissions [CFR 47, 15.247c1) and RSS-210 6.2.2(o)]

|                                     |                                |
|-------------------------------------|--------------------------------|
| <b>EUT</b>                          | <b>BLUEMAX</b>                 |
| <b>Test setup</b>                   | B (Radiated – hopping enabled) |
| <b>Temp, Humidity, Air Pressure</b> | 54° F, 30.52                   |
| <b>Date of Measurement</b>          | 3/24/06                        |
| <b>Measured by</b>                  | Bob Cole                       |
| <b>Result</b>                       | PASSED                         |

### CLASS B LIMIT (10M MEASURING DISTANCE)

| Frequency Band (MHz) | Limit (dBµV/m) | Detector |
|----------------------|----------------|----------|
| 30-88                | 40             | Q-Peak   |
| 88-230               | 43.5           | Q-Peak   |
| 230-960              | 46             | Q-Peak   |
| 960-1000             | 54             | Q-Peak   |
| 1000-25000           | 54             | Average  |

### Emission measurement data, 30 MHz – 1GHz

The measurement results were obtained as described below.

$$E[\mu\text{V/m}] = U_{RX} + A_{CABLE} + AF - G_{PREAMP}$$

#### Where:

|              |                          |
|--------------|--------------------------|
| $U_{RX}$     | receiver reading         |
| $A_{CABLE}$  | Attenuation of the cable |
| $AF$         | Antenna Factor           |
| $G_{PREAMP}$ | Gain of the preamplifier |

**RADIATED EMISSIONS, 30-1000 MHz (3 meter Measurement Distance)**  
**CFR 47, 15.209 Limits**

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Plantronics**  
Specification: **EN55022B RADIATED**  
Work Order #: **2495**  
Test Type: **Radiated Scan**  
Equipment: **USB BT Dongle**  
Manufacturer: **Plantronics**  
Model: **BlueMax**  
S/N: **N/A**

Date: 3/28/2006  
Time: 11:01:49 AM  
Sequence#: 6  
Tested By: Bob Cole

***Test Equipment:***

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|----------|-----|------------------|--------------|---------|
|----------|-----|------------------|--------------|---------|

***Equipment Under Test (\* = EUT):***

| Function       | Manufacturer | Model # | S/N |
|----------------|--------------|---------|-----|
| USB BT Dongle* | Plantronics  | BlueMax | N/A |

***Support Devices:***

| Function | Manufacturer | Model # | S/N |
|----------|--------------|---------|-----|
|----------|--------------|---------|-----|

***Test Conditions / Notes:***

|  |
|--|
|  |
|--|


***Transducer Legend:***

|                                     |                                  |
|-------------------------------------|----------------------------------|
| T1=Chamber Receive Cable            | T2=EMCO BIA30 Biconical S/N 4084 |
| T3=EMCO LPA-30 Log Periodic 1 meter | T4=8447 Pre-Amp                  |

***Measurement Data:***      Reading listed by margin.      Test Distance: 3 Meters

| # | Freq<br>MHz | Rdng<br>dBμV | T1<br>dB | T2<br>dB | T3<br>dB | T4<br>dB | Dist<br>Table | Corr<br>dBμV/m | Spec<br>dBμV/m | Margin<br>dB | Polar<br>Ant |
|---|-------------|--------------|----------|----------|----------|----------|---------------|----------------|----------------|--------------|--------------|
| 1 | 160.774M    | 41.8         | +1.4     | +14.6    | +0.0     | +26.6    | -10.0         | 21.2           | 30.0           | -8.8         | Vert         |
| 2 | 325.505M    | 45.2         | +2.3     | +0.0     | +17.1    | +26.8    | -10.0         | 27.8           | 37.0           | -9.2         | Vert         |
| 3 | 329.588M    | 45.3         | +2.3     | +0.0     | +17.0    | +26.8    | -10.0         | 27.8           | 37.0           | -9.2         | Horiz        |
| 4 | 156.944M    | 41.0         | +1.4     | +14.5    | +0.0     | +26.6    | -10.0         | 20.3           | 30.0           | -9.7         | Vert         |
| 5 | 158.083M    | 40.4         | +1.4     | +14.6    | +0.0     | +26.6    | -10.0         | 19.8           | 30.0           | -10.2        | Horiz        |
| 6 | 162.016M    | 40.0         | +1.5     | +14.7    | +0.0     | +26.6    | -10.0         | 19.6           | 30.0           | -10.4        | Vert         |
| 7 | 139.556M    | 40.9         | +1.3     | +13.4    | +0.0     | +26.6    | -10.0         | 19.0           | 30.0           | -11.0        | Vert         |
| 8 | 298.962M    | 44.5         | +2.2     | +0.0     | +16.0    | +26.7    | -10.0         | 26.0           | 37.0           | -11.0        | Horiz        |

EMCE Engineering Date: 3/28/2006 Time: 11:01:49 AM Plantronics W/O#: 2495  
EN55022B RADIATED Test Distance: 3 Meters Sequence#: 6

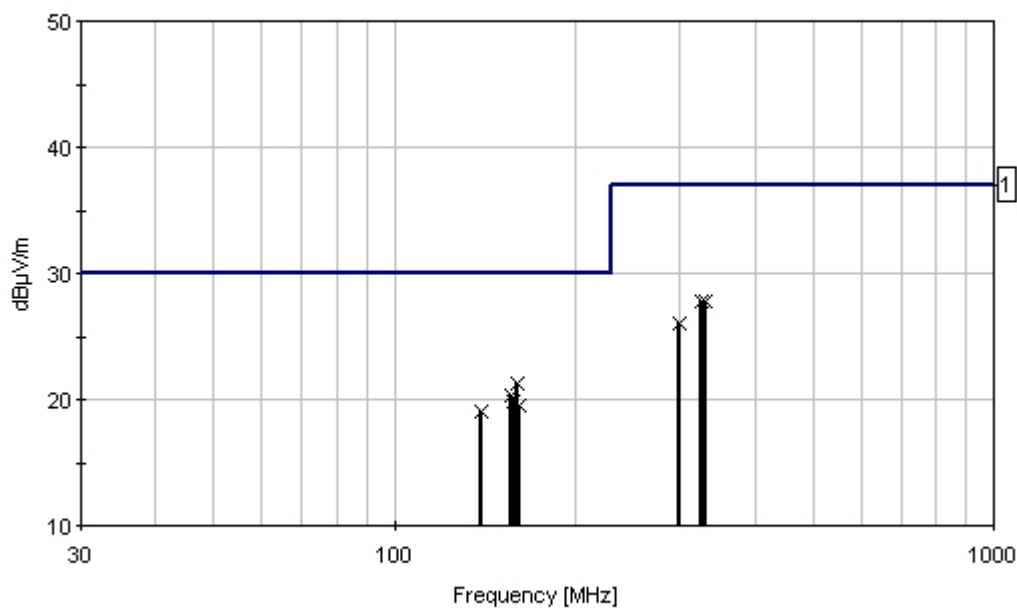

— Readings — 1 - EN55022B RADIATED × Peak Readings

## 1.0 - 2.4835 GHz Test Data

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Plantronics**  
 Specification: **BT FCC 95 dBuV Radiated 1--2.4 GHz**  
 Work Order #: Date: 3/16/2006  
 Test Type: **Radiated Scan** Time: 11:33:58 AM  
 Equipment: **USB BT Dongle** Sequence#: 1  
 Manufacturer: Plantronics Tested By: Bob Cole  
 Model: BlueMax  
 S/N: N/A

### ***Test Equipment:***

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|----------|-----|------------------|--------------|---------|
|----------|-----|------------------|--------------|---------|

### ***Equipment Under Test (\* = EUT):***

| Function       | Manufacturer | Model # | S/N |
|----------------|--------------|---------|-----|
| USB BT Dongle* | Plantronics  | BlueMax | N/A |

### ***Support Devices:***

| Function | Manufacturer | Model # | S/N |
|----------|--------------|---------|-----|
|----------|--------------|---------|-----|

### ***Test Conditions / Notes:***

|  |
|--|
|  |
|--|


### ***Transducer Legend:***

|  |
|--|
|  |
|--|

**Measurement Data:**      Reading listed by margin.      Test Distance: 1 Meter

| #  | Freq<br>MHz | Rdng<br>dBµV | dB | dB | dB | dB | Dist<br>Table | Corr<br>dBµV/m | Spec<br>dBµV/m | Margin<br>dB | Polar<br>Ant |
|----|-------------|--------------|----|----|----|----|---------------|----------------|----------------|--------------|--------------|
| 1  | 2123.622M   | 44.6         |    |    |    |    | +0.0          | 44.6           | 95.0           | -50.4        | Vert         |
| 2  | 1708.207M   | 40.3         |    |    |    |    | +0.0          | 40.3           | 95.0           | -54.7        | Vert         |
| 3  | 1000.250M   | 38.2         |    |    |    |    | +0.0          | 38.2           | 95.0           | -56.8        | Vert         |
| 4  | 1953.202M   | 38.1         |    |    |    |    | +0.0          | 38.1           | 95.0           | -56.9        | Vert         |
| 5  | 1331.831M   | 37.6         |    |    |    |    | +0.0          | 37.6           | 95.0           | -57.4        | Vert         |
| 6  | 1720.219M   | 37.3         |    |    |    |    | +0.0          | 37.3           | 95.0           | -57.7        | Vert         |
| 7  | 1493.743M   | 37.2         |    |    |    |    | +0.0          | 37.2           | 95.0           | -57.8        | Vert         |
| 8  | 1200.200M   | 35.8         |    |    |    |    | +0.0          | 35.8           | 95.0           | -59.2        | Vert         |
| 9  | 1067.568M   | 35.6         |    |    |    |    | +0.0          | 35.6           | 95.0           | -59.4        | Vert         |
| 10 | 1060.560M   | 35.4         |    |    |    |    | +0.0          | 35.4           | 95.0           | -59.6        | Vert         |

EMCE Engineering Date: 3/16/2006 Time: 11:33:58 AM Plantronics W/O#:  
BT FCC 95 dBuV Radiated 1--2.4 GHz Test Distance: 1 Meter Sequence#: 1

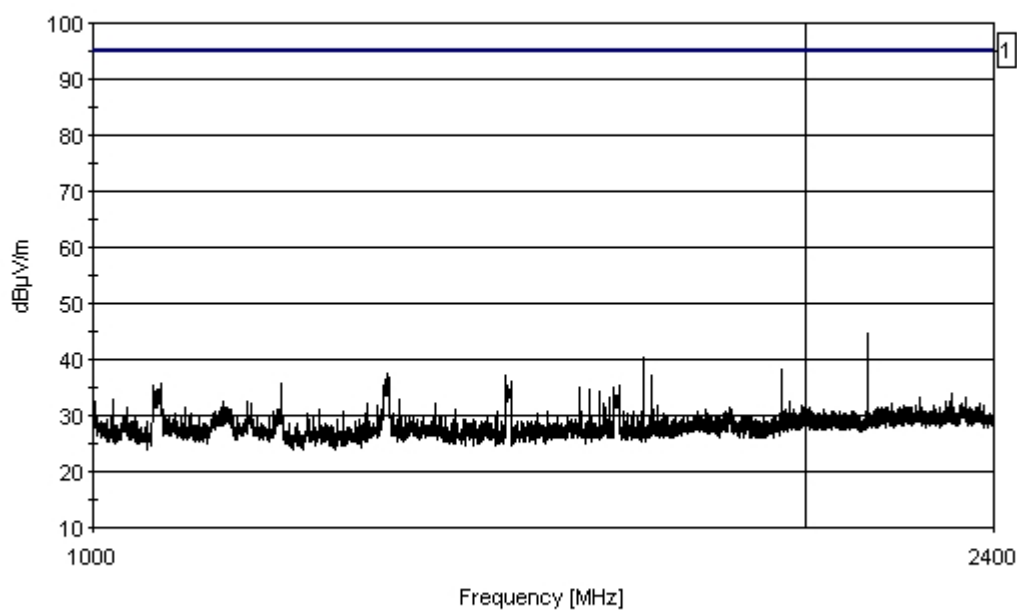

— Sweep Data      — 1 - BT FCC 95 dBuV Radiated 1--2.4 GHz

## 2.4835 – 25 GHz Test Data

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Plantronics**  
 Specification: **BT FCC (95 dBuV) Radiated 2483-12750 MHz**  
 Work Order #: Date: 3/16/2006  
 Test Type: **Radiated Scan** Time: 1:31:24 PM  
 Equipment: **USB BT Dongle** Sequence#: 4  
 Manufacturer: Plantronics Tested By: Bob Cole  
 Model: BlueMax  
 S/N: N/A

### ***Test Equipment:***

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|----------|-----|------------------|--------------|---------|
|----------|-----|------------------|--------------|---------|

### ***Equipment Under Test (\* = EUT):***

| Function       | Manufacturer | Model # | S/N |
|----------------|--------------|---------|-----|
| USB BT Dongle* | Plantronics  | BlueMax | N/A |

### ***Support Devices:***

| Function | Manufacturer | Model # | S/N |
|----------|--------------|---------|-----|
|----------|--------------|---------|-----|

### ***Test Conditions / Notes:***

|  |
|--|
|  |
|--|


### ***Transducer Legend:***

|  |
|--|
|  |
|--|

**Measurement Data:** Reading listed by margin. Test Distance: 1 Meter

| #  | Freq<br>MHz | Rdng<br>dB $\mu$ V | dB | dB | dB | dB | Dist<br>Table | Corr<br>dB $\mu$ V/m | Spec<br>dB $\mu$ V/m | Margin<br>dB | Polar<br>Ant |
|----|-------------|--------------------|----|----|----|----|---------------|----------------------|----------------------|--------------|--------------|
| 1  | 4830.597M   | 50.7               |    |    |    |    | +0.0          | 50.7                 | 95.0                 | -44.3        | Vert         |
| 2  | 4960.477M   | 49.4               |    |    |    |    | +0.0          | 49.4                 | 95.0                 | -45.6        | Vert         |
| 3  | 4841.858M   | 49.3               |    |    |    |    | +0.0          | 49.3                 | 95.0                 | -45.7        | Vert         |
| 4  | 11731.230M  | 48.1               |    |    |    |    | +0.0          | 48.1                 | 95.0                 | -46.9        | Vert         |
| 5  | 4807.824M   | 47.7               |    |    |    |    | +0.0          | 47.7                 | 95.0                 | -47.3        | Vert         |
| 6  | 11206.460M  | 47.6               |    |    |    |    | +0.0          | 47.6                 | 95.0                 | -47.4        | Vert         |
| 7  | 11422.420M  | 47.5               |    |    |    |    | +0.0          | 47.5                 | 95.0                 | -47.5        | Vert         |
| 8  | 11554.300M  | 47.3               |    |    |    |    | +0.0          | 47.3                 | 95.0                 | -47.7        | Vert         |
| 9  | 11663.910M  | 47.2               |    |    |    |    | +0.0          | 47.2                 | 95.0                 | -47.8        | Vert         |
| 10 | 11857.610M  | 47.1               |    |    |    |    | +0.0          | 47.1                 | 95.0                 | -47.9        | Vert         |

EMCE Engineering Date: 3/16/2006 Time: 1:31:24 PM Plantronics W/O#:  
BT FCC (95 dBuV) Radiated 2483-12750 MHz Test Distance: 1 Meter Sequence#: 4

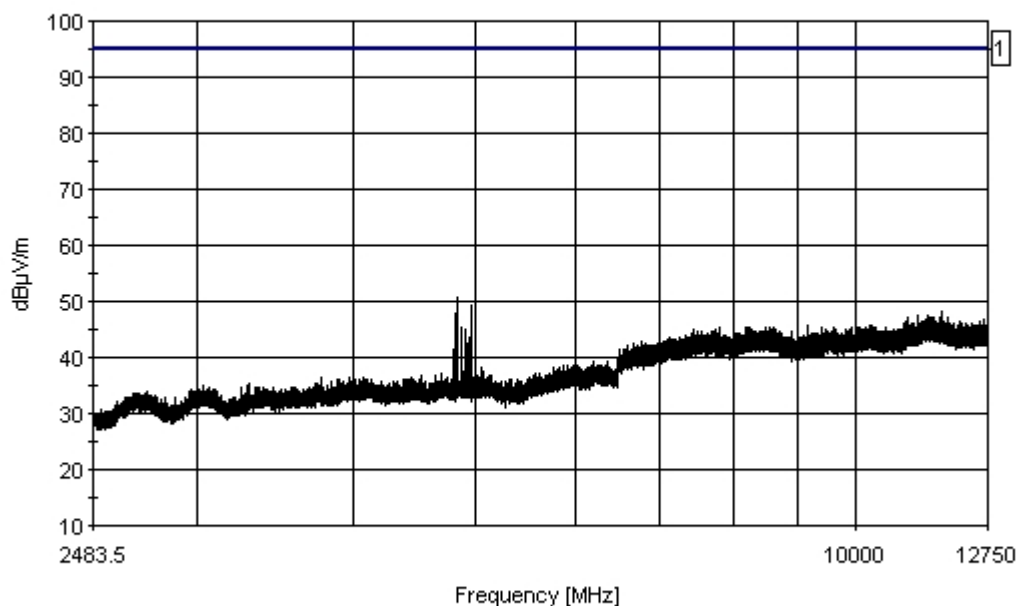

— Sweep Data      — 1 - BT FCC (95 dBuV) Radiated 2483-12750 MHz

## RECEIVER SPURIOUS RADIATED EMISSIONS

### Spurious RF Radiated Emissions [CFR 47, 15.247c1) and RSS-210 6.2.2(o)]

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Plantronics**  
 Specification: **BT RX Radiated 1000-12750**  
 Work Order #:   
 Test Type: **Radiated Scan**  
 Equipment: **USB BT Dongle**  
 Manufacturer: Plantronics  
 Model: BlueMax  
 S/N: N/A

Date: 3/16/2006  
 Time: 1:48:48 PM  
 Sequence#: 6  
 Tested By: Bob Cole

#### Test Equipment:

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|----------|-----|------------------|--------------|---------|
|----------|-----|------------------|--------------|---------|

#### Equipment Under Test (\* = EUT):

| Function       | Manufacturer | Model # | S/N |
|----------------|--------------|---------|-----|
| USB BT Dongle* | Plantronics  | BlueMax | N/A |

#### Support Devices:

| Function | Manufacturer | Model # | S/N |
|----------|--------------|---------|-----|
|----------|--------------|---------|-----|

#### Test Conditions / Notes:

|  |
|--|
|  |
|--|


#### Transducer Legend:

|  |
|--|
|  |
|--|

**Measurement Data:** Reading listed by margin. Test Distance: 1 Meter

| # | Freq<br>MHz    | Rdng<br>dB $\mu$ V |  |  |  |  | Dist<br>Table | Corr<br>dB $\mu$ V/m | Spec<br>dB $\mu$ V/m | Margin<br>dB | Polar<br>Ant |
|---|----------------|--------------------|--|--|--|--|---------------|----------------------|----------------------|--------------|--------------|
| 1 | 12212.190<br>M | 51.8               |  |  |  |  | +0.0          | 51.8                 | 64.0                 | -12.2        | Vert         |
| 2 | 12212.940<br>M | 50.7               |  |  |  |  | +0.0          | 50.7                 | 64.0                 | -13.3        | Vert         |

EMCE Engineering Date: 3/16/2006 Time: 1:48:48 PM Plantronics VVO#:  
BT RX Radiated 1000-12750 Test Distance: 1 Meter Sequence#: 6

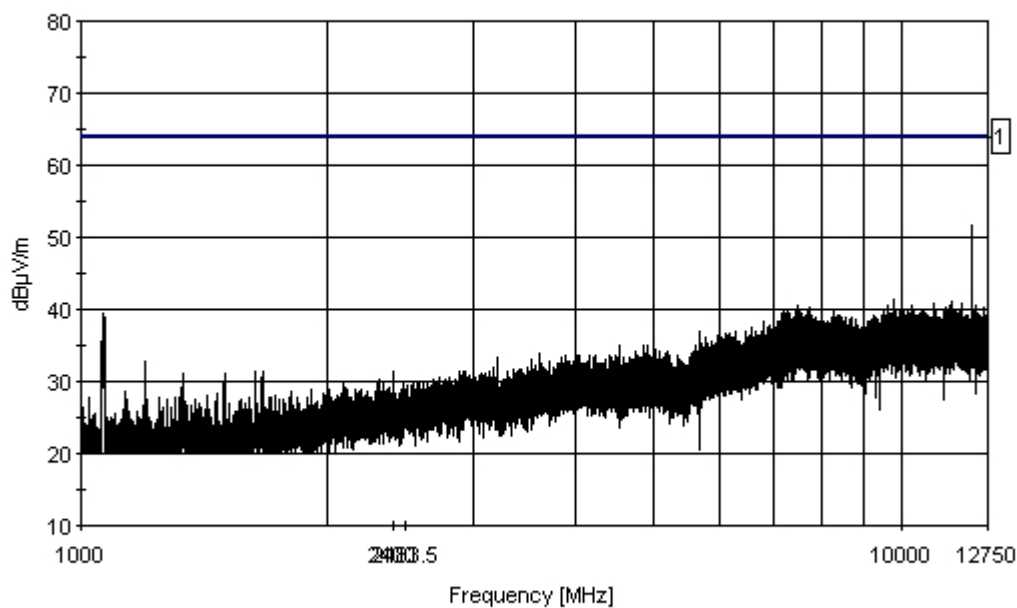

— Sweep Data      — 1 - BT RX Radiated 1000-12750

# TRANSMITTER SPURIOUS CONDUCTED EMISSIONS

## Spurious Conducted Emissions 30 MHz - 18 GHz – Worst Case Emission

### Spurious Antenna Conducted Emissions 30 MHz – 2.4 GHz

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Plantronics**  
 Specification: **BT Spurious Cond. 1 - 2.4GHz**  
 Work Order #: Date: 3/16/2006  
 Test Type: **Conducted Emissions** Time: 4:05:42 PM  
 Equipment: **USB BT Dongle** Sequence#: 1  
 Manufacturer: Plantronics Tested By: Bob Cole  
 Model: BlueMax 120V 60Hz  
 S/N: N/A

#### **Test Equipment:**

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|----------|-----|------------------|--------------|---------|
|----------|-----|------------------|--------------|---------|

#### **Equipment Under Test (\* = EUT):**

| Function       | Manufacturer | Model # | S/N |
|----------------|--------------|---------|-----|
| USB BT Dongle* | Plantronics  | BlueMax | N/A |

#### **Support Devices:**

| Function | Manufacturer | Model # | S/N |
|----------|--------------|---------|-----|
|----------|--------------|---------|-----|

#### **Test Conditions / Notes:**

|  |
|--|
|  |
|--|

#### **Transducer Legend:**


|  |
|--|
|  |
|--|

**Measurement Data:** Reading listed by margin. Test Lead: Black

| # | Freq<br>MHz | Rdng<br>dBµV | dB | dB | dB | dB | Dist<br>Table | Corr<br>dBµV | Spec<br>dBµV | Margin<br>dB | Polar<br>Ant |
|---|-------------|--------------|----|----|----|----|---------------|--------------|--------------|--------------|--------------|
| 1 | 2389.390M   | 47.4         |    |    |    |    | +0.0          | 47.4         | 95.0         | -47.6        | Black        |
| 2 | 2391.364M   | 46.7         |    |    |    |    | +0.0          | 46.7         | 95.0         | -48.3        | Black        |
| 3 | 2399.753M   | 46.6         |    |    |    |    | +0.0          | 46.6         | 95.0         | -48.4        | Black        |
| 4 | 2399.013M   | 46.4         |    |    |    |    | +0.0          | 46.4         | 95.0         | -48.6        | Black        |
| 5 | 2393.584M   | 46.0         |    |    |    |    | +0.0          | 46.0         | 95.0         | -49.0        | Black        |
| 6 | 2395.559M   | 45.5         |    |    |    |    | +0.0          | 45.5         | 95.0         | -49.5        | Black        |
| 7 | 2387.416M   | 44.7         |    |    |    |    | +0.0          | 44.7         | 95.0         | -50.3        | Black        |
| 8 | 1648.898M   | 43.4         |    |    |    |    | +0.0          | 43.4         | 95.0         | -51.6        | Black        |
| 9 | 2369.403M   | 43.4         |    |    |    |    | +0.0          | 43.4         | 95.0         | -51.6        | Black        |

|    |           |      |      |      |      |       |       |
|----|-----------|------|------|------|------|-------|-------|
| 10 | 1789.289M | 43.0 | +0.0 | 43.0 | 95.0 | -52.0 | Black |
|----|-----------|------|------|------|------|-------|-------|

EMCE Engineering Date: 3/16/2006 Time: 4:05:42 PM Plantronics WO#:  
BT Spurious Cond. 1 - 2.4GHz Test Lead: Black 120V 60Hz Sequence#: 1

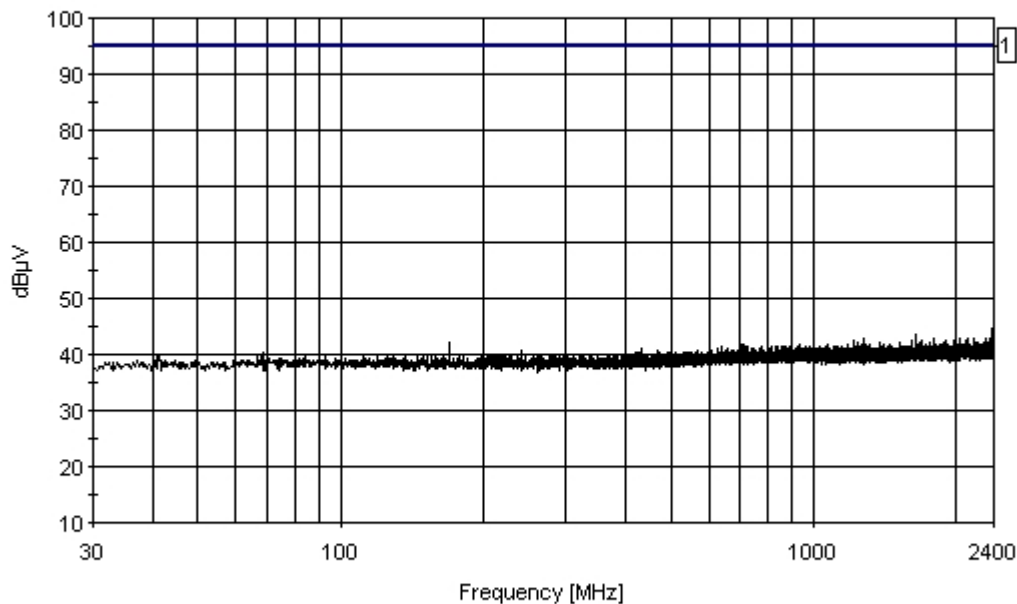

## Spurious Antenna Conducted Emissions 2.4835-18 GHz

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

|                                              |                          |
|----------------------------------------------|--------------------------|
| Customer: <b>Customer</b>                    |                          |
| Specification: <b>BT Ant Spur Cond Upper</b> |                          |
| Work Order #:                                | Date: 3/17/2006          |
| Test Type: <b>Conducted Emissions</b>        | Time: 10:57:24 AM        |
| Equipment: <b>USB BT Dongle</b>              | Sequence#: 2             |
| Manufacturer: Plantronics                    | Tested By: Test Engineer |
| Model: BlueMax                               | 120V 60Hz                |
| S/N: N/A                                     |                          |

### ***Test Equipment:***

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|----------|-----|------------------|--------------|---------|
|----------|-----|------------------|--------------|---------|

### ***Equipment Under Test (\* = EUT):***

| Function       | Manufacturer | Model # | S/N |
|----------------|--------------|---------|-----|
| USB BT Dongle* | Plantronics  | BlueMax | N/A |

### ***Support Devices:***

| Function | Manufacturer | Model # | S/N |
|----------|--------------|---------|-----|
|----------|--------------|---------|-----|

### ***Test Conditions / Notes:***

|  |
|--|
|  |
|--|


### ***Transducer Legend:***

|  |
|--|
|  |
|--|

**Measurement Data:**      Reading listed by margin.      Test Lead: Black

| #  | Freq<br>MHz | Rdng<br>dBµV |  |  |  |  | Dist<br>Table | Corr<br>dBµV | Spec<br>dBµV | Margin<br>dB | Polar<br>Ant |
|----|-------------|--------------|--|--|--|--|---------------|--------------|--------------|--------------|--------------|
| 1  | 4852.367M   | 51.8         |  |  |  |  | +0.0          | 51.8         | 90.0         | -38.2        | Black        |
| 2  | 4810.074M   | 51.5         |  |  |  |  | +0.0          | 51.5         | 90.0         | -38.5        | Black        |
| 3  | 4825.840M   | 50.5         |  |  |  |  | +0.0          | 50.5         | 90.0         | -39.5        | Black        |
| 4  | 4948.212M   | 50.2         |  |  |  |  | +0.0          | 50.2         | 90.0         | -39.8        | Black        |
| 5  | 4883.898M   | 49.4         |  |  |  |  | +0.0          | 49.4         | 90.0         | -40.6        | Black        |
| 6  | 4820.585M   | 48.9         |  |  |  |  | +0.0          | 48.9         | 90.0         | -41.1        | Black        |
| 7  | 4836.351M   | 48.8         |  |  |  |  | +0.0          | 48.8         | 90.0         | -41.2        | Black        |
| 8  | 4878.643M   | 48.5         |  |  |  |  | +0.0          | 48.5         | 90.0         | -41.5        | Black        |
| 9  | 4868.132M   | 46.7         |  |  |  |  | +0.0          | 46.7         | 90.0         | -43.3        | Black        |
| 10 | 4905.920M   | 46.4         |  |  |  |  | +0.0          | 46.4         | 90.0         | -43.6        | Black        |

EMCE Engineering Date: 3/17/2006 Time: 10:57:24 AM Customer W/O#:  
BT Ant Spur Cond Upper Test Lead: Black 120V 60Hz Sequence#: 2

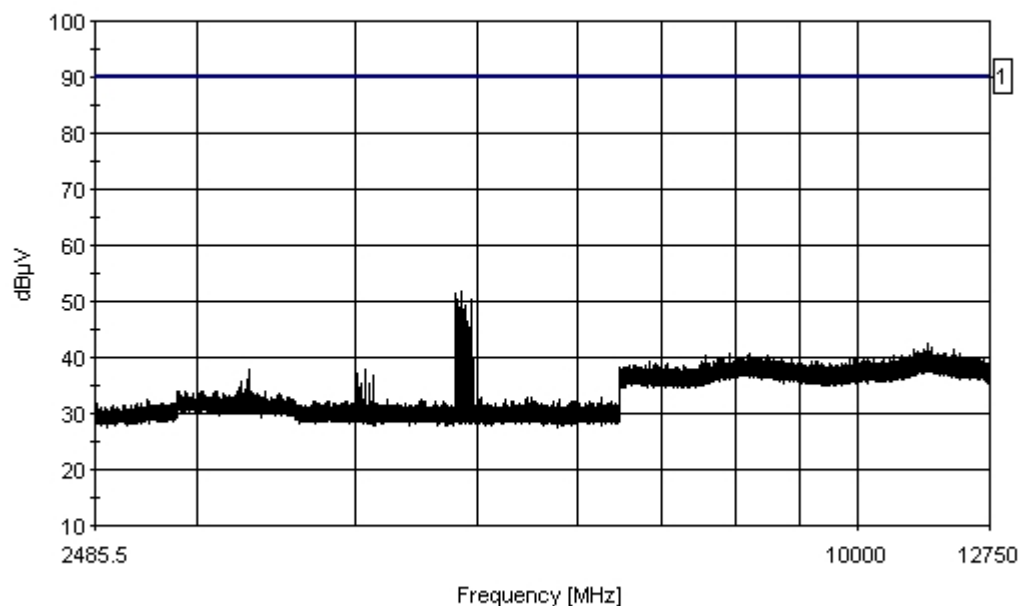

## RECEIVER CONDUCTED EMISSIONS

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Plantronics**  
Specification: **BT RX Conducted 30M-12.75G**  
Work Order #:  
Test Type: **Conducted Emissions**  
Equipment: **USB BT Dongle**  
Manufacturer: Plantronics  
Model: BlueMax  
S/N: N/A

Date: 3/17/2006  
Time: 11:20:41 AM  
Sequence#: 3  
Tested By: Bob Cole  
120V 60Hz

### Test Equipment:

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|----------|-----|------------------|--------------|---------|
|----------|-----|------------------|--------------|---------|

### Equipment Under Test (\* = EUT):

| Function       | Manufacturer | Model # | S/N |
|----------------|--------------|---------|-----|
| USB BT Dongle* | Plantronics  | BlueMax | N/A |

### Support Devices:

Function • Manufacturer • Model # • S/N • •

### Test Conditions / Notes:

|  |
|--|
|  |
|--|

### Transducer Legend:


|  |
|--|
|  |
|--|

**Measurement Data:** Reading listed by margin.

Test Lead: Antenna Terminal

| #  | Freq<br>MHz | Rdng<br>dBµV | dB | dB | dB | dB | Dist<br>Table | Corr<br>dBµV | Spec<br>dBµV | Margin<br>dB | Polar<br>Ant |
|----|-------------|--------------|----|----|----|----|---------------|--------------|--------------|--------------|--------------|
| 1  | 11482.960M  | 43.0         |    |    |    |    | +0.0          | 43.0         | 90.0         | -47.0        | Anten        |
| 2  | 11576.560M  | 42.4         |    |    |    |    | +0.0          | 42.4         | 90.0         | -47.6        | Anten        |
| 3  | 12039.520M  | 42.3         |    |    |    |    | +0.0          | 42.3         | 90.0         | -47.7        | Anten        |
| 4  | 11241.720M  | 42.2         |    |    |    |    | +0.0          | 42.2         | 90.0         | -47.8        | Anten        |
| 5  | 12222.950M  | 42.2         |    |    |    |    | +0.0          | 42.2         | 90.0         | -47.8        | Anten        |
| 6  | 11377.110M  | 42.0         |    |    |    |    | +0.0          | 42.0         | 90.0         | -48.0        | Anten        |
| 7  | 11083.560M  | 41.9         |    |    |    |    | +0.0          | 41.9         | 90.0         | -48.1        | Anten        |
| 8  | 11171.650M  | 41.6         |    |    |    |    | +0.0          | 41.6         | 90.0         | -48.4        | Anten        |
| 9  | 11656.640M  | 41.6         |    |    |    |    | +0.0          | 41.6         | 90.0         | -48.4        | Anten        |
| 10 | 11897.630M  | 41.6         |    |    |    |    | +0.0          | 41.6         | 90.0         | -48.4        | Anten        |

EMCE Engineering Date: 3/17/2006 Time: 11:20:41 AM Plantronics W/O#:  
BT RX Conducted 30M-12.75G Test Lead: Antenna Terminal 120V 60Hz Sequence#: 3

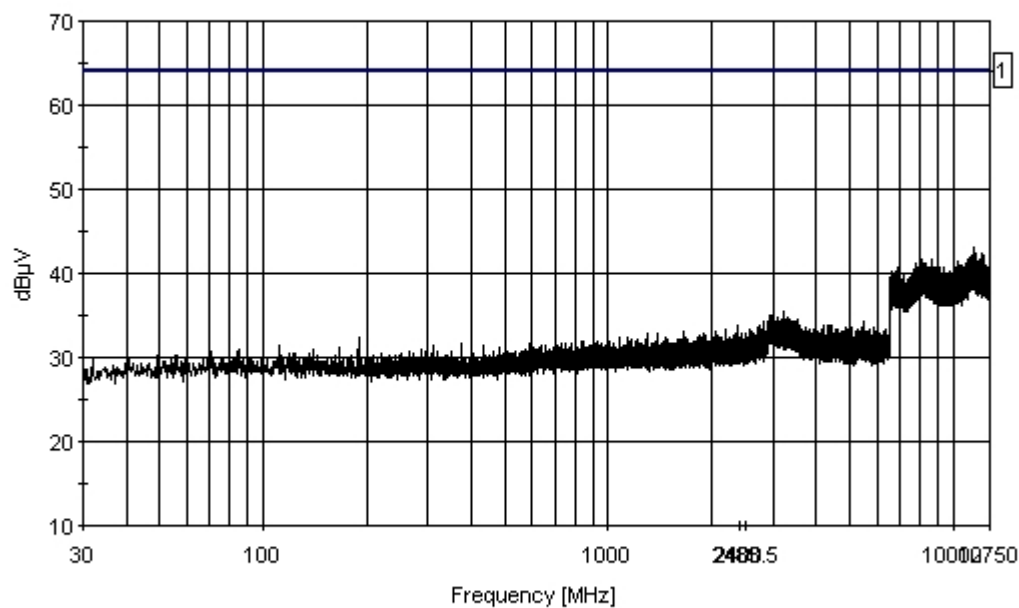

— Sweep Data      — 1 - BT RX Conducted 30M-12.75G

## AC LINE CONDUCTED EMISSIONS MEASUREMENT

### AC Line Conducted Emissions Measurement 150 kHz – 30 MHz

|                                     |                                 |
|-------------------------------------|---------------------------------|
| <b>EUT</b>                          | <b>BLUEMAX</b>                  |
| <b>Test setup</b>                   | C (conducted – hopping enabled) |
| <b>Temp, Humidity, Air Pressure</b> | 54° F, 30.69                    |
| <b>Date of Measurement</b>          | 3/27/06                         |
| <b>Measured by</b>                  | Bob Cole                        |
| <b>Result</b>                       | PASSED                          |

### CLASS B LIMIT

| Frequency Band (MHz) | EN 55022 B Limit (dB $\mu$ V/m) | Detector |
|----------------------|---------------------------------|----------|
| 0.15 – 0.5           | 66 to 56                        | QP       |
| 0.5 – 5.0            | 56                              | QP       |
| 5.0 – 30.0           | 60                              | QP       |

### EUT operation mode

|                              |                 |
|------------------------------|-----------------|
| <b>EUT operation mode</b>    | Hopping Enabled |
| <b>EUT channel</b>           | Hopping         |
| <b>EUT TX power level</b>    | Maximum         |
| <b>EUT operation voltage</b> | 120 VAC         |

**LINE CONDUCTED EMISSIONS, .15 - 30 MHz**  
**EN 55022 Class B Limits**

**LINE 1 - HOT**

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

|                |                             |            |            |
|----------------|-----------------------------|------------|------------|
| Customer:      | <b>Plantronics</b>          | Date:      | 3/27/2006  |
| Specification: | <b>EN55022 B COND [AVE]</b> | Time:      | 3:31:17 PM |
| Work Order #:  | <b>2495</b>                 | Sequence#: | 2          |
| Test Type:     | <b>Conducted Emissions</b>  | Tested By: | Bob Cole   |
| Equipment:     | <b>USB BT Dongle</b>        |            | 120V 60Hz  |
| Manufacturer:  | Plantronics                 |            |            |
| Model:         | BlueMax                     |            |            |
| S/N:           | N/A                         |            |            |

***Test Equipment:***

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|----------|-----|------------------|--------------|---------|
|----------|-----|------------------|--------------|---------|

***Equipment Under Test (\* = EUT):***

| Function       | Manufacturer | Model # | S/N |
|----------------|--------------|---------|-----|
| USB BT Dongle* | Plantronics  | BlueMax | N/A |

***Support Devices:***

| Function | Manufacturer | Model # | S/N |
|----------|--------------|---------|-----|
|----------|--------------|---------|-----|

***Test Conditions / Notes:***


|  |
|--|
|  |
|--|

***Transducer Legend:***

|                          |                                |
|--------------------------|--------------------------------|
| T1=Chamber Receive Cable | T2=HP 11947A Transient Limiter |
|--------------------------|--------------------------------|

| <b>Measurement Data:</b> |             | Reading listed by margin. |          |          |    | Test Lead: Line 1 |               |              |              |              |              |
|--------------------------|-------------|---------------------------|----------|----------|----|-------------------|---------------|--------------|--------------|--------------|--------------|
| #                        | Freq<br>MHz | Rdng<br>dBµV              | T1<br>dB | T2<br>dB | dB | dB                | Dist<br>Table | Corr<br>dBµV | Spec<br>dBµV | Margin<br>dB | Polar<br>Ant |
| 1                        | 211.085k    | 40.7                      | +0.4     | +9.9     |    |                   | +0.0          | 51.0         | 53.2         | -2.2         | Line         |
| 2                        | 151.454k    | 41.5                      | +0.4     | +9.9     |    |                   | +0.0          | 51.8         | 55.9         | -4.1         | Line         |
| 3                        | 164.544k    | 40.5                      | +0.4     | +9.9     |    |                   | +0.0          | 50.8         | 55.2         | -4.4         | Line         |
| 4                        | 3.174M      | 30.8                      | +0.5     | +10.0    |    |                   | +0.0          | 41.3         | 46.0         | -4.7         | Line         |
| 5                        | 550.687k    | 30.1                      | +0.4     | +10.0    |    |                   | +0.0          | 40.5         | 46.0         | -5.5         | Line         |
| 6                        | 639.406k    | 29.8                      | +0.4     | +10.0    |    |                   | +0.0          | 40.2         | 46.0         | -5.8         | Line         |
| 7                        | 21.667M     | 32.9                      | +0.9     | +10.1    |    |                   | +0.0          | 43.9         | 50.0         | -6.1         | Line         |
| 8                        | 2.889M      | 29.2                      | +0.5     | +10.0    |    |                   | +0.0          | 39.7         | 46.0         | -6.3         | Line         |
| 9                        | 3.101M      | 29.2                      | +0.5     | +10.0    |    |                   | +0.0          | 39.7         | 46.0         | -6.3         | Line         |
| 10                       | 181.270k    | 37.7                      | +0.4     | +9.9     |    |                   | +0.0          | 48.0         | 54.4         | -6.4         | Line         |

EMCE Engineering Date: 3/27/2006 Time: 3:31:17 PM Plantronics W/O#: 2495  
EN55022 B COND [AVE] Test Lead: Line 1 120V 60Hz Sequence#: 2

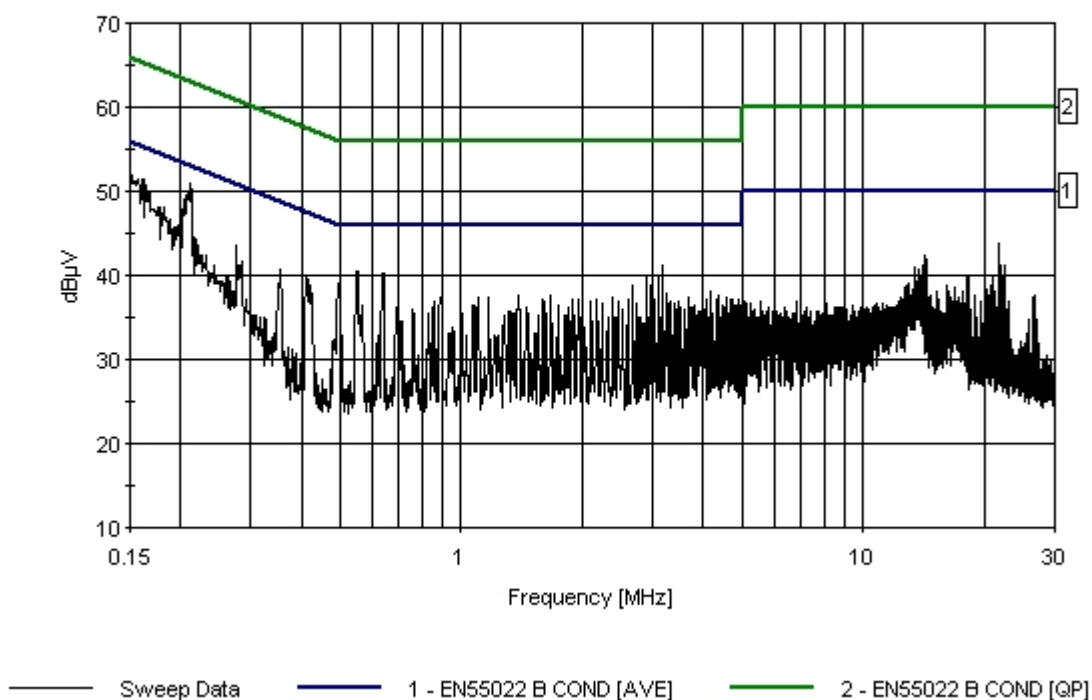

**LINE CONDUCTED EMISSIONS, .15 - 30 MHz**  
**EN 55022 Class B Limits**

**LINE 2 – Neutral**

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

|                |                             |            |            |
|----------------|-----------------------------|------------|------------|
| Customer:      | <b>Plantronics</b>          | Date:      | 3/27/2006  |
| Specification: | <b>EN55022 B COND [AVE]</b> | Time:      | 3:34:37 PM |
| Work Order #:  | <b>2495</b>                 | Sequence#: | 3          |
| Test Type:     | <b>Conducted Emissions</b>  | Tested By: | Bob Cole   |
| Equipment:     | <b>USB BT Dongle</b>        |            | 120V 60Hz  |
| Manufacturer:  | Plantronics                 |            |            |
| Model:         | BlueMax                     |            |            |
| S/N:           | N/A                         |            |            |

***Test Equipment:***

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|----------|-----|------------------|--------------|---------|
|----------|-----|------------------|--------------|---------|

***Equipment Under Test (\* = EUT):***

| Function       | Manufacturer | Model # | S/N |
|----------------|--------------|---------|-----|
| USB BT Dongle* | Plantronics  | BlueMax | N/A |

***Support Devices:***

| Function | Manufacturer | Model # | S/N |
|----------|--------------|---------|-----|
|----------|--------------|---------|-----|

***Test Conditions / Notes:***


|  |
|--|
|  |
|--|

***Transducer Legend:***

|                          |                                |
|--------------------------|--------------------------------|
| T1=Chamber Receive Cable | T2=HP 11947A Transient Limiter |
|--------------------------|--------------------------------|

| <b>Measurement Data:</b> |             | Reading listed by margin. |          |          |    | Test Lead: Line 2 |               |              |              |              |              |
|--------------------------|-------------|---------------------------|----------|----------|----|-------------------|---------------|--------------|--------------|--------------|--------------|
| #                        | Freq<br>MHz | Rdng<br>dBµV              | T1<br>dB | T2<br>dB | dB | dB                | Dist<br>Table | Corr<br>dBµV | Spec<br>dBµV | Margin<br>dB | Polar<br>Ant |
| 1                        | 151.454k    | 42.8                      | +0.4     | +9.9     |    |                   | +0.0          | 53.1         | 55.9         | -2.8         | Line         |
| 2                        | 544.870k    | 30.8                      | +0.4     | +10.0    |    |                   | +0.0          | 41.2         | 46.0         | -4.8         | Line         |
| 3                        | 3.161M      | 30.7                      | +0.5     | +10.0    |    |                   | +0.0          | 41.2         | 46.0         | -4.8         | Line         |
| 4                        | 637.224k    | 29.9                      | +0.4     | +10.0    |    |                   | +0.0          | 40.3         | 46.0         | -5.7         | Line         |
| 5                        | 421.246k    | 31.1                      | +0.4     | +10.0    |    |                   | +0.0          | 41.5         | 47.4         | -5.9         | Line         |
| 6                        | 496.874k    | 29.8                      | +0.4     | +10.0    |    |                   | +0.0          | 40.2         | 46.1         | -5.9         | Line         |
| 7                        | 21.687M     | 32.5                      | +0.9     | +10.1    |    |                   | +0.0          | 43.5         | 50.0         | -6.5         | Line         |
| 8                        | 477.967k    | 29.3                      | +0.4     | +10.0    |    |                   | +0.0          | 39.7         | 46.4         | -6.7         | Line         |
| 9                        | 2.876M      | 28.4                      | +0.5     | +10.0    |    |                   | +0.0          | 38.9         | 46.0         | -7.1         | Line         |
| 10                       | 3.089M      | 28.4                      | +0.5     | +10.0    |    |                   | +0.0          | 38.9         | 46.0         | -7.1         | Line         |

EMCE Engineering Date: 3/27/2006 Time: 3:34:37 PM Plantronics W/O#: 2495  
EN55022 B COND [AVE] Test Lead: Line 2 120V 60Hz Sequence#: 3

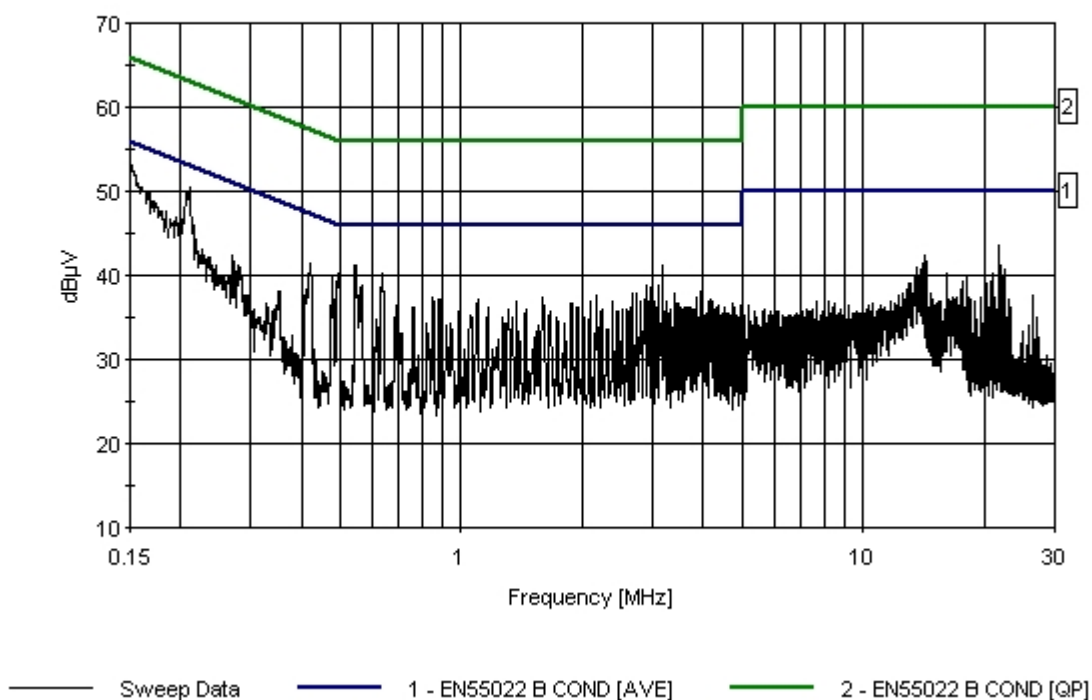

## 7.0 TEST EQUIPMENT

Antenna Conducted Measurements:

| Equipment     | Type                                               | Manufacturer    | Device Number |
|---------------|----------------------------------------------------|-----------------|---------------|
| EMI Analyzer  | 84125B                                             | Hewlett-Packard | E01           |
| Oscilloscope  | TDS820                                             | Tektronix       | E02           |
| Coaxial cable | SMA Male – Reverse<br>SMA Male (Length =<br>20 cm) | Own             | C1            |

Spurious RF radiated emissions:

| Equipment           | Type   | Manufacturer    | Device Number |
|---------------------|--------|-----------------|---------------|
| EMI Analyzer System | 84125B | Hewlett-Packard | E01           |
| Pre-Amp             | 83051A | Hewlett-Packard | E01           |
| Pre-Amp             | 83017A | Hewlett-Packard | E01           |
| High Pass Filter    | 9701   | CMT             | E01           |
| Horn Antenna        | 3115   | EMCO            | E01           |
| Cable               |        | Hewlett Packard | E01           |

Note: The HP 84125B EMC Analyzer System is calibrated as a system, including the analyzer, pre-amps, filters, and cable.

EN 55022 (AC powerline conducted emissions)

| Equipment           | Type                       | Manufacturer    | Device number |
|---------------------|----------------------------|-----------------|---------------|
| EMI Analyzer System | 84125B                     | Hewlett-Packard | E01           |
| LISN                | 3810/2                     | EMCO            | E03           |
| Coaxial cable       | N Type – BNC (5<br>Meters) | Own             | C2            |