



Elliott Laboratories Inc.
www.elliottlabs.com

684 West Maude Avenue
Sunnyvale, CA 94085-3518

408-245-7800 Phone
408-245-3499 Fax

September 23, 2005

Steve Cahill
Plantronics
345 Encinal Street
Santa Cruz, CA 95061-0635

Subject: FCC Emissions Report, CS55 Micro

Dear Mr. Cahill:

A report has been created detailing the results of the FCC electromagnetic emissions testing performed on the CS55 Micro. Please find this report enclosed.

Per Federal Communication Commission regulations, the signature of an official of the company responsible for marketing the CS55 Micro is required, for this report, to be acceptable for determining compliance. We recommend filing this report in a safe place for future reference.

Once an official has signed page 3 of this report, you may begin shipping the CS55 Micro. Each unit must be manufactured with any modifications described in the report, the proper FCC label should be attached and the appropriate FCC statement should be included in the operator's manual.

If you have any questions, please don't hesitate to call us at 408-245-7800.

Sincerely,

A handwritten signature in black ink that reads "Juan Martinez".

Juan Martinez
Senior EMC Engineer


JM/dmg
Enclosure: Emissions Report




Test Certificate

A sample of the following product received on September 15, 2005 and tested on September 15, September 16 and September 20, 2005 complied with the requirements of FCC part 15 subpart B and ICES-003 for a class B product given the measurement uncertainties as detailed in Elliott report R61282.

Plantronics Model CS55 Micro


Juan Martinez
Senior EMC Engineer


Steve Cahill
Plantronics



2016-01

Elliott Laboratories, Inc. is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this certificate. This certificate shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

Elliott Laboratories Inc.
www.elliottlabs.com

684 West Maude Avenue
Sunnyvale, CA 94086-3518

408-245-7800 Phone
408-245-3499

***Electromagnetic Emissions Test Report
for
Verification of Compliance per
FCC Part 15, Subpart B Specifications for a
Class B Digital Device and ICES-003 Class B
and
Subpart D – Unlicensed Personal Communications
Devices
on the
Plantronics
Model: CS55 Micro***


MANUFACTURER: Plantronics
345 Encinal Street
Santa Cruz, CA 95061-0635

TEST SITE: Elliott Laboratories, Inc.
684 W. Maude Avenue
Sunnyvale, CA 94086

REPORT DATE: September 23, 2005

FINAL TEST DATES: September 15, September 16
and September 20, 2005

AUTHORIZED SIGNATORY:



Juan Martinez
Senior EMC Engineer



2016-01

Elliott Laboratories, Inc. is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this report. This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

TABLE OF CONTENTS

COVER PAGE.....1

TABLE OF CONTENTS 2

SCOPE..... 3

VALIDATING SIGNATURES 4

OBJECTIVE..... 4

EMISSION TEST RESULTS 5

 LIMITS OF CONDUCTED INTERFERENCE VOLTAGE.....5

 LIMITS OF RADIATED INTERFERENCE FIELD STRENGTH.....5

 MEASUREMENT UNCERTAINTIES6

EQUIPMENT UNDER TEST (EUT) DETAILS 7

 GENERAL.....7

 OTHER EUT DETAILS7

 ENCLOSURE7

 MODIFICATIONS.....8

 SUPPORT EQUIPMENT.....8

 EUT INTERFACE PORTS8

 EUT OPERATION8

TEST SITE..... 9

 GENERAL INFORMATION.....9

 CONDUCTED EMISSIONS CONSIDERATIONS.....9

 RADIATED EMISSIONS CONSIDERATIONS9

MEASUREMENT INSTRUMENTATION..... 10

 RECEIVER SYSTEM.....10

 INSTRUMENT CONTROL COMPUTER.....10

 LINE IMPEDANCE STABILIZATION NETWORK (LISN).....10

 FILTERS/ATTENUATORS.....11

 ANTENNAS.....11

 ANTENNA MAST AND EQUIPMENT TURNTABLE11

 INSTRUMENT CALIBRATION.....11

TEST PROCEDURES 12

 EUT AND CABLE PLACEMENT12

 CONDUCTED EMISSIONS.....12

 RADIATED EMISSIONS12

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS 13

 CONDUCTED EMISSIONS SPECIFICATION LIMITS.....13

 RADIATED EMISSIONS SPECIFICATION LIMITS.....13

 RADIATED EMISSIONS SPECIFICATION LIMITS.....14

 SAMPLE CALCULATIONS - CONDUCTED EMISSIONS.....14

 SAMPLE CALCULATIONS - RADIATED EMISSIONS15

 APPENDIX A: Test Equipment Calibration Data 1

 APPENDIX B: Test Data Log Sheets..... 2

 APPENDIX C: Radiated Emissions Test Configuration Photographs..... 3

 APPENDIX D: Conducted Emissions Test Configuration Photographs..... 5

 APPENDIX E: Reference Documents 6

 APPENDIX F: FCC Labeling and User Information 7

 APPENDIX G: Industry Canada Information..... 9

SCOPE

The Federal Communications Commission (FCC) establishes rules and regulations regarding the electromagnetic emissions of all electronic devices. An electromagnetic emissions test has been performed on the Plantronics model CS55 pursuant to Subpart B of Part 15 of FCC Rules for digital devices and Subpart D of FCC rules for intentional devices. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-2003 as outlined in Elliott Laboratories test procedures. The test data has been provided as an appendix to this report for reference.

The digital device above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.


Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Plantronics model CS55 Micro and therefore apply only to the tested sample. The sample was selected and prepared by Steve Cahill of Plantronics.

VALIDATING SIGNATURES

The tested sample of the cable location and Class B digital device submitted to and tested by Elliott Laboratories complied with the requirements of subpart B of Part 15 of the Federal Communications Commissions Rules as specified in this report.



Juan Martinez
Senior EMC Engineer
Elliott Laboratories, Inc.

The official of the company responsible for marketing the device tested.



Steve Cahill
Principal Engineer
Plantronics

OBJECTIVE

The primary objective of the manufacturer is compliance with Subpart D for intentional devices and Subpart B of Part 15 of FCC Rules for the radiated and conducted emissions of digital devices. Since the subject device is intended for operation in any environment including residential areas, equipment verification is required.

Equipment verification is a procedure where the manufacturer or a contracted laboratory makes measurements and takes necessary steps to ensure that the equipment complies with the appropriate technical standards. Submittal of a sample unit or test data to the FCC is not required unless specifically requested by the Commission. Once equipment verification has been obtained, a label indicating compliance must be attached to all identical units subsequently manufactured. Specific cautionary information must also be included in the operator's manual. These FCC labeling requirements are included as an appendix to this report.

Maintenance of FCC compliance is the responsibility of the manufacturer. Any modification of the product that may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing and/or I/O cable changes, etc.).

EMISSION TEST RESULTS

The following emissions tests were performed on the Plantronics model CS55 Micro. The actual test results are contained in an appendix of this report.

LIMITS OF CONDUCTED INTERFERENCE VOLTAGE

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.107(a) and 15.315.

The following measurement was extracted from the data recorded during the conducted emissions scan and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an appendix of this report.

120V, 60Hz

Frequency MHz	Level dBuV	Power Lead	Class B		Detector QP/Ave	Comments
			Limit	Margin		
3.683	30.9	Line 1	46.0	-15.1	Peak	

LIMITS OF RADIATED INTERFERENCE FIELD STRENGTH

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.109(g).

The following measurement was extracted from the data recorded during the radiated electric field emissions scan and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an appendix of this report.

Frequency MHz	Level dBuV/m	Pol v/h	Class B		Detector Pk/QP/Avg	Azimuth Degrees	Height Meters	Comments
			Limit	Margin				
912.383	34.2	V	46.0	-11.8	QP	186	1.0	-

MEASUREMENT UNCERTAINTIES

ISO Guide 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.6

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Plantronics model CS55 Micro is a Wireless Telephone Headset Adaptor, which is designed to use the UPCS (Unlicensed Personal Communications Service) band and operate under FCC Part 15 Subpart D. The system is comprised of a headset and associated base unit.

Normally, the base unit would be placed on a tabletop during operation. The headset is either worn behind the ear or placed in a cradle on the headset. The base unit was treated as tabletop equipment during testing to simulate the end-user environment. The headset was tested in the cradle of its respective base unit and also on its own, out of the cradle and oriented as best as possible to represent its intended, behind-the-ear use.

The electrical rating of the base unit is 120 V, 60 Hz, 62.5mAmps (via an external AC-DC adapter). The headset is battery-powered and the batteries are charged from the base unit when the headset is installed in the cradle.

The sample was received on September 15, 2005 and tested on September 15, September 16 and September 20, 2005. The EUT consisted of the following component(s):

Manufacturer	Model	Description	Serial Number	FCC ID
Plantronics	CS55 Micro Headset	Wireless Telephone Headset Adaptor	191	-
Plantronics	CS55 Micro Headset	Wireless Telephone Headset Adaptor	195	-
Plantronics	CS55 Micro Base Unit	Wireless Telephone Base Unit	191	-
Plantronics	CS55 Micro Base Unit	Wireless Telephone Base Unit	195	-

OTHER EUT DETAILS

Preprogrammed Low Channel: CS55 Micro S/N:195
Preprogrammed High Channel: CS55 Micro S/N:191

The low channel is 1921.536MHz, the high channel is 1928.448MHz. The receiver LO operates at 864kHz above the operating frequency.

ENCLOSURE

The base unit enclosure is primarily constructed of plastic. They both measure approximately 10.7 cm wide by 10.4 cm deep by 12.2 cm high.

The CS55 Micro headset enclosure is primarily constructed of plastic. The CS55 micro headset measures approximately 3.0 cm wide by 7.9 cm long by 2.8 cm deep.

MODIFICATIONS

The EUT did not require modifications during testing in order to comply with emissions specifications.

SUPPORT EQUIPMENT

The following equipment was used as local support equipment for emissions testing:

Manufacturer	Model	Description	Serial Number	FCC ID
Plantronics	HL10	Lifter	EMI LTU #1	N/A
Plantronics	OLI	OLI	EMI OTU #1	N/A
Lucent	6416D02A	Telephone	00SP56027794	N/A

No support equipment was used during emissions testing.

EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Base DC power	External AC-DC adapter		unshielded	2
Base PSB bus port	Lifter PSB in	integral to lifter	unshielded	1
Lifter PSB out	OLI	integral to OLI	unshielded	1

EUT OPERATION

For radiated emissions tests below 1GHz the system under test was configured to operate in transmit/receive mode on the high channel. Preliminary measurements demonstrated that emissions below 1GHz were not affected by the operating frequency.

TEST SITE

GENERAL INFORMATION

Final test measurements were taken on September 15, September 16 and September 20, 2005 at the Elliott Laboratories Anechoic Chambers and Open Area Test Site #1 & 2 located at 684 West Maude Avenue, Sunnyvale, California. The test site contains separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4-2003. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a non-anechoic shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an Open Area Test Site or anechoic chamber. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

MEASUREMENT INSTRUMENTATION**RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7 GHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors that are programmed into the test receivers.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material up to 12 mm thick if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An appendix of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES**EUT AND CABLE PLACEMENT**

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

RADIATED EMISSIONS

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically or horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth that results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions that have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted and radiated emissions given below are taken from the first edition of CISPR Pub. 22 (1997), "Limits and Methods of Measurements of Radio Interference Characteristics of Information Technology Equipment." Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The limits are based on the use of an average or quasi-peak detector as indicated.

CONDUCTED EMISSIONS SPECIFICATION LIMITS,

Frequency Range (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

RADIATED EMISSIONS SPECIFICATION LIMITS

Frequency Range (MHz)	Class B Limit (uV/m @ 3m)	Class B Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

RADIATED EMISSIONS SPECIFICATION LIMITS

Note: The limits for radiated emissions above 1000 MHz are based on the use of an average detector. In addition, limits based on the use of a peak detector are specified as 20 dB above the limits based on the use of an average detector.

Frequency (MHz)	Average Limit (uV/m @ 3m)	Average Limit (dBuV/m @ 3m)
above 1000	500	54.0

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

APPENDIX A: Test Equipment Calibration Data

1 Page

Conducted Emissions - AC Power Ports, 15-Sep-05**Engineer: Chris Groat**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Elliott Laboratories	FCC / CISPR LISN	LISN-3, OATS	304	08-Jul-06
Hewlett Packard	EMC Spectrum Analyzer 9kHz - 6.5GHz	8595EM	787	17-Dec-05
Rohde & Schwarz	Test Receiver, 0.009-2750 MHz	ESN	1332	23-May-06
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1398	11-Feb-06

Radiated Emissions, 30 - 6,500 MHz, 16-Sep-05**Engineer: Chris Groat**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Elliott Laboratories	Biconical Antenna, 30-300 MHz	EL30.300	54	07-Mar-07
Elliott Laboratories	Tunable Dipole Antenna	(White)(30-60 MHz)	343	07-Apr-06
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	13-Jan-06
Hewlett Packard	EMC Spectrum Analyzer, 9KHz - 22GHz	8593EM	1319	28-Mar-06
Rohde & Schwarz	Test Receiver, 9kHz-2750MHz	ESCS 30	1337	12-Jan-06
EMCO	Log Periodic Antenna, 0.2-2 GHz	3148	1347	03-Nov-05
ETS-Lindgren	Horn Antenna, D. Ridge 1-18GHz	3117	1662	11-Apr-06

Radiated Emissions, 1000 - 20,000MHz, 20-Sep-05**Engineer: Chris Byleckie**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Horn antenna, D. Ridge 1-18GHz (SA40 system antenna)30Hz sunnyvale	3115	1142	11-Jun-06
Hewlett Packard	EMC Spectrum Analyzer 30Hz - 40GHz, Sunnyvale (SA40)	8564E (84125C)	1148	09-Sep-06
EMCO	Horn antenna, 18-26.5 GHz (SA40 30Hz)	3160-09 (84125C)	1150	12-Sep-06
Hewlett Packard	High Pass filter, 3.5GHz	P/N 84300-80038	1157	28-Apr-06

APPENDIX B: Test Data Log Sheets

ELECTROMAGNETIC EMISSIONS

TEST LOG SHEETS

AND

MEASUREMENT DATA

T61206 9 Pages



EMC Test Data

Client:	Plantronics	Job Number:	J61146
Model:	CS55 Micro	T-Log Number:	T61206
		Account Manager:	Nesha Lambert
Contact:	Blanca Piedra		
Emissions Spec:	EN55022 & FCC	Class:	B
Immunity Spec:	-	Environment:	-

EMC Test Data

For The

Plantronics

Model

CS55 Micro

Date of Last Test: 9/20/2005



EMC Test Data

Client:	Plantronics	Job Number:	J61146
Model:	CS55 Micro	T-Log Number:	T61206
		Account Manager:	Nesha Lambert
Contact:	Blanca Piedra		
Emissions Spec:	EN55022 & FCC	Class:	B
Immunity Spec:	-	Environment:	-

EUT INFORMATION

General Description

The EUT is a Wireless Telephone Headset Adaptor, which is designed to use the UPCS (Unlicensed Personal Communications Service) band and operate under FCC Part 15 Subpart D. The system is comprised of a headset and associated base unit.

Normally, the base unit would be placed on a tabletop during operation. The headset is either worn behind the ear or placed in a cradle on the headset. The base unit was treated as tabletop equipment during testing to simulate the end-user environment. The headset was tested in the cradle of its respective base unit and also on its own, out of the cradle and oriented as best as possible to represent its intended, behind-the-ear use.

The electrical rating of the base unit is 120 V, 60 Hz, 62.5mAmps (via an external AC-DC adapter). The headset is battery-powered and the batteries are charged from the base unit when the headset is installed in the cradle.

Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Plantronics	CS55 Micro Headset	Wireless Telephone Headset Adaptor	191	-
Plantronics	CS55 Micro Headset	Wireless Telephone Headset Adaptor	195	-
Plantronics	CS55 Micro Base Unit	Wireless Telephone Base Unit	191	-
Plantronics	CS55 Micro Base Unit	Wireless Telephone Base Unit	195	-

Other EUT Details

Preprogrammed Low Channel: CS55 Micro S/N:195 Preprogrammed High Channel: CS55 Micro S/N: 191

The CS55 Micro has a shorter microphone boom than the CS55 Headset.

The low channel is 1921.536MHz, the high channel is 1928.448MHz. The receiver LO operates at 864kHz above the operating frequency.

EUT Antenna

The antenna is integral to both headset and base unit, thereby meeting the requirements of FCC 15.203.



EMC Test Data

Client:	Plantronics	Job Number:	J61146
Model:	CS55 Micro	T-Log Number:	T61206
		Account Manager:	Nesha Lambert
Contact:	Blanca Piedra		
Emissions Spec:	EN55022 & FCC	Class:	B
Immunity Spec:	-	Environment:	-

EUT Enclosure

The base unit enclosure is primarily constructed of plastic. They both measure approximately 10.7 cm wide by 10.4 cm deep by 12.2 cm high.

The CS55 Micro headset enclosure is primarily constructed of plastic. The CS55 micro headset measures approximately 3.0 cm wide by 7.9 cm long by 2.8 cm deep.

Modification History

Mod. #	Test	Date	Modification
1	-	-	None

Modifications applied are assumed to be used on subsequent tests unless otherwise stated as a further modification.



EMC Test Data

Client:	Plantronics	Job Number:	J61146
Model:	CS55 Micro	T-Log Number:	T61206
Contact:	Blanca Piedra	Account Manager:	Nesha Lambert
Emissions Spec:	EN55022 & FCC	Class:	B
Immunity Spec:	-	Environment:	-

Test Configuration #1

Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
Plantronics	HL10	Lifter	EMI LTU #1	N/A
Plantronics	OLI	OLI	EMI OTU #1	N/A
Lucent	6416D02A	Telephone	00SP56027794	N/A

Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None				

Interface Cabling and Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Base DC power	External AC-DC adapter		unshielded	2
Base PSB bus port	Lifter PSB in	integral to lifter	unshielded	1
Lifter PSB out	OLI	integral to OLI	unshielded	1

EUT Operation During Emissions Tests

For radiated emissions tests below 1GHz the system under test was configured to operate in transmit/receive mode on the high channel. Preliminary measurements demonstrated that emissions below 1GHz were not affected by the operating frequency.



EMC Test Data

Client:	Plantronics	Job Number:	J61146
Model:	CS55 Micro	T-Log Number:	T61206
		Account Manager:	Nesha Lambert
Contact:	Blanca Piedra		
Spec:	EN55022 & FCC	Class:	B

Conducted Emissions - AC Power Port, CS 55 Micro Base

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/15/2005

Config. Used: 1

Test Engineer: Chris Groat

Config Change: none

Test Location: SVOATS #2

EUT Voltage: 120V/60Hz

General Test Configuration

The EUT was located on a wooden table, 40 cm from a vertical coupling plane and 80cm from the LISN.

Ambient Conditions:

Temperature: 29 °C

Rel. Humidity: 43 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	FCC 15.109/15.209	Pass	See Individual Run

Modifications Made During Testing:



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Plantronics	Job Number: J61146
Model: CS55 Micro	T-Log Number: T61206
Contact: Blanca Piedra	Account Manager: Nesha Lambert
Spec: EN55022 & FCC	Class: B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

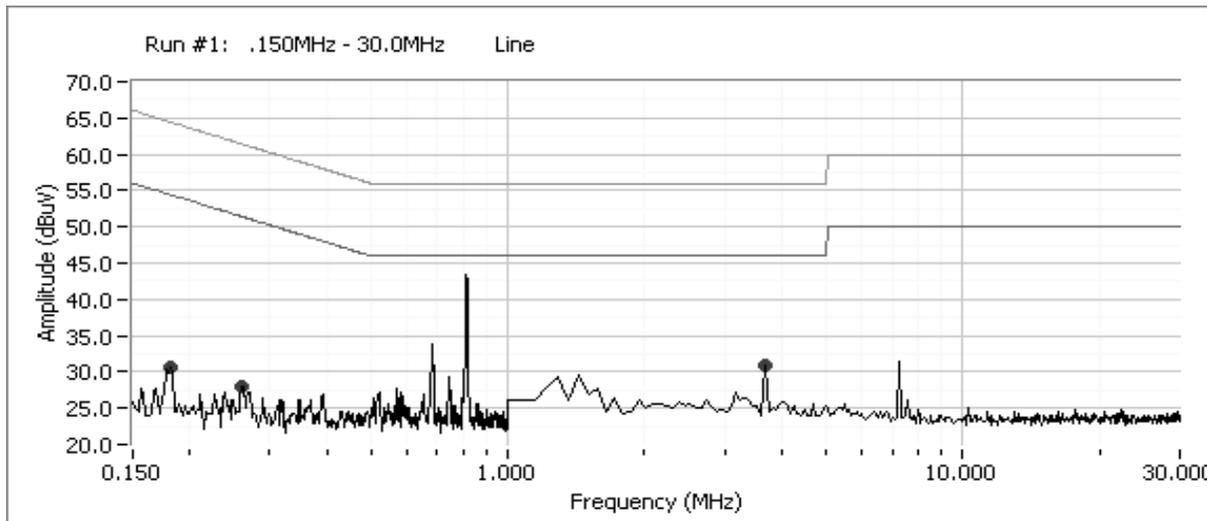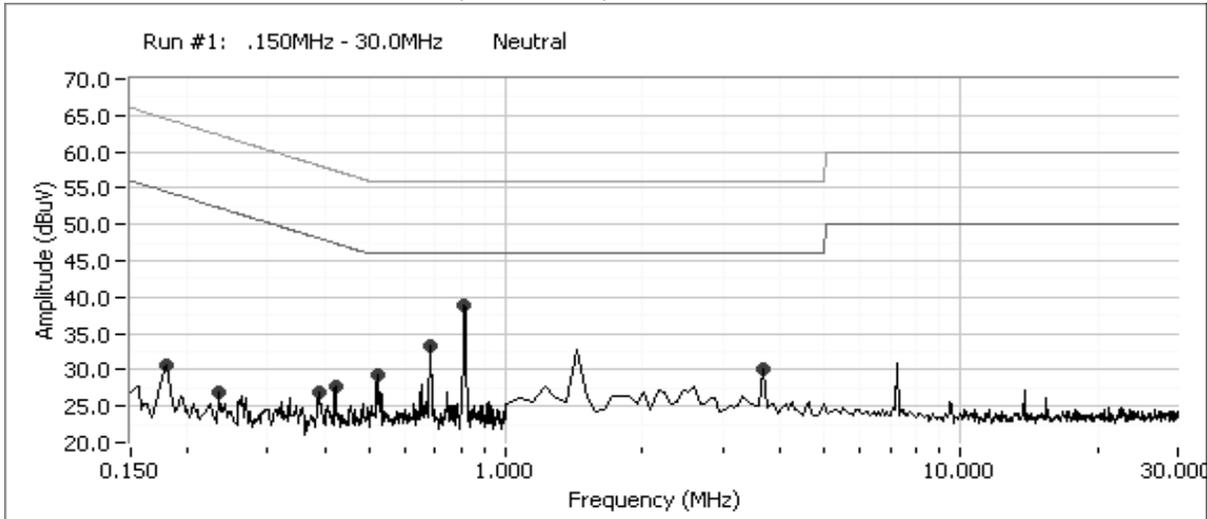



EMC Test Data

Client:	Plantronics	Job Number:	J61146
Model:	CS55 Micro	T-Log Number:	T61206
Contact:	Blanca Piedra	Account Manager:	Nesha Lambert
Spec:	EN55022 & FCC	Class:	B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

Frequency MHz	Level dB μ V	AC Line	FCC 15.109/15.209		Detector QP/Ave	Comments
			Limit	Margin		
3.683	30.9	Line 1	46.0	-15.1	Peak	Note 2
3.683	30.1	Neutral	46.0	-15.9	Peak	Note 2
0.520	29.3	Neutral	46.0	-16.7	Peak	Note 2
0.422	27.6	Neutral	47.4	-19.8	Peak	Note 2
0.389	26.9	Neutral	48.1	-21.2	Peak	Note 2
0.261	27.9	Line 1	51.4	-23.5	Peak	Note 2
0.180	30.7	Line 1	54.5	-23.8	Peak	Note 2
0.180	30.6	Neutral	54.5	-23.9	Peak	Note 2
0.240	26.9	Neutral	52.1	-25.2	Peak	Note 2
0.813	38.9	Neutral	46.0	-7.1	Peak	Ambient Radio
0.683	33.3	Neutral	46.0	-12.7	Peak	Ambient Radio

Note 1: Peak Level Measurements were more than 6dB below the Average Limit so QuasiPeak Measurements were not taken.



EMC Test Data

Client:	Plantronics	Job Number:	J61146
Model:	CS55 Micro	T-Log Number:	T61206
		Account Manager:	Nesha Lambert
Contact:	Blanca Piedra		
Spec:	EN55022 & FCC	Class:	B

Radiated Emissions - CS55 Micro Digital Device/Receiver

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/16/2005

Config. Used: 1

Test Engineer: Chris Groat

Config Change: none

Test Location: SVOATS #1

EUT Voltage: 120V/60Hz

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated emissions testing.

The test distance and extrapolation factor (if used) are detailed under each run description.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Note, for testing above 1 GHz, the FCC specifies the limit as an average measurement. In addition, the FCC states that the peak reading of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

Ambient Conditions:

Temperature:	27 °C
Rel. Humidity:	43 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
2	RE, 30 - 1000MHz, Maximized Emissions	FCC B	Pass	34.2dBµ V/m @ 912.383MHz (-11.8dB)

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	Plantronics	Job Number:	J61146
Model:	CS55 Micro	T-Log Number:	T61206
Contact:	Blanca Piedra	Account Manager:	Nesha Lambert
Spec:	EN55022 & FCC	Class:	B

Run #1: Preliminary Radiated Emissions, 30-1000 MHz

Frequency MHz	Level dB μ V/m	Pol v/h	FCC B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
912.383	34.2	V	46.0	-11.8	QP	186	1.0	
898.553	34.1	V	46.0	-12.2	QP	167	1.1	
930.797	33.7	V	46.0	-12.4	QP	167	1.1	
926.226	35.5	V	46.0	-12.4	QP	165	1.1	
340.991	31.5	H	46.0	-14.0	QP	95	1.0	
327.203	28.6	H	46.0	-15.7	QP	336	1.2	
313.386	27.7	V	46.0	-16.0	QP	153	1.5	
211.953	26.1	H	43.5	-19.0	QP	188	1.5	
188.921	24.1	H	43.5	-19.3	QP	271	1.4	
216.577	23.1	H	46.0	-19.7	QP	331	1.4	
221.171	23.4	H	46.0	-19.7	QP	1	1.6	
82.998	12.5	V	40.0	-22.9	QP	239	1.7	
59.876	11.7	V	40.0	-23.3	QP	299	1.7	

Note 1: S/N: 191

Run #2: Maximized Readings From Run #1

Frequency MHz	Level dB μ V/m	Pol v/h	FCCB		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
912.383	34.2	V	46.0	-11.8	QP	186	1.0	
898.553	34.1	V	46.0	-12.2	QP	167	1.1	
930.797	33.7	V	46.0	-12.4	QP	167	1.1	
926.226	35.5	V	46.0	-12.4	QP	165	1.1	
340.991	31.5	H	46.0	-14.0	QP	95	1.0	
327.203	28.6	H	46.0	-15.7	QP	336	1.2	

Note 1: S/N: 191

APPENDIX E: Reference Documents

Title 47 CFR, Part 2, Subpart I	"Marketing of Radiofrequency Devices"
Title 47 CFR, Part 2, Subpart J	"Equipment Authorization Procedures"
Title 47 CFR, Part 2, Subpart K	"Importation of Devices Capable of Causing Harmful Interference"
Title 47 CFR, Part 15, Subpart B	"Unintentional Radiators"
ANSI C63.4-2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
FCC/OST Bulletin # 61 (1993)	"The FCC Equipment Authorization Program for Radio Frequency Devices"
FCC/OST Bulletin # 62 (1993)	"Understanding the FCC Regulations Concerning Computing Devices"
Title 47 USC, Sections 501-504	Penalties for Non-compliance with FCC Rules
CISPR Pub. 22 (1997)	"Limits and Methods of Measurements of Radio Interference Characteristics of Information Technology Equipment"

APPENDIX F: FCC Labeling and User Information

The following information has been provided to clarify equipment labeling requirements and the information which must be included in the operator's manual. These requirements are found in the FCC Rules for radio frequency devices, Part 15.

LABEL**Digital Device Label**

Each digital device which has been verified as complying with the Class B limits shall have permanently attached in a conspicuous location for the user to observe, a label with the following statement:

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Label Location

The FCC has defined *conspicuous location* as any location readily visible to the user of the device without the use of tools.

Label Attachment

The FCC has defined *permanently attached* as a label that can normally be expected to remain fastened to the equipment during the equipment's expected useful life. A paper gum label will generally not meet this condition.

FCC Labeling and User Information

OPERATOR'S MANUAL

The following warning or similar statement shall be provided in a conspicuous location in the operator's manual such that the user of the equipment is aware of its interference potential. Additional information about corrective measures may also be provided to the user at the manufacturer's option.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Accessories

Where special accessories, such as shielded cables, are required in order to meet FCC emission limits, appropriate instructions regarding the need to use such accessories must be contained on the first page of text concerned with the installation of the device in the operator's manual.

Modifications

The operator's manual must caution the user that changes or modifications not expressly approved by you, the manufacturer, could void their right to operate the equipment.

Binding

The FCC has indicated that the radio interference statement be bound in the same manner as the operator's manual. Thus, a loose-leaf insert page in a bound or center-spine stapled manual would not meet this condition.

APPENDIX G: Industry Canada Information

For ICES-003 (digital apparatus), the product must be labeled with a notice indicating compliance, e.g.

"This Class B digital apparatus complies with Canadian ICES-003."

If it is not feasible to fix a label to the product, the notice may be included in the user manual.

The label or notice may be in English, French or both, based on the intended market, company marketing policies, and any other applicable provincial or federal regulations.