DECLARATION OF COMPLIANCE
SAR RF EXPOSURE EVALUATION

Test Lab

CELLTECH LABS INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Phone: 250-448-7047
Fax: 250-448-7046
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant Information

KENWOOD USA CORPORATION
3975 John Creek Court, Suite 300
Suwanee, GA 30024
United States

FCC IDENTIFER:	**ALH34713110**
IC IDENTIFIER:	**282D-34713110**
Model(s):	**TK-3170-K, TK-3170-K4, TK-3173-K**
Rule Part(s):	**FCC 47 CFR §2.1093; IC RSS-102 Issue 1 (Provisional)**
Test Procedure(s):	**FCC OET Bulletin 65, Supplement C (Edition 01-01)**
Device Classification:	**Licensed Non-Broadcast Transmitter Held to Face (TNF)**
Device Description:	**Portable FM UHF PTT Radio Transceiver**
Modulation:	**FM (UHF)**
Tx Frequency Range:	**450 - 490 MHz**
Max. RF Output Power Measured:	**36.48 dBm Conducted (450.05 MHz)** **36.40 dBm Conducted (470.05 MHz)** **36.37 dBm Conducted (489.95 MHz)**
Antenna Type(s) Tested:	**Stubby 450 - 490 MHz (P/N: KRA-17M)** **Stubby 470 - 512 MHz (P/N: KRA-17M2)** **Stubby 440 - 490 MHz (P/N: KRA-23M)** **Stubby 470 - 520 MHz (P/N: KRA-23M2)** **Whip 440 - 490 MHz (P/N: KRA-27M)** **Whip 470 - 520 MHz (P/N: KRA-27M2)**
Battery Type(s) Tested:	**Alkaline 1.5 V AA x6 (Battery Case P/N: KBP-5)** **(1. Duracell Procell 2850 mAh, 2. Energizer E91 2850 mAh)** **Li-ion 7.4 V, 1400 mAh (P/N: KNB-35L)** **Li-ion 7.4 V, 1400 mAh (P/N: KNB-24L)** **Ni-Cd 7.2 V, 1200 mAh (P/N: KNB-25A)** **Ni-MH 7.2 V, 2000 mAh (P/N: KNB-26N)**
Body-Worn Accessories Tested:	**Plastic Belt-Clip with Metal Spring (P/N: KBH-12)** **Speaker-Microphone (P/N: KMC-17)** **Headset (P/N: KHS-21)**
Max. SAR Levels Evaluated:	**Face-held: 3.91 W/kg (50% Duty Cycle)** **Body-worn: 6.16 W/kg (50% Duty Cycle)**

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 1 (Provisional) for the Occupational / Controlled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Performed By:

Spencer Watson
Compliance Technologist
Celltech Labs Inc.

Reviewed By:

Russell W. Pipe
Senior Compliance Technologist
Celltech Labs Inc.

TABLE OF CONTENTS

1.0	INTRODUCTION……	3
2.0	DESCRIPTION OF DUT……	3
3.0	SAR MEASUREMENT SYSTEM……	4
4.0	MEASUREMENT SUMMARY……	5-11
5.0	DETAILS OF SAR EVALUATION……	12
6.0	EVALUATION PROCEDURES……	12
7.0	SYSTEM PERFORMANCE CHECK……	13
8.0	SIMULATED EQUIVALENT TISSUES……	14
9.0	SAR SAFETY LIMITS……	14
10.0	ROBOT SYSTEM SPECIFICATIONS……	15
11.0	PROBE SPECIFICATION……	16
12.0	PLANAR PHANTOM……	16
13.0	VALIDATION PHANTOM……	16
14.0	DEVICE HOLDER……	16
15.0	TEST EQUIPMENT LIST……	17
16.0	MEASUREMENT UNCERTAINTIES……	18-19
17.0	REFERENCES……	20
APPENDIX A - SAR MEASUREMENT DATA……		21
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA……		22
APPENDIX C - SYSTEM VALIDATION PROCEDURES……		23
APPENDIX D - PROBE CALIBRATION……		24
APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS……		25
APPENDIX F - SAR TEST SETUP & DUT PHOTOGRAPHS……		26

1.0 INTRODUCTION

This measurement report demonstrates compliance of the Kenwood USA Corporation Models: TK-3170-K, TK-3170-K4, TK-3173-K Portable FM UHF PTT Radio Transceiver FCC ID: ALH34713110 with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]), and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 1 (Provisional) (see reference [4]), were employed. A description of the product, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)

FCC Rule Part(s)	47 CFR §2.1093			
IC Rule Part(s)	RSS-102 Issue 1 (Provisional)			
Test Procedure(s)	FCC OET Bulletin 65, Supplement C (Edition 01-01)			
Device Classification	Licensed Non-Broadcast Transmitter Held to Face (TNF)			
Device Type	Portable FM UHF PTT Radio Transceiver			
FCC IDENTIFIER	ALH34713110			
IC IDENTIFIER	282D-34713110			
Model(s)	TK-3170-K	TK-3170-K4	TK-3173-K	
Serial No.	1S-U1-21	Identical Prototype		
Modulation	FM (UHF)			
Tx Frequency Range	450 - 490 MHz			
Max. RF Output Power Measured	36.48 dBm	Conducted	450.05 MHz	
	36.40 dBm	Conducted	470.05 MHz	
	36.37 dBm	Conducted	489.95 MHz	
Antenna Type(s) Tested	Stubby	KRA-17M	Length: 82 mm	450 - 490 MHz
	Stubby	KRA-17M2	Length: 78 mm	470 - 512 MHz
	Stubby	KRA-23M	Length: 83 mm	440 - 490 MHz
	Stubby	KRA-23M2	Length: 83 mm	470 - 520 MHz
	Whip	KRA-27M	Length: 153 mm	400 - 490 MHz
	Whip	KRA-27M2	Length: 143 mm	470 - 520 MHz
Battery Type(s) Tested	Alkaline	1.5 V AA (x6)	Duracell 2850 mAh	Battery Case P/N: KBP-5
			Energizer 2850 mAh	
	Li-ion	7.4 V, 1400 mAh		P/N: KNB-35L
	Li-ion	7.4 V, 1400 mAh		P/N: KNB-24L
	Ni-Cd	7.2 V, 1200 mAh		P/N: KNB-25A
	Ni-MH	7.2 V, 2000 mAh		P/N: KNB-26N
Body-Worn Accessories Tested	Plastic Belt-Clip with Metal Spring		P/N: KBH-12	
	Speaker-Microphone		P/N: KMC-17	
	Headset		P/N: KHS-21	

3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

DASY4 SAR Measurement System with validation phantom

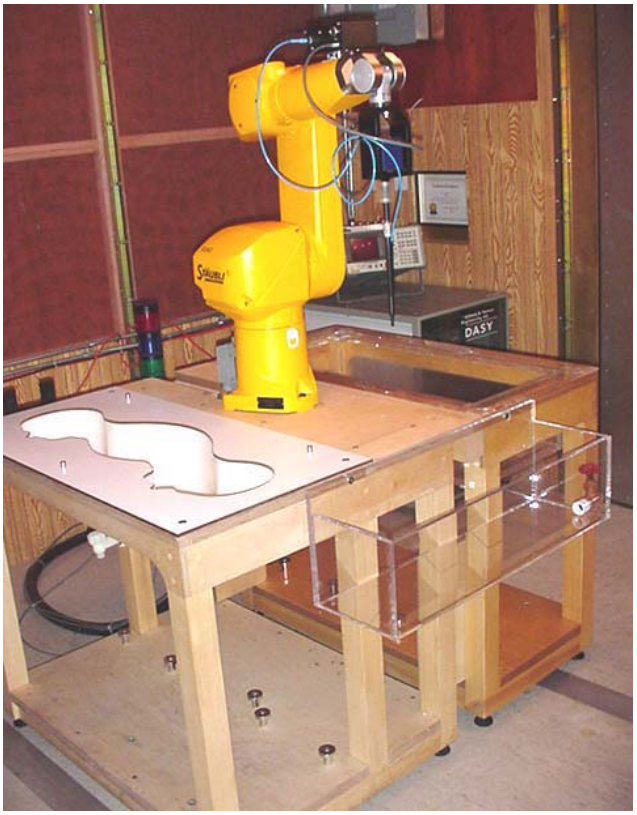

DASY4 SAR Measurement System with Plexiglas planar phantom

4.0 MEASUREMENT SUMMARY

FACE-HELD SAR EVALUATION RESULTS

Freq. (MHz)	Chan.	Test Mode	Antenna Type	Antenna Part No.	Battery Type	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	Measured SAR 1g (W/kg) Duty Cycle 100%	Measured SAR 1g (W/kg) Duty Cycle 50%	SAR Drift During Test (dB)	Scaled SAR 1g (W/kg) Duty Cycle 100%	Scaled SAR 1g (W/kg) Duty Cycle 50%
470.05	Mid	CW	Stubby	KRA-17M	KBP-5 Duracell	2.5	36.21	6.36	3.18	-0.895	7.82	3.91
470.05	Mid	CW	Stubby	KRA-17M	KNB-35L Li-ion	2.5	36.34	7.23	3.62	-0.00492	7.24	3.62
470.05	Mid	CW	Stubby	KRA-17M	KNB-24L Li-ion	2.5	36.27	6.91	3.46	-0.161	7.17	3.59
470.05	Mid	CW	Stubby	KRA-17M	KNB-25A Ni-Cd	2.5	36.36	7.24	3.62	-0.138	7.47	3.74
470.05	Mid	CW	Stubby	KRA-17M	KNB-26N Ni-MH	2.5	36.33	7.04	3.52	-0.130	7.25	3.63
489.95	High	CW	Stubby	KRA-17M2	KBP-5 Duracell	2.5	36.05	5.20	2.60	-1.12	6.73	3.36
470.05	Mid	CW	Whip	KRA-27M	KBP-5 Duracell	2.5	36.22	5.68	2.84	-0.842	6.90	3.45
470.05	Mid	CW	Whip	KRA-27M	KNB-35L Li-ion	2.5	36.35	6.20	3.10	-0.137	6.40	3.20
470.05	Mid	CW	Whip	KRA-27M	KNB-24L Li-ion	2.5	36.18	5.87	2.94	-0.241	6.20	3.10
470.05	Mid	CW	Whip	KRA-27M	KNB-25A Ni-Cd	2.5	36.26	6.15	3.08	-0.211	6.46	3.23
470.05	Mid	CW	Whip	KRA-27M	KNB-26N Ni-MH	2.5	36.29	6.16	3.08	-0.222	6.48	3.24
489.95	High	CW	Whip	KRA-27M2	KBP-5 Duracell	2.5	36.02	5.00	2.50	-1.03	6.34	3.17

ANSI / IEEE C95.1 1999 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BRAIN: 8.0 W/kg (averaged over 1 gram)

Test Date	October 20, 2004			**Relative Humidity**	34	%
Measured Fluid Type	**450 MHz Brain**			**Atmospheric Pressure**	101.5	kPa
Dielectric Constant ε_r	**IEEE Target**		**Measured**	**Ambient Temperature**	23.6	°C
	43.5	**± 5%**	44.0	**Fluid Temperature**	22.9	°C
Conductivity σ (mho/m)	**IEEE Target**		**Measured**	**Fluid Depth**	≥ 15	cm
	0.87	**± 5%**	0.87	ρ (Kg/m^3)	1000	

Note(s):

1. The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
2. If the scaled SAR levels at the mid channel (50% duty cycle) were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
3. The power drifts measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above table.
4. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
5. The dielectric parameters of the simulated tissue mixture were measured prior to the evaluation using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).
6. The SAR evaluations were performed within 24 hours of the system performance check.

MEASUREMENT SUMMARY (Cont.)

FACE-HELD SAR EVALUATION RESULTS

Freq. (MHz)	Chan.	Test Mode	Antenna Type	Antenna Part No.	Battery Type	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	Measured SAR 1g (W/kg) Duty Cycle 100%	Measured SAR 1g (W/kg) Duty Cycle 50%	SAR Drift During Test (dB)	Scaled SAR 1g (W/kg) Duty Cycle 100%	Scaled SAR 1g (W/kg) Duty Cycle 50%
470.05	Mid	CW	Stubby	KRA-23M	KBP-5 Duracell	2.5	36.16	6.02	3.01	-0.979	7.54	3.77
470.05	Mid	CW	Stubby	KRA-23M	KNB-35L Li-ion	2.5	36.25	6.88	3.44	-0.123	7.08	3.54
470.05	Mid	CW	Stubby	KRA-23M	KNB-24L Li-ion	2.5	36.18	6.42	3.21	-0.308	6.89	3.45
470.05	Mid	CW	Stubby	KRA-23M	KNB-25A Ni-Cd	2.5	36.26	6.64	3.32	-0.562	7.56	3.78
470.05	Mid	CW	Stubby	KRA-23M	KNB-26N Ni-MH	2.5	36.23	6.76	3.38	-0.582	7.73	3.86
489.95	High	CW	Stubby	KRA-23M2	KNB-26N Ni-MH	2.5	36.25	5.73	2.87	-0.599	6.58	3.29

ANSI / IEEE C95.1 1999 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BRAIN: 8.0 W/kg (averaged over 1 gram)

Test Date	October 21, 2004			**Relative Humidity**	33	%
Measured Fluid Type	**450 MHz Brain**			**Atmospheric Pressure**	101.9	kPa
Dielectric Constant ε_r	**IEEE Target**		**Measured**	**Ambient Temperature**	23.7	°C
	43.5	**± 5%**	43.5	**Fluid Temperature**	23.3	°C
Conductivity σ (mho/m)	**IEEE Target**		**Measured**	**Fluid Depth**	≥ 15	cm
	0.87	**± 5%**	0.86	**ρ (Kg/m^3)**	1000	

Note(s):

1. The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
2. If the scaled SAR levels at the mid channel (50% duty cycle) were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
3. The power drifts measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above table.
4. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
5. The dielectric parameters of the simulated tissue mixture were measured prior to the evaluation using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).
6. The SAR evaluations were performed within 24 hours of the system performance check.

MEASUREMENT SUMMARY (Cont.)

BODY-WORN SAR EVALUATION RESULTS

Freq. (MHz)	Chan.	Test Mode	Antenna Type	Antenna Part No.	Battery Type	Body-worn Accessories	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	Measured SAR 1g (W/kg) Duty Cycle 100%	Measured SAR 1g (W/kg) Duty Cycle 50%	SAR Drift During Test (dB)	Scaled SAR 1g (W/kg) Duty Cycle 100%	Scaled SAR 1g (W/kg) Duty Cycle 50%
470.05	Mid	CW	Whip	KRA-27M	KBP-5 Duracell	Speaker-Mic Belt-Clip	1.0	36.15	8.74	4.37	-0.904	10.8	5.38
470.05	Mid	CW	Whip	KRA-27M	KNB-35L Li-ion	Speaker-Mic Belt-Clip	1.4	36.20	9.67	4.84	-0.169	10.1	5.03
470.05	Mid	CW	Whip	KRA-27M	KNB-24L Li-ion	Speaker-Mic Belt-Clip	1.4	36.18	8.75	4.38	-0.304	9.38	4.69
470.05	Mid	CW	Whip	KRA-27M	KNB-25A Ni-Cd	Speaker-Mic Belt-Clip	0.9	36.25	9.70	4.85	-0.307	10.4	5.21
470.05	Mid	CW	Whip	KRA-27M	KNB-26N Ni-MH	Speaker-Mic Belt-Clip	0.9	36.28	9.46	4.73	-0.285	10.1	5.05
450.05	Low	CW	Whip	KRA-27M	KBP-5 Duracell	Speaker-Mic Belt-Clip	1.0	36.30	6.90	3.45	-0.615	7.95	3.97
489.95	High	CW	Whip	KRA-27M	KBP-5 Duracell	Speaker-Mic Belt-Clip	1.0	36.05	7.41	3.71	-0.953	9.23	4.61
489.95	High	CW	Whip	KRA-27M2	KBP-5 Duracell	Speaker-Mic Belt-Clip	1.0	36.01	8.05	4.03	-1.06	10.3	5.14

ANSI / IEEE C95.1 1999 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BODY: 8.0 W/kg (averaged over 1 gram)

Test Date	October 21, 2004			**Relative Humidity**	32	**%**
Measured Fluid Type	**450 MHz Body**			**Atmospheric Pressure**	101.8	**kPa**
Dielectric Constant ε_r	**IEEE Target**		**Measured**	**Ambient Temperature**	24.5	**°C**
	56.7	**± 5%**	57.1	**Fluid Temperature**	23.6	**°C**
Conductivity σ (mho/m)	**IEEE Target**		**Measured**	**Fluid Depth**	≥ 15	**cm**
	0.94	**± 5%**	0.91	**ρ (Kg/m^3)**	1000	

Note(s):

1. The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
2. If the scaled SAR levels at the mid channel (50% duty cycle) were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
3. The power drifts measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above table.
4. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
5. The dielectric parameters of the simulated tissue mixture were measured prior to the evaluation using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).
6. The SAR evaluations were performed within 24 hours of the system performance check.

MEASUREMENT SUMMARY (Cont.)

BODY-WORN SAR EVALUATION RESULTS

Freq. (MHz)	Chan.	Test Mode	Antenna Type	Antenna Part No.	Battery Type	Body-worn Accessories	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	Measured SAR 1g (W/kg) Duty Cycle 100%	Measured SAR 1g (W/kg) Duty Cycle 50%	SAR Drift During Test (dB)	Scaled SAR 1g (W/kg) Duty Cycle 100%	Scaled SAR 1g (W/kg) Duty Cycle 50%
470.05	Mid	CW	Whip	KRA-27M	KBP-5 Duracell	Headset Belt-Clip	1.0	36.26	7.73	3.87	-0.845	9.39	4.70
470.05	Mid	CW	Whip	KRA-27M	KNB-35L Li-ion	Headset Belt-Clip	1.4	36.36	8.68	4.34	-0.125	8.93	4.47
470.05	Mid	CW	Whip	KRA-27M	KNB-24L Li-ion	Headset Belt-Clip	1.4	36.32	8.40	4.20	-0.293	8.99	4.49
470.05	Mid	CW	Whip	KRA-27M	KNB-25A Ni-Cd	Headset Belt-Clip	0.9	36.35	9.25	4.63	-0.274	9.85	4.93
470.05	Mid	CW	Whip	KRA-27M	KNB-26N Ni-MH	Headset Belt-Clip	0.9	36.36	8.62	4.31	-0.231	9.09	4.55
450.05	Low	CW	Whip	KRA-27M	KNB-25A Ni-Cd	Headset Belt-Clip	0.9	36.47	7.03	3.52	-0.0683	7.14	3.57
489.95	High	CW	Whip	KRA-27M	KNB-25A Ni-Cd	Headset Belt-Clip	0.9	36.37	8.51	4.26	-0.453	9.45	4.72
489.95	High	CW	Whip	KRA-27M2	KNB-25A Ni-Cd	Headset Belt-Clip	0.9	36.33	9.06	4.53	-0.448	10.0	5.02
470.05	Mid	CW	Stubby	KRA-23M	KBP-5 Duracell	Headset Belt-Clip	1.0	36.24	8.09	4.05	-1.01	10.2	5.10
470.05	Mid	CW	Stubby	KRA-23M	KNB-35L Li-ion	Headset Belt-Clip	1.4	36.37	10.5	5.25	-0.293	11.2	5.62
470.05	Mid	CW	Stubby	KRA-23M	KNB-24L Li-ion	Headset Belt-Clip	1.4	36.34	9.00	4.50	-0.468	10.0	5.01
470.05	Mid	CW	Stubby	KRA-23M	KNB-25A Ni-Cd	Headset Belt-Clip	0.9	36.29	9.04	4.52	-0.453	10.0	5.02
470.05	Mid	CW	Stubby	KRA-23M	KNB-26N Ni-MH	Headset Belt-Clip	0.9	36.28	9.72	4.86	-0.597	11.2	5.58
450.05	Low	CW	Stubby	KRA-23M	KNB-35L Li-ion	Headset Belt-Clip	1.4	36.43	6.96	3.48	0.0469	6.96	3.48
489.95	High	CW	Stubby	KRA-23M	KNB-35L Li-ion	Headset Belt-Clip	1.4	36.18	7.40	3.70	-0.323	7.97	3.99
489.95	High	CW	Stubby	KRA-23M2	KNB-35L Li-ion	Headset Belt-Clip	1.4	36.21	9.54	4.77	-0.311	10.2	5.12

ANSI / IEEE C95.1 1999 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BODY: 8.0 W/kg (averaged over 1 gram)

Test Date	October 22, 2004			**Relative Humidity**	33	%
Measured Fluid Type	**450 MHz Body**			**Atmospheric Pressure**	101.3	kPa
Dielectric Constant ε_r	**IEEE Target**		**Measured**	**Ambient Temperature**	23.9	°C
	56.7	**± 5%**	56.6	**Fluid Temperature**	23.1	°C
Conductivity σ (mho/m)	**IEEE Target**		**Measured**	**Fluid Depth**	≥ 15	cm
	0.94	**± 5%**	0.90	**ρ (Kg/m³)**	1000	

Note(s):

1. The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
2. If the scaled SAR levels at the mid channel (50% duty cycle) were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
3. The power drifts measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above table.
4. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
5. The dielectric parameters of the simulated tissue mixture were measured prior to the evaluation using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).
6. The SAR evaluations were performed within 24 hours of the system performance check.

MEASUREMENT SUMMARY (Cont.)

BODY-WORN SAR EVALUATION RESULTS

Test Date(s)	Freq. (MHz)	Chan.	Test Mode	Antenna Type	Antenna Part No.	Battery Type	Body-worn Accessories	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	Measured SAR 1g (W/kg) Duty Cycle 100%	Measured SAR 1g (W/kg) Duty Cycle 50%	SAR Drift During Test (dB)	Scaled SAR 1g (W/kg) Duty Cycle 100%	Scaled SAR 1g (W/kg) Duty Cycle 50%
Oct-22	470.05	Mid	CW	Stubby	KRA-23M	KBP-5 Duracell	Speaker-Mic Belt-Clip	1.0	36.22	8.08	4.04	-1.18	10.6	5.30
Oct-22	470.05	Mid	CW	Stubby	KRA-23M	KNB-35L Li-ion	Speaker-Mic Belt-Clip	1.4	36.31	10.3	5.15	-0.328	11.1	5.55
Oct-22	470.05	Mid	CW	Stubby	KRA-23M	KNB-24L Li-ion	Speaker-Mic Belt-Clip	1.4	36.24	9.17	4.59	-0.501	10.3	5.15
Oct-22	470.05	Mid	CW	Stubby	KRA-23M	KNB-25A Ni-Cd	Speaker-Mic Belt-Clip	0.9	36.30	9.24	4.62	-0.531	10.4	5.22
Oct-22	470.05	Mid	CW	Stubby	KRA-23M	KNB-26N Ni-MH	Speaker-Mic Belt-Clip	0.9	36.27	9.00	4.50	-0.536	10.2	5.09
Oct-22	450.05	Low	CW	Stubby	KRA-23M	KNB-35L Li-ion	Speaker-Mic Belt-Clip	1.4	36.39	7.38	3.69	0.0709	7.38	3.69
Oct-22	489.95	High	CW	Stubby	KRA-23M	KNB-35L Li-ion	Speaker-Mic Belt-Clip	1.4	36.15	6.95	3.48	-0.381	7.59	3.79
Oct-23	489.95	High	CW	Stubby	KRA-23M2	KNB-35L Li-ion	Speaker-Mic Belt-Clip	1.4	36.24	9.22	4.61	-0.291	9.86	4.93

ANSI / IEEE C95.1 1999 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BODY: 8.0 W/kg (averaged over 1 gram)

Test Date(s)	October 22, 2004			October 23, 2004		
Measured Fluid Type	450 MHz Body			450 MHz Body		
Dielectric Constant ε_r	IEEE Target		Measured	IEEE Target		Measured
	56.7	± 5%	56.6	56.7	± 5%	56.8
Conductivity σ (mho/m)	450 MHz Body			450 MHz Body		
	IEEE Target		Measured	IEEE Target		Measured
	0.94	± 5%	0.90	0.94	± 5%	0.90

Test Date(s)	Oct-22	Oct-23	Unit
Relative Humidity	33	31	%
Atmospheric Pressure	101.3	101.7	kPa
Ambient Temperature	23.9	23.2	°C
Fluid Temperature	23.1	23.2	°C
Fluid Depth	≥ 15	≥ 15	cm
ρ (Kg/m^3)	1000		

Note(s):

1. The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
2. If the scaled SAR levels at the mid channel (50% duty cycle) were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
3. The power drifts measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above table.
4. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
5. The dielectric parameters of the simulated tissue mixture were measured prior to the evaluation using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).
6. The SAR evaluations were performed within 24 hours of the system performance check.

MEASUREMENT SUMMARY (Cont.)

BODY-WORN SAR EVALUATION RESULTS

Freq. (MHz)	Chan.	Test Mode	Antenna Type	Antenna Part No.	Battery Type	Body-worn Accessories	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	Measured SAR 1g (W/kg) Duty Cycle 100%	Measured SAR 1g (W/kg) Duty Cycle 50%	SAR Drift During Test (dB)	Scaled SAR 1g (W/kg) Duty Cycle 100%	Scaled SAR 1g (W/kg) Duty Cycle 50%
470.05	Mid	CW	Stubby	KRA-17M	KBP-5 Duracell	Headset Belt-Clip	1.0	36.29	8.81	4.41	-1.07	11.3	5.64
470.05	Mid	CW	Stubby	KRA-17M	KNB-35L Li-ion	Headset Belt-Clip	1.4	36.40	11.6	5.8	-0.141	12.0	5.99
470.05	Mid	CW	Stubby	KRA-17M	KNB-24L Li-ion	Headset Belt-Clip	1.4	36.29	10.1	5.05	-0.370	11.0	5.50
470.05	Mid	CW	Stubby	KRA-17M	KNB-25A Ni-Cd	Headset Belt-Clip	0.9	36.35	10.5.	5.25	-0.358	11.4	5.70
470.05	Mid	CW	Stubby	KRA-17M	KNB-26N Ni-MH	Headset Belt-Clip	0.9	36.39	10.7	5.35	-0.453	11.9	5.94
450.05	Low	CW	Stubby	KRA-17M	KNB-35L Li-ion	Headset Belt-Clip	1.4	36.48	6.03	3.02	-0.0295	6.07	3.04
489.95	High	CW	Stubby	KRA-17M	KNB-35L Li-ion	Headset Belt-Clip	1.4	36.27	8.80	4.40	-0.368	9.58	4.79
489.95	High	CW	Stubby	KRA-17M2	KNB-35L Li-ion	Headset Belt-Clip	1.4	36.24	10.2	5.10	-0.250	10.8	5.40

ANSI / IEEE C95.1 1999 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BODY: 8.0 W/kg (averaged over 1 gram)

Test Date	October 23, 2004			**Relative Humidity**	31	**%**
Measured Fluid Type	**450 MHz Body**			**Atmospheric Pressure**	101.7	**kPa**
Dielectric Constant ε_r	**IEEE Target**		**Measured**	**Ambient Temperature**	23.2	**°C**
	56.7	**± 5%**	56.8	**Fluid Temperature**	23.2	**°C**
Conductivity σ (mho/m)	**IEEE Target**		**Measured**	**Fluid Depth**	≥ 15	**cm**
	0.94	**± 5%**	0.90	**ρ (Kg/m^3)**	1000	

Note(s):

1. The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
2. If the scaled SAR levels at the mid channel (50% duty cycle) were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
3. The power drifts measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above table.
4. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
5. The dielectric parameters of the simulated tissue mixture were measured prior to the evaluation using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).
6. The SAR evaluations were performed within 24 hours of the system performance check.

MEASUREMENT SUMMARY (Cont.)

BODY-WORN SAR EVALUATION RESULTS

Test Date	Freq. (MHz)	Chan.	Test Mode	Antenna Type	Antenna Part No.	Battery Type	Body-worn Accessories	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	Measured SAR 1g (W/kg) Duty Cycle 100%	Measured SAR 1g (W/kg) Duty Cycle 50%	SAR Drift During Test (dB)	Scaled SAR 1g (W/kg) Duty Cycle 100%	Scaled SAR 1g (W/kg) Duty Cycle 50%
Oct-23	470.05	Mid	CW	Stubby	KRA-17M	KBP-5 Duracell	Speaker-Mic Belt-Clip	1.0	36.27	9.03	4.52	-1.08	11.6	5.79
Oct-23	470.05	Mid	CW	Stubby	KRA-17M	KNB-35L Li-ion	Speaker-Mic Belt-Clip	1.4	36.38	11.7	5.85	-0.222	12.3	6.16
Oct-24	470.05	Mid	CW	Stubby	KRA-17M	KNB-24L Li-ion	Speaker-Mic Belt-Clip	1.4	36.26	10.3	5.15	-0.402	11.3	5.65
Oct-24	470.05	Mid	CW	Stubby	KRA-17M	KNB-25A Ni-Cd	Speaker-Mic Belt-Clip	0.9	36.40	11.0	5.50	-0.443	12.2	6.09
Oct-24	470.05	Mid	CW	Stubby	KRA-17M	KNB-26N Ni-MH	Speaker-Mic Belt-Clip	0.9	36.36	10.7	5.35	-0.429	11.8	5.91
Oct-24	450.05	Low	CW	Stubby	KRA-17M	KNB-35L Li-ion	Speaker-Mic Belt-Clip	1.4	36.36	6.47	3.24	-0.0440	6.54	3.27
Oct-24	489.95	High	CW	Stubby	KRA-17M	KNB-35L Li-ion	Speaker-Mic Belt-Clip	1.4	36.15	7.97	3.99	-0.435	8.81	4.40
Oct-24	489.95	High	CW	Stubby	KRA-17M2	KNB-35L Li-ion	Speaker-Mic Belt-Clip	1.4	36.16	9.59	4.80	-0.304	10.3	5.14
Oct-24	470.05	Mid	CW	Stubby	KRA-17M	KBP-5 Energizer*	Speaker-Mic Belt-Clip	1.0	36.13	9.19	4.60	-1.09	11.8	5.91

ANSI / IEEE C95.1 1999 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BODY: 8.0 W/kg (averaged over 1 gram)

Test Date(s)	October 23, 2004			October 24, 2004			Test Date(s)	Oct-23	Oct-24	Unit
Measured Fluid Type	450 MHz Body			450 MHz Body			Relative Humidity	31	31	%
Dielectric Constant ε_r	IEEE Target		Measured	IEEE Target		Measured	Atmospheric Pressure	101.7	102.2	kPa
	56.7	± 5%	56.8	56.7	± 5%	57.4	Ambient Temperature	23.2	23.5	°C
Conductivity σ (mho/m)	450 MHz Body			450 MHz Body			Fluid Temperature	23.2	22.7	°C
	IEEE Target		Measured	IEEE Target		Measured	Fluid Depth	≥ 15	≥ 15	cm
	0.94	± 5%	0.90	0.94	± 5%	0.89	ρ (Kg/m^3)	1000		

Note(s):

1. The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
2. If the scaled SAR levels at the mid channel (50% duty cycle) were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
3. The power drifts measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above table.
4. A SAR-versus-Time power drift evaluation was performed in the test configuration that reported the maximum-scaled SAR level (body-worn, mid channel, Li-ion Battery, Stubby Antenna P/N: KRA-17M, with Speaker-Mic and Belt-Clip accessories). See Appendix A (SAR Test Plots) for SAR-versus-Time power drift evaluation plot.
5. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
6. The dielectric parameters of the simulated tissue mixture were measured prior to the evaluation using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).
7. The SAR evaluations were performed within 24 hours of the system performance check.

* The DUT was evaluated for SAR with Duracell Procell alkaline batteries. To report a SAR comparison between alternate alkaline battery types, the maximum scaled SAR level configuration evaluated with Duracell Procell alkaline batteries (Mid Channel, Stubby Antenna P/N: KRA-17M, with Speaker-Mic and Belt-Clip accessories) was repeated using Energizer E91 alkaline batteries as shown in the above table.

5.0 DETAILS OF SAR EVALUATION

The Kenwood USA Corporation Models: TK-3170-K, TK-3170-K4, TK-3173-K Portable FM UHF PTT Radio Transceiver FCC ID: ALH34713110 was compliant for localized Specific Absorption Rate (Occupational / Controlled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix F.

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm separation distance was maintained between the front side of the DUT and the outer surface of the planar phantom for the duration of the tests.
2. The DUT was evaluated in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached belt-clip accessory was touching the planar phantom. With the Alkaline Battery Case the belt-clip accessory provided a 1.0 cm separation distance between the back of the DUT and the outer surface of the planar phantom. With the Li-ion battery the belt-clip accessory provided a 1.4 cm separation distance between the back of the DUT and the outer surface of the planar phantom. With the Ni-Cd and Ni-MH batteries, the belt-clip accessory provided a 0.9 cm separation distance between the back of the DUT and the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with the speaker-microphone and headset audio accessories connected consecutively.
3. The conducted power levels were measured before each test using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046. It was noted that the power levels measured with the alkaline batteries resulted in up to 8% lower conducted power levels than with the Li-ion, NiMH, and NiCd batteries. The power measurement procedure was consistent for all battery types and measurement durations, therefore it was determined that the power measurements taken with alkaline batteries were reporting a worst-case conducted power level.
4. A SAR-versus-Time power drift evaluation was performed in the test configuration that reported the highest scaled SAR level (Body-Worn, Mid Channel, Stubby Antenna P/N: KRA-17M, Li-ion Battery, and Speaker-Microphone audio accessory). See Appendix A (SAR Test Plots) for SAR-versus-Time power drift evaluation plot.
5. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down to room temperature and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
6. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
7. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
8. The dielectric parameters of the simulated tissue mixture were measured prior to the evaluation using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).
9. The SAR evaluations were performed using a Plexiglas planar phantom.
10. A stack of low-density, low-loss dielectric foamed polystyrene was used in place of the device holder.

6.0 EVALUATION PROCEDURES

a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.

b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:

c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.

d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:

e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away form the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix D). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.

f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).

g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluation a system check was performed using a planar phantom with a 450MHz dipole (see Appendix C for system validation procedure). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters). A forward power of 250mW was applied to the dipole and the system was verified to a tolerance of ±10% (see Appendix B for system performance check test plots).

SYSTEM PERFORMANCE CHECK

Test Date	450MHz Equiv. Tissue	SAR 1g (W/kg)		Dielectric Constant ε_r		Conductivity σ (mho/m)		ρ (Kg/m^3)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		IEEE Target	Measured	IEEE Target	Measured	IEEE Target	Measured						
10/20/04	**Brain**	**1.23 (±10%)**	1.27 (+3.3%)	**43.5 ±5%**	44.0	**0.87 ±5%**	0.87	1000	23.6	22.9	≥ 15	36	101.6
10/21/04	**Brain**	**1.23 (±10%)**	1.25 (+1.6%)	**43.5 ±5%**	43.5	**0.87 ±5%**	0.86	1000	23.8	23.3	≥ 15	32	101.9
10/22/04	**Brain**	**1.23 (±10%)**	1.26 (+2.4%)	**43.5 ±5%**	43.3	**0.87 ±5%**	0.86	1000	23.5	23.5	≥ 15	32	101.3
10/23/04	**Brain**	**1.23 (±10%)**	1.27 (+3.3%)	**43.5 ±5%**	43.4	**0.87 ±5%**	0.86	1000	23.0	22.8	≥ 15	32	101.9
10/24/04	**Brain**	**1.23 (±10%)**	1.27 (+3.3%)	**43.5 ±5%**	43.5	**0.87 ±5%**	0.85	1000	23.3	22.8	≥ 15	32	102.2

Note(s):
1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

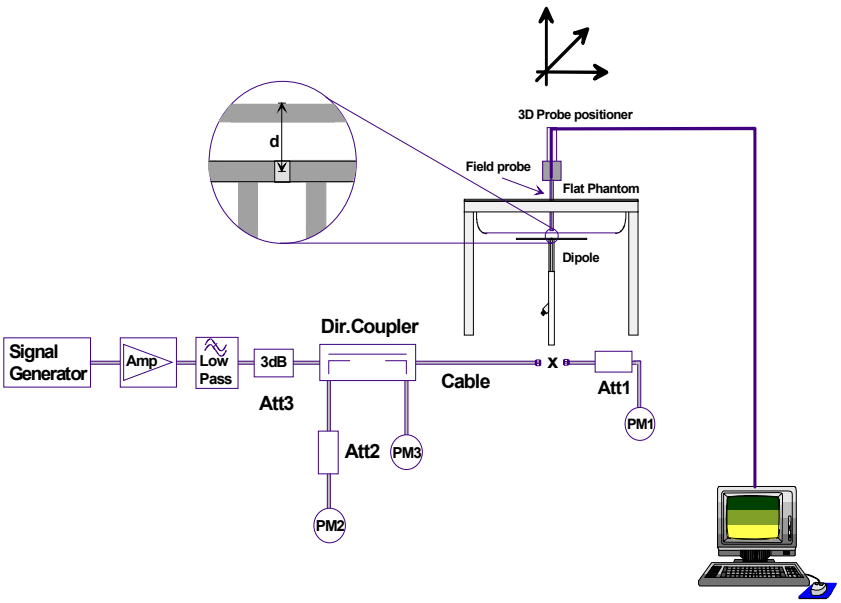

Figure 1. System Performance Check Setup Diagram

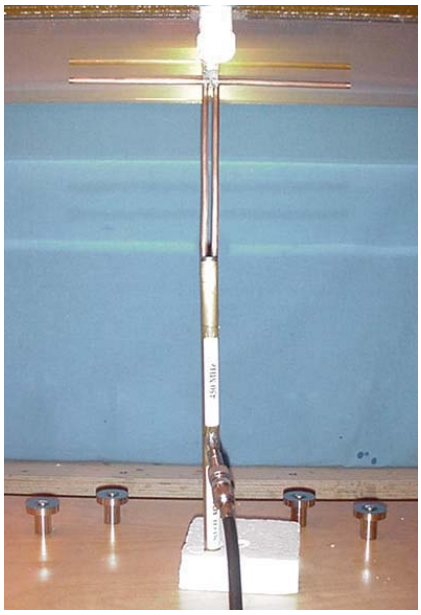

450MHz Dipole Setup

8.0 SIMULATED EQUIVALENT TISSUES

The 450MHz simulated tissue mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The fluid was prepared and measured for dielectric parameters (permittivity and conductivity) according to standardized procedures.

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Brain	450 MHz Body
	System Check & DUT Evaluation	DUT Evaluation
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10g)	4.0	20.0

Notes:
1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

10.0 ROBOT SYSTEM SPECIFICATIONS

Specifications

POSITIONER: Stäubli Unimation Corp. Robot Model: RX60L
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: AMD Athlon XP 2400+
Clock Speed: 2.0 GHz
Operating System: Windows XP Professional

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY4 software
Connecting Lines: Optical downlink for data and status info.
Optical uplink for commands and clock

DASY4 Measurement Server

Function: Real-time data evaluation for field measurements and surface detection
Hardware: PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections: COM1, COM2, DAE, Robot, Ethernet, Service Interface

E-Field Probe

Model: ET3DV6
Serial No.: 1590
Construction: Triangular core fiber optic detection system
Frequency: 10 MHz to 6 GHz
Linearity: ±0.2 dB (30 MHz to 3 GHz)

Phantom(s)

Evaluation Phantom

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 2.0 mm ± 0.1 mm
Outer Dimensions: 75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)

Validation Phantom (≤ 450MHz)

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 6.2 mm ± 0.1 mm
Outer Dimensions: 86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)

11.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol)
Calibration:	In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy ± 8%)
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity:	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal to probe axis)
Dynamic Range:	5 μW/g to > 100 mW/g; Linearity: ± 0.2 dB
Surface Detection:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetry up to 3 GHz Compliance tests of mobile phone

ET3DV6 E-Field Probe

12.0 PLANAR PHANTOM

The planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of handheld and body-worn radio transceivers. The planar phantom is mounted on the side of the DASY4 compact system table.

Planar Phantom

13.0 VALIDATION PLANAR PHANTOM

The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted in the table of the DASY4 compact system.

Validation Planar Phantom

14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.

Device Holder

15.0 TEST EQUIPMENT LIST

TEST EQUIPMENT	SERIAL NO.	CALIBRATION DATE
Schmid & Partner DASY4 System	-	-
DASY4 Measurement Server	1078	N/A
-Robot	599396-01	N/A
DAE3	353	Dec 2003
DAE3	370	May 2004
-ET3DV6 E-Field Probe	1387	Mar 2004
-ET3DV6 E-Field Probe	1590	May 2004
-300MHz Validation Dipole	135	Oct 2004
-450MHz Validation Dipole	136	Nov 2003
-835MHz Validation Dipole	411	Mar 2004
-900MHz Validation Dipole	054	June 2004
-1800MHz Validation Dipole	247	June 2004
-1900MHz Validation Dipole	151	June 2004
-2450MHz Validation Dipole	150	Sept 2004
-SAM Phantom V4.0C	1033	N/A
-Barski Planar Phantom	03-01	N/A
-Plexiglas Planar Phantom	161	N/A
-Validation Planar Phantom	137	N/A
HP 85070C Dielectric Probe Kit	N/A	N/A
Gigatronics 8651A Power Meter	8650137	April 2004
Gigatronics 8652A Power Meter	1835267	April 2004
Gigatronics 80701A Power Sensor	1833535	April 2004
Gigatronics 80701A Power Sensor	1833542	April 2004
Gigatronics 80701A Power Sensor	1834350	April 2004
HP E4408B Spectrum Analyzer	US39240170	Dec 2003
HP 8594E Spectrum Analyzer	3543A02721	April 2004
HP 8753E Network Analyzer	US38433013	April 2004
HP 8648D Signal Generator	3847A00611	April 2004
Amplifier Research 5S1G4 Power Amplifier	26235	N/A

16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	**Uncertainty Value ±%**	**Probability Distribution**	**Divisor**	**c_i 1g**	**Standard Uncertainty ±% (1g)**	**v_i or v_{eff}**
Measurement System						
Probe calibration	± 4.0	Normal	1	1	± 4.0	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	$(1-c_p)$	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	(c_p)	± 3.9	∞
Spatial resolution	± 0.0	Rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	Rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	Rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	√3	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
Extrapolation & integration	± 3.9	Rectangular	√3	1	± 2.3	∞
Test Sample Related						
Device positioning	± 6.0	Normal	√3	1	± 6.7	12
Device holder uncertainty	± 5.0	Normal	√3	1	± 5.9	8
Power drift	± 5.0	Rectangular	√3		± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Combined Standard Uncertainty					**± 13.03**	
Expanded Uncertainty (k=2)					**± 26.07**	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	**Uncertainty Value ±%**	**Probability Distribution**	**Divisor**	**c_i 1g**	**Standard Uncertainty ±% (1g)**	**v_i or v_{eff}**
Measurement System						
Probe calibration	± 4.0	Normal	1	1	± 4.0	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	$(1-c_p)$	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	(c_p)	± 3.9	∞
Spatial resolution	± 0.0	Rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	Rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	Rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	√3	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
Extrapolation & integration	± 3.9	Rectangular	√3	1	± 2.3	∞
Dipole						
Dipole Axis to Liquid Distance	± 2.0	Rectangular	√3	1	± 1.2	∞
Input Power	± 4.7	Rectangular	√3	1	± 2.7	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Combined Standard Uncertainty					**± 9.58**	
Expanded Uncertainty (k=2)					**± 19.16**	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

17.0 REFERENCES

[1] Federal Communications Commission, “Radiofrequency radiation exposure evaluation: portable devices”, Rule Part 47 CFR §2.1093: 1999.

[2] Health Canada, “Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz”, Safety Code 6.

[3] Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields”, OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.

[4] Industry Canada, “Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada’s Safety Code 6 for Exposure of Humans to Radio Frequency Fields”, Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.

[5] IEEE Std 1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”: June 2003.

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Date Tested: 10/20/04

System Performance Check - 450 MHz Dipole

DUT: Dipole 450 MHz; Model: D450V2; Type: System Performance Check; Serial: 136; Calibrated: 11/04/2003

Ambient Temp: 23.6 °C; Fluid Temp: 22.9 °C; Barometric Pressure: 101.6 kPa; Humidity: 36%

Communication System: CW
Forward Conducted Power: 250mW
Frequency: 450 MHz; Duty Cycle: 1:1
Medium: HSL450 (σ = 0.87 mho/m; ε_r = 44.0; ρ = 1000 kg/m^3)

- Probe: ET3DV6 - SN1590; ConvF(7.5, 7.5, 7.5); Calibrated: 24/05/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

450 MHz System Performance Check/Area Scan (6x11x1):
Measurement grid: dx=15mm, dy=15mm

450 MHz System Performance Check/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 39.6 V/m; Power Drift = -0.1 dB
Peak SAR (extrapolated) = 2.17 W/kg
SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.824 mW/g

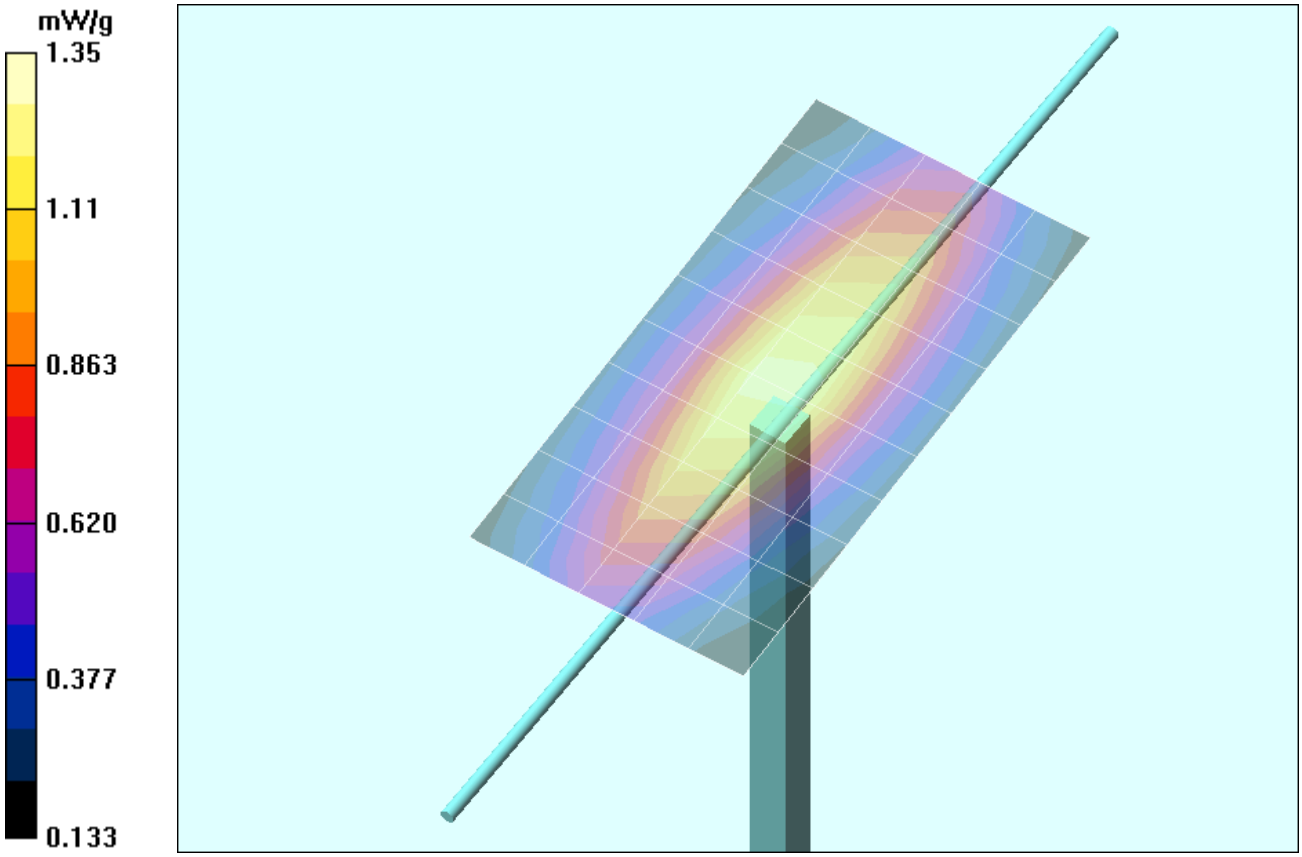

Z-Axis Scan

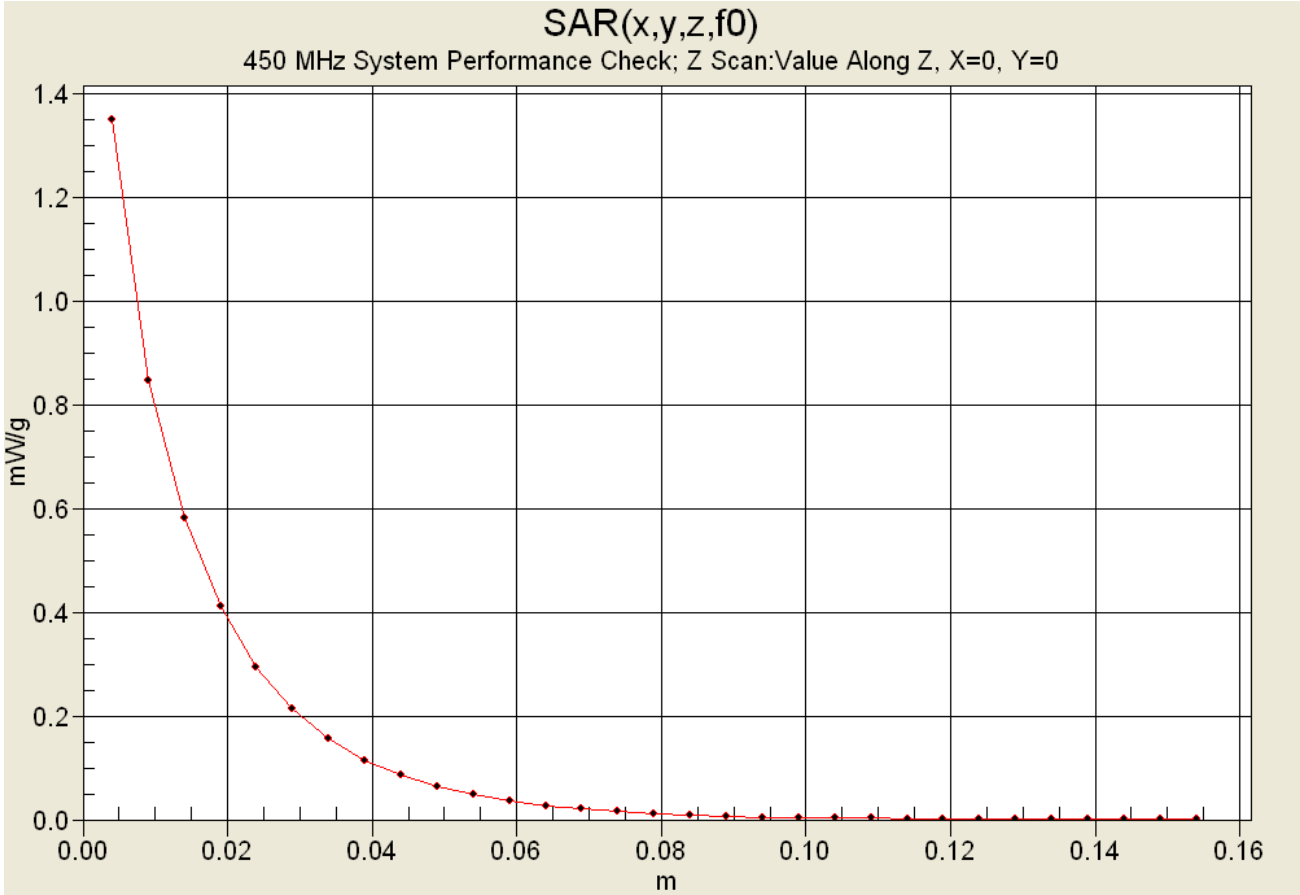
SAR(x,y,z,f0)
450 MHz System Performance Check; Z Scan:Value Along Z, X=0, Y=0
mW/g
1.4
1.2
1.0
0.8
0.6
0.4
0.2
0.0
0.00
0.02
0.04
0.06
0.08
0.10
0.12
0.14
0.16
m

Date Tested: 10/21/04

System Performance Check - 450 MHz Dipole

DUT: Dipole 450 MHz; Model: D450V2; Type: System Performance Check; Serial: 136; Calibrated: 11/04/2003

Ambient Temp: 23.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 101.9 kPa; Humidity: 32%

Communication System: CW
Forward Conducted Power: 250mW
Frequency: 450 MHz; Duty Cycle: 1:1
Medium: HSL450 (σ = 0.86 mho/m; ε_r = 43.5; ρ = 1000 kg/m^3)

- Probe: ET3DV6 - SN1590; ConvF(7.5, 7.5, 7.5); Calibrated: 24/05/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

450 MHz System Performance Check/Area Scan (6x11x1):
Measurement grid: dx=15mm, dy=15mm

450 MHz System Performance Check/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 39.5 V/m; Power Drift = -0.0 dB
Peak SAR (extrapolated) = 2.13 W/kg
SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.809 mW/g

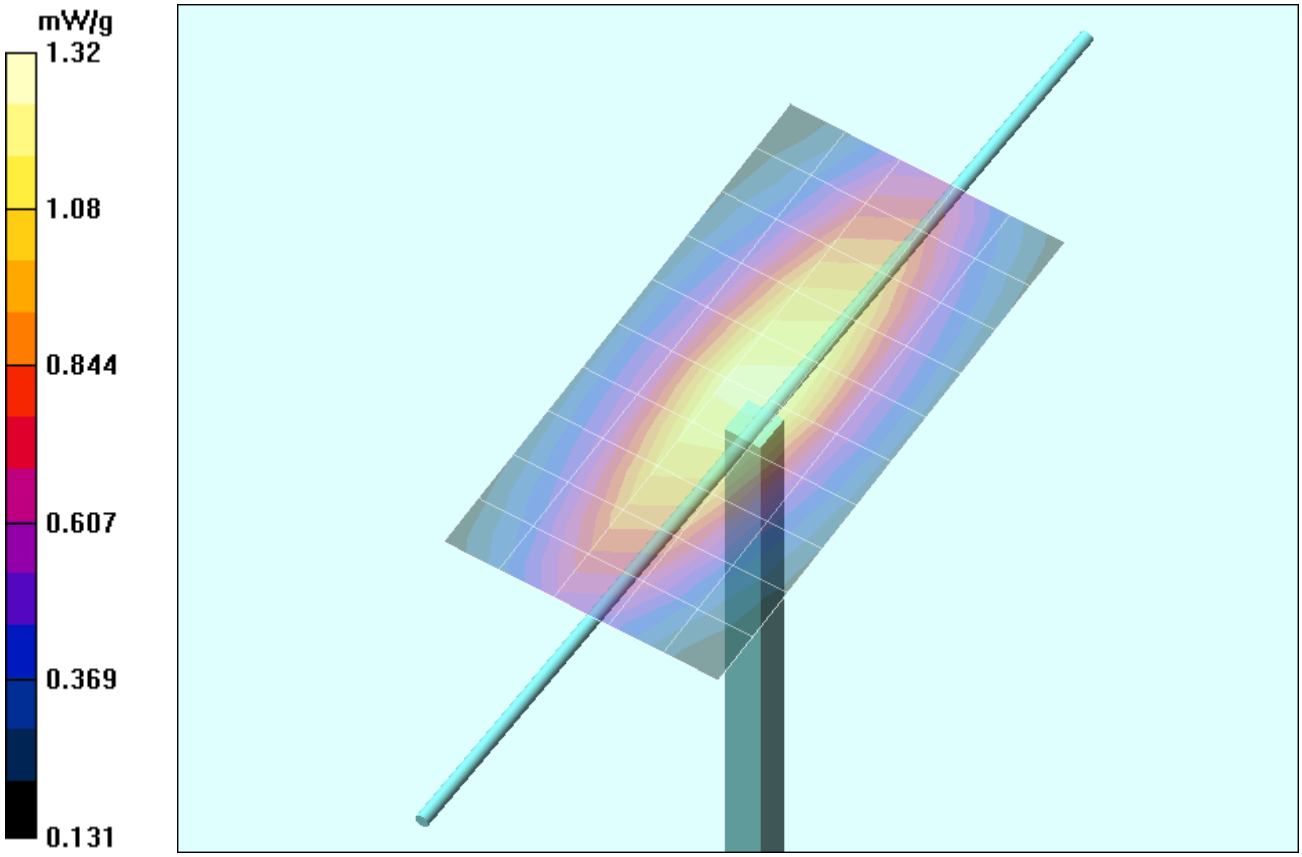

Z-Axis Scan

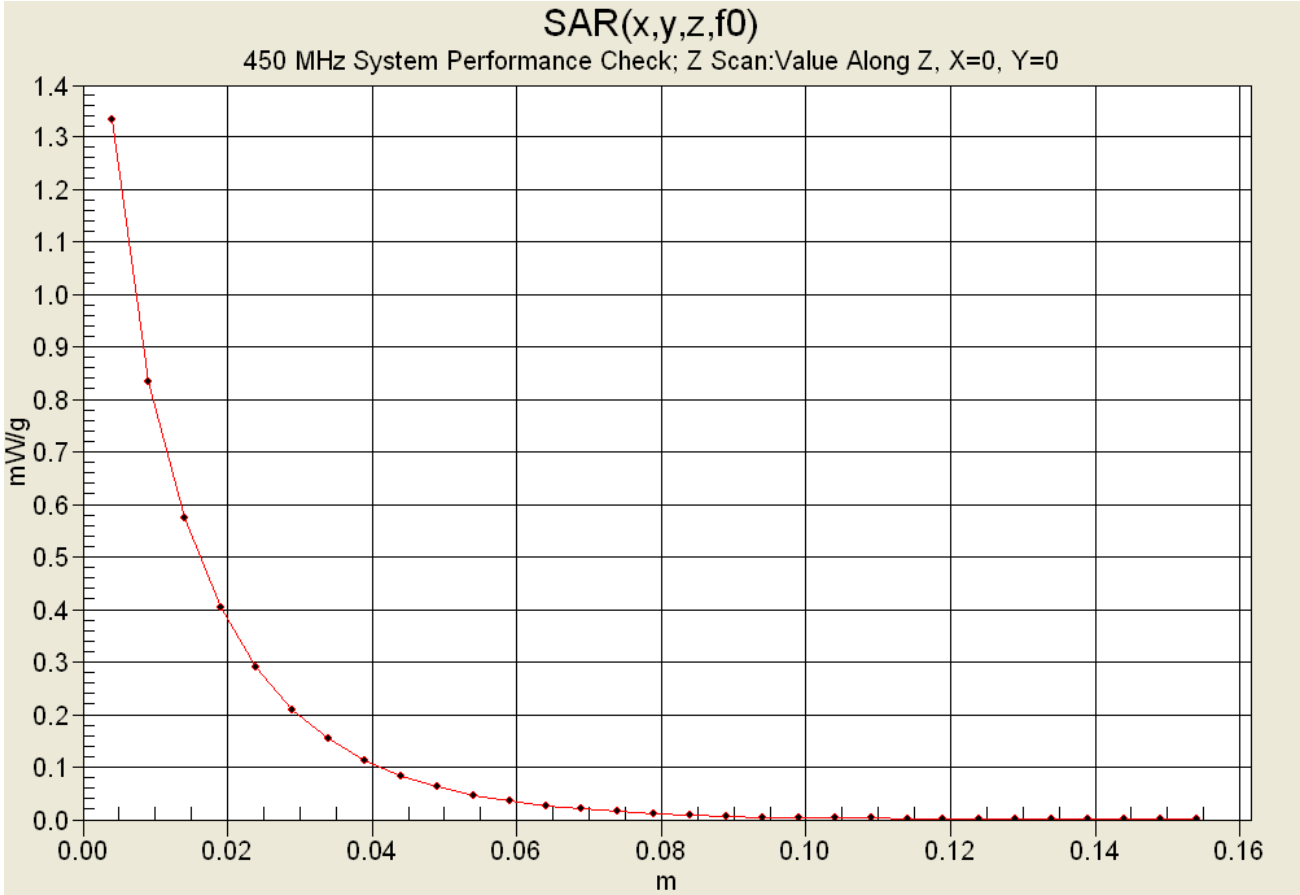
SAR(x,y,z,f0)
450 MHz System Performance Check; Z Scan:Value Along Z, X=0, Y=0
mW/g
1.4
1.3
1.2
1.1
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0.0
0.00
0.02
0.04
0.06
0.08
0.10
0.12
0.14
0.16
m

Date Tested: 10/22/04

System Performance Check - 450 MHz Dipole

DUT: Dipole 450 MHz; Model: D450V2; Type: System Performance Check; Serial: 136; Calibrated: 11/04/2003

Ambient Temp: 23.5 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 32%

Communication System: CW
Forward Conducted Power: 250mW
Frequency: 450 MHz; Duty Cycle: 1:1
Medium: HSL450 (σ = 0.86 mho/m; ε_r = 43.3; ρ = 1000 kg/m^3)

- Probe: ET3DV6 - SN1590; ConvF(7.5, 7.5, 7.5); Calibrated: 24/05/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

450 MHz System Performance Check/Area Scan (6x11x1):
Measurement grid: dx=15mm, dy=15mm

450 MHz System Performance Check/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 39.3 V/m; Power Drift = -0.0 dB
Peak SAR (extrapolated) = 2.15 W/kg
SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.816 mW/g

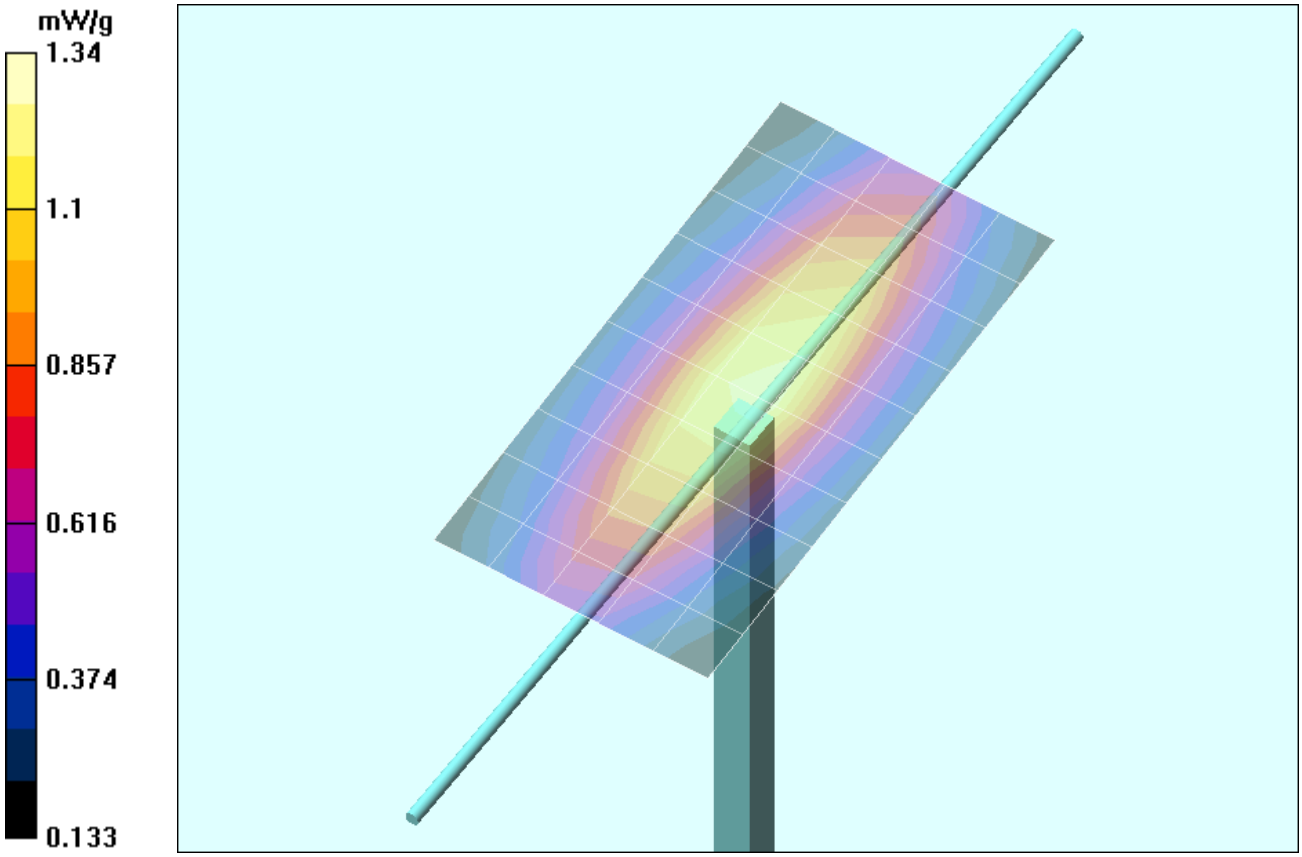

Z-Axis Scan

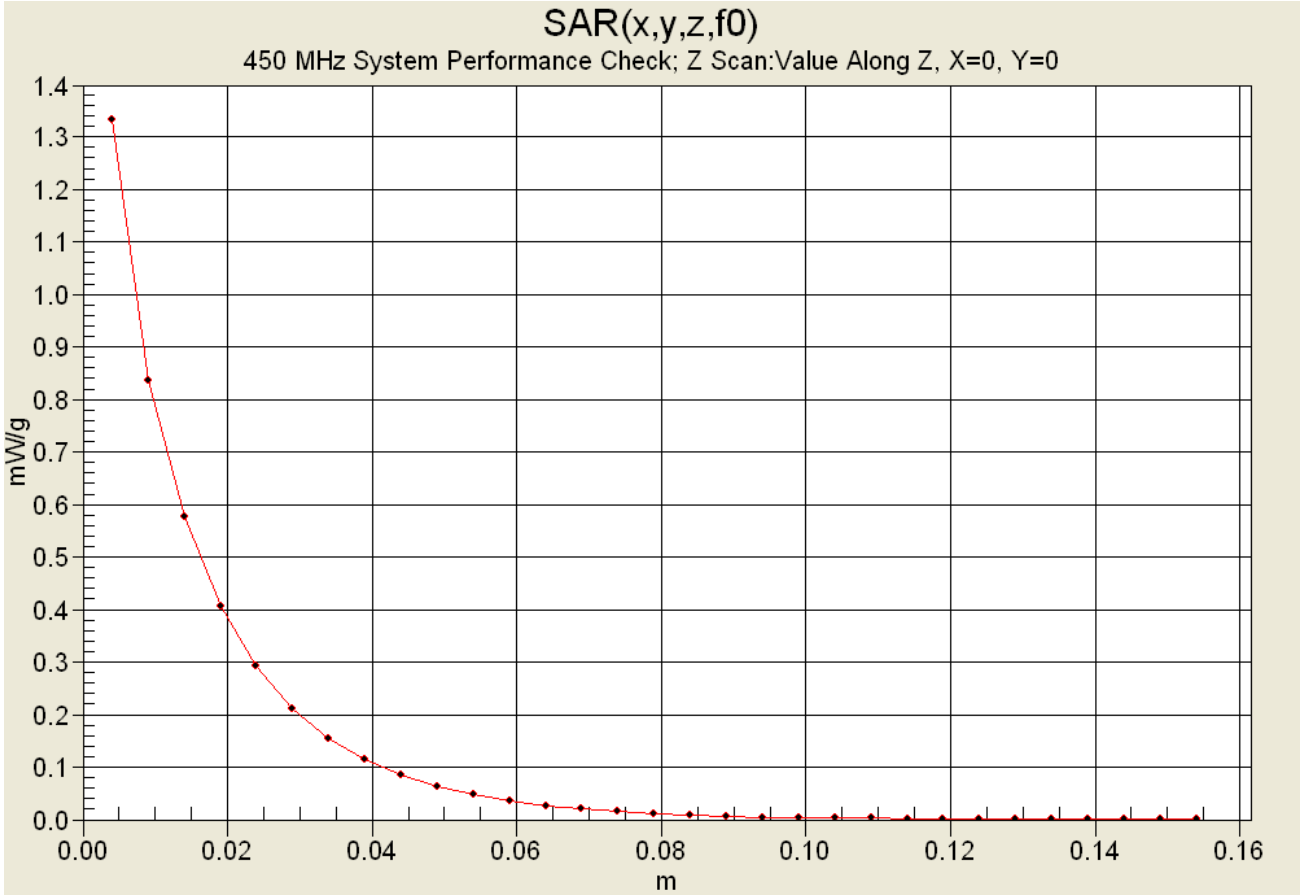
SAR(x,y,z,f0)
450 MHz System Performance Check; Z Scan:Value Along Z, X=0, Y=0
mW/g
1.4
1.3
1.2
1.1
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0.0
0.00
0.02
0.04
0.06
0.08
0.10
0.12
0.14
0.16
m

Date Tested: 10/23/04

System Performance Check - 450 MHz Dipole

DUT: Dipole 450 MHz; Model: D450V2; Type: System Performance Check; Serial: 136; Calibrated: 11/04/2003

Ambient Temp: 23.0 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 32%

Communication System: CW
Forward Conducted Power: 250mW
Frequency: 450 MHz; Duty Cycle: 1:1
Medium: HSL450 (σ = 0.86 mho/m; ε_r = 43.4; ρ = 1000 kg/m^3)

- Probe: ET3DV6 - SN1590; ConvF(7.5, 7.5, 7.5); Calibrated: 24/05/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

450 MHz System Performance Check/Area Scan (6x11x1):
Measurement grid: dx=15mm, dy=15mm

450 MHz System Performance Check/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 39.8 V/m; Power Drift = -0.0 dB
Peak SAR (extrapolated) = 2.15 W/kg
SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.828 mW/g

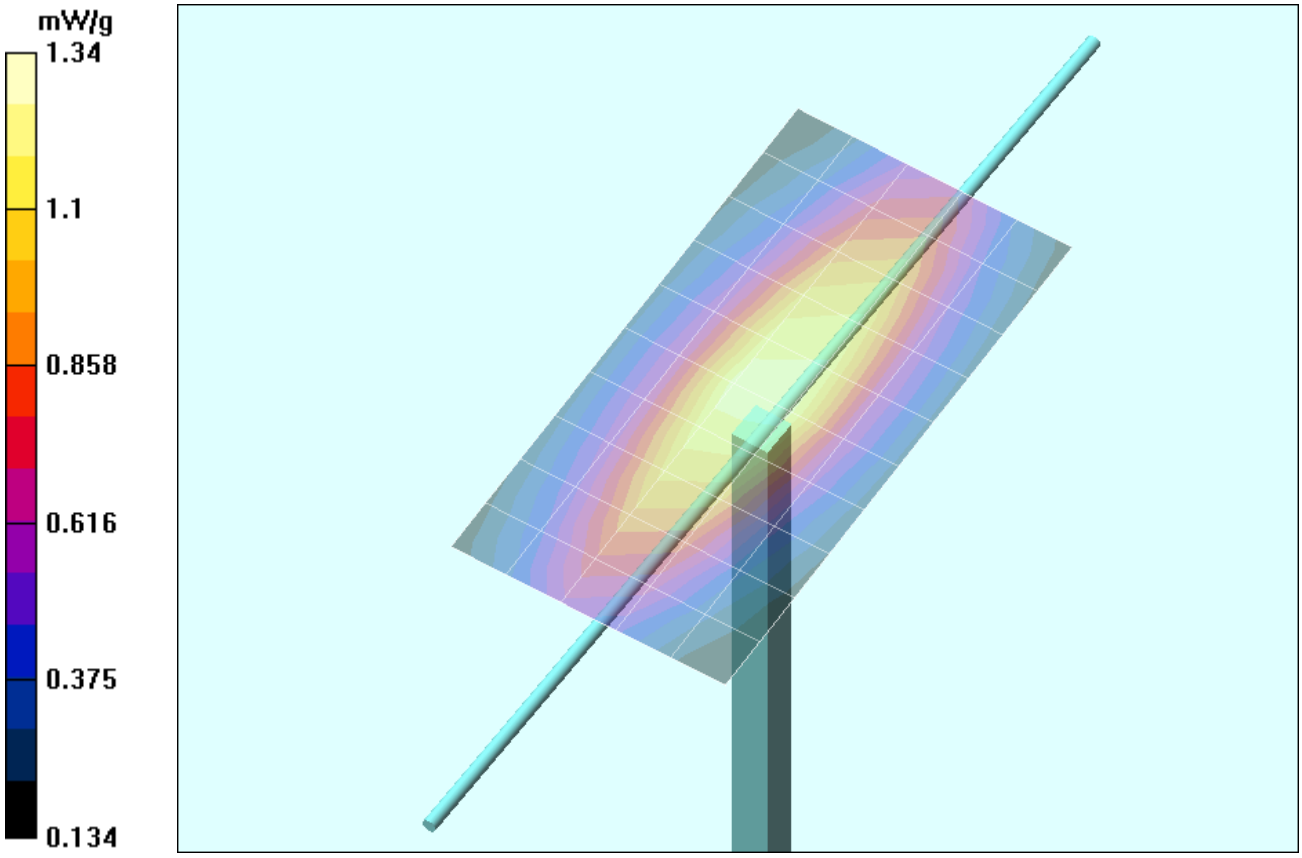

Z-Axis Scan

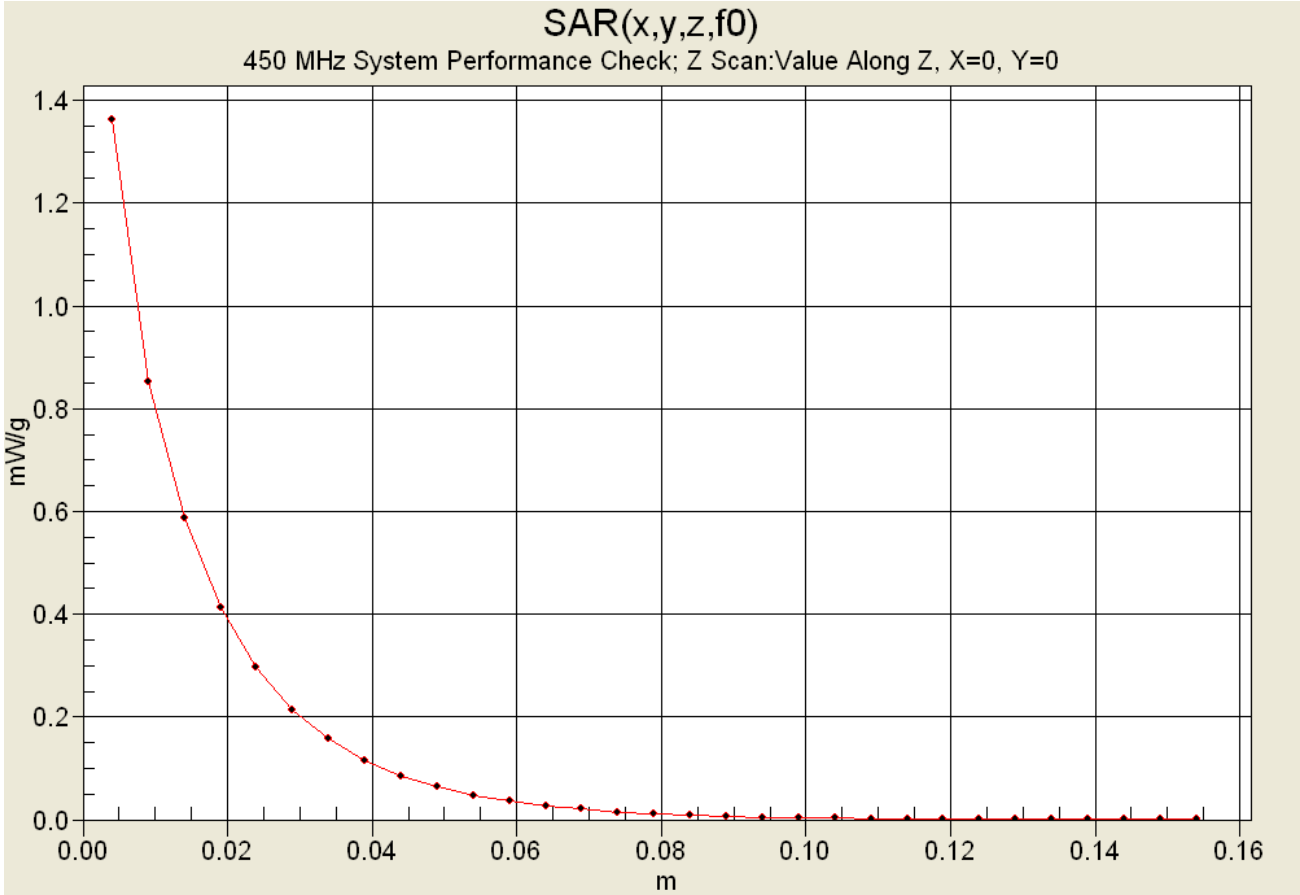
SAR(x,y,z,f0)
450 MHz System Performance Check; Z Scan:Value Along Z, X=0, Y=0
mW/g
1.4
1.2
1.0
0.8
0.6
0.4
0.2
0.0
0.00
0.02
0.04
0.06
0.08
0.10
0.12
0.14
0.16
m

Date Tested: 10/24/04

System Performance Check - 450 MHz Dipole

DUT: Dipole 450 MHz; Model: D450V2; Type: System Performance Check; Serial: 136; Calibrated: 11/04/2003

Ambient Temp: 23.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.2 kPa; Humidity: 32%

Communication System: CW
Forward Conducted Power: 250mW
Frequency: 450 MHz; Duty Cycle: 1:1
Medium: HSL450 (σ = 0.85 mho/m; ε_r = 43.5; ρ = 1000 kg/m^3)

- Probe: ET3DV6 - SN1590; ConvF(7.5, 7.5, 7.5); Calibrated: 24/05/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

450 MHz System Performance Check/Area Scan (6x11x1):
Measurement grid: dx=15mm, dy=15mm

450 MHz System Performance Check/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 39.9 V/m; Power Drift = -0.0 dB
Peak SAR (extrapolated) = 2.17 W/kg
SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.821 mW/g

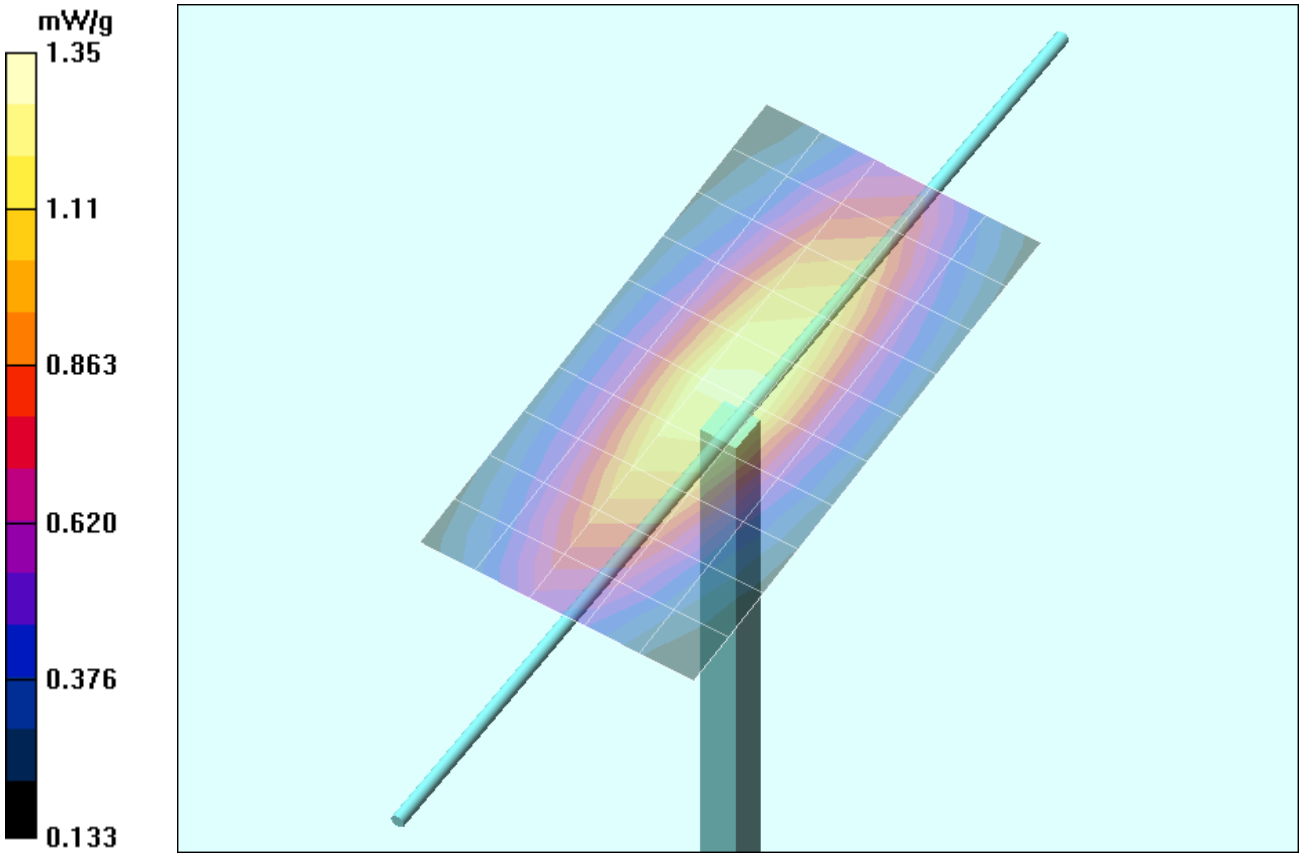

Z-Axis Scan

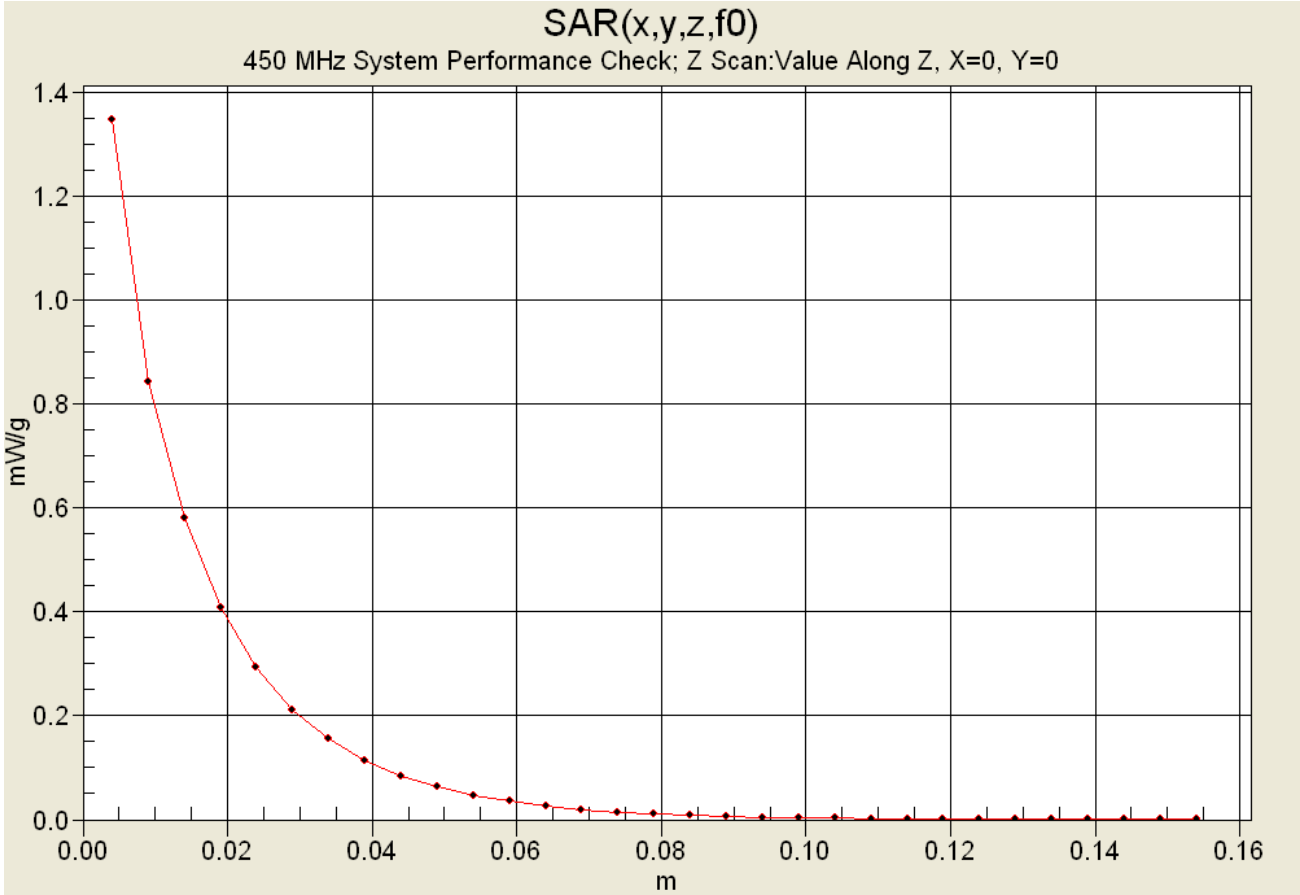
SAR(x,y,z,f0)
450 MHz System Performance Check; Z Scan:Value Along Z, X=0, Y=0
mW/g
1.4
1.2
1.0
0.8
0.6
0.4
0.2
0.0
0.00
0.02
0.04
0.06
0.08
0.10
0.12
0.14
0.16
m

APPENDIX C - SYSTEM VALIDATION

Celltech
Testing and Engineering Services Lab

450MHz SYSTEM VALIDATION DIPOLE

Type:	**450MHz Validation Dipole**
Serial Number:	**136**
Place of Calibration:	**Celltech Labs Inc.**
Date of Calibration:	**November 4, 2003**

Celltech Labs Inc. hereby certifies that this device has been calibrated on the date indicated above.

Calibrated by: Spencer Watson

Approved by: Russell W. Pipe

Celltech Labs Inc. 1955 Moss Court, Kelowna, B.C. Canada V1Y 9L3
Tel. 250-448-7047 • Fax. 250-448-7046 • e-mail: info@celltechlabs.com
www.celltechlabs.com

2003 Celltech Labs Inc.

1. Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the IEEE Std "Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques". The electrical properties were measured using an HP 8753E Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 15.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 450MHz	Re{Z} = 49.982Ω
	Im{Z} = 7.2324Ω
Return Loss at 450MHz	-22.597dB

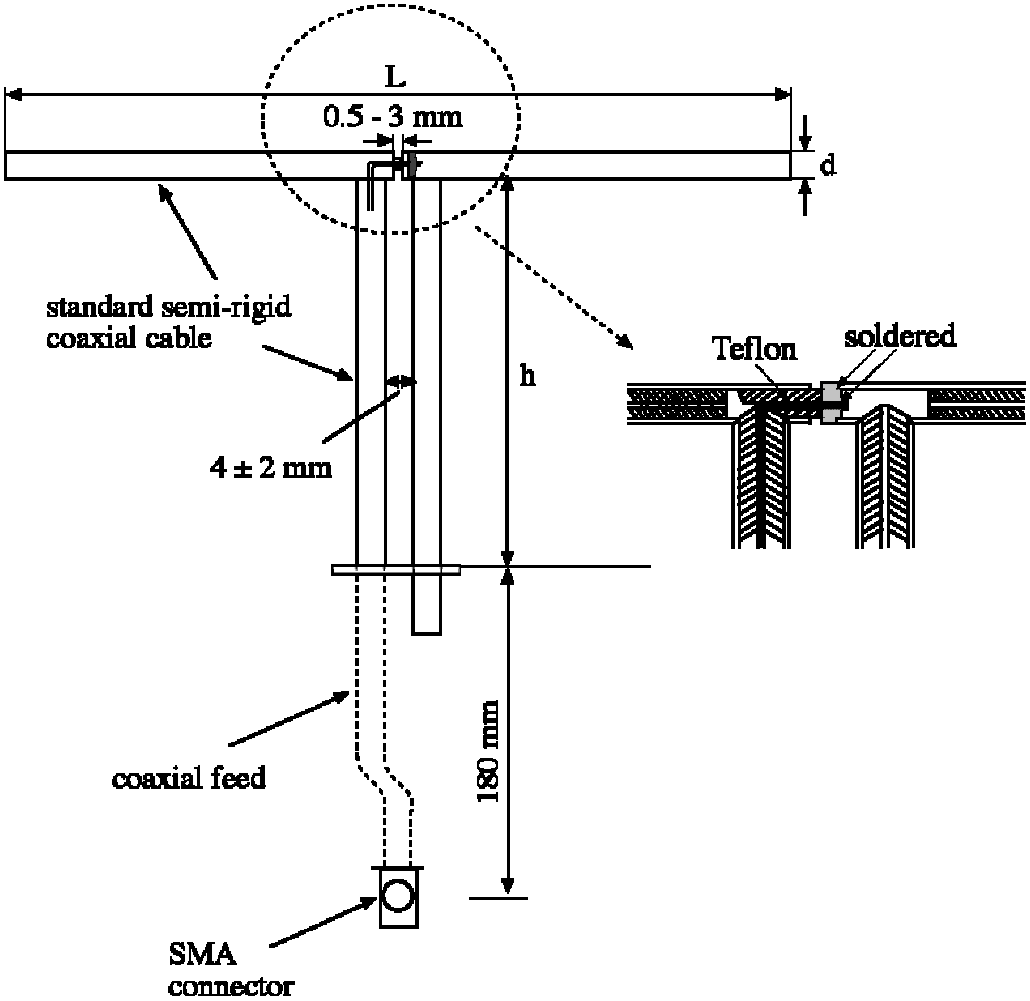

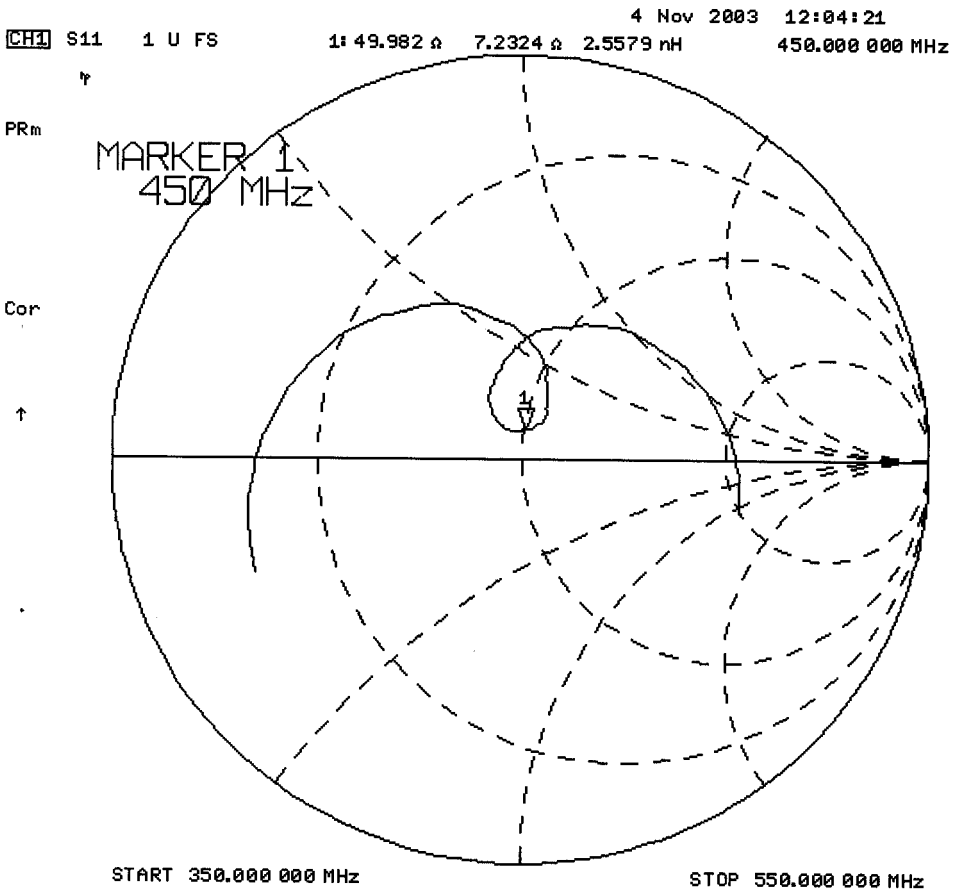
4 Nov 2003 12:04:21
CH1 S11 1 U FS
1: 49.982 Ω 7.2324 Ω 2.5579 nH
450.000 000 MHz
PRm
MARKER 1
450 MHz
Cor
1
START 350.000 000 MHz
STOP 550.000 000 MHz

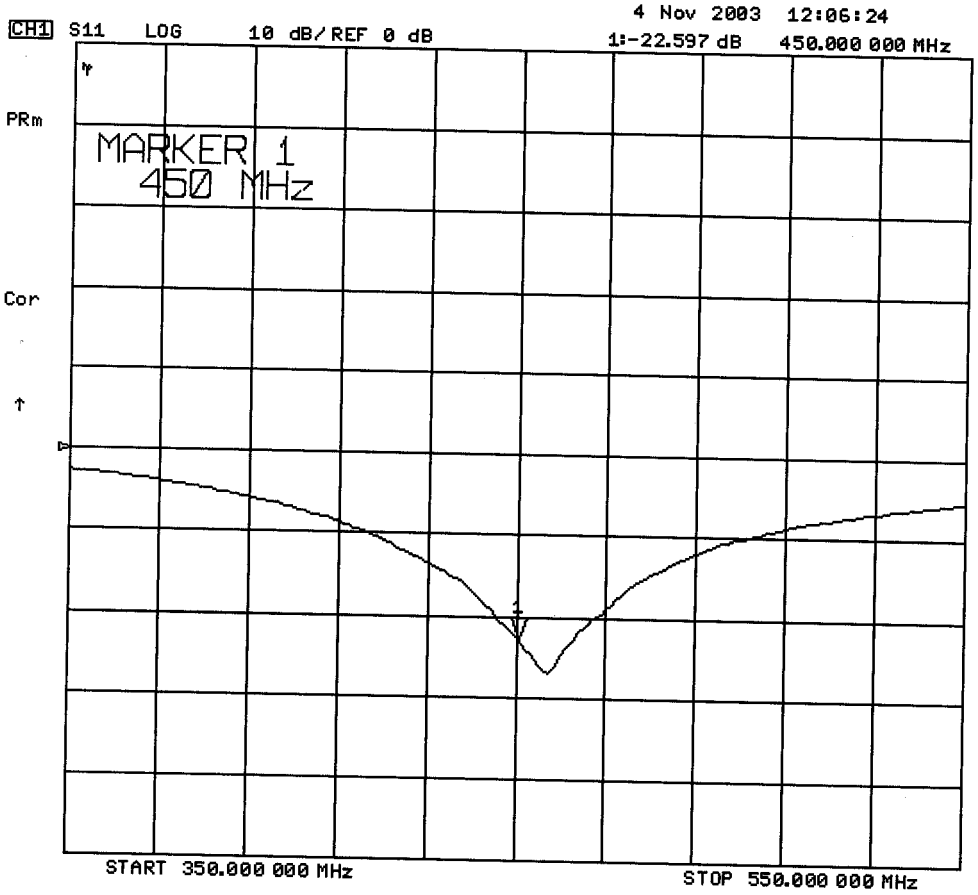
CH1 S11 LOG 10 dB/ REF 0 dB
4 Nov 2003 12:06:24
1:-22.597 dB 450.000 000 MHz
PRm
MARKER 1
450 MHz
Cor
START 350.000 000 MHz
STOP 550.000 000 MHz

2. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	420.0	250.0	6.2
450	288.0	167.0	6.2
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6

3. Validation Phantom

The validation phantom was constructed using relatively low-loss tangent Plexiglas material. The inner dimensions of the phantom are as follows:

Length: 83.5 cm
Width: 36.9 cm
Height: 21.8 cm

The bottom section of the validation phantom is constructed of 6.2 ± 0.1mm Plexiglas.

4. Dimensions of Plexiglas Planar Phantom

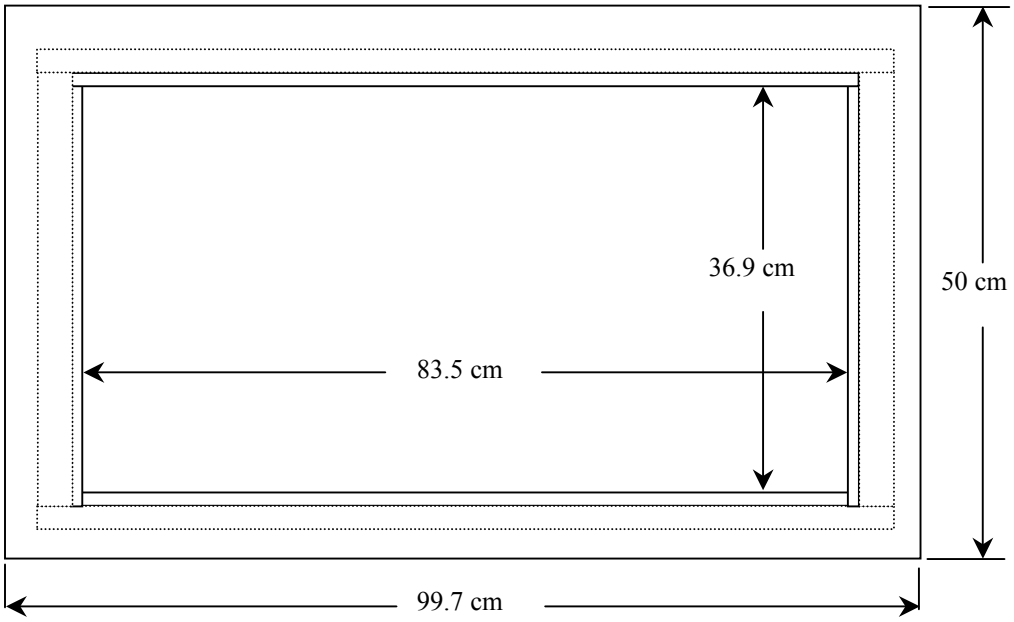

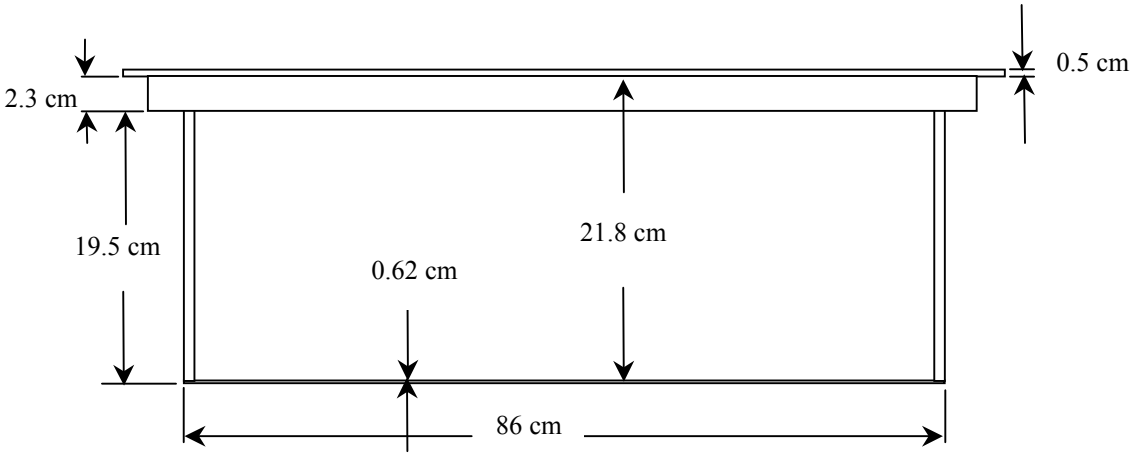

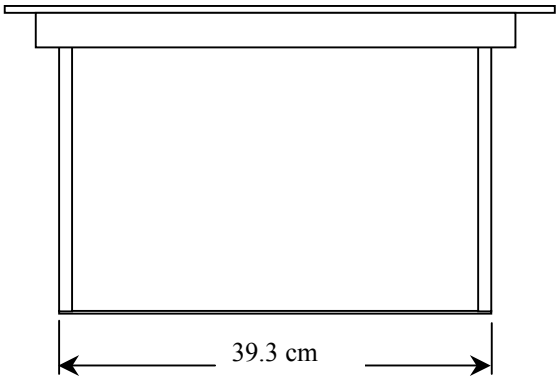

5. 450MHz System Validation Setup

450MHz System Validation Setup

6. Measurement Conditions

The planar phantom was filled with brain simulating tissue having the following parameters at 450MHz:

Relative Permittivity:	43.7
Conductivity:	0.88 mho/m
Fluid Temperature:	22.0 °C
Fluid Depth:	≥ 15.0 cm

Environmental Conditions:

Ambient Temperature:	22.1 °C
Humidity:	49 %
Barometric Pressure:	102.8 kPa

The 450MHz simulated brain tissue mixture consists of the following ingredients:

Ingredient	Percentage by weight
Water	38.56%
Sugar	56.32%
Salt	3.95%
HEC	0.98%
Dowicil 75	0.19%
450MHz Target Dielectric Parameters at 22 °C	ε_r = 43.5 σ = 0.87 S/m

7. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

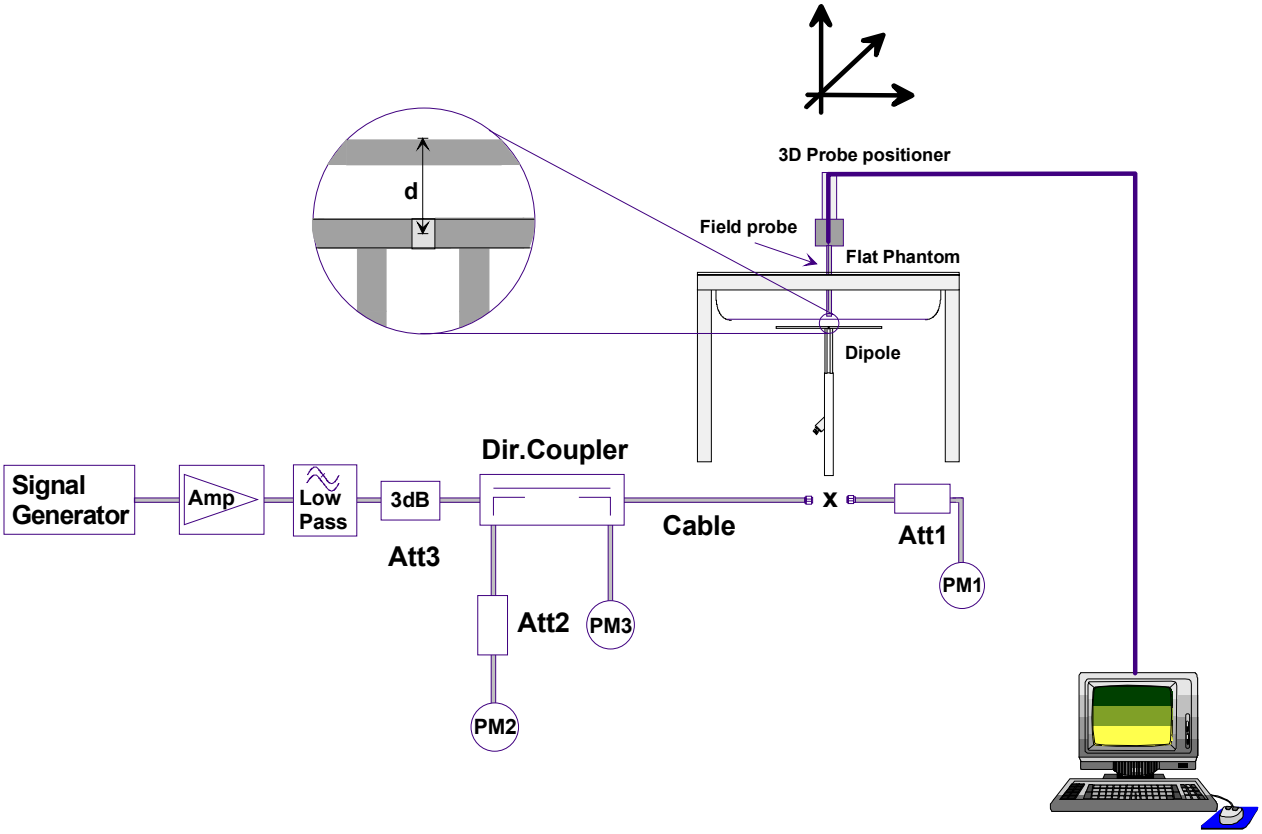

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

8. Validation Dipole SAR Test Results

Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value.

Validation Measurement	SAR @ 0.25W Input averaged over 1g	SAR @ 1W Input averaged over 1g	SAR @ 0.25W Input averaged over 10g	SAR @ 1W Input averaged over 10g	Peak SAR @ 0.25W Input
Test 1	1.29	5.16	0.810	3.24	2.28
Test 2	1.31	5.24	0.827	3.31	2.31
Test 3	1.30	5.20	0.823	3.29	2.29
Test 4	1.30	5.20	0.822	3.29	2.29
Test 5	1.29	5.16	0.819	3.28	2.28
Test 6	1.30	5.20	0.826	3.30	2.28
Test 7	1.31	5.24	0.826	3.30	2.30
Test 8	1.31	5.24	0.829	3.32	2.30
Test 9	1.30	5.20	0.822	3.29	2.28
Test 10	1.31	5.24	0.822	3.29	2.33
Average Value	1.30	5.21	0.823	3.29	2.29

The results have been normalized to 1W (forward power) into the dipole.

IEEE Target over $1cm^3$ (1g) of tissue: 1.23 mW/g (+/- 10%)

Averaged over 1cm (1g) of tissue: 5.21 mW/g

Averaged over 10cm (10g) of tissue: 3.29 mW/g

Test Date: 11/04/03

DUT: Dipole 450MHz; Model: D450V2; Type: System Performance Check; Serial: 136

Ambient Temp: 22.1°C; Fluid Temp: 22.0°C; Barometric Pressure: 102.8 kPa; Humidity: 49%

Communication System: CW
Forward Conducted Power: 250 mW
Frequency: 450 MHz; Duty Cycle: 1:1
Medium: HSL450 (σ = 0.88 mho/m, ε_r = 43.7, ρ = 1000 kg/m^3)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 26/02/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 19/05/2003
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

450 MHz Validation/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 39 V/m
Power Drift = -0.08 dB
Maximum value of SAR = 1.3 mW/g

450 MHz Validation/Zoom Scan 8 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Peak SAR (extrapolated) = 2.28 W/kg
SAR(1 g) = 1.3 mW/g; SAR(10 g) = 0.822 mW/g
Reference Value = 39 V/m
Power Drift = 0.08 dB

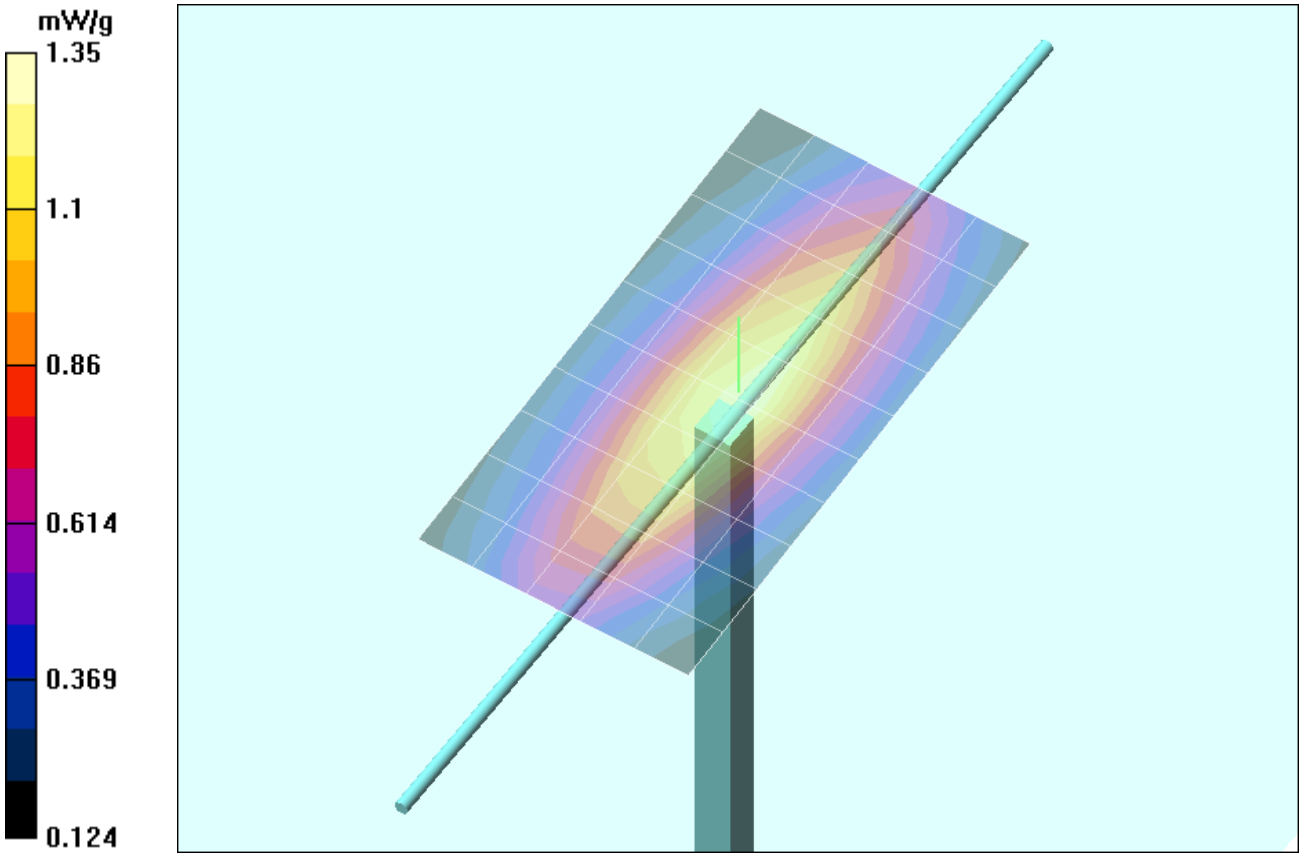

2003 Celltech Labs Inc.

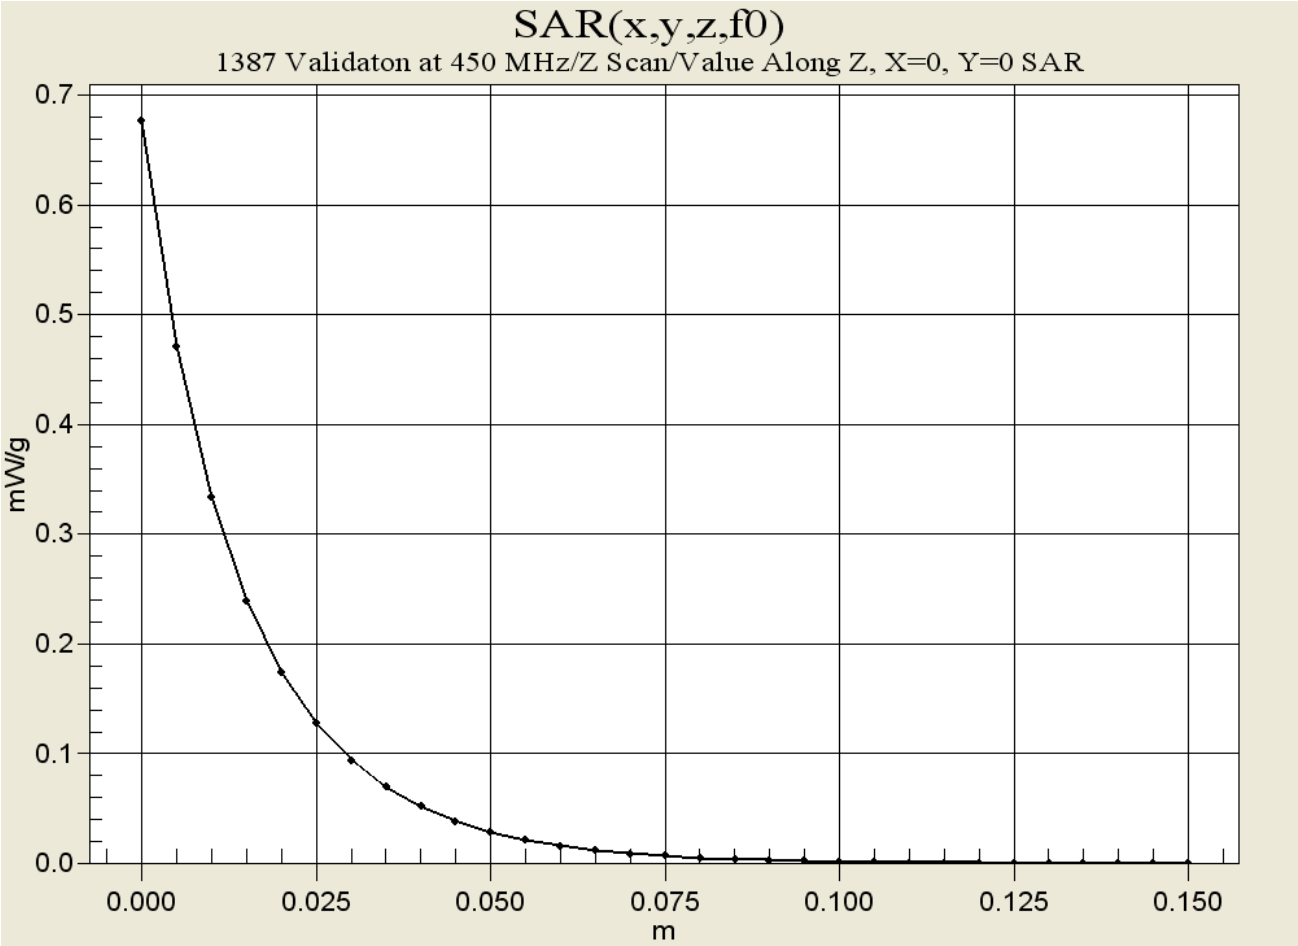
SAR(x,y,z,f0)
1387 Validaton at 450 MHz/Z Scan/Value Along Z, X=0, Y=0 SAR
mW/g
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0.0
0.000
0.025
0.050
0.075
0.100
0.125
0.150
m

450MHz System Validation

Measured Fluid Dielectric Parameters (Brain)

November 04, 2003

Frequency	e'	e"
350.000000 MHz	46.2660	40.8224
360.000000 MHz	45.9937	40.0986
370.000000 MHz	45.7556	39.4543
380.000000 MHz	45.5625	38.7387
390.000000 MHz	45.2820	38.1140
400.000000 MHz	45.0146	37.4981
410.000000 MHz	44.7508	36.9734
420.000000 MHz	44.5046	36.4917
430.000000 MHz	44.2494	35.9460
440.000000 MHz	43.9621	35.5647
450.000000 MHz	43.7384	35.2106
460.000000 MHz	43.5513	34.7930
470.000000 MHz	43.2846	34.3970
480.000000 MHz	43.0654	33.9576
490.000000 MHz	42.8566	33.6391
500.000000 MHz	42.6744	33.2270
510.000000 MHz	42.5036	32.8459
520.000000 MHz	42.3492	32.5261
530.000000 MHz	42.1783	32.1727
540.000000 MHz	41.9985	31.7385
550.000000 MHz	41.8097	31.4862

APPENDIX D - PROBE CALIBRATION

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **Celltech Labs**

CALIBRATION CERTIFICATE

Object(s)	ET3DV6 - SN:1590
Calibration procedure(s)	QA CAL-01.v2 Calibration procedure for dosimetric E-field probes
Calibration date:	May 24, 2004
Condition of the calibrated item	In Tolerance (according to the specific calibration document)

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environ ment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	5-May-04 (METAS, No 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No 251-00388)	May-05
Reference 20 dB Attenuator	SN: 5086 (20b)	3-May-04 (METAS, No 251-00389)	May-05
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-03)	In house check: Oct 05

	Name	Function	Signature
Calibrated by:	Nico Vetterli	Technician	N. Vetterli
Approved by:	Katja Pokovic	Laboratory Director	

Date issued: May 24, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Probe ET3DV6

SN:1590

Manufactured:	March 19, 2001
Last calibrated:	May 15, 2003
Recalibrated:	May 24, 2004

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1590

Sensitivity in Free Space

NormX	**1.85** $\mu V/(V/m)^2$	DCP X	**91**	mV
NormY	**2.01** $\mu V/(V/m)^2$	DCP Y	**91**	mV
NormZ	**1.73** $\mu V/(V/m)^2$	DCP Z	**91**	mV

Diode Compression[A]

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Plese see Page 7.

Boundary Effect

Head **900 MHz** **Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		**3.7 mm**	**4.7 mm**
SAR_{be} [%]	Without Correction Algorithm	8.0	4.4
SAR_{be} [%]	With Correction Algorithm	0.1	0.2

Head **1800 MHz** **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance		**3.7 mm**	**4.7 mm**
SAR_{be} [%]	Without Correction Algorithm	12.2	8.5
SAR_{be} [%]	With Correction Algorithm	0.2	0.1

Sensor Offset

Probe Tip to Sensor Center	**2.7** mm
Optical Surface Detection	**in tolerance**

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

[A] numerical linearization parameter: uncertainty not required

Frequency Response of E-Field

(TEM-Cell:ifi110, Waveguide R22)

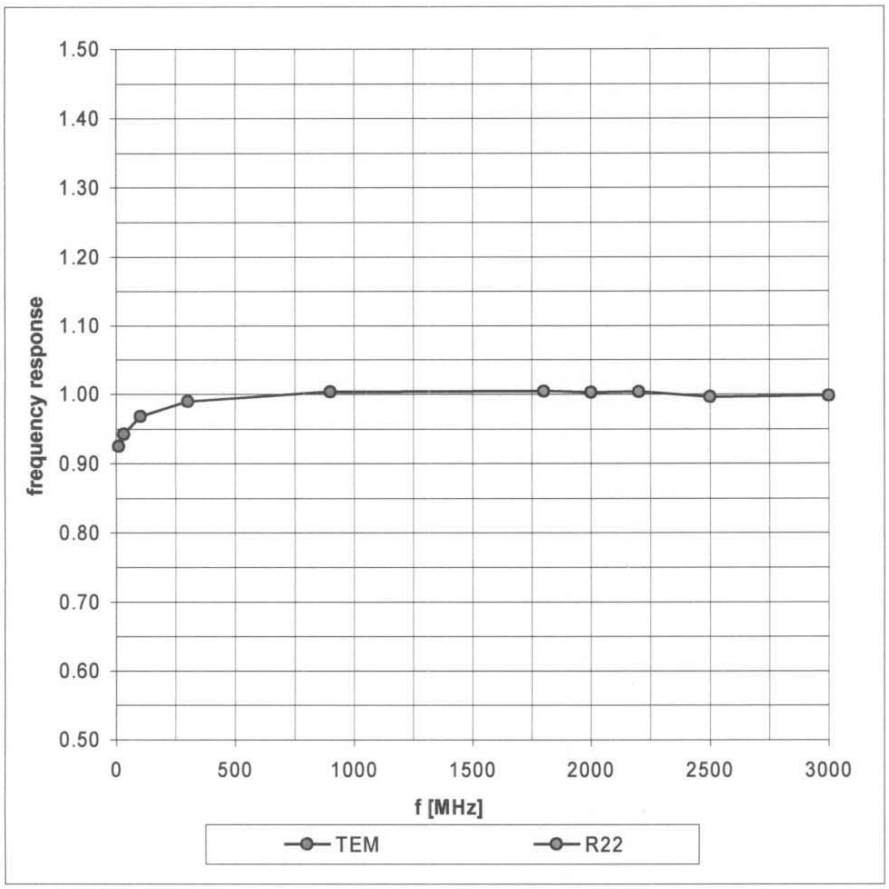

Receiving Pattern (ϕ), θ = 0°

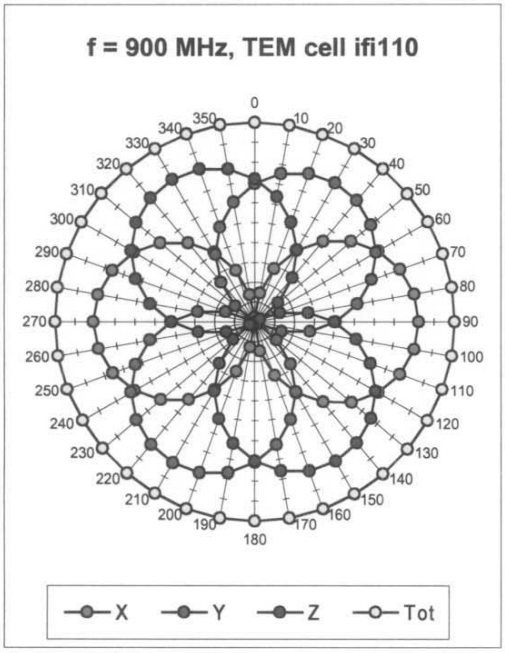

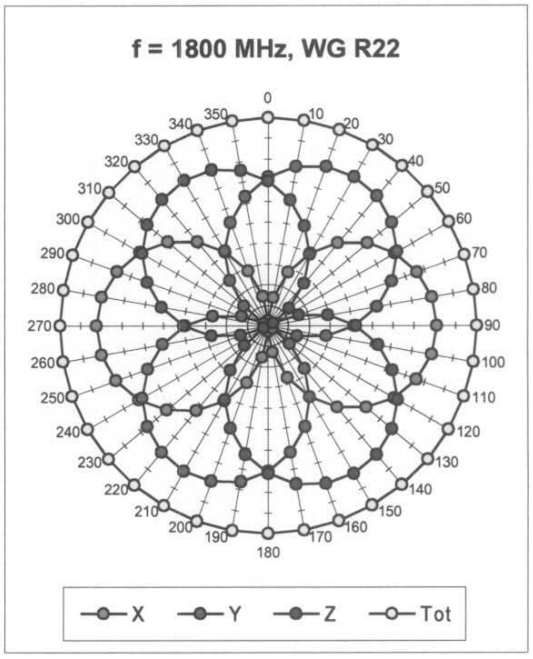

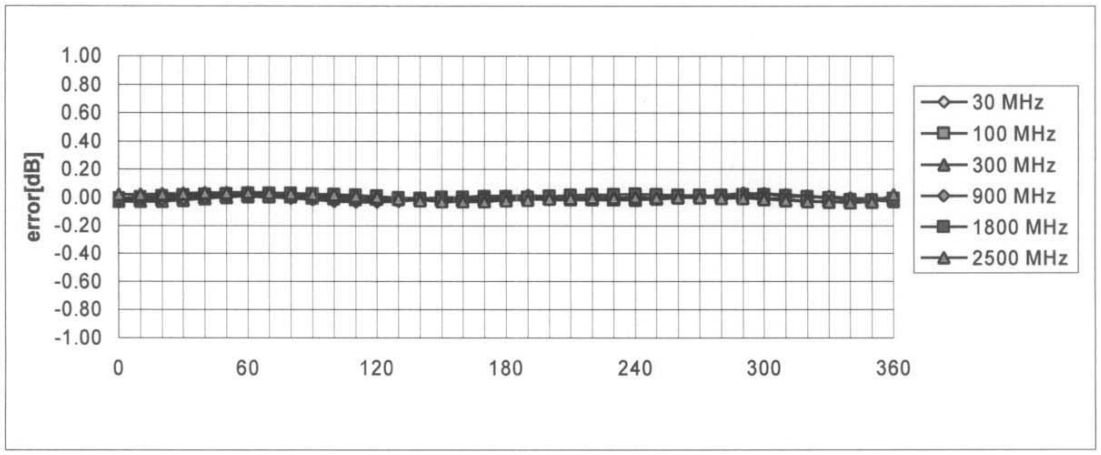

Axial Isotropy Error < ± 0.2 dB

Dynamic Range f(SAR_{head})

(Waveguide R22)

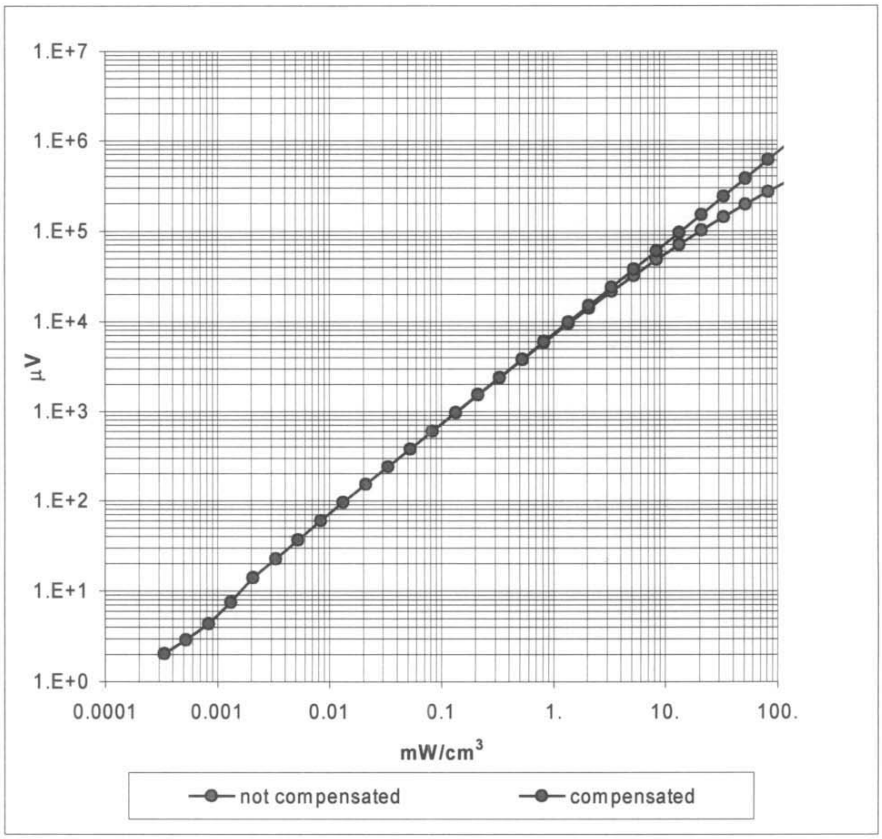

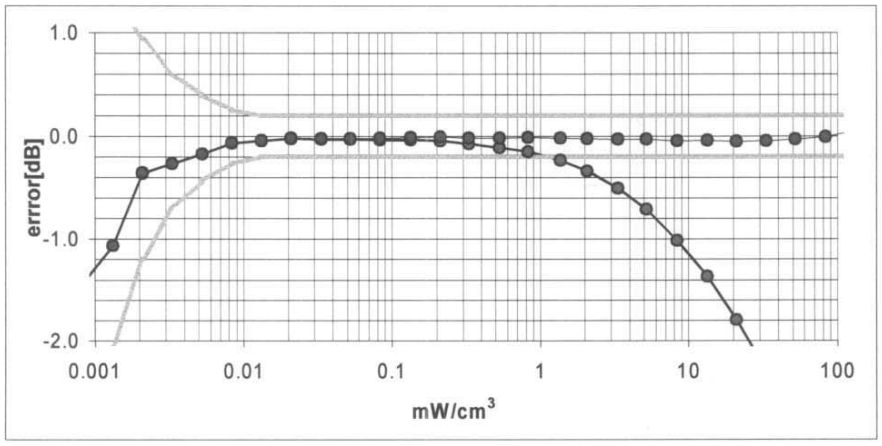

Probe Linearity Error < ± 0.2 dB

Conversion Factor Assessment

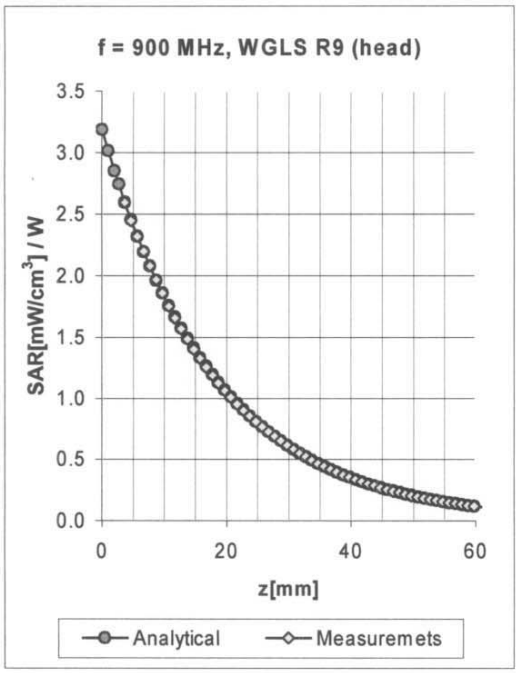

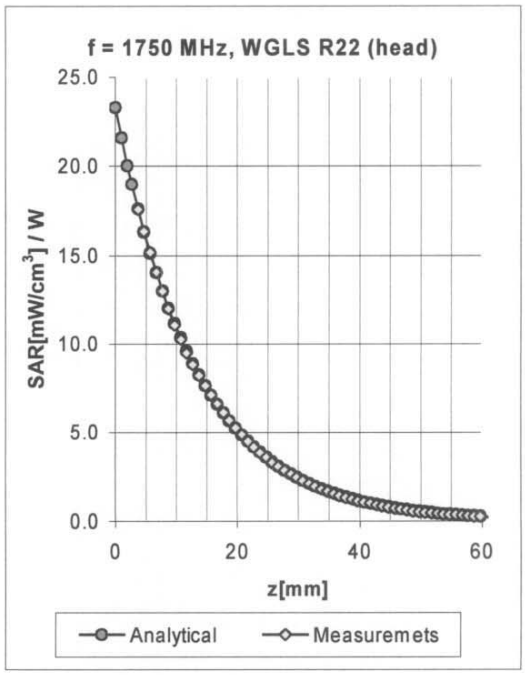

f [MHz]	Validity [MHz][B]	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
835	750-950	Head	41.5 ± 5%	0.90 ± 5%	0.68	1.64	6.71	± 11.9% (k=2)
1750	1700-1800	Head	40.0 ± 5%	1.40 ± 5%	0.43	2.67	5.28	± 9.7% (k=2)
1900	1850-1950	Head	40.0 ± 5%	1.40 ± 5%	0.46	2.81	5.03	± 9.7% (k=2)
2450	2400-2500	Head	39.2 ± 5%	1.80 ± 5%	0.81	1.95	4.44	± 9.7% (k=2)
835	750-950	Body	55.2 ± 5%	0.97 ± 5%	0.49	1.99	6.54	± 11.9% (k=2)
1750	1700-1800	Body	53.3 ± 5%	1.52 ± 5%	0.50	2.87	4.68	± 9.7% (k=2)
1900	1850-1950	Body	53.3 ± 5%	1.52 ± 5%	0.52	2.93	4.58	± 9.7% (k=2)
2450	2400-2500	Body	52.7 ± 5%	1.95 ± 5%	0.91	1.78	4.22	± 9.7% (k=2)

[B] The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (θ, ϕ), f = 900 MHz

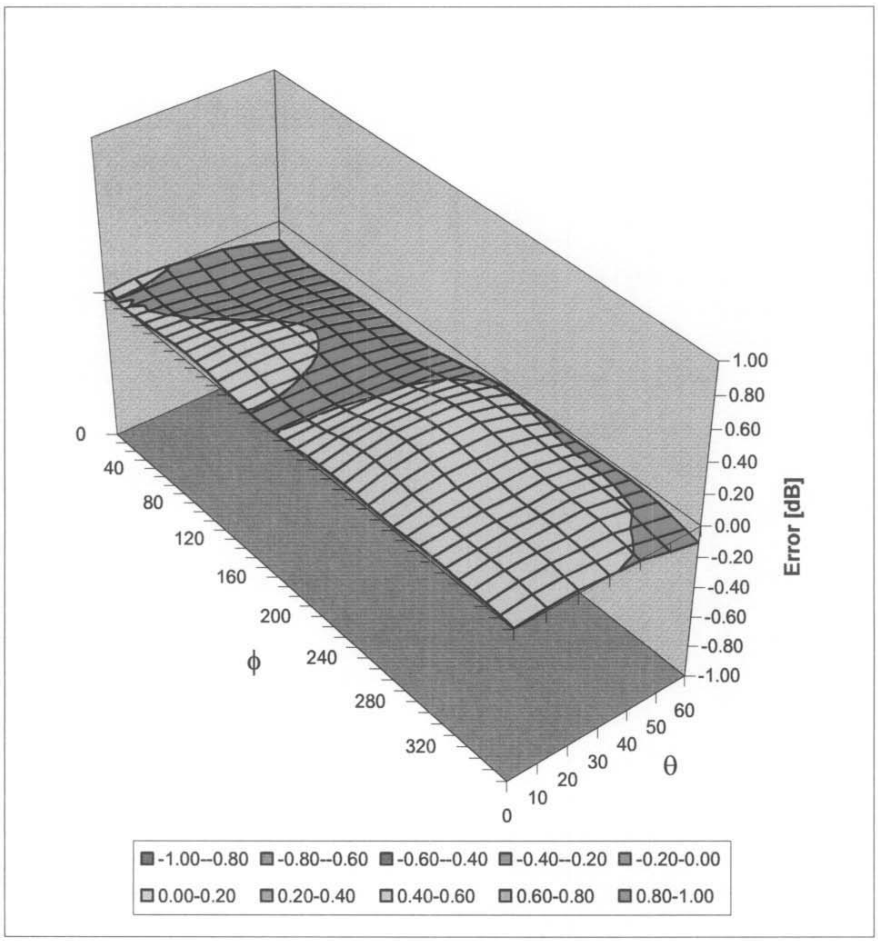

Spherical Isotropy Error < ± 0.4 dB

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, http://www.speag.com

Additional Conversion Factors

for Dosimetric E-Field Probe

Type:	**ET3DV6**
Serial Number:	**1590**
Place of Assessment:	**Zurich**
Date of Assessment:	**May 25, 2004**
Probe Calibration Date:	**May 24, 2004**

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, http://www.speag.com

Dosimetric E-Field Probe ET3DV6 SN:1590

Conversion factor (± standard deviation)

150 MHz	ConvF	**9.1 ± 8%**	ε_r **= 52.3 ± 5%** σ **= 0.76 ± 5% mho/m** (head tissue)
300 MHz	ConvF	**7.9 ± 8%**	ε_r **= 45.3 ± 5%** σ **= 0.87 ± 5% mho/m** (head tissue)
450 MHz	ConvF	**7.5 ± 8%**	ε_r **= 43.5 ± 5%** σ **= 0.87 ± 5% mho/m** (head tissue)
150 MHz	ConvF	**8.8 ± 8%**	ε_r **= 61.9 ± 5%** σ **= 0.80 ± 5% mho/m** (body tissue)
450 MHz	ConvF	**7.7 ± 8%**	ε_r **= 56.7 ± 5%** σ **= 0.94 ± 5% mho/m** (body tissue)

Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also Section 4.7 of the DASY4 Manual.

APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS

450 MHz System Performance Check & DUT Evaluation (Face)

Measured Fluid Dielectric Parameters (Brain)

October 20, 2004

Frequency	e'	e"
350.000000 MHz	46.4441	40.4550
360.000000 MHz	46.1177	39.7237
370.000000 MHz	45.8431	39.1833
380.000000 MHz	45.6592	38.4835
390.000000 MHz	45.4329	37.8138
400.000000 MHz	45.1993	37.3249
410.000000 MHz	44.9621	36.7377
420.000000 MHz	44.7606	36.1932
430.000000 MHz	44.4798	35.6564
440.000000 MHz	44.2192	35.1798
450.000000 MHz	43.9729	34.7886
460.000000 MHz	43.7210	34.4712
470.000000 MHz	43.5087	34.1079
480.000000 MHz	43.2986	33.7598
490.000000 MHz	43.0088	33.4051
500.000000 MHz	42.7762	33.0220
510.000000 MHz	42.5868	32.6473
520.000000 MHz	42.3825	32.3391
530.000000 MHz	42.2262	31.9861
540.000000 MHz	42.0457	31.6028
550.000000 MHz	41.9143	31.2871

450 MHz System Performance Check & DUT Evaluation (Face)

Measured Fluid Dielectric Parameters (Brain)

October 21, 2004

Frequency	e'	e"
350.000000 MHz	45.9099	39.9901
360.000000 MHz	45.5994	39.2952
370.000000 MHz	45.4525	38.7065
380.000000 MHz	45.2669	38.1859
390.000000 MHz	45.0034	37.8097
400.000000 MHz	44.7155	37.1637
410.000000 MHz	44.4632	36.5444
420.000000 MHz	44.2163	35.9639
430.000000 MHz	43.9795	35.3895
440.000000 MHz	43.7226	34.9401
450.000000 MHz	43.4754	34.5473
460.000000 MHz	43.3226	34.2218
470.000000 MHz	43.0673	33.9446
480.000000 MHz	42.8164	33.6265
490.000000 MHz	42.5299	33.2415
500.000000 MHz	42.2314	32.9263
510.000000 MHz	42.0842	32.5491
520.000000 MHz	41.9602	32.1821
530.000000 MHz	41.7926	31.8201
540.000000 MHz	41.6273	31.3519
550.000000 MHz	41.4032	31.0986

450 MHz DUT Evaluation (Body)

Measured Fluid Dielectric Parameters (Muscle)

October 21, 2004

Frequency	e'	e"
350.000000 MHz	58.6177	43.0377
360.000000 MHz	58.3982	42.2875
370.000000 MHz	58.1995	41.4694
380.000000 MHz	57.9892	40.7382
390.000000 MHz	57.8263	40.0449
400.000000 MHz	57.7721	39.4488
410.000000 MHz	57.6538	38.7233
420.000000 MHz	57.5736	38.1843
430.000000 MHz	57.4301	37.5601
440.000000 MHz	57.2973	37.0180
450.000000 MHz	57.0705	36.5550
460.000000 MHz	56.9234	36.1606
470.000000 MHz	56.7408	35.6972
480.000000 MHz	56.5579	35.2430
490.000000 MHz	56.3208	34.8358
500.000000 MHz	56.1232	34.4883
510.000000 MHz	55.9650	34.1282
520.000000 MHz	55.7907	33.8182
530.000000 MHz	55.6931	33.4520
540.000000 MHz	55.6121	33.0041
550.000000 MHz	55.5176	32.7254

450 MHz System Performance Check

Measured Fluid Dielectric Parameters (Brain)

October 22, 2004

Frequency	e'	e"
350.000000 MHz	45.3801	39.6430
360.000000 MHz	45.1262	38.8494
370.000000 MHz	44.8599	38.2234
380.000000 MHz	44.6925	37.6719
390.000000 MHz	44.4927	37.2167
400.000000 MHz	44.2972	36.7209
410.000000 MHz	44.1137	36.2473
420.000000 MHz	43.9093	35.7792
430.000000 MHz	43.7721	35.2446
440.000000 MHz	43.5529	34.8320
450.000000 MHz	43.2793	34.3714
460.000000 MHz	43.0357	33.9179
470.000000 MHz	42.7777	33.4865
480.000000 MHz	42.5202	33.1090
490.000000 MHz	42.1455	32.6978
500.000000 MHz	41.8503	32.3769
510.000000 MHz	41.5978	32.0462
520.000000 MHz	41.4525	31.8094
530.000000 MHz	41.3304	31.5778
540.000000 MHz	41.2225	31.2174
550.000000 MHz	41.0970	30.9585

450 MHz DUT Evaluation (Body)

Measured Fluid Dielectric Parameters (Muscle)

October 22, 2004

Frequency	e'	e"
350.000000 MHz	58.0021	42.3560
360.000000 MHz	57.7280	41.5672
370.000000 MHz	57.5589	40.8589
380.000000 MHz	57.3966	40.1507
390.000000 MHz	57.2843	39.4454
400.000000 MHz	57.2496	38.8002
410.000000 MHz	57.1622	38.1502
420.000000 MHz	57.0575	37.6120
430.000000 MHz	56.9383	37.0293
440.000000 MHz	56.8046	36.5510
450.000000 MHz	56.5972	36.0113
460.000000 MHz	56.4093	35.6677
470.000000 MHz	56.2102	35.1844
480.000000 MHz	55.9877	34.7704
490.000000 MHz	55.7430	34.3777
500.000000 MHz	55.5711	34.0370
510.000000 MHz	55.4175	33.6707
520.000000 MHz	55.2868	33.3793
530.000000 MHz	55.1567	33.0649
540.000000 MHz	55.0655	32.6868
550.000000 MHz	55.0057	32.3610

450 MHz System Performance Check

Measured Fluid Dielectric Parameters (Brain)

October 23, 2004

Frequency	e'	e"
350.000000 MHz	45.7729	40.0313
360.000000 MHz	45.3739	39.3362
370.000000 MHz	45.1563	38.6786
380.000000 MHz	44.9662	38.0733
390.000000 MHz	44.7405	37.4606
400.000000 MHz	44.4812	36.9876
410.000000 MHz	44.2627	36.4303
420.000000 MHz	44.1101	35.9896
430.000000 MHz	43.9169	35.4282
440.000000 MHz	43.7002	34.9818
450.000000 MHz	43.4161	34.5284
460.000000 MHz	43.2093	34.2029
470.000000 MHz	43.0215	33.7716
480.000000 MHz	42.8115	33.3796
490.000000 MHz	42.4683	32.9740
500.000000 MHz	42.1925	32.5921
510.000000 MHz	41.9587	32.3027
520.000000 MHz	41.7807	31.9994
530.000000 MHz	41.6029	31.6595
540.000000 MHz	41.4919	31.3046
550.000000 MHz	41.2500	31.0715

450 MHz DUT Evaluation (Body)

Measured Fluid Dielectric Parameters (Muscle)

October 23, 2004

Frequency	e'	e"
350.000000 MHz	58.3728	42.2720
360.000000 MHz	58.0943	41.5182
370.000000 MHz	57.9564	40.8484
380.000000 MHz	57.8730	40.2013
390.000000 MHz	57.6876	39.6344
400.000000 MHz	57.5656	39.0187
410.000000 MHz	57.4712	38.2482
420.000000 MHz	57.3525	37.6674
430.000000 MHz	57.2254	37.0230
440.000000 MHz	57.0144	36.5287
450.000000 MHz	56.8265	36.0602
460.000000 MHz	56.7106	35.5867
470.000000 MHz	56.4923	35.2168
480.000000 MHz	56.2301	34.8086
490.000000 MHz	55.9861	34.5194
500.000000 MHz	55.8322	34.1182
510.000000 MHz	55.6868	33.7295
520.000000 MHz	55.6118	33.4056
530.000000 MHz	55.5158	33.0472
540.000000 MHz	55.4341	32.6319
550.000000 MHz	55.2661	32.3142

450 MHz System Performance Check

Measured Fluid Dielectric Parameters (Brain)

October 24, 2004

Frequency	e'	e"
350.000000 MHz	45.9174	39.5864
360.000000 MHz	45.6161	38.9816
370.000000 MHz	45.3750	38.3796
380.000000 MHz	45.2510	37.7493
390.000000 MHz	45.0326	37.0988
400.000000 MHz	44.8065	36.4815
410.000000 MHz	44.6100	35.7264
420.000000 MHz	44.3088	35.1713
430.000000 MHz	44.0665	34.6048
440.000000 MHz	43.8294	34.2638
450.000000 MHz	43.5432	33.8997
460.000000 MHz	43.2842	33.6309
470.000000 MHz	42.9890	33.3446
480.000000 MHz	42.7982	33.0814
490.000000 MHz	42.5558	32.7688
500.000000 MHz	42.3496	32.4125
510.000000 MHz	42.1609	32.0176
520.000000 MHz	42.0258	31.6122
530.000000 MHz	41.8630	31.2104
540.000000 MHz	41.6823	30.7711
550.000000 MHz	41.5047	30.4951

450 MHz DUT Evaluation (Body)

Measured Fluid Dielectric Parameters (Muscle)

October 24, 2004

Frequency	e'	e"
350.000000 MHz	59.0372	42.3676
360.000000 MHz	58.8213	41.6658
370.000000 MHz	58.6414	40.9821
380.000000 MHz	58.5950	40.2525
390.000000 MHz	58.4174	39.4596
400.000000 MHz	58.2791	38.7385
410.000000 MHz	58.1348	37.9674
420.000000 MHz	57.9498	37.2884
430.000000 MHz	57.7888	36.6538
440.000000 MHz	57.6263	36.1821
450.000000 MHz	57.3534	35.7904
460.000000 MHz	57.2113	35.5198
470.000000 MHz	57.0030	35.2004
480.000000 MHz	56.8775	34.8852
490.000000 MHz	56.7193	34.5533
500.000000 MHz	56.5760	34.1782
510.000000 MHz	56.4135	33.7696
520.000000 MHz	56.3477	33.3194
530.000000 MHz	56.2089	32.8347
540.000000 MHz	56.0940	32.3360
550.000000 MHz	55.9554	32.0268